




Engineering Solutions & Electromagnetic Compatibility Services

Limited Modular Approval Certification Application Report
FCC Part 15.249 & Industry Canada RSS-210

Test Lab		Applicant	
Rhein Tech Laboratories, Inc. Tel: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 www.rheintech.com Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com		Fleetwood Group, Inc. Tel: 616-820-8271 P.O. Box 1259 Fax: 616-820-8300 Holland, MI 49422 Contact: Emil Ureel	
FCC ID IC		Test Report Date	
Platform		RTL Work Order #	
Model		RTL Quote #	
American National Standard Institute		ANSI C63.4-2003: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	
FCC Classification		DXT – Part 15 Low Power Transceiver	
FCC Rule Part(s)/ Guidance		15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHZ, and 24.0-24.25 GHz, October 1, 2012	
Industry Canada		RSS-210 Issue 8: License-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment	
Digital Interface Information		Digital Interface was found to be compliant	
Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
2401 – 2475	N/A	N/A	774KFXD

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, RSS-210, and ANSI C63.4.

Signature: 

Date: December 22, 2012

Typed/Printed Name: Desmond A. Fraser

Position: President

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Fleetwood Group, Inc. The test results relate only to the item(s) tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACCLASS. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	General Information	5
1.1	Scope	5
1.2	Description of EUT	5
1.3	Test Facility	5
1.4	Related Submittal(s)/Grant(s)	5
1.5	Modifications	5
2	Test Information	6
2.1	Description of Test Modes	6
2.2	Exercising the EUT	6
2.3	Test Result Summary	6
2.4	Test System Details	7
2.5	Configuration of Tested System	7
3	Duty Cycle Calculation - FCC §15.35(c), RSS-Gen §4.3	8
4	Radiated Emissions – FCC §15.209, §15.249(a); RSS-210 §A2.9; RSS-Gen	12
4.1	Limits of Radiated Emissions Measurement	12
4.2	Radiated Emissions Measurement Test Procedure	12
4.3	Radiated Emissions Test Results	14
4.4	Radiated Emissions Harmonics/Spurious Test Data	15
4.5	Radiated Emissions Digital Test Data	17
5	AC Conducted Emissions - FCC §15.207; RSS-Gen §7.2.4: Conducted Limits	18
6	20 dB Bandwidth – IC RSS-Gen	18
6.1	20 dB Bandwidth Test Procedure	18
6.2	20 dB Modulated Bandwidth Test Data	18
6.3	20 dB Bandwidth Plots	19
7	Conclusion	22

Figure Index

Figure 2-1: Configuration of System Under Test.....	7
---	---

Table Index

Table 2-1: Channels Tested	6
Table 2-2: Test Result Summary – FCC Part 15, Subpart C (Section 15.249).....	6
Table 2-3: Equipment Under Test	7
Table 3-1: Duty Cycle Test Equipment.....	8
Table 4-1: Radiated Emissions Test Equipment	13
Table 4-2: Radiated Emissions Test Data (Standard).....	14
Table 4-3: Radiated Emissions Test Data (Low Profile)	14
Table 4-4: Radiated Emissions Harmonics/Spurious - 2401 MHz (Standard).....	15
Table 4-5: Radiated Emissions Harmonics/Spurious - 2437 MHz (Standard).....	15
Table 4-6: Radiated Emissions Harmonics/Spurious - 2475 MHz (Standard).....	15
Table 4-7: Radiated Emissions Harmonics/Spurious - 2401 MHz (Low Profile).....	16
Table 4-8: Radiated Emissions Harmonics/Spurious - 2437 MHz (Low Profile).....	16
Table 4-9: Radiated Emissions Harmonics/Spurious - 2475 MHz (Low Profile).....	16
Table 4-10: Digital Radiated Emissions Test Data (Standard).....	17
Table 4-11: Digital Radiated Emissions Test Data (Low Profile)	17
Table 6-1: 20 dB Bandwidth Test Equipment.....	18
Table 6-2: 20 dB Modulated Bandwidth Test Data	18

Plot Index

Plot 3-1: Duty Cycle On Time; 192.3 μ s	9
Plot 3-2: Duty Cycle On Time + Off Time; 3.013 ms	10
Plot 3-3: Number of Pulses in 100 ms (34).....	11
Plot 6-1: 20 dB Bandwidth; 2401 MHz.....	19
Plot 6-2: 20 dB Bandwidth; 2437 MHz.....	20
Plot 6-3: 20 dB Bandwidth; 2475 MHz.....	21

Appendix Index

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093; IC RSS-Gen: RF Exposure.....	23
Appendix B:	Agency Authorization Letter	24
Appendix C:	FCC Confidentiality Request Letter.....	25
Appendix D:	FCC Part 15 Unlicensed Modular Transmitter Equipment Approval	26
Appendix E:	IC Letters.....	27
Appendix F:	Canadian Based Representative Attestation Letter	28
Appendix G:	IC Confidentiality Request Letter.....	29
Appendix H:	RSS-Gen 3.2.3 Limited Modular Approval	30
Appendix I:	Label and Label Location	31
Appendix J:	Technical Operational Description	32
Appendix K:	Schematics.....	33
Appendix L:	Block Diagram	34
Appendix M:	Manual.....	35
Appendix N:	Test Photographs	36
Appendix O:	External Photographs	42
Appendix P:	Internal Photographs	47

Photograph Index

Photograph 1:	“Contains FCC ID.....” Statement on Typical Enclosure	31
Photograph 2:	Radiated Testing – Front View – Typical Host.....	36
Photograph 3:	Radiated Testing – Back View – Typical Host	37
Photograph 4:	Radiated Testing – Front View – Standalone – Low Profile XTAL	38
Photograph 5:	Radiated Testing – Back View – Standalone – Low Profile XTAL	39
Photograph 6:	Radiated Testing – Front View – Standalone – Standard XTAL.....	40
Photograph 7:	Radiated Testing – Back View – Standalone – Standard XTAL	41
Photograph 8:	Top View	42
Photograph 9:	Bottom View	43
Photograph 10:	Side View	44
Photograph 11:	End View	45
Photograph 12:	Typical Enclosure	46
Photograph 13:	Top View	47
Photograph 14:	Bottom View	48
Photograph 15:	Side View	49
Photograph 16:	End View	50

1 General Information

1.1 Scope

This is an original certification application request for Limited Modular Approval.

Applicable Standards:

- FCC Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz
- Industry Canada RSS-210: Low Power License-Exempt Communications Devices

1.2 Description of EUT

Equipment Under Test	Transceiver
Model	E240D
Power Supply	3VDC, CR1220a, cell or super-capacitor
Modulation Type	GFSK
Frequency Range	2401 – 2475 MHz
Antenna Connector Type	PCB Trace type
Antenna Type	Internal

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4-2003).

1.4 Related Submittal(s)/Grant(s)

This is an original certification application for Limited Modular Approval for Fleetwood Group, Inc., Model: E240D, FCC ID: FBRE240D, IC: 1859A-E240D.

1.5 Modifications

No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236

2 Test Information

2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested:

Table 2-1: Channels Tested

Channel	Frequency
Low	2401
Middle	2437
High	2475

2.2 Exercising the EUT

The EUT was supplied with test firmware programmed with a high, mid, and low channel for testing, as well as a low, mid, and high power. The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted. Four power levels were available for testing.

2.3 Test Result Summary

Table 2-2: Test Result Summary – FCC Part 15, Subpart C (Section 15.249)

Standard	Test	Pass/Fail or N/A
FCC 15.207	AC Power Conducted Emissions	N/A
FCC 15.209	Radiated Emissions	Pass
FCC 15.249(a)	Field Strength of Fundamental and Harmonics	Pass
RSS-Gen	20 dB Bandwidth	Pass

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236

2.4 Test System Details

The test samples were received on December 17, 2012. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following table.

Table 2-3: Equipment Under Test

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Transceiver	Fleetwood Group, Inc.	E240D	Standard 1	FBRE240D	N/A	20924
Transceiver	Fleetwood Group, Inc	E240D	Low Profile 2	FBRE240D	N/A	20925

2.5 Configuration of Tested System

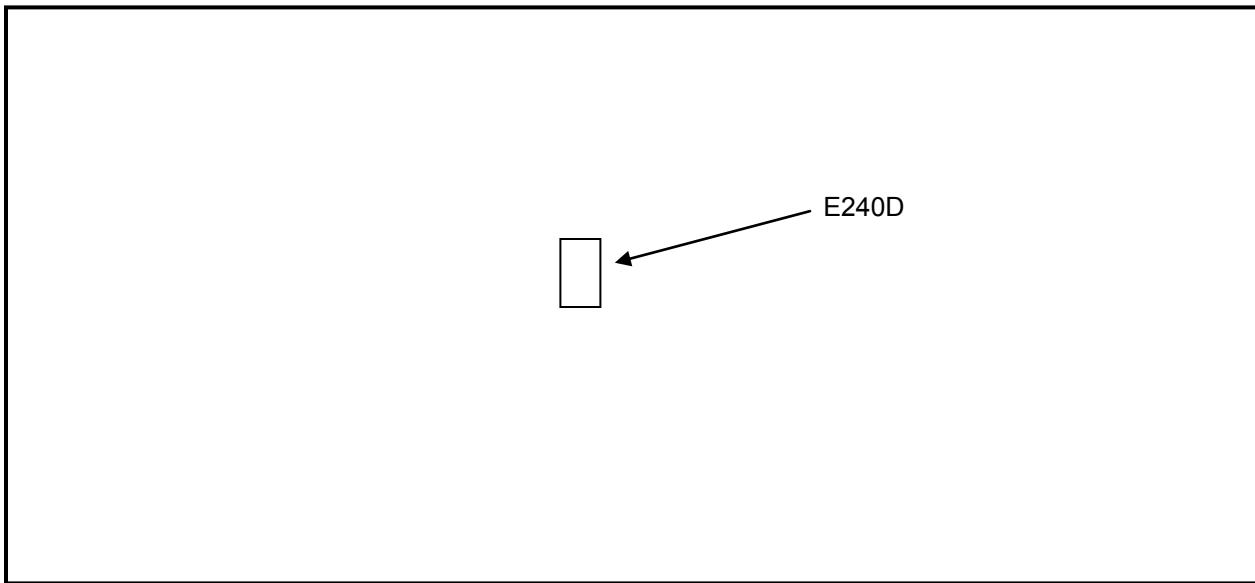


Figure 2-1: Configuration of System Under Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236

3 Duty Cycle Calculation - FCC §15.35(c), RSS-Gen §4.3

A standard transmission consists of a 192.3 μ s data packet with a 3.013 ms transmission period. Therefore, the maximum aggregate on time within a transmission period of 100 ms is $20\log(0.1923/3.013)$ or -23.9 dB.

Duty cycle = $20\log(\text{on time}/(\text{on time} + \text{off time})) = 20\log(0.1923/3.013) = -23.9$ dB

Or, on time in 100ms = 0.1923×34 pulses = 6.5382 ms and $20 \log(6.5382/100) = -23.7$ dB

The duty cycle correction is 23.7 dB.


Table 3-1: Duty Cycle Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236


Plot 3-1: Duty Cycle On Time; 192.3 μ s

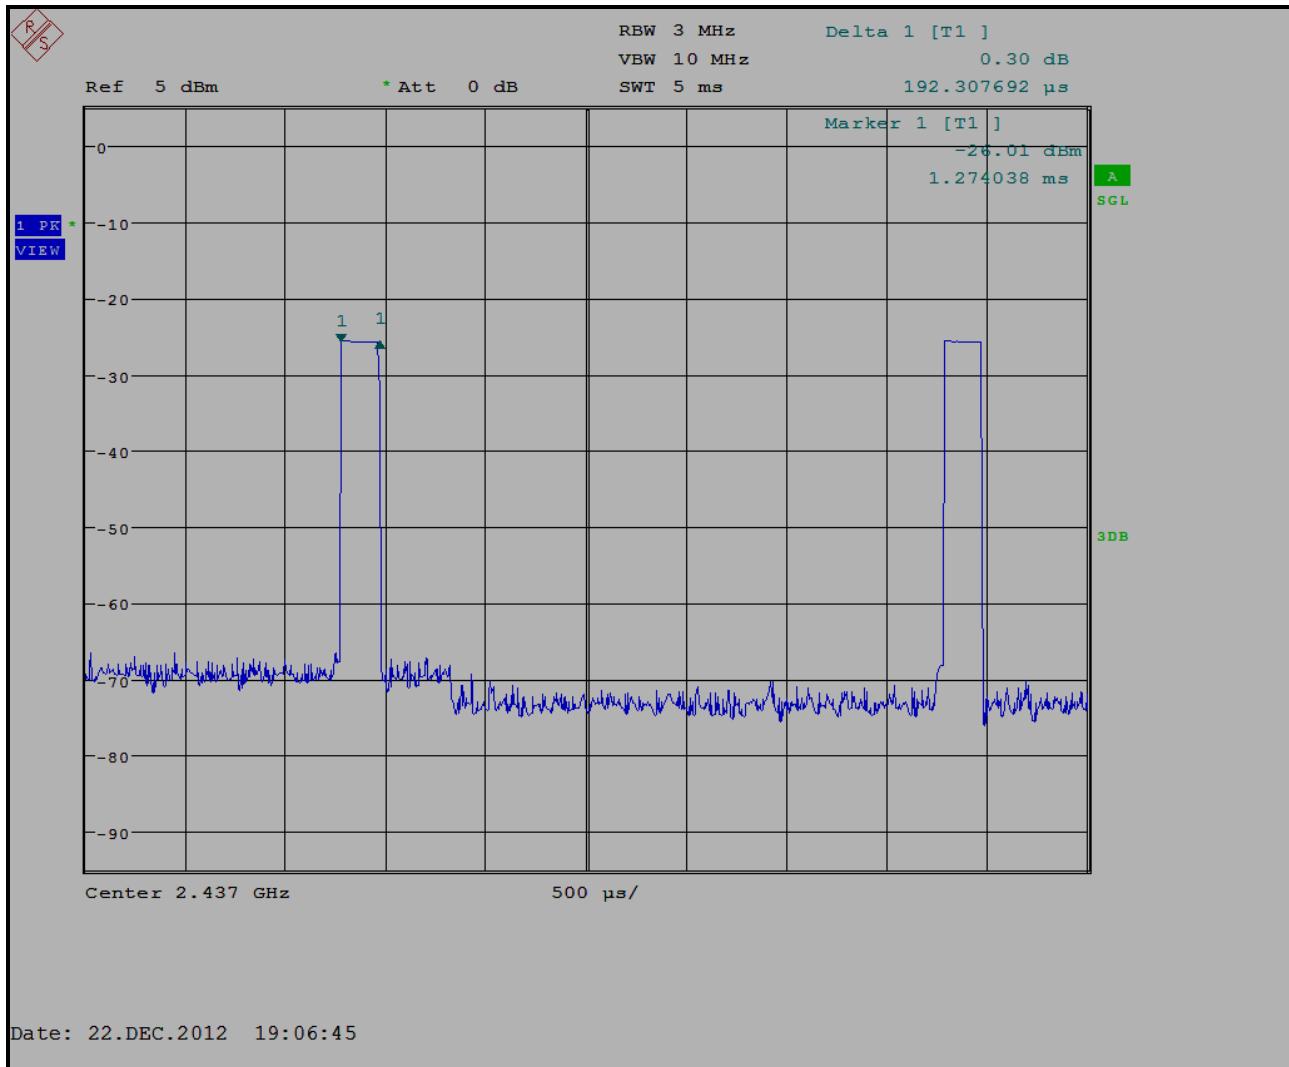

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236


Plot 3-2: Duty Cycle On Time + Off Time; 3.013 ms

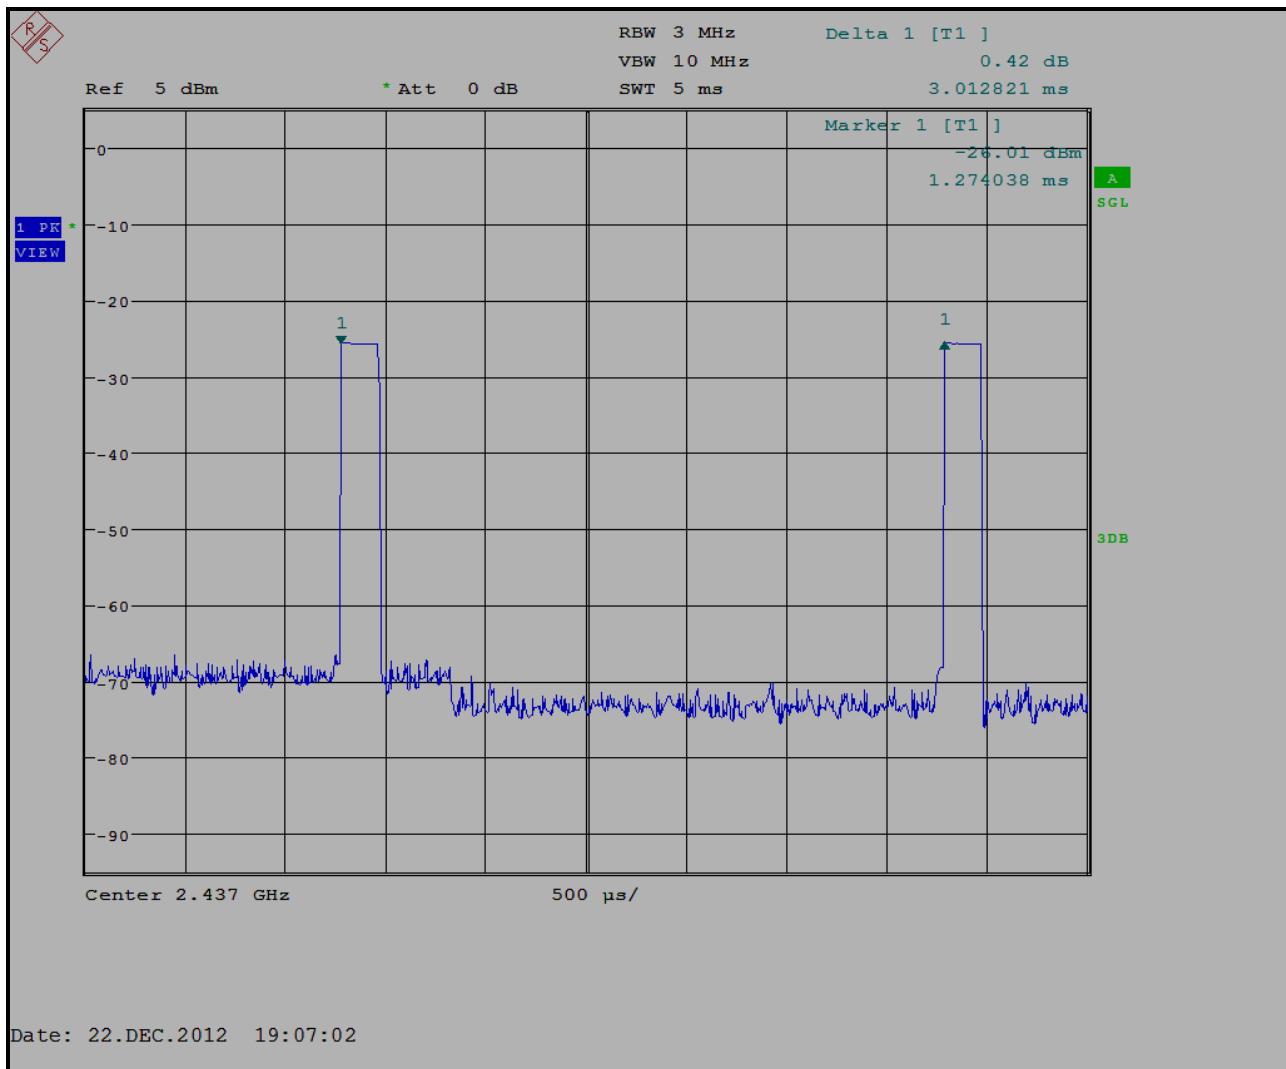

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236

Plot 3-3: Number of Pulses in 100 ms (34)

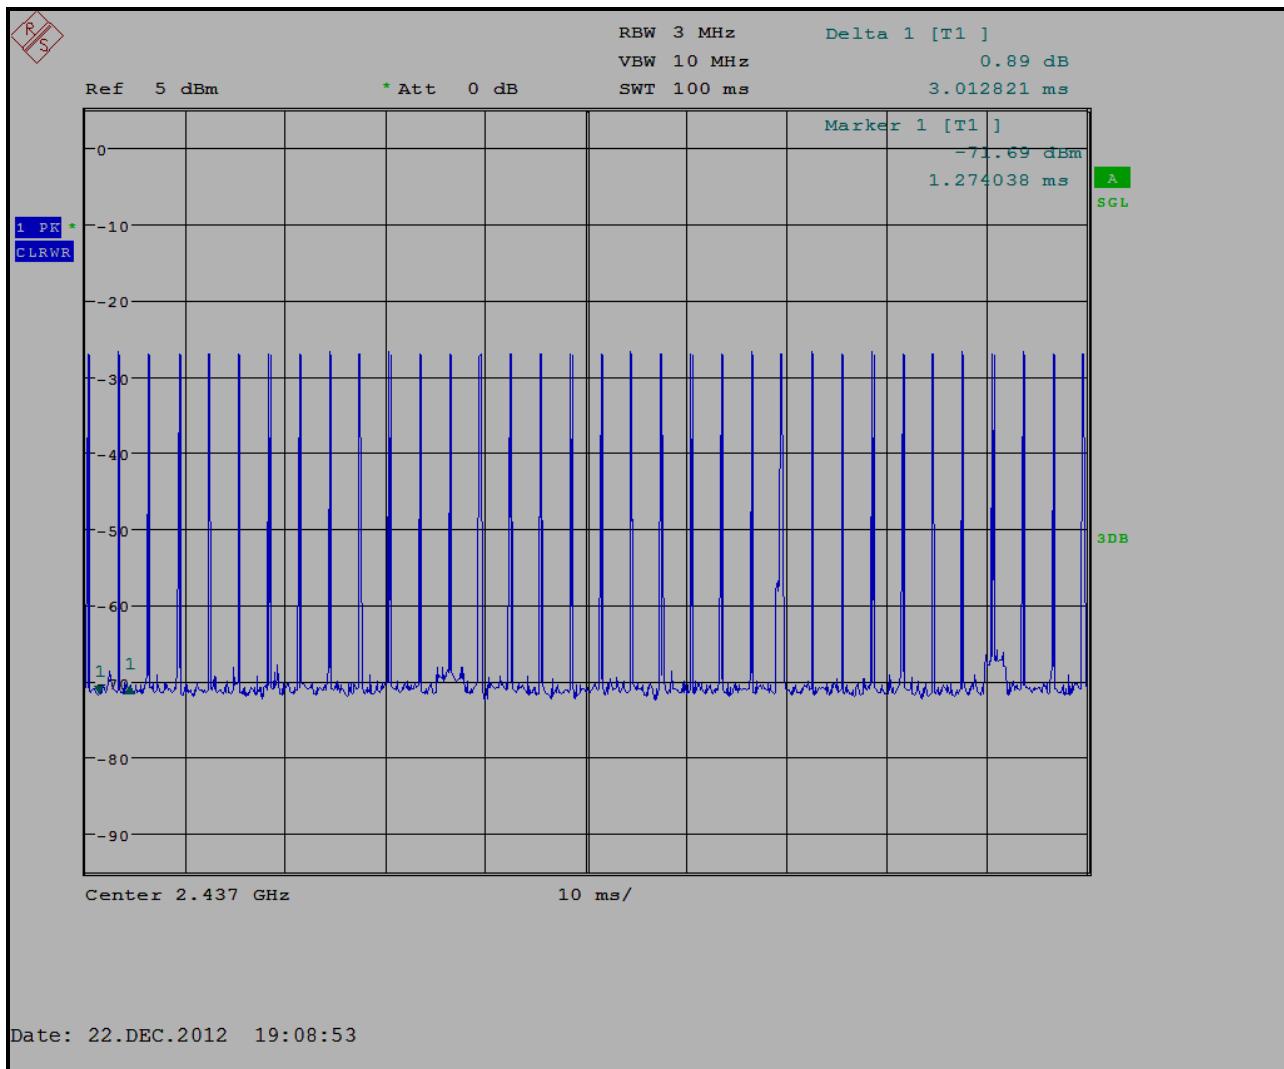

Test Personnel:

Daniel W. Baltzell
Test Engineer

Signature

December 22, 2012
Date of Test

4 Radiated Emissions – FCC §15.209, §15.249(a); RSS-210 §A2.9; RSS-Gen

4.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any circumstances of modulation.

4.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (24.8 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236

Table 4-1: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900151	Rohde and Schwarz	HFH2-Z2	Loop Antenna (9 kHz-30 MHz)	827525/019	10/1/13
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1-26.5 GHz)	3008A00505	7/14/13
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamplifier 40dB (30 MHz-2 GHz)	1006	7/14/13
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/16/13
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/13
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900772	EMCO	3161-02	Horn Antenna (2-4 GHz)	9804-1044	4/19/14
900321	EMCO	3161-03	Horn Antenna (4.0-8.2 GHz)	9508-1020	4/19/14
900323	EMCO	3160-07	Horn Antenna (8.2-12.4 GHz)	9605-1054	4/19/14
900356	EMCO	3160-08	Horn Antenna (12.4-18 GHz)	9607-1044	4/19/14
900325	EMCO	3160-9	Horn Antenna (18-26.5 GHz)	9605-1051	4/19/14
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13
900724	Antenna Research Associates, Inc.	LPB-2520	BiLog Antenna (25-1000 MHz)	1037	4/19/14
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 kHz-6.5 GHz)	3325A00159	9/20/13
900914	Hewlett Packard	85460A	RF Filter Section (100 kHz-6.5 GHz)	3330A00107	9/20/13

4.3 Radiated Emissions Test Results

Table 4-2: Radiated Emissions Test Data (Standard)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-23.7 dB)	Average Limit (dBuV/m)	Average Margin (dB)
2401.0	108.6	-9.0	99.6	114.0	-16.8	75.9	94.0	-18.1
2437.0	108.9	-9.0	99.9	114.0	-15.4	76.2	94.0	-17.8
2475.0	109.7	-9.1	100.6	114.0	-16.2	76.9	94.0	-17.1

* testing performed at 3m

Table 4-3: Radiated Emissions Test Data (Low Profile)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-23.7 dB)	Average Limit (dBuV/m)	Average Margin (dB)
2401.0	108.1	-9.0	99.1	114.0	-16.8	75.4	94.0	-18.6
2437.0	108.1	-9.0	99.1	114.0	-15.4	75.4	94.0	-18.6
2475.0	108.3	-9.1	99.2	114.0	-16.2	75.5	94.0	-18.5

* testing performed at 3m

4.4 Radiated Emissions Harmonics/Spurious Test Data

Table 4-4: Radiated Emissions Harmonics/Spurious - 2401 MHz (Standard)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW) 1m	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-23.7 dB)	Average Limit (dBuV/m)	Average Margin (dB)
4802.0	57.2	-1.1	56.1	74.0	-17.9	32.4	54.0	-21.6
7203.0	57.8	0.8	58.6	74.0	-15.4	34.9	54.0	-19.1
9604.0	43.1	6.7	49.8	74.0	-24.2	26.1	54.0	-27.9
12005.0	41.9	9.8	51.7	74.0	-22.3	28.0	54.0	-26.0

Table 4-5: Radiated Emissions Harmonics/Spurious - 2437 MHz (Standard)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW) 1m	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-23.7 dB)	Average Limit (dBuV/m)	Average Margin (dB)
4874.0	57.4	-1.0	56.4	74.0	-17.6	32.7	54.0	-21.3
7311.0	55.3	0.9	56.2	74.0	-17.8	32.5	54.0	-21.5
9748.0	42.2	6.8	49.0	74.0	-25.0	25.3	54.0	-28.7
12185.0	42.2	11.1	53.3	74.0	-20.7	29.6	54.0	-24.4

Table 4-6: Radiated Emissions Harmonics/Spurious - 2475 MHz (Standard)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW) 1m	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-23.7 dB)	Average Limit (dBuV/m)	Average Margin (dB)
4950.0	58.8	-1.0	57.8	74.0	-16.2	34.1	54.0	-19.9
7425.0	55.2	1.1	56.3	74.0	-17.7	32.6	54.0	-21.4
9900.0	44.6	7.0	51.6	74.0	-22.4	27.9	54.0	-26.1
12375.0	32.8	12.4	45.2	74.0	-28.8	21.5	54.0	-32.5

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236

Table 4-7: Radiated Emissions Harmonics/Spurious - 2401 MHz (Low Profile)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW) 1m	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-23.7 dB)	Average Limit (dBuV/m)	Average Margin (dB)
4802.0	56.4	-1.1	55.3	74.0	-18.7	31.6	54.0	-22.4
7203.0	57.1	0.8	57.9	74.0	-16.1	34.2	54.0	-19.8
9604.0	43.0	6.7	49.7	74.0	-24.3	26.0	54.0	-28.0
12005.0	35.3	9.8	45.1	74.0	-28.9	21.4	54.0	-32.6

Table 4-8: Radiated Emissions Harmonics/Spurious - 2437 MHz (Low Profile)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW) 1m	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-23.7 dB)	Average Limit (dBuV/m)	Average Margin (dB)
4874.0	56.8	-1.0	55.8	74.0	-18.2	32.1	54.0	-21.9
7311.0	51.5	0.9	52.4	74.0	-21.6	28.7	54.0	-25.3
9748.0	44.2	6.8	51.0	74.0	-23.0	27.3	54.0	-26.7
12185.0	37.4	11.1	48.5	74.0	-25.5	24.8	54.0	-29.2

Table 4-9: Radiated Emissions Harmonics/Spurious - 2475 MHz (Low Profile)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW) 1m	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-23.7 dB)	Average Limit (dBuV/m)	Average Margin (dB)
4950.0	58.8	-1.0	57.8	74.0	-16.2	34.1	54.0	-19.9
7425.0	49.2	1.1	50.3	74.0	-23.7	26.6	54.0	-27.4
9900.0	39.7	7.0	46.7	74.0	-27.3	23.0	54.0	-31.0
12375.0	39.6	12.4	52.0	74.0	-22.0	28.3	54.0	-25.7

4.5 Radiated Emissions Digital Test Data

Table 4-10: Digital Radiated Emissions Test Data (Standard)

Temperature: 29°F Humidity: 46%										
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
32.000	Qp	V	0	1.0	36.4	-15.8	20.6	40.0	-19.4	Pass
47.836	Qp	H	0	1.0	31.9	-22.3	9.6	40.0	-30.4	Pass
86.728	Qp	H	0	1.0	30.7	-23.5	7.2	40.0	-32.8	Pass
122.785	Qp	V	0	1.0	28.5	-19.9	8.6	43.5	-34.9	Pass
160.766	Qp	V	0	1.0	29.5	-21.8	7.7	43.5	-35.8	Pass
260.349	Qp	H	0	1.0	31.0	-16.9	14.1	46.0	-31.9	Pass
368.846	Qp	H	0	1.0	30.5	-15.3	15.2	46.0	-30.8	Pass
483.974	Qp	V	0	1.0	30.8	-12.3	18.5	46.0	-27.5	Pass
916.103	Qp	V	0	1.0	35.3	-5.7	29.6	46.0	-16.4	Pass
1039.380	Av	H	0	1.0	36.9	-4.2	32.7	54.0	-21.3	Pass
1398.280	Av	H	0	1.0	35.2	0.9	36.1	54.0	-17.9	Pass
1742.280	Av	H	0	1.0	36.2	3.7	39.9	54.0	-14.1	Pass

Table 4-11: Digital Radiated Emissions Test Data (Low Profile)

Temperature: 29°F Humidity: 46%										
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
32.000	Qp	V	0	1.0	36.3	-15.8	20.5	40.0	-19.5	Pass
47.836	Qp	H	0	1.0	31.9	-22.3	9.6	40.0	-30.4	Pass
86.728	Qp	H	0	1.0	31.1	-23.5	7.6	40.0	-32.4	Pass
122.785	Qp	V	0	1.0	29.1	-19.9	9.2	43.5	-34.3	Pass
160.766	Qp	V	0	1.0	29.7	-21.8	7.9	43.5	-35.6	Pass
260.349	Qp	H	0	1.0	29.9	-16.9	13.0	46.0	-33.0	Pass
368.846	Qp	H	0	1.0	30.4	-15.3	15.1	46.0	-30.9	Pass
483.974	Qp	V	0	1.0	30.7	-12.3	18.4	46.0	-27.6	Pass
916.103	Qp	V	0	1.0	35.6	-5.7	29.9	46.0	-16.1	Pass
1039.380	Av	H	0	1.0	36.7	-4.2	32.5	54.0	-21.5	Pass
1398.280	Av	H	0	1.0	35.0	0.9	35.9	54.0	-18.1	Pass
1742.280	Av	H	0	1.0	36.3	3.7	40.0	54.0	-14.0	Pass

Test Personnel:

Daniel W. Baltzell

Test Engineer



December 22, 2012

Signature

Date of Tests

5 AC Conducted Emissions - FCC §15.207; RSS-Gen §7.2.4: Conducted Limits

No AC line conducted tests are required since the device is powered solely by a 3 VDC "CR1220a" size cell.

6 20 dB Bandwidth – IC RSS-Gen

6.1 20 dB Bandwidth Test Procedure

The minimum 20 dB bandwidths per RSS-Gen were measured using a 50-ohm spectrum analyzer. The modulated carrier was adjusted on the analyzer so that it was displayed entirely on the spectrum analyzer. The sweep time was auto and allowed through several sweeps with the max hold function used in peak detector mode. The resolution bandwidth was set to 100 kHz, and the video bandwidth set to 1 MHz. The table below contains the bandwidth measurement results.

Table 6-1: 20 dB Bandwidth Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13

6.2 20 dB Modulated Bandwidth Test Data


Table 6-2: 20 dB Modulated Bandwidth Test Data

Minimum 20 dB bandwidths

Channel	20 dB Bandwidth (kHz)
1	730.8
37	730.8
75	774.0

6.3 20 dB Bandwidth Plots


Plot 6-1: 20 dB Bandwidth; 2401 MHz

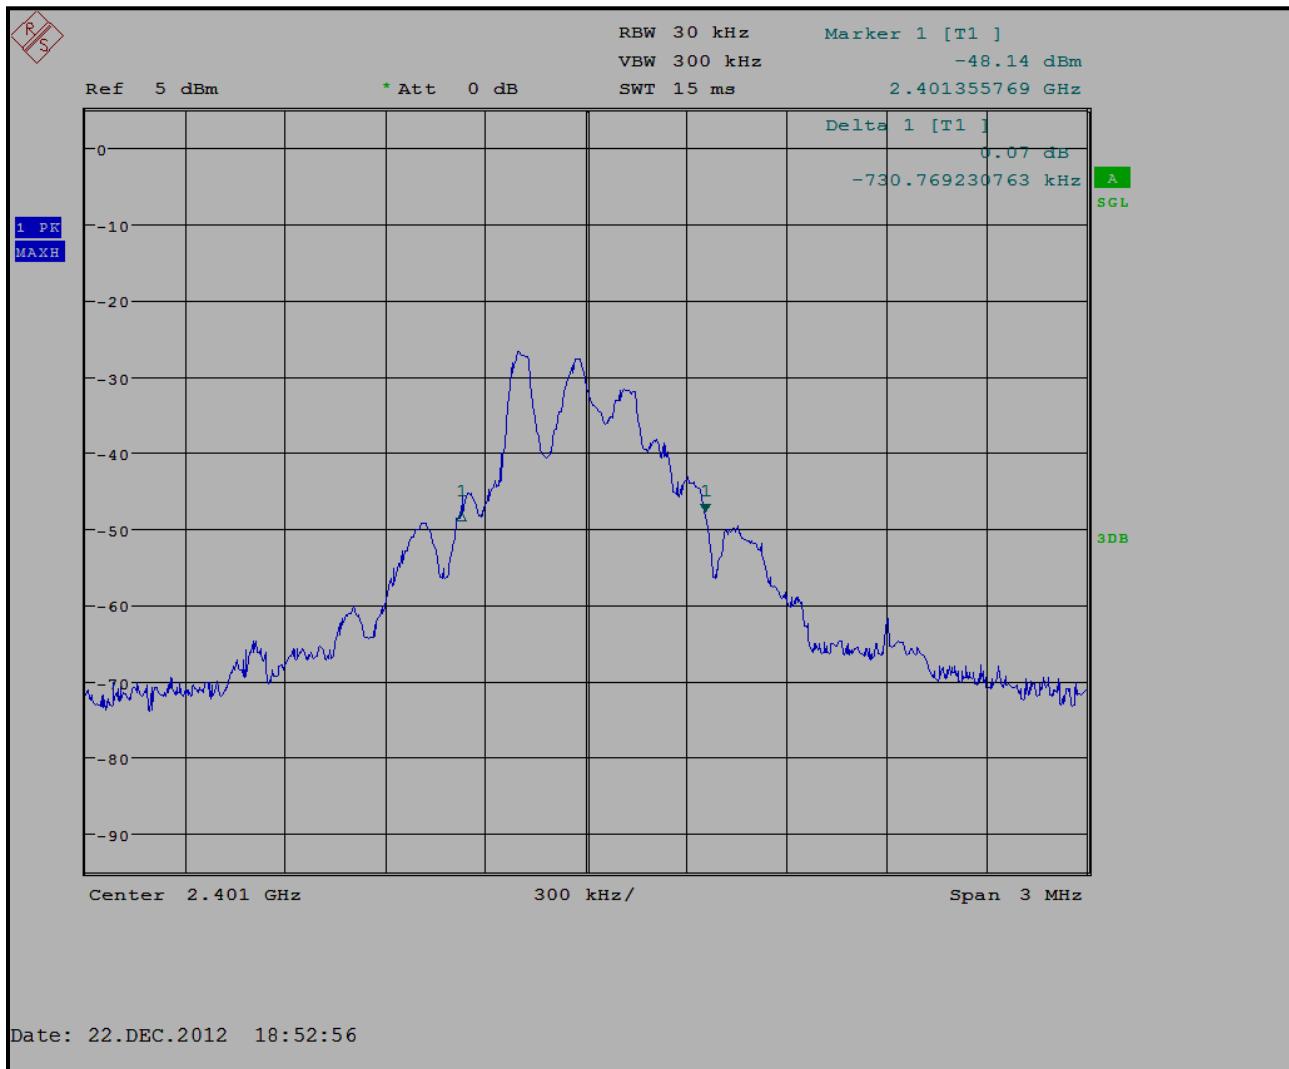

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236


Plot 6-2: 20 dB Bandwidth; 2437 MHz

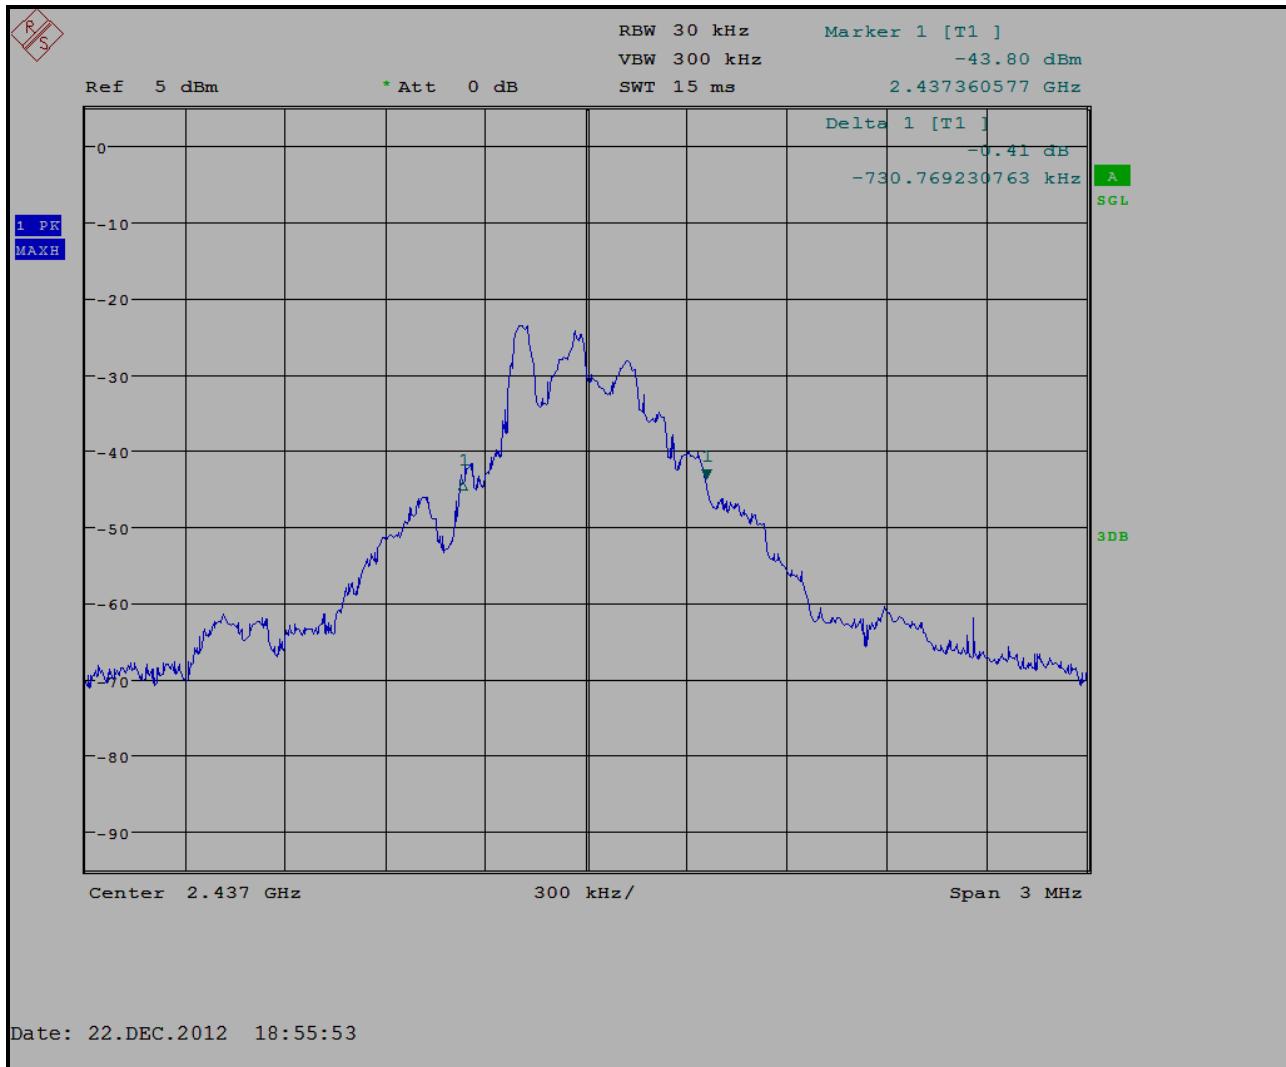

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236

Plot 6-3: 20 dB Bandwidth; 2475 MHz

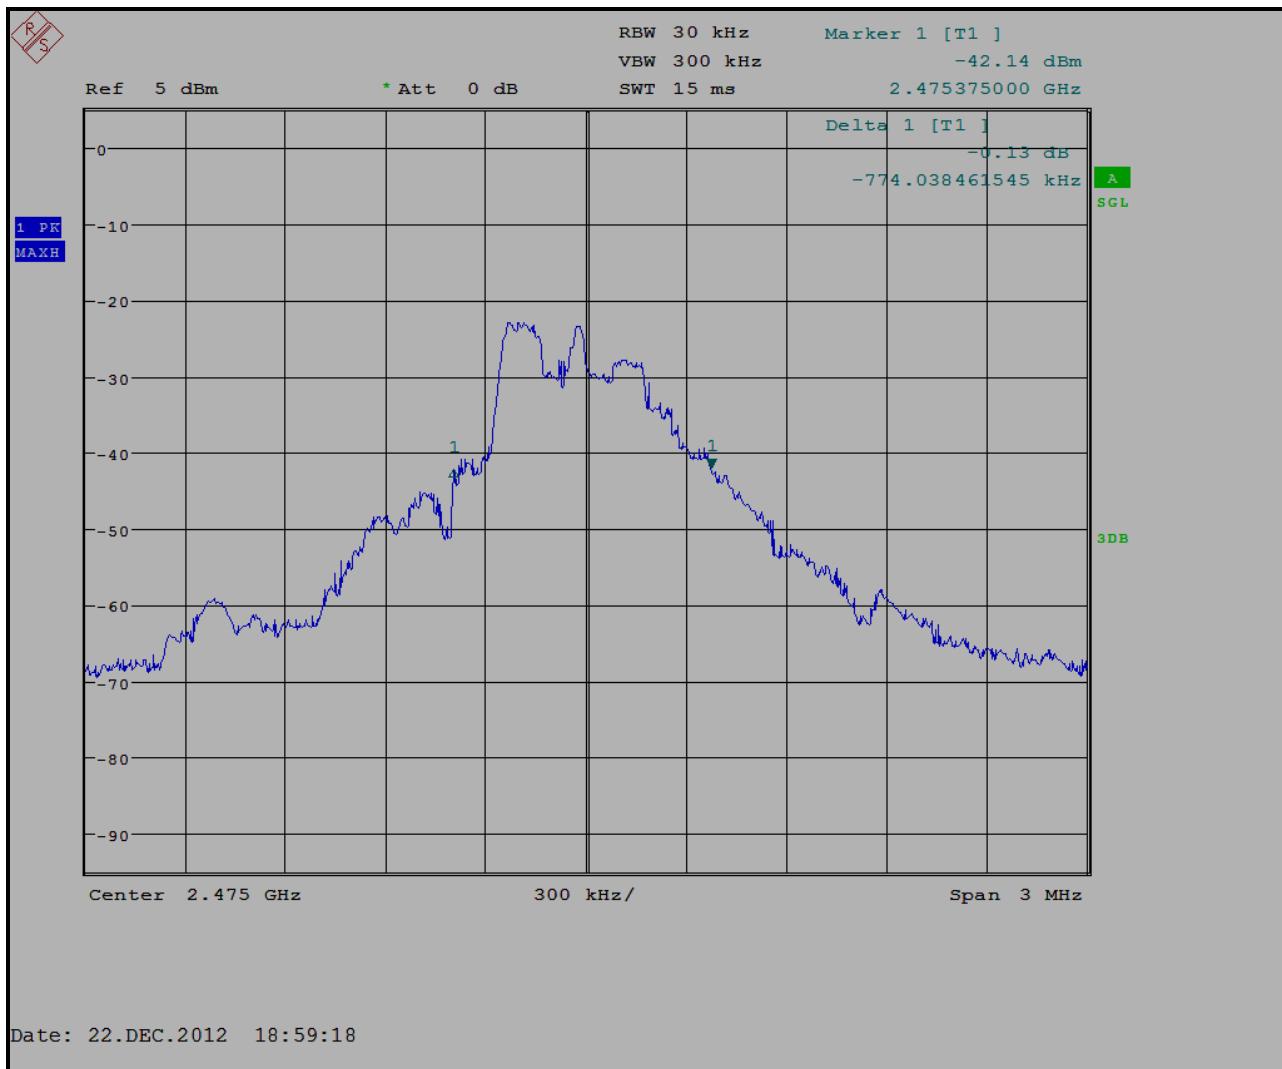

Test Personnel:

Daniel W. Baltzell
Test Engineer

Daniel W. Baltzell

Signature

December 22, 2012
Date of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: E240D
Standards: FCC 15.249/IC RSS-210
ID's: FBRE240D/1859A-E240D
Report #: 2012236

7 Conclusion

The data in this measurement report shows that the EUT as tested, Fleetwood Group, Inc., Model: E240D, FCC ID: FBRE240D, IC: 1859A-E240D, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations, and IC RSS-210 and RSS-Gen for limited modular approval.