



Engineering and Testing for EMC and Safety Compliance

**Limited Modular Approval Certification Application Report**  
**FCC Part 15.249 & Industry Canada RSS-210**

Test Lab:		Applicant:	
Rhein Tech Laboratories, Inc. 360 Herndon Parkway Suite 1400 Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com	Tel: 703-689-0368 Fax: 703-689-2056 www.rheintech.com	Fleetwood Group, Inc. Tel: 616-820-8271 11832 James Street Fax: 616-820-8300 Holland, MI 49424 Contact: Will Buehler	
<b>FCC ID/</b> <b>IC:</b> FBRV240B/ 1859A-V240B			<b>Test Report Date:</b> December 8, 2010
<b>Platform:</b>	N/A	<b>RTL Work Order #:</b>	2010232
<b>Model:</b>	V240B	<b>RTL Quote #:</b>	QRTL10-183
<b>American National Standard Institute:</b>	ANSI C63.4-2003: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
<b>FCC Classification:</b>	DXT – Part 15 Low Power Transceiver		
<b>FCC Rule Part(s)/Guidance:</b>	15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHZ, and 24.0-24.25 GHz, October 1, 2009		
<b>Industry Canada:</b>	RSS-210 Issue 7: Low Power License-Exempt Communications Devices		
<b>Digital Interface Information:</b>	Digital Interface was found to be compliant		
Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
2401 – 2475	N/A	N/A	733KFXD

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15 and ANSI C63.4.

Signature: 

Date: December 8, 2010

Typed/Printed Name: Desmond A. Fraser

Position: President

*This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Fleetwood Group, Inc. The test results relate only to the item(s) tested.*

*These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACCLASS. Refer to certificate and scope of accreditation AT-1445.*

## Table of Contents

---

1	General Information .....	5
1.1	Scope.....	5
1.2	Description of EUT .....	5
1.3	Test Facility.....	5
1.4	Related Submittal(s)/Grant(s) .....	5
1.5	Modifications .....	5
2	Test Information .....	6
2.1	Description of Test Modes .....	6
2.2	Exercising the EUT .....	6
2.3	Test Result Summary .....	6
2.4	Test System Details .....	7
2.5	Configuration of Tested System.....	7
3	Duty Cycle Calculation - FCC §15.35(c), RSS-Gen §4.3 .....	8
4	Radiated Emissions – FCC §15.209, §15.249(a); RSS-210 §6.2.1 .....	8
4.1	Limits of Radiated Emissions Measurement.....	8
4.2	Radiated Emissions Measurement Test Procedure .....	8
4.3	Radiated Emissions Test Results .....	10
4.4	Radiated Emissions Harmonics/Spurious Test Data.....	10
4.5	Radiated Emissions Digital Test Data.....	11
5	AC Conducted Emissions - FCC §15.207; RSS-Gen §7.2.2: Conducted Limits; ANSI C63.4-2003 Section 7 .....	12
6	20 dB Bandwidth – IC RSS-Gen .....	12
6.1	20 dB Bandwidth Test Procedure .....	12
6.2	20 dB Modulated Bandwidth Test Data.....	12
6.3	20 dB Bandwidth Plots.....	13
7	Conclusion .....	16

Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.  
Model: V240B  
Standards: FCC 15.249/IC RSS-210  
FCC/IC ID: FBRV240B/1859A-V240B  
Report #: 2010232

## Figure Index

---

Figure 2-1: Configuration of System Under Test.....	7
---	---

## Table Index

---

Table 2-1: Channels Tested.....	6
Table 2-2: Test Result Summary – FCC Part 15, Subpart C (Section 15.249) .....	6
Table 2-3: Equipment Under Test.....	7
Table 4-1: Radiated Emissions Test Equipment .....	9
Table 4-2: Radiated Emissions Test Data.....	10
Table 4-3: Radiated Emissions Harmonics/Spurious - 2401 MHz.....	10
Table 4-4: Radiated Emissions Harmonics/Spurious - 2437 MHz.....	10
Table 4-5: Radiated Emissions Harmonics/Spurious - 2475 MHz.....	11
Table 4-6: Digital Radiated Emissions Test Data.....	11
Table 6-1: 20 dB Bandwidth Test Equipment.....	12
Table 6-2: 20 dB Modulated Bandwidth Test Data.....	12

## Plot Index

---

Plot 6-1: 20 dB Bandwidth Channel 1 .....	13
Plot 6-2: 20 dB Bandwidth Channel 37 .....	14
Plot 6-3: 20 dB Bandwidth Channel 75.....	15

## Appendix Index

---

Appendix A: FCC Part 1.1307, 1.1310, 2.1091, 2.1093; IC RSS-Gen: RF Exposure .....	17
Appendix B: Agency Authorization Letter.....	18
Appendix C: FCC Confidentiality Request Letter .....	19
Appendix D: DA 00-1407 FCC Part 15 Unlicensed Modular Transmitter Approval.....	20
Appendix E: IC Letters .....	21
Appendix F: IC Confidentiality Request Letter .....	22
Appendix G: RSS-Gen 7.1.2 Limited Modular Approval.....	23
Appendix H: Label and Label Location .....	24
Appendix I: Technical Operational Description .....	26
Appendix J: Schematics .....	27
Appendix K: Block Diagram .....	28
Appendix L: Manual .....	29
Appendix M: Test Photographs .....	30
Appendix N: External Photographs .....	32
Appendix O: Internal Photographs .....	36

## Photograph Index

---

Photograph 1:	ID Label on EUT.....	24
Photograph 2:	“Contains FCC ID...” Label on Sample Host.....	25
Photograph 3:	Radiated Testing – Front View .....	30
Photograph 4:	Radiated Testing – Back View .....	31
Photograph 5:	Top View .....	32
Photograph 6:	Bottom View.....	33
Photograph 7:	Side 1 View .....	34
Photograph 8:	Side 2 View .....	35
Photograph 9:	Top View .....	36
Photograph 10:	Bottom View.....	37
Photograph 11:	Side 1 View .....	38
Photograph 12:	Side 2 View .....	39

Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.  
Model: V240B  
Standards: FCC 15.249/IC RSS-210  
FCC/IC ID: FBRV240B/1859A-V240B  
Report #: 2010232

## 1 General Information

### 1.1 Scope

This is an original certification application request for Limited Modular Approval.

Applicable Standards:

- FCC Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz
- Industry Canada RSS-210: Low Power License-Exempt Communications Devices

### 1.2 Description of EUT

<b>Equipment Under Test</b>	Badge Transceiver
<b>Model</b>	V240B
<b>Power Supply</b>	Internal cell (3VDC)
<b>Modulation Type</b>	GFSK
<b>Frequency Range</b>	2401 – 2475 MHz
<b>Antenna Connector Type</b>	PCB Trace type
<b>Antenna Type</b>	Internal

### 1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4-2003).

### 1.4 Related Submittal(s)/Grant(s)

This is an original application for Limited Modular Approval for Fleetwood Group, Inc., Model: V240B, FCC ID: FBRV240B, IC: 1859A-V240B.

### 1.5 Modifications

No modifications were made to the equipment during testing in order to achieve compliance with these standards.

## 2 Test Information

### 2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested:

**Table 2-1: Channels Tested**

Channel	Frequency
Low	2401
Middle	2437
High	2475

### 2.2 Exercising the EUT

The EUT was supplied with test firmware programmed with a high, mid, and low channel for testing as well as a low, mid, and high power. The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted. Four power levels were available for testing, and the high and low powers are presented in this report.

### 2.3 Test Result Summary

**Table 2-2: Test Result Summary – FCC Part 15, Subpart C (Section 15.249)**

Standard	Test	Pass/Fail or N/A
FCC 15.207	AC Power Conducted Emissions	N/A
FCC 15.209	Radiated Emissions	Pass
FCC 15.249(a)	Field Strength of Fundamental and Harmonics	Pass
RSS-Gen	20 dB Bandwidth	Pass

Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.  
Model: V240B  
Standards: FCC 15.249/IC RSS-210  
FCC/IC ID: FBRV240B/1859A-V240B  
Report #: 2010232


## 2.4 Test System Details

The test samples were received on December 7, 2010. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following table.

**Table 2-3: Equipment Under Test**

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Versus 2.4 Badge Transceiver	Fleetwood Group Inc.	V240B	TX	FBRV240B	N/A	19973
Versus 2.4 Badge Transceiver	Fleetwood Group Inc.	V240B	RX	FBRV240B	N/A	19974
Versus 2.4 Badge Transceiver	Fleetwood Group Inc.	V240B	N	FBRV240B	N/A	19975

## 2.5 Configuration of Tested System

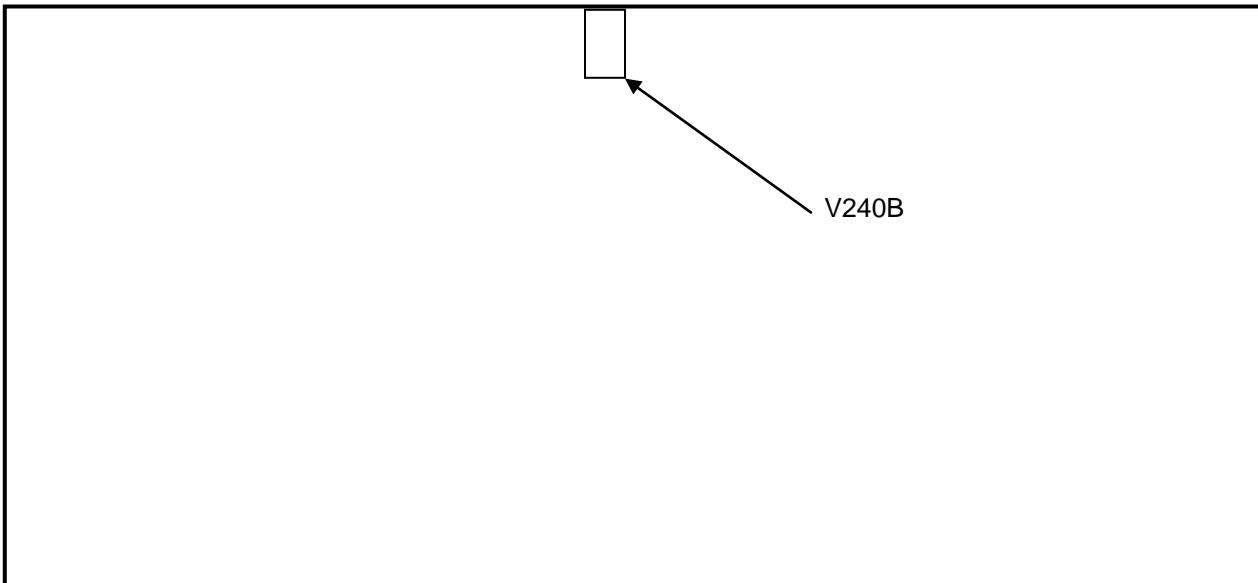

**Figure 2-1: Configuration of System Under Test**

### 3 Duty Cycle Calculation - FCC §15.35(c), RSS-Gen §4.3

A standard transmission consists of a 1.028 ms data packet, with a 37.5 ms transmission period. Therefore, the aggregate on time within a transmission period of 100 ms is 1.028 ms, or  $20\log(1.028/100) = 39.8$  dB.

The duty cycle correction is 39.8 dB.

### 4 Radiated Emissions – FCC §15.209, §15.249(a); RSS-210 §6.2.1

#### 4.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any circumstances of modulation.

#### 4.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10<sup>th</sup> harmonic of the highest fundamental transmitter frequency (24.8 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

**Table 4-1: Radiated Emissions Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900151	Rohde and Schwarz	HFH2-Z2	Loop Antenna (9 kHz - 30 MHz)	827525/019	10/1/12
901364	MITEQ	JS4-01002600-36-5P	Amplifier 0.1-26 GHz, 28 dB gain, power 5 dB	849863	2/22/11
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamplifier 40dB (30 MHz – 2 GHz)	1006	4/10/11
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901516	Insulated Wire, Inc.	KPS-1503-2400-KPS	RF cable, 20'	NA	10/19/11
901517	Insulated Wire Inc.	KPS-1503-360-KPS	RF cable 36"	NA	10/19/11
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	8/2/11
900914	Hewlett Packard	85460A	RF Filter Section (100 kHz - 6.5 GHz)	3330A00107	8/2/11
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	06/14/11
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	06/14/11
900323	EMCO	3160-07	Horn Antenna (8.2 - 12.4 GHz)	9605-1054	06/14/11
900356	EMCO	3160-08	Horn Antenna (12.4 - 18 GHz)	9607-1044	06/14/11
900325	EMCO	3160-9	Horn Antenna (18 - 26.5 GHz)	9605-1051	06/14/11
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	11/11/11

### 4.3 Radiated Emissions Test Results

Table 4-2: Radiated Emissions Test Data

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-39.8 dB)	Average Limit (dBuV/m)	Average Margin (dB)
2401.0	54.8	37.4	92.2	114.0	-21.8	52.4	94.0	-41.6
2437.0	59.5	38.4	97.9	114.0	-16.1	58.1	94.0	-35.9
2475.0	59.3	38.3	97.6	114.0	-16.4	57.8	94.0	-36.2

\* testing performed at 3m

### 4.4 Radiated Emissions Harmonics/Spurious Test Data

Table 4-3: Radiated Emissions Harmonics/Spurious - 2401 MHz

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-39.8 dB)	Average Limit (dBuV/m)	Average Margin (dB)
4802.0	49.2	2.3	51.5	74.0	-22.5	11.7	54.0	-42.3
7203.0	45.8	5.4	51.2	74.0	-22.8	11.4	54.0	-29.2
9604.0	27.9	12.6	40.5	74.0	-33.5	0.7	54.0	-38.5
12005.0	16.9	13.7	30.6	74.0	-43.4	-9.2	54.0	-40.8

Table 4-4: Radiated Emissions Harmonics/Spurious - 2437 MHz

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-39.8 dB)	Average Limit (dBuV/m)	Average Margin (dB)
4874.0	48.2	2.4	50.6	74.0	-23.4	10.8	54.0	-43.2
7311.0	44.2	5.6	49.8	74.0	-24.2	10.0	54.0	-44.0
9748.0	26.1	12.8	38.9	74.0	-35.1	-0.9	54.0	-54.9
12185.0	18.4	14.2	32.6	74.0	-41.4	-7.2	54.0	-61.2

**Table 4-5: Radiated Emissions Harmonics/Spurious - 2475 MHz**

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/VBW)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Calculated Average (dBuV/m) (-39.8 dB)	Average Limit (dBuV/m)	Average Margin (dB)
4950.0	47.4	2.5	49.9	74.0	-24.1	10.1	54.0	-43.9
7425.0	43.8	5.8	49.6	74.0	-24.4	9.8	54.0	-44.2
9900.0	30.5	12.9	43.4	74.0	-30.6	3.6	54.0	-50.4
12375.0	25.2	14.7	39.9	74.0	-34.1	0.1	54.0	-53.9

#### 4.5 Radiated Emissions Digital Test Data

**Table 4-6: Digital Radiated Emissions Test Data**

Temperature: 32°F      Humidity: 40%										
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
32.000	Qp	V	180	1.0	35.9	-13.7	22.2	40.0	-17.8	Pass
64.000	Qp	H	180	1.0	32.1	-25.0	7.1	40.0	-32.9	Pass
96.000	Qp	H	180	1.0	34.0	-19.7	14.3	43.5	-29.2	Pass
128.000	Qp	H	180	1.0	31.6	-17.7	13.9	43.5	-29.6	Pass
352.000	Qp	V	180	1.0	35.0	-13.0	22.0	46.0	-24.0	Pass
576.000	Qp	H	180	1.0	34.1	-7.9	26.2	46.0	-19.8	Pass
672.000	Qp	H	180	1.0	36.4	-6.0	30.4	46.0	-15.6	Pass
704.000	Qp	H	180	1.0	41.3	-5.2	36.1	46.0	-9.9	Pass
736.000	Qp	H	180	1.0	32.8	-47.	28.1	46.0	-17.9	Pass
1373.165	Qp	V	0	1.0	42.9	5.0	47.9	54.0	-6.1	Pass
1393.73	Qp	V	0	1.0	41.3	5.2	46.5	54.0	-7.5	Pass
1415.455	Qp	V	0	1.0	43.8	5.6	47.4	54.0	-6.6	Pass

**Test Personnel:**

Daniel W. Baltzell  
 Test Engineer



Signature

December 8, 2010  
 Date Of Test

Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.  
Model: V240B  
Standards: FCC 15.249/IC RSS-210  
FCC/IC ID: FBRV240B/1859A-V240B  
Report #: 2010232

## 5 AC Conducted Emissions - FCC §15.207; RSS-Gen §7.2.2: Conducted Limits; ANSI C63.4-2003 Section 7

No Conducted tests are required since the device is powered solely by a 3 VDC battery.

## 6 20 dB Bandwidth – IC RSS-Gen

### 6.1 20 dB Bandwidth Test Procedure

The minimum 20 dB bandwidths per RSS-210 were measured using a 50-ohm spectrum analyzer. The modulated carrier was adjusted on the analyzer so that it was displayed entirely on the spectrum analyzer. The sweep time was auto and allowed through several sweeps with the max hold function used in peak detector mode. The resolution bandwidth was set to 100 kHz, and the video bandwidth set to 1 MHz. The table below contains the bandwidth measurement results.

**Table 6-1: 20 dB Bandwidth Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	11/11/11

### 6.2 20 dB Modulated Bandwidth Test Data


**Table 6-2: 20 dB Modulated Bandwidth Test Data**

Minimum 20 dB bandwidths	
Channel	20 dB Bandwidth (kHz)
1	732.5
37	702.1
75	733.0

### 6.3 20 dB Bandwidth Plots

Channel: 1  
Channel Frequency (MHz): 2401  
Resolution Bandwidth (kHz): 100  
Video Bandwidth (MHz): 1  
Span (MHz): 2

Plot 6-1: 20 dB Bandwidth Channel 1

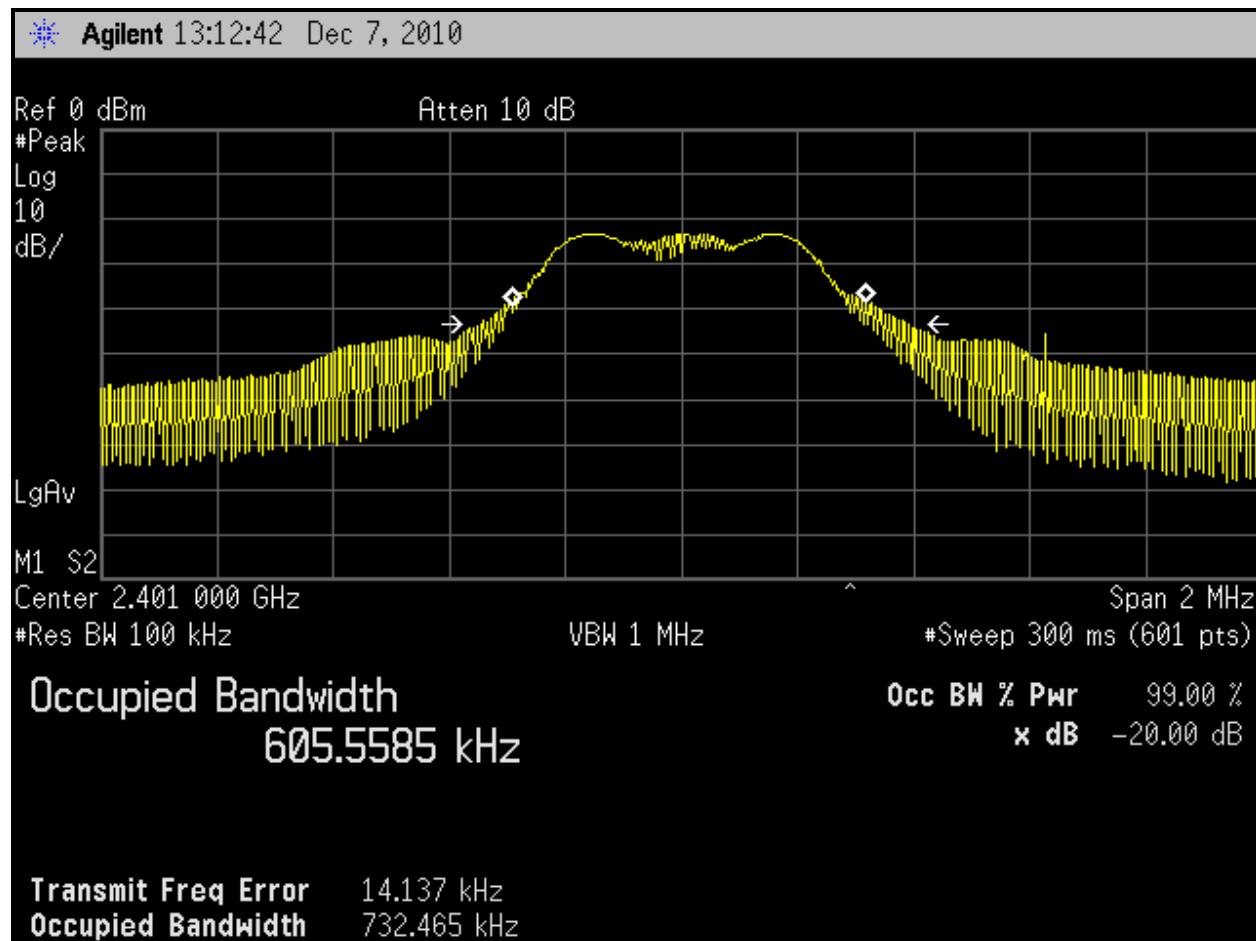


Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.  
Model: V240B  
Standards: FCC 15.249/IC RSS-210  
FCC/IC ID: FBRV240B/1859A-V240B  
Report #: 2010232

**Channel:** 37  
**Channel Frequency (MHz):** 2437  
**Resolution Bandwidth (kHz):** 100  
**Video Bandwidth (MHz):** 1  
**Span (MHz):** 2

**Plot 6-2: 20 dB Bandwidth Channel 37**

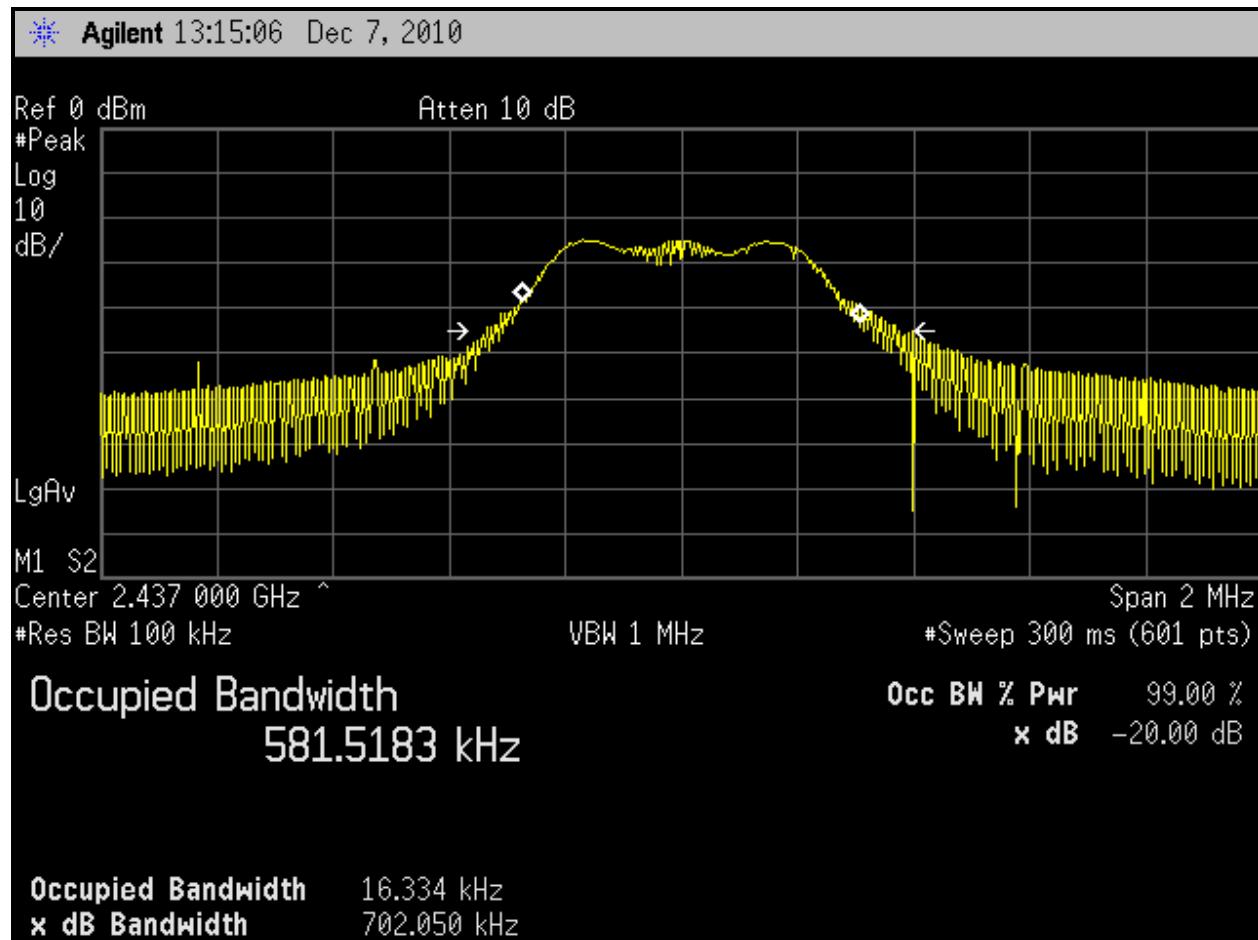


Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.  
Model: V240B  
Standards: FCC 15.249/IC RSS-210  
FCC/IC ID: FBRV240B/1859A-V240B  
Report #: 2010232

Channel: 75  
Channel Frequency (MHz): 2475  
Resolution Bandwidth (kHz): 100  
Video Bandwidth (MHz): 1  
Span (MHz): 2

Plot 6-3: 20 dB Bandwidth Channel 75

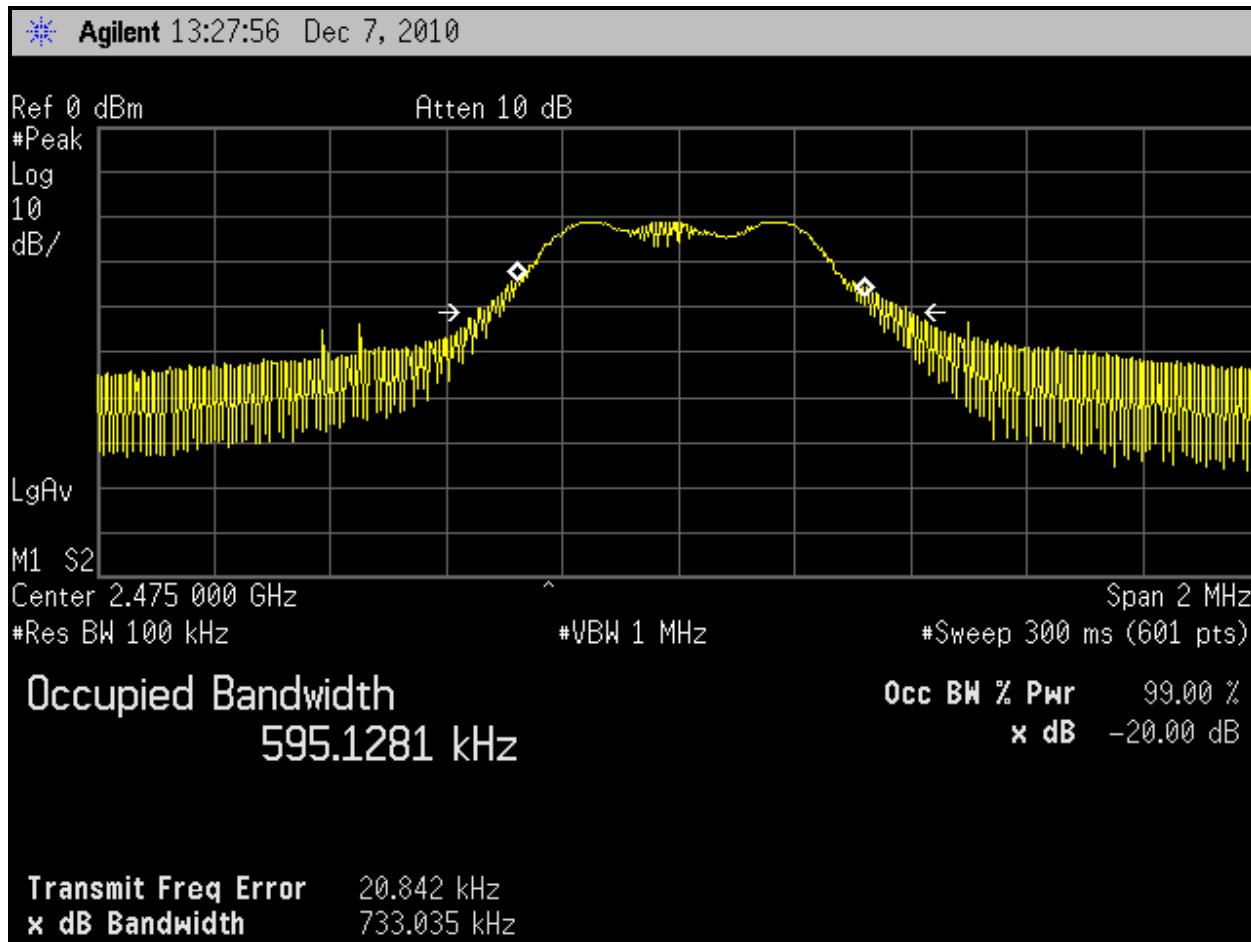

Test Personnel:

Daniel W. Baltzell  
Test Engineer

Signature

December 7, 2010  
Date Of Test

Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.  
Model: V240B  
Standards: FCC 15.249/IC RSS-210  
FCC/IC ID: FBRV240B/1859A-V240B  
Report #: 2010232

## 7 Conclusion

The data in this measurement report shows that the EUT as tested, Fleetwood Group, Inc., Model: V240B, FCC ID: FBRV240B, IC: 1859A-V240B, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations and IC RSS-210 and RSS-Gen for limited modular approval.