



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

TEST REPORT For FCC

Test Report No. : CTK-2012-01204
Date of Issue : 2012-11-19
FCC ID : FFMHG10ZZ0ENCXLUS
Model/Type No. : HG10ZZ0.ENCXLUS
Kind of Product : Smart Gateway
Applicant : LG Electronics, Inc.
Applicant Address : 327-23, BdMS R&D Team, LG Electronics Gasan R&D Campus,
Gasan-Dong, Geumcheon-Gu, Seoul 153-802 Korea
Manufacturer : Clipcomm, Inc.
Manufacturer Address : 4th Fl. Bldg. 249-11, Nonhyeon-dong, Gangnam-gu, Seoul
135-832, Korea
Contact Person : GeunChang, Do / Senior researcher
Telephone : +82-02-6915-1001
Received Date : 2012-11-05
Test period : Start : 2012-11-07 End : 2012-11-16

The test results presented in this report relate only to the object tested.

Tested by

Won-Jae, Hwang
Test Engineer
Date: 2012-11-19

Reviewed by

Young-Joon, Park
Technical Manager
Date: 2012-11-19



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
2012-11-19	Issued (CTK-2012-01204)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Tested Frequency.....	4
1.2 Device Modifications.....	5
1.3 Peripheral Devices	5
1.4 Calibration Details of Equipment Used for Measurement	5
1.5 Test Facility.....	5
1.6 Laboratory Accreditations and Listings.....	6
2 Summary of tests	7
2.1 Technical Characteristic Test	8
2.1.1 6dB Bandwidth	8
2.1.2 Maximum peak Conducted Output Power	13
2.1.3 Power Spectral Density	18
2.1.4 Band - edge	23
2.1.5 Field Strength of Emissions	30
Test Data	31
2.1.6 AC Conducted Emissions.....	33
APPENDIX A – Test Equipment Used For Tests	36



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

1.0 General Product Description

Equipment model name	HG10ZZ0.ENCXLUS
Serial number	Prototype
EUT condition	Pre-production, not damaged
Frequency Range	2405 MHz - 2480 MHz
RF output power	ANT1 : 21.08 dBm ANT2 : 20.60 dBm
Number of channels	16
Transfer Rate	250 Kbps
Type of Modulation	DSSS
Channel Spacing	5 MHz
Duty cycle TX power	1.0
Power Source	120 Vac
Antenna Type	PCB antenna ANT1, ANT2 : 4.1 dBi

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2405	2445	2480



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

1.2 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	DELL INC.	Inspiron 6400	-
Switching Adapter2	DDongguang Lite Power 2nd Plant	LA65NS0-00	-

1.4 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.5 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

1.6 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 m & 10 m OATS, 3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements	 805871
JAPAN	VCCI	10 m OATS, 3 m & 10 m SAC and Conducted Test Site	 R-948, C-986, T-1843
KOREA	KCC	EMI (10 m OATS, 10 m SAC and Conducted Test Site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Maximum Output Power	< 1 Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(e)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
				C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.4-2003

The tests were performed according to the method of measurements prescribed in

KDB No.558074

2.1 Technical Characteristic Test

2.1.1 6dB Bandwidth

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 40 MHz

VBW = 100 kHz (VBW ≥ RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data:

Test mode : ANT1

Mode	Frequency (MHz)	Channel No.	Test Results		
			6dB Bandwidth (MHz)	Occupied Bandwidth (MHz)	Result
ANT1	2405	11	1.60	2.46	Complies
	2445	19	1.60	2.46	Complies
	2480	26	1.61	2.47	Complies

Test mode : ANT2

Mode	Frequency (MHz)	Channel No.	Test Results		
			6dB Bandwidth (MHz)	Occupied Bandwidth (MHz)	Result
ANT2	2405	11	1.60	2.45	Complies
	2445	19	1.60	2.46	Complies
	2480	26	1.59	2.44	Complies

Minimum Standard:

6 dB Bandwidth > 500kHz

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

ANT1

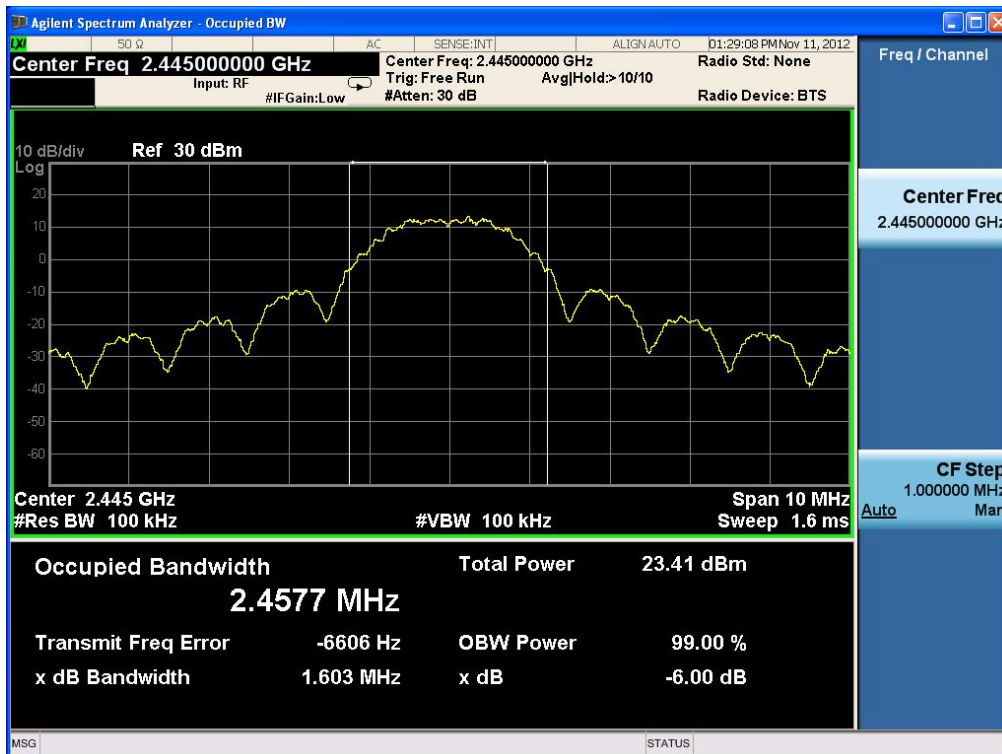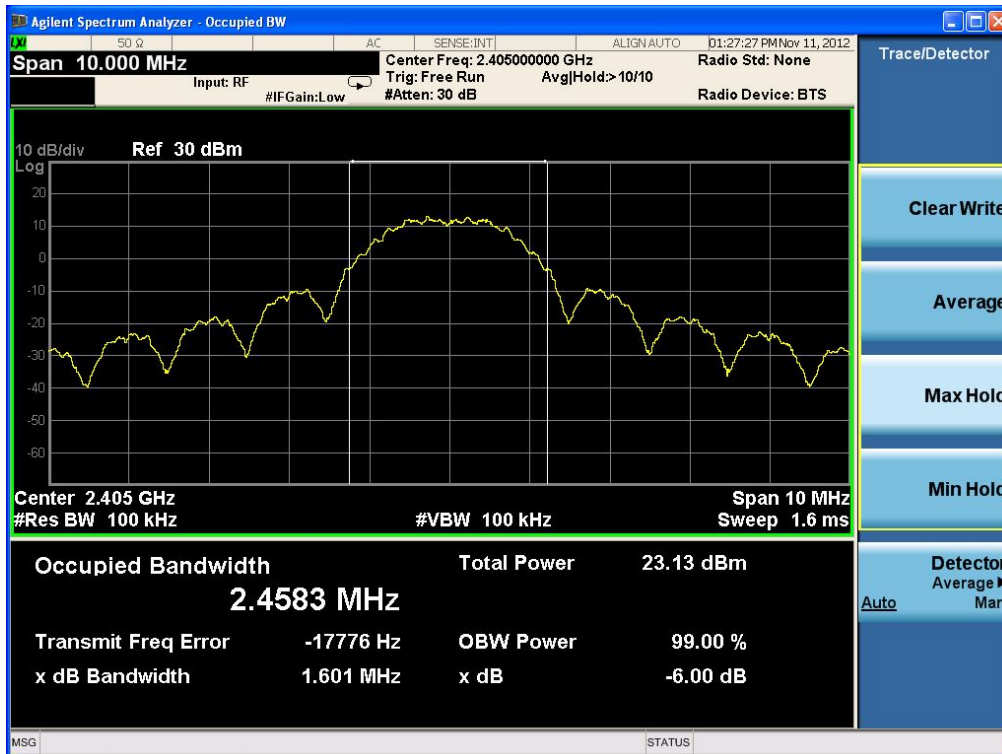




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

ANT1

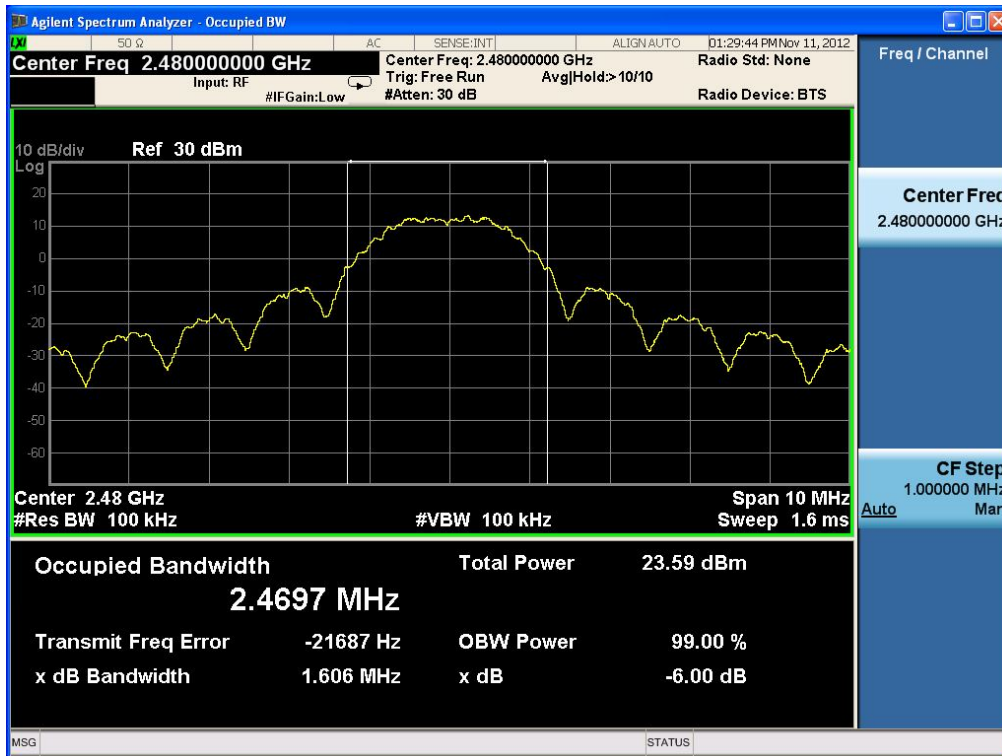



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

ANT2

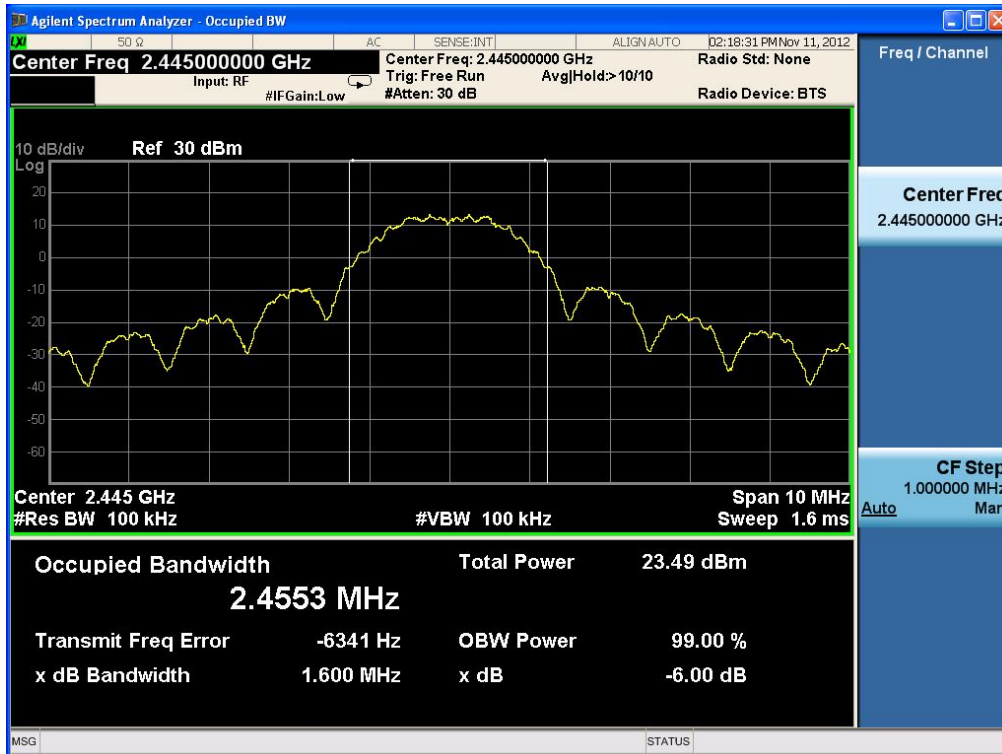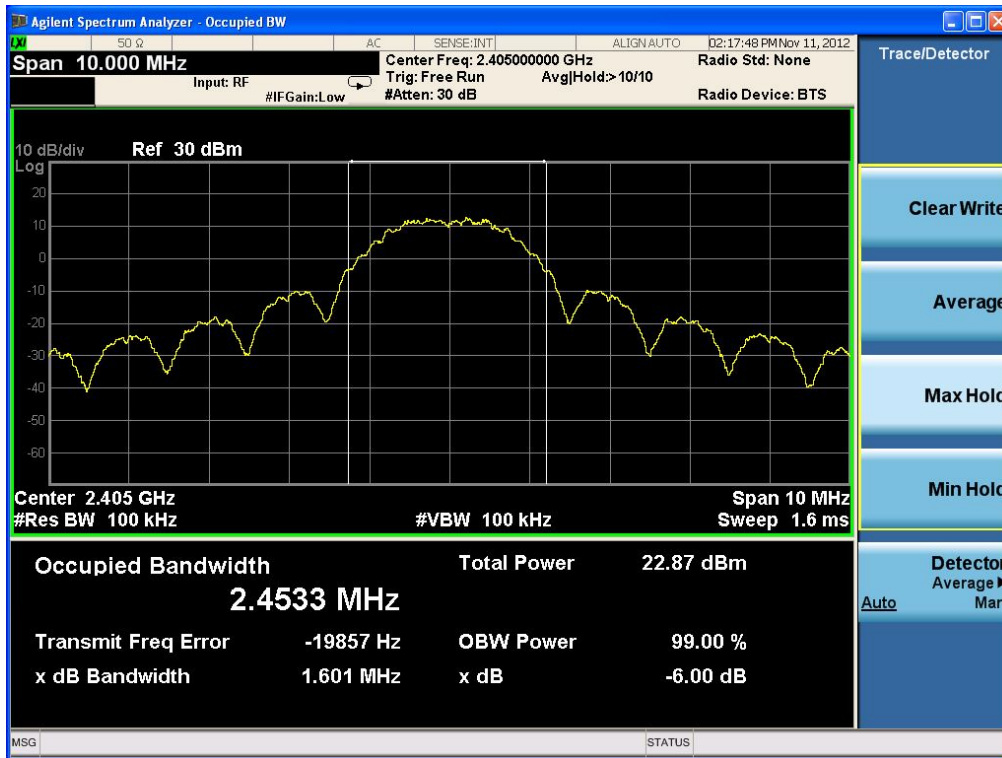



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

ANT2




2.1.2 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



Limit

< 1 W

Test Results

Cable loss : 2.3 dB

Test mode : ANT1

Frequency (MHz)	Channel No.	Mesurement data (dBm)	Total Power (dBm)	Limit	Result
2405	11	18.23	20.53	30dBm	Complies
2445	19	18.18	20.48		Complies
2480	26	18.78	21.08		Complies

Test mode : ANT2

Frequency (MHz)	Channel No.	Mesurement data (dBm)	Total Power (dBm)	Limit	Result
2405	11	17.84	20.14	30dBm	Complies
2445	19	18.30	20.60		Complies
2480	26	18.07	20.37		Complies



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

ANT1





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

ANT1





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

ANT2





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

ANT2





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

2.1.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

VBW = (VBW $\geq$ RBW)

Sweep = 100 s (Span/3 kHz)

Span = 300 kHz

Detector function = peak

Trace = max hold

Test Results

Test mode : ANT1

Mode	Frequency (MHz)	Ch.	Test Results	
			dBm	Result
ANT1	2405	11	4.23	Complies
	2445	19	3.98	Complies
	2480	26	4.46	Complies

Test mode : ANT2

Mode	Frequency (MHz)	Ch.	Test Results	
			dBm	Result
ANT2	2405	11	3.76	Complies
	2445	19	4.13	Complies
	2480	26	4.56	Complies

Minimum Standard:

Power Spectral Density	< 8dBm @ 3 kHz BW
------------------------	-------------------

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

ANT1 Power Density Measurement






CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

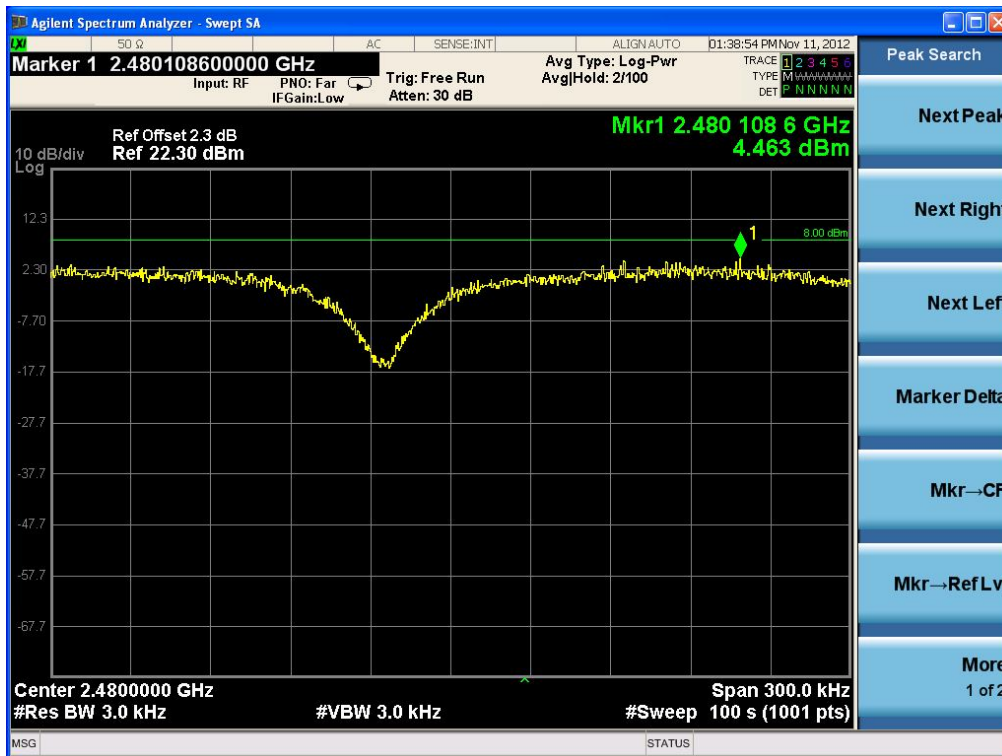




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

ANT2 Power Density Measurement

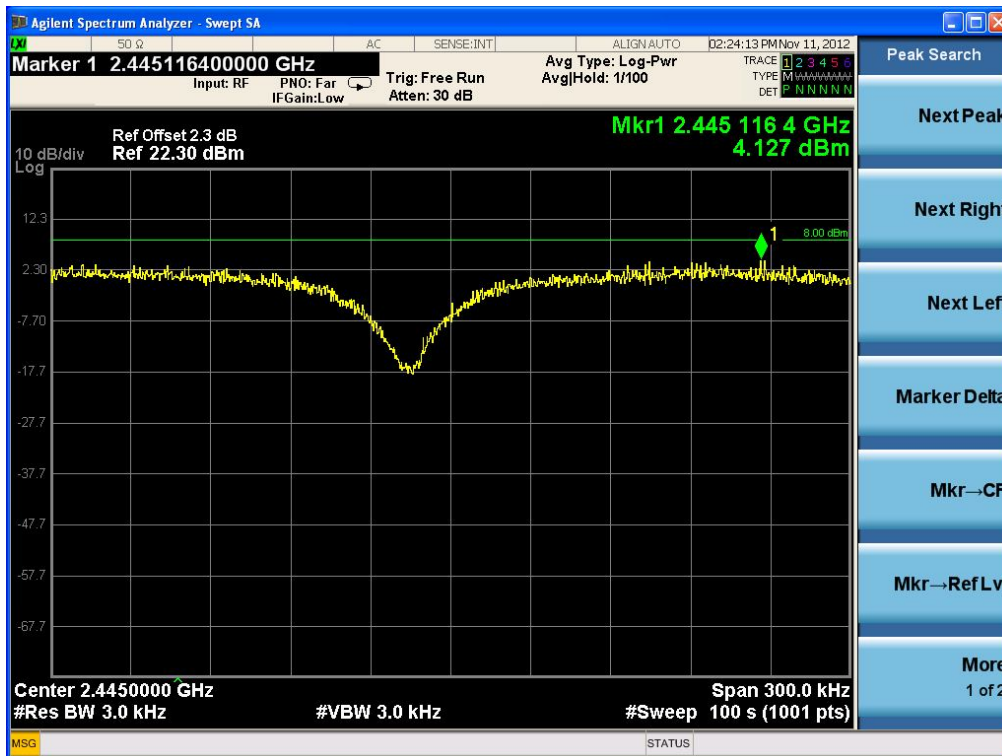




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

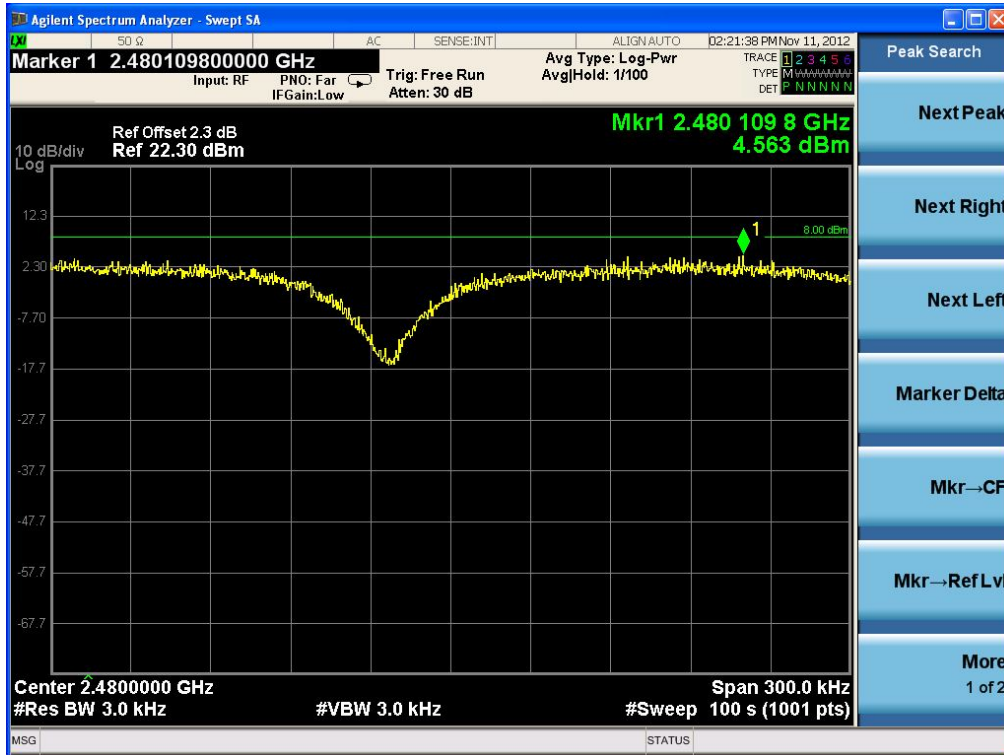



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2.1.4 Band - edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 50 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.

Minimum Standard:	> 20 dBc
--------------------------	----------

See next pages for actual measured spectrum plots.





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

ANT1 Band-edge Measurements

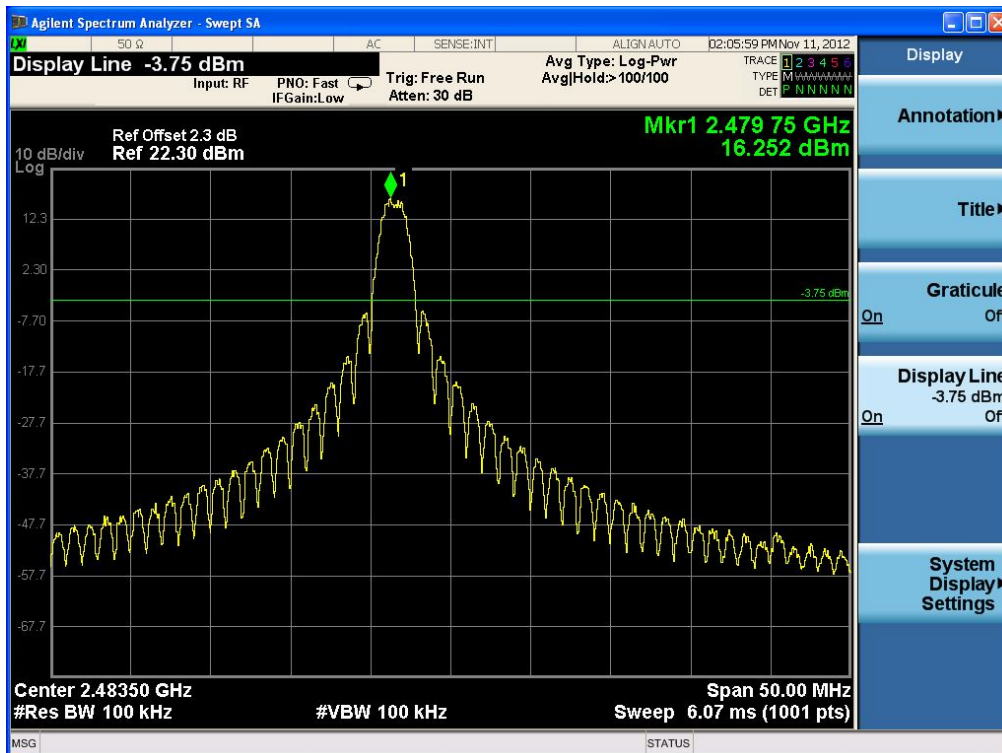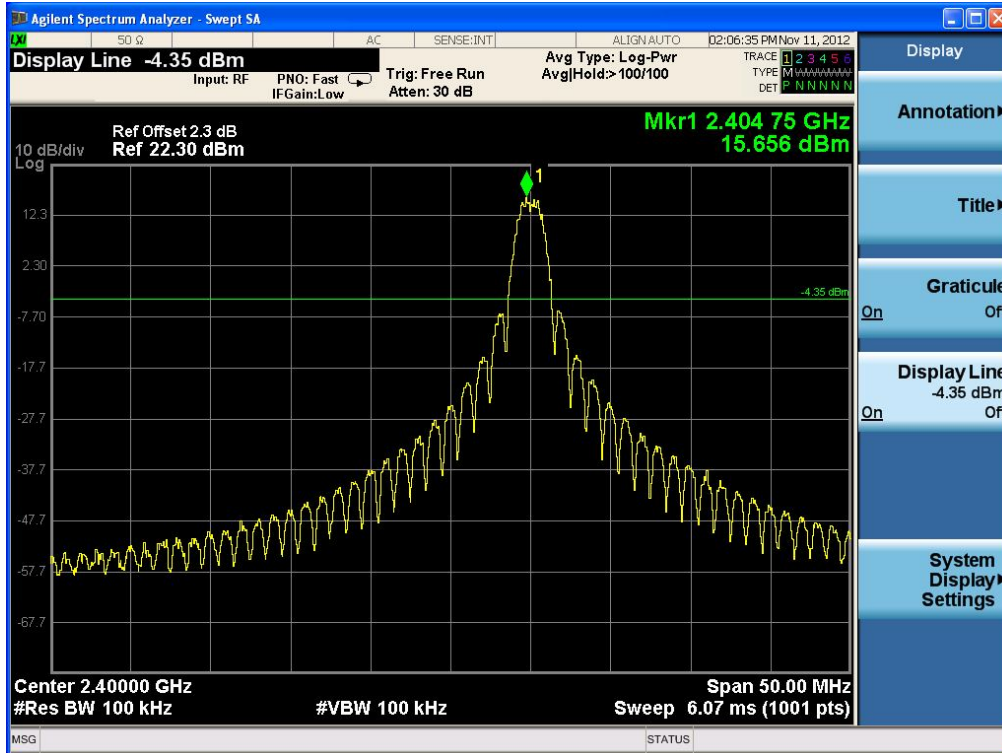



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

[illegible]



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

ANT2 Band-edge Measurements

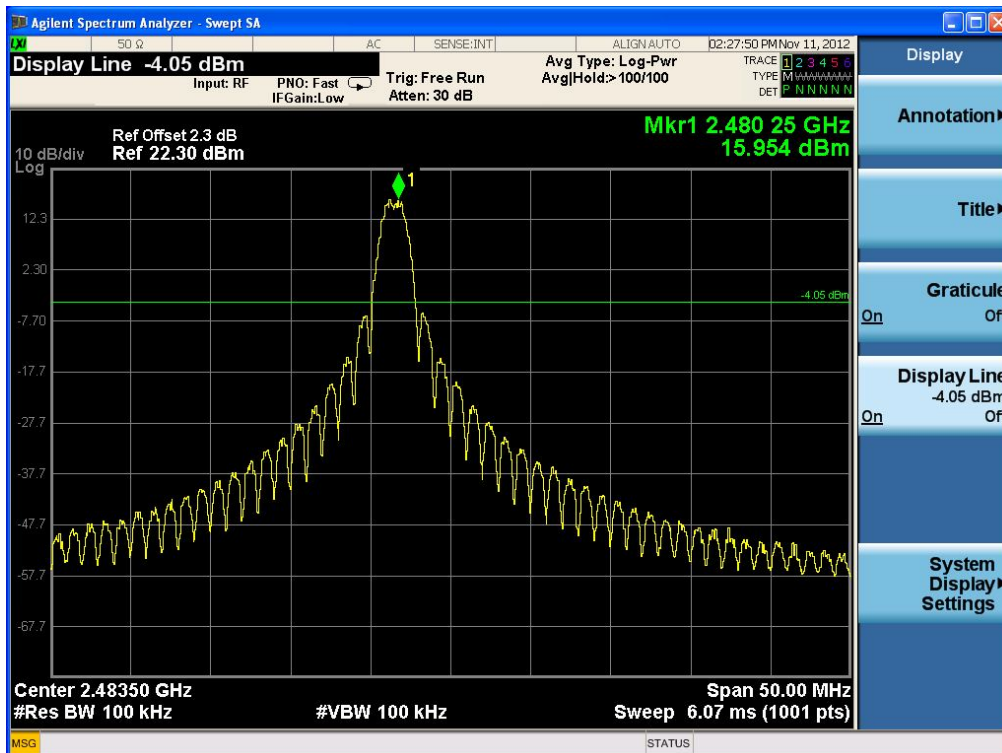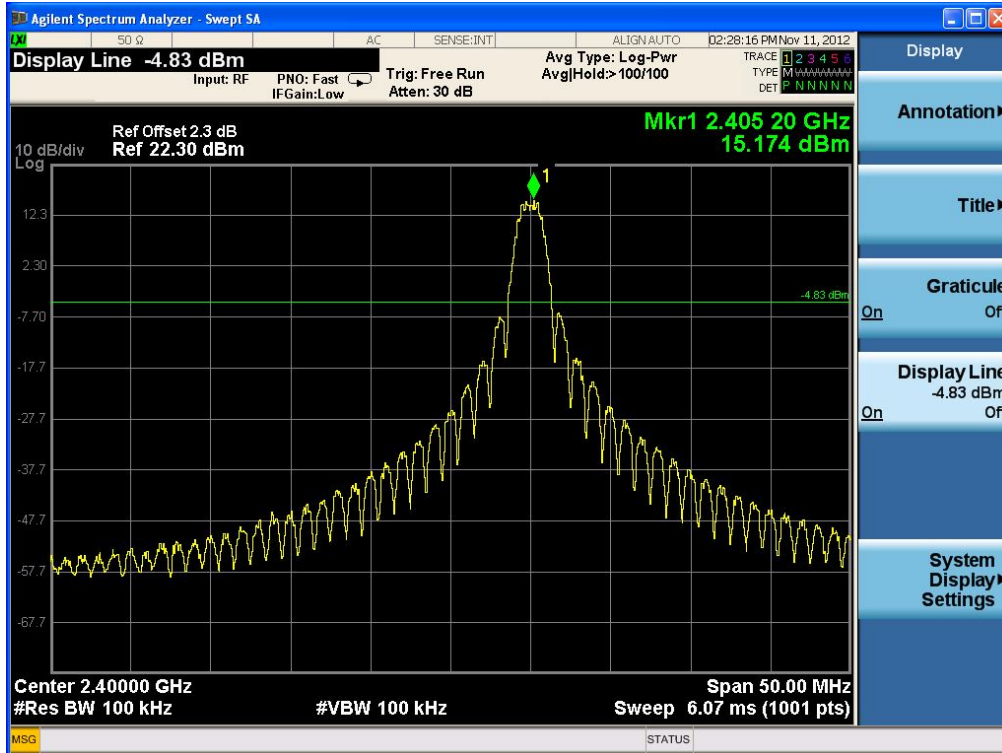



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic

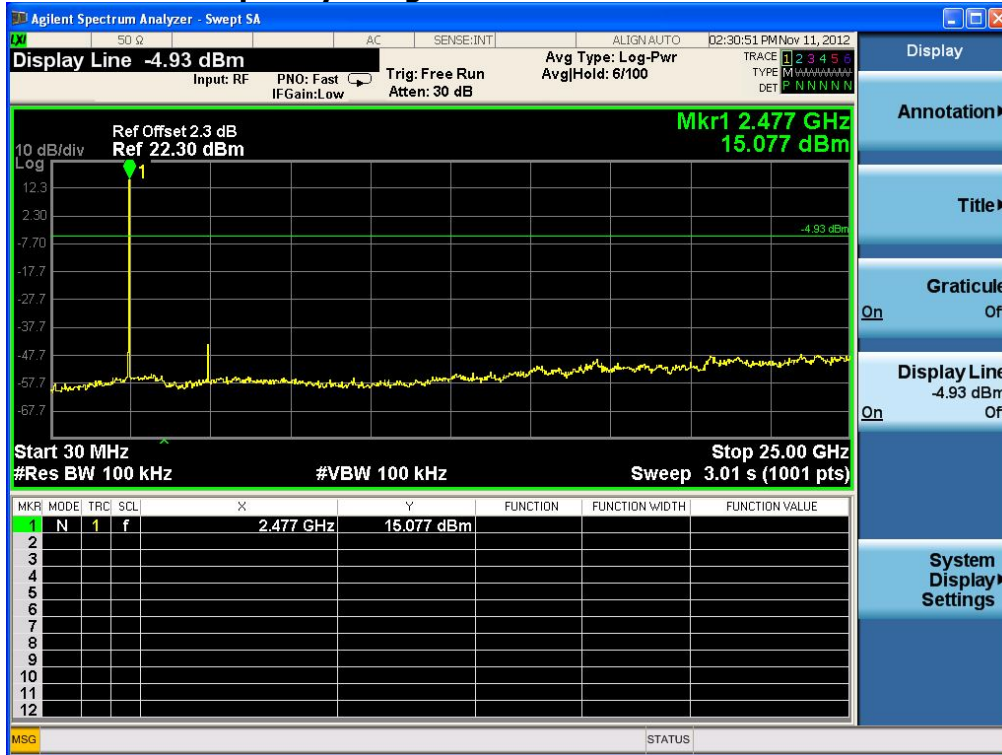

2.1.5 Field Strength of Emissions

Test Location

☒ Testing was performed at a test distance of 3 meter SAC

Test Procedures

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic


RBW = 120 kHz (30 MHz ~ 1 GHz) VBW ≥ RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Detector function = Quasi-peak

Trace = max hold

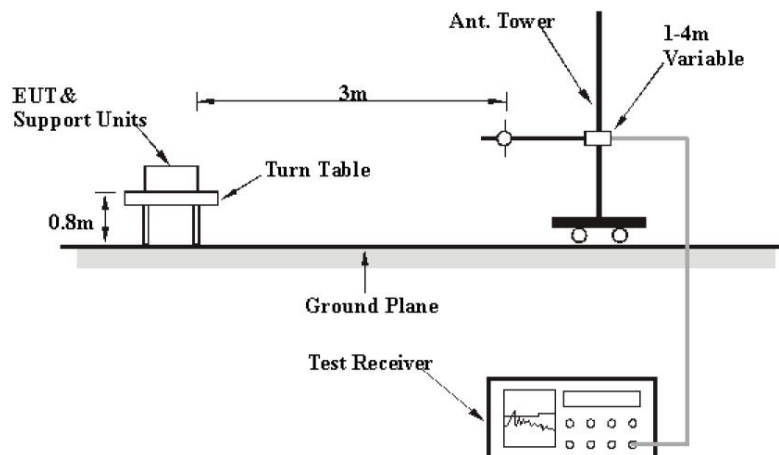

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m
30-88	100**	40
88-216	150**	43.5
216-960	200**	46
Above 960	500	54

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Test Results

Test mode : ANT1


EUT	Smart Gateway	Measurement Detail	
Model	HG10ZZ0.ENCXLUS	Frequency Range	Below 1000MHz
Mode	ANT1(Worst Case)	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
800.059	34.4	11.6	Quasi-peak

Test Data

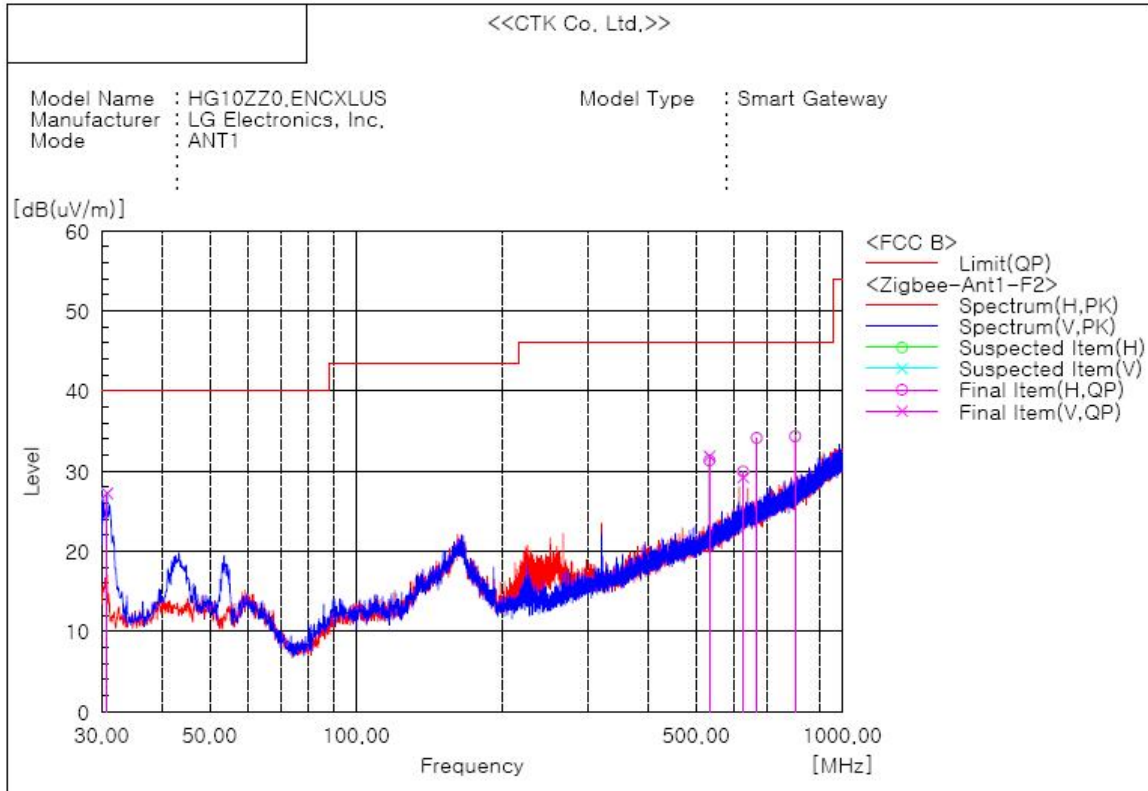

Final Result

No.	Frequency (P)	Reading	c.f	Result	Limit	Margin	Height	Angle
	[MHz]	[dB(uV)]	[dB(1/m)]	QP [dB(uV/m)]	QP [dB(uV/m)]	QP [dB]	[cm]	[deg]
1	30.728	V 42.1	-14.8	27.3	40.0	12.7	100.0	66.0
2	533.309	V 35.8	-3.9	31.9	46.0	14.1	100.0	104.0
3	533.309	H 35.3	-3.9	31.4	46.0	14.6	206.0	215.0
4	624.974	V 30.7	-1.4	29.3	46.0	16.7	100.0	104.0
5	625.095	H 31.4	-1.4	30.0	46.0	16.0	100.0	92.0
6	666.684	H 35.2	-1.0	34.2	46.0	11.8	100.0	92.0
7	800.059	H 32.9	1.5	34.4	46.0	11.6	100.0	318.0

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(X axis) and the worst case was recorded.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Test Results

EUT	NetweenN	Measurement Detail	
Model	HG10ZZ0.ENCXLUS	Frequency Range	1-25GHz
		Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
2547.68	62.4	11.6	Peak

Test Data (Mode: ANT1)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor			Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB]	
				Antenna	Amp. Gain	Cable			AV / Peak	AV / Peak
2547.68	38.8 : 61.2	V	1.0	28.5	35.4	8.1	54.0 : 74.0	40.0 : 62.4	14.0	11.6
7441.64	21.6 : 44.4	V	1.9	37.7	34.8	14.3	54.0 : 74.0	38.8 : 61.6	15.2	12.4

Test Data (Mode: ANT2)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor			Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB]	
				Antenna	Amp. Gain	Cable			AV / Peak	AV / Peak
4961.00	28.6 : 52.4	H	1.1	32.7	34.9	11.4	54.0 : 74.0	37.8 : 61.6	16.2	12.4
7441.64	21.8 : 44.6	V	1.1	37.7	34.8	14.3	54.0 : 74.0	39.0 : 61.8	15.0	12.2

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test data – ANT1

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor			Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									

Test Data – ANT2

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor			Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2.1.6 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
2.9085	46.7	9.3	Quasipeak




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Test Data

[HOT]

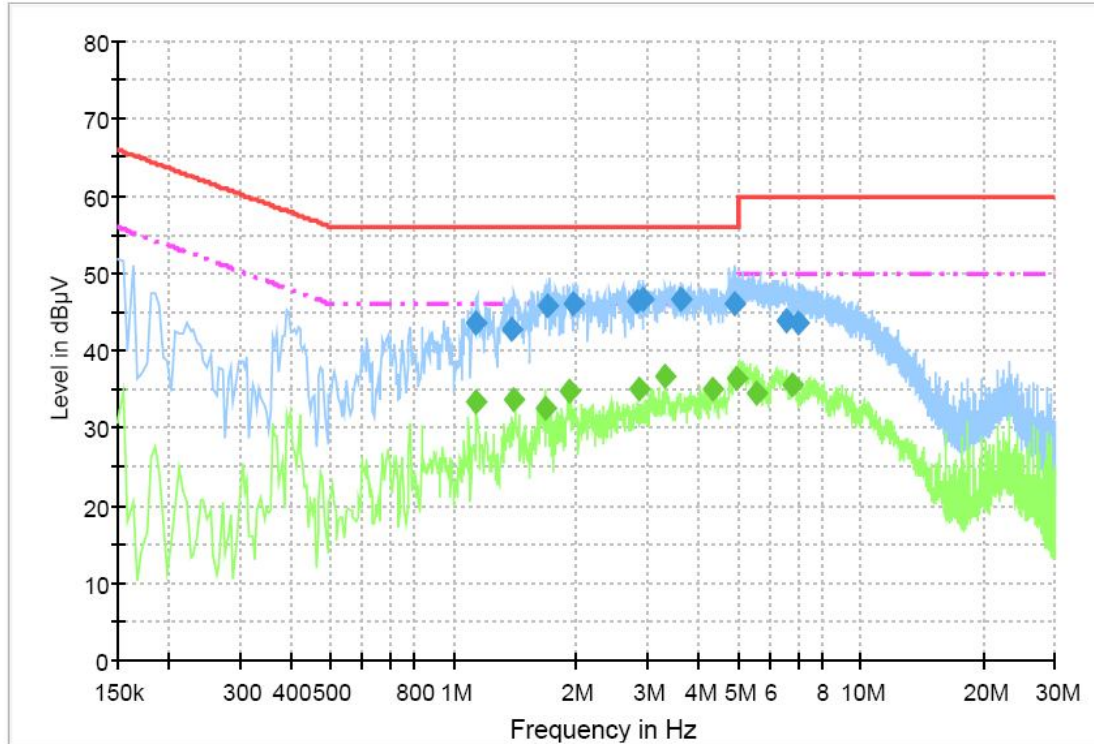

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.131000	43.6	1000.0	9.000	On	L1	9.9	12.4	56.0
1.396500	42.7	1000.0	9.000	On	L1	9.8	13.3	56.0
1.711500	45.8	1000.0	9.000	On	L1	9.8	10.2	56.0
1.981500	45.9	1000.0	9.000	On	L1	9.8	10.1	56.0
2.836500	46.3	1000.0	9.000	On	L1	9.7	9.7	56.0
2.908500	46.7	1000.0	9.000	On	L1	9.7	9.3	56.0
3.601500	46.6	1000.0	9.000	On	L1	9.7	9.4	56.0
4.920000	46.0	1000.0	9.000	On	L1	9.7	10.0	56.0
6.598500	43.9	1000.0	9.000	On	L1	9.7	16.1	60.0
7.035000	43.7	1000.0	9.000	On	L1	9.7	16.3	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.140000	33.3	1000.0	9.000	On	L1	9.9	12.7	46.0
1.410000	33.6	1000.0	9.000	On	L1	9.8	12.4	46.0
1.693500	32.5	1000.0	9.000	On	L1	9.8	13.5	46.0
1.927500	34.8	1000.0	9.000	On	L1	9.8	11.2	46.0
2.845500	35.2	1000.0	9.000	On	L1	9.7	10.8	46.0
3.318000	36.7	1000.0	9.000	On	L1	9.7	9.3	46.0
4.312500	35.1	1000.0	9.000	On	L1	9.7	10.9	46.0
4.951500	36.5	1000.0	9.000	On	L1	9.7	9.5	46.0
5.572500	34.6	1000.0	9.000	On	L1	9.7	15.4	50.0
6.796500	35.6	1000.0	9.000	On	L1	9.7	14.4	50.0



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.


386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

[NEUTRAL]

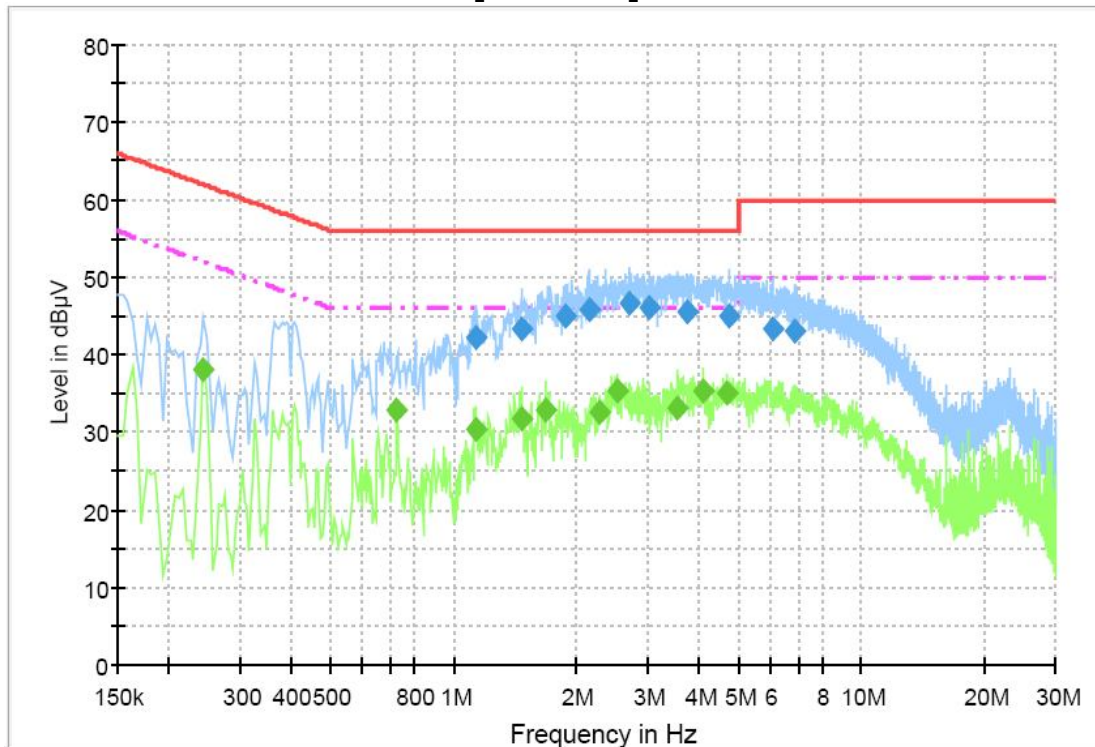

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.140000	42.2	1000.0	9.000	On	N	9.9	13.8	56.0
1.468500	43.4	1000.0	9.000	On	N	9.8	12.6	56.0
1.887000	44.9	1000.0	9.000	On	N	9.8	11.1	56.0
2.148000	45.9	1000.0	9.000	On	N	9.8	10.1	56.0
2.701500	46.6	1000.0	9.000	On	N	9.8	9.4	56.0
3.034500	46.1	1000.0	9.000	On	N	9.7	9.9	56.0
3.754500	45.6	1000.0	9.000	On	N	9.7	10.4	56.0
4.744500	45.1	1000.0	9.000	On	N	9.7	10.9	56.0
6.072000	43.2	1000.0	9.000	On	N	9.7	16.8	60.0
6.891000	43.1	1000.0	9.000	On	N	9.7	16.9	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.244500	38.2	1000.0	9.000	On	N	10.0	13.7	51.9
0.726000	33.0	1000.0	9.000	On	N	10.0	13.0	46.0
1.135500	30.3	1000.0	9.000	On	N	9.9	15.7	46.0
1.473000	31.7	1000.0	9.000	On	N	9.8	14.3	46.0
1.689000	32.9	1000.0	9.000	On	N	9.8	13.1	46.0
2.283000	32.6	1000.0	9.000	On	N	9.8	13.4	46.0
2.526000	35.3	1000.0	9.000	On	N	9.8	10.7	46.0
3.556500	33.2	1000.0	9.000	On	N	9.7	12.8	46.0
4.101000	35.4	1000.0	9.000	On	N	9.7	10.6	46.0
4.686000	35.0	1000.0	9.000	On	N	9.7	11.0	46.0



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2013-11-08
2	Spectrum Analyzer	Rohde & Schwarz	FSP-30	100994	2013-11-08
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2012-12-13
4	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2012-12-16
5	Trilog Broadband Antenna	SCHWARZBECK	VULB 9161 SE	9161-4133	2014-06-11
6	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2014-06-06
7	Attenuator	HP	8498A	1801A06913	2013-11-09
8	EPM Series Power Meter	HP	E4418A	GB38272734	2013-11-08
9	Power Sensor	HP	8487A	3318A03524	2013-07-10
10	Audio Analyzer	HP	8903B	2747A03432	2013-11-08
11	ESG-D Series Signal Generator	Agilent	E4432B	US40054094	2013-11-08
12	SYNTHESIZED SWEEPER	HP	8341B	2819A01563	2013-11-08
13	Attenuator	HP	8494A	3308A33351	2013-11-09
14	Temp&Humi Chamber	Kunpoong	JT-TH-556-1	9QE5-002	2013-01-12
15	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2013-11-08
16	Horn Antenna	ETS-Lindgren	3115	00078894	2013-03-22
17	Horn Antenna	ETS-Lindgren	3115	00078895	2013-03-22
18	Dipole Antenna	SCHWARZBECK	VHA 9103	VHA91032557	2013-11-04
19	Dipole Antenna	SCHWARZBECK	UHA 9105	UHA91052417	2013-11-04
20	OPT H64 AMPLIFIER	HP	8447F	3113A06814	2013-03-27
21	PREAMPLIFIER	Agilent	8449B	3008A02307	2013-11-09
22	Radio Communication Tester	Rohde & Schwarz	CMU200	106765	2013-02-09
23	LISN	Rohde & Schwarz	ENV216	101235	2013-08-06
24	LISN	Rohde & Schwarz	ENV216	101236	2013-08-06
25	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2013-11-08
26	EMI Test Receiver	Rohde & Schwarz	ESCI3	100032	2013-02-09
27	6dB Attenuator	R&S	DNF	272.4110.50	2013-11-09
28	AMPLIFIER	Sonoma Instrument Co.	310	291721	2013-03-27
29	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2013-06-29
30	Signal Generator	Rohde & Schwarz	SMB100A	175528	2013-10-08