

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00011202_SAR.VLT
Start : 12-Jan-100 09:02:53 am End : 12-Jan-100 09:09:30 am

Radio Type : LGIC LG-SD500
FCC ID : FFMSD500
Serial Number : U4
Frequency : 848.31 MHz
Peak Trans. Pwr : 0.285 W
Start Trans. Pwr: 0.285 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR 10g
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
CDMA MODE PHONE
CHAN. 777
SINGLE BAND HAND SAR

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.895

PCTEST Amplifier Channel Settings : 0.168 0.136 0.132

Max Location : X = 2.250, Y = -1.000, Z = 0.000 (cm) Value = 44.823

Ave. SAR over 10 g (mW/g) = 1.0371


X-Z Plane Slice Y=-1.000

File : 00011202_SAR

Start : 12-Jan-100 09:02:53 am End : 12-Jan-100 09:09:30 am

LGIC/FFMSD500/01;848.31MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

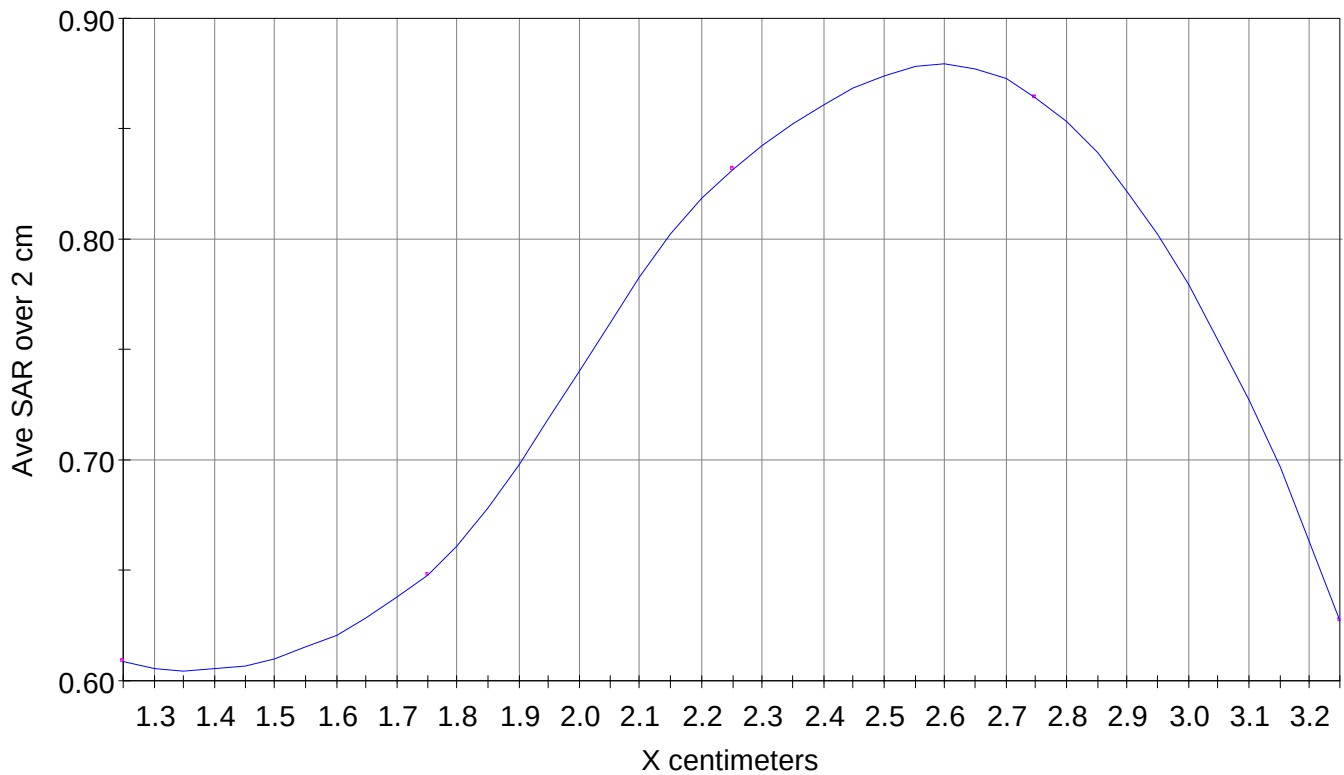


File : 00011202_SAR

Start : 12-Jan-100 09:02:53 am End : 12-Jan-100 09:09:30 am

LGIC/FFMSD500/01;848.31MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

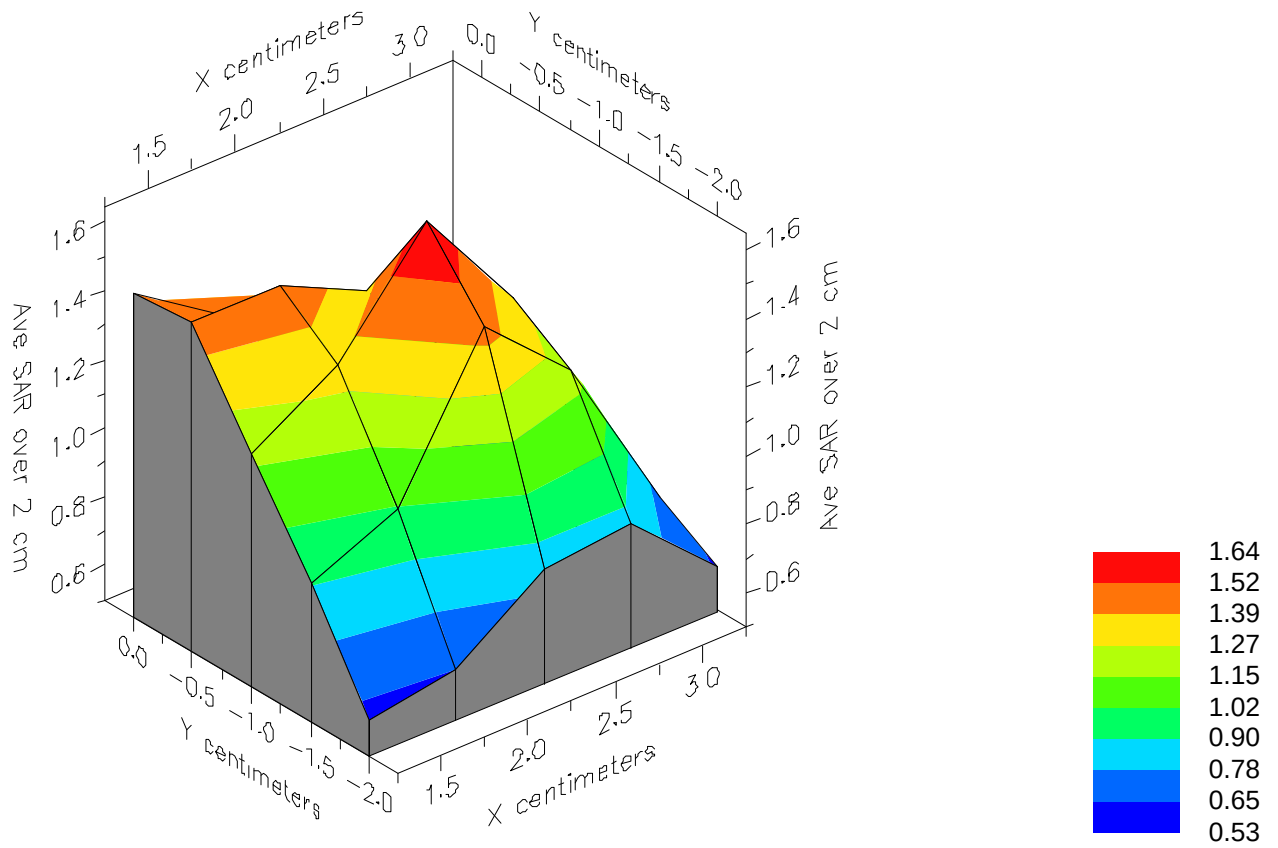


File : 00011202_SAR

Start : 12-Jan-100 09:02:53 am End : 12-Jan-100 09:09:30 am

LGIC/FFMSD500/01;848.31MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

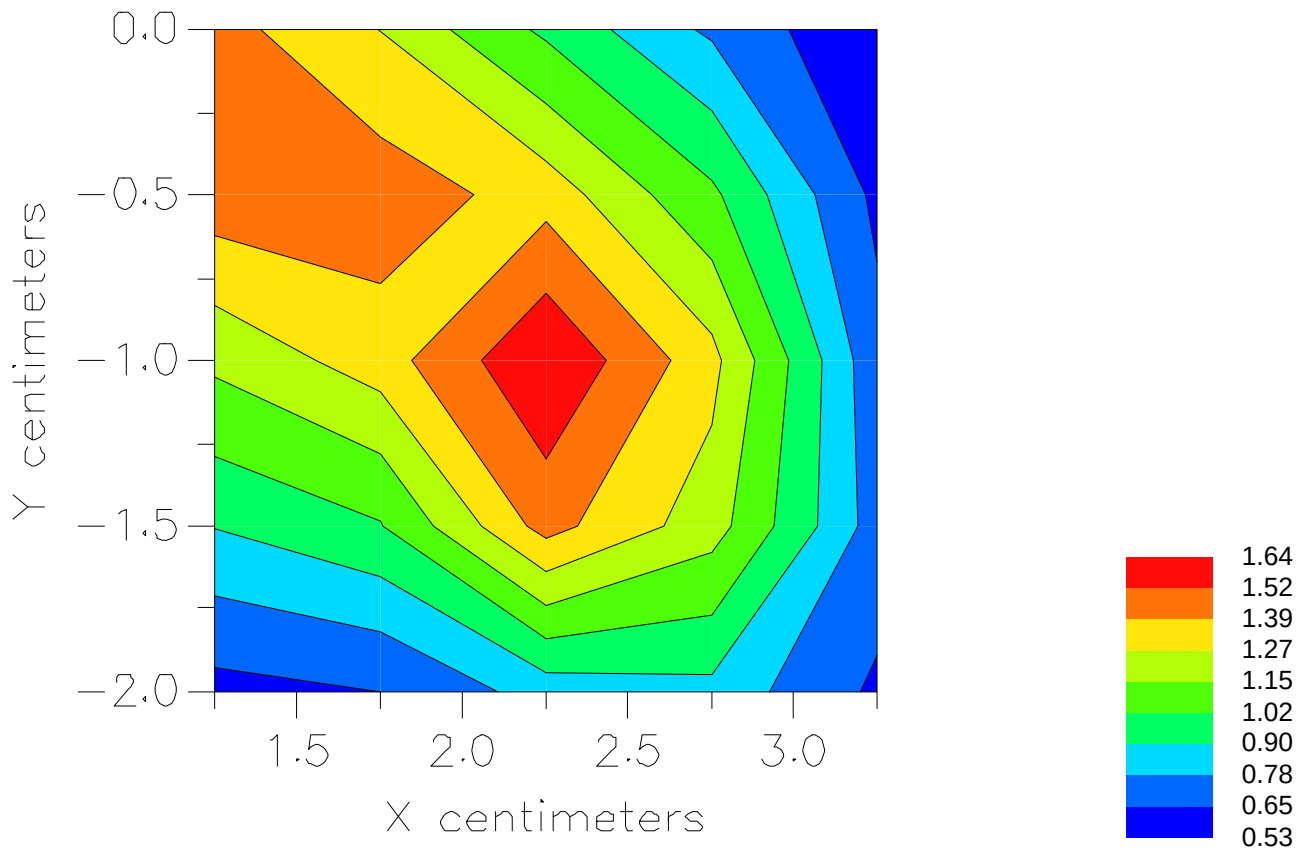

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00011201_SAR.VLT
Start : 12-Jan-100 08:39:17 am End : 12-Jan-100 08:45:54 am

Radio Type : LGIC LG-SD500
FCC ID : FFMSD500
Serial Number : U4
Frequency : 848.31 MHz
Peak Trans. Pwr : 0.285 W
Start Trans. Pwr: 0.285 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR 10g
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
CDMA MODE PHONE
CHAN. 777
SINGLE BAND HAND SAR

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.895

PCTEST Amplifier Channel Settings : 0.168 0.136 0.132

Max Location : X = 2.250, Y = -1.000, Z = 0.000 (cm) Value = 46.138

Ave. SAR over 10 g (mW/g) = 1.0419


X-Z Plane Slice Y=-1.000

File : 00011201_SAR

Start : 12-Jan-100 08:39:17 am End : 12-Jan-100 08:45:54 am

LGIC/FFMSD500/01;848.31MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

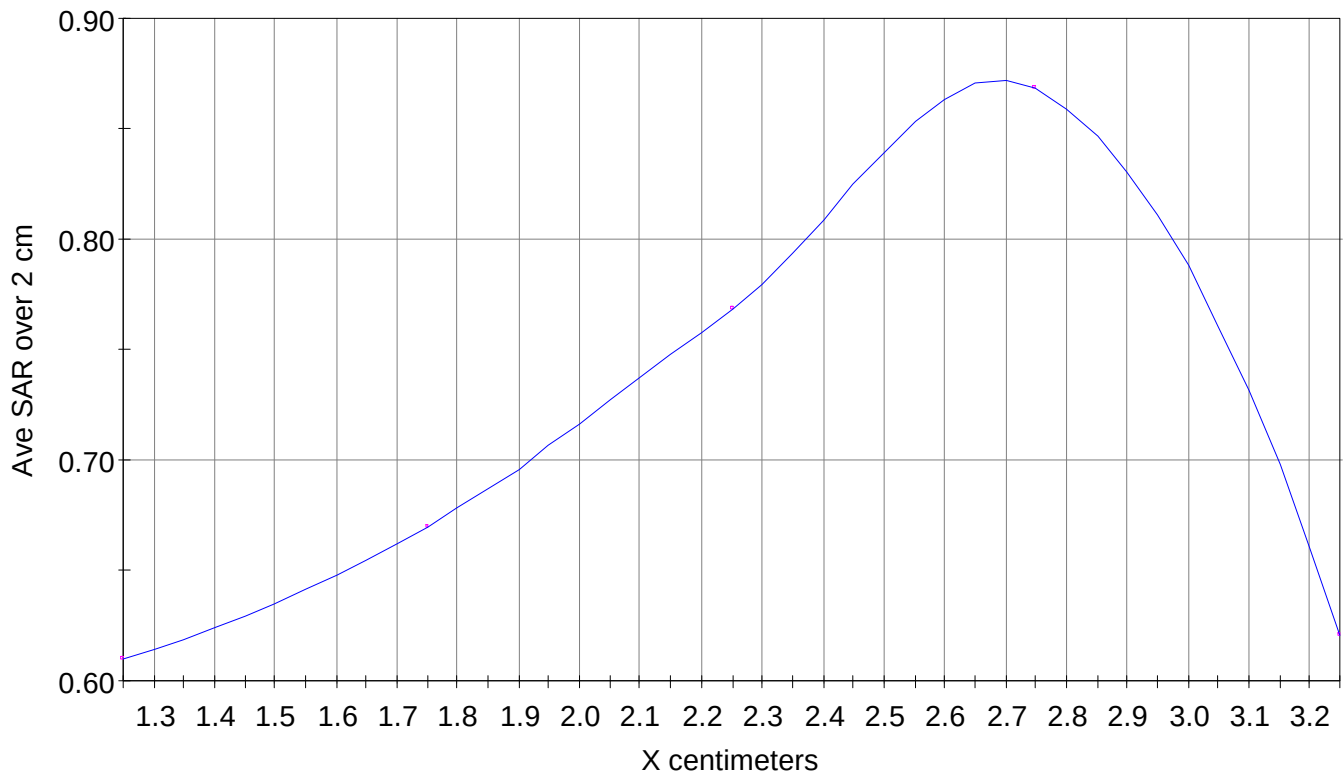


File : 00011201_SAR

Start : 12-Jan-100 08:39:17 am End : 12-Jan-100 08:45:54 am

LGIC/FFMSD500/01;848.31MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

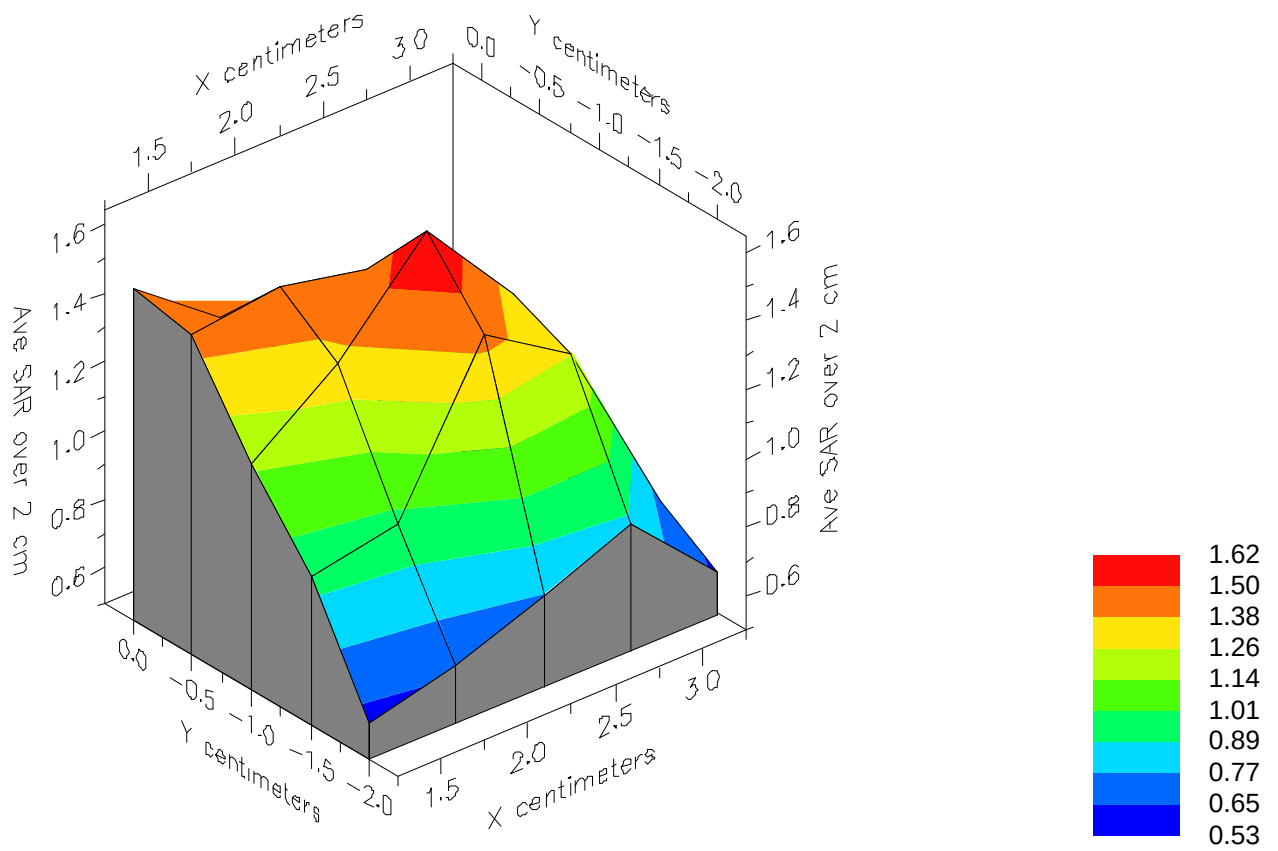

File : 00011201_SAR

Start : 12-Jan-100 08:39:17 am End : 12-Jan-100 08:45:54 am

LGIC/FFMSD500/01;848.31MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

