

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/99121418_SAR.VLT
Start : 14-Dec-99 03:47:56 pm End : 14-Dec-99 03:54:41 pm

Radio Type : LGIC LG-SP510
FCC ID : FFMSP510
Serial Number : U4
Frequency : 1880 MHz
Peak Trans. Pwr : 0.250 W
Start Trans. Pwr: 0.250 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR 10g
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 54.200
Mixture Conductivity = 1.850

Comment :
LGIC SINGLE MODE PCS PHONE -
CHAN. 600 CDMA MODE
+24 dBm CONDUCTED hand flip mode

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 1.380

PCTEST Amplifier Channel Settings : 0.250 0.233 0.225

Max Location : X = -1.500, Y = -5.250, Z = 0.000 (cm) Value = 34.828

Ave. SAR over 10 g (mW/g) = 1.0396


X-Z Plane Slice Y=-5.250

File : 99121418_SAR

Start : 14-Dec-99 03:47:56 pm End : 14-Dec-99 03:54:41 pm

LGIC/LG-SP510/U4;1880MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/54.200/1.850

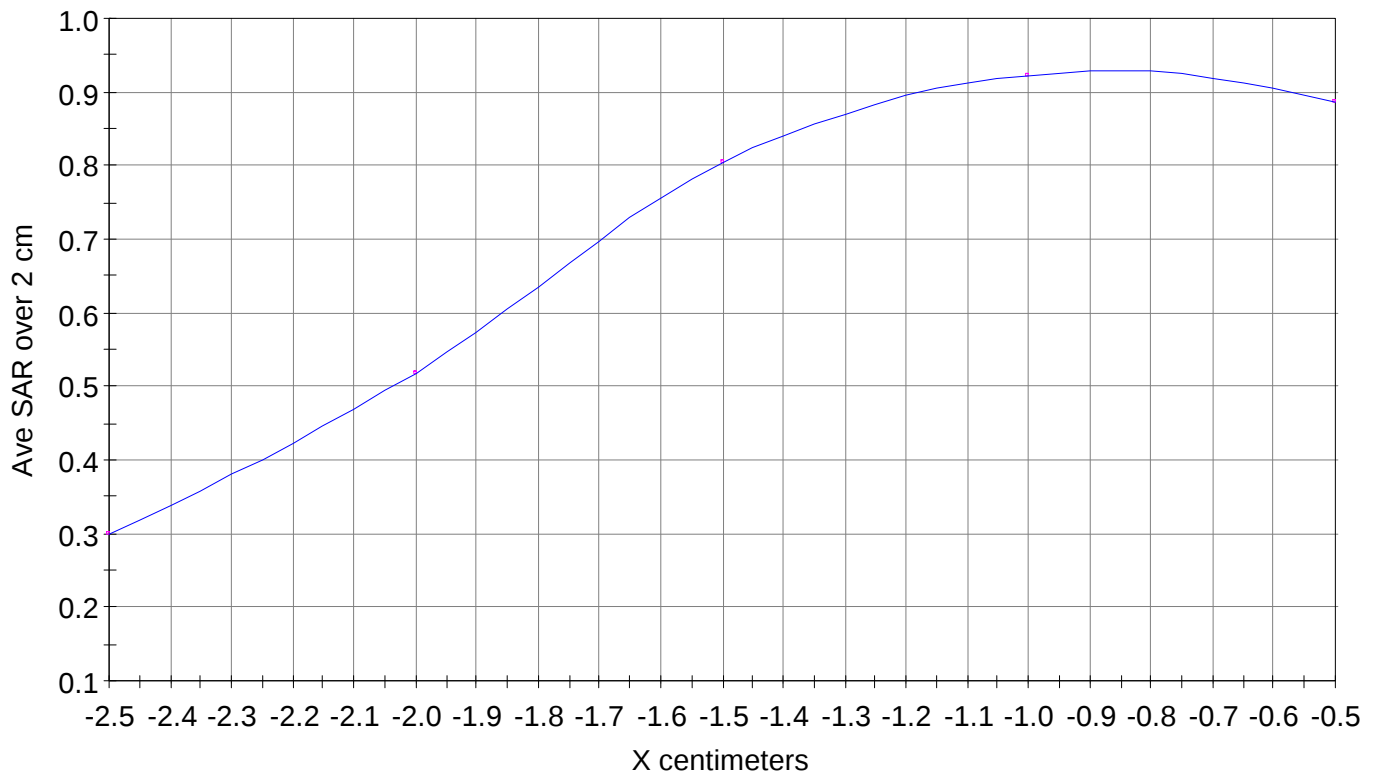


File : 99121418_SAR

Start : 14-Dec-99 03:47:56 pm End : 14-Dec-99 03:54:41 pm

LGIC/LG-SP510/U4;1880MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/54.200/1.850

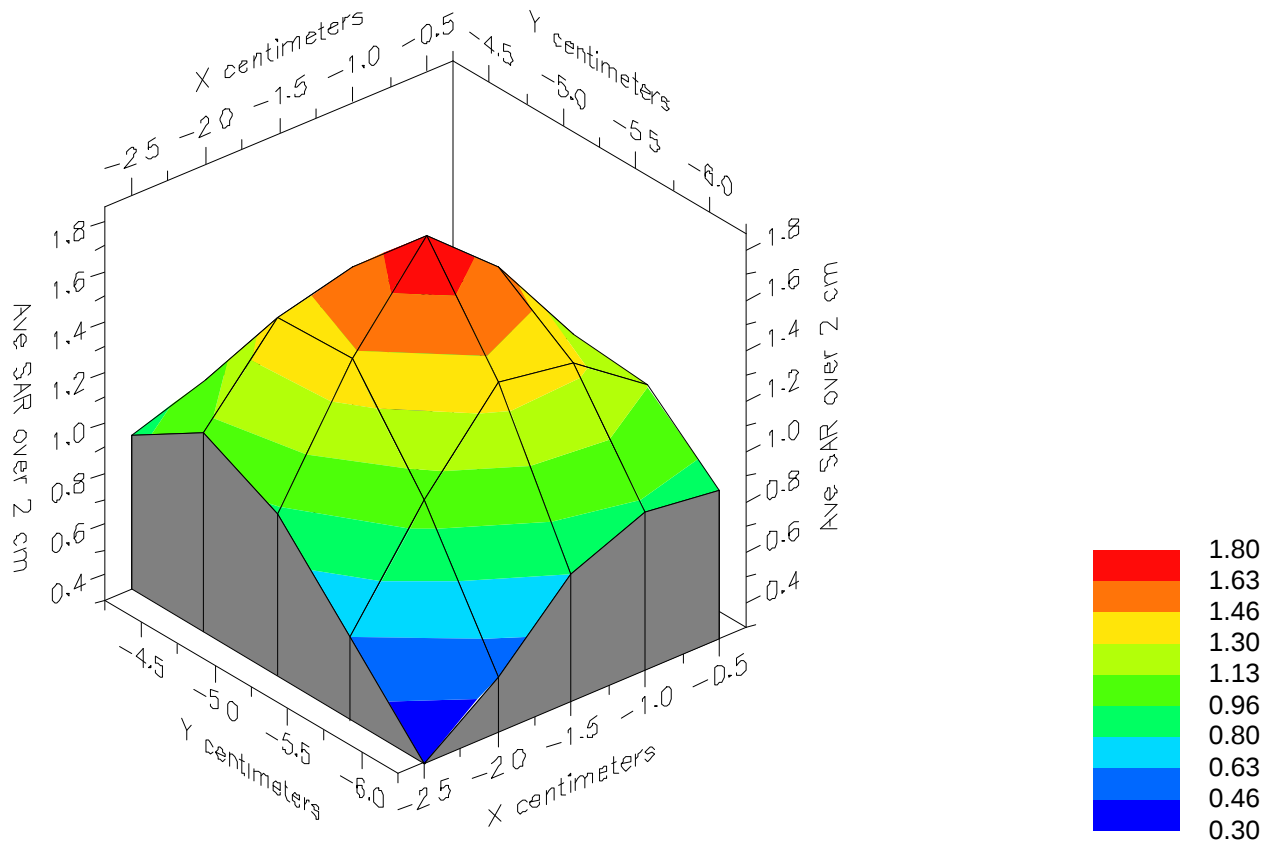


File : 99121418_SAR

Start : 14-Dec-99 03:47:56 pm End : 14-Dec-99 03:54:41 pm

LGIC/LG-SP510/U4;1880MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/54.200/1.850

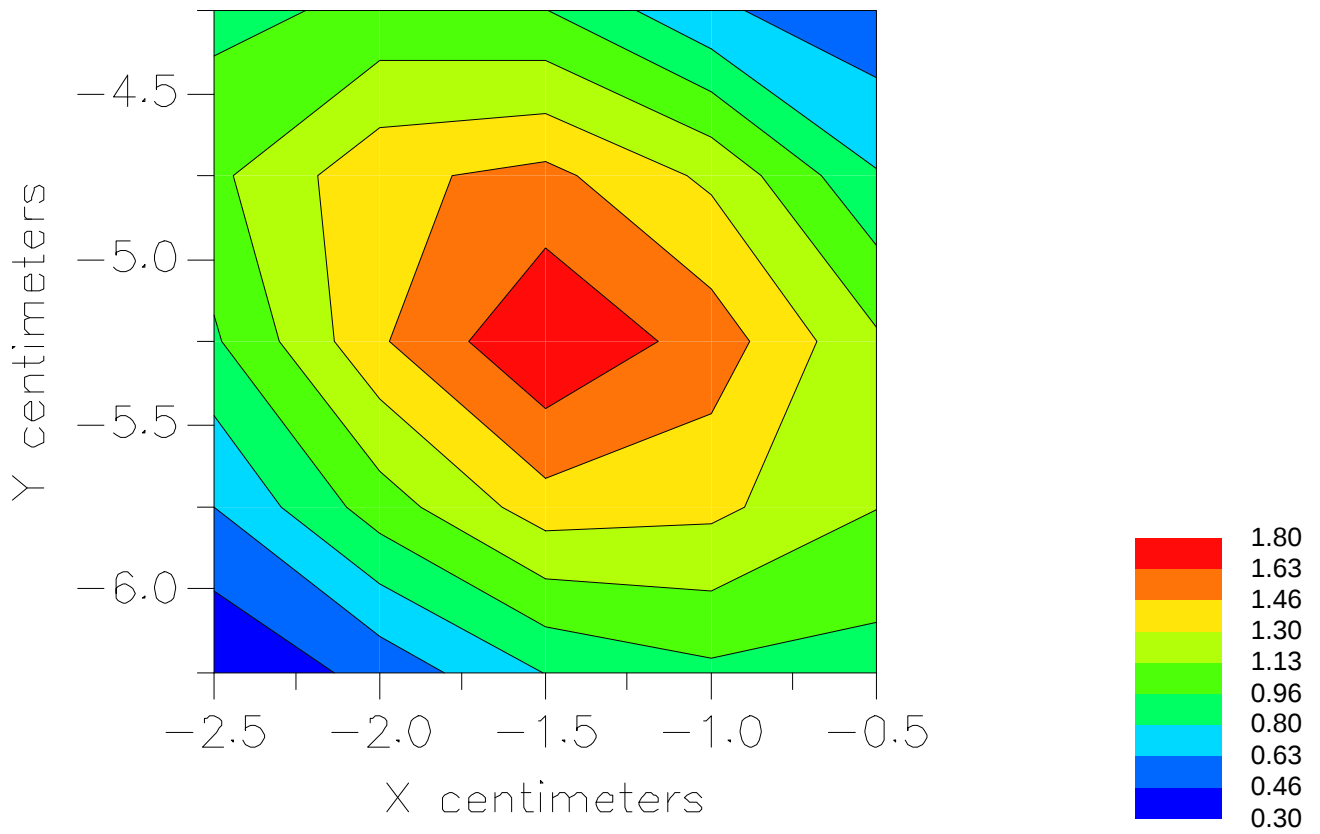

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/99121413_SAR.VLT
Start : 14-Dec-99 12:14:27 pm End : 14-Dec-99 12:20:55 pm

Radio Type : LGIC LG-SP510
FCC ID : FFMSP510
Serial Number : U4
Frequency : 1880 MHz
Peak Trans. Pwr : 0.250 W
Start Trans. Pwr: 0.250 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR 10g
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 54.200
Mixture Conductivity = 1.850

Comment :
LGIC SINGLE MODE PCS PHONE -
CHAN. 600 CDMA MODE
+24 dBm CONDUCTED hand flip mode

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 1.380

PCTEST Amplifier Channel Settings : 0.250 0.233 0.225

Max Location : X = -3.000, Y = -1.500, Z = 0.000 (cm) Value = 16.437

Ave. SAR over 10 g (mW/g) = 0.6230


X-Z Plane Slice Y=-1.500

File : 99121413_SAR

Start : 14-Dec-99 12:14:27 pm End : 14-Dec-99 12:20:55 pm

LGIC/LG-SP510/U4;1880MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/54.200/1.850

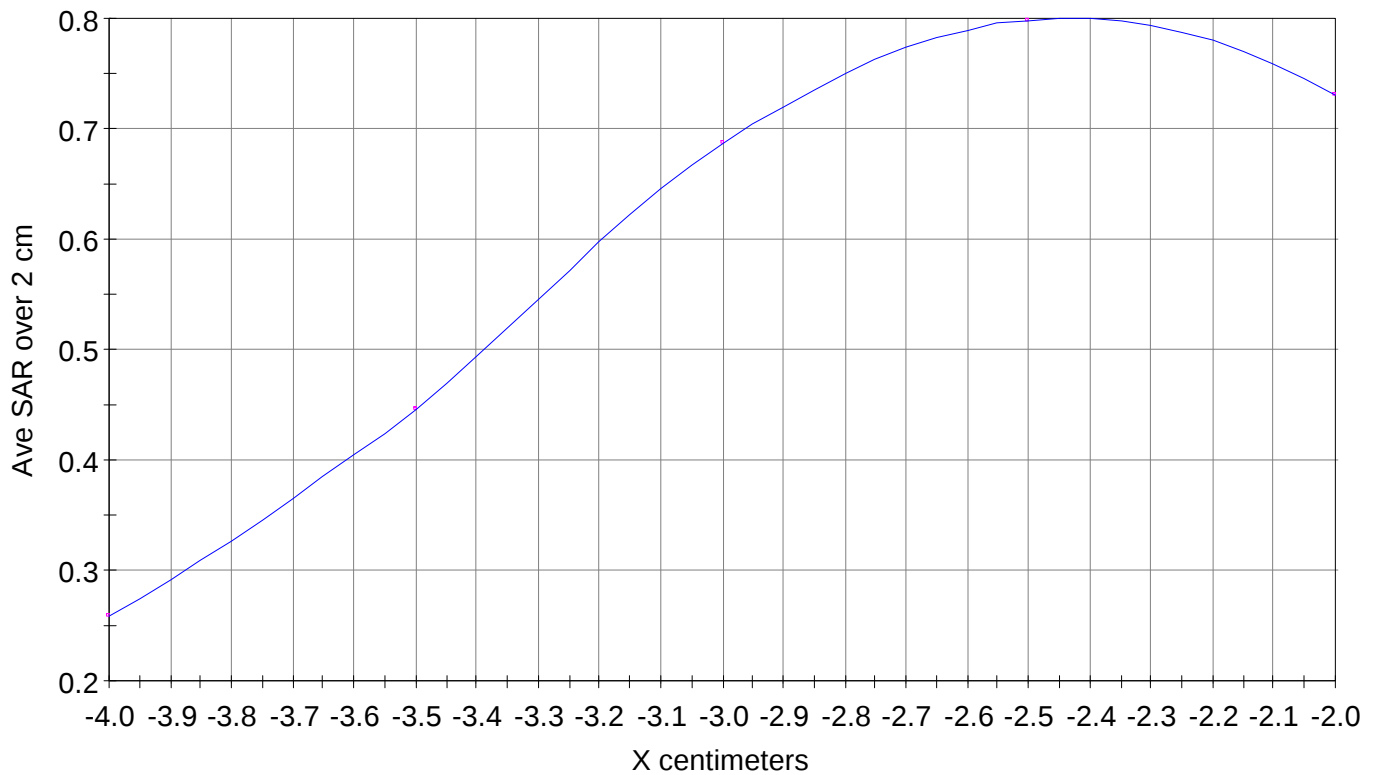


File : 99121413_SAR

Start : 14-Dec-99 12:14:27 pm End : 14-Dec-99 12:20:55 pm

LGIC/LG-SP510/U4;1880MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/54.200/1.850

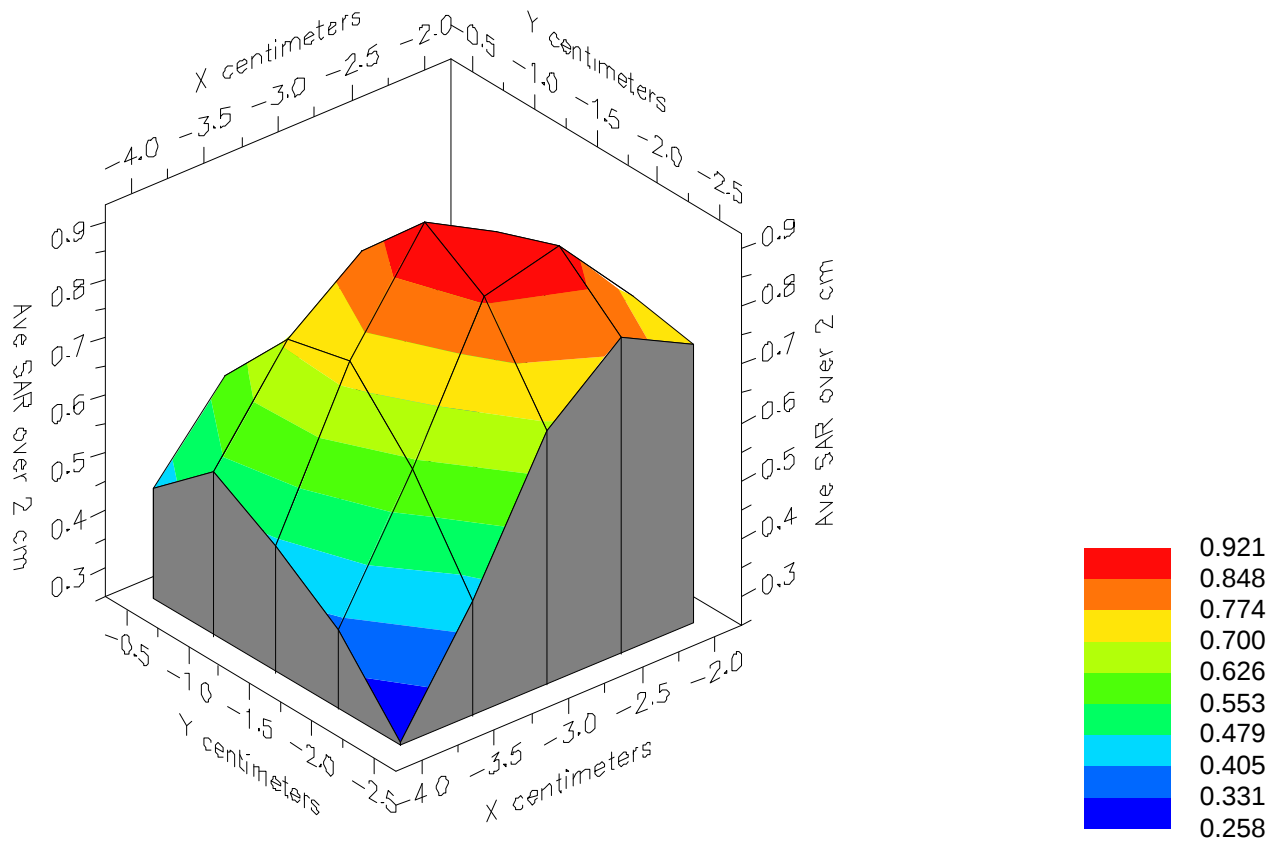

File : 99121413_SAR

Start : 14-Dec-99 12:14:27 pm End : 14-Dec-99 12:20:55 pm

LGIC/LG-SP510/U4;1880MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/54.200/1.850

