

FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

Wireless digital scanner

MODEL No.: WS-T4W, JET-DBG011-WIFI, JET-DBG011-WIFI-H, WS-T4, WS-T4-H,
WS-T4W-H, WS-T3, WS-T3-H, WS-T3W, WS-T3W-H

FCC ID: FGOWS-T4W

Trade Mark:  **Jetion®**,  **Jetion**

REPORT NO.: ES141126212E

ISSUE DATE: February 8, 2015

Prepared for

JETION INTERNATIONAL LIMITED

Room 501, No.894, North TianHe Road, GuangZhou510630, China.

Prepared by

SHENZHEN EMTEK CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION.....	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	5
4	TEST METHODOLOGY	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.2	MEASUREMENT EQUIPMENT USED	6
4.3	DESCRIPTION OF TEST MODES.....	7
5	FACILITIES AND ACCREDITATIONS	8
5.1	FACILITIES	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	8
6	TEST SYSTEM UNCERTAINTY	9
7	SETUP OF EQUIPMENT UNDER TEST	10
7.1	RADIO FREQUENCY TEST SETUP 1	10
7.2	RADIO FREQUENCY TEST SETUP 2.....	10
7.3	CONDUCTED EMISSION TEST SETUP	11
7.4	SUPPORT EQUIPMENT	11
8	TEST REQUIREMENTS.....	12
8.1	DTS (6DB) BANDWIDTH	12
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	19
8.3	MAXIMUM POWER SPECTRAL DENSITY	20
8.4	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS	27
8.5	RADIATED SPURIOUS EMISSION	32
8.6	CONDUCTED EMISSION TEST	57
8.7	ANTENNA APPLICATION	60

1 TEST RESULT CERTIFICATION

Applicant: JETION INTERNATIONAL LIMITED

Manufacturer: JETION INTERNATIONAL LIMITED

EUT Description: Wireless digital scanner

Model Number: WS-T4W, JET-DBG011-WIFI, JET-DBG011-WIFI-H, WS-T4, WS-T4-H, WS-T4W-H, WS-T3, WS-T3-H, WS-T3W, WS-T3W-H

(Note: all the model numbers are identical in circuitry and electrical, mechanical and physical construction, PCB layout, External dimension; the only differences are the model no., and the colour of appearance. for trading purpose. We take WS-T4W to test.)

File Number: ES141126212E

Date of Test: November 27, 2014 to February 8, 2015


Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2014) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : December 15, 2014 to December 27, 2014

Prepared by : 
Jack Li /Editor

Reviewer : 
Joe Xia/Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
IEEE 802.11 WLAN Mode Supported:	☒ 802.11b(20MHz channel bandwidth) ☒ 802.11g(20MHz channel bandwidth) ☒ 802.11n(20MHz channel bandwidth) ☒ 802.11n(40MHz channel bandwidth)
Data Rate:	802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS7; 802.11n(HT40):MCS0-MCS7;
Modulation:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range:	2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40);
Number of Channels:	11 channels for 802.11b/g; 11 channels for 802.11n(HT20); 7 channels for 802.11n(HT40);
Transmit Power Max:	17.08dBm for 802.11b; 16.05dBm for 802.11g; 16.19dBm for 802.11n(HT20); 16.52dBm for 802.11n(HT40);
Antenna Type:	☒ integral antenna; ☐ antenna connector
Antenna Port:	☒ Ant1 ; ☐ Ant2 ;
Smart system:	☒ SISO for 802.11b/g/n ☐ MIMO for 802.11n
Antenna Gain:	2dBi
Power supply:	☒ DC supply: DC3.7V internal rechargeable lithium battery or DC 5V from USB Port only
	☐ Adapter supply:
Temperature Range:	-10°C ~ +55°C

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	N/A	
15.247(b)	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v03r02

FCC KDB 662911 D01 Multiple Transmitter Output v01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/17/2014
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/17/2014
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/17/2014
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/17/2014

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/17/2014
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014
Cable	Schwarzbeck	AK9513	ACRX1	05/17/2014
Cable	Rosenberger	N/A	FP2RX2	05/17/2014
Cable	Schwarzbeck	AK9513	CRPX1	05/17/2014
Cable	Schwarzbeck	AK9513	CRRX2	05/17/2014

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014
Power meter	Anritsu	ML2495A	0824006	05/17/2014
Power sensor	Anritsu	MA2411B	0738172	05/17/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11 n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	8	2447
4	2427	6	2437	9	2452
		7	2442		

Test Frequency and Channel for 802.11b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11 n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- EMC Lab.
- : Accredited by CNAS, 2013.10.29
The certificate is valid until 2016.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291
 - : Accredited by TUV Rheinland Shenzhen, 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025.
 - : Accredited by FCC, October 28, 2010
The Certificate Registration Number is 406365.
 - : Accredited by FCC, February 28, 2013
The Certificate Registration Number is 709623.
 - : Accredited by Industry Canada, May 24, 2008
The Certificate Registration Number is 4480A-2

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.




7.2 RADIO FREQUENCY TEST SETUP 2


The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.4-2014 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency below 30MHz

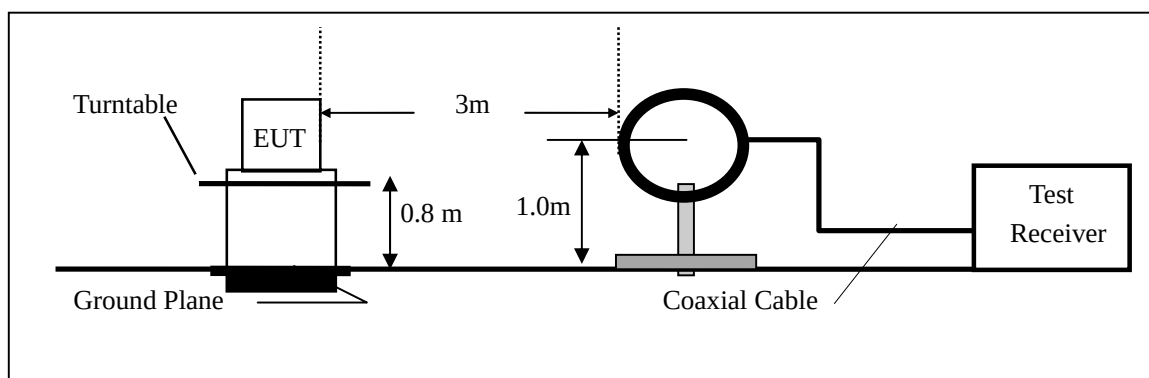

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

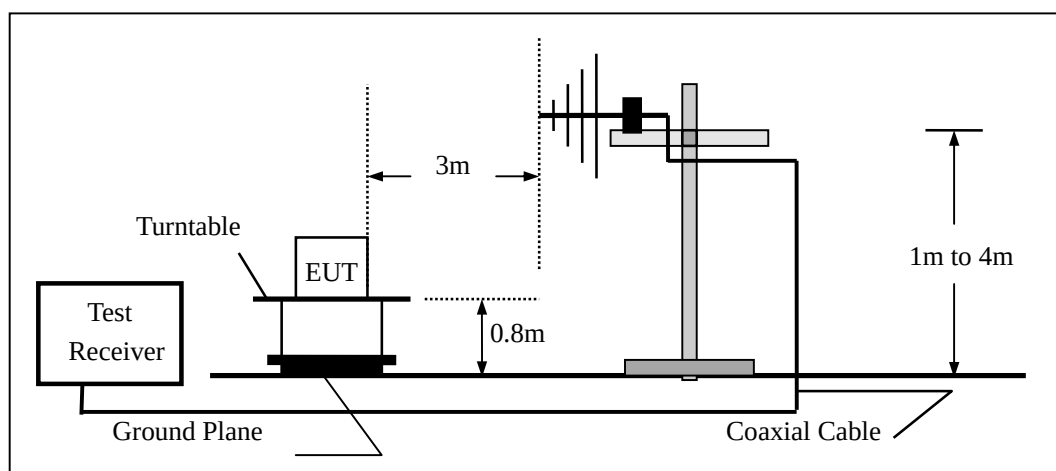

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

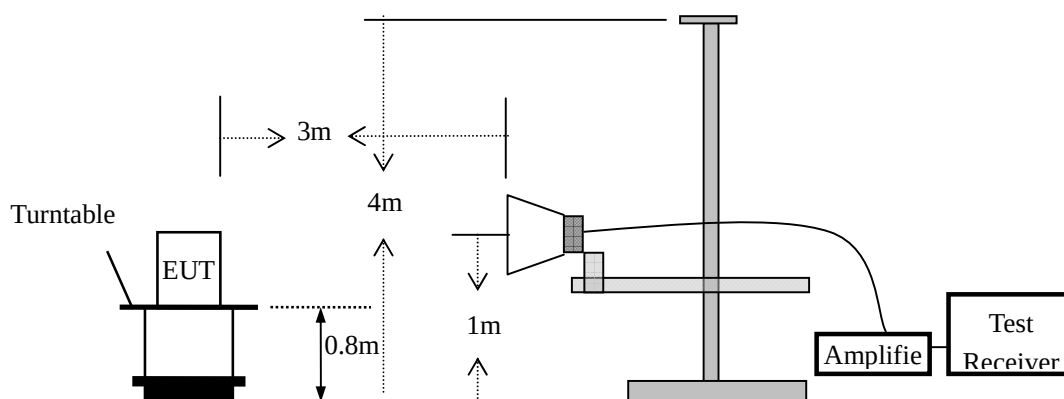


7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Wireless digital scanner) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.4-2014 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

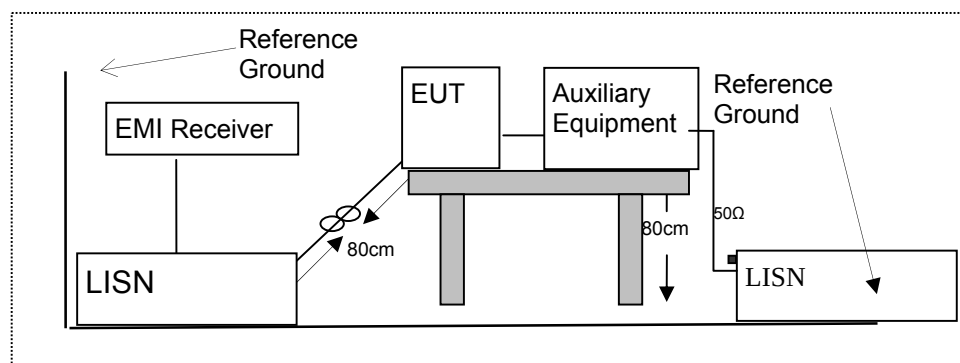

7.4 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adaptor	HUONIU	HNEB050200UE	N/A	AC 100-240V~ 50/60Hz,0.35A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS (6DB) BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r02

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.


8.1.5 Test Results

Temperature: 24°C
Humidity: 53 %


Test Date: January 30, 2015
Test By: KING KONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	7.680	500	PASS
	6	2437	7.713	500	PASS
	11	2462	7.563	500	PASS
802.11g	1	2412	16.395	500	PASS
	6	2437	16.413	500	PASS
	11	2462	16.469	500	PASS
802.11n (HT20)	1	2412	17.698	500	PASS
	6	2437	17.652	500	PASS
	11	2462	17.735	500	PASS
802.11n (HT40)	3	2422	36.046	500	PASS
	6	2437	36.351	500	PASS
	9	2452	34.466	500	PASS


Test Model	DTS (6dB) Bandwidth
	802.11b
	Channel 1: 2412MHz

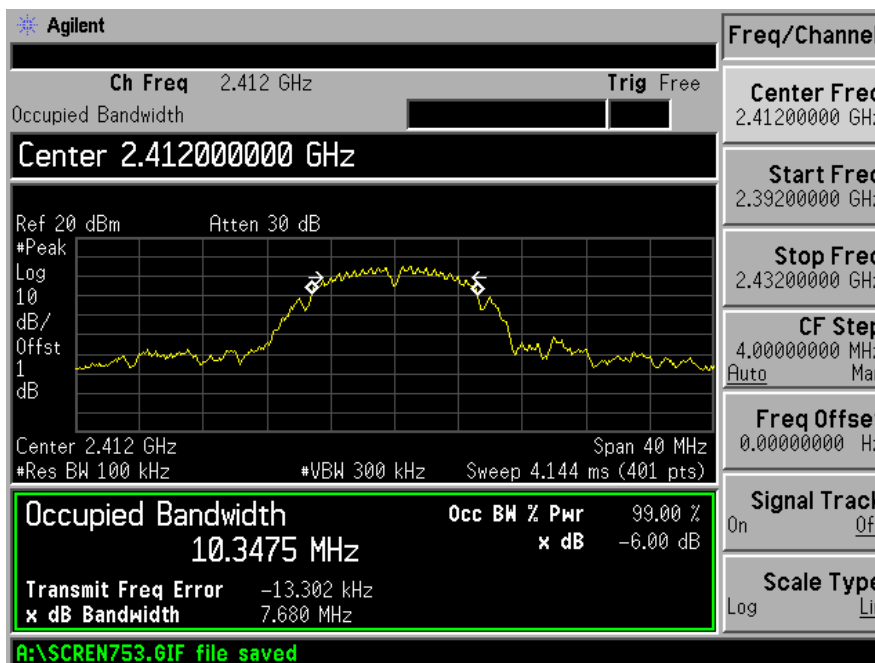


Test Model	DTS (6dB) Bandwidth
	802.11b
	Channel 6: 2437MHz

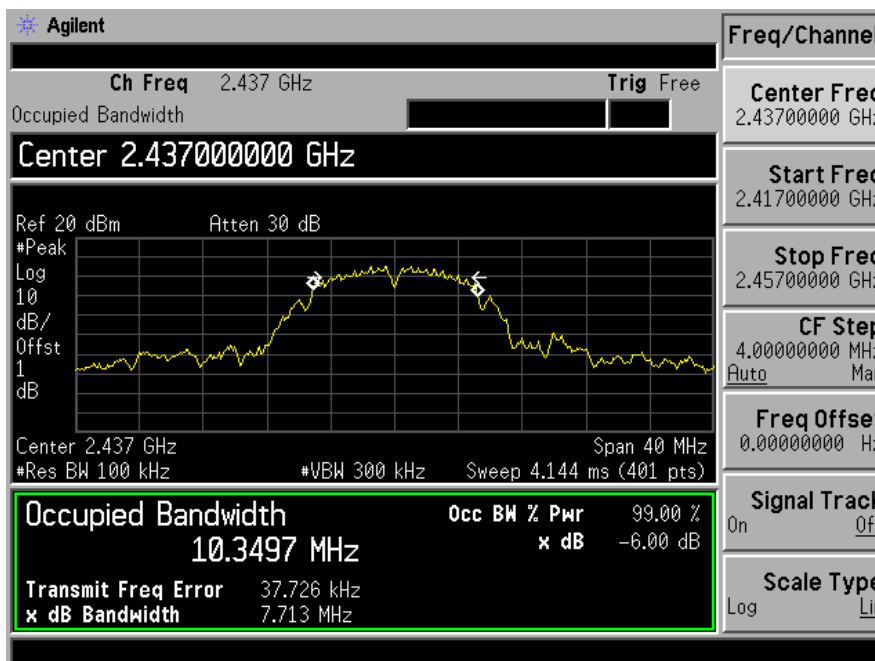


Test Model	DTS (6dB) Bandwidth
	802.11b
	Channel 11: 2462MHz

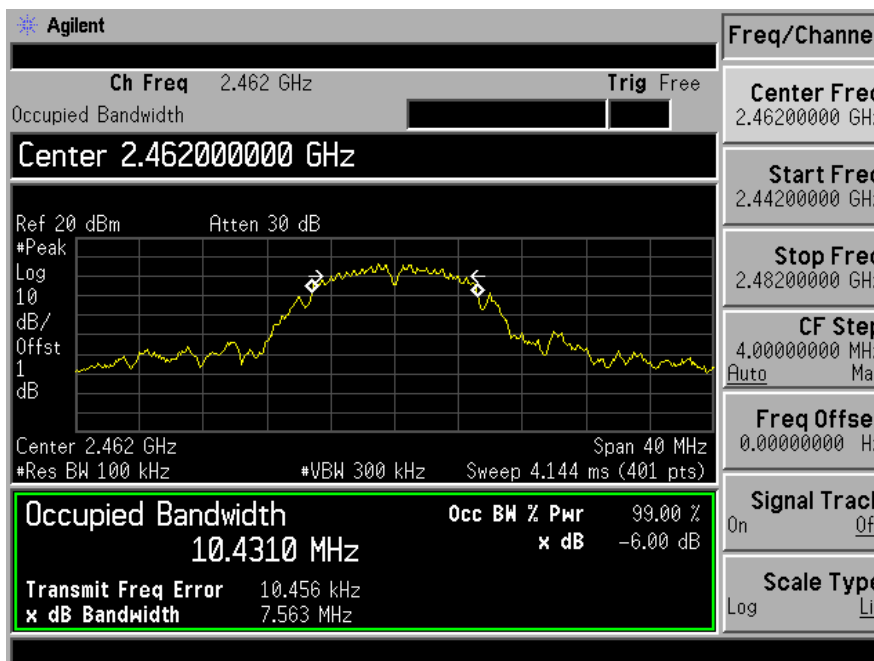


Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 1: 2412MHz

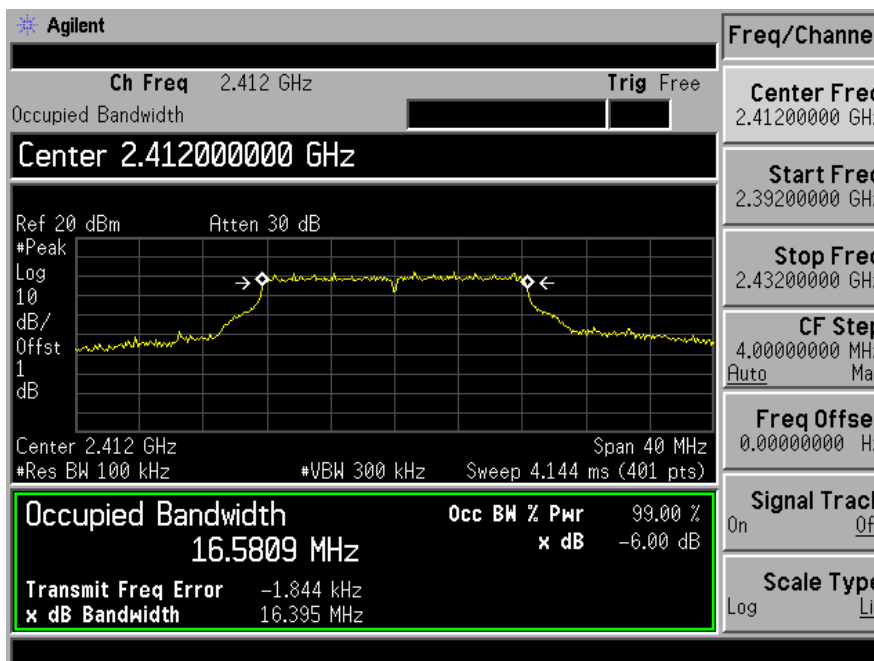


Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 6: 2437MHz

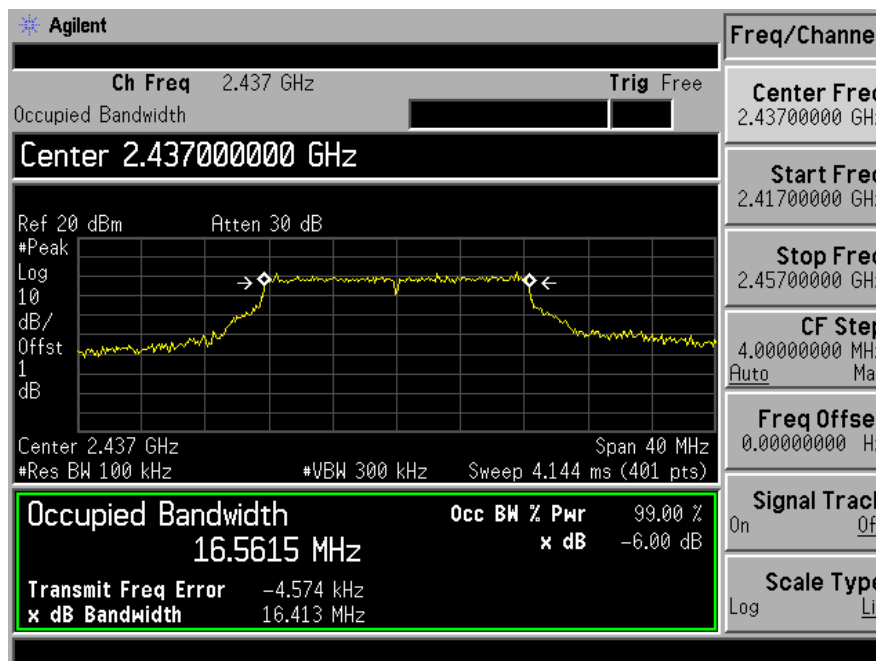


Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 11: 2462MHz

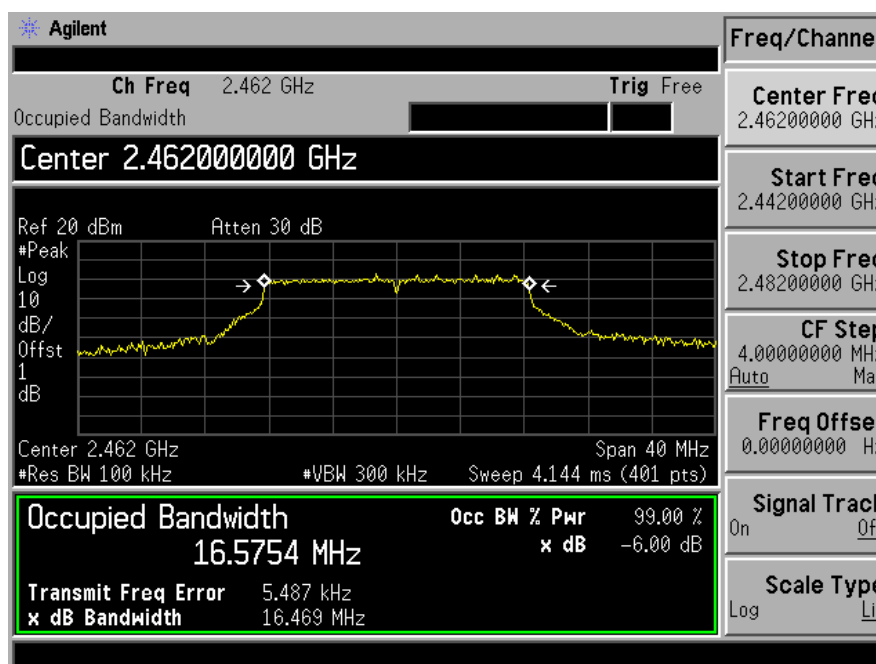


Test Model	DTS (6dB) Bandwidth
	802.11n (HT20)
	Channel 1: 2412MHz

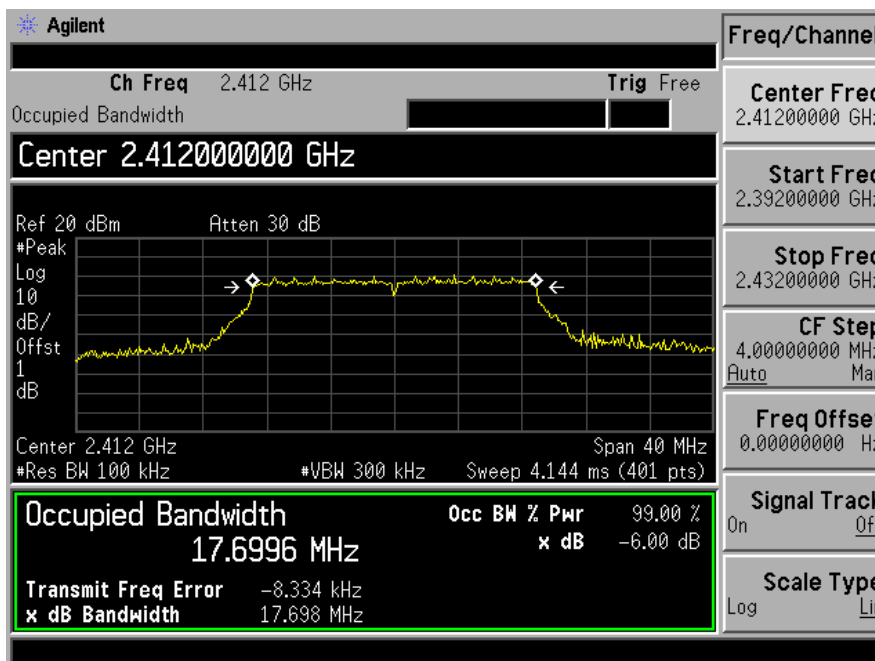


Test Model	DTS (6dB) Bandwidth
	802.11n (HT20)
	Channel 6: 2437MHz

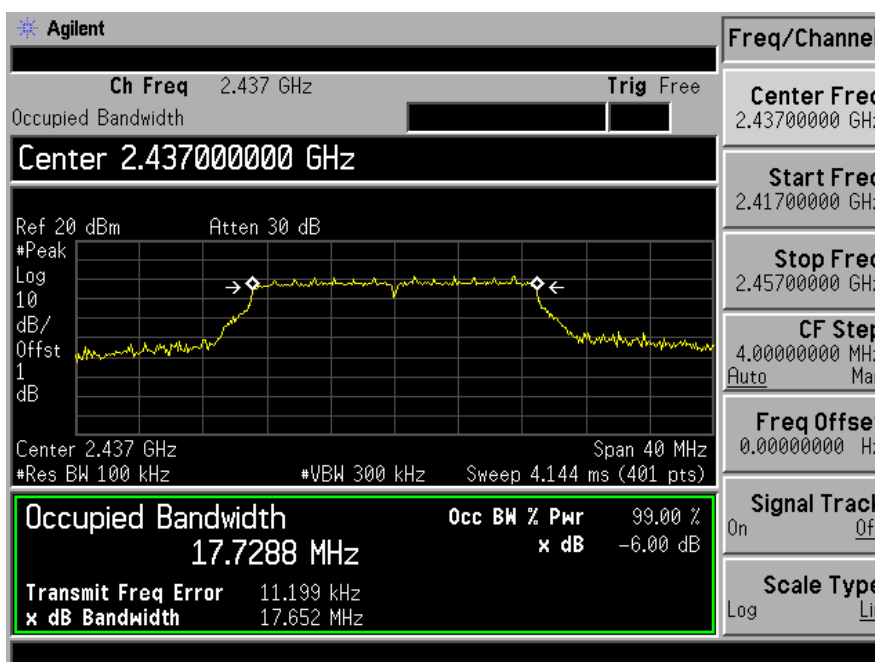


Test Model	DTS (6dB) Bandwidth
	802.11n (HT20)
	Channel 11: 2462MHz

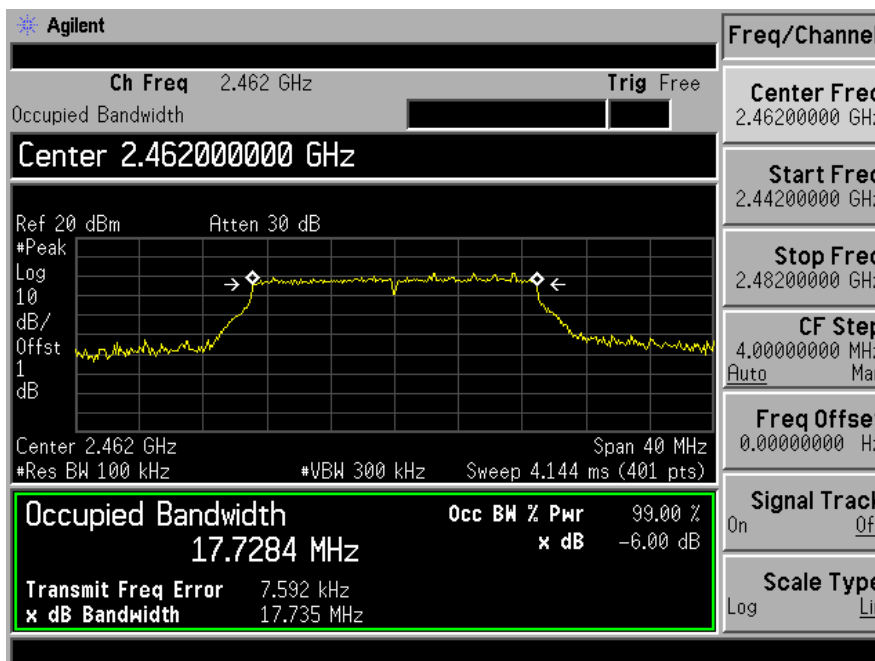


Test Model	DTS (6dB) Bandwidth
	802.11n (HT40)
	Channel 3: 2422MHz

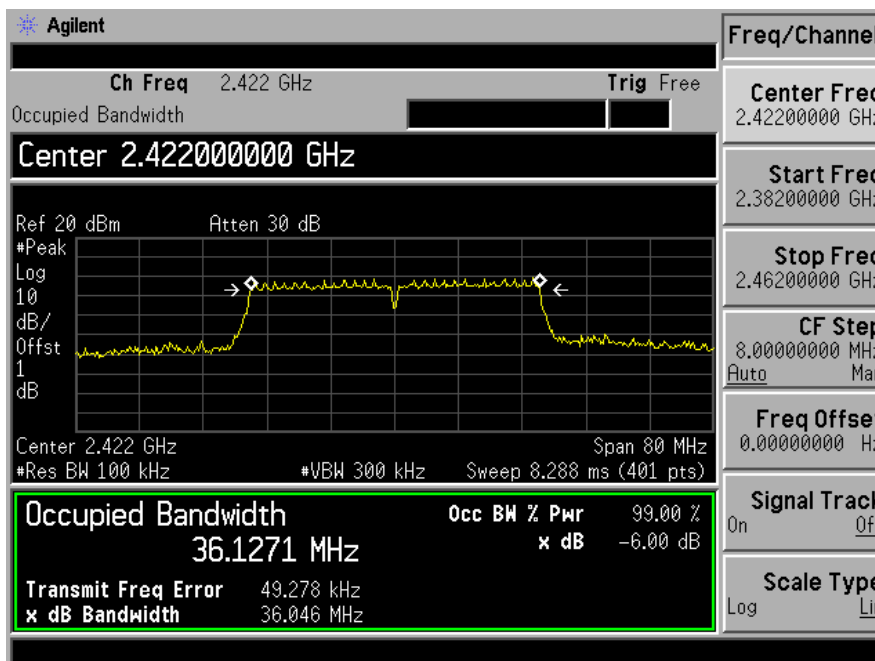

Test Model	DTS (6dB) Bandwidth
	802.11n (HT40)
	Channel 6: 2437MHz

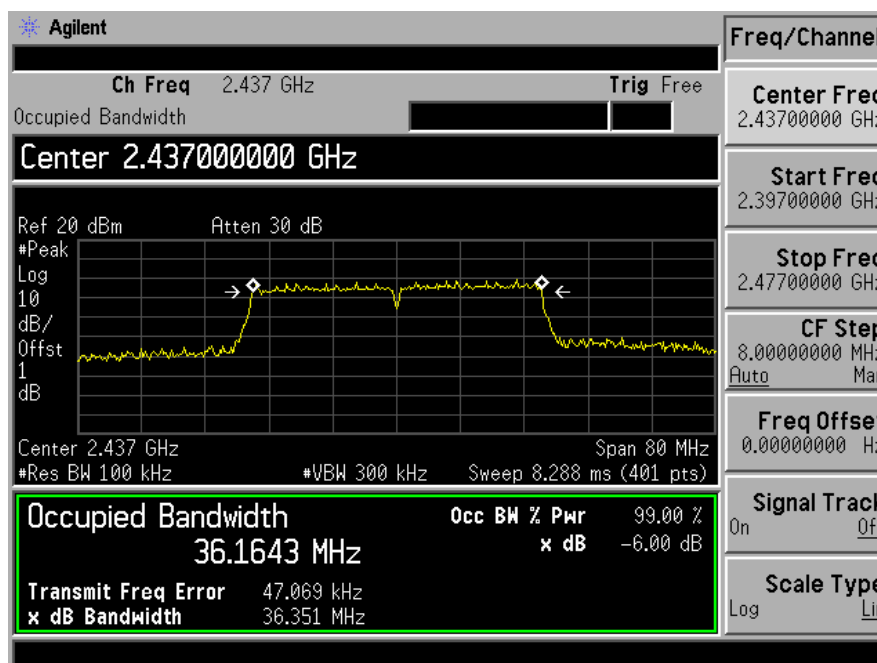

Test Model	DTS (6dB) Bandwidth
	802.11n (HT40)
	Channel 9: 2452MHz

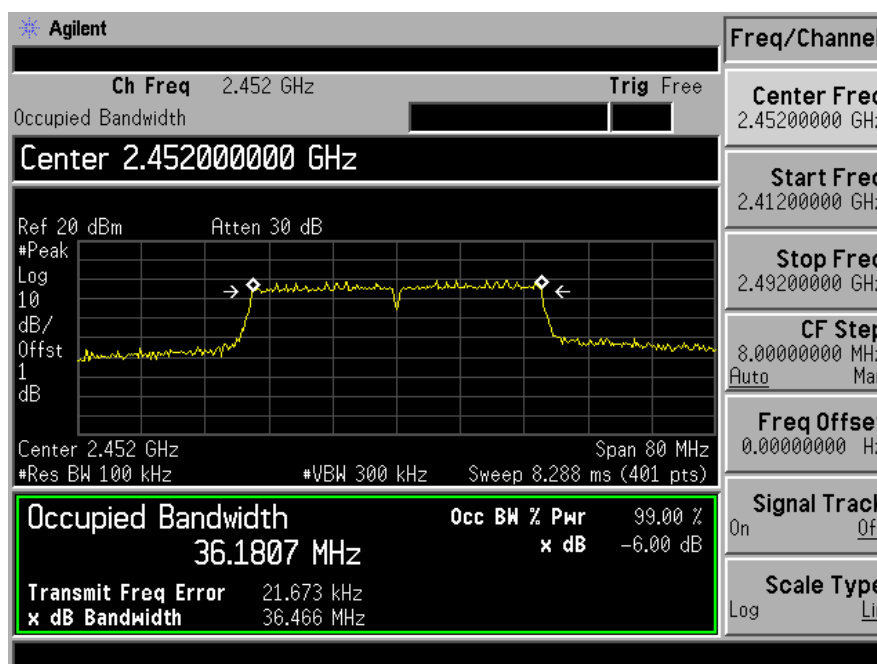

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r02

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part 15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The testing follows FCC public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.5 Test Results

Temperature: 24°C
Humidity: 53 %

Test Date: January 30, 2015
Test By: KING KONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11b	1	2412	16.05	30	PASS
	6	2437	16.47	30	PASS
	11	2462	17.08	30	PASS
802.11g	1	2412	15.80	30	PASS
	6	2437	16.05	30	PASS
	11	2462	15.82	30	PASS
802.11n (HT20)	1	2412	16.08	30	PASS
	6	2437	16.19	30	PASS
	11	2462	15.90	30	PASS
802.11n (HT40)	3	2422	16.44	30	PASS
	6	2437	16.22	30	PASS
	9	2452	16.52	30	PASS
Note: N/A					

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r02

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.


8.3.5 Test Results

Temperature: 24°C
Humidity: 53 %


Test Date: January 30, 2015
Test By: KING KONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-9.385	8	PASS
	6	2437	-8.516	8	PASS
	11	2462	-8.305	8	PASS
802.11g	1	2412	-12.62	8	PASS
	6	2437	-13.25	8	PASS
	11	2462	-13.70	8	PASS
802.11n (HT20)	1	2412	-13.10	8	PASS
	6	2437	-13.07	8	PASS
	11	2462	-13.35	8	PASS
802.11n (HT40)	3	2422	-15.98	8	PASS
	6	2437	-16.54	8	PASS
	9	2452	-15.25	8	PASS
Note: N/A					


Test Model	Power Spectral Density
	802.11b
	Channel 1: 2412MHz

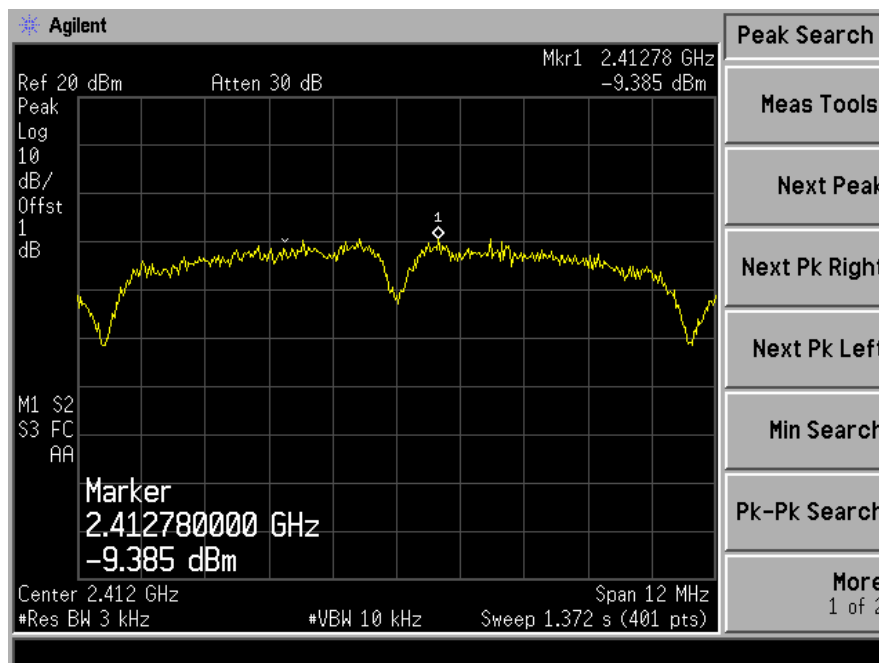


Test Model	Power Spectral Density
	802.11b
	Channel 6: 2437MHz

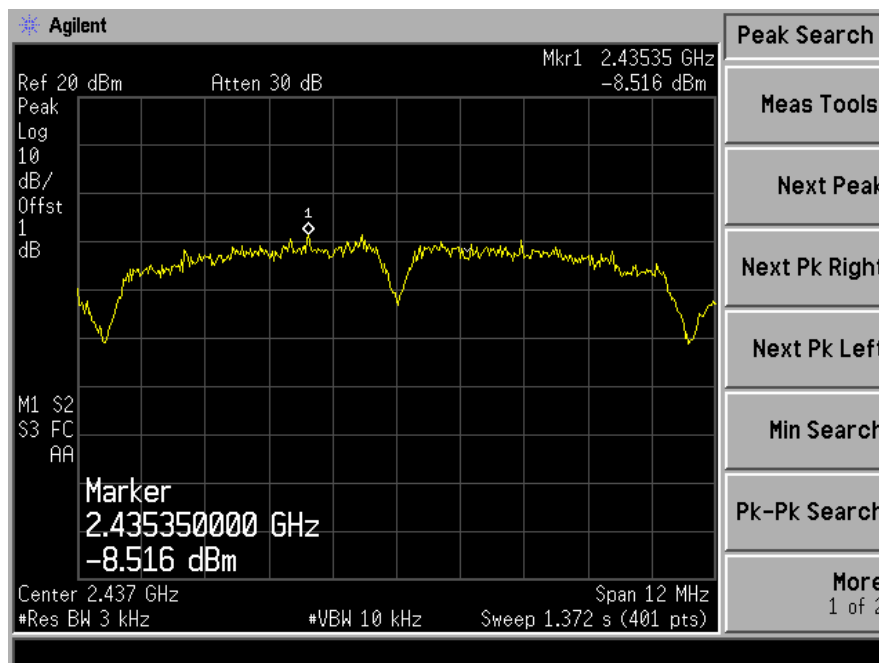


Test Model	Power Spectral Density
	802.11b
	Channel 11: 2462MHz

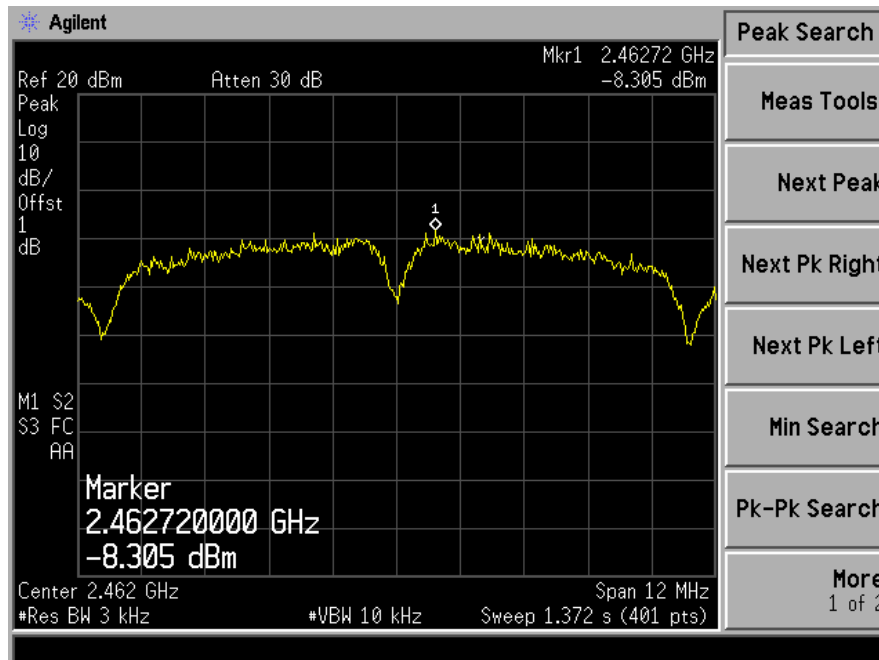


Test Model	Power Spectral Density
	802.11g
	Channel 1: 2412MHz

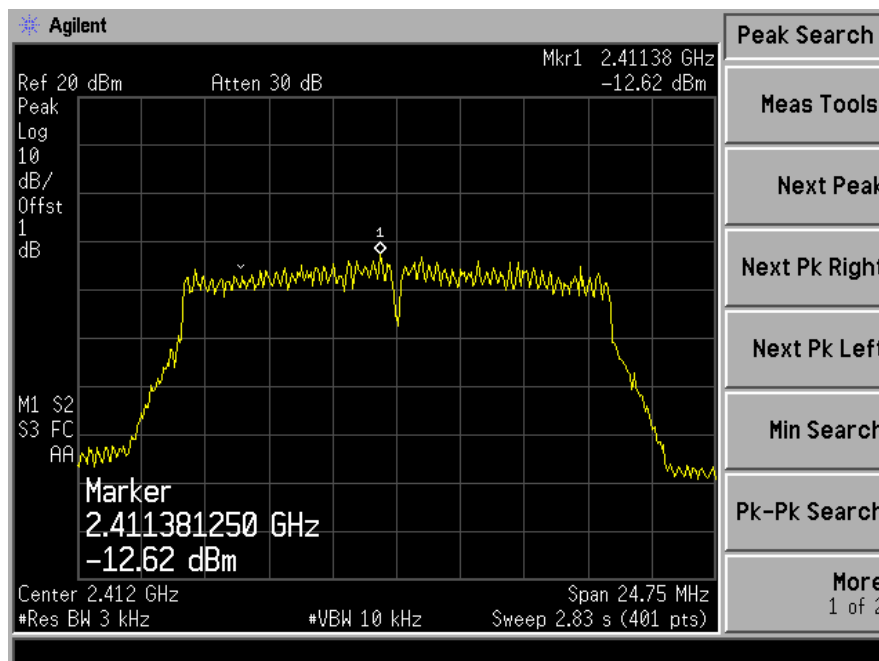


Test Model	Power Spectral Density
	802.11g
	Channel 6: 2437MHz

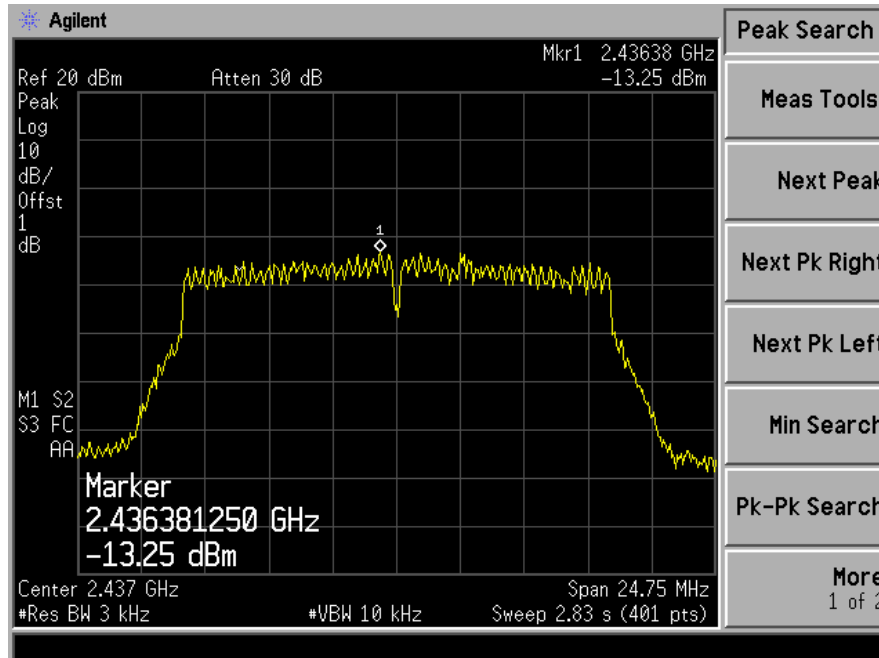


Test Model	Power Spectral Density
	802.11g
	Channel 11: 2462MHz

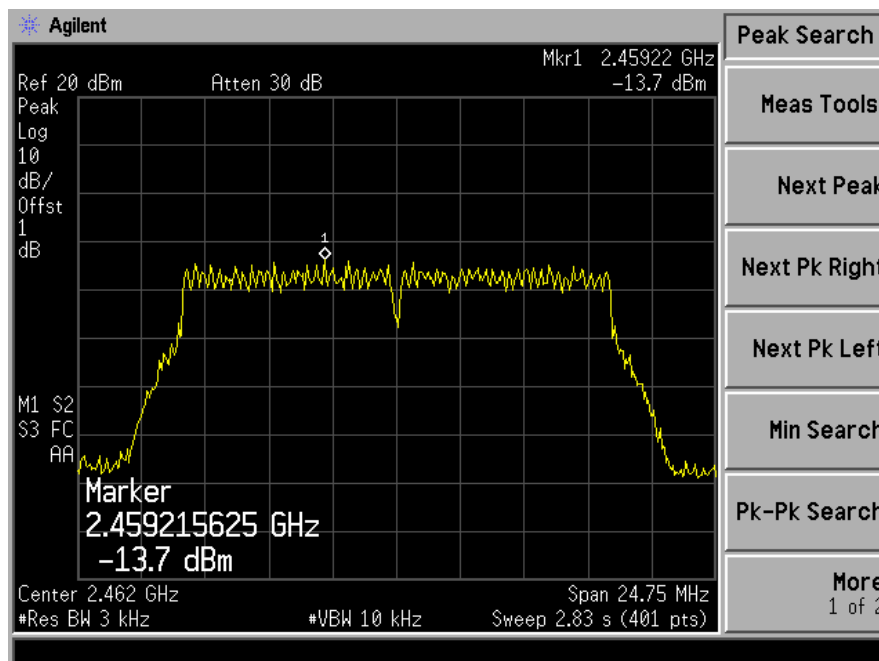


Test Model	Power Spectral Density
	802.11n (HT20)
	Channel 1: 2412MHz

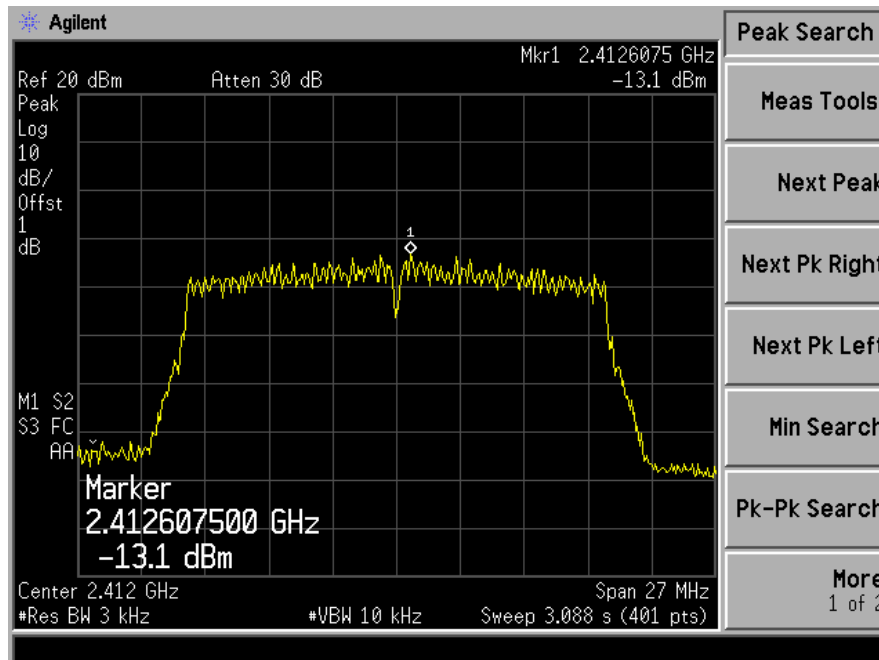


Test Model	Power Spectral Density
	802.11n (HT20)
	Channel 6: 2437MHz

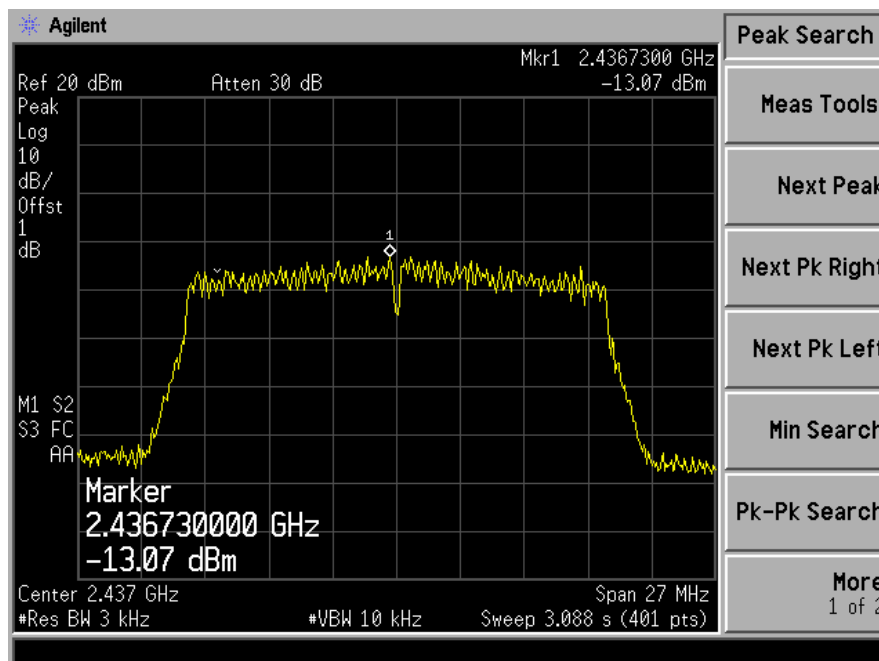


Test Model	Power Spectral Density
	802.11n (HT20)
	Channel 11: 2462MHz

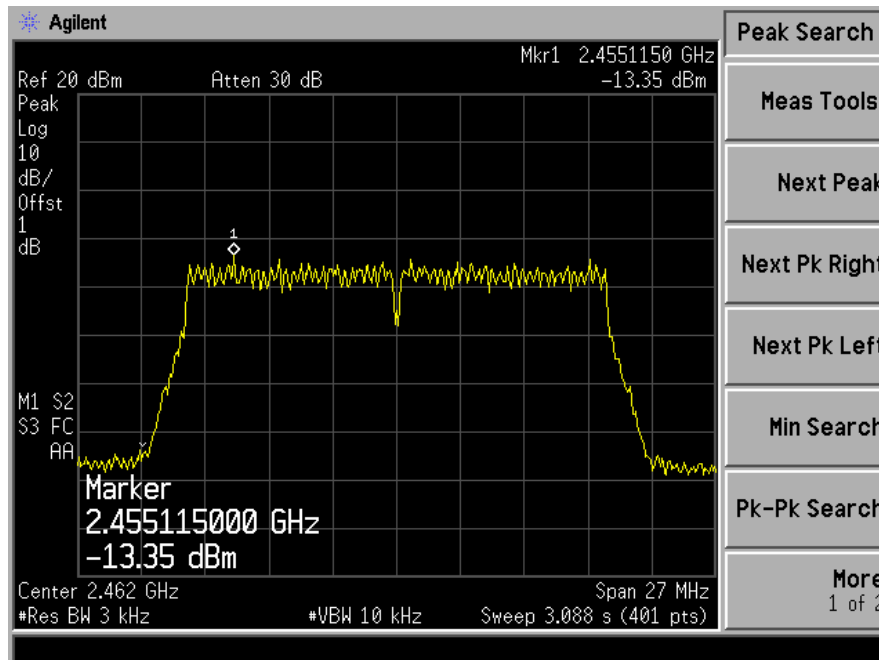


Test Model	Power Spectral Density
	802.11n (HT40)
	Channel 3: 2422MHz

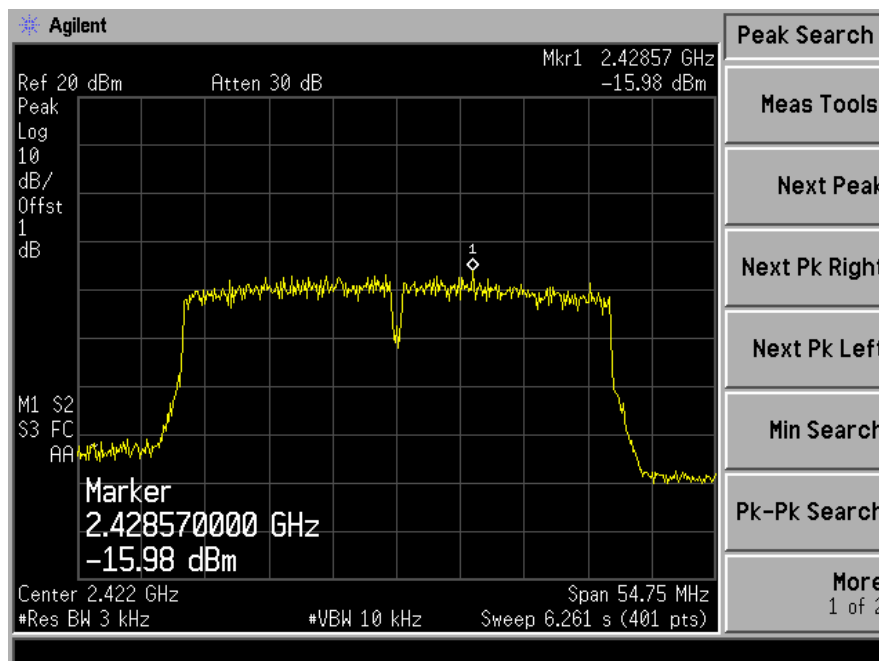

Test Model	Power Spectral Density
	802.11n (HT40)
	Channel 6: 2437MHz

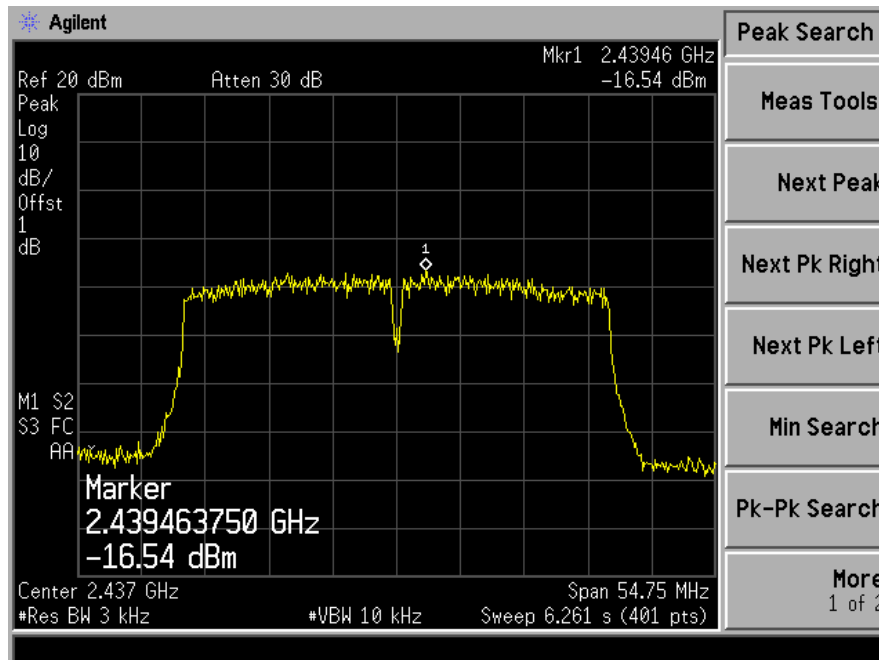

Test Model	Power Spectral Density
	802.11n (HT40)
	Channel 9: 2452MHz

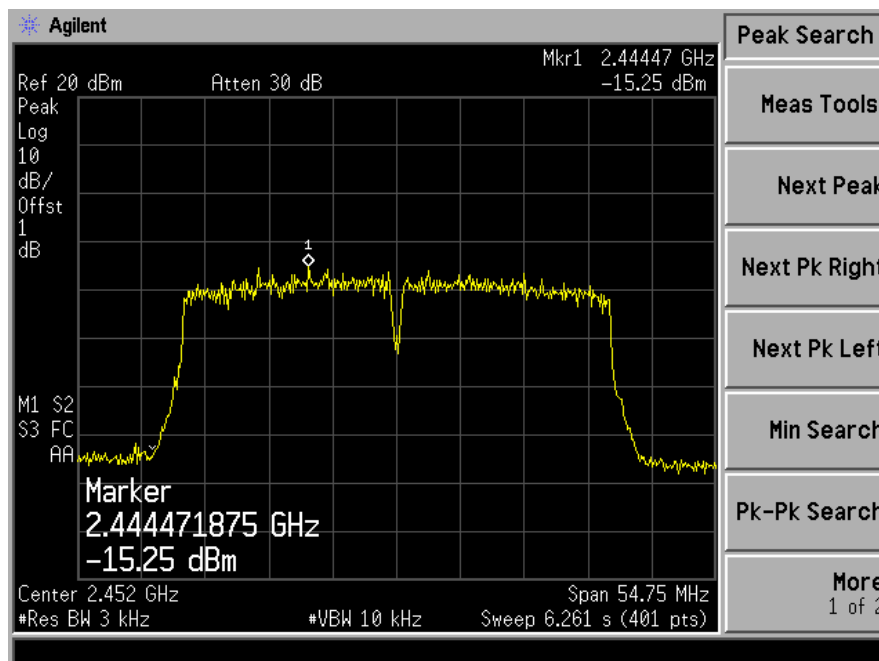

8.4 UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r02

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.


Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.



8.4.5 Test Results

All the modulation modes were tested, the data of the worst mode(802.11b) are described in the following table

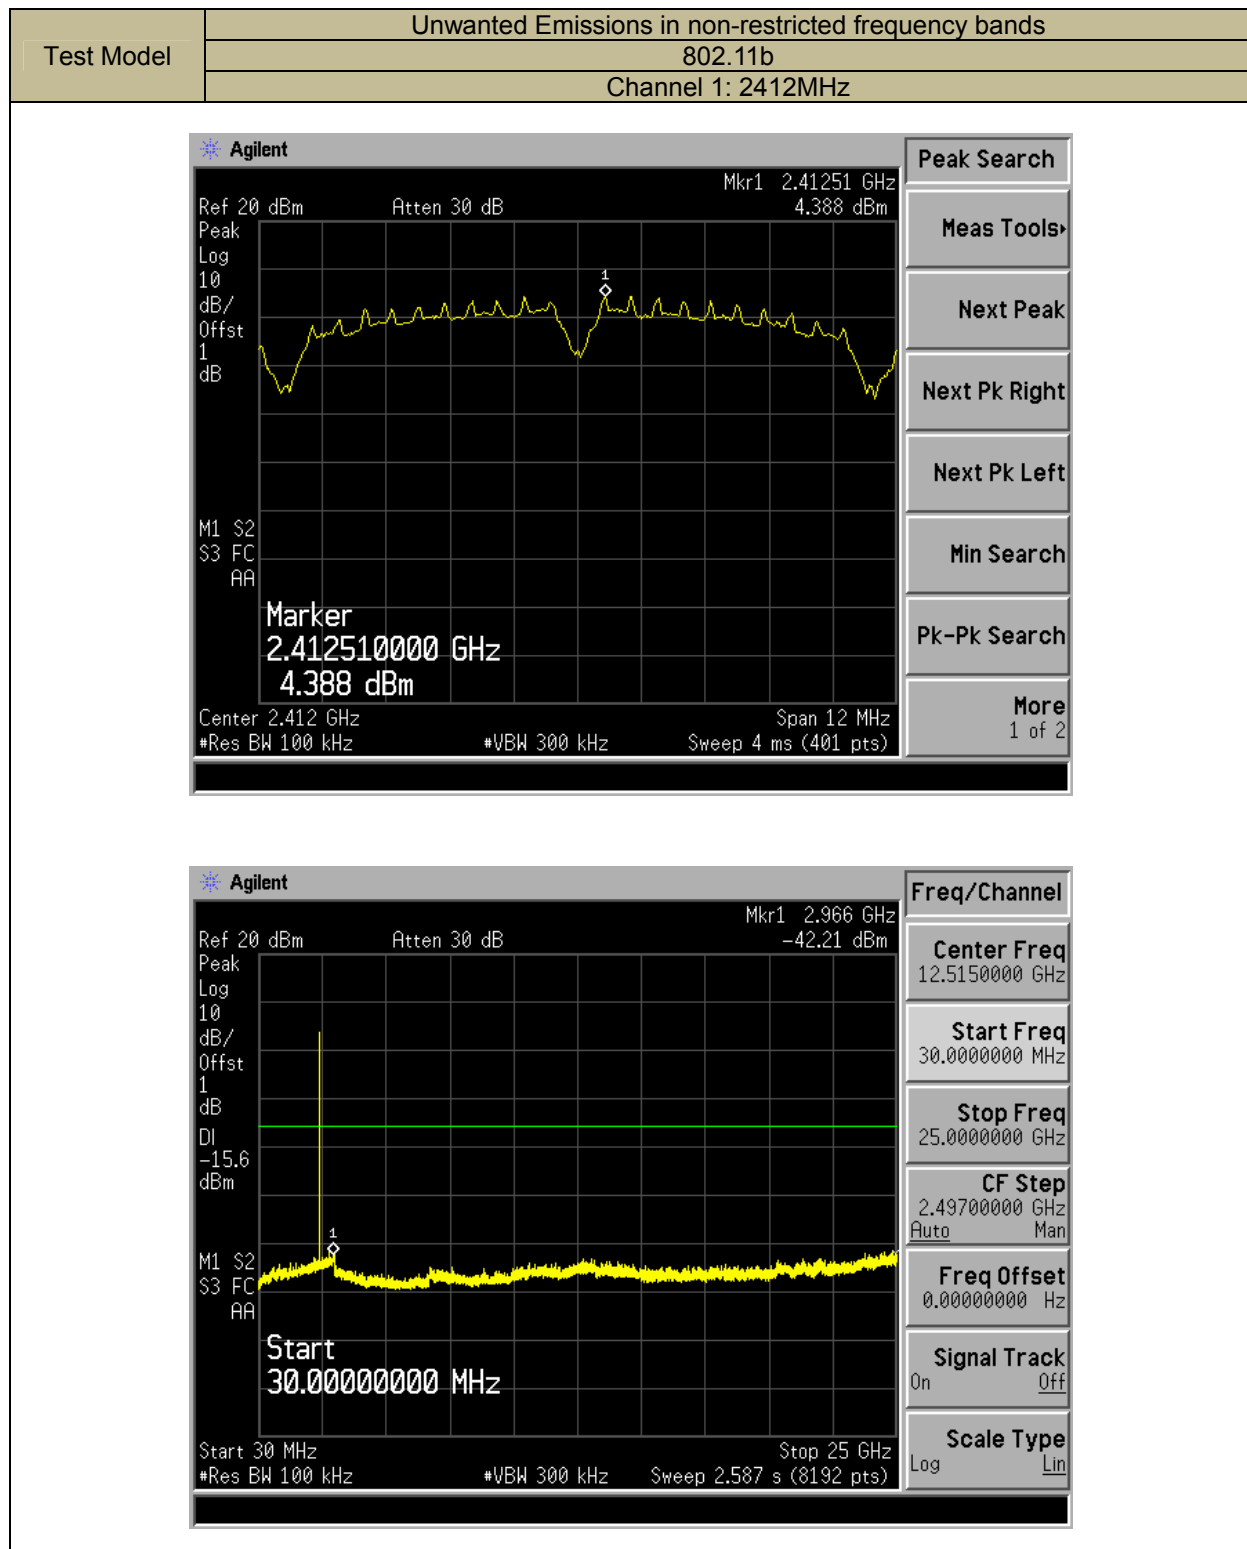


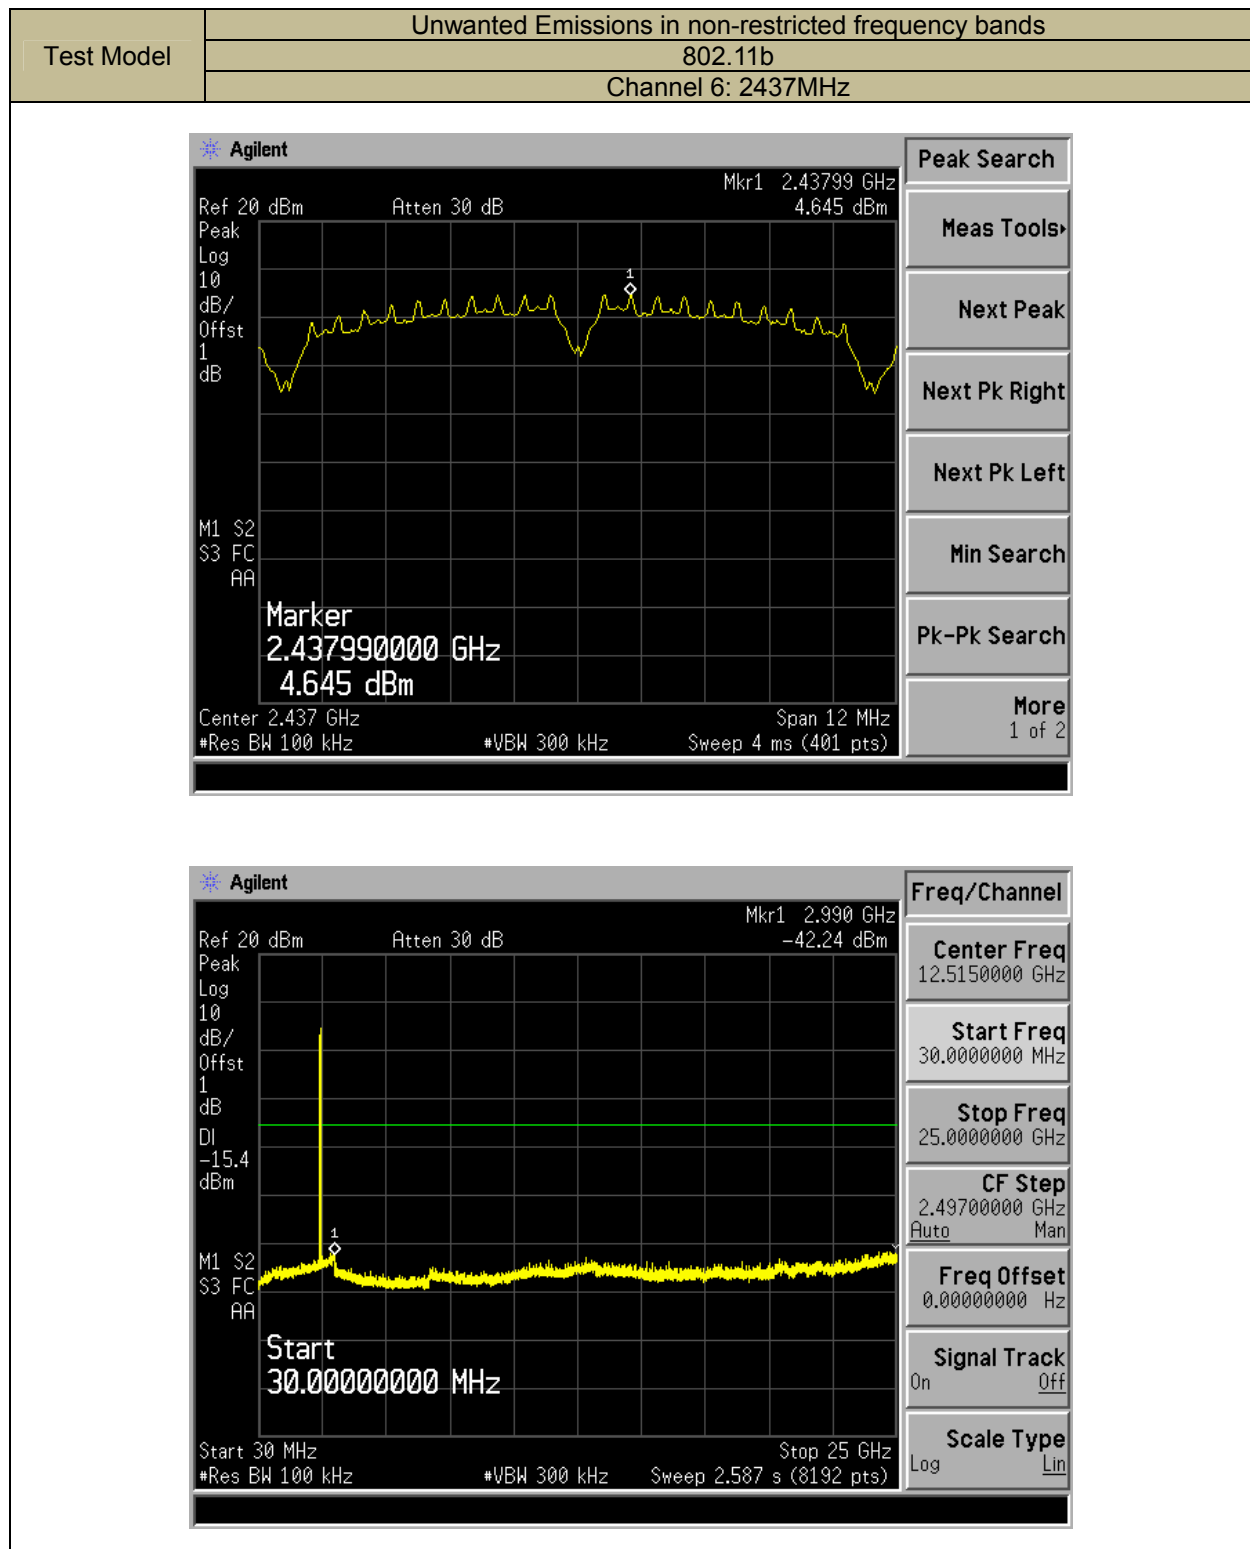


Test Model	Unwanted Emissions in non-restricted frequency bands
	802.11b
	Channel 9: 2462MHz

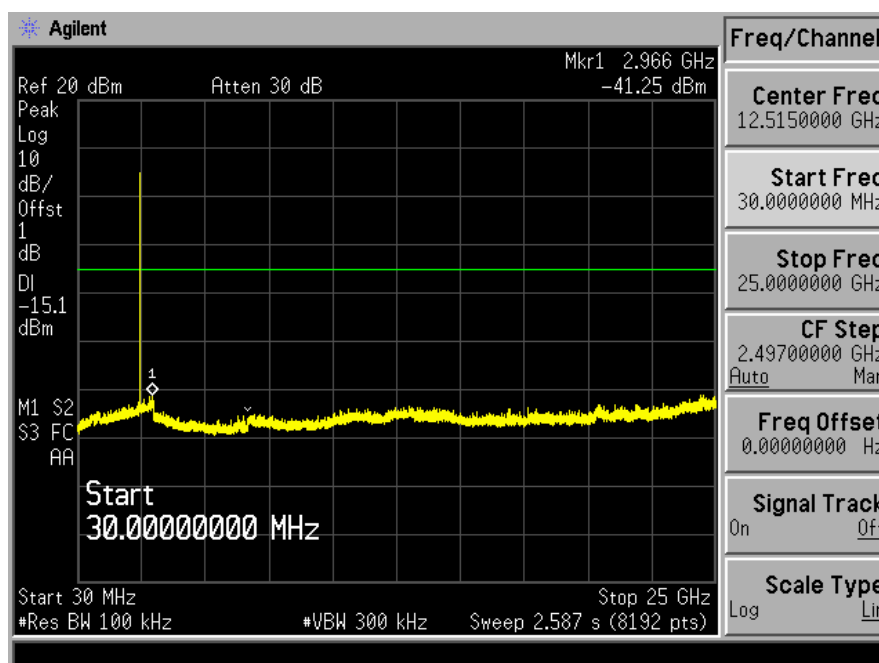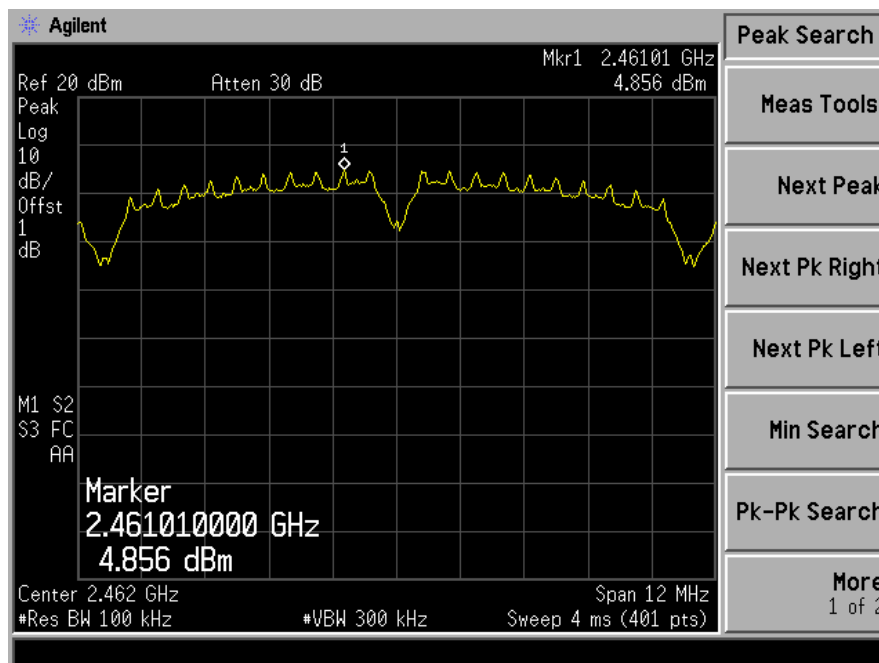

Test Model	Band edge
	802.11b
	Channel 1: 2412MHz

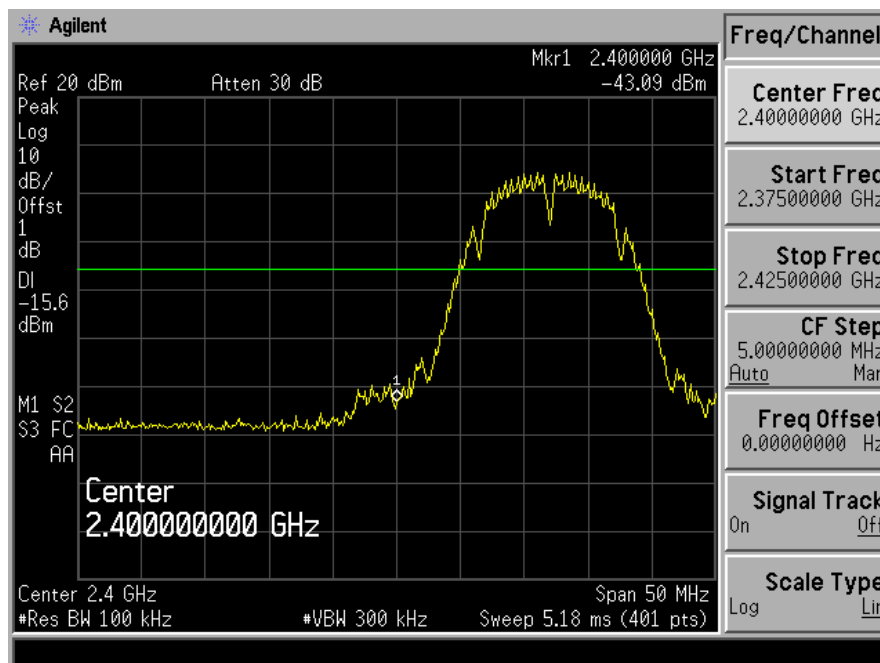

Test Model	Band edge
	802.11b
	Channel 11: 2462MHz

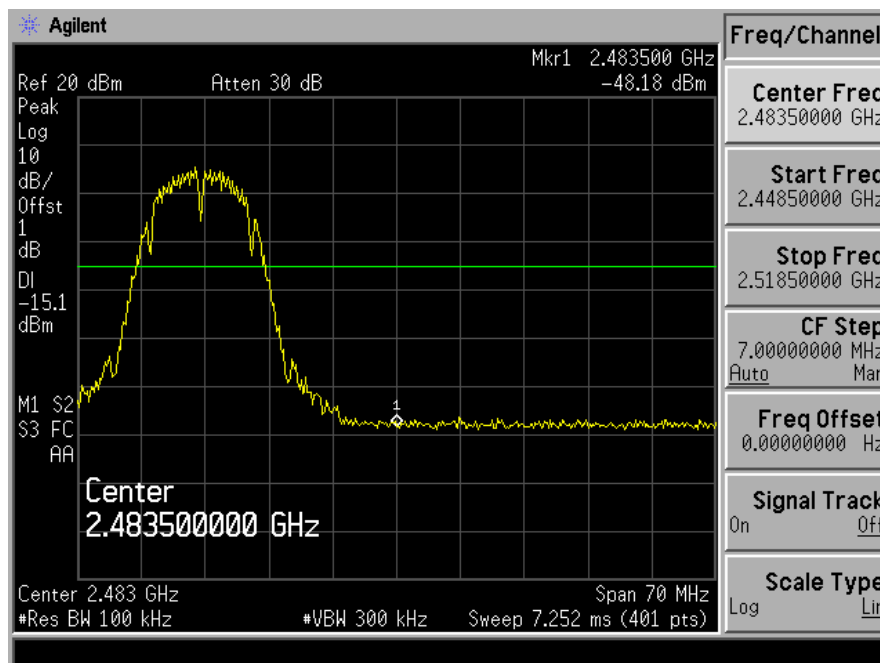

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 DTS 01 Meas. Guidance v03r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remark: 1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz)

VBW $\geq$ RBW for peak measurement

VBW = 10Hz for average measurement

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results


■ Spurious Emission below 30MHz (9KHz to 30MHz)

Test mode: TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

■ Spurious Emission Below 1GHz (30MHz to GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

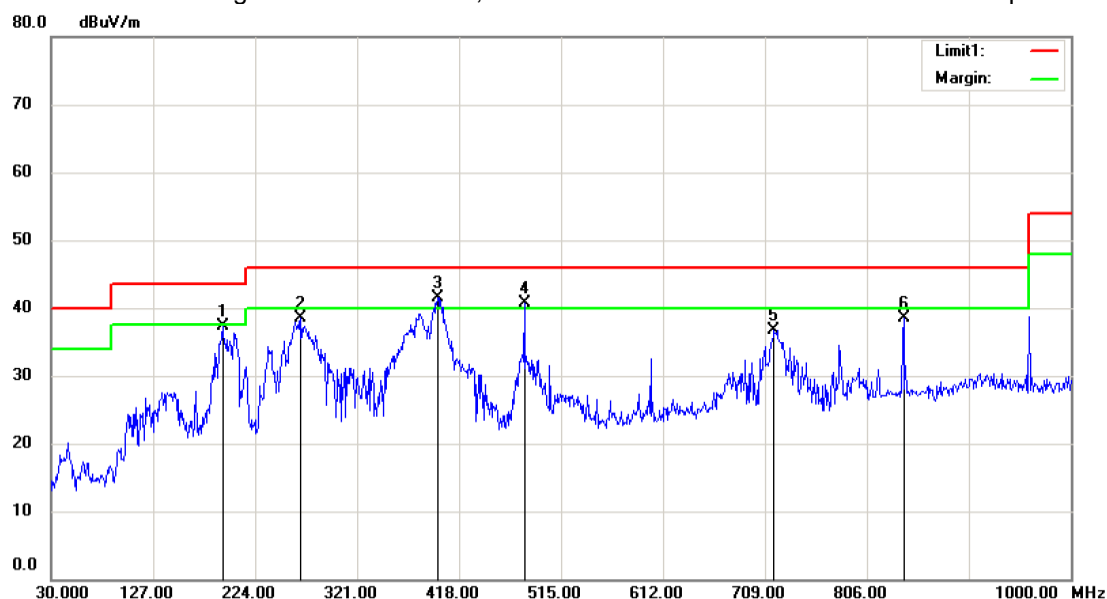

Site 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC 3.7V

Humidity: 53 %


Mode:802.11b TX CH1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		192.9600	52.83	-15.59	37.24	43.50	-6.26	QP		
2		267.6500	49.56	-11.10	38.46	46.00	-7.54	QP		
3	*	397.6300	49.67	-8.08	41.59	46.00	-4.41	QP		
4	!	480.0800	49.58	-8.81	40.77	46.00	-5.23	QP		
5		717.7300	42.50	-5.86	36.64	46.00	-9.36	QP		
6		840.9200	42.24	-3.65	38.59	46.00	-7.41	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

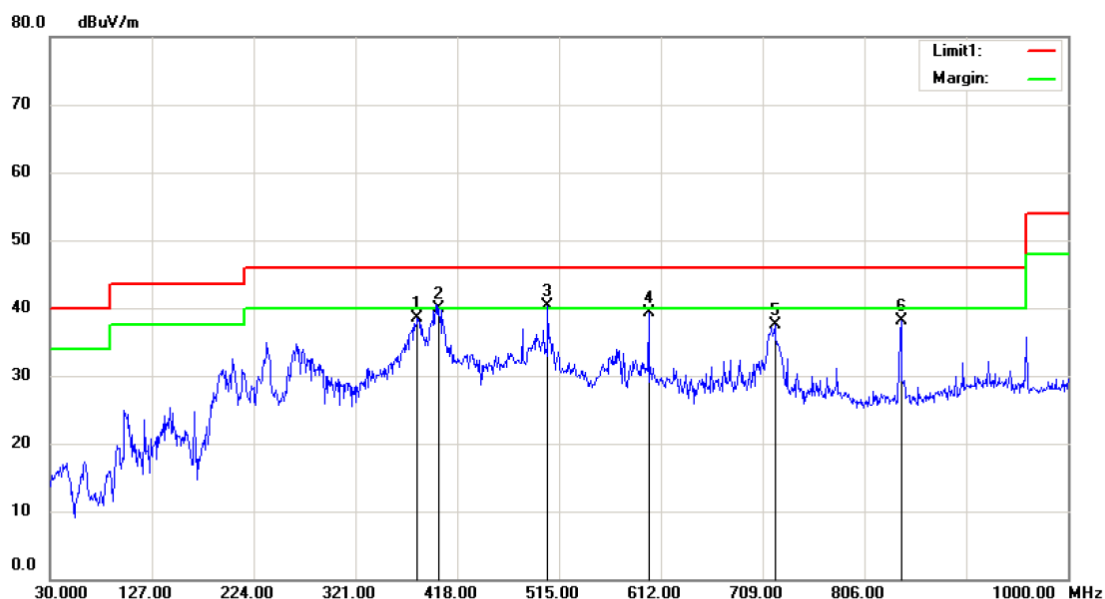

Site 3m Chamber #2

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC 3.7V

Humidity: 53 %


Mode:802.11b TX CH1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		380.1700	47.49	-8.91	38.58	46.00	-7.42	QP		
2		400.5400	47.99	-7.99	40.00	46.00	-6.00	QP		
3	*	504.3300	47.54	-7.17	40.37	46.00	-5.63	QP		
4		600.3600	46.15	-6.91	39.24	46.00	-6.76	QP		
5		720.6400	43.47	-5.90	37.57	46.00	-8.43	QP		
6		840.9200	41.84	-3.65	38.19	46.00	-7.81	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

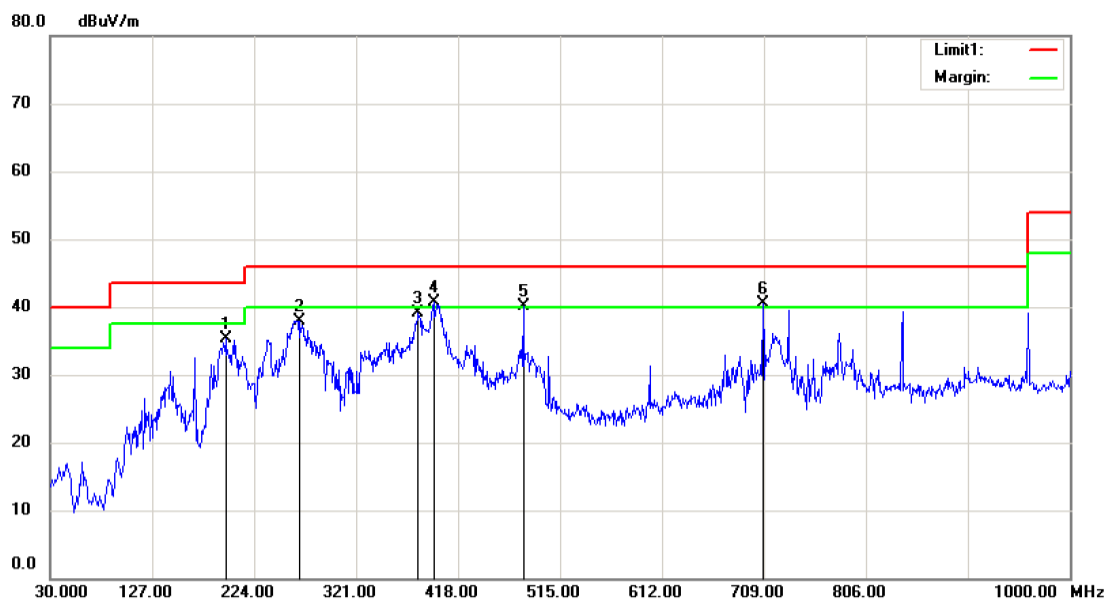

Site 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC 3.7V

Humidity: 53 %


Mode:802.11b TX CH6

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		196.8400	50.79	-15.47	35.32	43.50	-8.18	QP		
2		267.6500	49.03	-11.10	37.93	46.00	-8.07	QP		
3		380.1700	47.92	-8.91	39.01	46.00	-6.99	QP		
4	*	395.6900	48.91	-8.16	40.75	46.00	-5.25	QP		
5	!	480.0800	48.97	-8.81	40.16	46.00	-5.84	QP		
6	!	708.0300	46.22	-5.67	40.55	46.00	-5.45	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

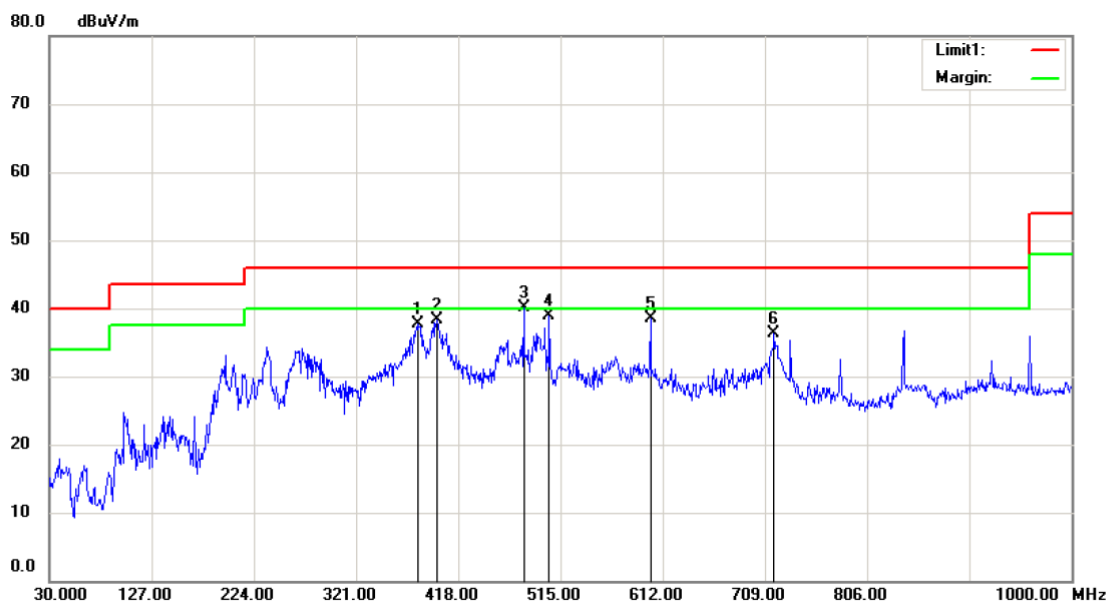


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 3.7V Humidity: 53 %
 Mode:802.11b TX CH6
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		379.2000	46.62	-8.95	37.67	46.00	-8.33	QP		
2		397.6300	46.46	-8.08	38.38	46.00	-7.62	QP		
3	*	480.0800	48.82	-8.81	40.01	46.00	-5.99	QP		
4		504.3300	46.14	-7.17	38.97	46.00	-7.03	QP		
5		600.3600	45.41	-6.91	38.50	46.00	-7.50	QP		
6		717.7300	42.10	-5.86	36.24	46.00	-9.76	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

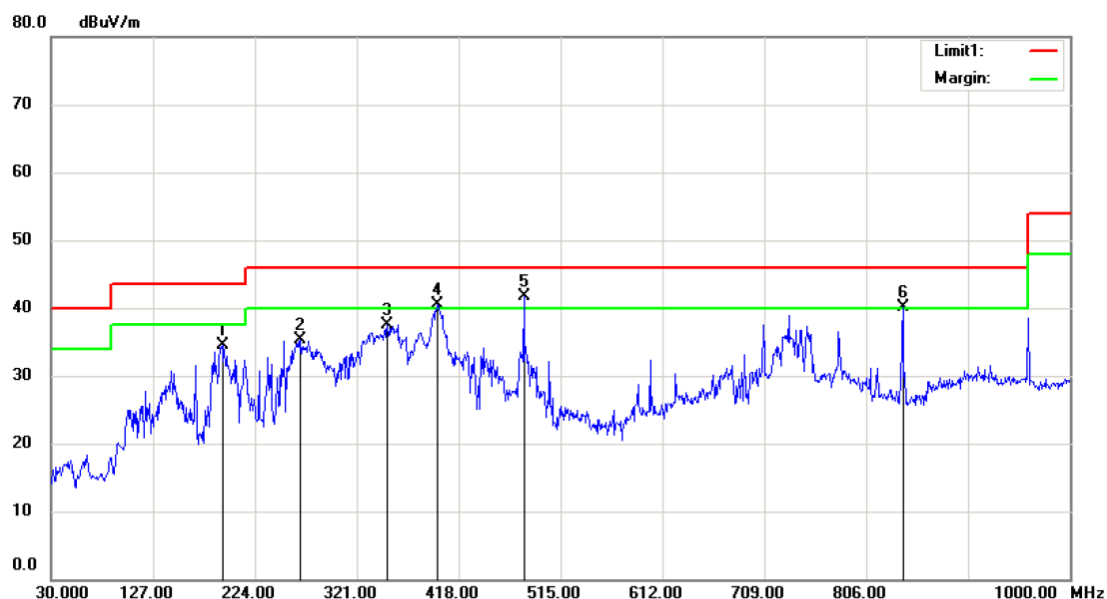


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 3.7V Humidity: 53 %
 Mode:802.11b TX CH11
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		192.9600	50.01	-15.59	34.42	43.50	-9.08	QP		
2		267.6500	46.49	-11.10	35.39	46.00	-10.61	QP		
3		350.1000	47.39	-9.79	37.60	46.00	-8.40	QP		
4	!	397.6300	48.52	-8.08	40.44	46.00	-5.56	QP		
5	*	480.0800	50.47	-8.81	41.66	46.00	-4.34	QP		
6	!	840.9200	43.71	-3.65	40.06	46.00	-5.94	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

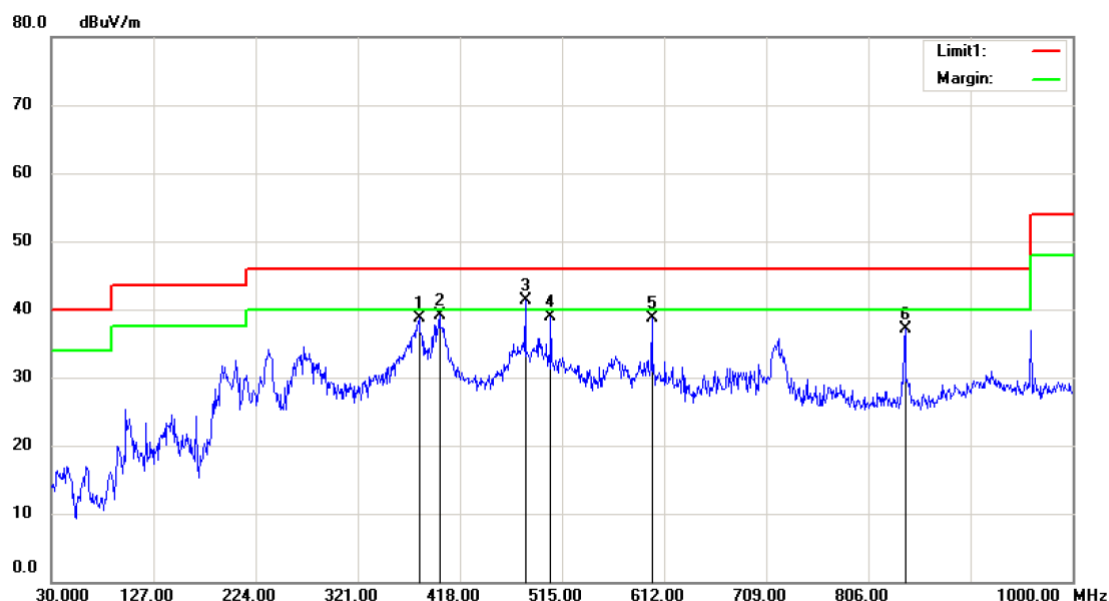

Site 3m Chamber #2

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC 3.7V

Humidity: 53 %

Mode:802.11b TX CH11

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
							Detector		Comment
1		379.2000	47.71	-8.95	38.76	46.00	-7.24	QP	
2		398.6000	47.07	-8.06	39.01	46.00	-6.99	QP	
3	*	480.0800	50.18	-8.81	41.37	46.00	-4.63	QP	
4		504.3300	46.15	-7.17	38.98	46.00	-7.02	QP	
5		600.3600	45.59	-6.91	38.68	46.00	-7.32	QP	
6		840.9200	40.78	-3.65	37.13	46.00	-8.87	QP	

*:Maximum data x:Over limit !:over margin

Operator: KK

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature :	24 °C	Test Date :	January 30, 2015
Humidity :	53 %	Test By:	KING KONG
Test mode:	802.11b	Frequency:	Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
9228.00	V	51.75	38.25	74.00	54.00	-22.25	-15.75
12033.00	V	52.19	37.65	74.00	54.00	-21.81	-16.35
14141.00	V	52.87	38.30	74.00	54.00	-21.13	-15.70
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
9194.00	H	51.07	37.62	74.00	54.00	-22.93	-16.38
10571.00	H	52.84	37.28	74.00	54.00	-21.16	-16.72
11948.00	H	52.06	38.64	74.00	54.00	-21.94	-15.36

Test mode: 802.11b Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
9245.00	V	51.94	39.26	74.00	54.00	-22.06	-14.74
12390.00	V	52.49	38.23	74.00	54.00	-21.51	-15.77
15161.00	V	52.43	37.28	74.00	54.00	-21.57	-16.72
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
11285.00	H	51.20	37.26	74.00	54.00	-22.80	-16.74
12917.00	H	51.78	39.65	74.00	54.00	-22.22	-14.35
14481.00	H	52.21	38.26	74.00	54.00	-21.79	-15.74

Test mode: 802.11b Frequency: Channel 11: 2462MHz


Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
9891.00	V	51.80	38.98	74.00	54.00	-22.20	-15.02
12577.00	V	51.62	38.24	74.00	54.00	-22.38	-15.76
13444.00	V	51.81	39.27	74.00	54.00	-22.19	-14.73
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
11302.00	H	51.30	38.57	74.00	54.00	-22.70	-15.43
12526.00	H	51.95	38.24	74.00	54.00	-22.05	-15.76
14872.00	H	51.95	36.87	74.00	54.00	-22.05	-17.13

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

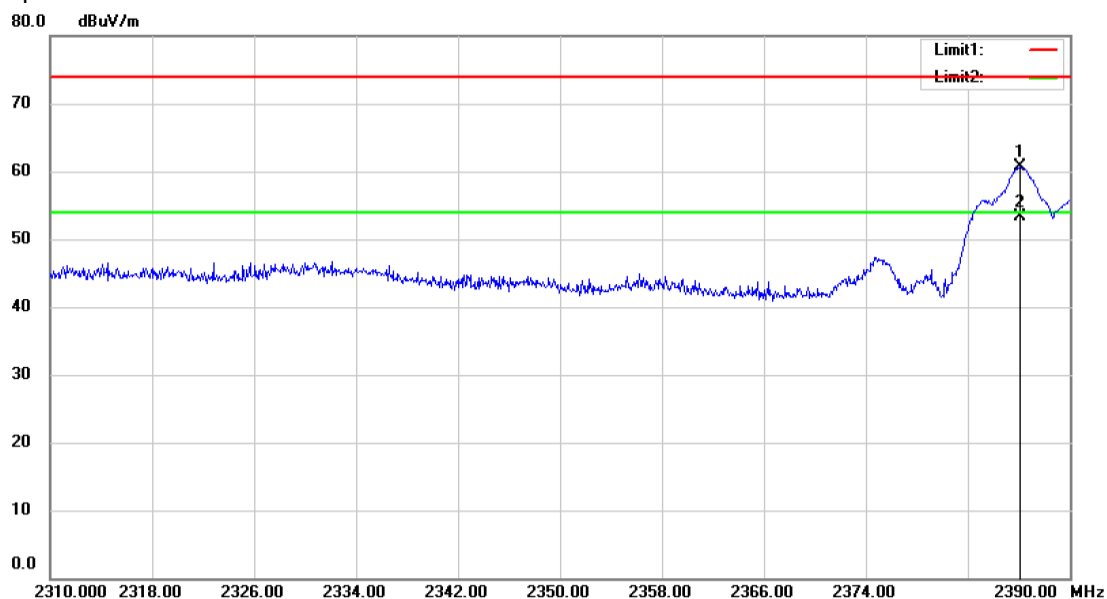

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC3.7V

Humidity: 53 %


Mode:802.11b(2412MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2386.080	83.74	-23.13	60.61	74.00	-13.39	peak		
2	*	2386.080	76.50	-23.13	53.37	54.00	-0.63	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

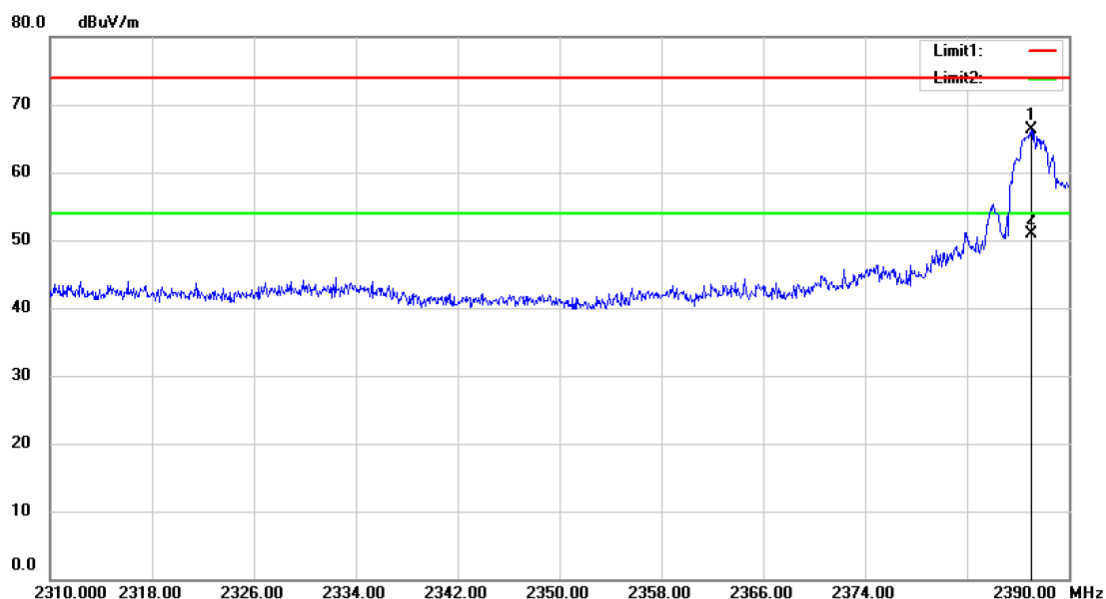


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC3.7V Humidity: 53 %
 Mode:802.11b(2412MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2387.040	89.37	-23.12	66.25	74.00	-7.75	peak		
2	*	2387.040	73.94	-23.12	50.82	54.00	-3.18	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

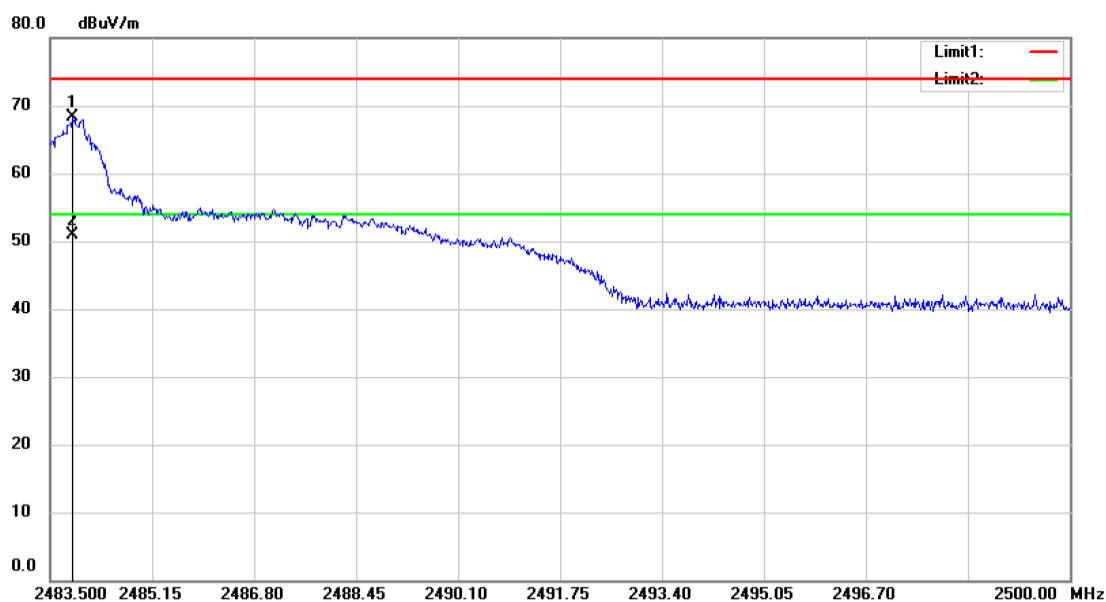

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC3.7V

Humidity: 53 %


Mode:802.11b(2462MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.863	90.82	-22.61	68.21	74.00	-5.79	peak		
2	*	2483.863	73.55	-22.61	50.94	54.00	-3.06	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

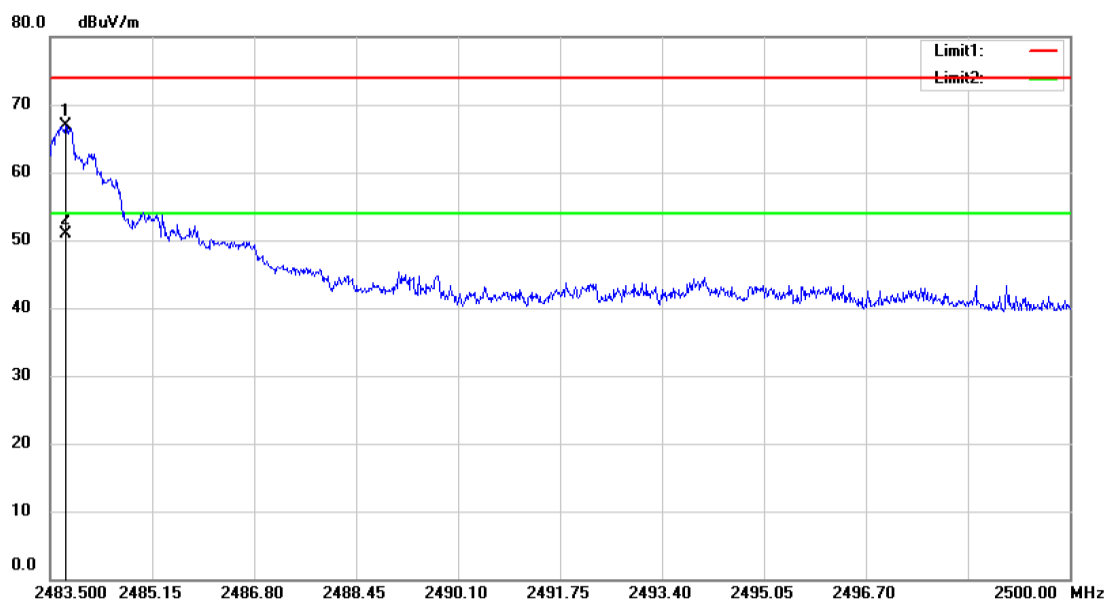


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC3.7V Humidity: 53 %
 Mode:802.11b(2462MHz)
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2483.747	89.56	-22.62	66.94	74.00	-7.06	peak	
2	*	2483.747	73.46	-22.62	50.84	54.00	-3.16	AVG	

*:Maximum data x:Over limit !:over margin

Operator: XLX

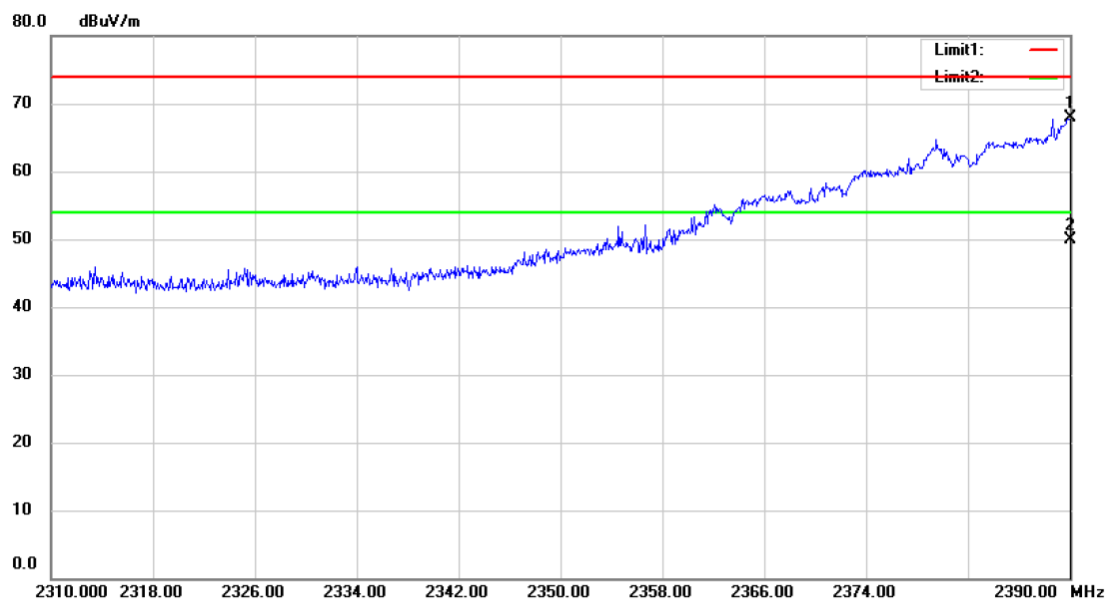

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC3.7V

Humidity: 53 %


Mode:802.11g(2412MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	90.99	-23.11	67.88	74.00	-6.12	peak		
2	*	2390.000	73.06	-23.11	49.95	54.00	-4.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

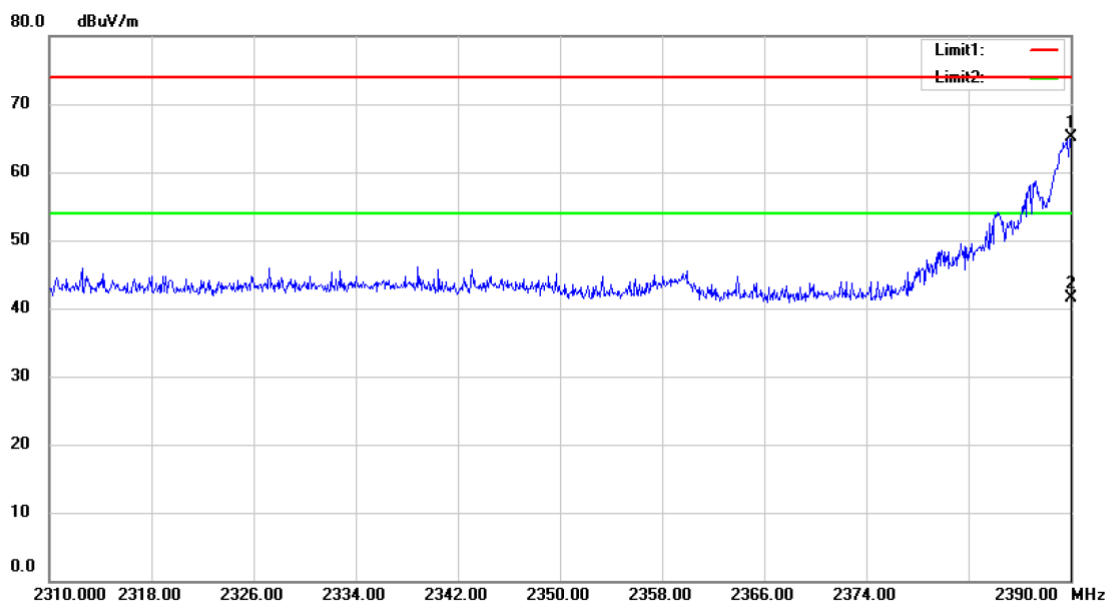


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC3.7V Humidity: 53 %
 Mode:802.11g(2412MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2390.000	88.15	-23.11	65.04	74.00	-8.96	peak		
2		2390.000	64.61	-23.11	41.50	54.00	-12.50	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

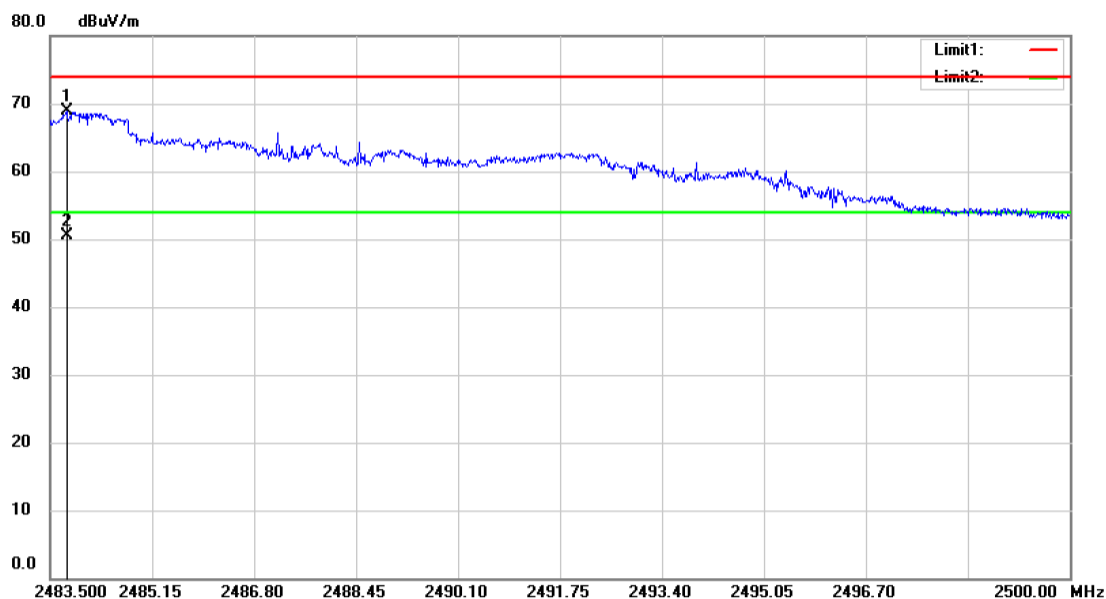


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC3.7V Humidity: 53 %
 Mode:802.11g(2462MHz)
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	2483.764	91.49	-22.62	68.87	74.00	-5.13	peak	
2 *	2483.764	73.16	-22.62	50.54	54.00	-3.46	AVG	

*:Maximum data x:Over limit !:over margin

Operator: XLX

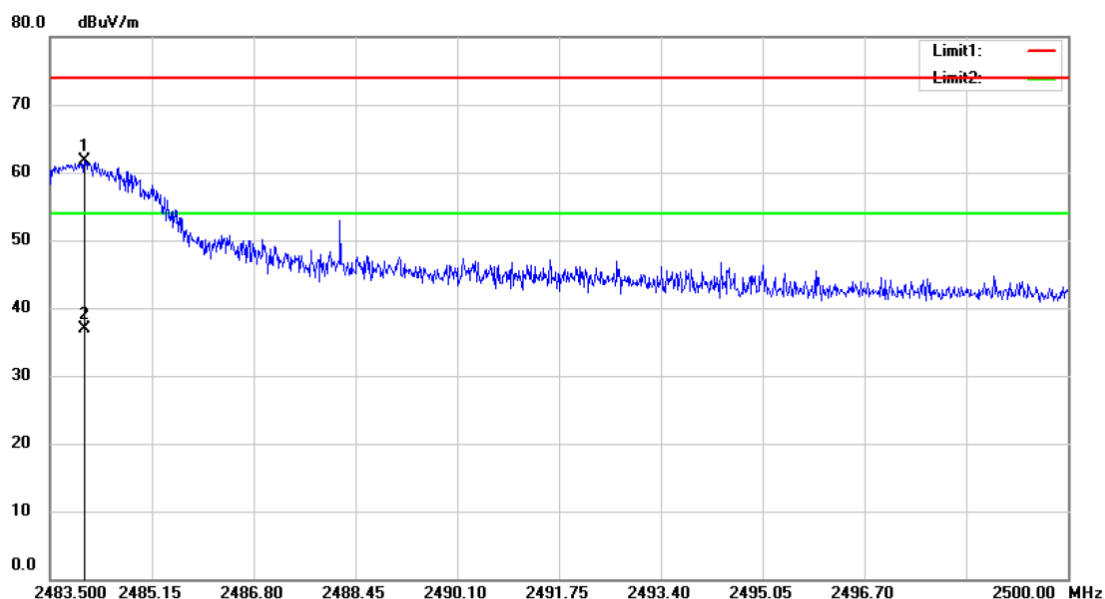

Site 3m Chamber #3

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC3.7V

Humidity: 53 %


Mode:802.11g(2462MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2484.061	84.37	-22.61	61.76	74.00	-12.24	peak		
2		2484.061	59.61	-22.61	37.00	54.00	-17.00	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

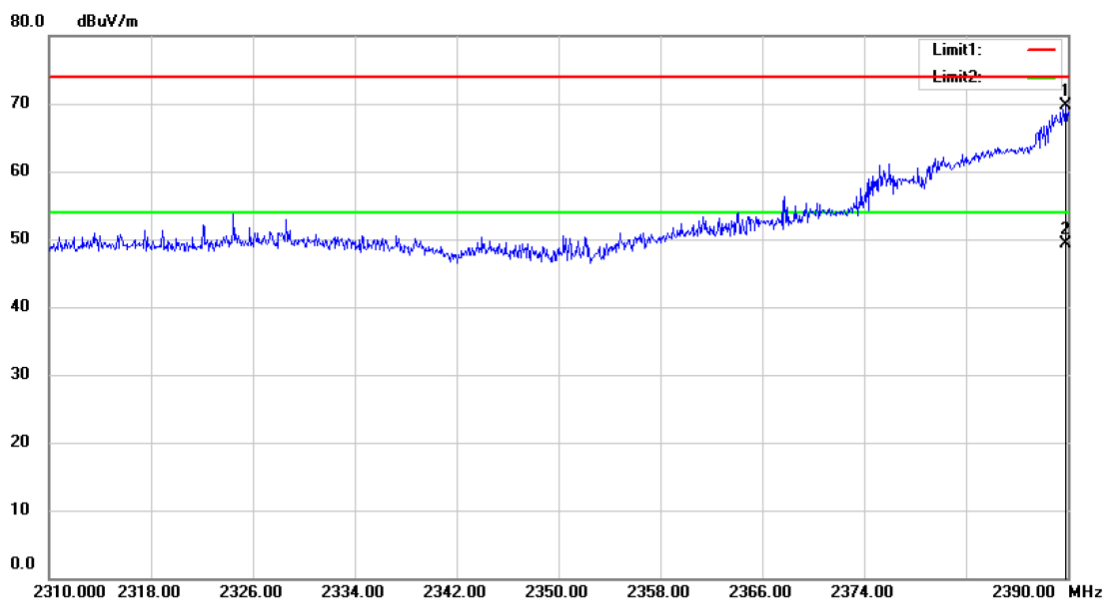


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC3.7V Humidity: 53 %
 Mode:802.11n HT20(2412MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2389.840	92.81	-23.11	69.70	74.00	-4.30	peak		
2		2389.840	72.42	-23.11	49.31	54.00	-4.69	AVG		

*:Maximum data x:Over limit l:over margin

Operator: XLX

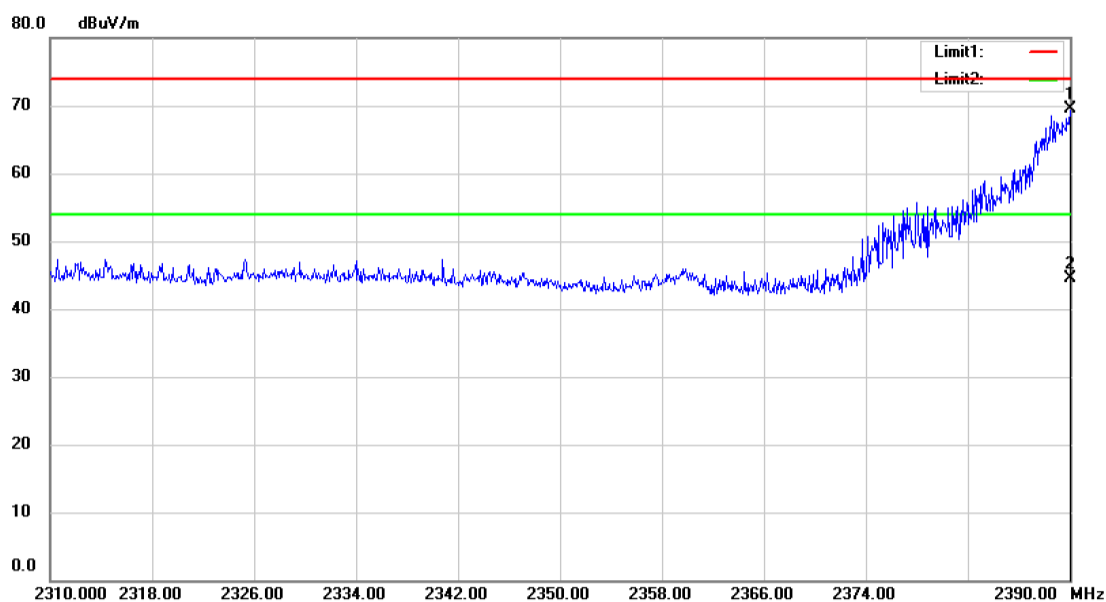


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC3.7V Humidity: 53 %
 Mode:802.11n HT20(2412MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2390.000	92.57	-23.11	69.46	74.00	-4.54	peak		
2		2390.000	67.61	-23.11	44.50	54.00	-9.50	AVG		

*:Maximum data x:Over limit !:over margin


Operator: XLX

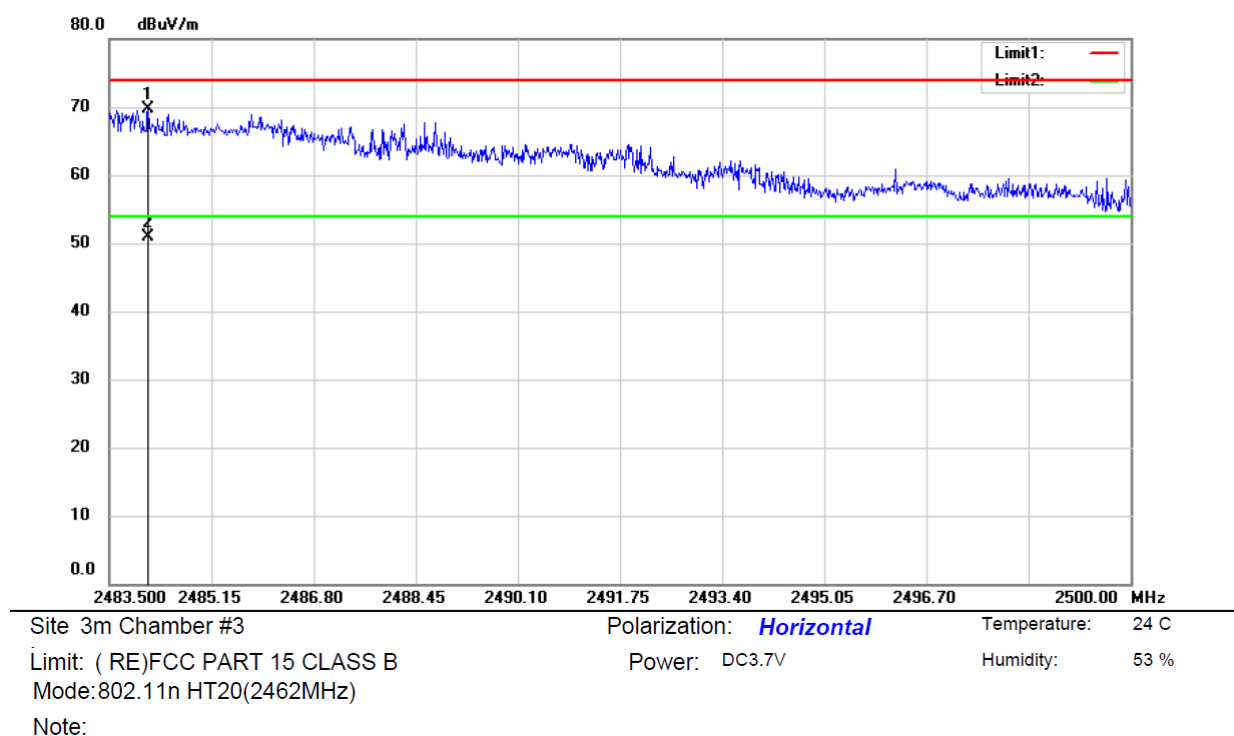

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2484.127	92.39	-22.61	69.78	74.00	-4.22			peak
2	*	2484.127	73.59	-22.61	50.98	54.00	-3.02			AVG

*:Maximum data x:Over limit !:over margin

Operator: XLX

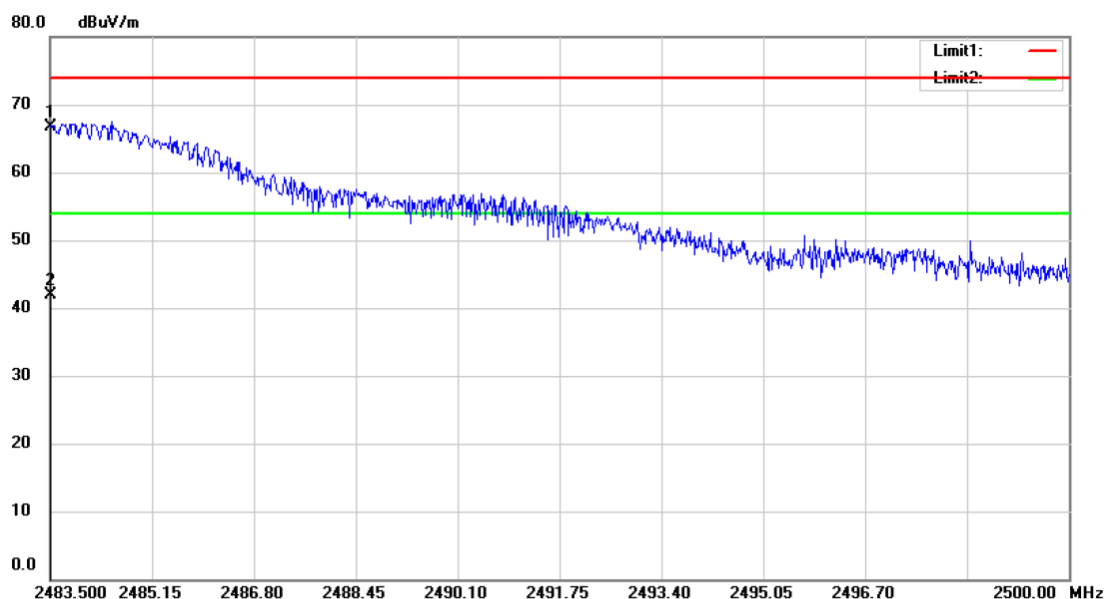


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC3.7V Humidity: 53 %
 Mode:802.11n HT20(2462MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	89.34	-22.62	66.72	74.00	-7.28	peak		
2		2483.500	64.52	-22.62	41.90	54.00	-12.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

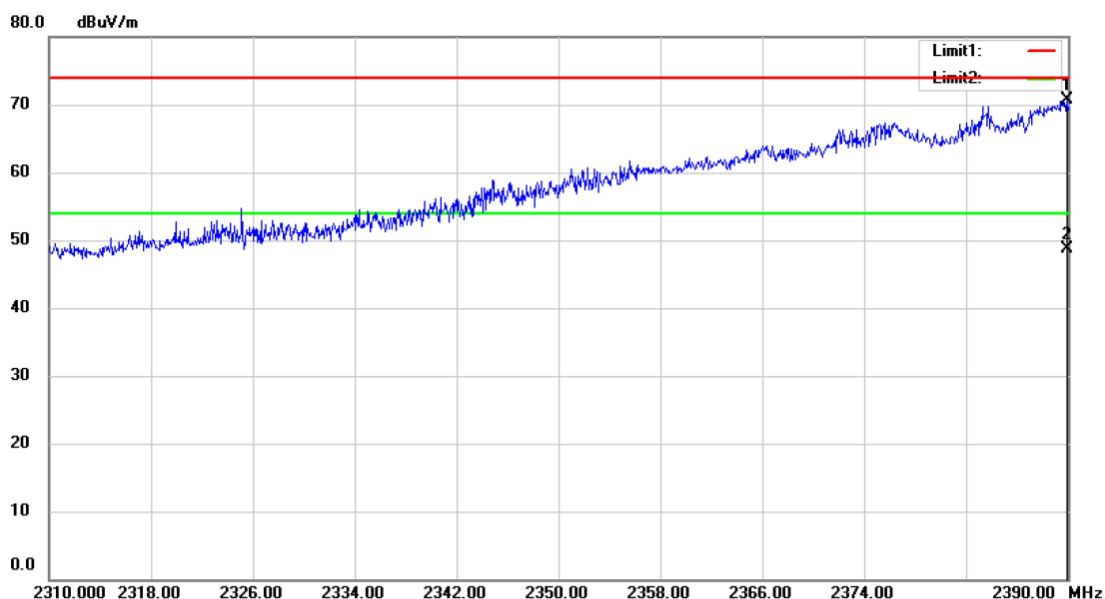


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC3.7V Humidity: 53 %
 Mode:802.11n HT40(2422MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2389.920	93.77	-23.11	70.66	74.00	-3.34	peak		
2		2389.920	71.84	-23.11	48.73	54.00	-5.27	AVG		

*:Maximum data x:Over limit l:over margin

Operator: XLX

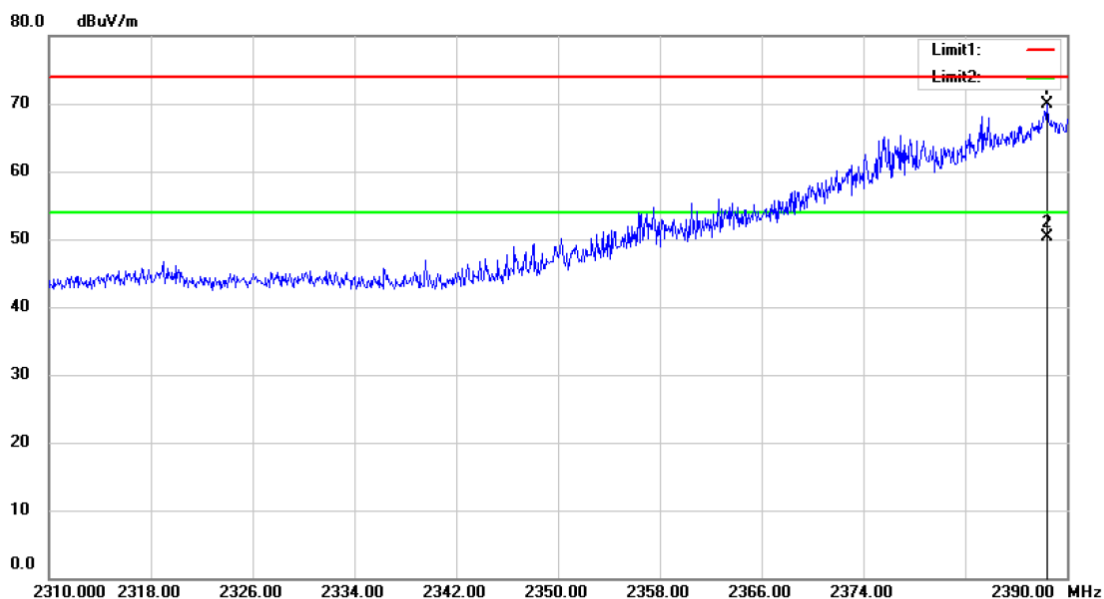


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC3.7V Humidity: 53 %
 Mode:802.11n HT40(2422MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2388.400	92.95	-23.12	69.83	74.00	-4.17	peak		
2	*	2388.400	73.51	-23.12	50.39	54.00	-3.61	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

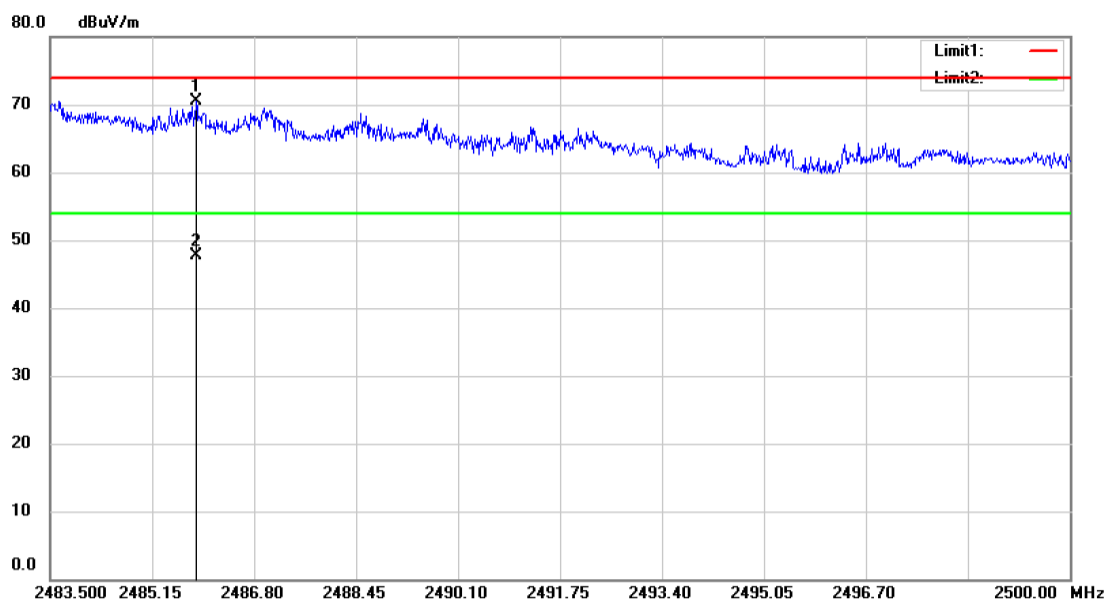

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC3.7V

Humidity: 53 %


Mode:802.11n HT40(2452MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2485.860	93.19	-22.60	70.59	74.00	-3.41			peak
2		2485.860	70.22	-22.60	47.62	54.00	-6.38			AVG

*:Maximum data x:Over limit !:over margin

Operator: XLX

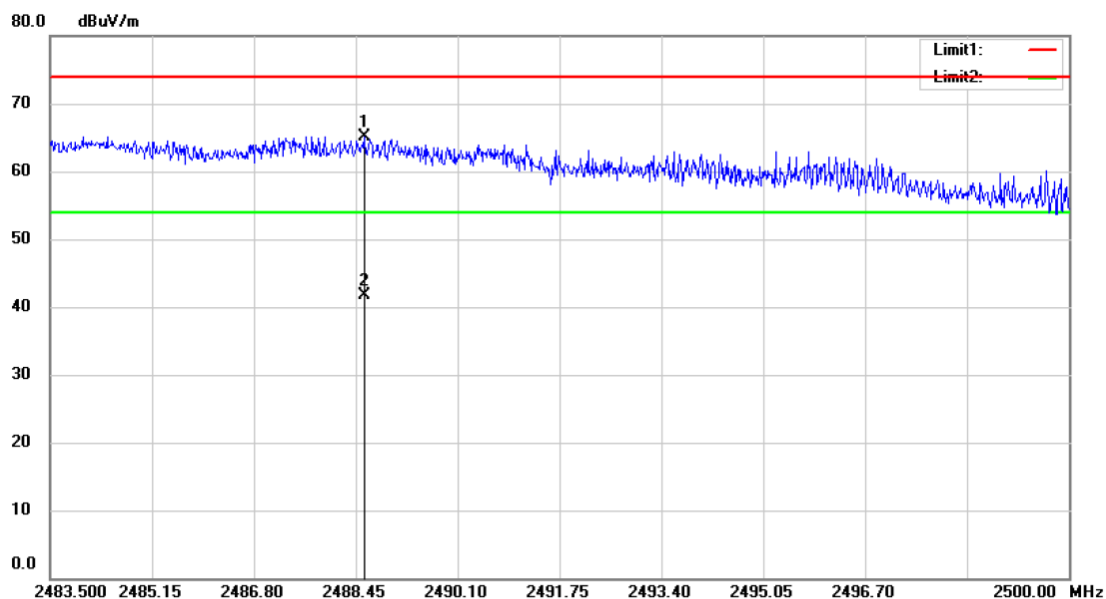

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC3.7V

Humidity: 53 %

Mode:802.11n HT40(2452MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2488.582	87.74	-22.58	65.16	74.00	-8.84	peak		
2		2488.582	64.28	-22.58	41.70	54.00	-12.30	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

8.6 CONDUCTED EMISSION TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50
Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.		

8.6.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

8.6.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

We test the EUT at 120V and 240V, and show the worst result as bellow.

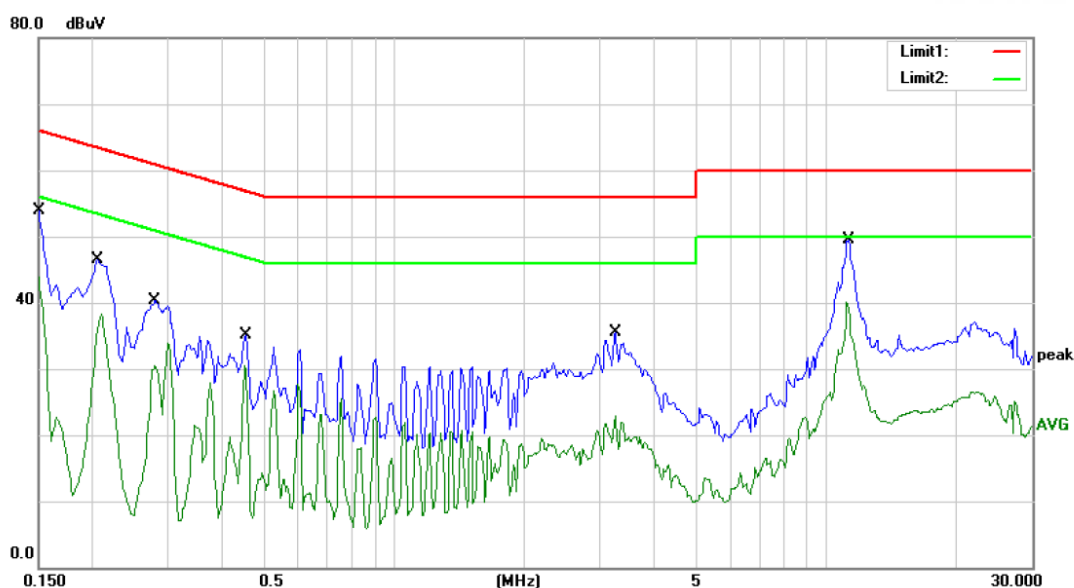

Site Conduction #1

Phase: **L1**

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 53 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	53.99	0.00	53.99	66.00	-12.01	QP	
2		0.1500	43.83	0.00	43.83	56.00	-12.17	AVG	
3		0.2050	46.54	0.00	46.54	63.41	-16.87	QP	
4		0.2050	38.25	0.00	38.25	53.41	-15.16	AVG	
5		0.2802	40.24	0.00	40.24	60.81	-20.57	QP	
6		0.2802	33.92	0.00	33.92	50.81	-16.89	AVG	
7		0.4550	35.04	0.00	35.04	56.78	-21.74	QP	
8		0.4550	30.47	0.00	30.47	46.78	-16.31	AVG	
9		3.2450	35.56	0.00	35.56	56.00	-20.44	QP	
10		3.2450	22.97	0.00	22.97	46.00	-23.03	AVG	
11		11.2750	49.52	0.00	49.52	60.00	-10.48	QP	
12	*	11.2750	40.10	0.00	40.10	50.00	-9.90	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: KK

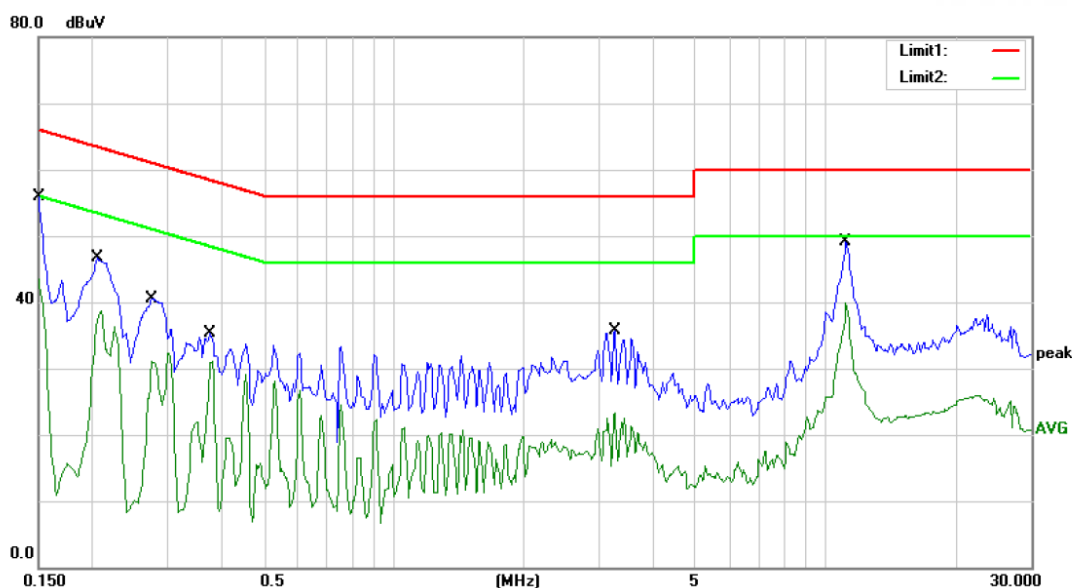

Site: Conduction #1

Phase: **N**

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 53 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1500	55.89	0.00	55.89	66.00	-10.11	QP	
2		0.1500	43.51	0.00	43.51	56.00	-12.49	AVG	
3		0.2050	46.66	0.00	46.66	63.41	-16.75	QP	
4		0.2050	38.67	0.00	38.67	53.41	-14.74	AVG	
5		0.2750	40.50	0.00	40.50	60.97	-20.47	QP	
6		0.2750	32.36	0.00	32.36	50.97	-18.61	AVG	
7		0.3750	35.40	0.00	35.40	58.39	-22.99	QP	
8		0.3750	31.20	0.00	31.20	48.39	-17.19	AVG	
9		3.2500	35.79	0.00	35.79	56.00	-20.21	QP	
10		3.2500	23.31	0.00	23.31	46.00	-22.69	AVG	
11		11.1750	49.14	0.00	49.14	60.00	-10.86	QP	
12		11.1750	39.85	0.00	39.85	50.00	-10.15	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: KK

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For intentional device, according to IC RSS-Gen 8.3, testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

8.7.2 Result

Note: Antenna uses a permanently attached antenna which is not replaceable.

The EUT'S antenna is Metal antenna. The antenna's gain is 2dBi and meets the requirement.

END OF REPORT