

Revision History

Edition	Date	Description	Changes
1	2017-05-11	First release	

Version 1.00

CONTENTS

	Page
1 Client Information	5
2 Equipment under test (EUT).....	5
2.1 Identification of the EUT.....	5
2.2 Additional information about the EUT	6
2.3 Peripheral equipment.....	6
2.4 Test signals and operation modes	6
3 Test Specifications	7
3.1 Standards.....	7
3.2 Additions, deviations and exclusions from standards and accreditation	7
3.3 Test site.....	7
4 Test Summary	8
5 Conducted continuous disturbances in the frequency-range 0.15 to 30 MHz	9
5.1 Test set-up and test procedure	9
5.2 Requirement.....	9
5.3 Test results.....	10
6 Field strength of fundamental and radiated Band Edge.....	11
6.1 Test set-up and test procedure.....	11
6.2 Test conditions	11
6.3 Requirement.....	12
6.4 Test results.....	13
7 Radiated rf Emission in the frequency-range 30 MHz to 26 GHz	15
7.1 Test set-up and test procedure.....	15
7.2 Test conditions	15
7.3 Requirements.....	16
7.4 Test results 30 MHz – 1000 MHz, TX	16
7.5 Test results 1 GHz – 26, TX.....	17
8 Conducted band edge measurement.....	21
8.1 Test set-up and test procedure.....	21
8.2 Test conditions	21
8.3 Requirement.....	21
8.4 Test results.....	22
9 Peak conducted output power.....	24
9.1 Test set-up and test procedure.....	24
9.2 Test conditions	24
9.3 Requirements.....	24
9.4 Test results.....	25
10 Occupied 6 dB bandwidth	27
10.1 Test set-up and test procedure.....	27
10.2 Test conditions	27
10.3 Requirements.....	27
10.4 Test results.....	28
11 99 % bandwidth	30
11.1 Test set-up and test procedure.....	30
11.2 Test conditions	30
11.3 Test results.....	30
12 Peak power spectral density	32
12.1 Test set-up and test procedure.....	32
12.2 Test conditions	32
12.3 Requirements.....	32
12.4 Test results.....	33

13	Transmitter duty cycle for pulsed transmissions	35
13.1	Test set-up and test procedure	35
13.2	Test conditions	35
13.3	Requirement.....	35
13.4	Test results.....	35
14	Test equipment.....	37
15	Measurement uncertainty.....	38
16	Test set up and EUT photos.....	39

1 CLIENT INFORMATION

The EUT has been tested by request of

Company: IKEA of Sweden AB
Box 702
343 81 Älmhult
Sweden

Name of contact: Ulf Axelsson

2 EQUIPMENT UNDER TEST (EUT)

2.1 Identification of the EUT

Equipment: Zigbee radio module
Type/Model: ICC-A-1
Brand name: IKEA
Serial number: -
Manufacturer: IKEA of Sweden AB
Transmitter frequency range: 2405 – 2480 MHz
Receiver frequency range: 2405 – 2480 MHz
Frequency agile or hopping: Yes No
Antenna: Internal antenna External antenna
Antenna connector: None, internal antenna Yes
Antenna gain: -3.6 dBi
Rating RF output power: +12.60 dBm (measured conducted)
Type of modulation: OQPSK
Temperature range: Category I (General): -20°C to +55°C
 Category II (Portable equipment): -10°C to +55°C
 Category III (Equipment for normal indoor use): +5°C to +35°C
 Other: -40°C to +125°C
Transmitter stand by mode supported: Yes No

2.2 Additional information about the EUT

The EUT consists of the following units:

Unit	Type	ID	Serial number	Comment
ZigBee radio module	ICC-A-1	RF EM1	-	-
ZigBee radio module	ICC-A-1	1	-	Modified with temporary antenna connector

During the tests the EUT supported following software:

Software	Version	Comment
ETS_Testscript_ICC-A-1	-	Script that controls mode of operation of EUT

2.3 Peripheral equipment

Peripheral equipment is equipment needed for correct operation of the EUT, but not included as part of the testing and evaluation of the EUT.

Equipment	Type/Model	Manufacturer	Serial no.
ZigBee radio module	ICC-A-1	IKEA of Sweden	-
Laptop	Elitebook 8470p	HP	CNU342CQK9
USB to UART cable	-	-	-

2.4 Test signals and operation modes

Maximum duty cycle operation (22%) with OQPSK modulation.

3 TEST SPECIFICATIONS

3.1 Standards

47 CFR Part 15 (2016): Subpart C: Intentional radiators. Section 15.247

RSS-GEN Issue 4 (2014): General requirements of compliance of radio apparatus (2014).

RSS-247 Issue 2 (2017): Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices

Test methods:

ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Additions, deviations and exclusions from standards and accreditation

RSS-247 Issue 2 (2017) is not within Intertek's scope of accreditation.

No other additions, deviations or exclusions have been made from standards and accreditation.

3.3 Test site

Measurements were performed at:

Intertek Semko AB.
Torshamnsgatan 43,
Box 1103
SE-164 22 Kista

Intertek Semko AB is a FCC listed test site with site registration number 90913

Intertek Semko AB is a FCC accredited conformity assessment body with designation number SE0002

Intertek Semko AB is an Industry Canada listed test facility with IC assigned code 2042G

Measurement chambers

Measurement Chamber	Type of chamber	IC Site filing #
BJÖRKHALLEN	Semi-anechoic 3 m	2042G-1

4 TEST SUMMARY

The results in this report apply only to sample tested:

Requirement	Description	Result
FCC §15.203 RSS-GEN 8.3	Antenna requirement The EUT has integrated non detachable antenna which can't be remove without breaking the EUT.	PASS
FCC §15.207, 15.107 RSS-GEN 8.8 table 3	Conducted continuous emission in the frequency range 150 kHz to 30 MHz, AC Power input port	PASS
FCC §15.247 (b)(4) RSS-247 5.4(d), 5.4(e)	Field strength of fundamental and antenna gain The EUT complies with the limits. Antenna gain is less than 6 dBi.	PASS
FCC §15.247 (d), 15.209(a) RSS-GEN 8.9 RSS-247 5.5	Radiated emission of electromagnetic fields in the frequency range 30 – 1000 MHz The EUT complies with the limits. The margin to the limit was at least 10 dB at 1000.0 MHz. See section 7.4.	PASS
FCC §15.247(d), 15.209(a) RSS-GEN 8.9 RSS-247 5.5	Radiated emission of electromagnetic fields in the frequency range above 1 GHz The EUT complies with the limits. The margin to the limit was at least 6.2 dB at 4811.0 MHz. See section 7.6 – 7.7.	PASS
FCC §15.247(a)(2) RSS-GEN 6.6 RSS-247 5.2(a)	Occupied bandwidth The EUT complies with the limits. The margin to the limit is at least 970 kHz See section 10.4 and 11.4.	PASS
FCC §15.247(b) RSS-247 5.4(d)	Conducted output power The EUT complies with the limits. The margin to the limit was at least 17.4 dB at 2405.0 MHz. See section 9.4.	PASS
FCC §15.247(e) RSS-247 5.2(b)	Peak power spectral density The EUT complies with the limits. The margin to the limit was at least 8.4 dB at 2405.0 MHz. See section 12.4.	PASS
FCC §15.247(e) RSS-247 5.5	Band edge The EUT complies with the limits. The margin to the limit was at least 0.9 dB at 2483.5 MHz. See section 6.4.	PASS*

*The measured result is below the upper limit, but by a margin less than half of the uncertainty interval. It is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance is more probable than non-compliance.

5 CONDUCTED CONTINUOUS DISTURBANCES IN THE FREQUENCY-RANGE 0.15 TO 30 MHZ

Date of test:	2017-03-23	Test location:	Bur 1
EUT Serial:	RF EM1	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	21 %
Test result:	Pass	Margin:	23.1 dB

5.1 Test set-up and test procedure

The test method is in accordance with ANSI C63.10-2013 section 6.2.

The EUT was connected to the power via Artificial Mains Networks AMN.

The EUT was placed on an insulating support 0.8 m above the floor, 0.4 m from the vertical reference ground plane (RGP) and 0.8 m from the AMN/ISN.

Overview sweeps were performed for each lead.

During the tests the EUT was operated according to the mode of operation mentioned in clause 2.4.

5.2 Requirement


Limits for conducted emission from AC mains

The EUT shall meet the limits for the standards.

Reference: 47 CFR §15.207
RSS-GEN, section 8.8 table 3

Frequency range [MHz]	Limits [dB μ V]	
	Quasi-Peak	Average
0.15 – 0.50	66 – 56	56 – 46
0,50 – 5.00	56	46
5.00 – 30.0	60	50

5.3 Test results

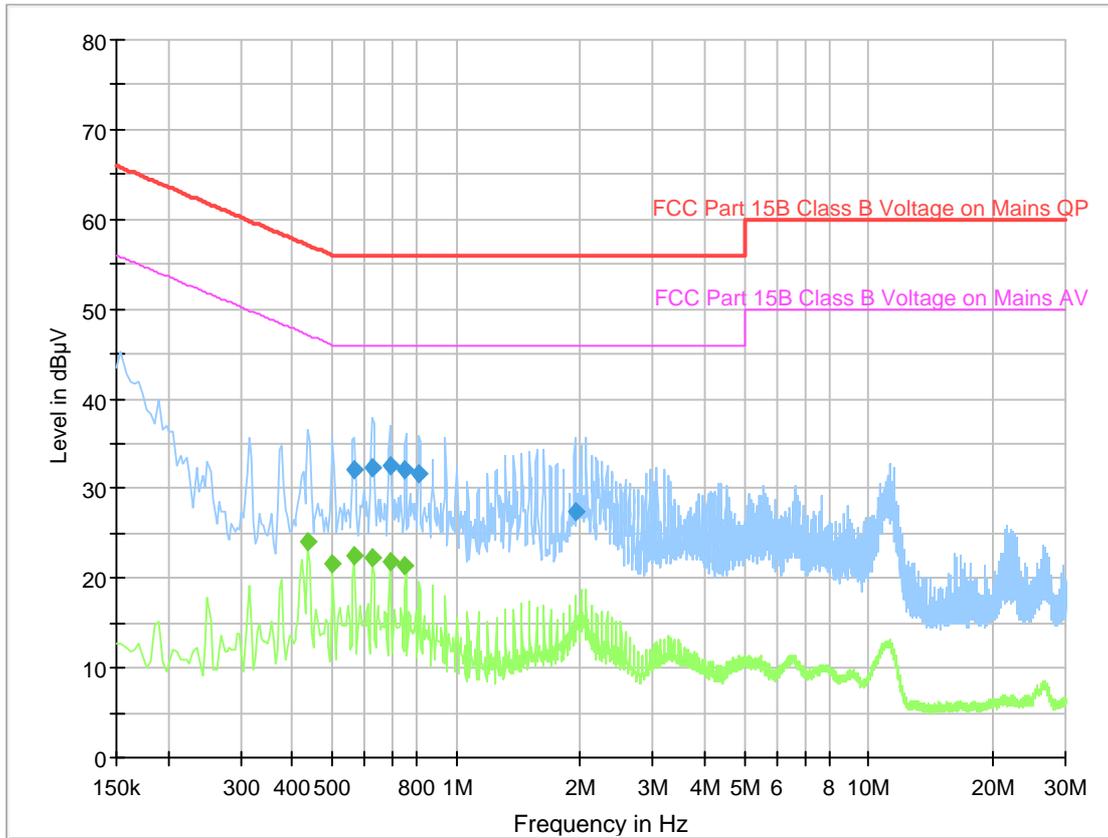

Diagram, Peak and Average overview sweep

Measurement results, Quasi-peak

Frequency [MHz]	Level [dBµV]	Limit [dBµV]	Line L/N	Margin [dB]
0.565	32.2	56.0	L	23.8
0.627	32.4	56.0	L	23.6
0.689	32.6	56.0	L	23.4
0.752	32.1	56.0	L	23.9
0.814	31.6	56.0	L	24.4
1.943	27.4	56.0	L	28.6

Measurement results, Average

Frequency [MHz]	Level [dBµV]	Limit [dBµV]	Line L/N	Margin [dB]
0.439	24.0	47.1	L	23.1
0.502	21.6	46.0	L	24.4
0.564	22.5	46.0	L	23.5
0.627	22.3	46.0	L	23.7
0.690	21.9	46.0	L	24.1
0.752	21.5	46.0	L	24.5

Result [dBµV] = Analyser reading [dBµV] + cable loss [dB] + LISN insertion loss [dB]

6 FIELD STRENGTH OF FUNDAMENTAL AND RADIATED BAND EDGE

Date of test:	2017-03-02	Test location:	Björkhallen
EUT ID:	RF EM1	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	35 %
Test result:	Pass	Margin:	0.9 dB

6.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013.

The EUT was set up in order to emit maximum disturbances.

The EUT was placed on an insulating support 1.5 m above the turntable which is part of the reference ground plane.

Overview sweeps were performed with the measurement receiver in max-hold mode and the peak and average detector was activated.

EUT was evaluated in three orthogonal orientations.

6.2 Test conditions

Test set-up:

1 GHz – 40 GHz

Test receiver set-up:

Preview test:

Peak, RBW 1 MHz VBW 3 MHz

Final test:

Peak, RBW 1 MHz VBW 3 MHz

Average Peak value + 20 x LOG (Duty cycle)

Measuring distance:

3 m

Measuring angle:

0 – 359°

Antenna

Height above ground plane: 1 – 4 m

Polarisation: Vertical and Horizontal

Type: Horn

Antenna tilt: Activated

6.3 Requirement

Outside the restricted bands:

Reference: CFR 47 §15.247(d), RSS-247 5.5,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


Within restricted bands:

Reference: CFR 47 §15.209, RSS-Gen section 8.9

Field strength of emissions must comply with limits shown in table below

Frequency range [MHz]	Field strength at 3 m (dB μ V/m)	Field strength at 10 m (dB μ V/m)	Detector (dB μ V/m)
30 – 88	40.0	29.5	Quasi Peak
88 – 216	43.5	33.0	Quasi Peak
216 – 960	46.0	35.5	Quasi Peak
960 – 1000	54.0	43.5	Quasi Peak
Above 1000	54.0 / 74.0	43.5 / 63.5	Average / Peak

6.4 Test results

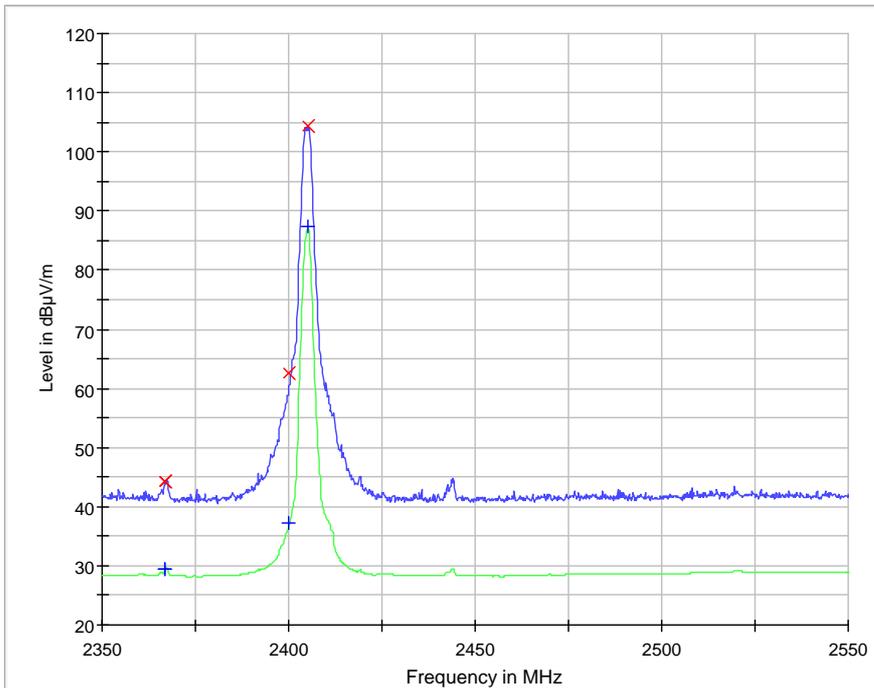


Lower band edge sweep

Field strength of fundamental and band edge, low channel

Frequency [MHz]	Level [dBµV/m]	Delta [dBc]	Limit [dBc]	Detector	EUT Orientation	Polarization H/V	Margin [dB]
2405.0	104.6	--	--	Peak	Y	H	--
2400.0	62.7	41.9	20	Peak	Y	H	21.9

*Carrier

Result [dBµV] = Analyser reading [dBµV] + cable loss [dB] + LISN insertion loss [dB]

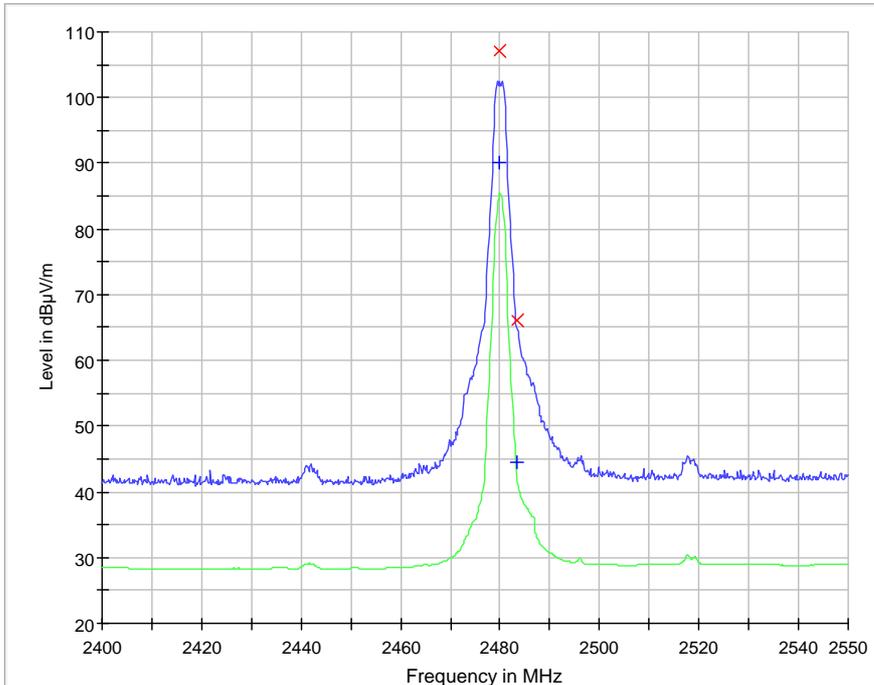

Upper band edge sweep

Field strength of fundamental and band edge, high channel

Frequency [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Detector	EUT Orientation	Polarization H/V	Margin [dB]
2480.0	107.2	-	Peak	Y	H	-
2483.5	66.1	74.0	Peak	Y	H	7.9
2483.5*	53.1	54.0	Average	Y	H	0.9

*The measured result is below the upper limit, but by a margin less than half of the uncertainty interval. It is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance is more probable than non-compliance.

Result [dBµV] = Analyser reading [dBµV] + cable loss [dB] + LISN insertion loss [dB]

7 RADIATED RF EMISSION IN THE FREQUENCY-RANGE 30 MHZ TO 26 GHZ

Date of test:	2017-02-28 – 2017-03-02	Test location:	Björkhallen
EUT ID:	RF EM1	Ambient temp:	20 – 22 °C
Tested by:	DNI	Relative humidity:	25 – 38 %
Test result:	Pass	Margin:	6.2 dB

7.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013.

The EUT was set up in order to emit maximum disturbances.

The EUT was placed on an insulating support 0.8 and 1.5 m above the turntable which is part of the reference ground plane.

Overview sweeps were performed with the measurement receiver in max-hold mode and the peak detector activated in the frequency-range 30 – 1000 MHz. Above 1 GHz additionally the average detector was activated.

Pre scan was made in three orthogonal EUT orientations.

7.2 Test conditions

Test set-up:

30 MHz to 1000 MHz

Test receiver set-up:

Preview test: Peak, RBW 120 kHz VBW 1 MHz

Final test: Quasi-Peak, RBW 120 kHz VBW 1 MHz

EUT height above ground plane: 0.8 m

Measuring distance: 3 m

Measuring angle: 0 – 359°

Antenna

Height above ground plane: 1 – 4 m

Polarisation: Vertical and Horizontal

Type: Bilog

Test set-up:

1 GHz – 26.5 GHz

Test receiver set-up:

Preview test: Peak, RBW 1 MHz VBW 3 MHz

Average, RBW 1 MHz VBW 3 MHz

Final test: Peak, RBW 1 MHz VBW 3 MHz

Average Peak value + 20 x LOG (Duty cycle)

EUT height above ground plane: 1.5 m

Measuring distance: 3 m

Measuring angle: 0 – 359°

Antenna

Height above ground plane: 1 – 4 m

Polarisation: Vertical and Horizontal

Type: Horn

Antenna tilt: Activated

7.3 Requirements

Within restricted bands:

Reference: CFR 47 §15.209, RSS-Gen section 8.9

Field strength of emissions must comply with limits shown in table below

Frequency range [MHz]	Field strength at 3 m (dBµV/m)	Field strength at 10 m (dBµV/m)	Detector (dBµV/m)
30 – 88	40.0	29.5	Quasi Peak
88 – 216	43.5	33.0	Quasi Peak
216 – 960	46.0	35.5	Quasi Peak
960 – 1000	54.0	43.5	Quasi Peak
Above 1000	54.0 / 74.0	43.5 / 63.5	Average / Peak


The values for 10 m measuring distance are calculated by subtracting 10.5 dB from the 3 m limit. (i.e. an extrapolation factor of 20 dB/decade according to CFR 47 §15.31(f)(1))

Outside the restricted bands:

Reference: CFR 47 §15.247(d), RSS-247 5.5,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.4 Test results 30 MHz – 1000 MHz, TX

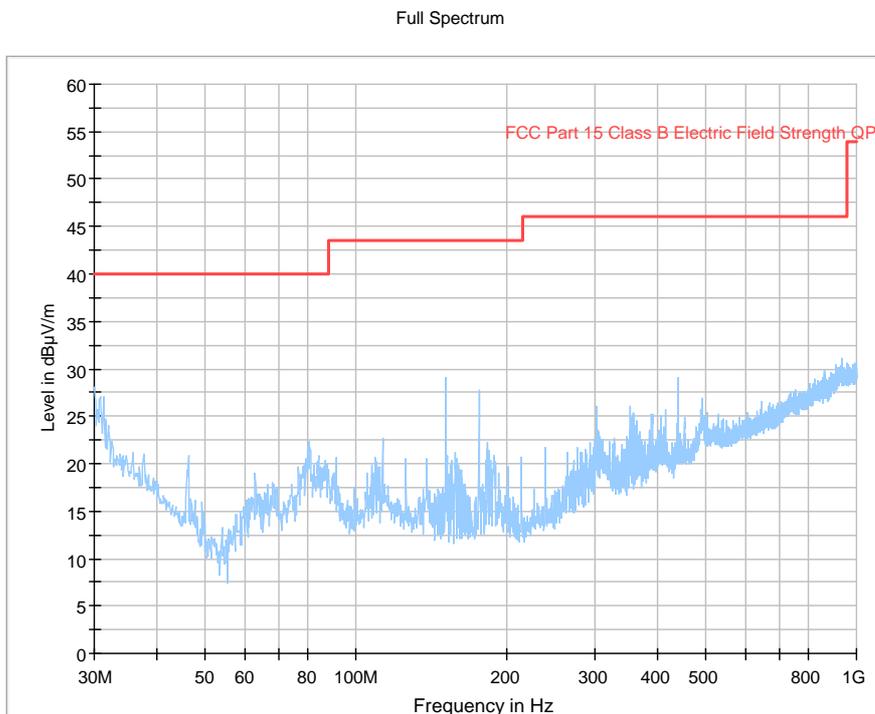


Diagram, Peak overview sweep, 30 – 1000 MHz at 3 m distance. TX low channel

Measurement results, Quasi Peak


No emissions are found above noise. Margin to noise floor is at least 10 dB.

7.5 Test results 1 GHz – 26, TX


Full Spectrum

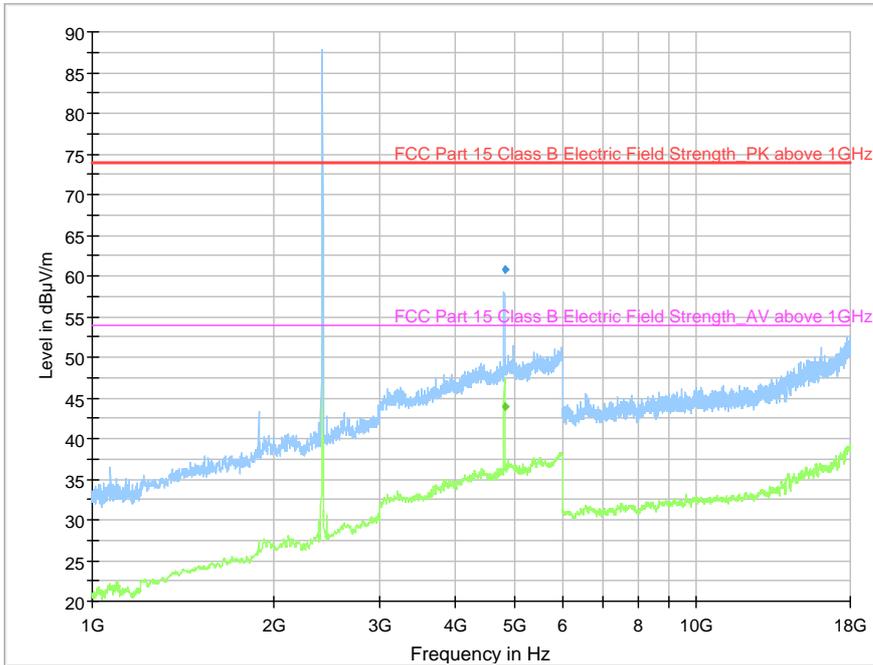


Diagram, Peak overview sweep, 1– 18 GHz at 3 m distance. TX low channel

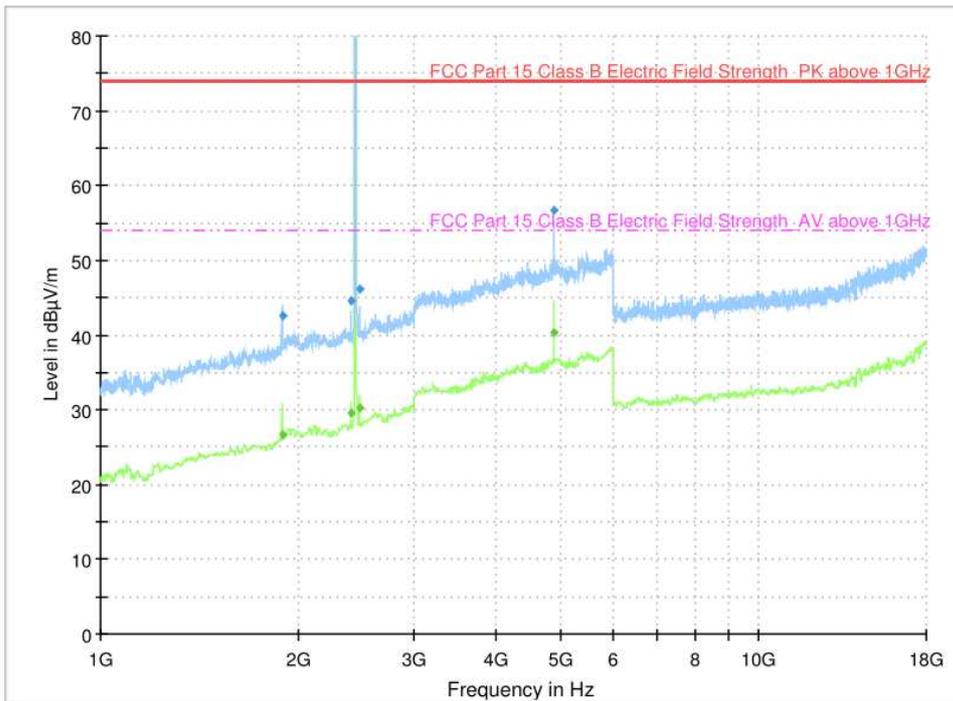

Diagram, Peak overview sweep, 1– 18 GHz at 3 m distance. TX middle channel

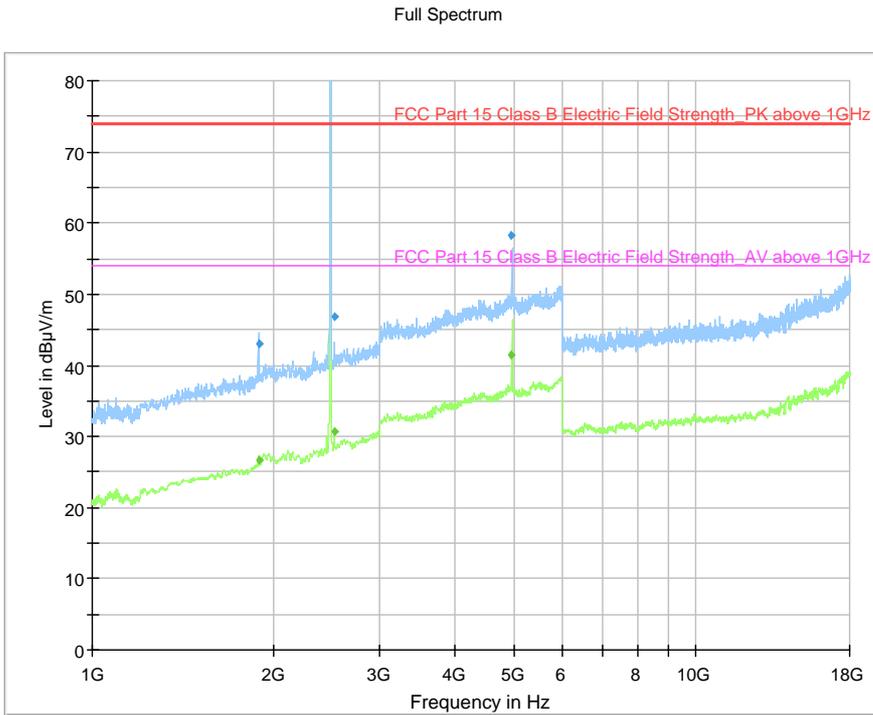


Diagram, Peak overview sweep, 1– 18 GHz at 3 m distance. TX high channel

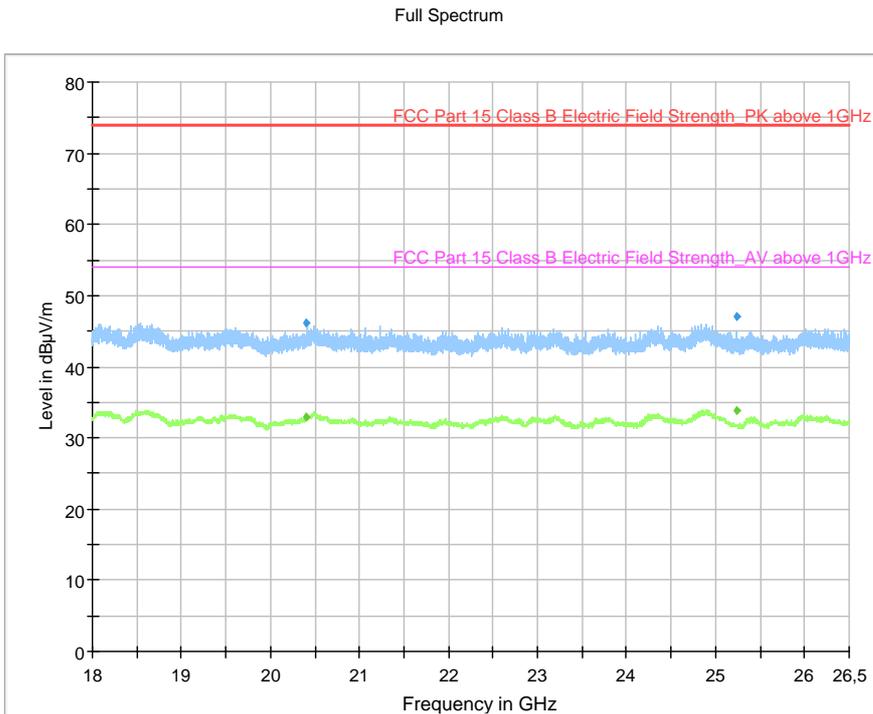


Diagram, Peak overview sweep, 18 – 26 GHz at 3 m distance. TX low channel

Full Spectrum

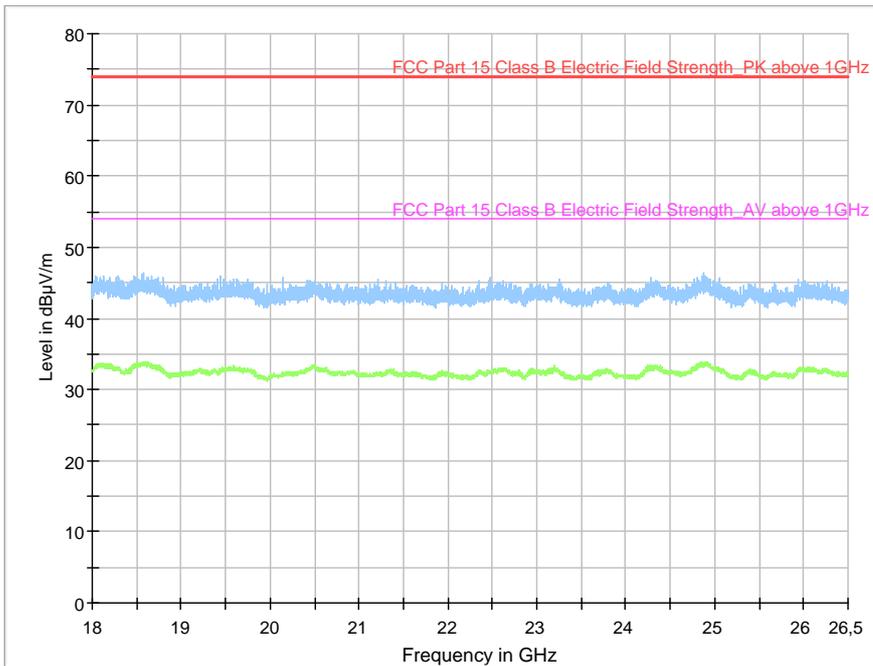

Diagram, Peak overview sweep, 18 – 26 GHz at 3 m distance. TX middle channel

Full Spectrum

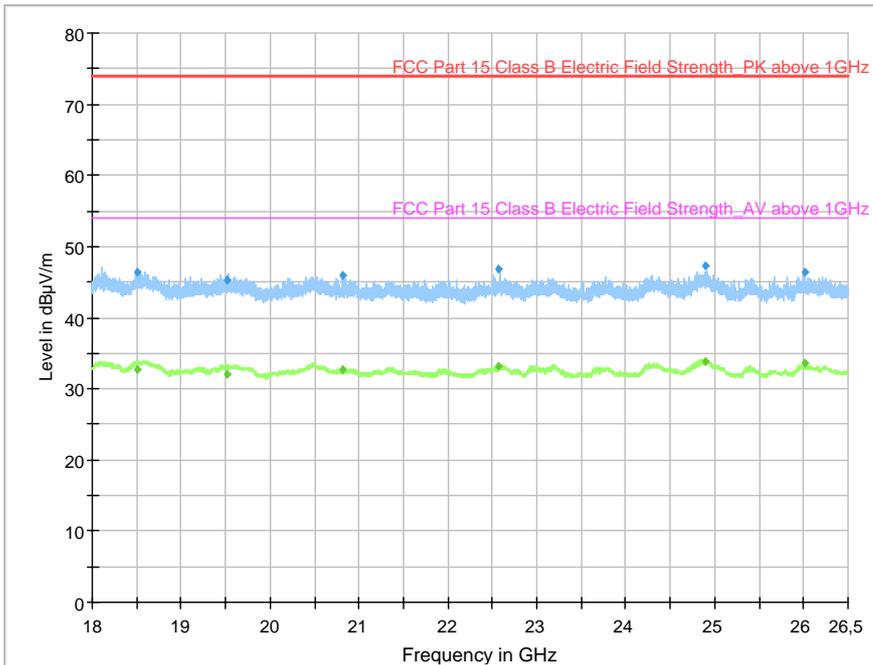

Diagram, Peak overview sweep, 18 – 26 GHz at 3 m distance. TX high channel

Measurement results, Peak, TX low channel

Frequency [MHz]	Level [dB μ V/m]	Limit [dB μ V/m]	EUT orientation	Polarization H/V	Margin [dB]
4811.0	60.8	73.9	Y	V	13.1

Measurement results, Average, TX low channel

Frequency [MHz]	Level [dB μ V/m]	Limit [dB μ V/m]	EUT orientation	Polarization H/V	Margin [dB]
4811.0	47.8	54.0	Y	V	6.2

Measurement results, Peak, TX middle channel

Frequency [MHz]	Level [dB μ V/m]	Limit [dB μ V/m]	EUT orientation	Polarization H/V	Margin [dB]
1888.8	42.5	87.2	Y	V	44.7
4878.8	56.7	73.9	Y	V	17.2

Measurement results, Average, TX middle channel

Frequency [MHz]	Level [dB μ V/m]	Limit [dB μ V/m]	EUT orientation	Polarization H/V	Margin [dB]
1888.8	29.5	-	Y	V	-
4878.8	43.7	53.9	Y	V	10.2

Measurement results, Peak, TX high channel

Frequency [MHz]	Level [dB μ V/m]	Limit [dB μ V/m]	EUT orientation	Polarization H/V	Margin [dB]
1895.8	43.0	87.2	Y	V	44.2
2518.0	46.8	87.2	Y	V	40.4
4958.9	58.3	73.9	Y	V	15.6

Measurement results, Average, TX high channel

Frequency [MHz]	Level [dB μ V/m]	Limit [dB μ V/m]	EUT orientation	Polarization H/V	Margin [dB]
1895.8	30.0	-	Y	V	-
2518.0	33.8	-	Y	V	-
4958.9	45.3	53.9	Y	V	8.6

All other measured disturbances have a margin of more than 20 dB to the limits.

Result [dB μ V/m] = Analyser reading [dB μ V] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

8 CONDUCTED BAND EDGE MEASUREMENT

Date of test:	2017-02-21	Test location:	Wireless Center
EUT ID:	1	Ambient temp:	21 °C
Tested by:	MTV	Relative humidity:	32 %
Test result:	Pass	Margin:	16.0 dB

8.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013 section 6.10.4.

The EUT was connected to spectrum analyser via rf-cable and attenuator.

The EUT was set up in order to emit maximum disturbances.

8.2 Test conditions


Detector: Peak,
 RBW: 100 kHz
 VBW: 1 MHz
 Span: 20 / 30 MHz

8.3 Requirement

Reference: CFR 47 §15.247(d), RSS-247 5.5,


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

8.4 Test results

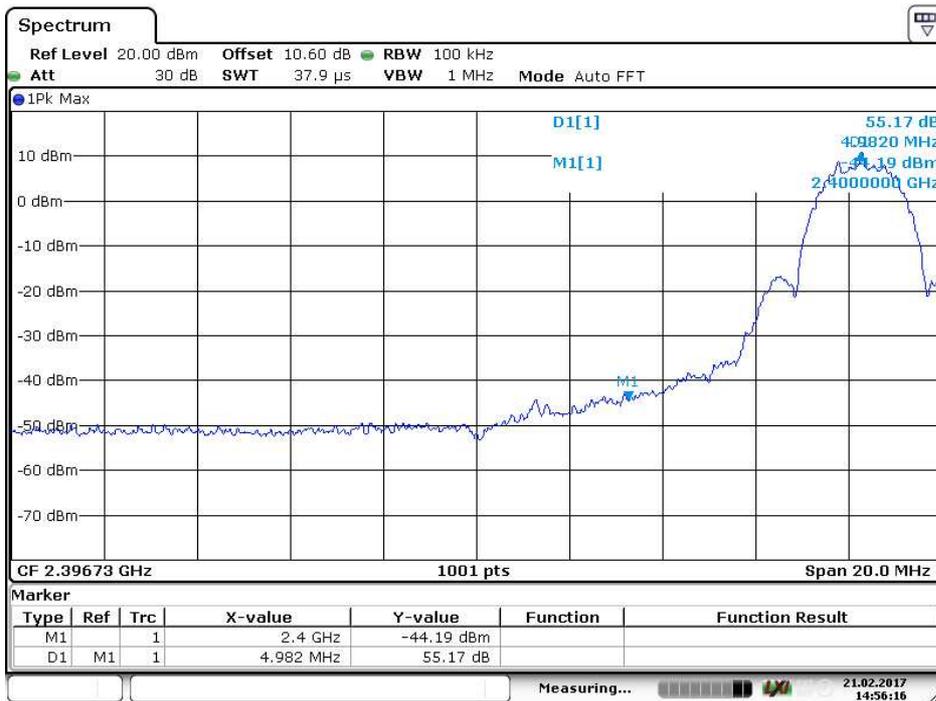

Date: 21 FEB 2017 14:56:16

Screenshot: Lower band edge sweep, single channel

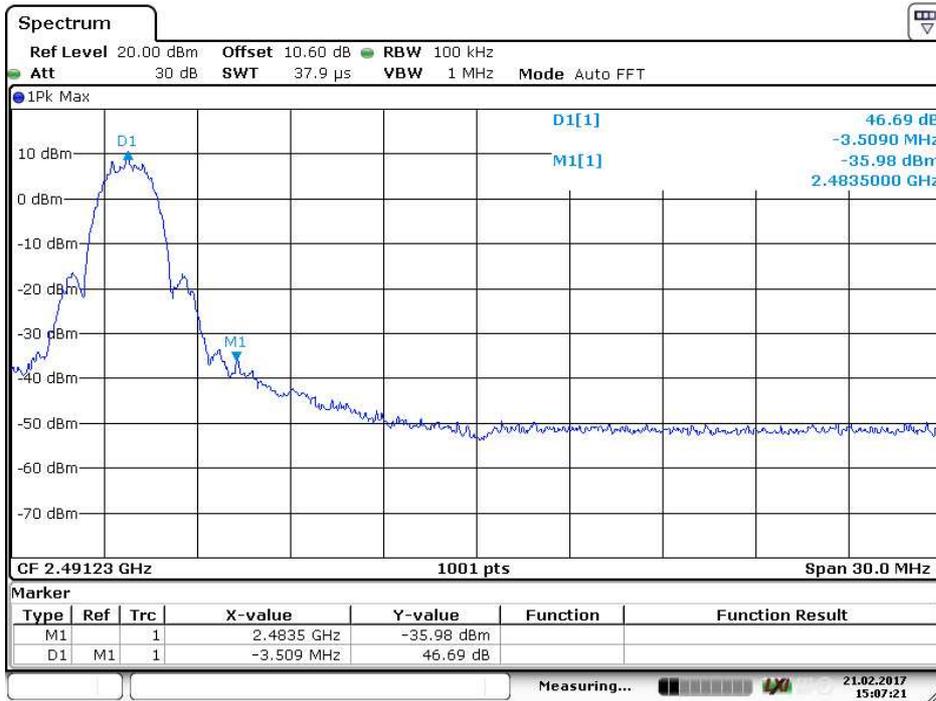

Date: 21 FEB 2017 15:07:22

Screenshot: Upper band edge sweep, single channel

Test results

Band edge	Delta [dBc]	Limit [dBc]	Margin [dB]
Lower	-44.2	-20.0	22.0
Upper	-36.0	-20.0	16.0

9 PEAK CONDUCTED OUTPUT POWER

Date of test:	2017-02-21	Test location:	Wireless Center
EUT ID:	1	Ambient temp:	21 °C
Tested by:	MTV	Relative humidity:	32 %
Test result:	Pass	Margin:	17.4 dB

9.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013 section 11.9.1.1.

The EUT was connected to spectrum analyser via rf-cable and attenuator.

9.2 Test conditions

Detector: Peak,
RBW: >OBW
VBW: 3 x RBW
Span: >3 x OBW


The EUT was set up in order to emit maximum disturbances.

9.3 Requirements

Reference: CFR 47§15.247(b)(3), RSS-247 5.4


For DTSSs employing digital modulation techniques operating in the bands 902 – 128 MHz, 2400 – 2483.5 MHz and 5725 – 5850 MHz, the maximum peak conducted output power shall not exceed 1W.

9.4 Test results

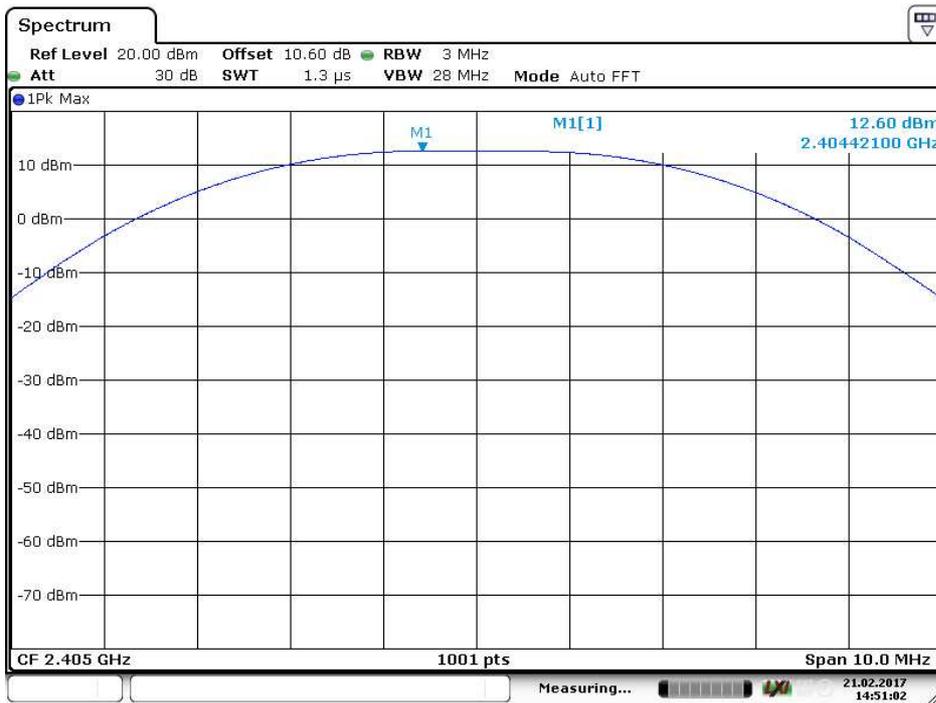


Date: 21 FEB 2017 14:51:02

Screenshot: Output power, low channel

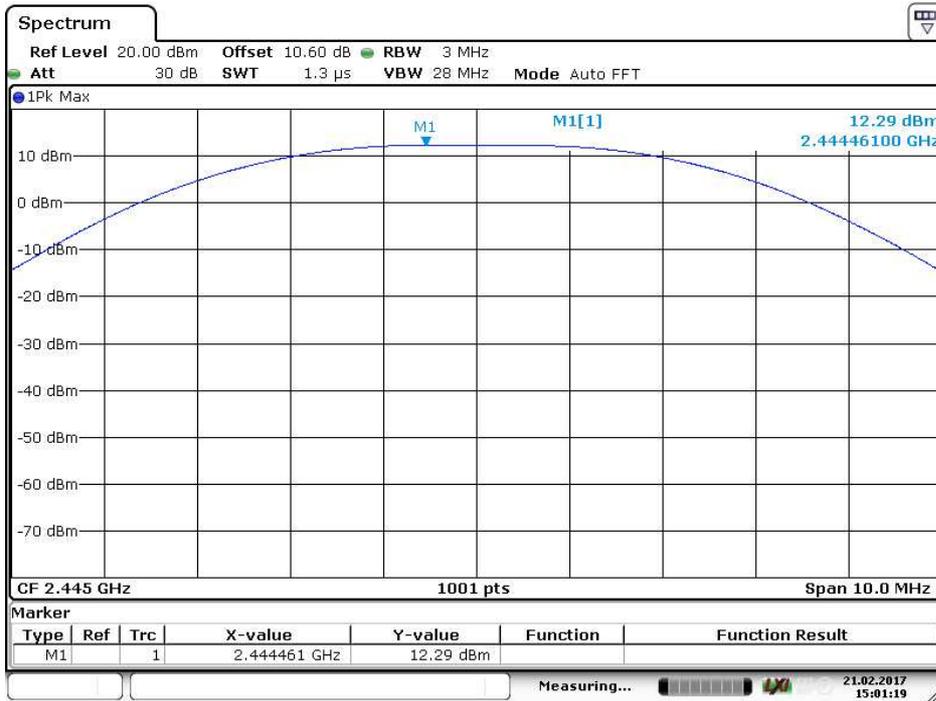

Date: 21 FEB 2017 15:01:20

Screenshot: Output power, middle channel

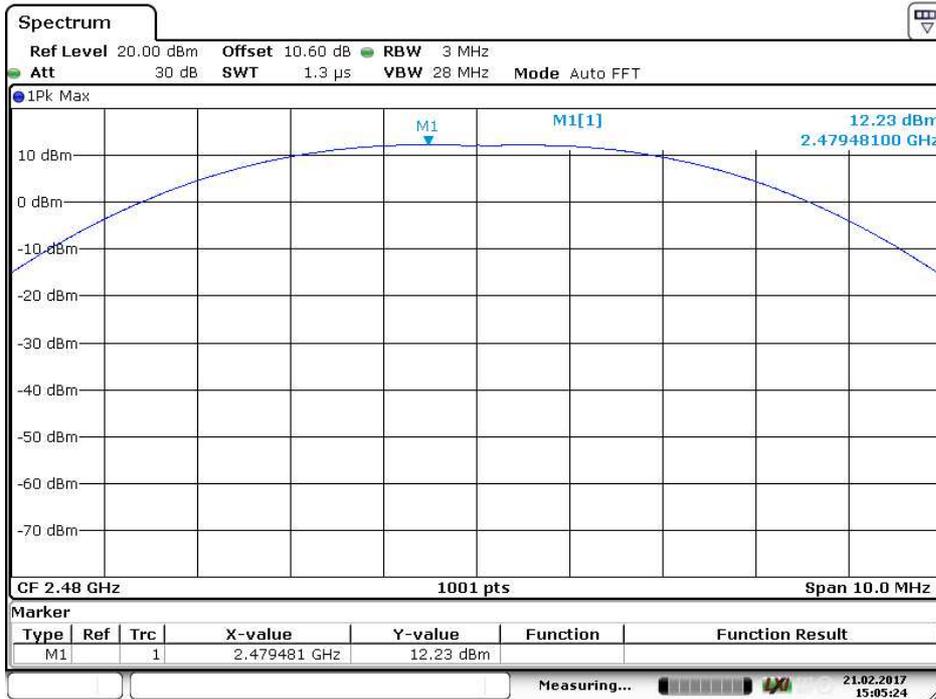

Date: 21 FEB 2017 15:05:25

Screenshot: Output power, high channel

Test result

Channel [MHz]	Output power [dBm]
2405	12.6
2445	12.3
2480	12.2

10 OCCUPIED 6 DB BANDWIDTH

Date of test:	2017-02-21	Test location:	Wireless Center
EUT ID:	1	Ambient temp:	21 °C
Tested by:	MTV	Relative humidity:	32 %
Test result:	Pass	Margin:	0.97 MHz

10.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013 section 11.8.1.

The EUT was connected to spectrum analyser via rf-cable and attenuator.

10.2 Test conditions


Detector: Peak,
RBW: 100 kHz
VBW: 3 x RBW
Span: >1,5 x OBW

The EUT was set up in order to emit maximum disturbances.

10.3 Requirements


Reference: CFR 47§15.247(a)(2), RSS-247 5.2(a)
The minimum 6 dB bandwidth shall be 500 kHz.

10.4 Test results

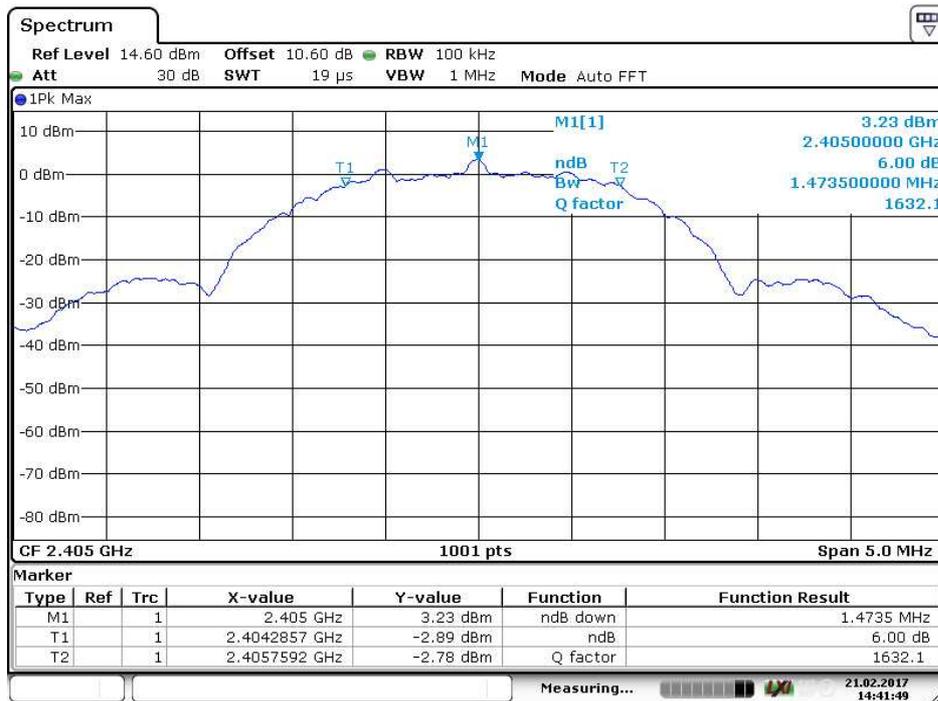


Date: 21 FEB 2017 14:41:49

Screenshot: Occupied 6 dB bandwidth Measurement, low channel

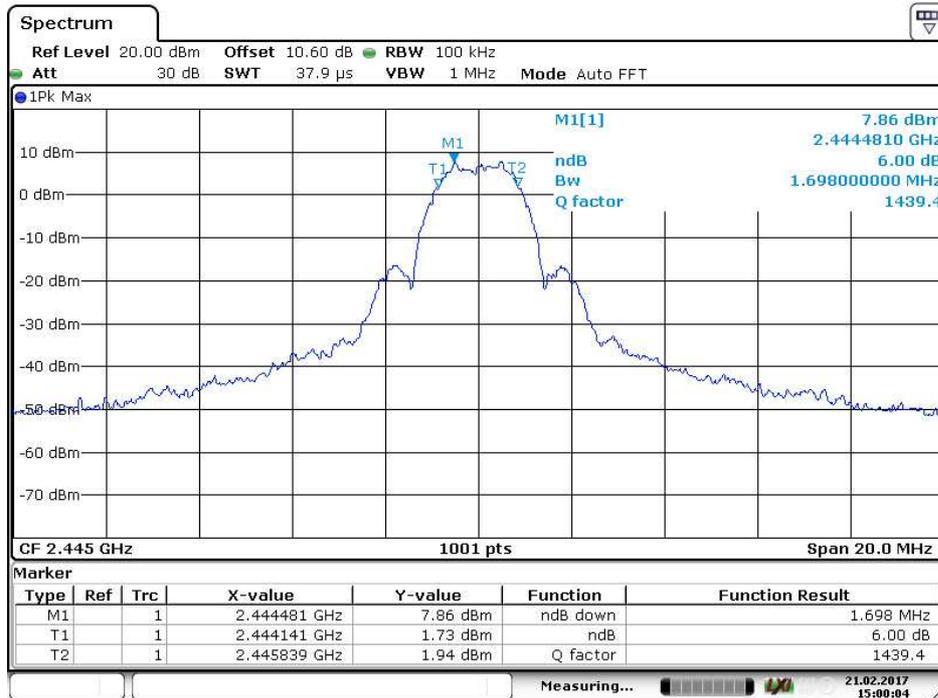

Date: 21 FEB 2017 15:00:04

Screenshot: Occupied 6 dB bandwidth Measurement, middle channel

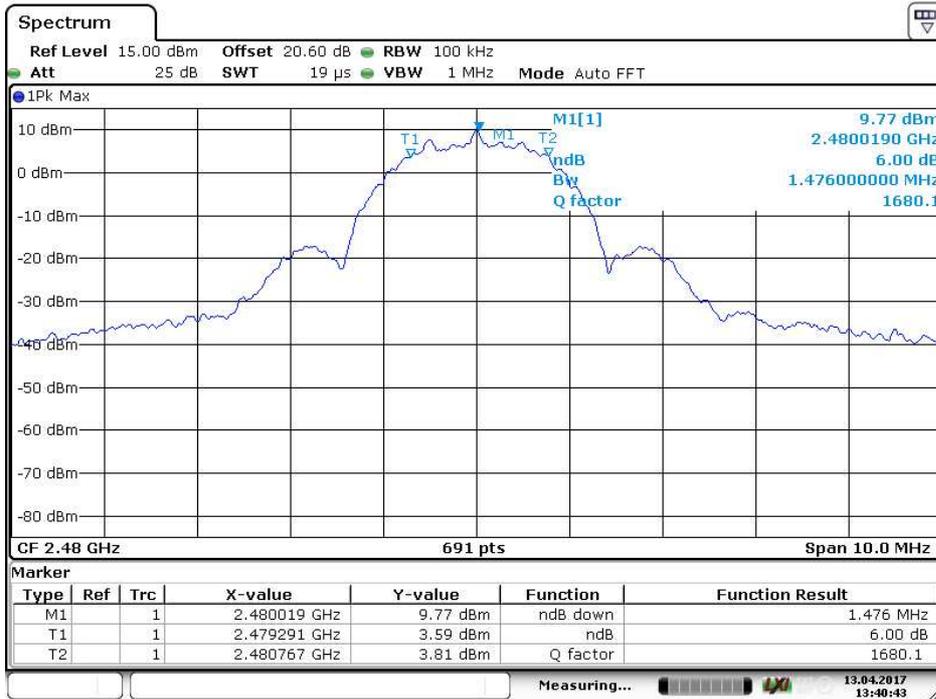

Date: 13 APR 2017 13:40:43

Screenshot: Occupied 6 dB bandwidth Measurement, high channel

Test result

Channel [MHz]	6 dB BW [MHz]
2405	1.47
2445	1.70
2480	1.48

11 99 % BANDWIDTH

Date of test:	2017-03-02	Test location:	Björkhallen
EUT ID:	RF EM1	Ambient temp:	22 °C
Tested by:	DNI	Relative humidity:	35 %
Test result:	Pass	Margin:	N/A

11.1 Test set-up and test procedure.


The test method is in accordance with RSS-GEN section 6.6.

The test set up was according to section 7.1.

11.2 Test conditions


Detector: Peak,
 RBW: 1 – 5 % of OBW
 VBW: 3 x RBW

11.3 Test results

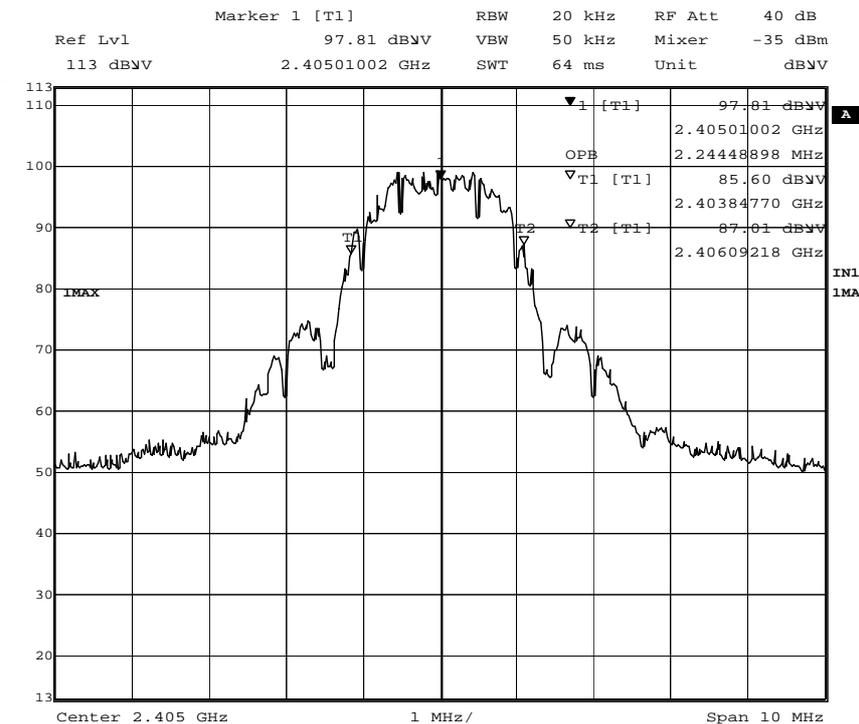


Date: 2.MAR.2017 08:42:56

Screenshot: 99 % bandwidth Measurement, low channel

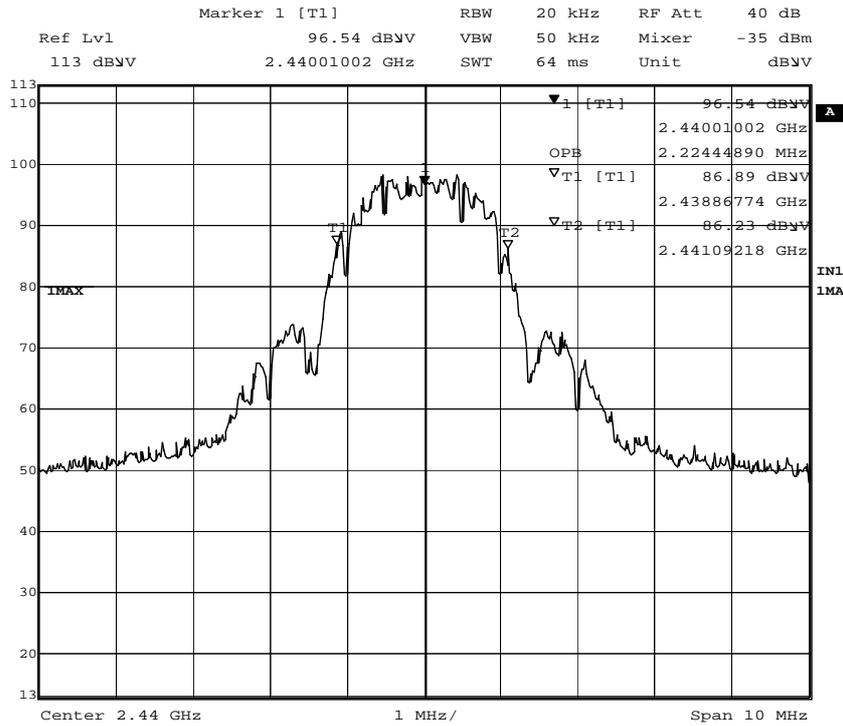

Date: 2.MAR.2017 08:48:25

Screenshot: 99 % bandwidth Measurement, middle channel

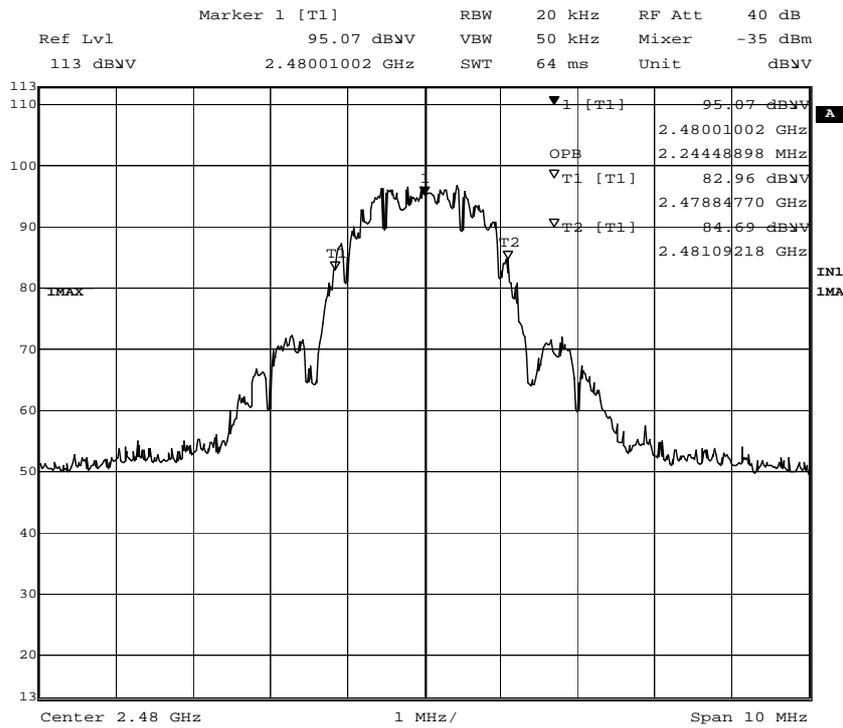

Date: 2.MAR.2017 08:53:25

Screenshot: 99 % bandwidth Measurement, high channel

Test result

Channel [MHz]	99 % BW [MHz]
2405	2.24
2445	2.22
2480	2.24

12 PEAK POWER SPECTRAL DENSITY

Date of test:	2017-02-21	Test location:	Wireless Center
EUT ID:	1	Ambient temp:	21 °C
Tested by:	MTV	Relative humidity:	32 %
Test result:	Pass	Margin:	8.4 dB

12.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10-2013 section 11.10.2.

The EUT was connected to spectrum analyser via rf-cable and attenuator.

12.2 Test conditions

Detector: Peak,
 RBW: 3 kHz
 VBW: >3 x RBW
 Span: 1.5 x 6 dB bandwidth


The EUT was set up in order to emit maximum disturbances.

12.3 Requirements

Reference: CFR 47§15.247(3), RSS-247 5.2(b)


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

12.4 Test results

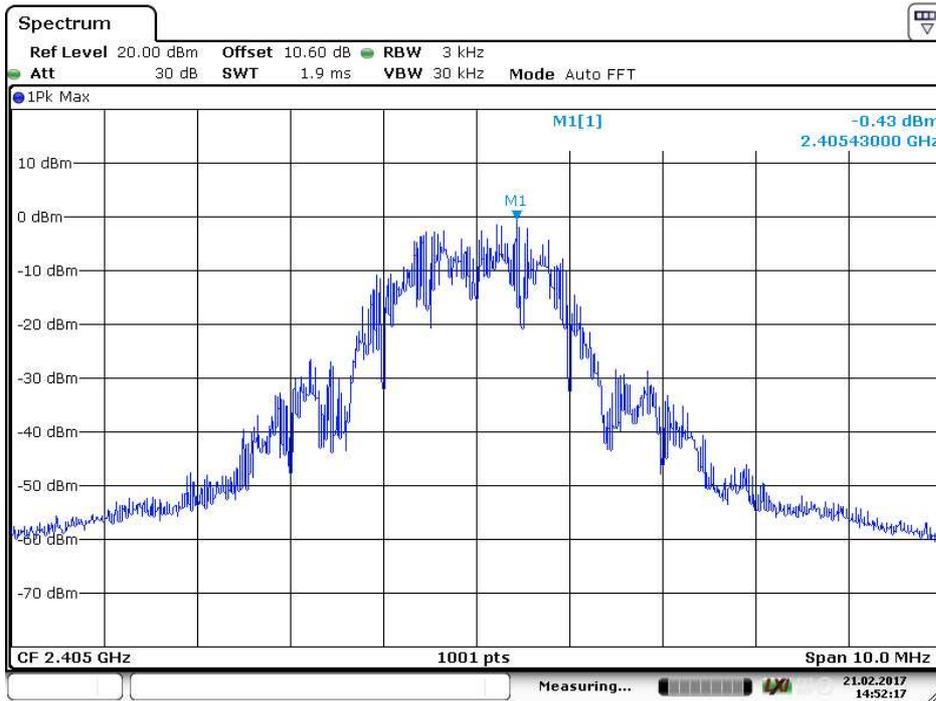


Date: 21 FEB 2017 14:52:17

Screenshot: Peak power spectral density, low channel

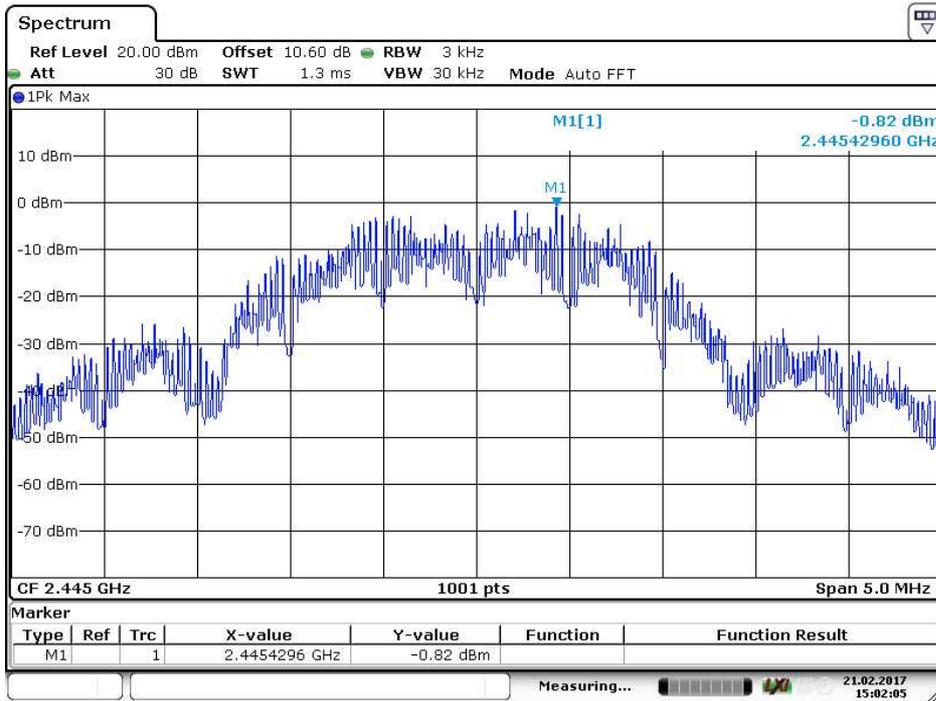

Date: 21 FEB 2017 15:02:05

Screenshot: Peak power spectral density, middle channel

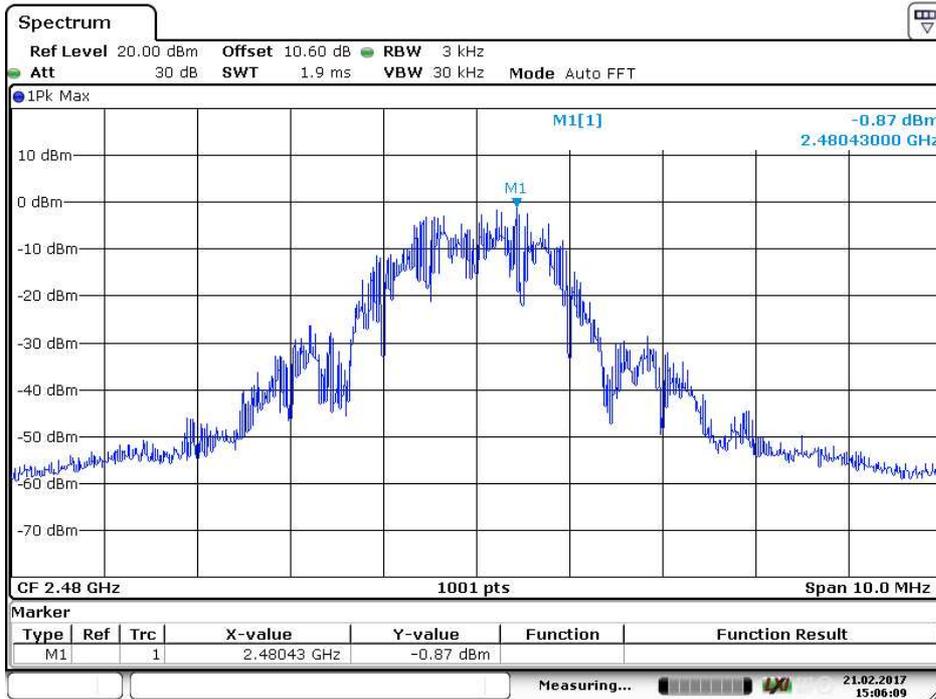

Date: 21 FEB 2017 15:06:10

Screenshot: Peak power spectral density, high channel

Test result

Channel [MHz]	PSD [dBm/3kHz]
2405	-0.4
2445	-0.8
2480	-0.9

13 TRANSMITTER DUTY CYCLE FOR PULSED TRANSMISSIONS

Date of test:	2017-04-13	Test location:	Wireless Center
EUT ID:	1	Ambient temp:	21 °C
Tested by:	DNI	Relative humidity:	30 %
Test result:	N/A	Margin:	N/A

13.1 Test set-up and test procedure.

The test method is in accordance with ANSI C63.10.section 7.5

The EUT was connected to spectrum analyser via rf-cable and attenuator.

13.2 Test conditions

Detector: Peak
 RBW 3 MHz
 VBW 3 RBW
 Span 0 Hz
 Sweep time 5/100 ms

13.3 Requirement


CFR 47 15.35 and RSS-GEN section 6.10.

13.4 Test results


$T_{on} = 2.24 \times 10 = 22.4 \text{ ms}$

Duty cycle is calculated $T_{on} / 100 \text{ ms} = 22.4 \%$

Peak to average correction factor = $20 \text{ LOG (Duty cycle)} = -13.0$

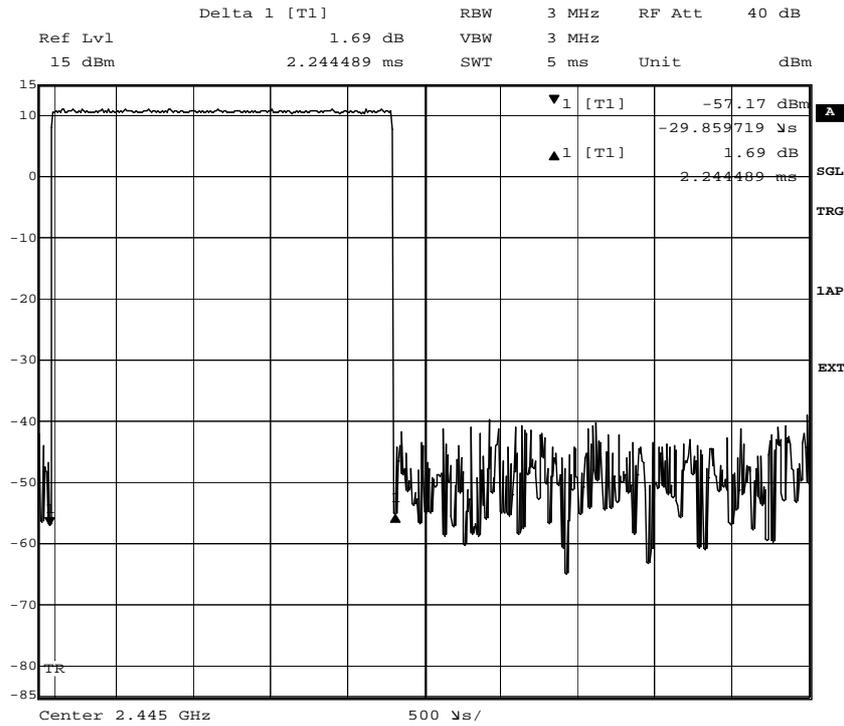

Date: 13.APR.2017 13:12:07
Screenshot: Time of one pulse

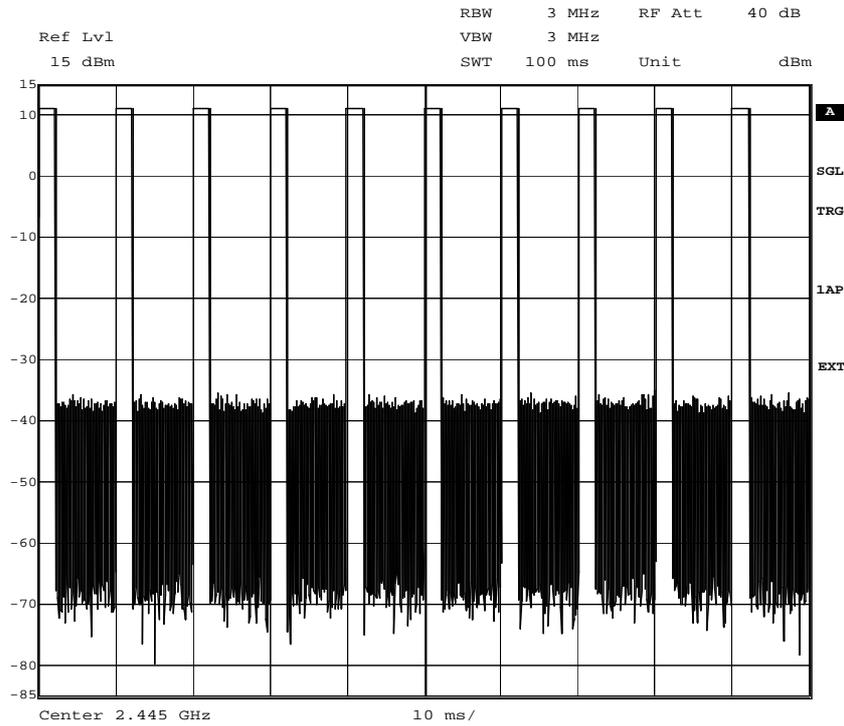

Date: 13.APR.2017 13:15:14
Screen shot: 100 ms measurement

14 TEST EQUIPMENT**BUR 1**

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. Date	Cal. Interval
Measurement receiver	Rohde & Schwarz	ESCI	12741	7/2016	1 year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	32798	7/2016	1 year
AMN / LISN	Rohde & Schwarz	ESH3-Z5	5875	7/2016	1 year

Björk hallen

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. Date	Cal. Interval
Measurement receiver	Rohde & Schwarz	ESIB 26	32291	7/2016	1 year
Measurement receiver	Rohde & Schwarz	ESU 40	13178	7/2016	1 year
UltraLog antenna	Rohde & Schwarz	HL562	30711	12/2014	3 years
Horn antenna	Rohde & Schwarz	HF907	32307	7/2015	3 years
Pre amplifier	Rohde & Schwarz	TS-pre1	32306	7/2016	1 year
Horn antenna + preamp	Bonn	BLMA 1826-5A	31247	1/2017	3 years
Rf cable	Megaphase	GC12-K1K1-315	39127	7/2016	1 year

Wireless Center

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. Date	Cal. Interval
Signal analyser:	Rohde & Schwarz	FSV	32594	7/2016	1 year
10 dB Attenuator:	Huber+Suhner	5910_N-50-010	32696	6/2016	1 year
Measurement cable	Huber+Suhner	Sucoflex 104 PE	39084	7/2016	1 year
Signal analyser:	Rohde & Schwarz	FSIQ40	12793	7/2016	1 year

15 MEASUREMENT UNCERTAINTY

Continuous conducted disturbances with AMN in the frequency range 9 kHz to 30 MHz ± 3.7 dB

Measurement uncertainty for radiated disturbance

Uncertainty for the frequency range 30 to 1000 MHz at 3 m	± 5.1 dB
Uncertainty for the frequency range 30 to 1000 MHz at 10 m	± 5.0 dB
Uncertainty for the frequency range 1.0 to 18 GHz at 3 m	± 4.7 dB
Uncertainty for the frequency range 18 to 26 GHz at 3 m	± 4.8 dB
Uncertainty for the frequency range 26 to 40 GHz at 3 m	± 5.7 dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2011.

The measurement uncertainty is given with a confidence of 95 %.

16 TEST SET UP AND EUT PHOTOS

EUT photos are in separate document 1707604STO-002, Annex 1.

Test set up photos are in separate document 1707604STO-002, Annex 2.