

IKEA of Sweden AB

TEST REPORT

SCOPE OF WORK:

FCC Part 15B EMC report

Model:

ICPSW5-5NA-3

REPORT NUMBER

240500436SHA-001

ISSUE DATE

April 15, 2025

DOCUMENT CONTROL NUMBER

TTRFFCCPART15b_V1

© 2018 Intertek



Report no. 240500436SHA-001

Applicant : **IKEA of Sweden AB**
Box 702, SE-343 81 Älmhult, SWEDEN

Manufacturer : **Jiangyin Wonder Electronic Co., Ltd.**
No.129, Yungu Road, Gushan Town, Jiangyin City, Jiangsu
Province, China

Summary

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart B)

ANSI C63.4 (2014)+A1 (2017): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

PREPARED BY:

REVIEWED BY:

Star Guo
Project Engineer

Andy Chen
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Contents

REVISION HISTORY	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST FACILITY	7
2 TEST SPECIFICATIONS	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST	8
2.3 TEST SOFTWARE LIST	8
2.4 TEST PERIPHERALS LIST	8
2.5 RECORD OF CLIMATIC CONDITIONS	8
2.6 INSTRUMENT LIST	9
2.7 MEASUREMENT UNCERTAINTY	10
3 CONDUCTED EMISSION	11
3.1 LIMITS	11
3.1.1 <i>Limits for conducted emission of class A device</i>	11
3.1.2 <i>Limits for conducted emission of class B device</i>	11
3.2 TEST SETUP	12
3.3 TEST SETUP AND TEST PROCEDURE	13
3.4 TEST PROTOCOL	14
4 RADIATED EMISSION	16
4.1 RADIATED EMISSION LIMITS	16
4.1.1 <i>Limits for radiated emission of class A device</i>	16
4.1.2 <i>Limits for radiated emission of class B device</i>	16
4.2 BLOCK DIAGRAM AND TEST SET UP	17
4.3 TEST SETUP AND TEST PROCEDURE	18
4.4 TEST PROTOCOL	19

Revision History

Report No.	Version	Description	Issued Date
240500436SHA-001	Rev. 01	Initial issue of report	March 07, 2025
240500436SHA-001	Rev. 02	add the FCC ID: FHO-ICPSW5-5NA-3 in the test report.	April 15, 2025

Measurement result summary

TEST ITEM	FCC REFERENCE	RESULT
Conducted emission	15.107	Pass
Radiated emission	15.109	Pass

Notes: 1: NA =Not Applicable

2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product Name : Power Supply
Type/Model : ICPSW5-5NA-3
Description of EUT : FCC ID: FHO-ICPSW5-5NA-3.
The EUT can reach the maximum output power with the test load.
We tested it, and listed the worst data.
Rating : Input: 100-240V~, 50/60Hz, Max 0.1A, 7W
Output: 5.0Vdc, Max 1.0A 5.0W
Brand name : IKEA
Category of EUT : Class B
EUT type : ☒ Table top
☐ Floor standing
Sample received date : May 10, 2024
Sample identification No. : 0240510-13
Date of test : May 10-25, 2024

1.2 Description of Test Facility

Name : Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R.
China
Telephone : 86 21 61278200
Telefax : 86 21 54262353

The test facility is :
recognized, certified, : CNAS Accreditation Lab
or accredited by these : Registration No. CNAS L21189
organizations : FCC Accredited Lab
Designation Number: CN0175
IC Registration Lab
CAB identifier.: CN0014
VCCI Registration Lab
Registration No.: R-14243, G-10845, C-14723, T-12252
A2LA Accreditation Lab
Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2023): Radio Frequency Devices (Subpart B)

ANSI C63.4 (2014)+A1 (2017): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency is specified if used.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V1.3.0.2
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Resistive load	Band: JUWEI, Model:5V-1A-2A-3A	Test load: 5Ω

2.5 Record of climatic conditions

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)
Conducted emission	24	48	-
Radiated Emission	23	48	-

Notes: NA =Not Applicable

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESR7	EC 6194	2025-02-27
☒	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2025-12-06
☒	A.M.N.	R&S	ESH2-Z5	EC 3119	2025-07-23
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESIB 26	EC 3045	2025-08-22
☒	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2025-09-12
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Shielded room	Zhongyu	-	EC 2838	2026-01-09
☒	Semi-anechoic chamber	Albatross project	-	EC 3048	2025-07-08
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Thermo-Hygrograph	Testo	175h1	EC 6640	2025-08-28
☒	Thermo-Hygrograph	Testo	175h1	EC 6641	2025-08-28

2.7 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted emission at mains ports	9kHz ~ 150kHz	3.71 dB
	150kHz ~ 30MHz	3.31 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.04 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.97 dB
	6GHz ~ 18GHz	5.29 dB

3 Conducted emission

Test result: **PASS**

3.1 Limits

3.1.1 Limits for conducted emission of class A device


Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60
Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.		

3.1.2 Limits for conducted emission of class B device


Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50
Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz 2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.		

3.2 Test setup

 For table top equipment

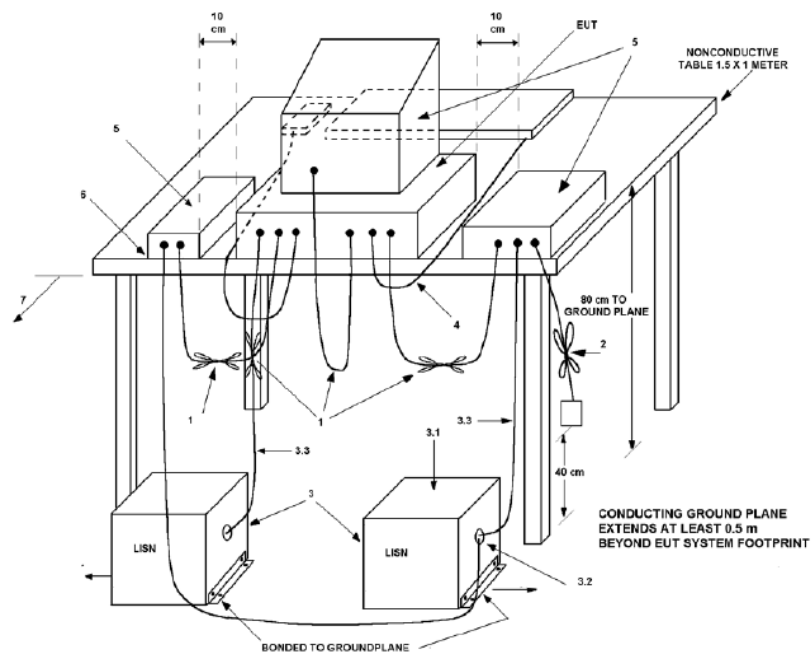

☐ For floor standing equipment

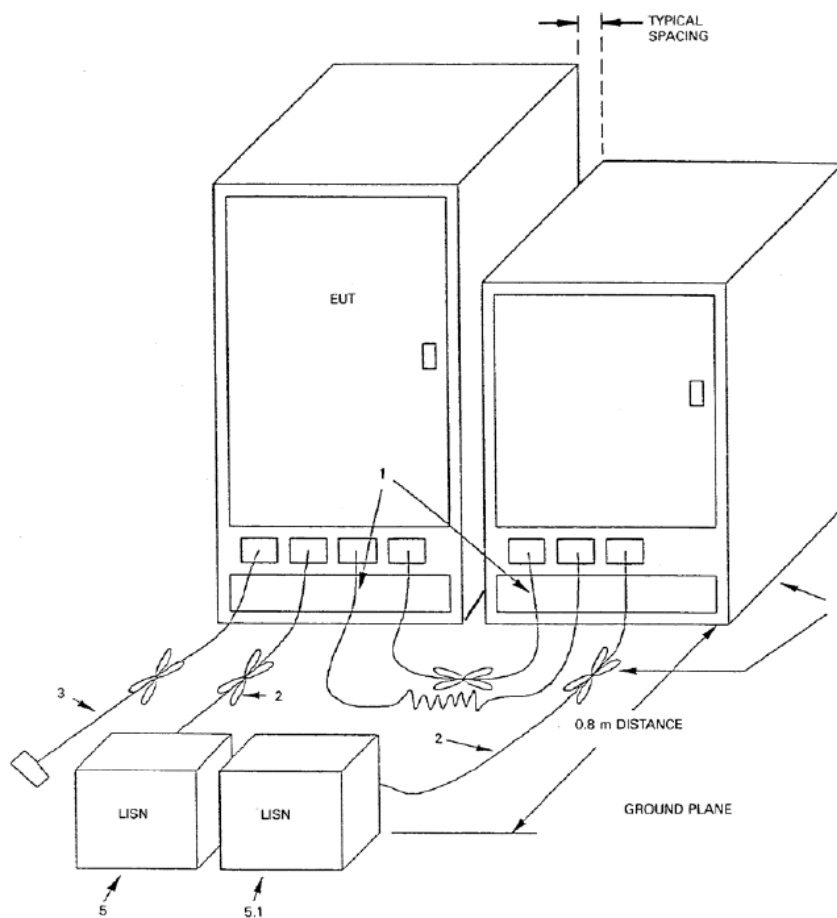

3.3 Test Setup and Test Procedure



Measurement was performed in shielded room, and instruments used were following clause 4 and clause 5 of ANSI 63.4.

Detailed test procedure was following clause 7.3 of ANSI 63.4.

EUT arrangement and operation conditions were according to clause 6 and clause 7 of ANSI 63.4.

Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

3.4 Test Protocol

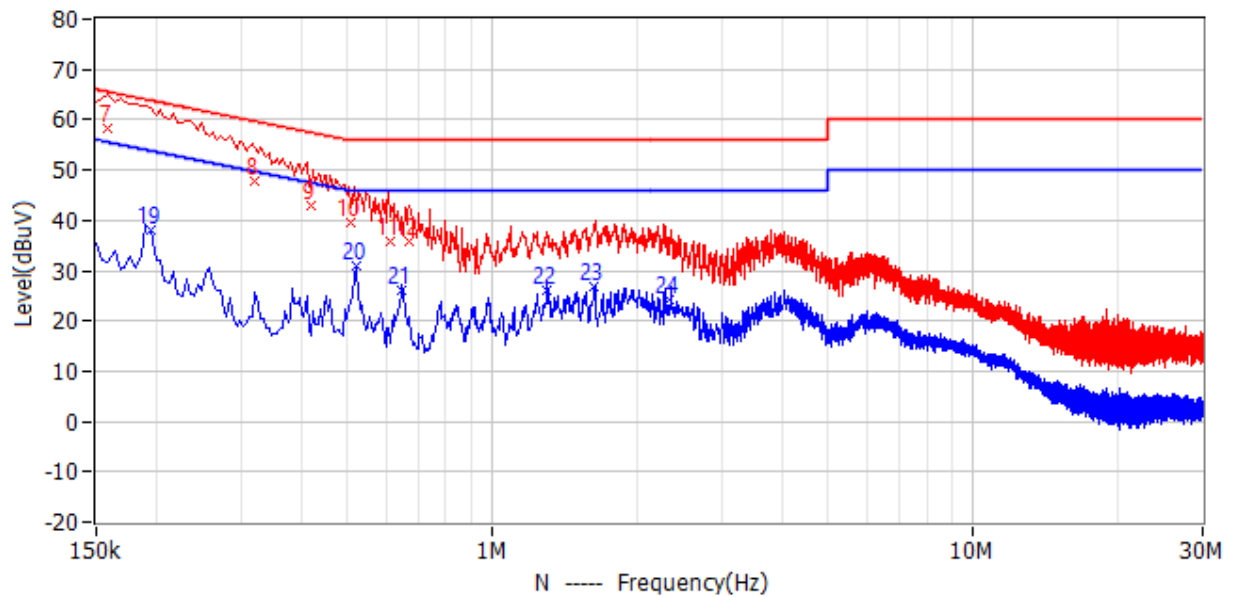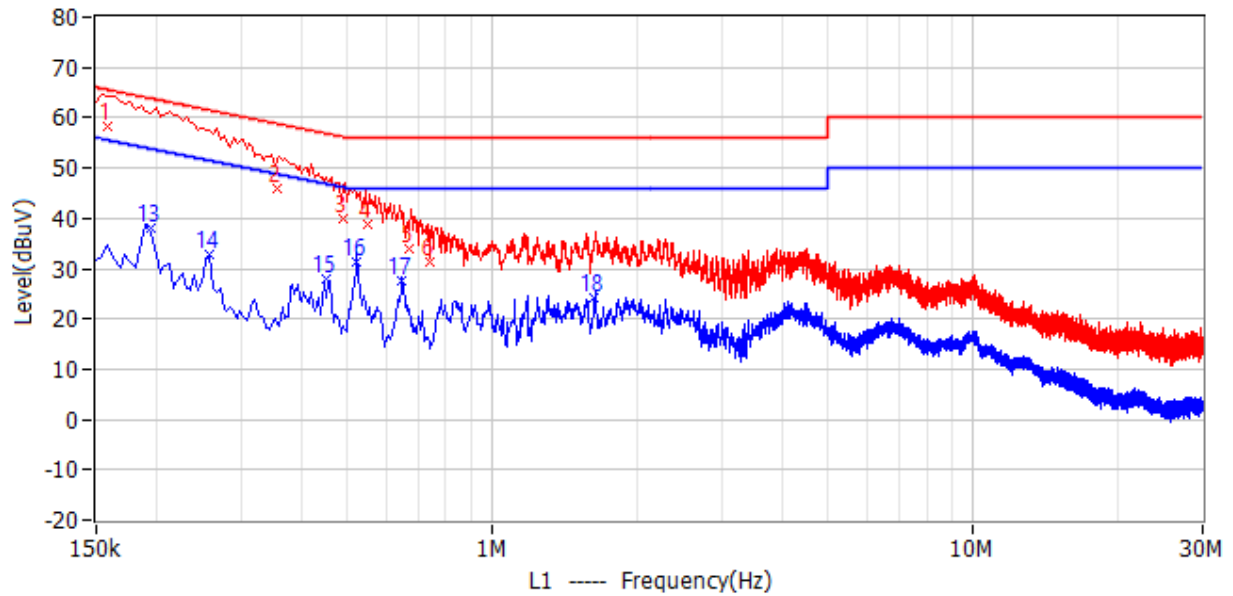

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	159.000kHz	65.5	58.2	-7.3	52.0	6.2	QP	L1
2	357.000kHz	58.8	45.8	-13.0	39.6	6.2	QP	L1
3	487.500kHz	56.2	40.1	-16.1	33.9	6.2	QP	L1
4	550.500kHz	56.0	38.7	-17.3	32.5	6.2	QP	L1
5	672.000kHz	56.0	34.0	-22.0	27.8	6.2	QP	L1
6	739.500kHz	56.0	31.2	-24.8	25.0	6.2	QP	L1
7	159.000kHz	65.5	58.3	-7.2	52.1	6.2	QP	N
8	321.000kHz	59.7	47.7	-12.0	41.5	6.2	QP	N
9	420.000kHz	57.4	43.1	-14.3	36.9	6.2	QP	N

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
10	505.500kHz	56.0	39.6	-16.4	33.4	6.2	QP	N
11	613.500kHz	56.0	35.9	-20.1	29.7	6.2	QP	N
12	672.000kHz	56.0	35.9	-20.1	29.7	6.2	QP	N
13	195.000kHz	53.8	38.2	-15.7	32.0	6.2	CAV	L1
14	258.000kHz	51.5	32.7	-18.8	26.5	6.2	CAV	L1
15	451.500kHz	46.8	28.0	-18.9	21.8	6.2	CAV	L1
16	519.000kHz	46.0	31.3	-14.7	25.1	6.2	CAV	L1
17	645.000kHz	46.0	27.4	-18.6	21.2	6.2	CAV	L1
18	1.622MHz	46.0	24.3	-21.7	18.1	6.2	CAV	L1
19	195.000kHz	53.8	37.9	-16.0	31.7	6.2	CAV	N
20	519.000kHz	46.0	30.8	-15.2	24.6	6.2	CAV	N
21	645.000kHz	46.0	26.1	-19.9	19.9	6.2	CAV	N
22	1.298MHz	46.0	26.1	-19.9	19.9	6.2	CAV	N
23	1.626MHz	46.0	27.0	-19.0	20.8	6.2	CAV	N
24	2.342MHz	46.0	24.2	-21.8	18.0	6.2	CAV	N

Note: *means margin is more than 20dB

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
 Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
 Then Correct Factor = 10.00 + 2.00 = 12.00dB;
 Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;
 Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

4 Radiated emission

Test result: **PASS**

4.1 Radiated emission limits

4.1.1 Limits for radiated emission of class A device


Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 10m
30 ~ 88	39
88 ~ 216	43.5
216 ~ 960	46.4
Above 960	49.5
Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.	

4.1.2 Limits for radiated emission of class B device


Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 3m
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
Above 960	54.0
Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.	

4.2 Block diagram and test set up

☒ For table top equipment

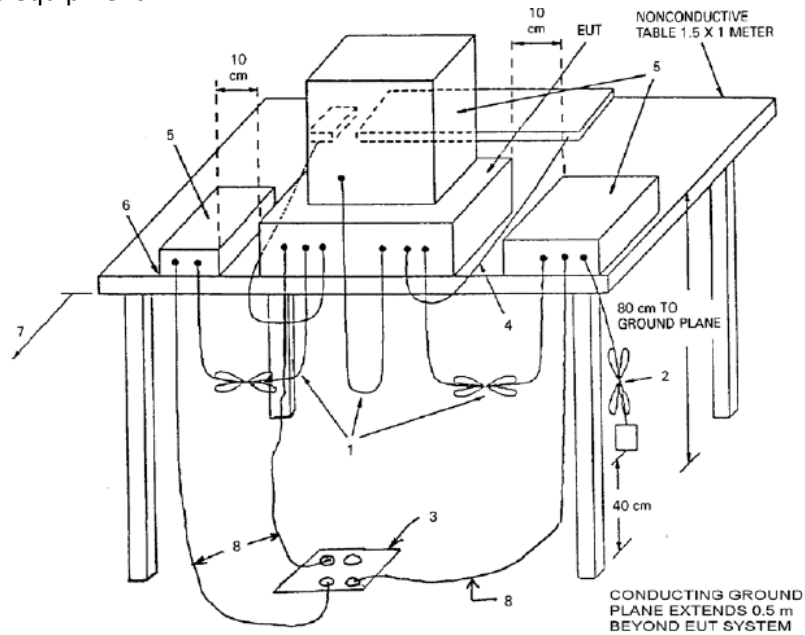

☐ For floor standing equipment

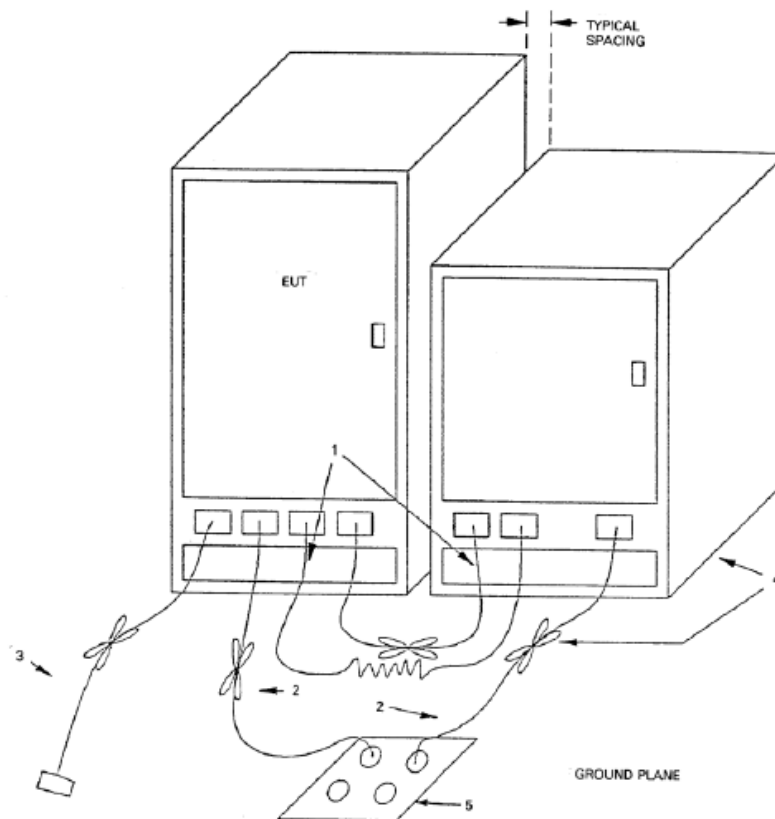

4.3 Test Setup and Test Procedure

The measurement was performed in a semi-anechoic chamber.

The distance from EUT to receiving antenna is 3 meter.

Measurement was performed according to clause 4 and clause 5 of ANSI 63.4.

Test procedure was according to clause 8.3 of ANSI 63.4.

EUT arrangement and operate condition were according to clause 6 and clause 8 of ANSI 63.4.


The bandwidth setting on R&S Test Receiver was 120 kHz.

The required measurement frequency range was checked.

4.4 Test Protocol


Test Curve:

Horizontal

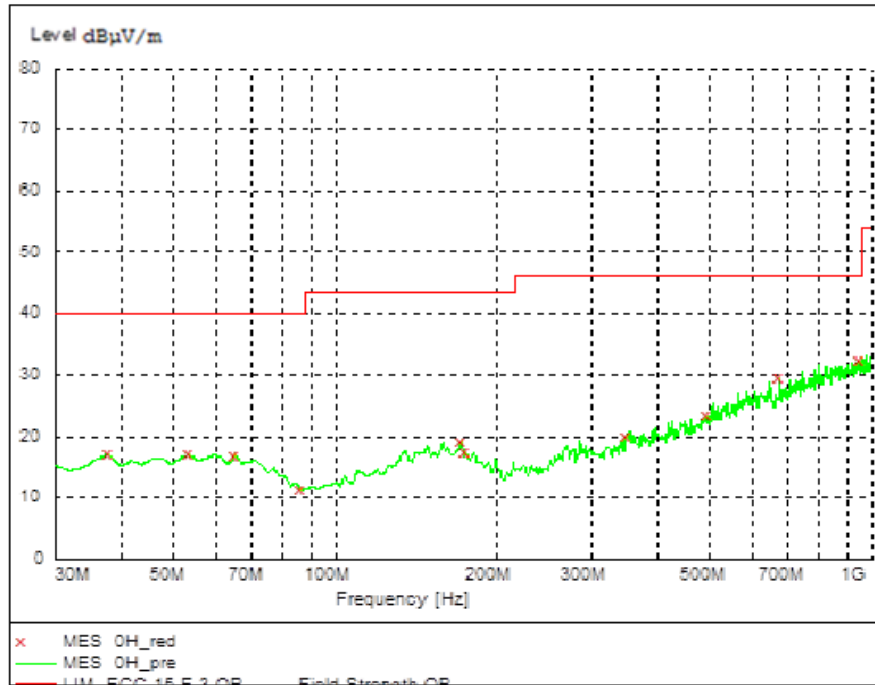

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB
37.775551	17.10	13.6	40.0	22.9
53.326653	16.90	14.4	40.0	23.1
64.989980	16.80	13.4	40.0	23.2
86.372745	11.30	9.2	40.0	28.7
171.903808	19.20	13.8	43.5	24.3
175.791583	17.40	13.5	43.5	26.1
348.797595	19.90	16.4	46.0	26.1
492.645291	23.40	20.0	46.0	22.6
673.426854	29.40	23.2	46.0	16.6
951.402806	32.40	26.8	46.0	13.6

Vertical

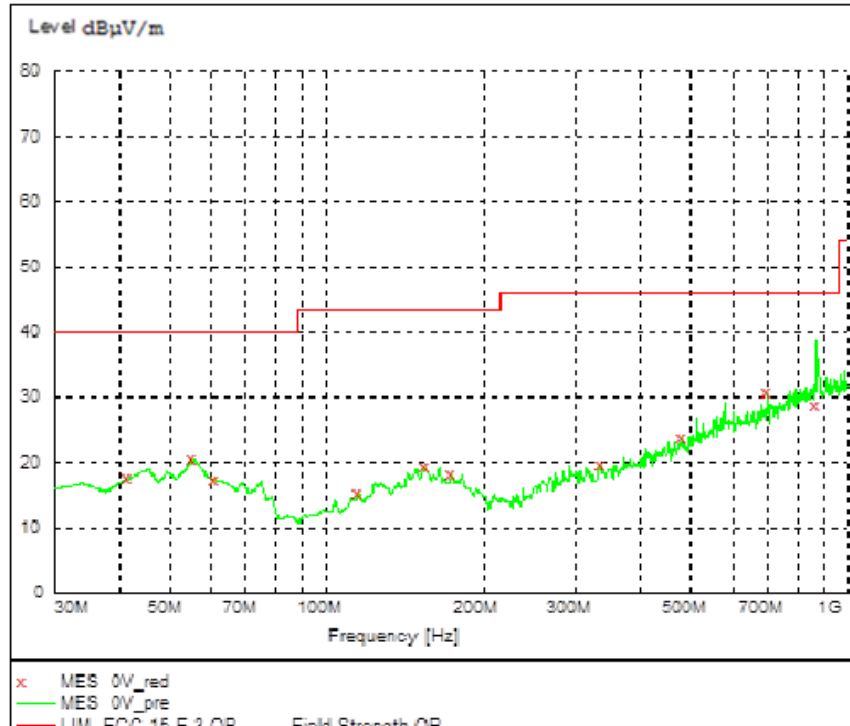

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB
41.663327	17.60	13.9	40.0	22.4
55.270541	20.50	14.3	40.0	19.5
61.102204	17.30	14.0	40.0	22.7
115.531062	15.30	11.2	43.5	28.2
154.408818	19.30	14.9	43.5	24.2
173.847695	18.10	13.6	43.5	25.4
335.190381	19.60	16.1	46.0	26.4
480.981964	23.70	19.7	46.0	22.3
700.641283	30.70	23.5	46.0	15.3
869.759519	28.70	26.0	46.0	17.3

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading = 10dBuV +
 0.20dB/m = 10.20dBuV/m; Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

END of the report