

## EMC TEST REPORT

### No. 151000372SHA-001

Applicant : IKEA of Sweden AB  
P.O. Box 702, SE-343 81 Älmhult SWEDEN

Manufacturing site : Eaglerise Electronics (Foshan) Co., Ltd.  
No. 4, East Huanzhen Road, Beijiao, Shunde,  
Foshan, Guangdong, 528000, China.

Product Name : Remote controller

Type/Model : ICTD-KL-1

**TEST RESULT : PASS**

#### SUMMARY

The equipment complies with the requirements according to the following standard(s) or specification:

**47CFR Part 15 (2014):** Radio Frequency Devices (Subpart C)

**ANSI C63.10 (2013):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

**RSS-210 Issue 8 (December 2010):** Low-power Licence-exempt Radio communication Devices (All Frequency Bands): Category I Equipment

**RSS-Gen Issue 4 (December 2014):** General Requirements for Compliance of Radio Apparatus

Date of issue: October 27, 2015

Prepared by:



Nemo Li (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)



## Description of Test Facility

Name: Intertek Testing Service Limited Shanghai  
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R.  
China

FCC Registration Number: 236597  
IC Assigned Code: 2402B-1

Name of contact: Jonny Jing  
Tel: 86 21 61278271  
Fax: 86 21 54262353

## Content

<b>SUMMARY</b> .....	<b>1</b>
<b>1 GENERAL INFORMATION</b> .....	<b>4</b>
1.1 Description of Client.....	4
1.2 Identification of the EUT .....	4
1.3 Technical Specification.....	5
<b>2 TEST SPECIFICATIONS</b> .....	<b>6</b>
2.1 Standards or specification .....	6
2.2 Mode of operation during the test.....	6
2.3 Test software list .....	6
2.4 Test peripherals list .....	6
2.5 Instrument list .....	7
2.6 Test Summary .....	8
<b>3 RADIATED EMISSION</b> .....	<b>9</b>
3.1 Test limit .....	9
3.2 Test Configuration .....	9
3.3 Test procedure and test setup .....	10
3.4 Test protocol .....	11
<b>4 ASSIGNED BANDWIDTH (20DB BANDWIDTH)</b> .....	<b>13</b>
4.1 Limit.....	13
4.2 Test Configuration .....	13
4.3 Test procedure and test setup .....	13
4.4 Test protocol .....	14
<b>5 POWER LINE CONDUCTED EMISSION</b> .....	<b>15</b>
5.1 Limit.....	15
5.2 Test configuration .....	15
5.3 Test procedure and test set up .....	16
5.4 Test protocol .....	17
<b>6 OCCUPIED BANDWIDTH</b> .....	<b>18</b>
6.1 Test limit .....	18
6.2 Test Configuration .....	18
6.3 Test procedure and test setup .....	18
6.4 Test protocol .....	19

## 1 GENERAL INFORMATION

### 1.1 Description of Client

Applicant : IKEA of Sweden AB  
P.O. Box 702, SE-343 81 Älmhult SWEDEN

Manufacturing site : Eaglerise Electronics (Foshan) Co., Ltd.  
No. 4, East Huanzhen Road, Beijiao, Shunde, Foshan,  
Guangdong, 528000, China

### 1.2 Identification of the EUT

Product Name : Remote controller  
Type/model : ICTD-KL-1  
FCC ID : FHO-ICTD-KL-1  
IC : 10912A-ICTDKL1

### 1.3 Technical Specification

Operation Frequency : 2400 – 2483.5MHz  
Band

Type of Modulation : FSK

Channel Number : One channel, 2436.20MHz

Description of EUT : The EUT is a remote controller, class III equipment, for indoor use.

Antenna : Integral antenna, 0dBi

Rating : 2X1.5VDC LR03 AAA

Category of EUT : Class B

EUT type :  Table top  
 Floor standing

Sample received date : 2015.10.10

Date of test : 2015.10.10 ~ 2015.10.26

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

47CFR Part 15 (2014)  
ANSI C63.10 (2013)  
RSS-210 Issue 8 (December 2010)  
RSS-Gen Issue 4 (December 2014)

### 2.2 Mode of operation during the test

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

For the EUT is handheld device, it was set up and tested in three axes (X, Y and Z). The three axes were tested one by one while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

### 2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

### 2.4 Test peripherals list

Item No.	Name	Band and Model	Description
-	-	-	-
-	-	-	-

## 2.5 Instrument list

Selected	Instrument	EC no.	Model	Valid until date
<input type="checkbox"/>	Shielded room	EC 2838	GB88	2016-1-8
<input type="checkbox"/>	EMI test receiver	EC 2107	ESCS 30	2016-10-19
<input type="checkbox"/>	A.M.N.	EC 3119	ESH2-Z5	2015-12-16
<input type="checkbox"/>	A.M.N.	EC 3394	ENV 216	2016-8-1
<input checked="" type="checkbox"/>	Semi anechoic chamber	EC 3048	-	2016-5-11
<input checked="" type="checkbox"/>	EMI test receiver	EC 3045	ESIB26	2016-10-19
<input checked="" type="checkbox"/>	Broadband antenna	EC 4206	CBL 6112D	2016-4-27
<input checked="" type="checkbox"/>	Horn antenna	EC 3049	HF906	2016-4-27
<input type="checkbox"/>	Horn antenna	EC 4792-1	3117	2016-4-21
<input checked="" type="checkbox"/>	Horn antenna	EC 4792-3	HAP18-26W	2016-6-11
<input type="checkbox"/>	Pre-amplifier	EC 5262	pre-amp 18	2016-5-25
<input checked="" type="checkbox"/>	Pre-amplifier	EC 4792-2	TPA0118-40	2016-4-10
<input type="checkbox"/>	High Pass Filter	EC 4797-1	WHKX 1.0/15G-10SS	2016-1-8
<input type="checkbox"/>	High Pass Filter	EC 4797-2	WHKX 2.8/18G-12SS	2016-1-8
<input type="checkbox"/>	High Pass Filter	EC 4797-3	WHKX 7.0/1.8G-8SS	2016-1-8
<input checked="" type="checkbox"/>	Band Reject Filter	EC 4797-4	WRCGV2400/2483/10SS	2016-1-8
<input type="checkbox"/>	Test Receiver	EC 4501	ESCI 7	2016-1-13
<input checked="" type="checkbox"/>	PXA Signal Analyzer	EC5338	N9030A	2016-5-14
<input type="checkbox"/>	Power sensor/Power meter	EC4318	N1911A/N1921A	2016-4-26
<input type="checkbox"/>	Power sensor	EC5338-1	U2021XA	2016-3-5
<input type="checkbox"/>	MXG Analog Signal Generator	EC5338-2	N5181A	2016-3-5
<input type="checkbox"/>	MXG Vector Signal Generator	EC5175	N51812B	2016-1-8

## 2.6 Test Summary

**This report applies to tested sample only. The test results have been compared directly with the limits, and the measurement uncertainty is recorded. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.**

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Radiated emission	15.249 & 15.209	RSS-210 Issue 8 Clause 2.2	Pass
Assigned bandwidth (20dB bandwidth)	15.215(c)	-	Pass
Power line conducted emission	15.207	RSS-Gen Issue 4 Clause 8.8	NA
Occupied bandwidth	-	RSS-Gen Issue 4 Clause 6.6	Tested

Notes: 1: NA =Not Applicable

2: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

### 3 Radiated emission

**Test result:** Pass


#### 3.1 Test limit

Fundamental Frequency (MHz)	Fundamental limit (dBuV/m)	Harmonic limit (dBuV/m)
<input type="checkbox"/> 902 - 928	94	54
<input checked="" type="checkbox"/> 2400 - 2483.5	94	54
<input type="checkbox"/> 5725 - 5875	94	54
<input type="checkbox"/> 24000 - 24250	108	68

The radiated emissions which fall outside allocated band (2400-2483.5MHz), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

#### 3.2 Test Configuration

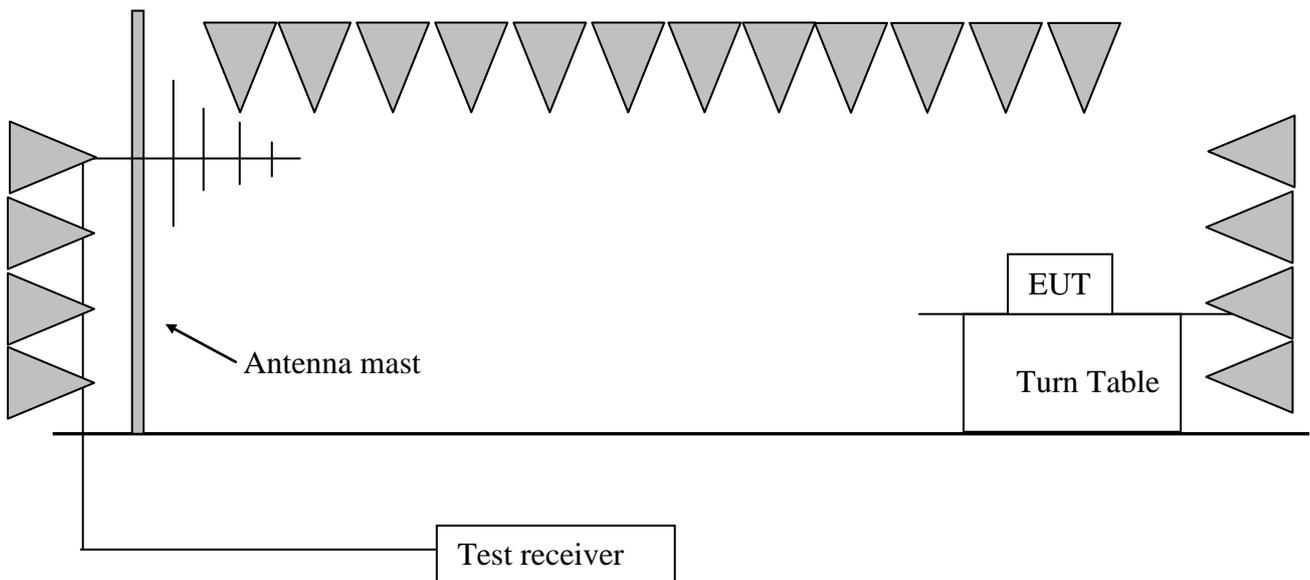

### 3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 300 Hz, VBW = 1 kHz (9 kHz~150 kHz);  
RBW = 10 kHz, VBW = 30 kHz (150 kHz~30MHz);  
RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz for PK)  
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);  
RBW = 1MHz, VBW = 10Hz (>1GHz for AV);

### 3.4 Test protocol

Temperature : 22 °C  
 Relative Humidity : 53 %

Channel	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	V	2436.20	96.10	34.46	114.00	17.90	PK
	V	2389.20	51.10	34.29	74.00	22.90	PK
	V	2483.55	51.25	34.63	74.00	22.75	PK
	V	30.00	22.10	19.80	40.00	17.90	PK
	H	30.00	23.30	19.80	40.00	16.70	PK
	V	4872.35	45.61	-3.38	74.00	28.39	PK
	H	4872.35	44.82	-3.38	74.00	29.18	PK

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed);
2. Corrected Reading = Original Receiver Reading + Correct Factor;
3. Margin = Limit – Corrected Reading;
4. If the PK Corrected reading is lower than AV limit, the AV test can be elided;
5. Measurement uncertainty for frequency less than 1GHz is:  $\pm 4.90\text{dB}$   
 Measurement uncertainty for frequency above 1GHz is:  $\pm 5.02\text{dB}$


Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV,  
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m,  
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m,  
 Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m,  
 Then Margin = 54 -10.20 = 43.80dBuV/m.


Calculating the AV value according to the duty cycle:

Antenna Polarization	Frequency (MHz)	Corrected PK Reading (dBuV/m)	Duty Cycle Factor (dB)	Corrected AV Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
V	2436.20	96.10	-8.15	87.90	94.00	6.10

- Remark:
1. Duty Cycle Factor =  $20\lg(\text{duty cycle}) = 20\lg(0.3913) = -8.15\text{dB}$
  2. Corrected AV Reading = Corrected PK Reading + Duty Cycle Factor
  3. Margin = Limit – Corrected AV Reading

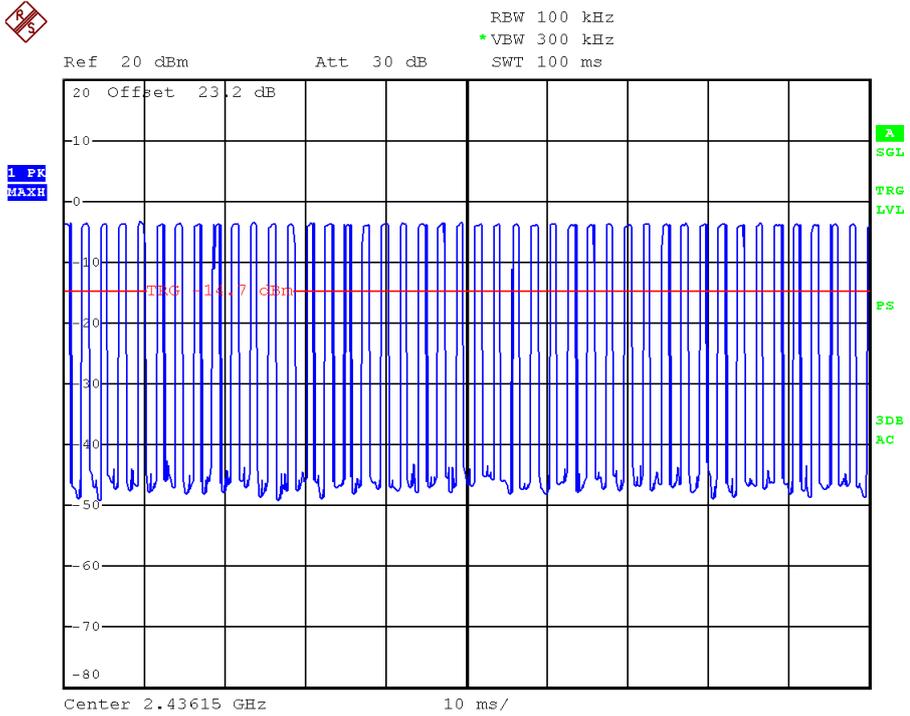

Date: 15.OCT.2015 15:50:31

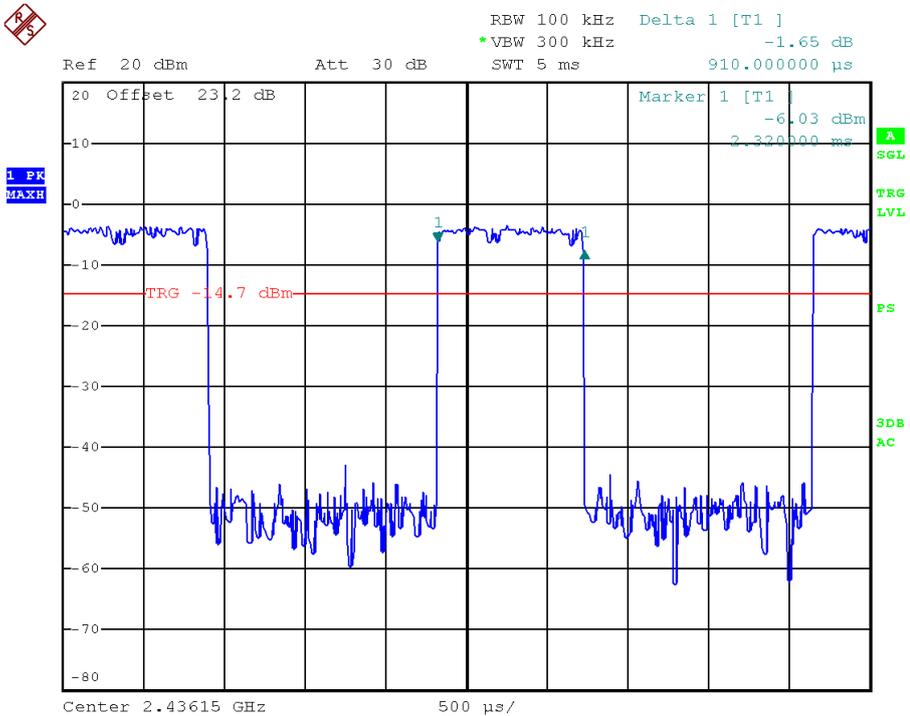

Date: 15.OCT.2015 15:51:33


## 4 Assigned bandwidth (20dB bandwidth)

**Test result:** Pass

### 4.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission is contained within the allocated frequency band.

### 4.2 Test Configuration

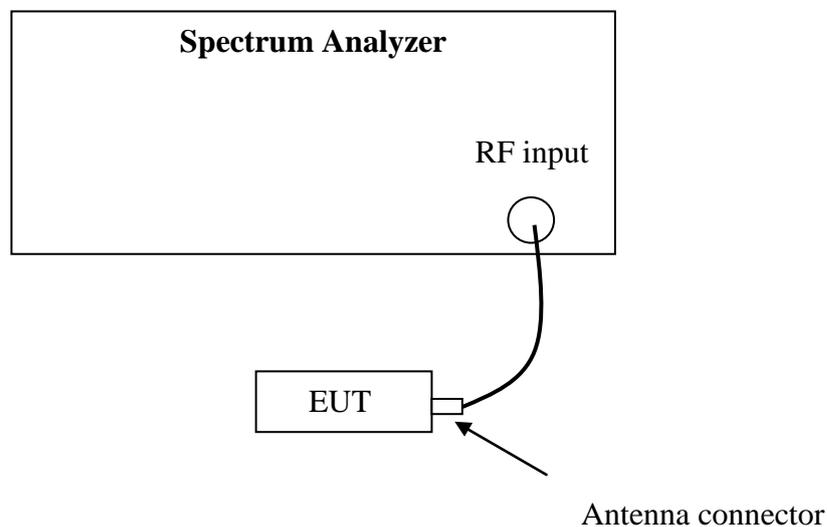


### 4.3 Test procedure and test setup

The 20dB Bandwidth per FCC § 15.215(c) is measured using the Spectrum Analyzer. Set Span = 2 to 3 times the 20 dB bandwidth, RBW = approximately 1% of the 20 dB bandwidth, VBW > RBW, Sweep = auto, Detector = peak, Trace = max hold. The test was performed at 3 channels (lowest, middle and highest channel).

#### 4.4 Test protocol

Temperature : 22 °C  
Relative Humidity : 53 %

Mode	Channel	20dB Bandwidth (kHz)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)
-	1	764.0	2435.774	2436.538

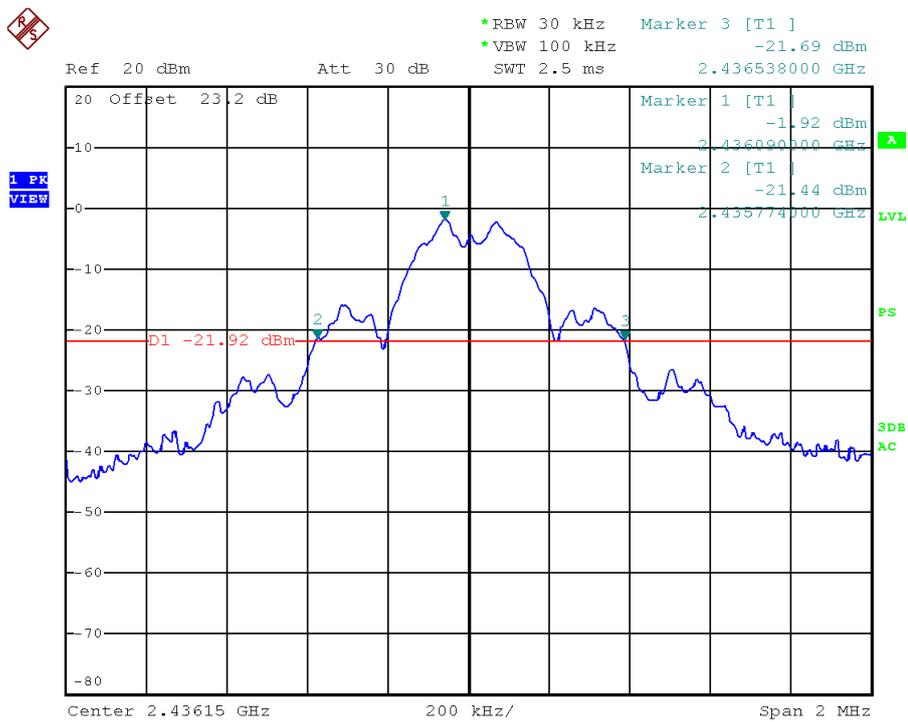

Date: 15.OCT.2015 15:41:51

## 5 Power line conducted emission


Test result: NA

### 5.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 5.2 Test configuration

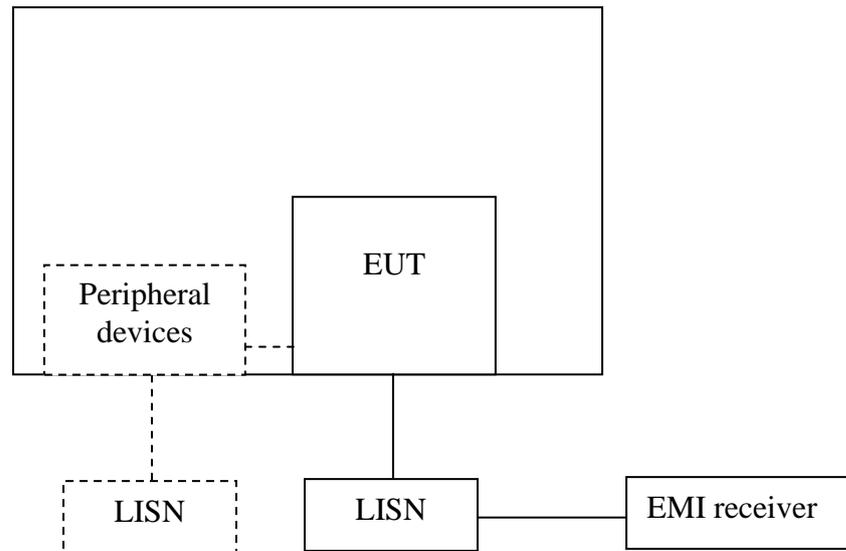

- For table top equipment, wooden support is 0.8m height table
- For floor standing equipment, wooden support is 0.1m height rack.

### 5.3 Test procedure and test set up

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50  $\Omega$  LISN port (to which the EUT is connected), where permitted, terminated into a 50  $\Omega$  measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50  $\Omega$  measuring port is terminated by a measuring instrument having 50  $\Omega$  input impedance. All other ports are terminated in 50  $\Omega$  loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

### 5.4 Test protocol

Temperature : °C  
Relative Humidity : %

L line

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)

N line

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)


## 6 Occupied Bandwidth

**Test Status: Tested**

### 6.1 Test limit

None

### 6.2 Test Configuration

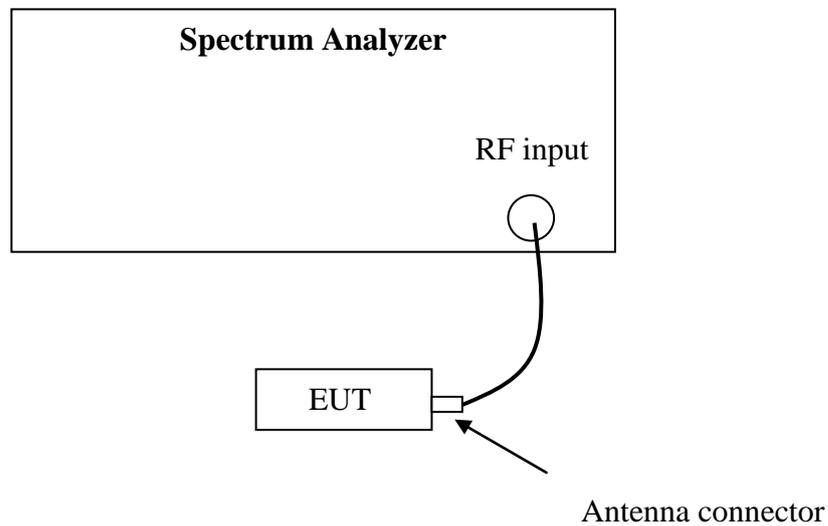


### 6.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer.

### 6.4 Test protocol

Temperature : 22 °C  
Relative Humidity : 53 %

Mode	Channel	99% Bandwidth (MHz)
-	1	0.716

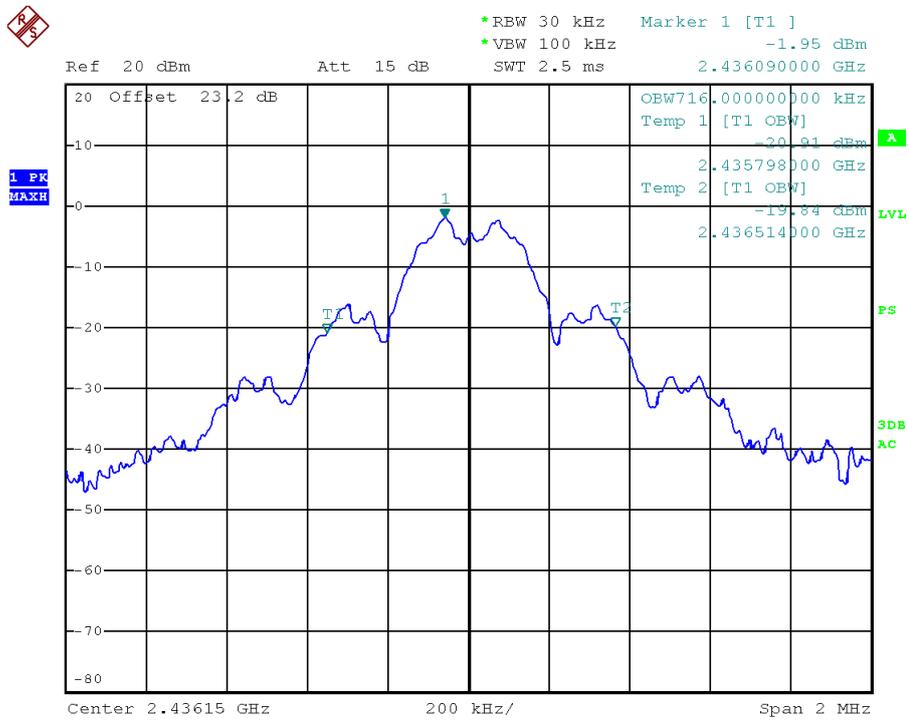

Date: 15.OCT.2015 15:43:15