

GPRS 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:8.29851; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 57.748$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/GPRS 850 Band_2Slot/CH 251/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.982 W/kg

Edge 1/GPRS 850 Band_2Slot/CH 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.66 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.495 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.41 W/kg

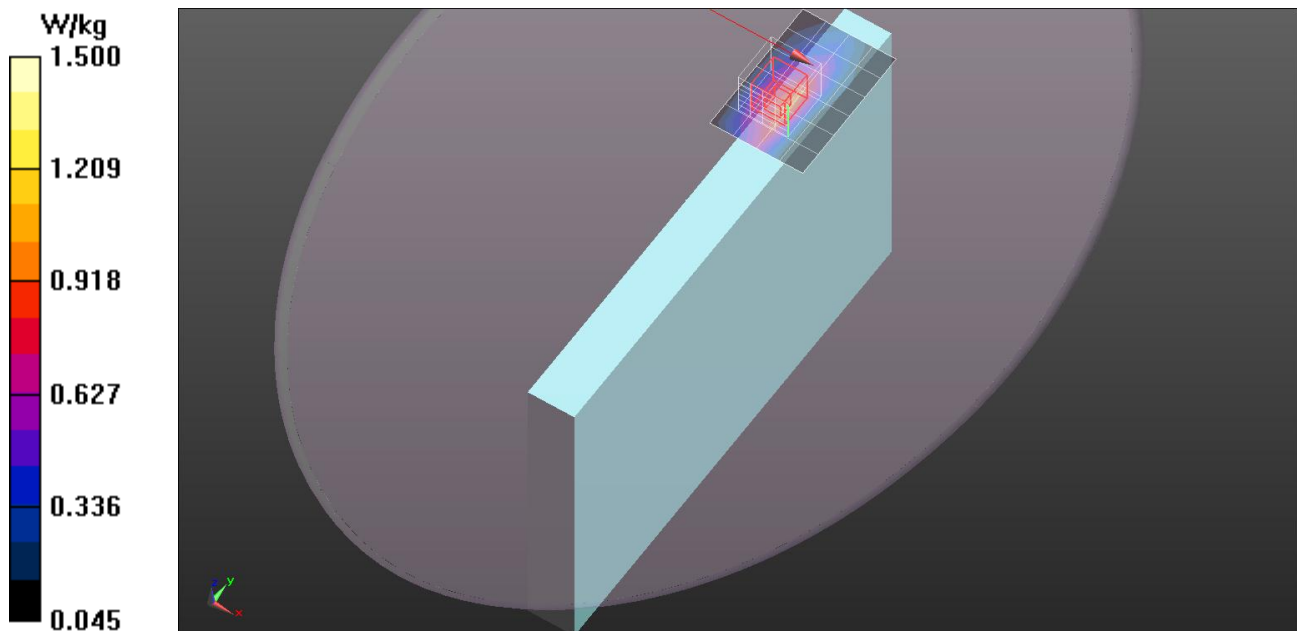

GPRS 850 Band

Frequency: 824.2 MHz; Duty Cycle: 1:8.29851; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 57.965$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/GPRS 850 Band_2Slot/CH 128/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.920 W/kg

Edge 1/GPRS 850 Band_2Slot/CH 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.48 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.482 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.30 W/kg

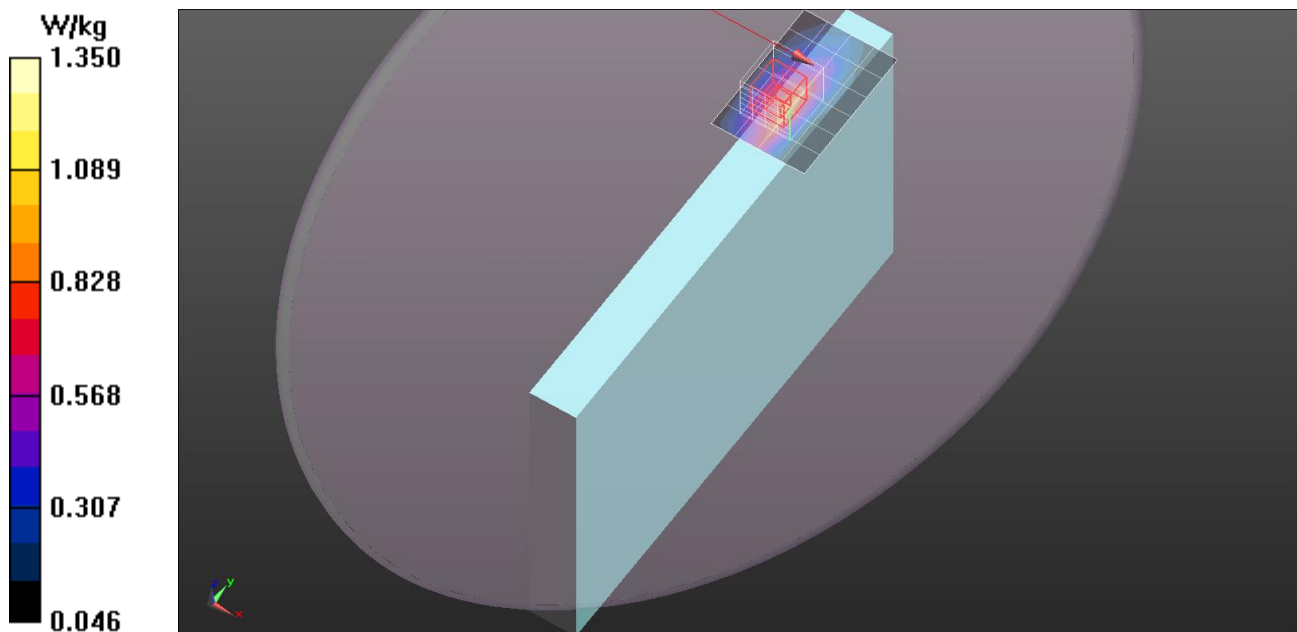

GPRS 850 Band

Frequency: 836.6 MHz; Duty Cycle: 1:8.29851; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 57.856$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/GPRS 850 Band_2Slot/CH 190/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.917 W/kg

Edge 1/GPRS 850 Band_2Slot/CH 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.30 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.888 W/kg; SAR(10 g) = 0.499 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.40 W/kg

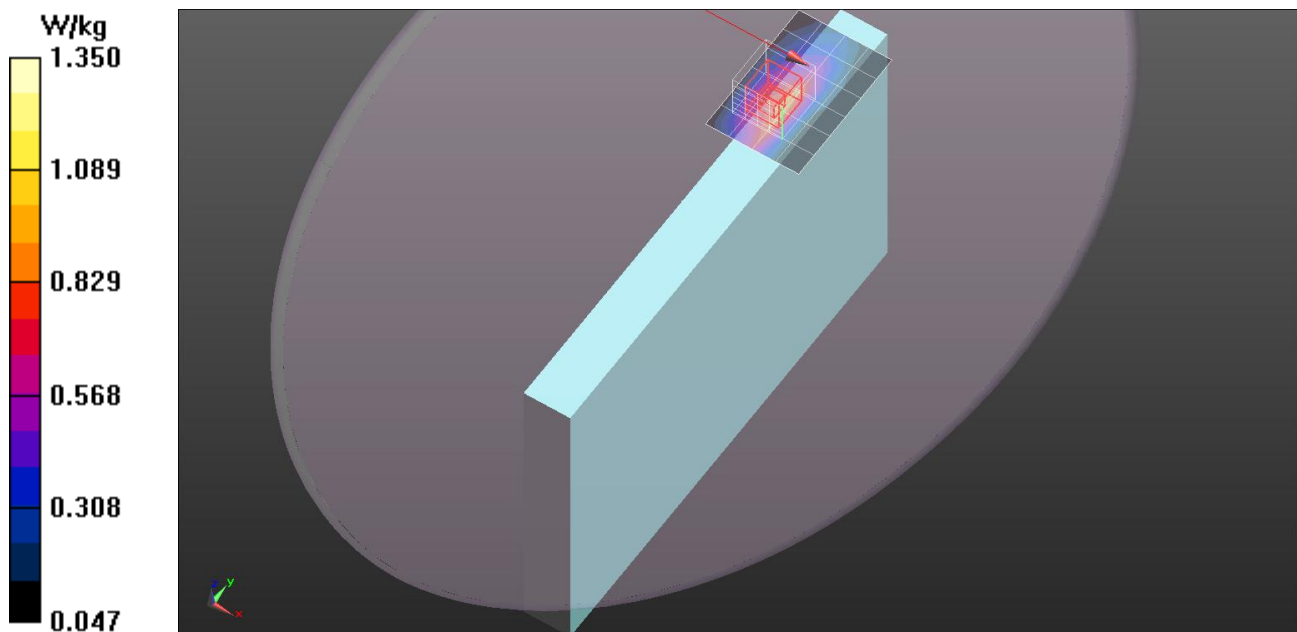

GPRS 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:8.29851; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
 Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 57.748$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/GPRS 850 Band_2Slot/CH 251/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.734 W/kg

Rear/GPRS 850 Band_2Slot/CH 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.521 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.856 W/kg

SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.298 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.728 W/kg

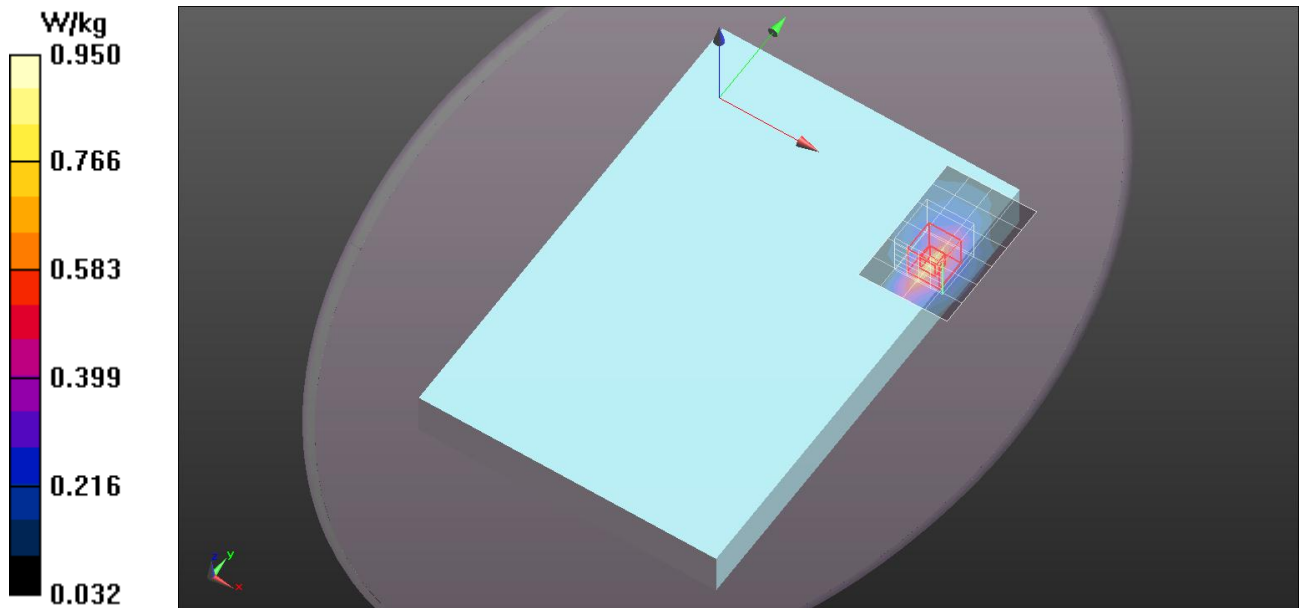

GPRS 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4.10204; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
 Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 57.748$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 1/GPRS 850 Band_2Slot/CH 251/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.884 W/kg

Edge/Edge 1/GPRS 850 Band_2Slot/CH 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.67 V/m; Power Drift = -0.25 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.471 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.25 W/kg

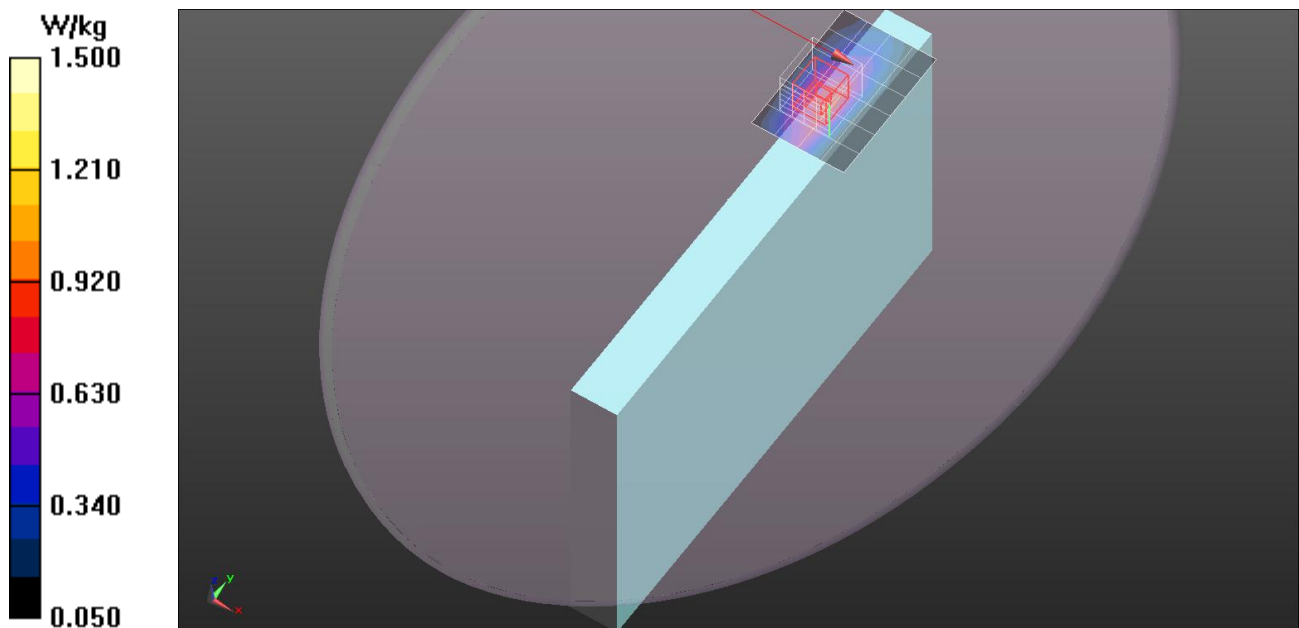

GPRS 850 Band

Frequency: 824.2 MHz; Duty Cycle: 1:4.10204; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 57.219$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/GPRS 850 Band_2Slot/CH 128/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.08 W/kg

Edge 1/GPRS 850 Band_2Slot/CH 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.09 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.563 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.07 W/kg

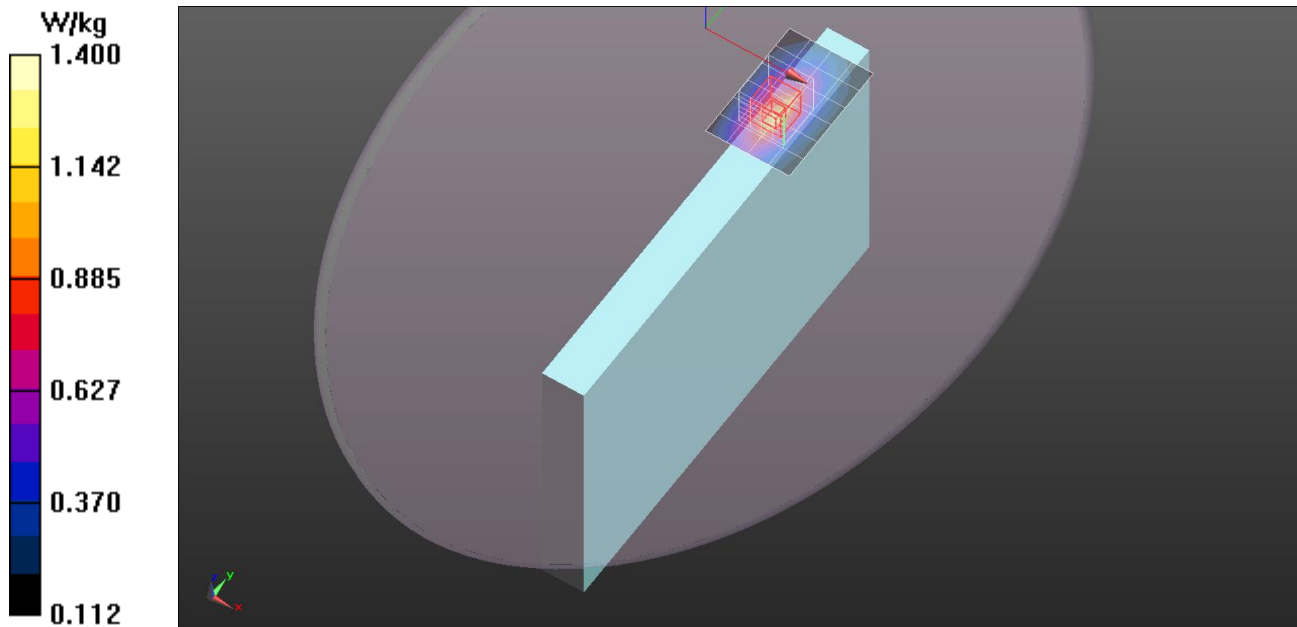

GPRS 850 Band

Frequency: 836.6 MHz; Duty Cycle: 1:4.10204; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 57.101$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/GPRS 850 Band_2Slot/CH 190/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.13 W/kg

Edge 1/GPRS 850 Band_2Slot/CH 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.62 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.601 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.14 W/kg

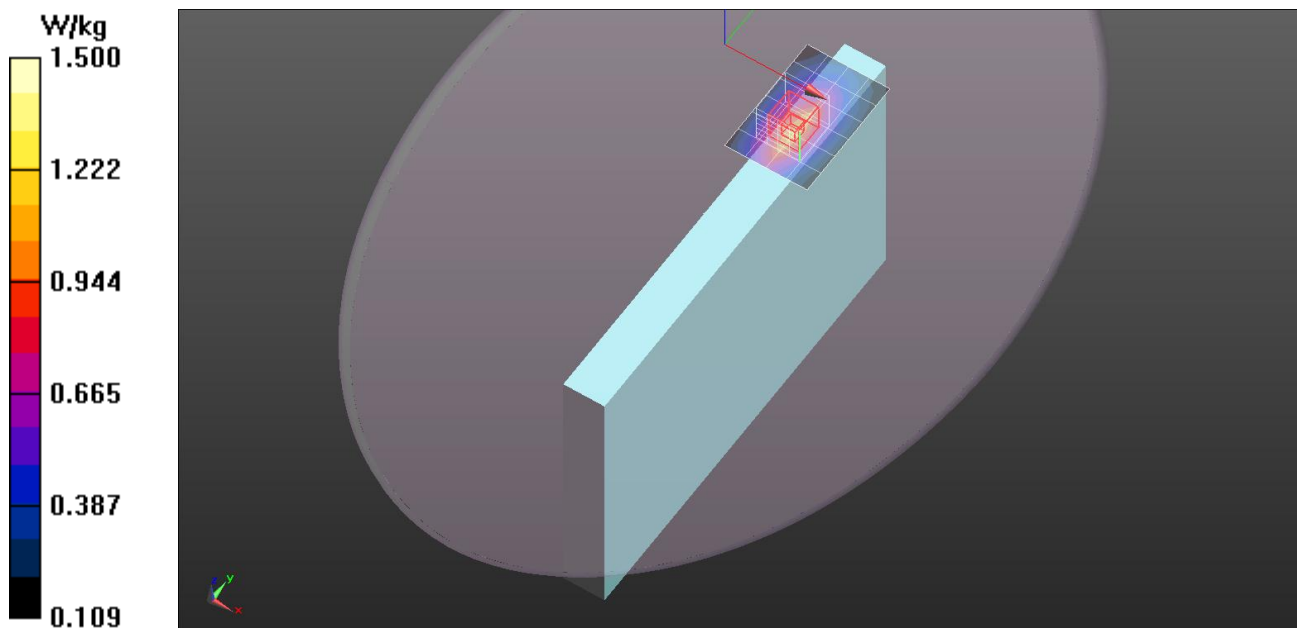

GPRS 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4.10204; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 57.001$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/GPRS 850 Band_2Slot/CH 251/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 W/kg

Edge 1/GPRS 850 Band_2Slot/CH 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.20 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.604 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 W/kg

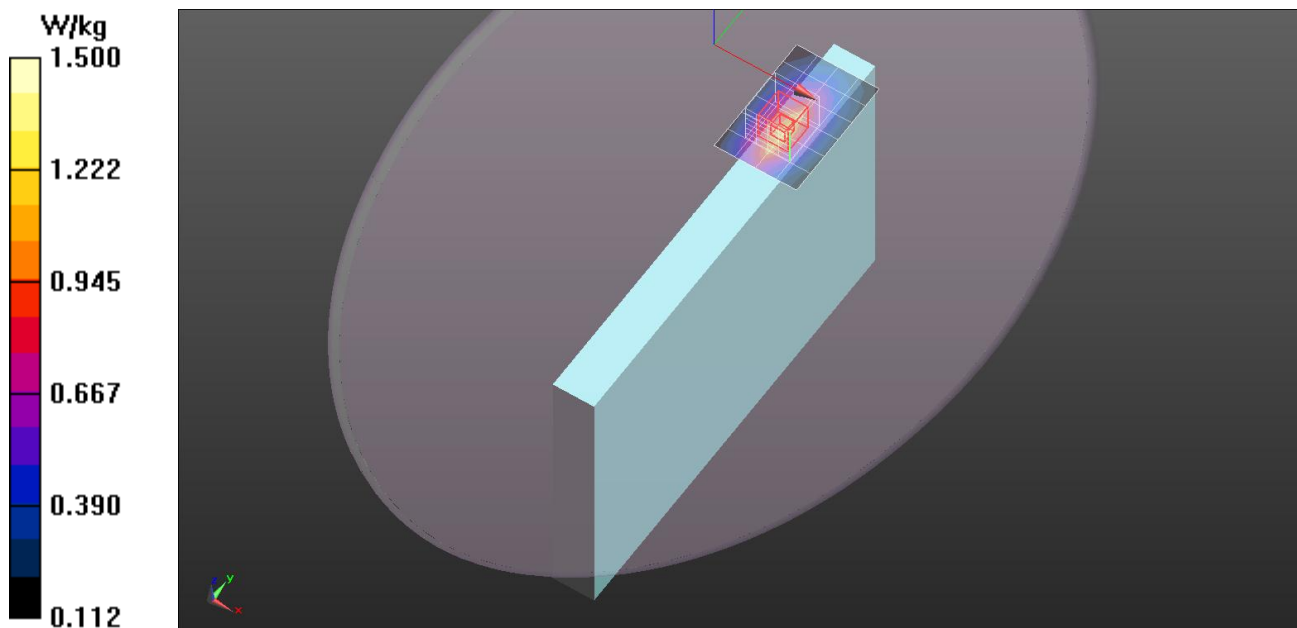

GPRS 850 Band

Frequency: 824.2 MHz; Duty Cycle: 1:4.10204; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 57.219$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/GPRS 850 Band_2Slot/CH 128/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.535 W/kg

Rear/GPRS 850 Band_2Slot/CH 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.156 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.294 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.548 W/kg

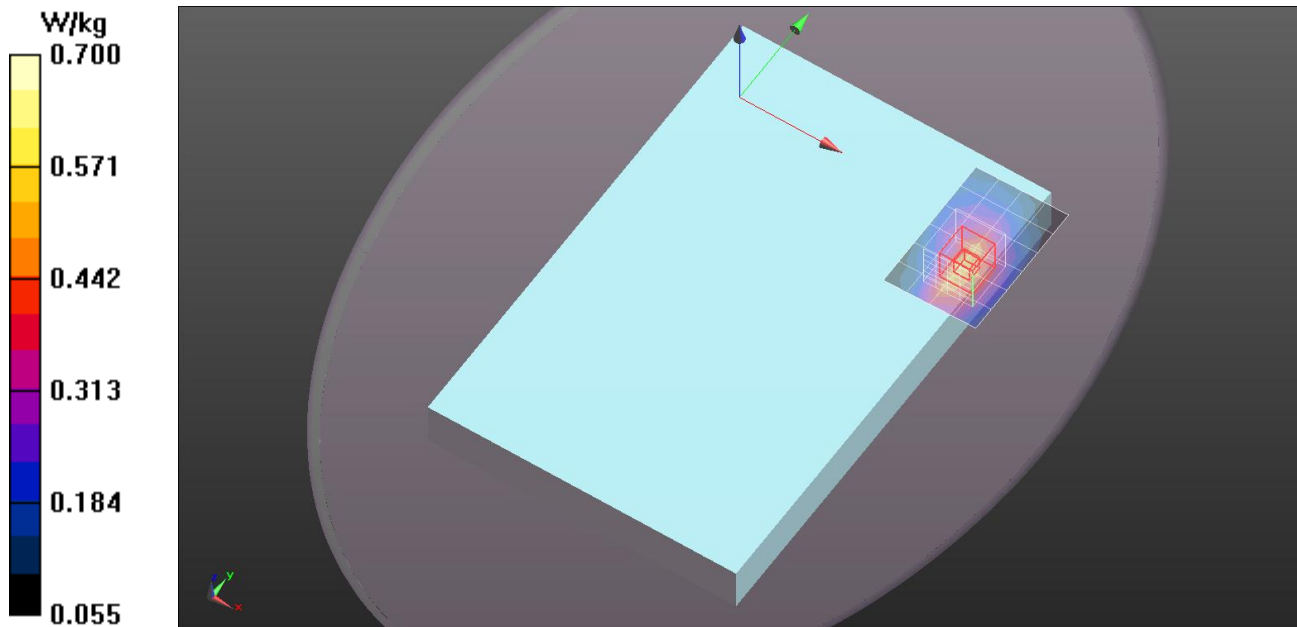

GPRS 850 Band

Frequency: 824.2 MHz; Duty Cycle: 1:4.10204; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 57.219$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 2/GPRS 850 Band_2Slot/CH 128/Area Scan (5x6x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.193 W/kg

Edge 2/GPRS 850 Band_2Slot/CH 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.071 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.208 W/kg

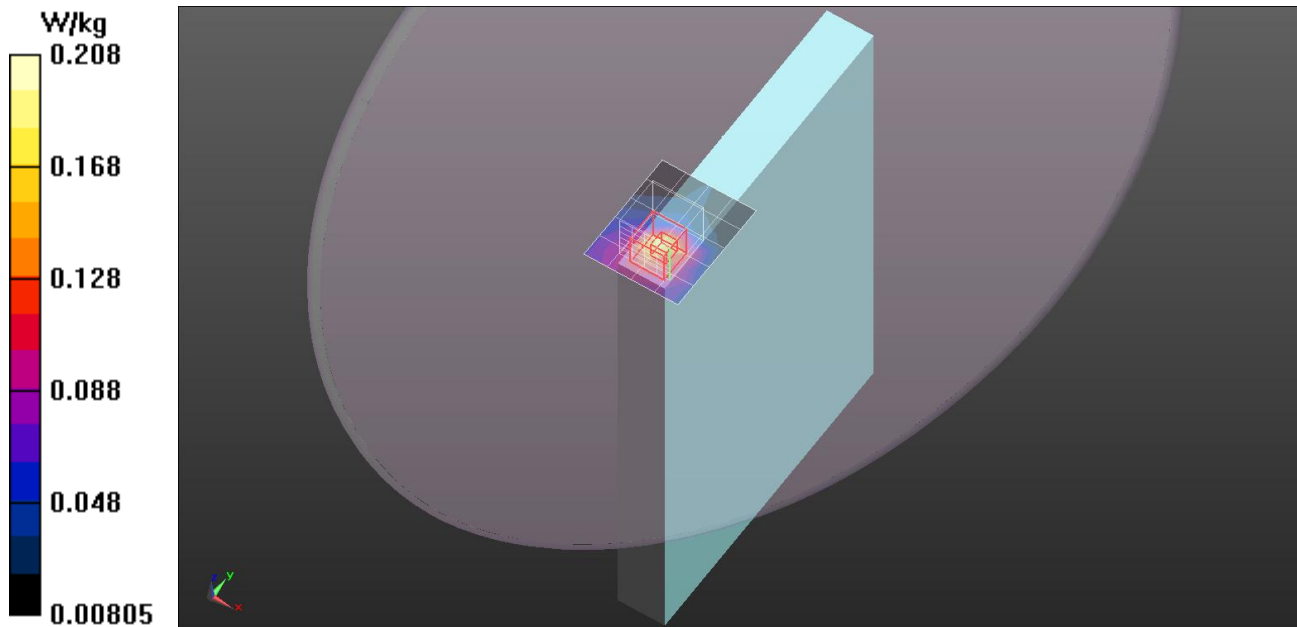

GPRS 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4.10204; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 57.001$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/GPRS 850 Band_2Slot/CH 251_Repeat/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.11 W/kg

Edge 1/GPRS 850 Band_2Slot/CH 251_Repeat/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.09 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.978 W/kg; SAR(10 g) = 0.661 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.27 W/kg

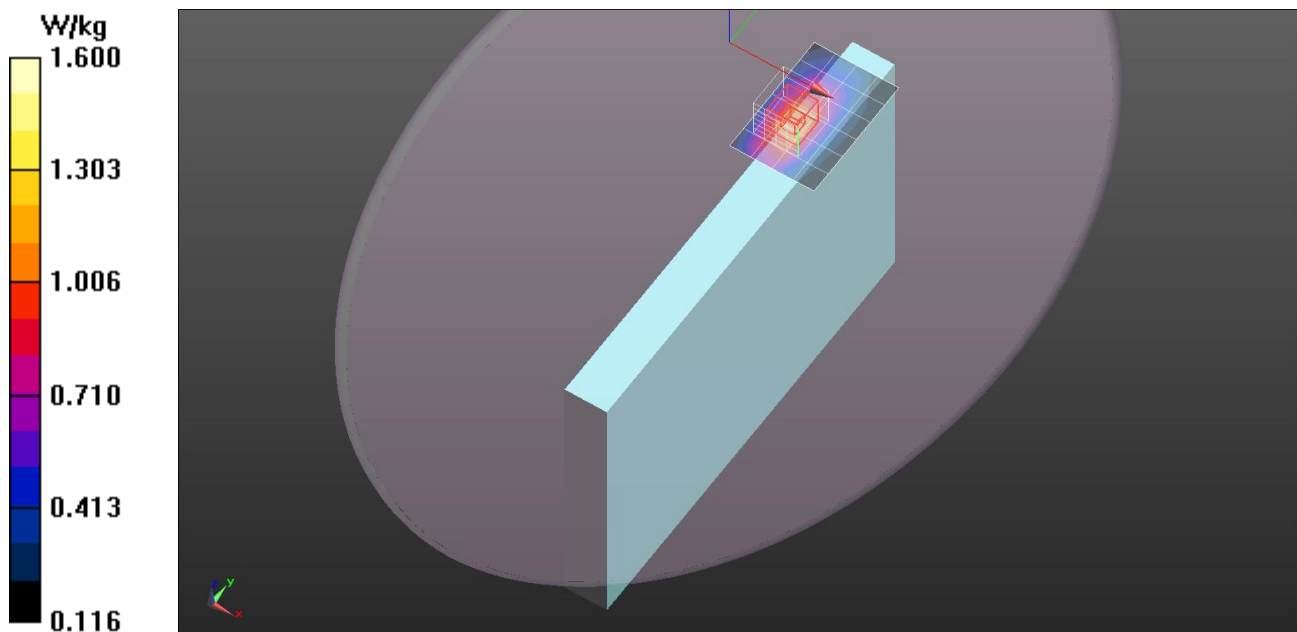

GPRS 850 Band

Frequency: 848.8 MHz; Duty Cycle: 1:4.10204

Edge/Edge 1/GPRS 850 Band_2Slot/CH 251/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.145 W/kg

