



EMC

TEST REPORT

REC 02/1998

REPORT NO. : F87111804

MODEL NO. : LM 85

DATE OF TEST : Nov. 18, 1998

PREPARED FOR : NAN TAN COMPUTER CO.

ADDRESS : 2F, NO. 35, WU-GON 6TH ROAD, WU-KU IND. PARK.
TAIPEI HSIEN, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

11F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 17 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION)	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION.....	7
4. TEST RESULTS (EMISSION)	8
4.1 RADIO DISTURBANCE.....	8
4.2 EUT OPERATION CONDITION	8
4.3 TEST DATA OF CONDUCTED EMISSION (A).....	9
4.4 TEST DATA OF CONDUCTED EMISSION (B).....	10
4.5 TEST DATA OF RADIATED EMISSION (A).....	11
4.6 TEST DATA OF RADIATED EMISSION (B)	13
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN	15
6. ATTACHMENT I -TECHNICAL DESCRIPTION OF EUT	17



1. CERTIFICATION

Issue Date: Nov. 30, 1998

Product : LCD MONITOR
Trade Name : CLEVO
Model No. : LM 85
Applicant : NAN TAN COMPUTER CO.
Standard : FCC Part 15, Subpart B, Class B
ANSI C63.4-1992
CISPR 22:1993+A1:1995+A2:1997

We hereby certify that one sample of the designation has been tested in our facility on Nov.18, 1998. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards.

TESTED BY: San Lin, DATE: 11/30/98
(San Lin)

CHECKED BY: Ariel Hsieh, DATE: 11/30/98
(Ariel Hsieh)

APPROVED BY: Mike Su, DATE: 11/30/98
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION

NVLAP
Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product	:	LCD MONITOR
Model No.	:	LM 85
Power Supply Type	:	Switching
Power Cord	:	Nonshielded
Data Cable	:	Shielded (1.5m)

Note: The EUT is a 15" LCD monitor using Fujitsu LCD Panel with resolution up to 1024 x 768 (69 kHz).

The EUT was tested using the following modes:

Mode 1: Delta Power Adapter (AC power cord: 1.95m, DC power cord: 1.5m)

Model	:	ADP-40GB
Input	:	100~240Vac 1.5A 50-60Hz
Output	:	12.5 Vdc 3.2A

Mode 2: Acbel Power Adapter (AC power cord: 1.95m, DC power cord: 1.8m)

Model	:	API-8558
Input	:	100~240 Vac 1.5A 50-60Hz
Output	:	12 Vdc 3.6A

There is a ferrite core on the power cord of both the above adapters.

Both modes were tested separately and their data are recorded in this report.

There are two ferrite cores on the video cable outside the LCD monitor.

For more detailed features description, please refer to ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT and User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No	Product	Brand	Model No.	Serial No	I/O Cable
1	PERSONAL COMPUTER	HP	D4579A	SG73001726	Nonshielded Power (1.8 m)
2	USB KEYBOARD	BTC	7932	D7A140012	Nonshielded Signal (1.8 m)
3	KEYBOARD	FORWARD	FDA-104GA	FDKB8110160	Shielded Signal (1.4m)
4	PRINTER	HP	2225C+	3030S79138	Shielded Signal (2.1 m) Nonshielded Power (1.8 m)
5	USB MOUSE	LOGITECH	N/A	LTC73700536	Shielded Signal (1.8 m)
6	MOUSE	DEXIN	A2P800A	80110021	Shielded Signal (1.8m)
7	MODEM	ACEEX	1414	980020569	Shielded Signal (1.5 m) Nonshielded Power (1.8 m)
8	VGA CARD	GORDIA	DSV3365	E600782851	N/A
9	SOUND CARD	Ya Hsin	Audio 1869	7C05000505	N/A

Note:

1. An audio cable (1.8m) was connected between the EUT and PC.
2. Two USB cables (1.8m) were connected to the two USB ports of EUT to form two open loop cables.
3. A USB cable (1.8m) was connected from the EUT to PC.
4. Support unit 2 & 5 were connected to the USB ports of EUT.

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 1992. Radiated testing was performed at an antenna to EUT distance of 10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8594A	3144A00308	Sept. 3, 1999
HP Preamplifier	8447D	2944A08119	Jan. 20, 1999
ROHDE & SCHWARZ TEST RECEIVER	ESVP	893496/030	July 15, 1999
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 28, 1998
CHASE Bilog Antenna	CBL6112A	2329	Sept. 19, 1999
EMCO Turn Table	1060	1195	N/A
EMCO Tower	1051	1163	N/A
Open Field Test Site	Site 2	ADT-R02	Sept. 18, 1999

Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMA's document NIS81.
 2. The calibration interval of the above test instruments is 12 months.
 And the calibrations are traceable to NML/ROC and NIST/USA.

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESH3	893495/006	July 15, 1999
ROHDE & SCHWARZ Spectrum Monitor	EZM	893787/013	July 16, 1999
ROHDE & SCHWARZ Artificial Mains Network	ESH3-Z5	839135/006	July 14, 1999
EMCO-L.I.S.N.	3825/2	9204-1964	July 14, 1999
Shielded Room	Site 2	ADT-C02	N/A

Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMA's document NIS81.
 2. The calibration interval of the above test instruments is 12 months.
 And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
Above 1000	300	49.5	500	54.0

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range : 0.15 - 30 MHz (Conducted Emission)
 : 30 - 1000 MHz (Radiated Emission)
 Input Voltage : 120 Vac, 60 Hz
 Temperature : 24 °C
 Humidity : 78 %
 Atmospheric Pressure : 1003 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: - 19.2 dB at 0.150 MHz
	Minimum passing margin of radiated emission: -2.6 dB at 227.82 MHz

Note: The EUT was pretested under the following resolution & horizontal synchronization speed mode:

- * 1024x768 mode (69 kHz),
- * 800x600 mode (54 kHz),
- * 640x480 mode (31.5 kHz)

The worst emission levels were found under 1024x768 (69 kHz) and therefore the test data of only this mode is recorded

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. PC runs a test program to enable all functions.
3. PC reads and writes messages from FDD and HDD.
4. PC sends "H" messages to LCD Monitor (EUT) and then LCD Monitor displays "H" patterns on screen.
5. PC sends "H" messages to modem.
6. PC sends "H" messages to printer, and then printer prints them on paper.
7. PC sends audio messages to internal speaker of EUT.
8. Repeat steps 3-8.



4.3 TEST DATA OF CONDUCTED EMISSION (A)

EUT: LCD MONITORMODEL: LM 856 dB Bandwidth: 10 kHzMODE: DELTA ADAPTER

Freq. [MHz]	L Level		N Level		Limit		Margin [dB (μ V)]			
	[dB (μ V)]		[dB (μ V)]		[dB (μ V)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.150	36.80	-	36.90	-	66.00	56.00	-29.2	-	-29.1	-
0.214	40.20	-	40.70	-	63.00	53.00	-22.8	-	-22.3	-
4.418	31.30	-	32.00	-	56.00	46.00	-24.7	-	-24.0	-
6.189	34.90	-	35.20	-	60.00	50.00	-25.1	-	-24.8	-50.0
7.775	32.50	-	33.70	-	60.00	50.00	-27.5	-	-26.3	-
22.544	29.60	-	29.50	-	60.00	50.00	-30.4	-	-30.5	-


Remarks:

1. "*": Undetectable
2. Q.P. and AV are abbreviations of quasi-peak and average individually.
3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
4. The emission levels of other frequencies were very low against the limit.
5. Margin value = Emission level - Limit value

Report No. F87111804

Page 9-1

Tested by *Sanjai*

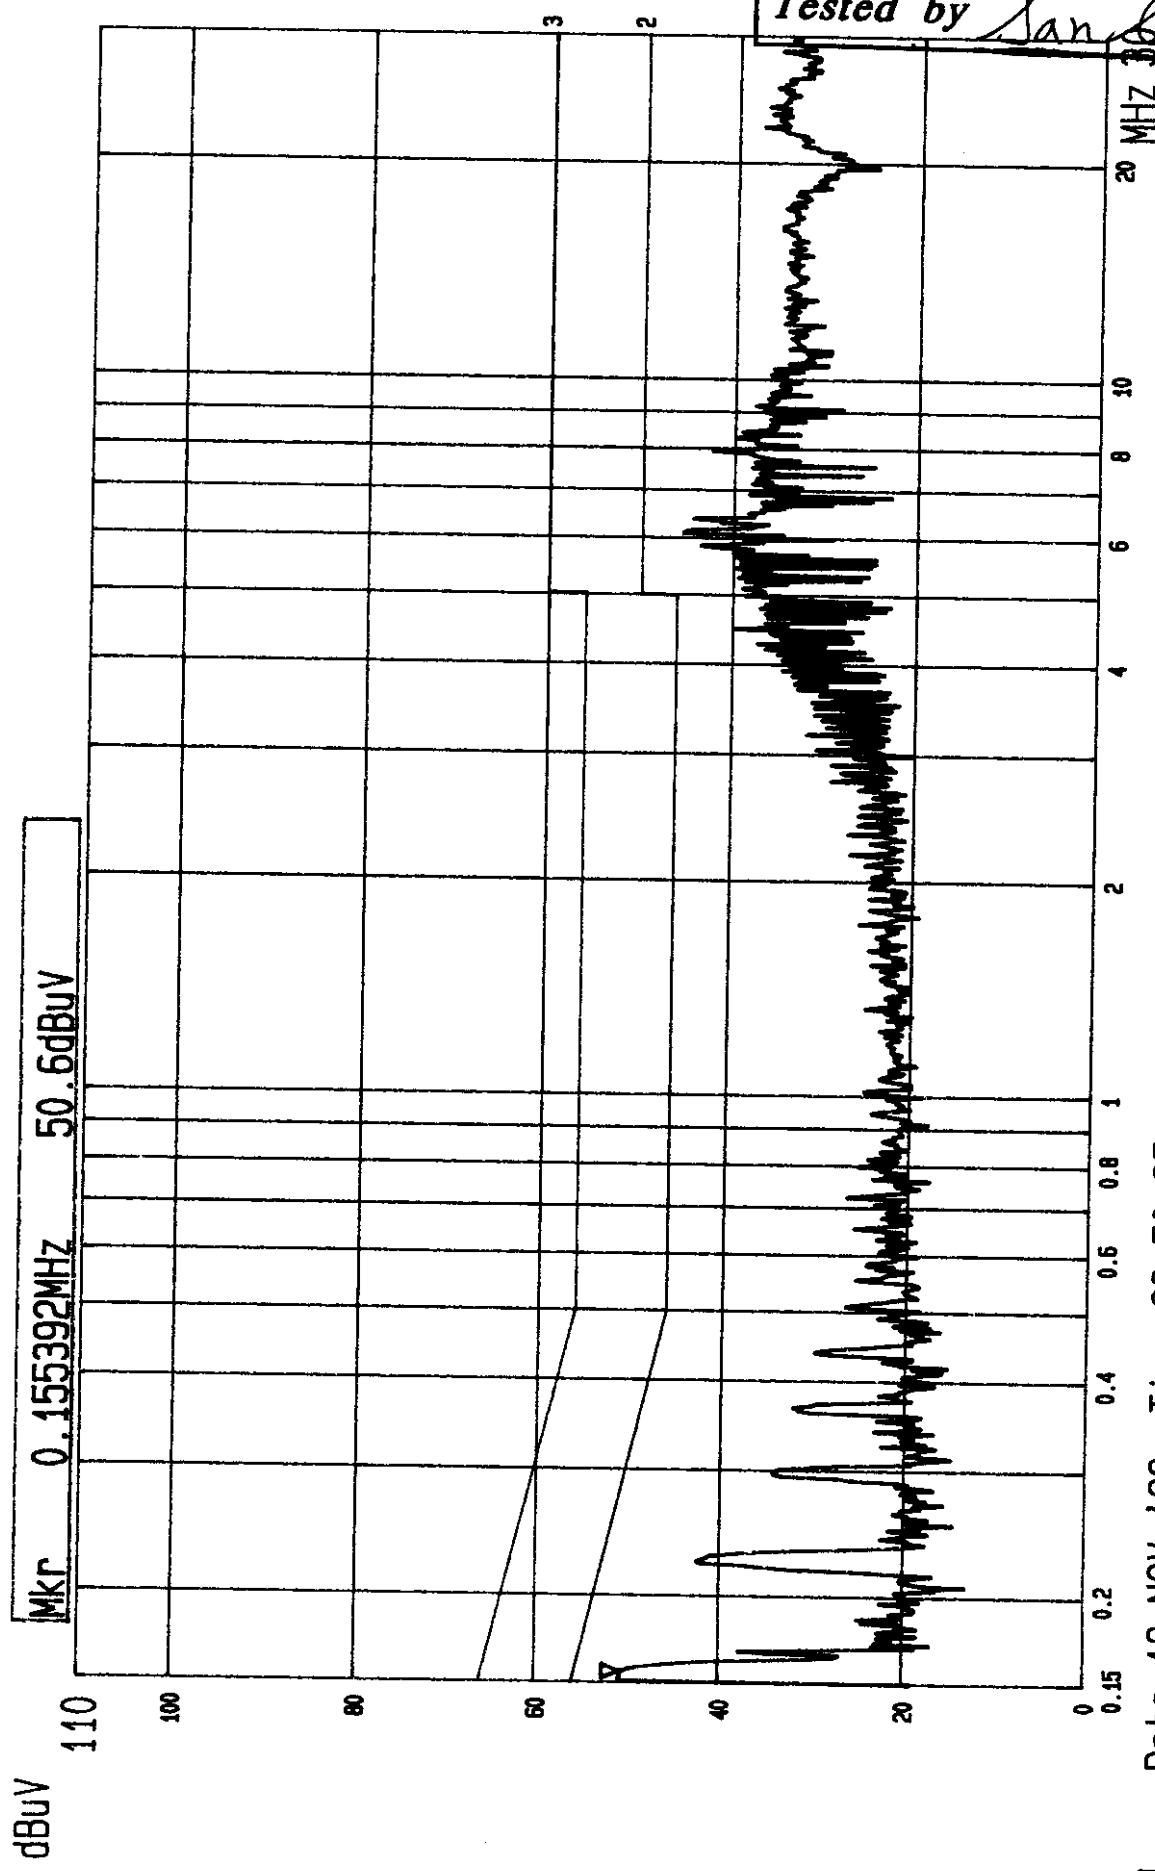


--- Date 18.NOV.'98 Time 23:50:35
CISPR 22 CLASS B CONDUCTION TEST (PEAK VALUE)
MODE: LM 85 ADAPTOR DELTA ADP-40GB FULL SYSTEM 1024X768 85Hz/69k ADT CORP.

LISN: L

Report No. F87111804

Page 9-2

Tested by *San. S. L.*

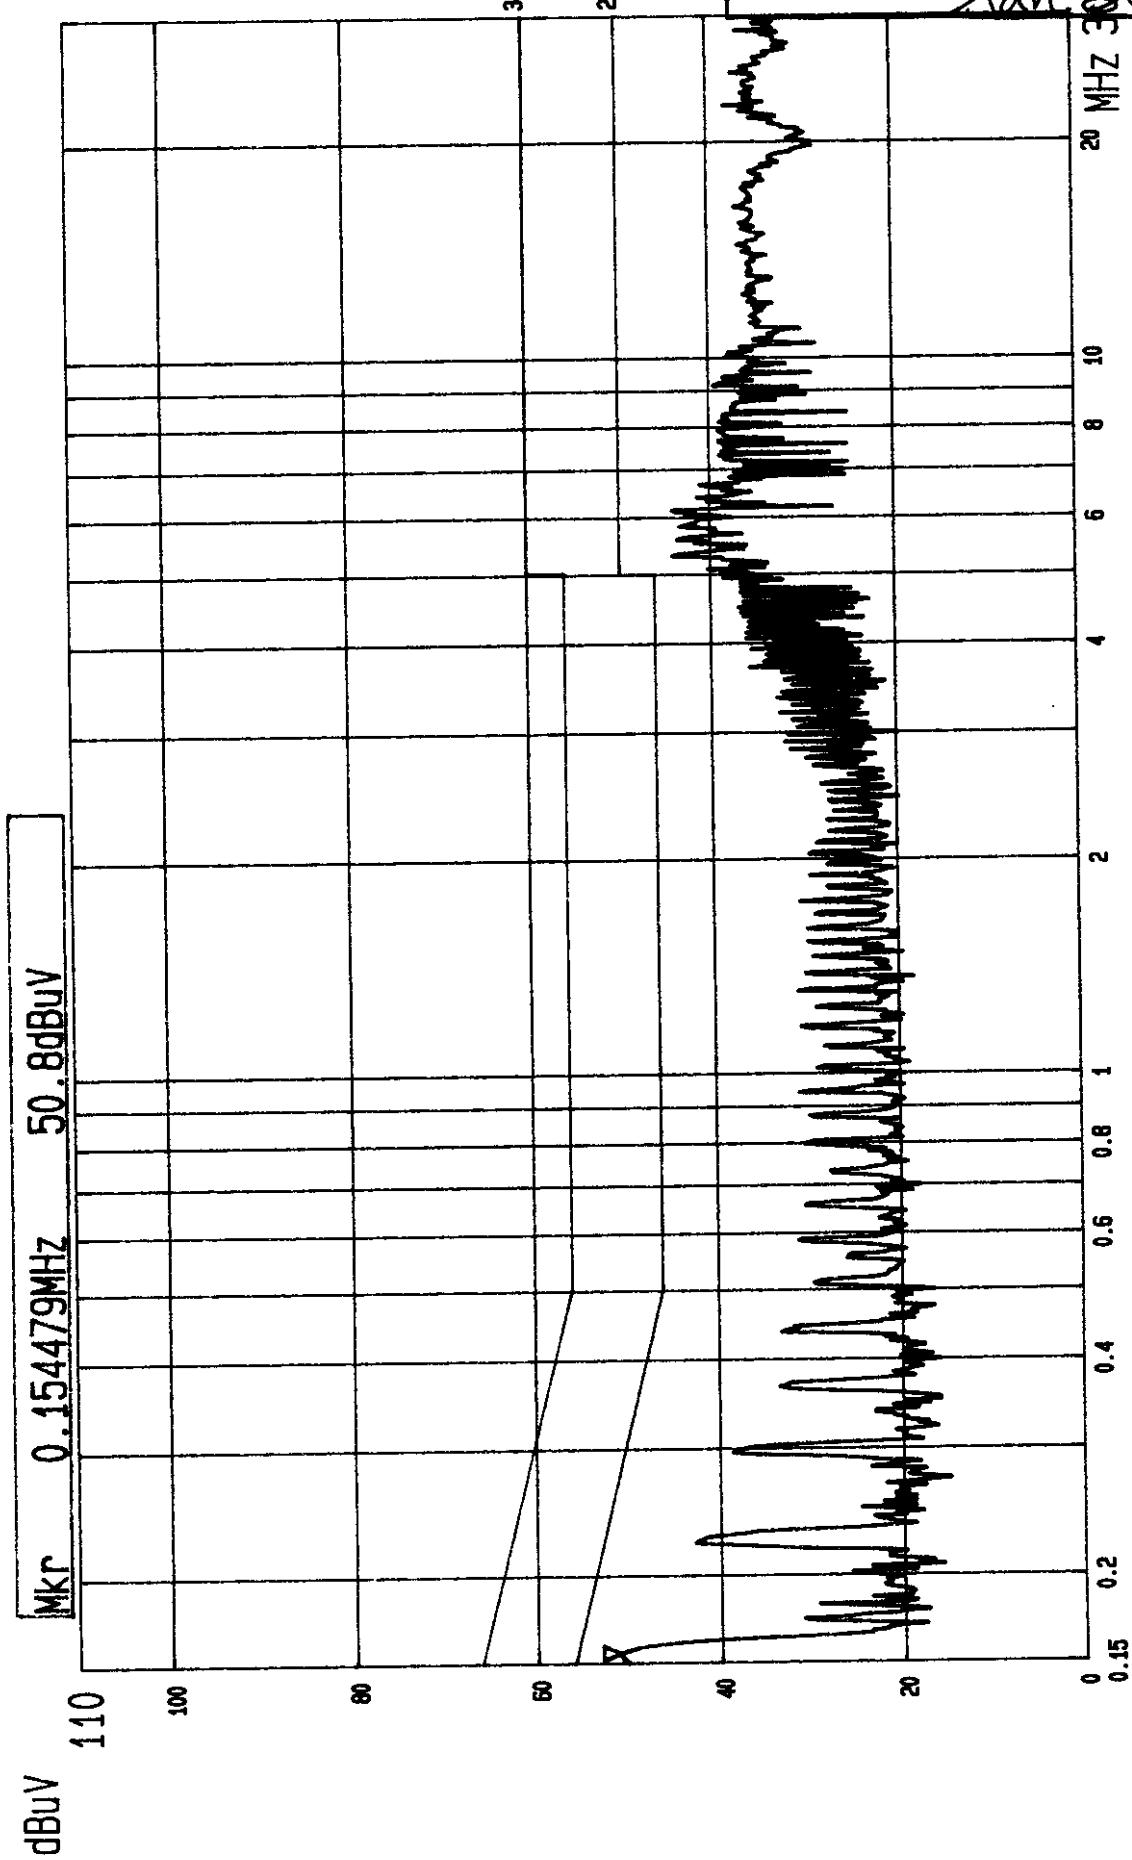

--- Date 18 NOV. '98 Time 23:52:29
CISPR 22 CLASS B CONDUCTION TEST (PEAK VALUE) ADT CORP.
MODE: LM 85 ADAPTOR DELTA ADP-40GB FULL SYSTEM 1024X768 85Hz/69k
LISN: N



4.4 TEST DATA OF CONDUCTED EMISSION (B)

EUT: LCD MONITORMODEL: LM 856 dB Bandwidth: 10 kHzMODE: ACBEL ADAPTER

Freq. [MHz]	L Level		N Level		Limit		Margin [dB (μ V)]			
	[dB (μ V)]		[dB (μ V)]		[dB (μ V)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.150	46.70	-	46.80	-	66.00	56.00	-19.3	-	-19.2	-
0.375	34.10	-	34.70	-	58.30	48.30	-24.2	-	-23.6	-
3.768	27.00	-	26.80	-	56.00	46.00	-29.0	-	-29.2	-
6.103	30.10	-	29.70	-	60.00	50.00	-29.9	-	-30.3	-
10.095	29.30	-	30.70	-	60.00	50.00	-30.7	-	-29.3	-
28.634	31.40	-	32.00	-	60.00	50.00	-28.6	-	-28.0	-


Remarks: 1. "*": Undetectable

2. Q.P. and AV are abbreviations of quasi-peak and average individually.
3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
4. The emission levels of other frequencies were very low against the limit.
5. Margin value = Emission level - Limit value

Report No. F-87111804

Page 10-1

Tested by *Sanjai*

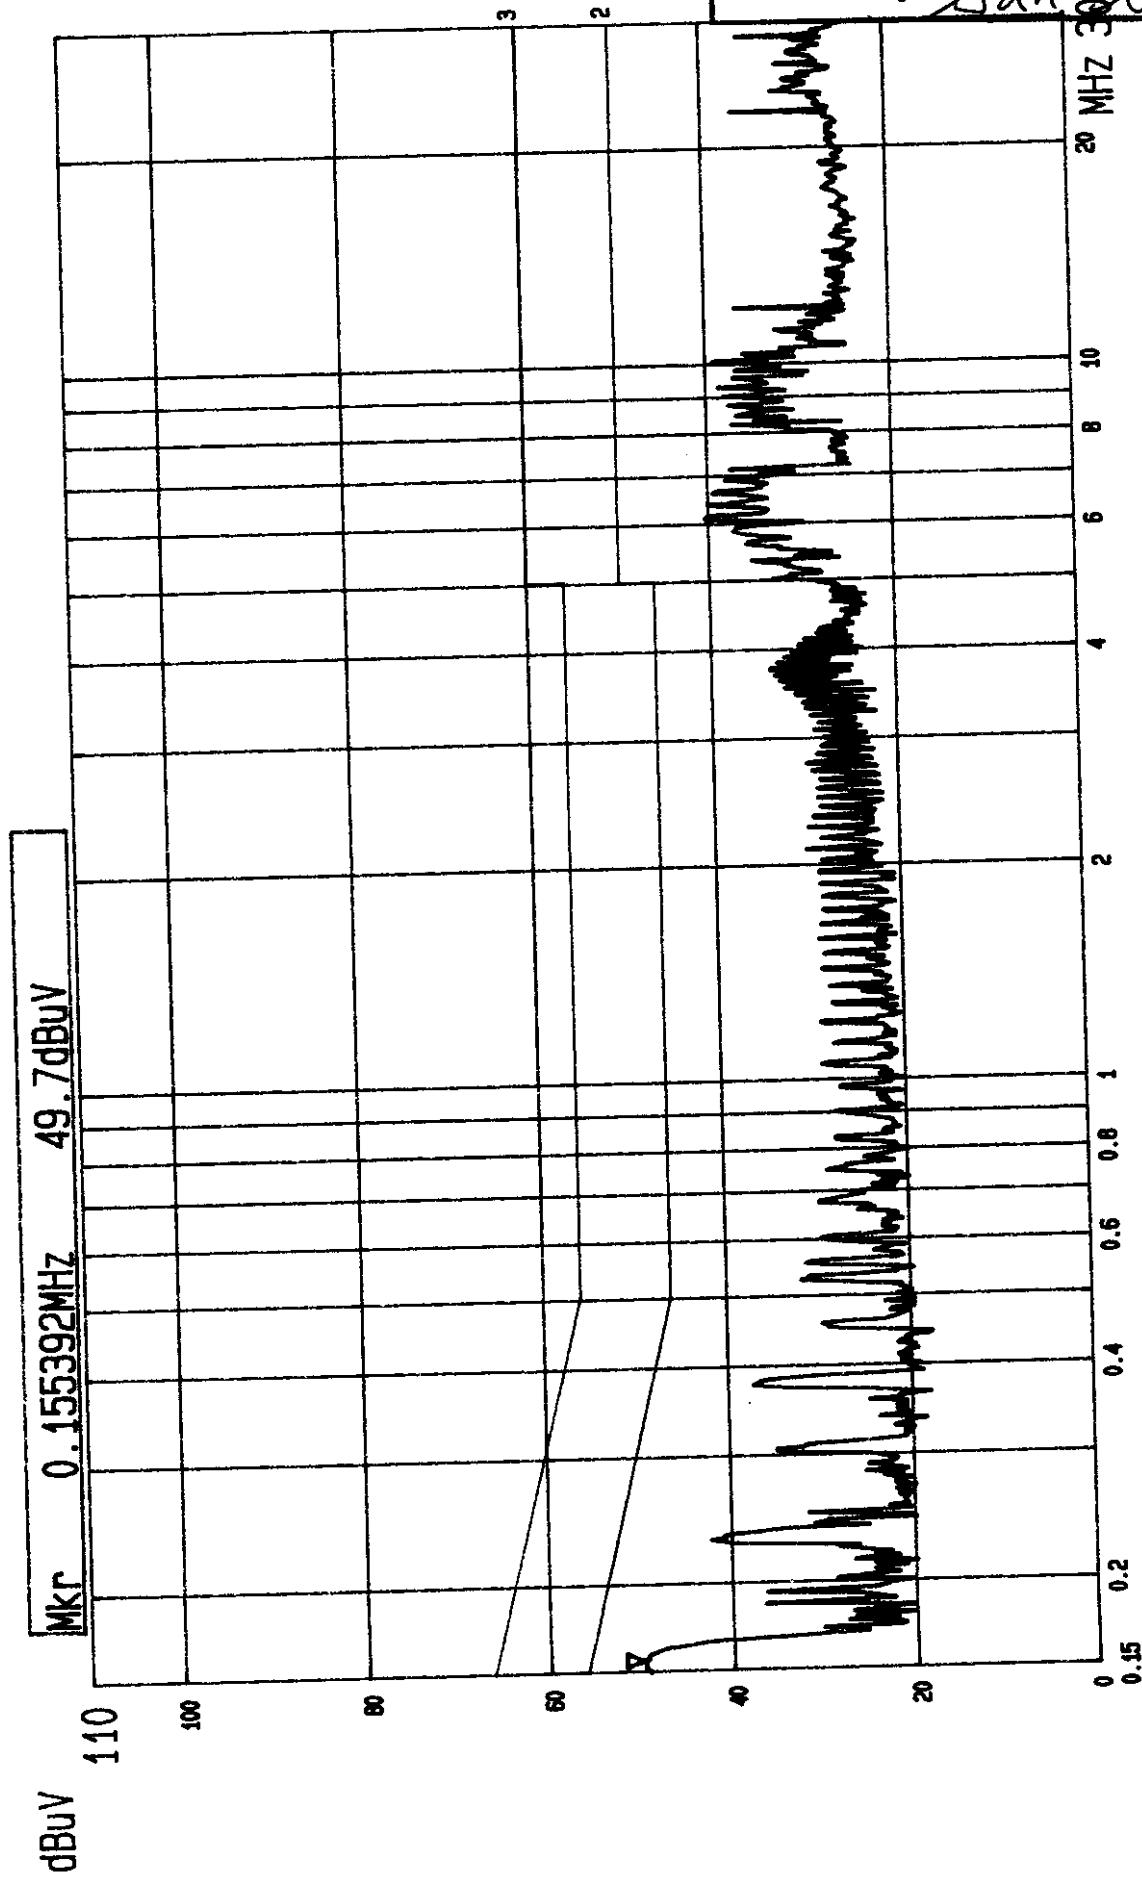


--- Date 19.NOV.'98 Time 01:34:11
CISPR 22 CLASS B CONDUCTION TEST (PEAK VALUE) ADT CORP.
MODE: LM 85 ADAPTOR: ACBEL API-8558 FULL SYSTEM 1024X768 85Hz/69k
LISN: L

Report No. F87111804

Page 10-2

Tested by Dan [Signature]

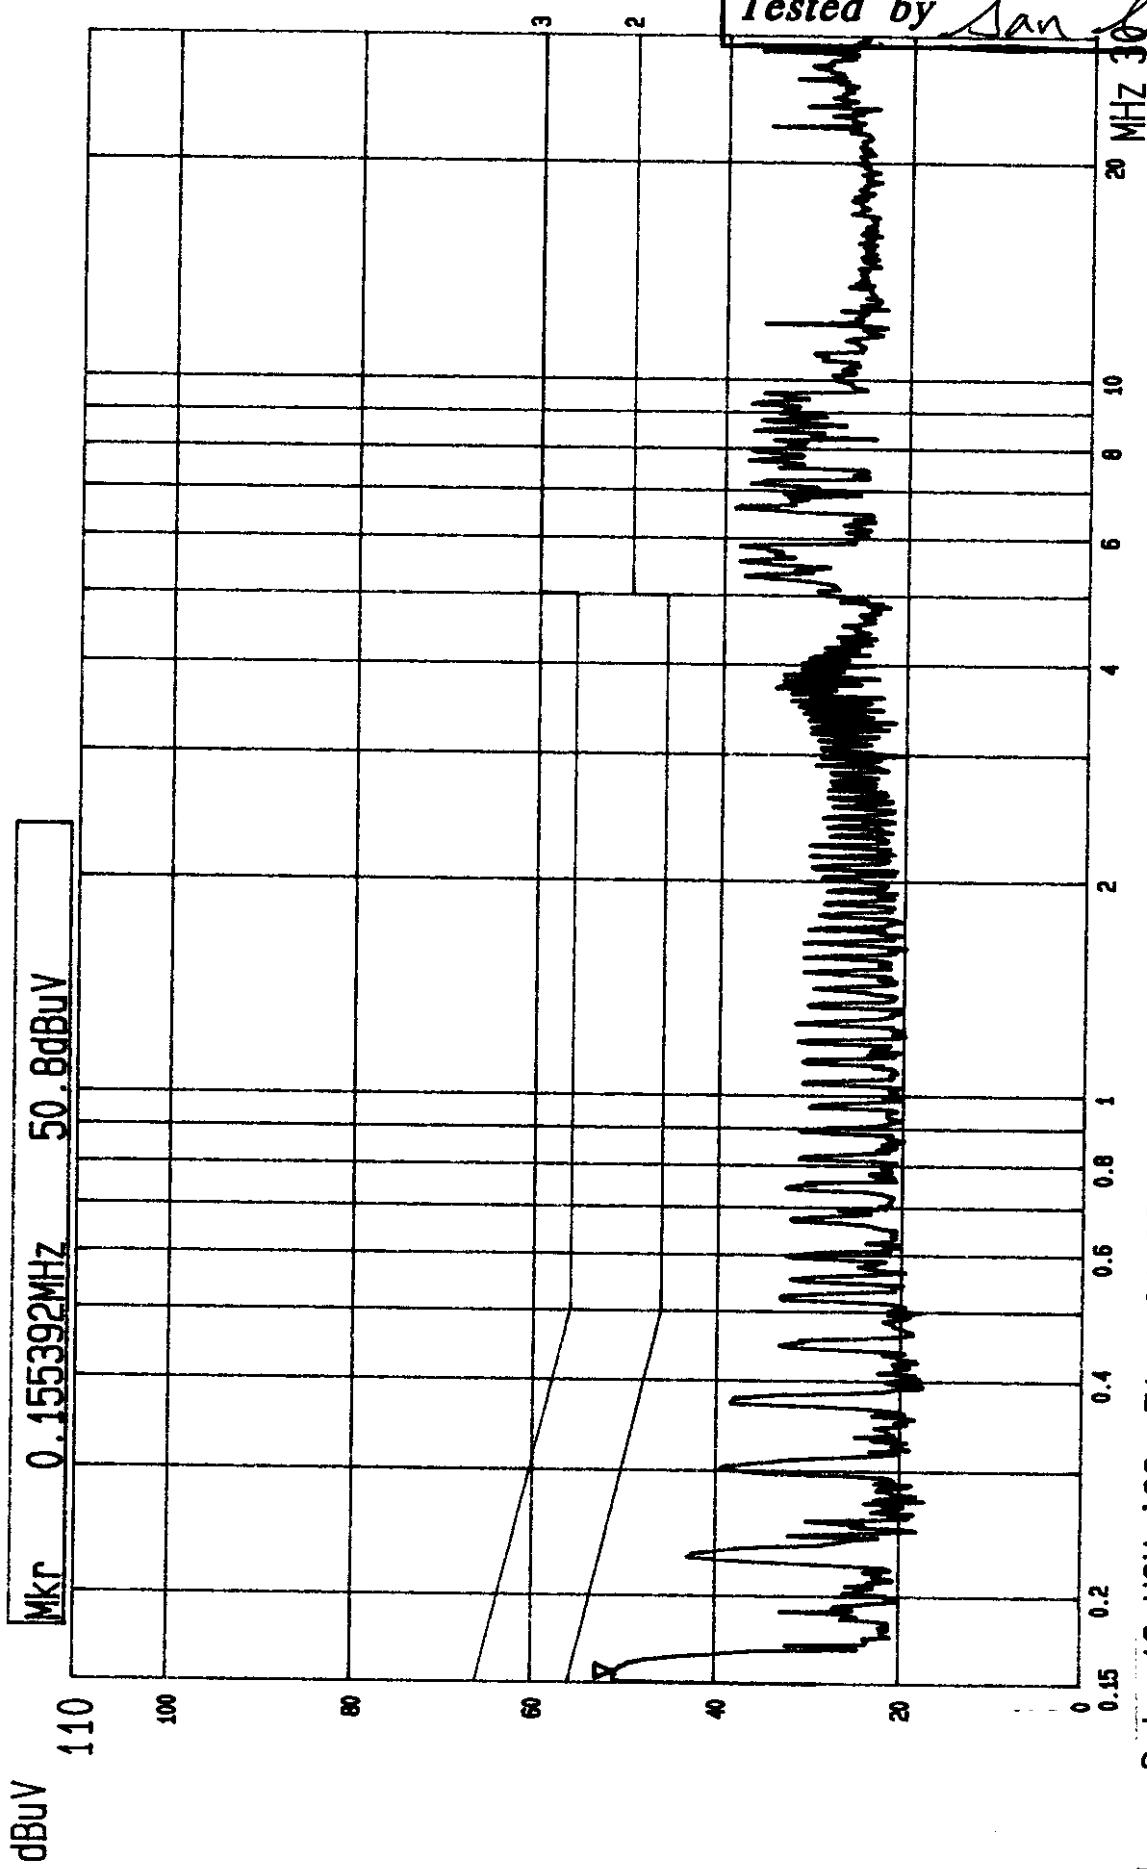

--- Date 19.NOV.'98 Time 01:26:18
CISPA 22 CLASS B CONDUCTION TEST (PEAK VALUE) ADT CORP
MODE: LM 85 ADAPTOR: ACBEL API-8558 FULL SYSTEM 1024X768 85Hz/69k LISN: N



4.5 TEST DATA OF RADIATED EMISSION (A)

EUT: LCD MONITORMODEL: LM 85MODE: DELTA ADAPTERPOLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
48.00	12.1	14.4	26.5	30.0	-3.5
79.99	8.5	13.2	21.7	30.0	-8.3
130.17	14.0	8.9	22.9	30.0	-7.1
144.02	13.2	5.9	19.1	30.0	-10.9
180.28	11.6	7.7	19.3	30.0	-10.7
195.28	11.8	13.4	25.2	30.0	-4.8
205.26	12.2	7.6	19.8	30.0	-10.2
212.83	12.8	5.2	18.0	30.0	-12.0
227.81	13.9	13.1	27.0	30.0	-3.0
324.80	17.1	1.7	18.8	37.0	-18.2

REMARKS:

1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION (A)

EUT: LCD MONITORMODEL: LM 85MODE: DELTA ADAPTERPOLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
47.99	8.1	16.0	24.1	30.0	-5.9
80.83	7.7	10.1	17.8	30.0	-12.2
130.16	14.2	10.1	24.3	30.0	-5.7
144.06	13.6	11.7	25.3	30.0	-4.7
157.75	11.9	11.7	23.6	30.0	-6.4
180.28	11.4	9.4	20.8	30.0	-9.2
195.23	12.3	14.0	26.3	30.0	-3.7
205.27	12.9	12.3	25.2	30.0	-4.8
212.82	13.2	9.6	22.8	30.0	-7.2
227.81	13.9	12.9	26.8	30.0	-3.2
325.91	17.2	0.3	17.5	37.0	-19.5

REMARKS: 1. Emission level (dBuV/m) = Correction Factor (dB/m)
+ Meter Reading (dBuV).
2. Correction Factor (dB/m) = Ant. Factor (dB/m)+Cable loss (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value



4.6 TEST DATA OF RADIATED EMISSION (B)

EUT: LCD MONITORMODEL: LM 85MODE: ACBEL ADAPTERPOLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
48.00	12.1	13.6	25.7	30.0	-4.3
122.46	14.3	4.4	18.7	30.0	-11.3
130.17	14.0	8.0	22.0	30.0	-8.0
144.03	13.2	8.2	21.4	30.0	-8.6
157.72	11.6	8.7	20.3	30.0	-9.7
195.28	11.8	14.1	25.9	30.0	-4.1
205.25	12.2	6.7	18.9	30.0	-11.1
216.06	13.0	6.2	19.2	30.0	-10.8
227.82	13.9	13.5	27.4	30.0	-2.6
325.45	17.2	1.8	19.0	37.0	-18.0
390.47	19.6	0.3	19.9	37.0	-17.1

REMARKS:

1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION (B)

EUT: LCD MONITORMODEL: LM 85POLARITY: VerticalMODE: ACBEL ADAPTERDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
47.98	8.1	17.0	25.1	30.0	-4.9
85.91	8.8	9.5	18.3	30.0	-11.7
122.69	14.4	10.4	24.8	30.0	-5.2
130.18	14.2	12.5	26.7	30.0	-3.3
144.02	13.6	9.4	23.0	30.0	-7.0
157.70	11.9	13.2	25.1	30.0	-4.9
180.27	11.4	10.0	21.4	30.0	-8.6
195.23	12.3	14.6	26.9	30.0	-3.1
205.25	12.9	7.0	19.9	30.0	-10.1
212.80	13.2	3.6	16.8	30.0	-13.2
216.03	13.4	3.3	16.7	30.0	-13.3
227.82	13.9	13.2	27.1	30.0	-2.9

REMARKS:

1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value



6. ATTACHMENT I -TECHNICAL DESCRIPTION OF EUT

SPECIFICATIONS:

* Size	15."
* Resolution (Max)	XGA (1024 x 768)
* Pixel Pitch	0.297mm
* Color	256k
* View Angle (H/V)	160° / 160° , CR>5
* Contrast	300 : 1
* Brightness	200 cd/m ²
* Input Signal	analog RGB
* Power Consumption	33W
* Dimension (W x H x D)	388 x 384 x 165 (mm) 15.28" x 15.12" x 6.14"
* Weight	6.2 kg
* Effective Display Area	304.1mm/11.97"(H) 228.1mm/8.98"(V)
* Scanning Frequency	Horizontal: 15KHz ~ 75KHz Vertical: 55Hz ~ 90Hz
* USB HUB	Output: USB-a (downstream) x 4 Input: USB-b (upstream) x 1
* Tilt Angle	-5° ~ +20°
* Audio	2W amplifier & 2W speaker (x2)



ADT CORP.

TEL:(02)2603-2180-3

FAX:(02)2602-2943

TEST REPORT & CERTIFICATION SERVICES QUESTIONNAIRE

We, ADT Corp., would like to provide you a high quality report and certification in a timely manner. To achieve this goal, we would like you to response to the brief questions listed below in this questionnaire. Therefore your feed back is vital to us in order to determine how good our services are, and what areas could be improved.

Please indicate beside each question what you feel is the rating. Also, feel free to make comments and suggestions directly on this questionnaire, or by attaching separate sheet. The completed form should then be returned by mail or FAX to Harris W. Lai, Director. Your cooperation and effort are truly appreciated.

TEST REPORT NUMBER : _____

	YES	NO
1. Was the information presented clearly	[<input type="checkbox"/>]	[<input type="checkbox"/>]
2. Was the report complete ?	[<input type="checkbox"/>]	[<input type="checkbox"/>]
3. Was the report timely ?	[<input type="checkbox"/>]	[<input type="checkbox"/>]
4. Did the report satisfy your requirement ?	[<input type="checkbox"/>]	[<input type="checkbox"/>]
5. Was the Certification (if any) completed in the scheduled time ?	[<input type="checkbox"/>]	[<input type="checkbox"/>]
Your working field ?	[<input type="checkbox"/>] Engineering	[<input type="checkbox"/>] Manufacturing
	[<input type="checkbox"/>] Marketing	[<input type="checkbox"/>] Other

YOUR CONTACT INFORMATION (OPTIONAL) : _____

OPTIONAL COMMENTS : _____