

FCC RF Test Report

FCC 47 CFR Part 2, 22(H), 24(E)

Product Name : GSM MOBILE PHONE

Model No. : L700

FCC ID : FOCGC661838

Prepared By: : IAC Regulatory Laboratory

Address: : No.789 Pu Xing Road,Shanghai,PRC

Date of Receipt : 2012.03.28

Date of Test : 2012.03.28-2012.04.04

Report No. : 20120328FCC-D



Test Report Certification

Date of Issue : Mar.28.2012

Report No. : 20120328FCC-D

Product Name : GSM MOBILE PHONE

Model No. : L700

Trade Name : JZH-Mobile

Applicant : JZH-Mobile Communication technology Co., LTD

Address : 1302,A block, Haisong Building, Chegongmiao, Futian District,Shenzhen
City, China.

Standard : FCC 47 CFR Part 2, 22(H), 24(E)

Classification : PCS Licensed Transmitter Held to Ear (PCE)

Test Result : Complied

TX/RX Frequency Range : GSM/GPRS 850 : 824.2 ~ 848.8 MHz 869.2 ~ 893.8 MHz
GSM/GPRS 1900 : 1850.2 ~ 1909.8 MHz 1930.2 ~ 1989.8 MHz

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of
IAC regulatory Laboratory

Documented By :  APR. 05.2012
Kelly Lin/Engineer

Tested By :  APR. 05.2012
Byran Hung/Senior Engineer

Approved By :  , APR. 05.2012
Jeff Huang/Director of Operations

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	6
1.1 Applicant.....	6
1.2 Manufacturer	6
1.3 Feature of Equipment Under Test	7
1.4 Applied Standards	8
2. Test Configuration of Equipment Under Test	9
2.1 Conducted Power	9
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
3. Test Result.....	11
3.1 Conducted Output Power Measurement	11
3.1.1 Description of the Conducted Output Power Measurement.....	11
3.1.2 Measuring Instruments.....	11
3.1.3 Test Procedure	11
3.1.4 Test Setup.....	11
3.1.5 Test Result of Conducted Output Power.....	12
3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	13
3.2.1 Description of the ERP/EIRP Measurement	13
3.2.2 Measuring Instruments.....	13
3.2.3 Test Procedure	13
3.2.4 Test Setup	14
3.2.5 Test Result of ERP	15
3.2.6 Test Result of EIRP.....	16
3.3 Occupied Bandwidth Measurement.....	17
3.3.1 Description of Occupied Bandwidth Measurement	17
3.3.2 Measuring Instruments.....	17
3.3.3 Test Procedure	17
3.3.4 Test Setup.....	17
3.3.5 Test Result (Plots) of Occupied Bandwidth	18
3.4 Band Edge Measurement.....	30
3.4.1 Description of Band Edge Measurement	30
3.4.2 Measuring Instruments.....	30
3.4.3 Test Procedure	30
3.4.4 Test Setup.....	30
3.4.5 Test Result (Plots) of Conducted Band Edge	31
3.5 Conducted Emission Measurement.....	39
3.5.1 Description of Conducted Emission Measurement.....	39
3.5.2 Measuring Instruments.....	39

3.5.3	Test Procedure	39
3.5.4	Test Setup.....	39
3.5.5	Test Result (Plots) of Conducted Emission	40
3.6	Field Strength of Spurious Radiation Measurement.....	50
3.6.1	Description of Field Strength of Spurious Radiated Measurement	50
3.6.2	Measuring Instruments.....	50
3.6.3	Test Procedure	50
3.6.4	Test Setup.....	51
3.6.5	Test Result of Field Strength of Spurious Radiated (1G-9GHz / 1G-18GHz).....	52
3.6.6	Radiated Emission Measurement Results (18GHz-19.1GHz)	60
3.7	Frequency Stability Measurement.....	61
3.7.1	Description of Frequency Stability Measurement.....	61
3.7.2	Measuring Instruments.....	61
3.7.3	Test Procedures for Temperature Variation.....	61
3.7.4	Test Procedures for Voltage Variation	61
3.7.5	Test Setup.....	61
3.7.6	Test Result of Temperature Variation	62
3.7.7	Test Result of Voltage Variation	63
4	List of Measuring Equipment.....	64
5	Uncertainty Evaluation.....	64
5.1	Uncertainty of Radiated Spurious Emission evaluation (30MHz~1GHz)	65
5.2	Uncertainty of Radiated Spurious Emission evaluation (1GHz~26.5GHz).....	66

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
2.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	
2.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
2.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
2.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS	-
2.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
2.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
2.6	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	-
2.7	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1. GENERAL INFORMATION

1.1 Applicant

Company Name: JZH-Mobile Communication technology Co., LTD

Address: 1302,A block, Haisong Building, Chegongmiao, Futian District,Shenzhen City, China.

1.2 Manufacturer

Company Name: JZH-Mobile Communication technology Co., LTD

Address: 1302,A block, Haisong Building, Chegongmiao, Futian District,Shenzhen City, China.

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	GSM MOBILE PHONE
Brand Name	L700
Model Name	JZH-Mobile
FCC ID	FOCGC661838
Tx/Rx Frequency Range	GSM/GPRS 850 : 824.2 ~ 848.8 MHz / 869.2 ~ 893.8 MHz GSM/GPRS 1900: 1850.2 ~ 1909.8 MHz/ 1930.2 ~ 1989.8 MHz
Number of Channels	GSM850 : 128 189 251 GSM1900 : 512 661 810
Carrier Frequency of Each Channel	GSM850 : 824.2 836.4 848.8 GSM1900 : 1850.2 1880.0 1909.8
Maximum Output Power to Antenna	GSM850 : 31.49 (dBm) ,1.409(W) GSM1900 : 29.71 (dBm) ,0.935(W)
Antenna Type	Fixed Internal Antenna
HW Version	B085-MB-V0.1
SW Version	B085-1D-ENTEL _L97 _V114
Type of Modulation	GSM/GPRS:GMSK
Type of Emission	250KGXW

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of PCS Licensed Transmitter Held to Ear (PCE).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test

2.1 Conducted Power

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	31.35	31.42	31.49	29.64	29.71	29.70
GPRS 8	30.54	30.57	30.60	29.43	29.55	29.51
GPRS 10	30.59	30.61	30.64	28.42	28.57	28.55

2.2 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850, GPRS850.
2. 30 MHz to 19000 MHz for GSM1900, GPRS1900

The following table shows the test modes as the worst cases and recorded in this report.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GSM Link + Battery ■ GPRS Link + Battery	■ GSM Link ■ GPRS Link
GSM 1900	■ GSM Link + Battery ■ GPRS Link + Battery	■ GSM Link ■ GPRS Link

Note:

1. The maximum power levels are GSM and GPRS mode.
2. The radiated emission testing was performed together with Adapter.

2.3 Connection Diagram of Test System

The EUT with adapter was placed on the turn table in a semi-anechoic chamber, and it was coupled to the supporting unit, system simulator, which was located outside the chamber.



3. Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup

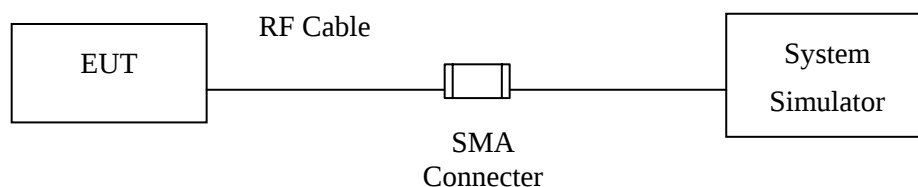

3.1.5 Test Result of Conducted Output Power

Cellular Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM850 (GSM)	128 (Low)	824.2	31.35	1.364
	189 (Mid)	836.4	31.42	1.386
	251 (High)	848.8	31.49	1.409
GSM850 (GPRS 8)	128 (Low)	824.2	30.54	1.132
	189 (Mid)	836.4	30.57	1.137
	251 (High)	848.8	30.60	1.148
GSM850 (GPRS 10)	128 (Low)	824.2	30.59	1.146
	189 (Mid)	836.4	30.61	1.151
	251 (High)	848.8	30.64	1.159

PCS Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM1900 (GSM)	512 (Low)	1850.2	29.64	0.920
	661 (Mid)	1880.0	29.71	0.935
	810 (High)	1909.8	29.70	0.933
GSM1900 (GPRS 8)	512 (Low)	1850.2	29.43	0.877
	661 (Mid)	1880.0	29.55	0.902
	810 (High)	1909.8	29.51	0.893
GSM1900 (GPRS 10)	512 (Low)	1850.2	28.42	0.695
	661 (Mid)	1880.0	28.57	0.719
	810 (High)	1909.8	28.55	0.716

3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

3.2.2 Measuring Instruments


See list of measuring instruments of this test report.

3.2.3 Test Procedure


1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 3MHz,VBW= 3MHz, and peak detector settings.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$

3.2.4 Test Setup

30MHz~1GHz

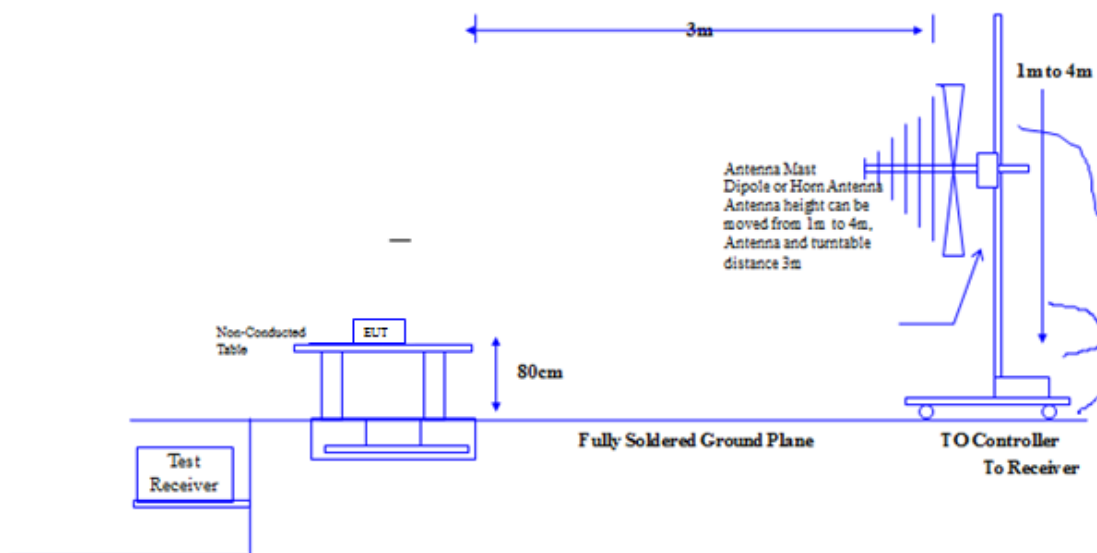

Above 1GHz

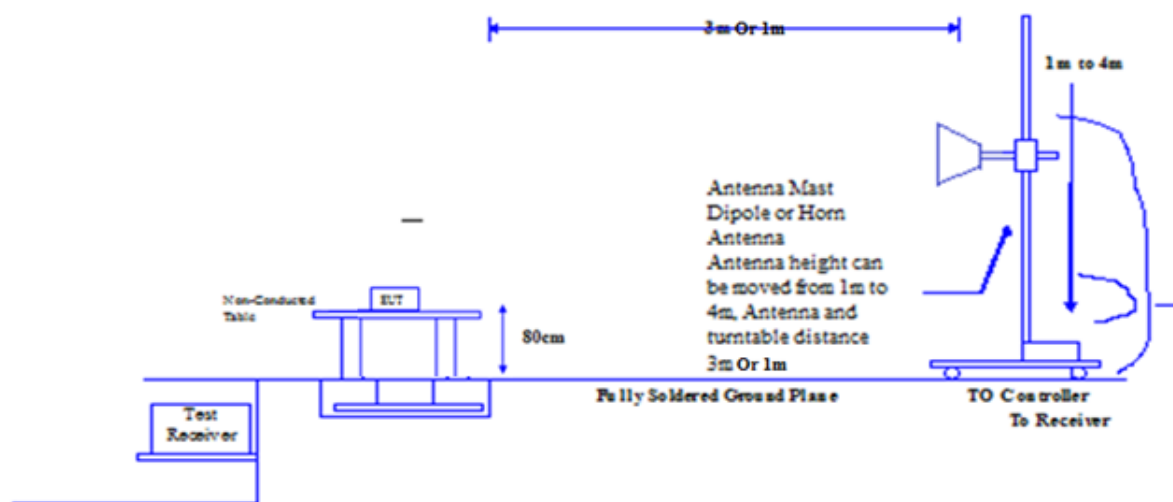

3.2.5 Test Result of ERP

GSM850 (GSM) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.20	-1.63	32.04	28.26	0.67
836.40	-1.45	32.51	28.91	0.78
848.80	-1.31	32.63	29.17	0.83
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.20	-10.52	36.17	23.5	0.22
836.40	-10.19	35.21	22.87	0.19
848.80	-8.73	34.47	23.59	0.23

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (GPRS 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.20	-2.72	32.04	27.17	0.52
836.40	-2.15	32.51	28.21	0.66
848.80	-2.33	32.63	28.15	0.65
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.20	-10.43	36.17	23.59	0.23
836.40	-10.00	35.21	23.06	0.20
848.80	-9.30	34.47	23.02	0.20

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.2.6 Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.20	-13.04	41.31	28.27	0.67
1880.00	-14.09	41.42	27.33	0.54
1909.80	-14.67	41.33	26.66	0.46
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.20	-17.16	41.45	24.29	0.27
1880.00	-19.02	43.28	24.26	0.26
1909.80	-17.45	42.48	25.03	0.32

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (GPRS 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.20	-12.75	41.31	28.56	0.72
1880.00	-14.11	41.42	27.31	0.54
1909.80	-13.75	41.33	27.58	0.57
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.20	-18.06	41.45	23.39	0.22
1880.00	-19.85	43.28	23.43	0.22
1909.80	-18.36	42.48	24.12	0.26

*EIRP = LVL (dBm) + Correction Factor (dB)

3.3 Occupied Bandwidth Measurement

3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.


3.3.4 Test Setup

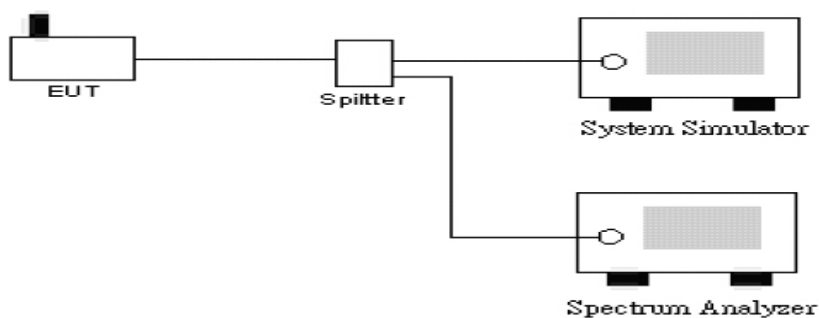


3.3.5 Test Result (Plots) of Occupied Bandwidth

Band :	GSM 850	Power Stage : High
Test Mode :	GSM Link	

99% Occupied Bandwidth Plot on Channel 128

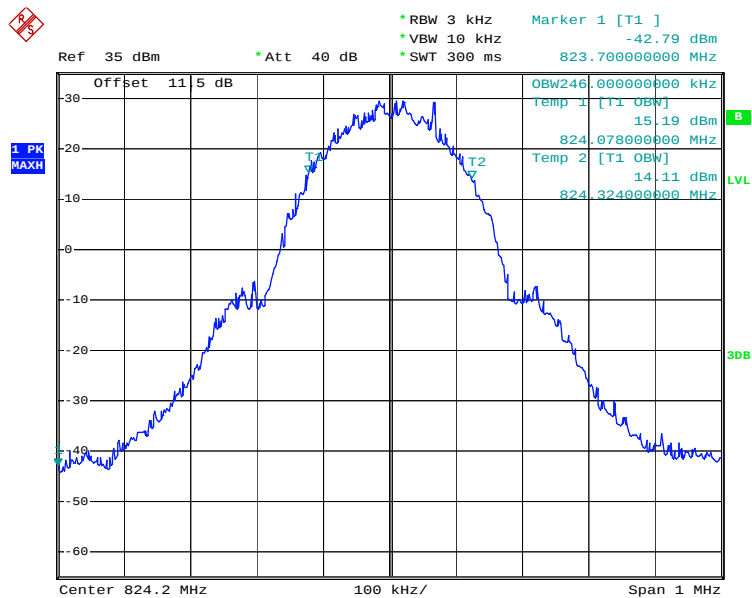

26dB Bandwidth Plot on Channel 128

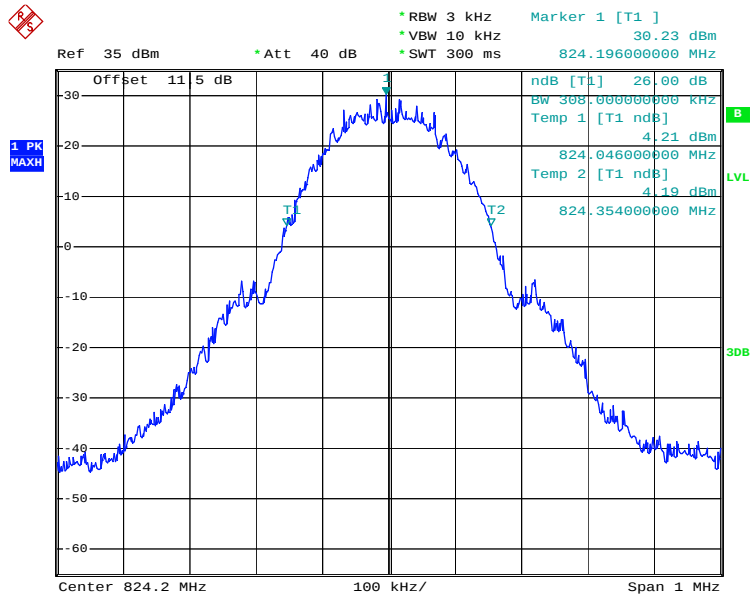

Ref 35 dBm Att 40 dB RBW 3 kHz VBW 30 kHz SWT 300 ms Marker 1 [T1] 25.27 dBm 836.388000000 MHz

Offset 11.5 dB

OBW250.000000000 kHz
Temp 1 [T1 OFF] 14.54 dBm
836.274000000 MHz
Temp 2 [T1 OFF] 16.18 dBm
836.524000000 MHz

1 PR
MAX

Center= 836.4 MHz 100 kHz/ Span 1 MHz

Ref 33.3 dBm - Att 40 dB

RBW 3 kHz VBW 30 kHz SWF 300 ms

Marker 1 [T1] 26.35 dBm 836.386000000 MHz

Offset 11.5 dB

1

ndB [T1] 26.00 dB

SW 324.000000000 kHz

Temp 1 [T1 ndB] 2.45 dBm


836.238000000 MHz

Temp 2 [T1 ndB] 2.15 dBm


836.562000000 MHz

Center= 836.4 MHz 100 kHz/ Span 1 MHz

99% Occupied Bandwidth Plot on Channel 251

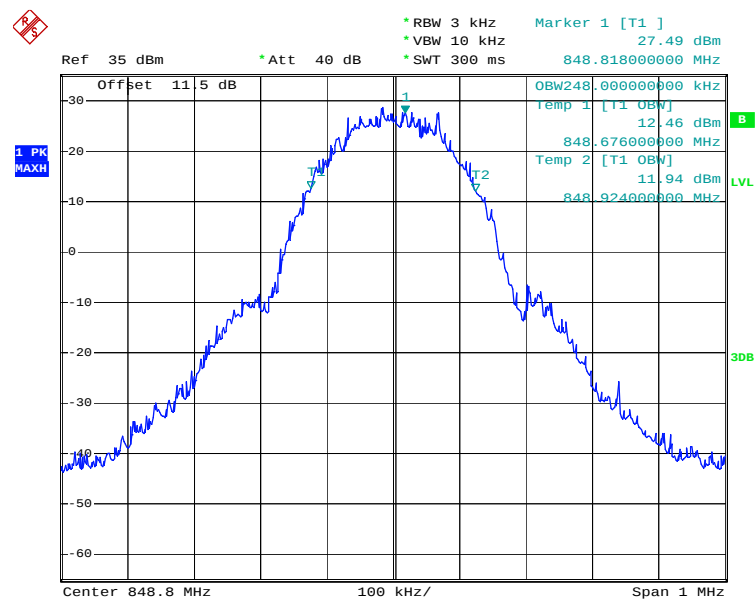


26dB Bandwidth Plot on Channel 251

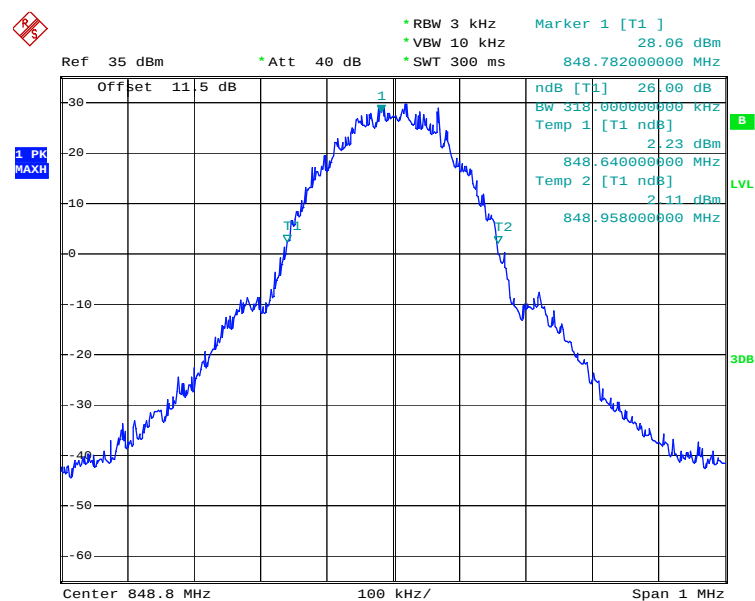


Band :	GSM 850	Power Stage : High
Test Mode :	GPRS Link	


99% Occupied Bandwidth Plot on Channel 128

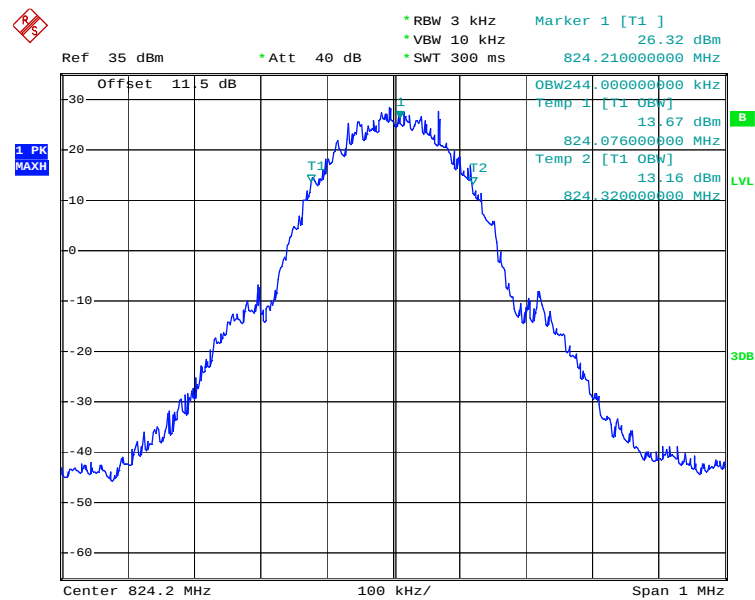


26dB Bandwidth Plot on Channel 128

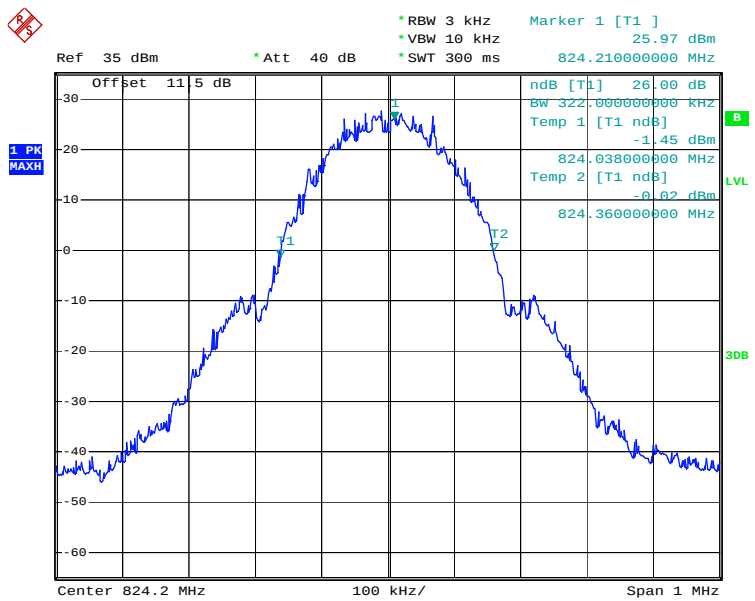


99% Occupied Bandwidth Plot on Channel 189

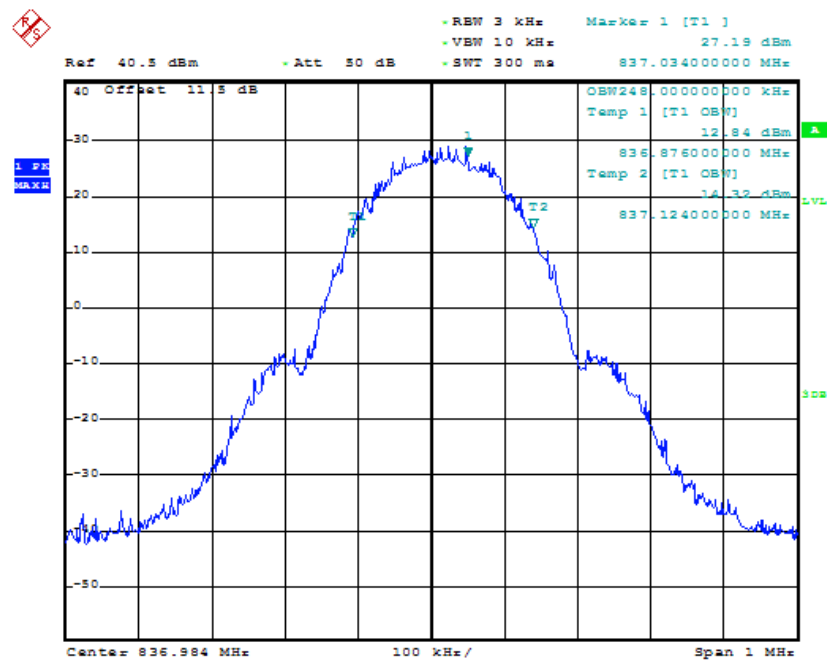


26dB Bandwidth Plot on Channel 189

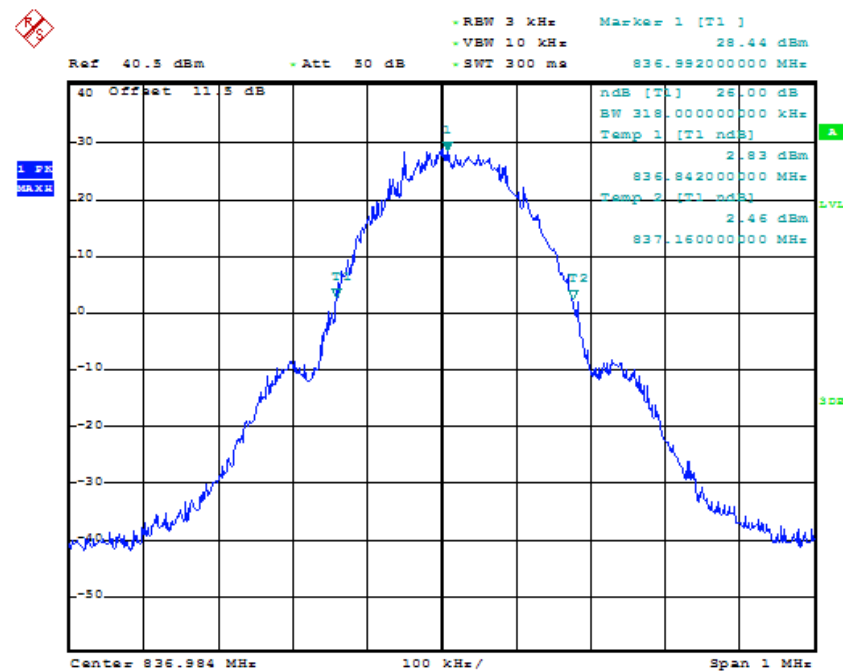

99% Occupied Bandwidth Plot on Channel 251

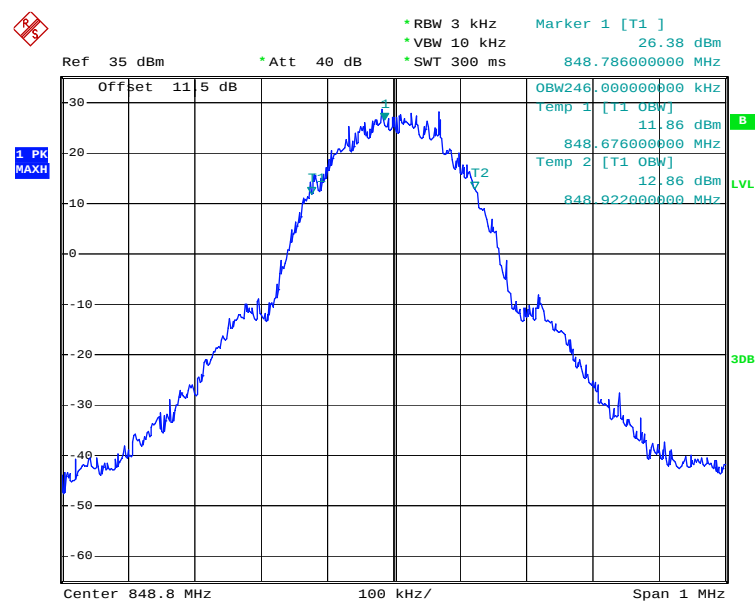


26dB Bandwidth Plot on Channel 251

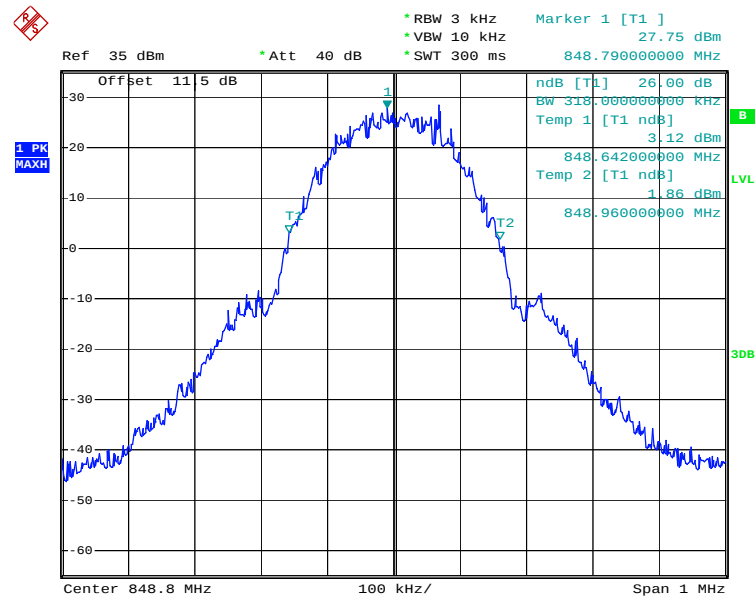


Band :	GSM 1900	Power Stage : High
Test Mode :	GSM Link	


99% Occupied Bandwidth Plot on Channel 512

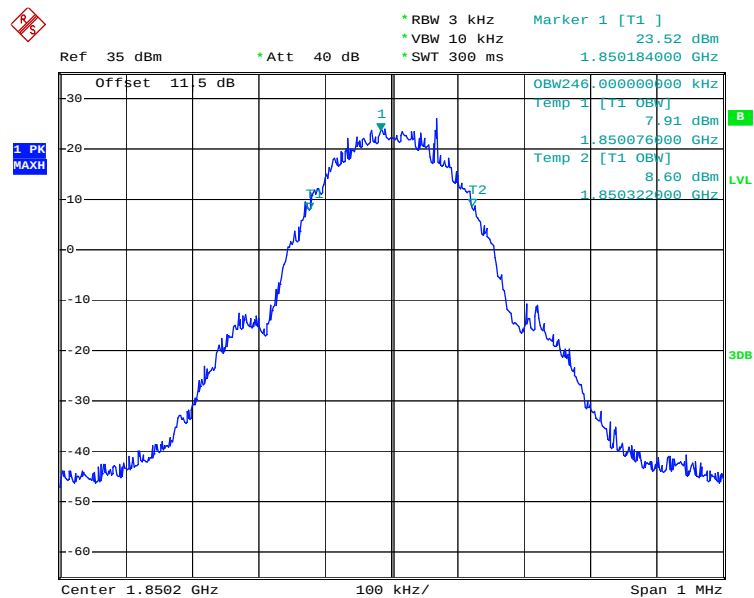


26dB Bandwidth Plot on Channel 512

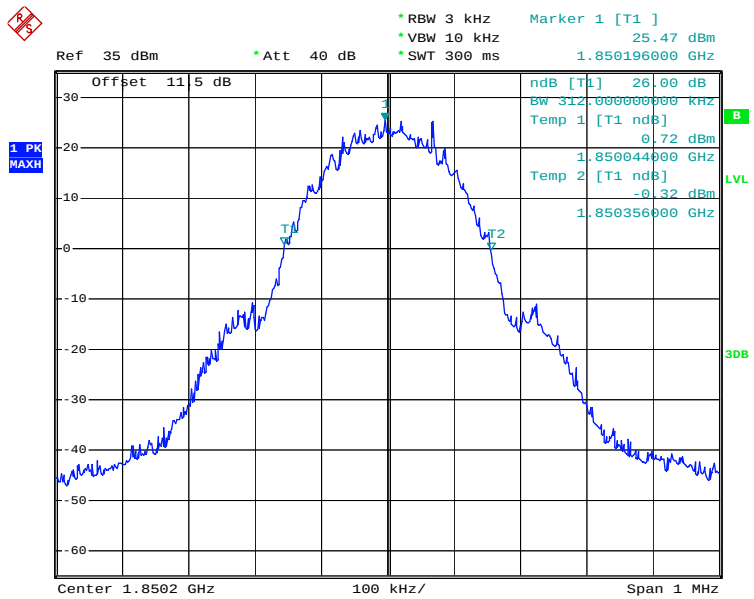


99% Occupied Bandwidth Plot on Channel 661

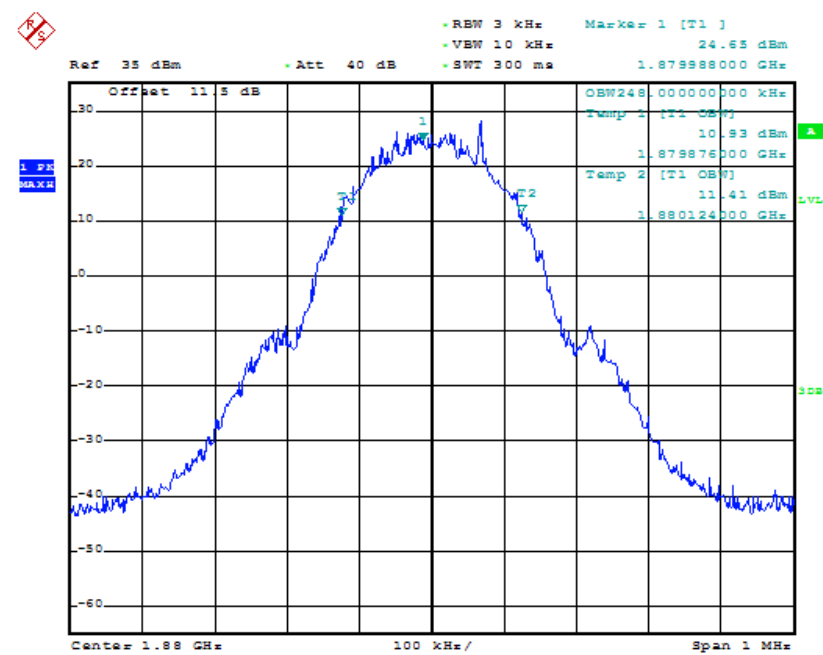


26dB Bandwidth Plot on Channel 661

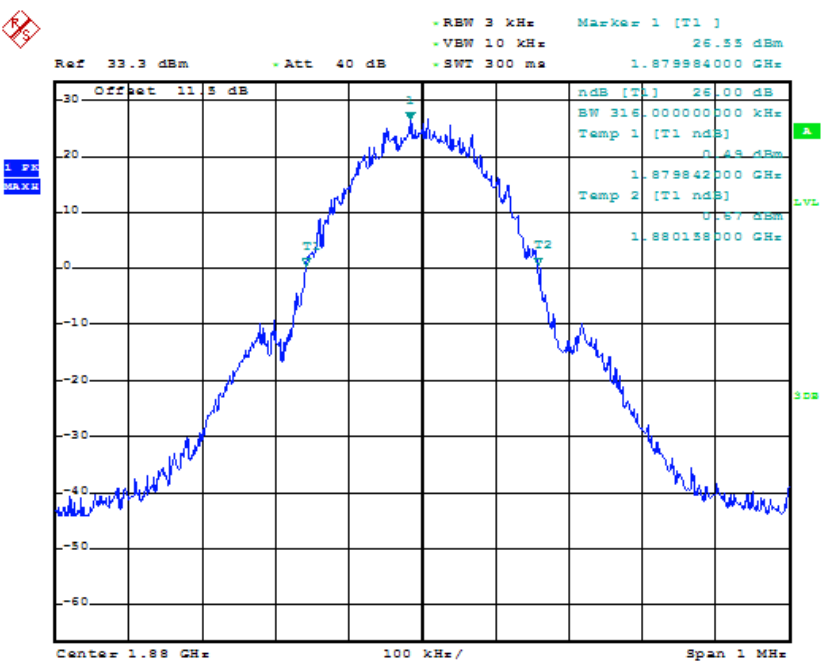

99% Occupied Bandwidth Plot on Channel 810

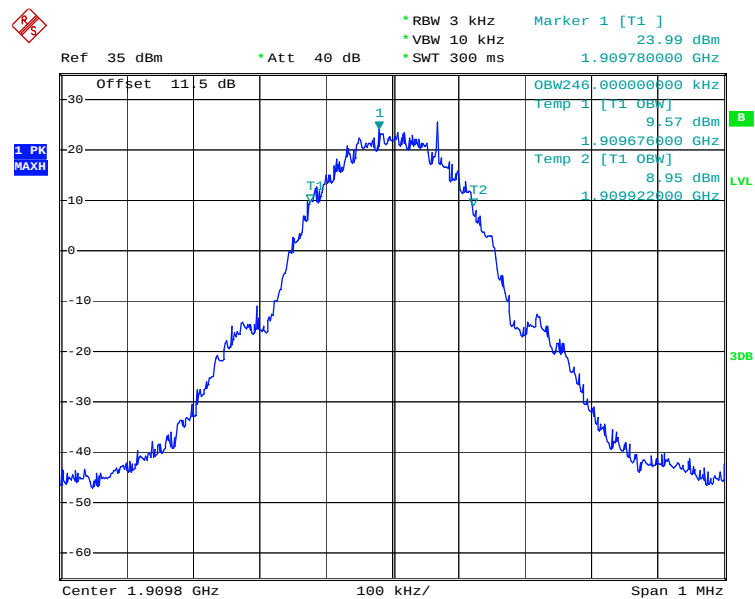


26dB Bandwidth Plot on Channel 810

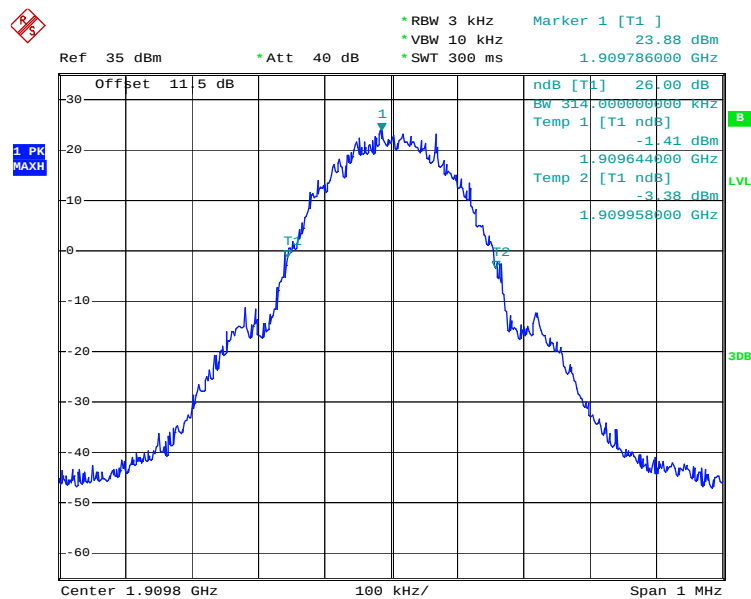


Band :	GSM 1900	Power Stage :	High
Test Mode :	GPRS Link		


99% Occupied Bandwidth Plot on Channel 512

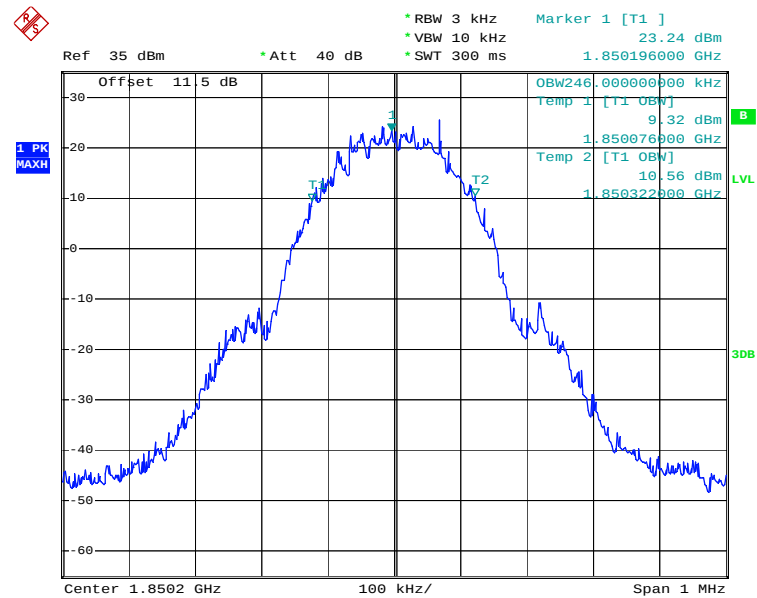


26dB Bandwidth Plot on Channel 512


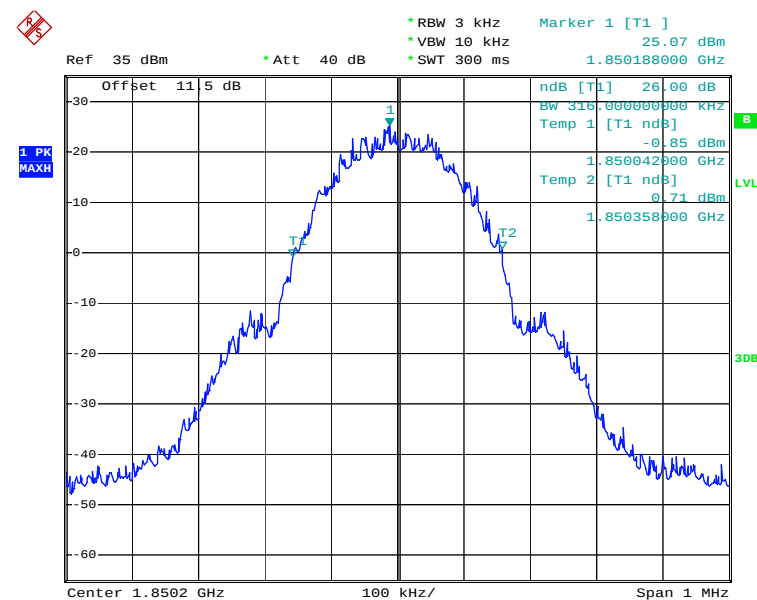


99% Occupied Bandwidth Plot on Channel 661

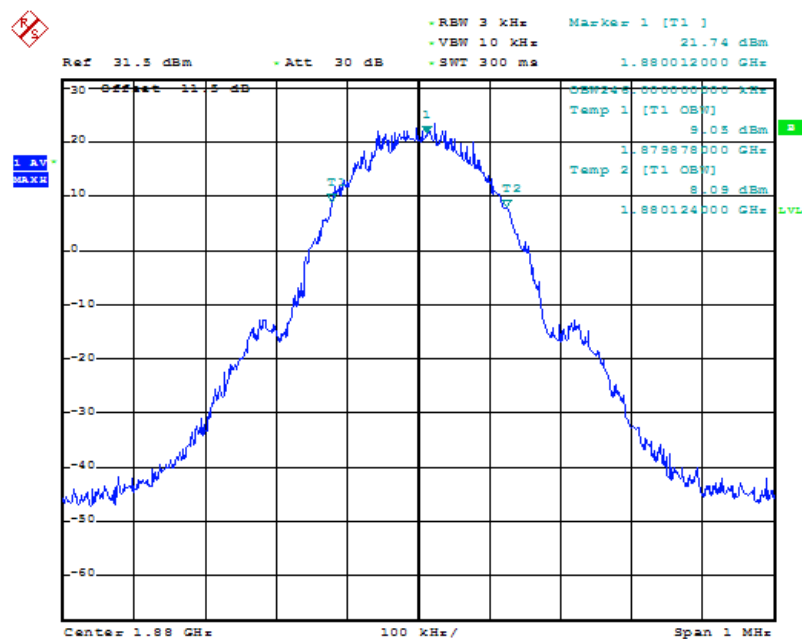

26dB Bandwidth Plot on Channel 661

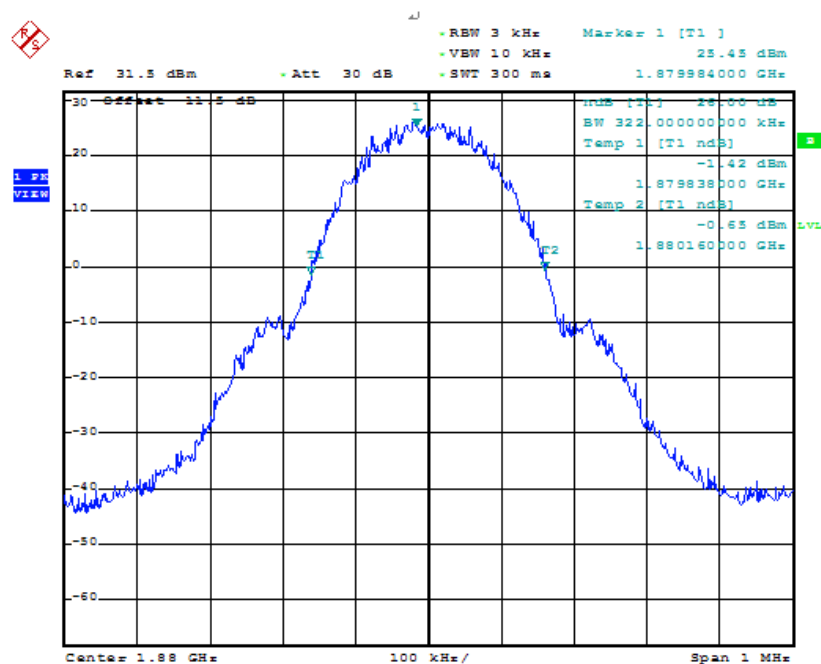

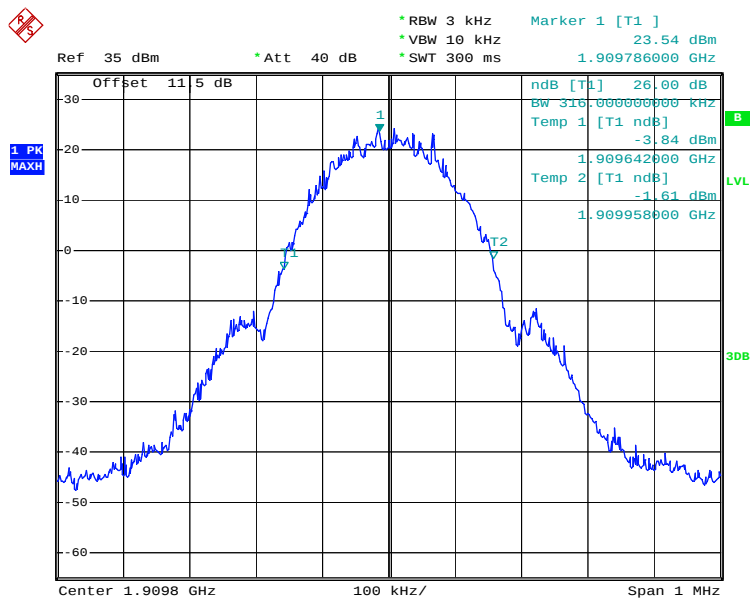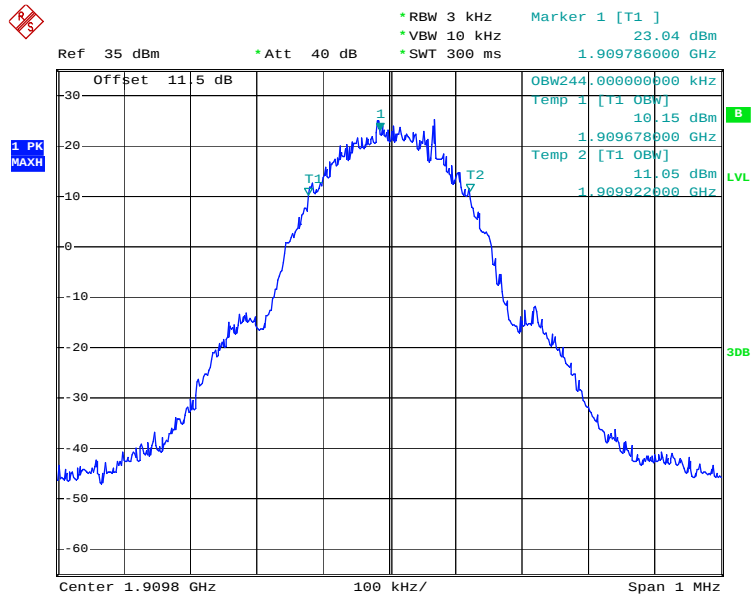

3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedure

- a. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- b. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly $BW/100$.


3.4.4 Test Setup

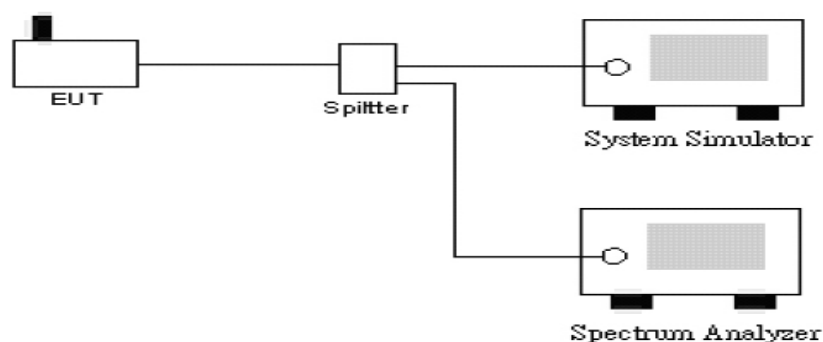


3.4.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Power Stage :	High
Test Mode :	GSM Link		

Lower Band Edge Plot on Channel 128

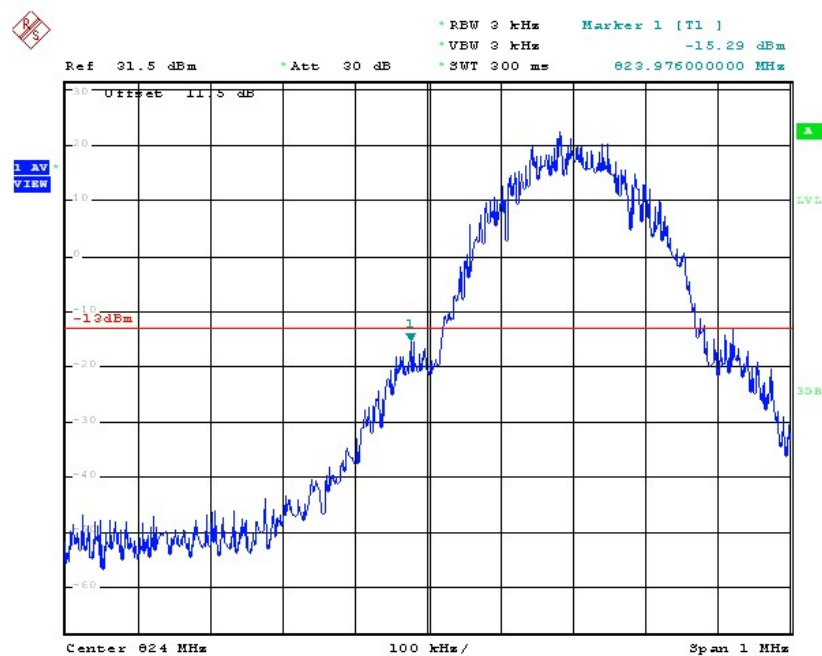


Date: 29.MAR.2012 09:26:48

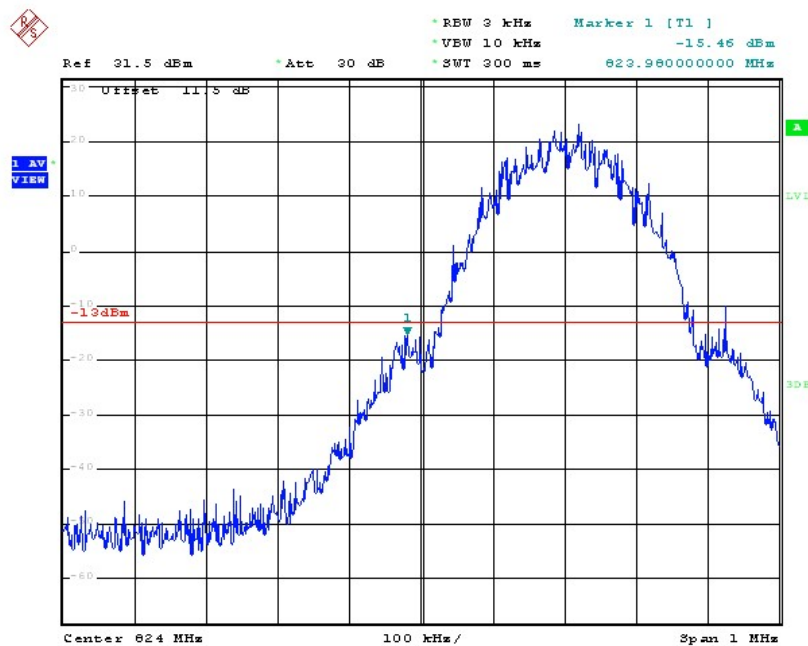


Date: 29.MAR.2012 09:29:43

Higher Band Edge Plot on Channel 251

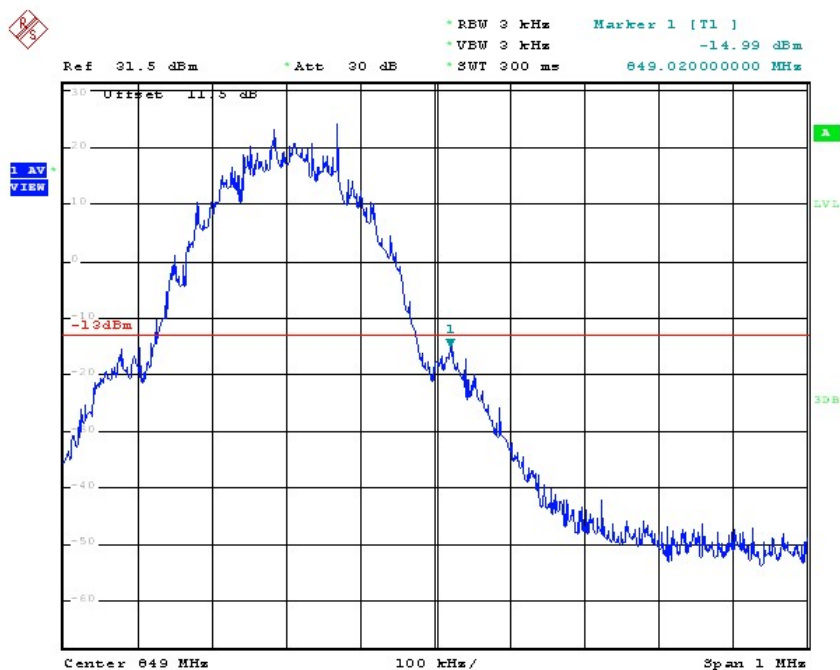


Date: 29.MAR.2012 09:38:36

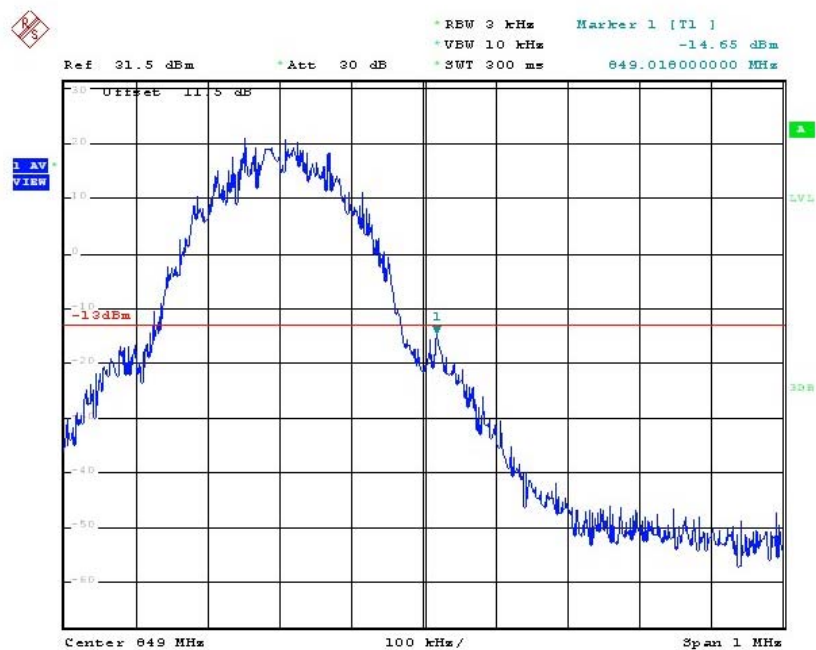


Date: 29.MAR.2012 09:36:45

Band :	GSM850	Power Stage :	High
Test Mode :	GPRS Link		

Lower Band Edge Plot on Channel 128

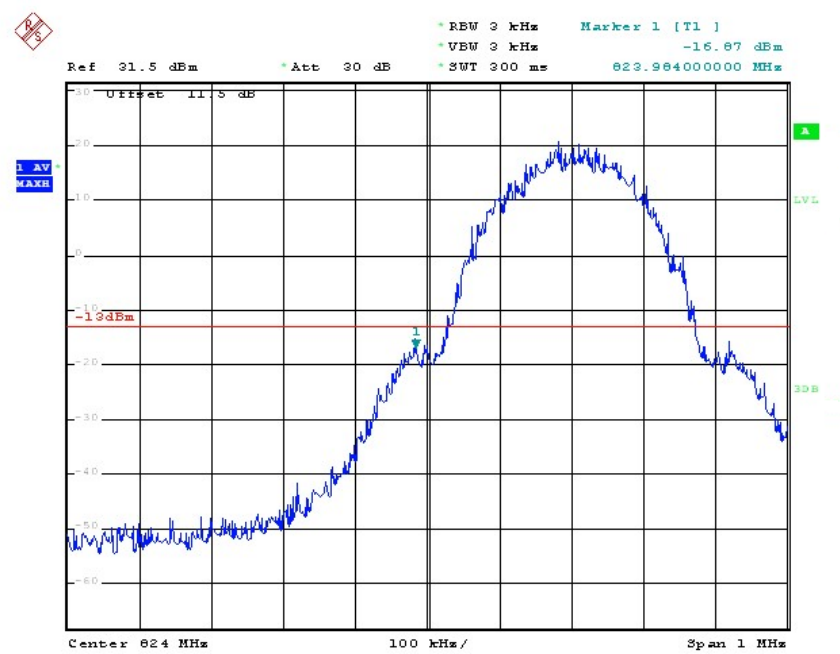


Date: 29.MAR.2012 09:54:04

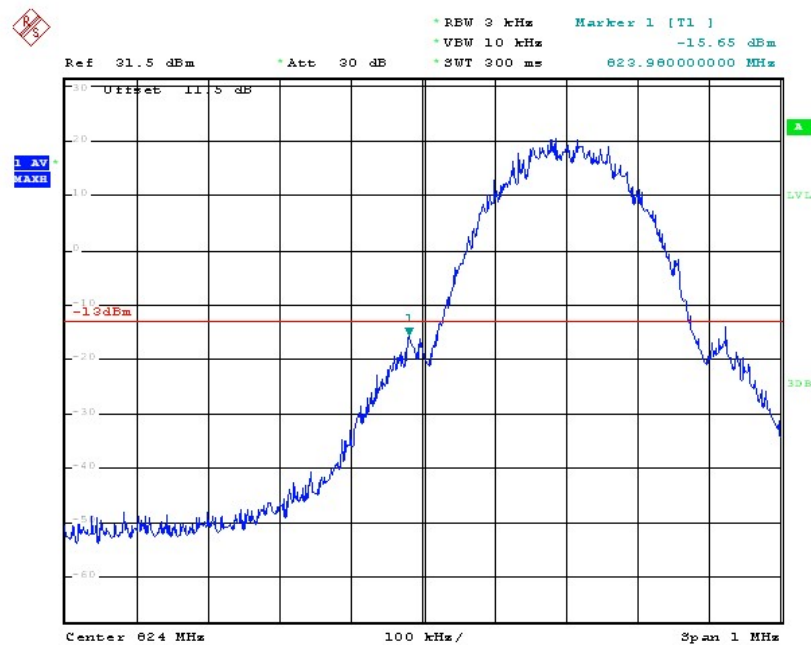


Date: 29.MAR.2012 09:53:02

Higher Band Edge Plot on Channel 251

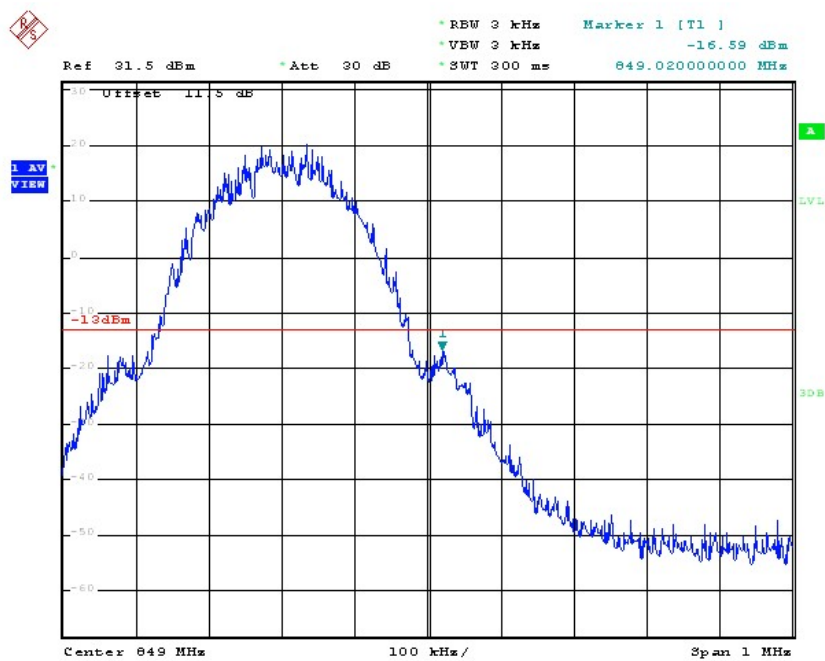


Date: 29.MAR.2012 09:50:00

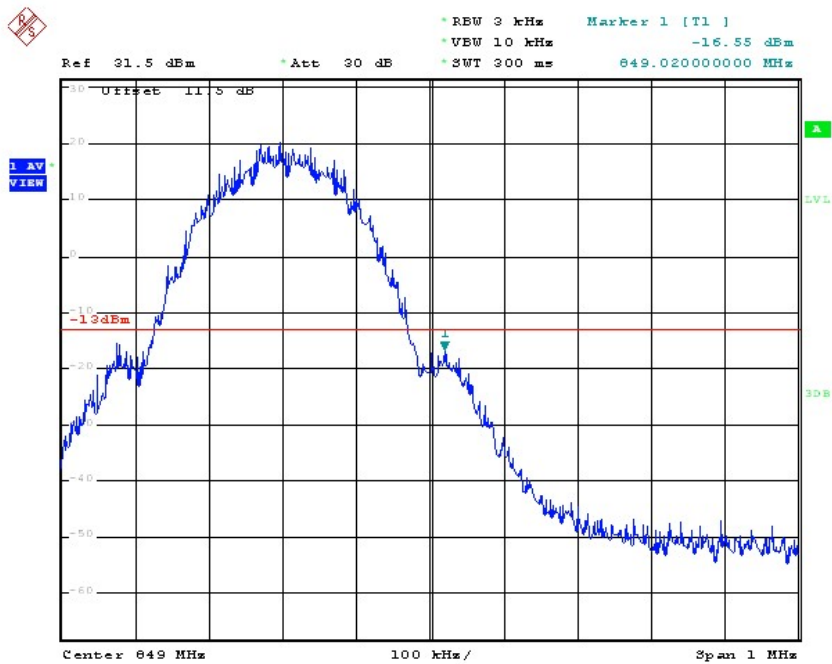


Date: 29.MAR.2012 09:51:04

Band :	GSM1900	Power Stage :	High
Test Mode :	GSM Link		

Lower Band Edge Plot on Channel 512

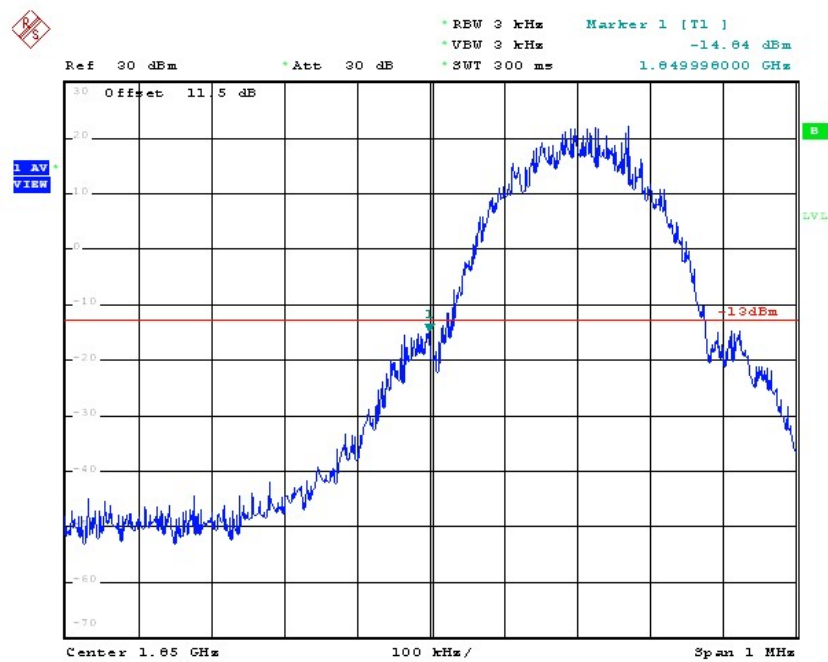


Date: 31.MAR.2012 08:30:14

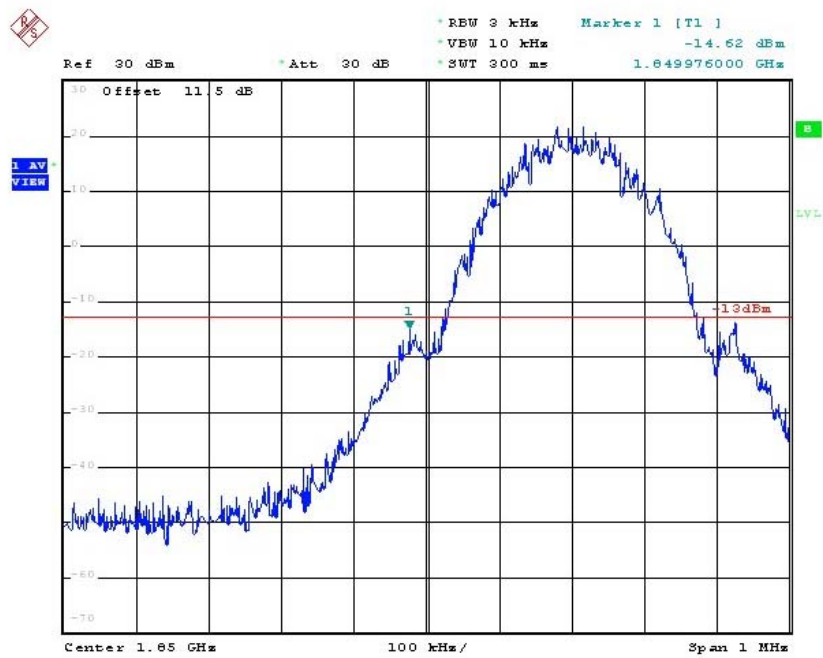


Date: 31.MAR.2012 08:31:44

Higher Band Edge Plot on Channel 810

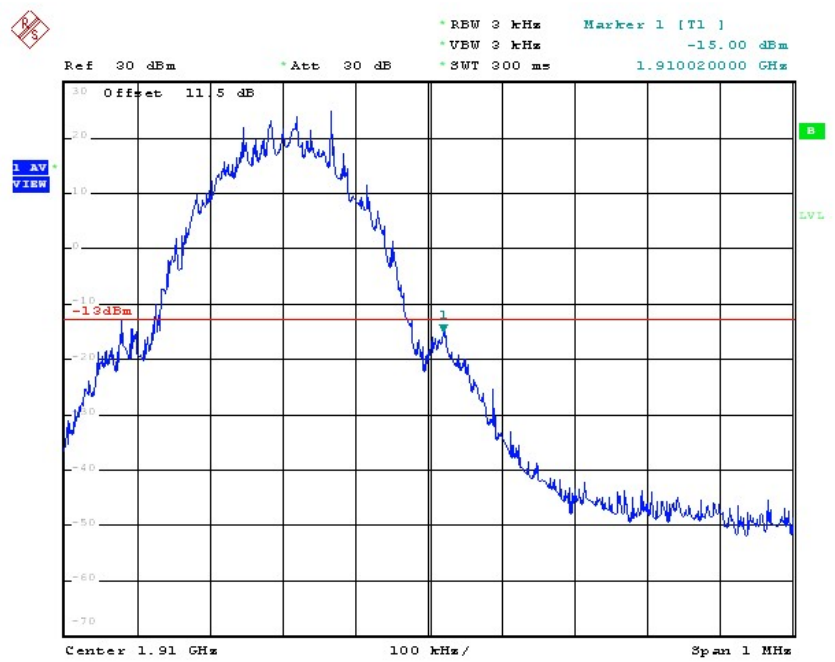


Date: 31.MAR.2012 08:35:25

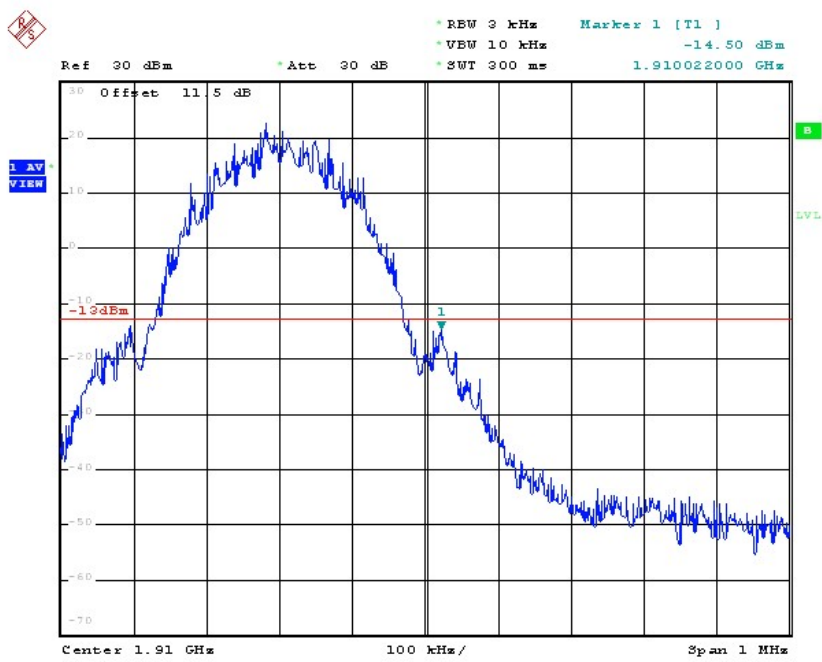


Date: 31.MAR.2012 08:33:25

Band :	GSM1900	Power Stage :	High
Test Mode :	GPRS Link		

Lower Band Edge Plot on Channel 512

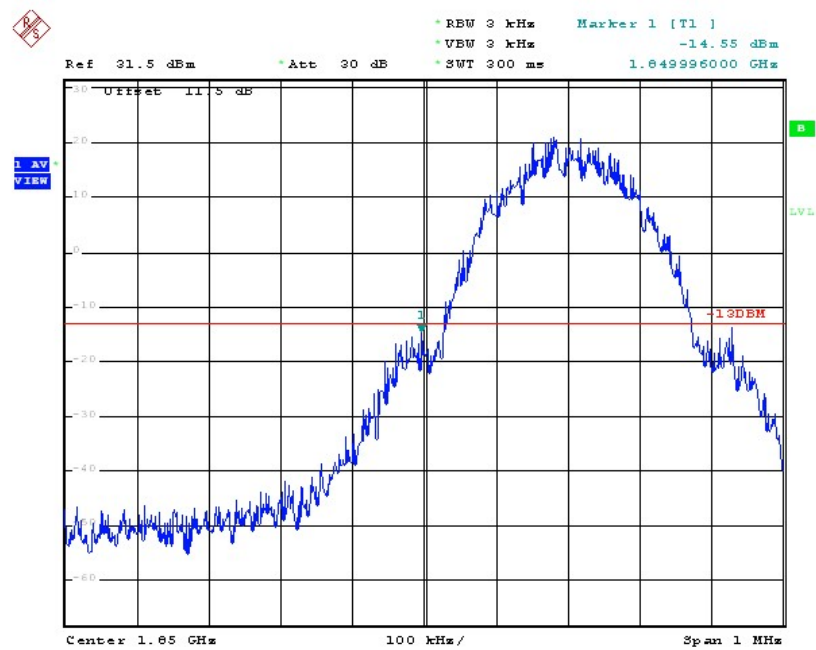


Date: 31.MAR.2012 08:51:14

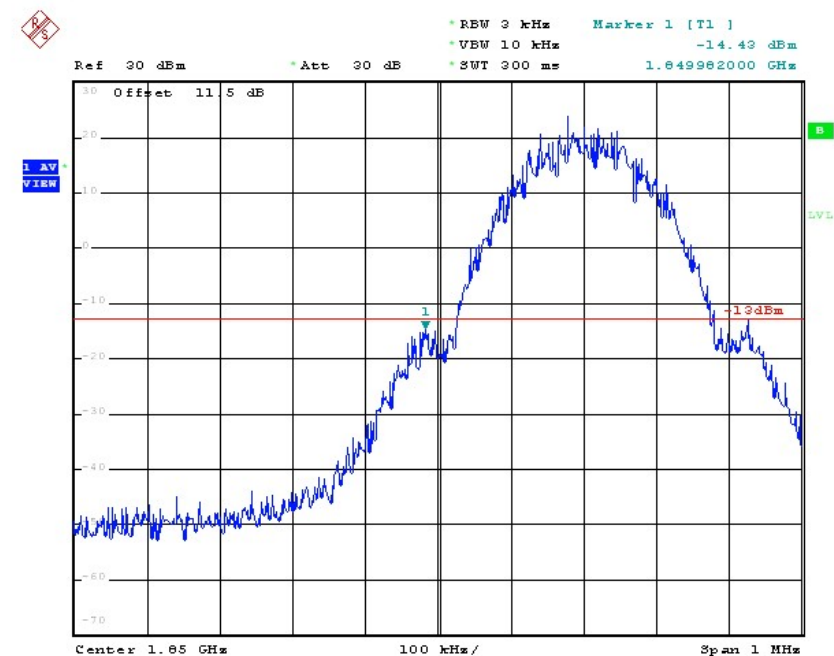


Date: 31.MAR.2012 08:42:32

Higher Band Edge Plot on Channel 810

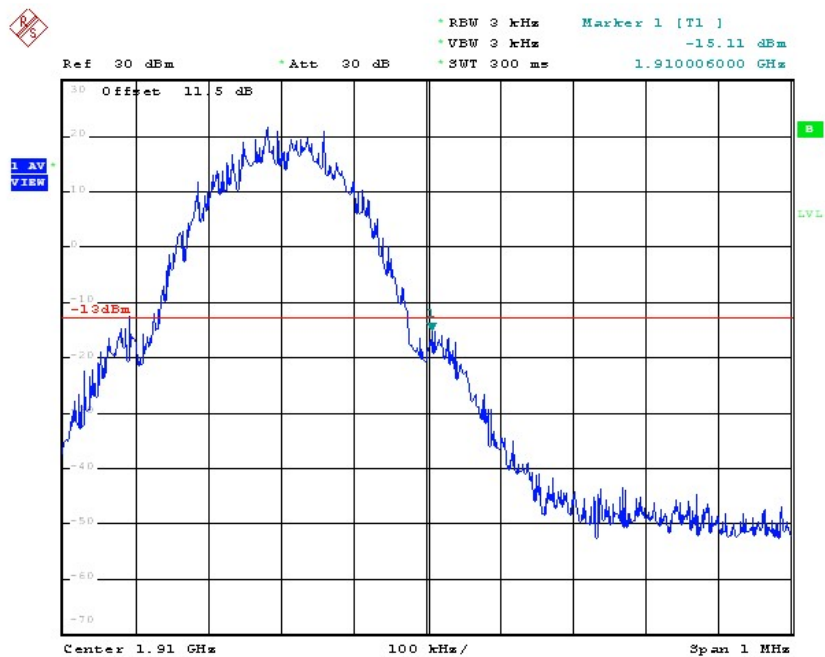

Date: 31.MAR.2012 08:40:16

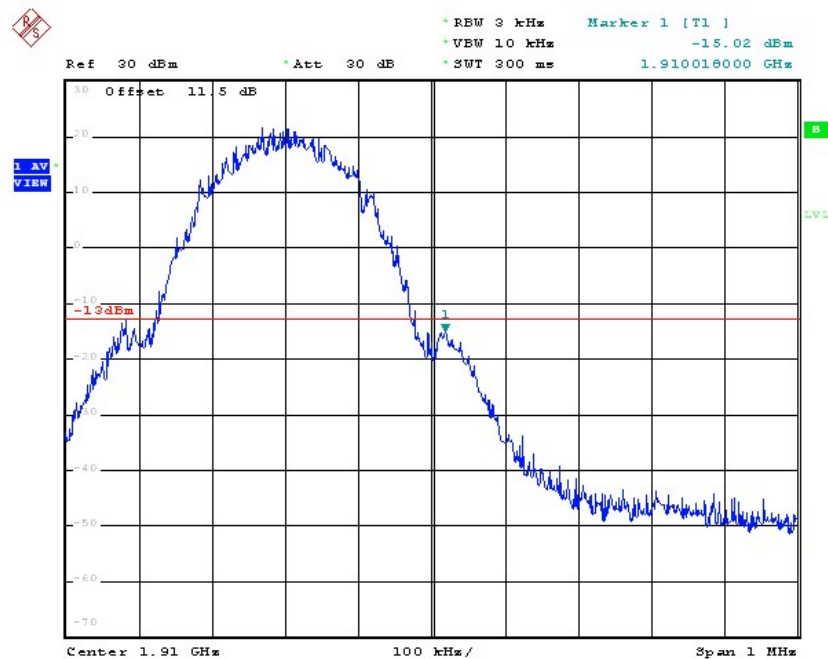

Date: 31.MAR.2012 08:41:17

3.5 Conducted Emission Measurement

3.5.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedure

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.


3.5.4 Test Setup

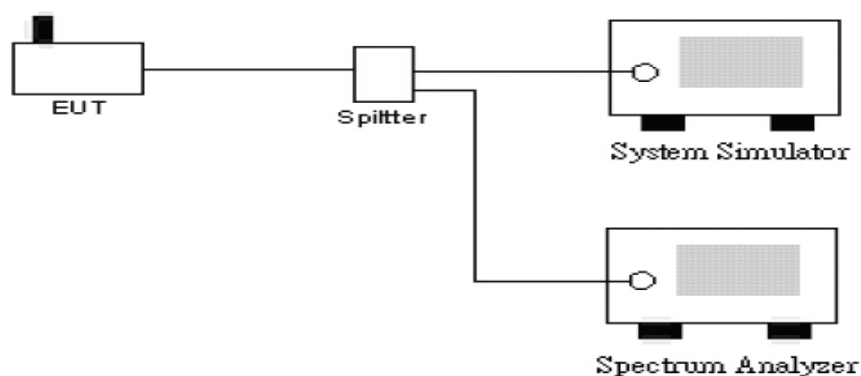

3.5.5 Test Result (Plots) of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GSM Link		

Conducted Emission Plot between 30MHz ~ 1GHz

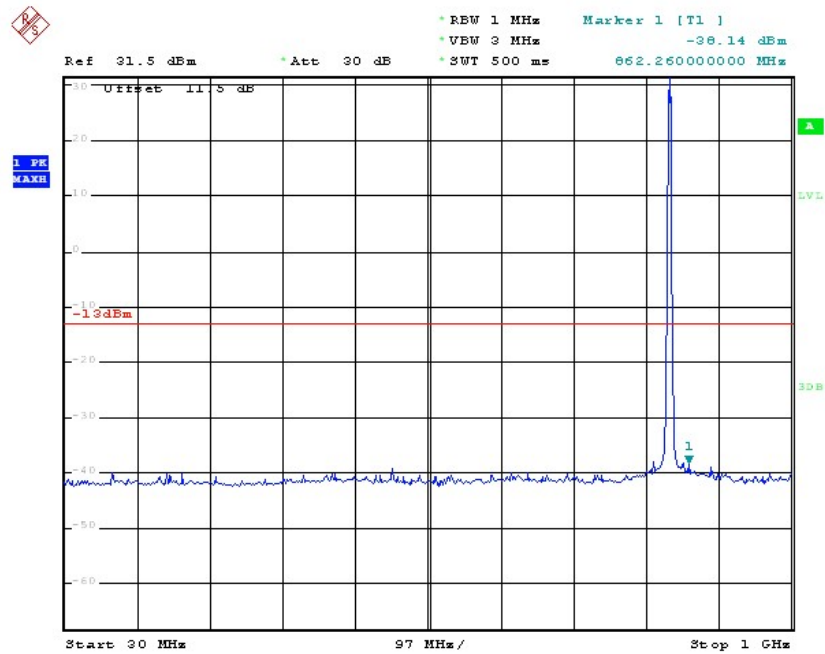


Date: 29.MAR.2012 10:31:09

Conducted Emission Plot between 1GHz ~ 3GHz

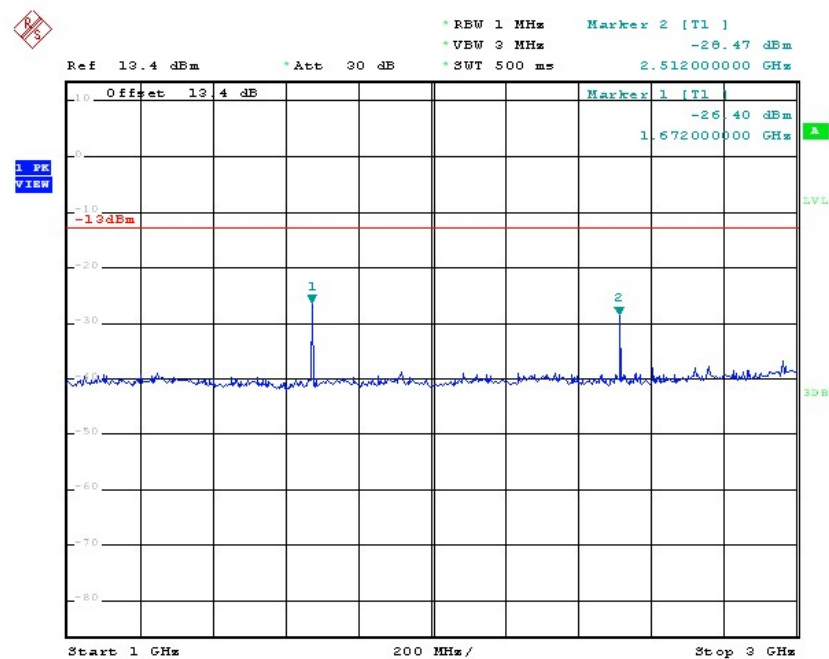


Date: 29.MAR.2012 10:29:43

Conducted Emission Plot between 3GHz ~ 7GHz

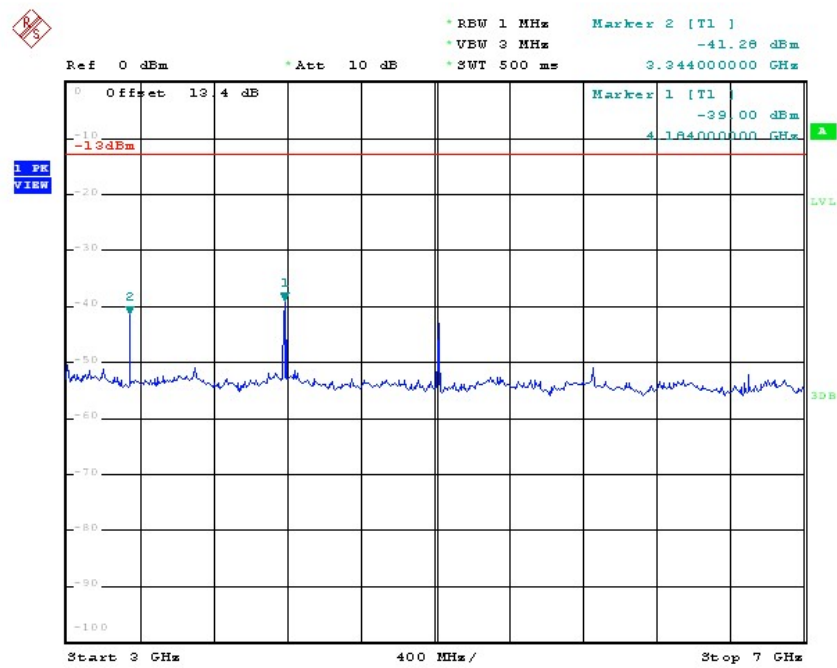


Date: 29.MAR.2012 10:28:09

Conducted Emission Plot between 7GHz ~ 9GHz

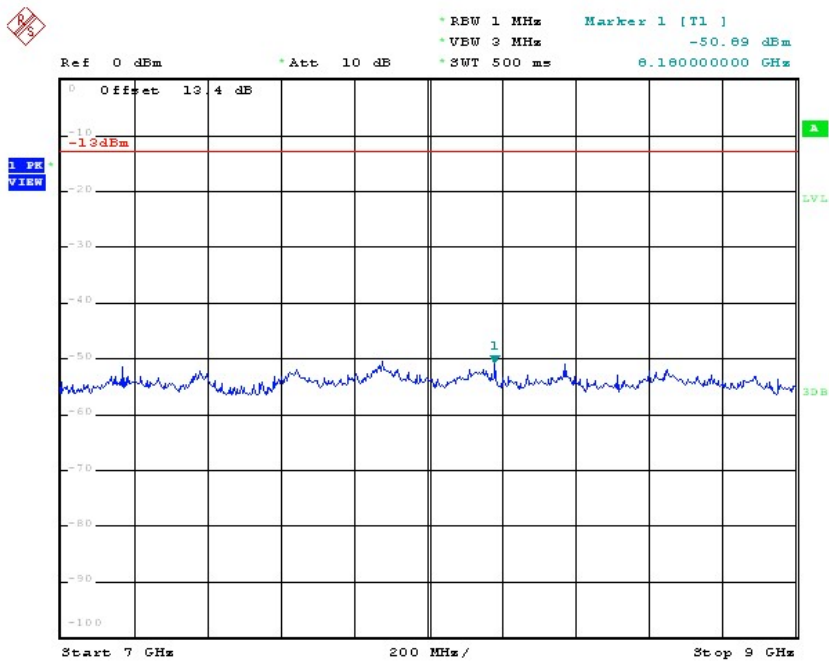


Date: 29.MAR.2012 10:26:01

Band :	GSM850	Channel :	CH189
Test Mode :	GPRS Link		

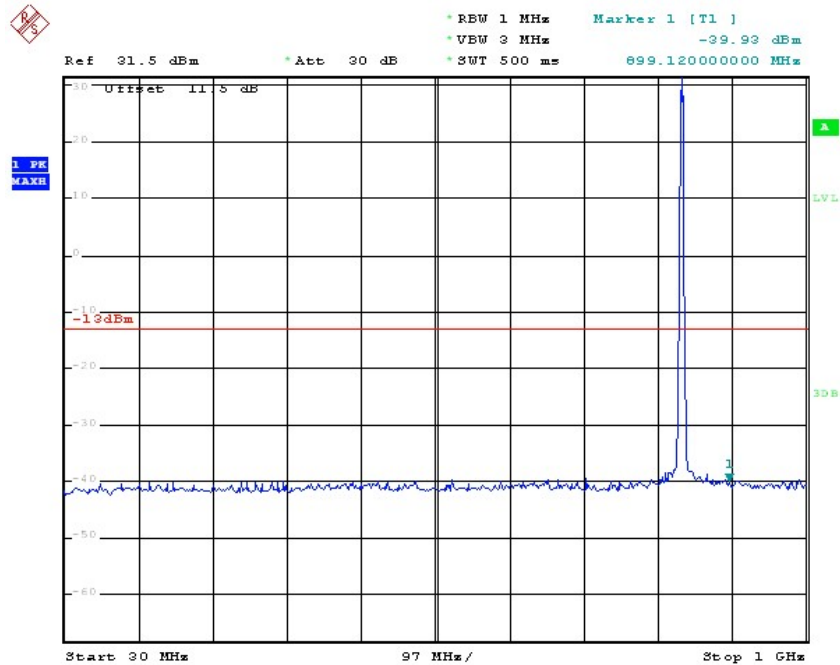
Conducted Emission Plot between 30MHz ~ 1GHz

Date: 29.MAR.2012 10:34:22

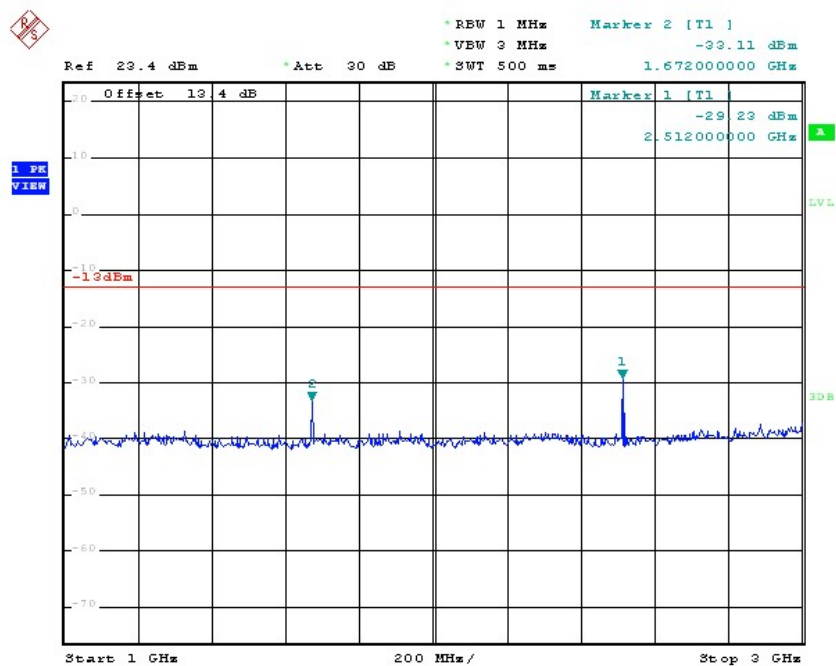Conducted Emission Plot between 1GHz ~ 3GHz


Date: 29.MAR.2012 10:37:13

Conducted Emission Plot between 3GHz ~ 7GHz

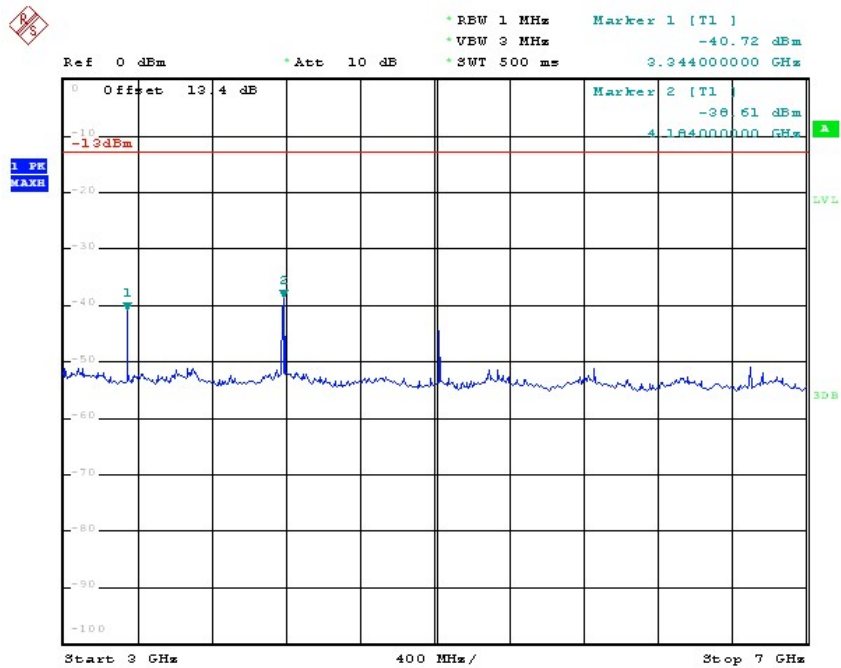


Date: 29.MAR.2012 10:42:38

Conducted Emission Plot between 7GHz ~ 9GHz

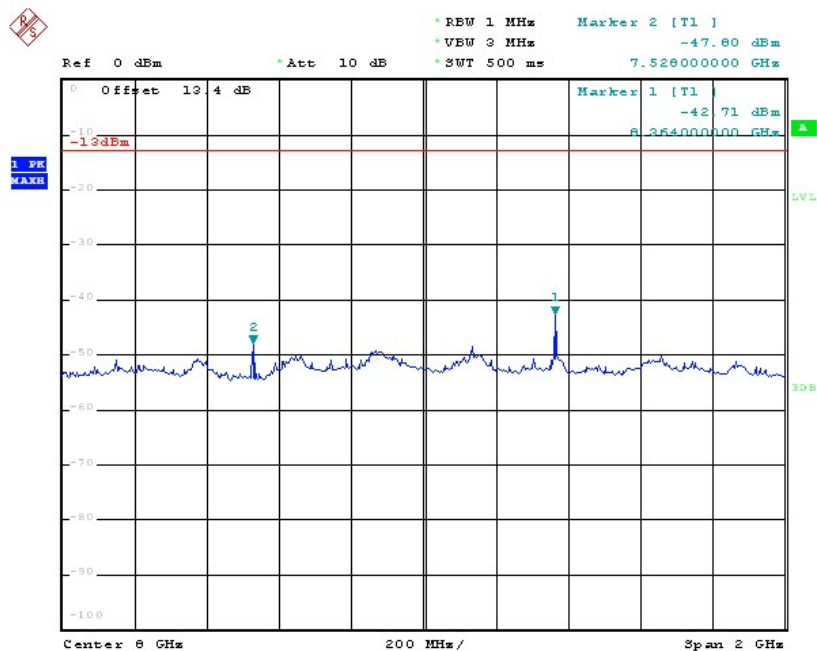


Date: 29.MAR.2012 10:41:46

Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link		

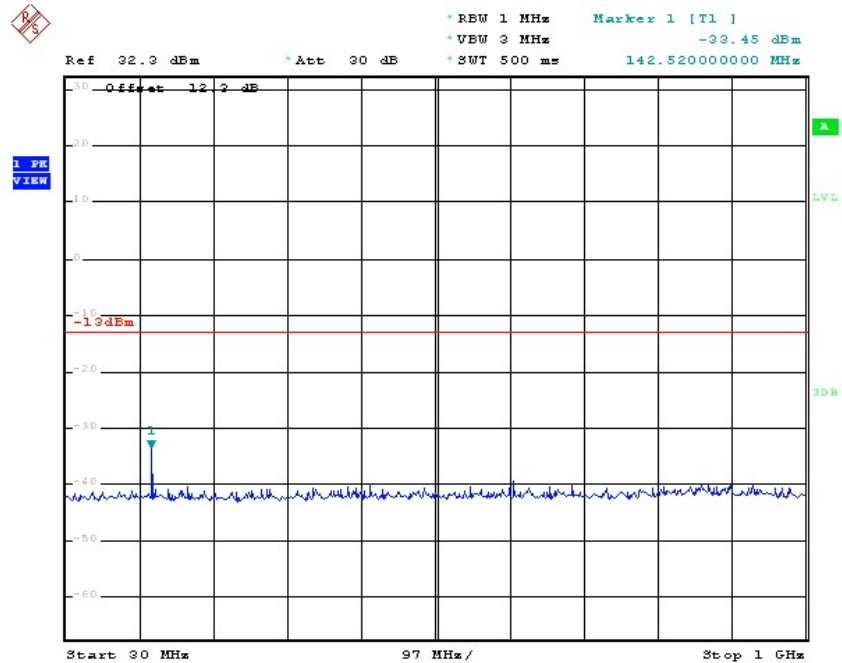
Conducted Emission Plot between 30MHz ~ 1GHz

Date: 29.MAR.2012 10:47:38

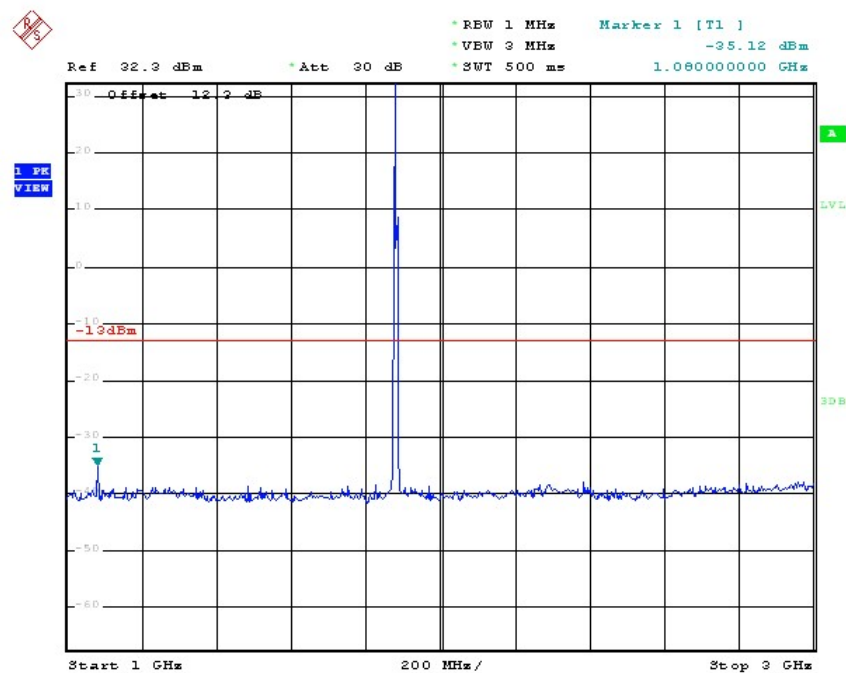Conducted Emission Plot between 1GHz ~ 3GHz


Date: 29.MAR.2012 10:48:46

Conducted Emission Plot between 3GHz ~ 7GHz

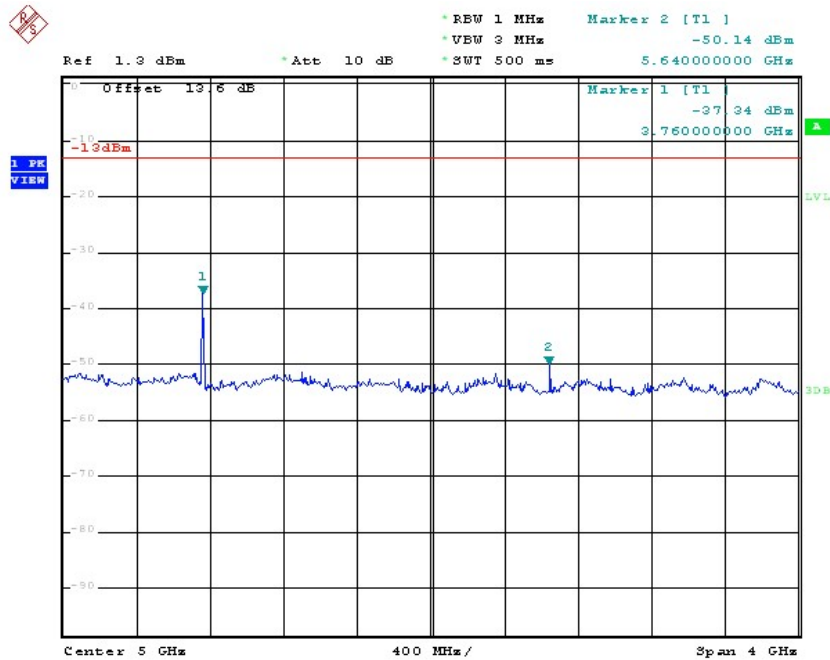


Date: 29.MAR.2012 10:52:13

Conducted Emission Plot between 7GHz ~ 13.6GHz

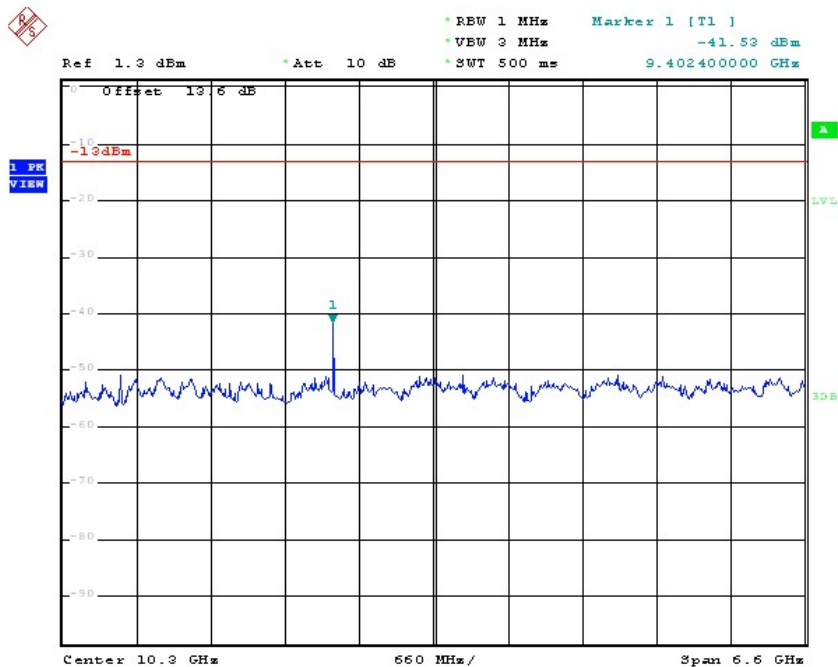


Date: 29.MAR.2012 10:56:20

Conducted Emission Plot between 13.6GHz ~ 19.1GHz

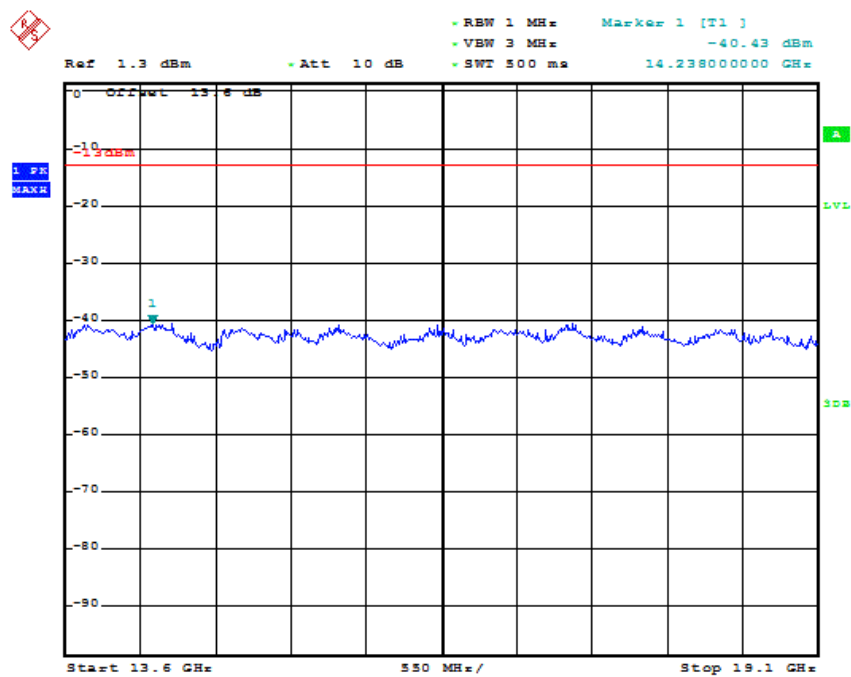


Date: 29.MAR.2012 10:57:11

Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS Link		

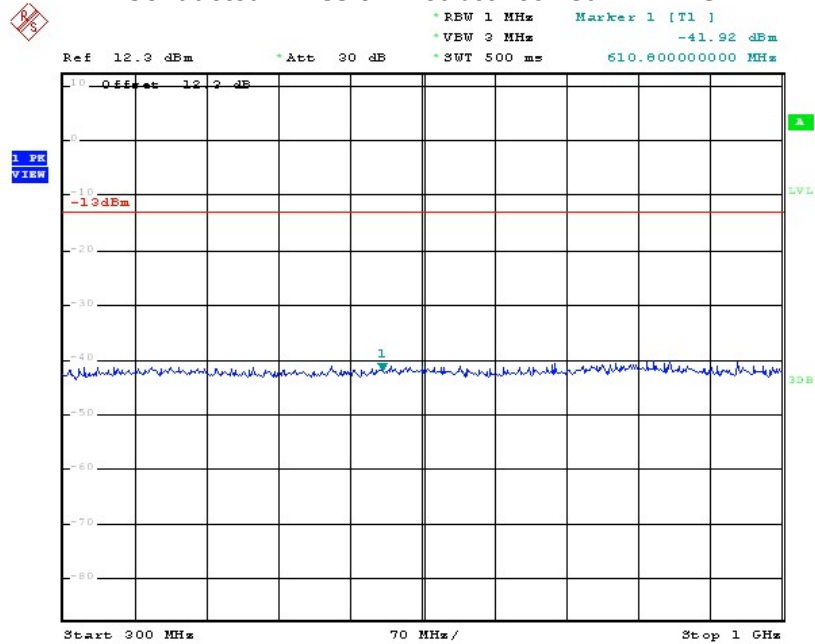
Conducted Emission Plot between 30MHz ~ 1GHz

Date: 29.MAR.2012 11:03:58

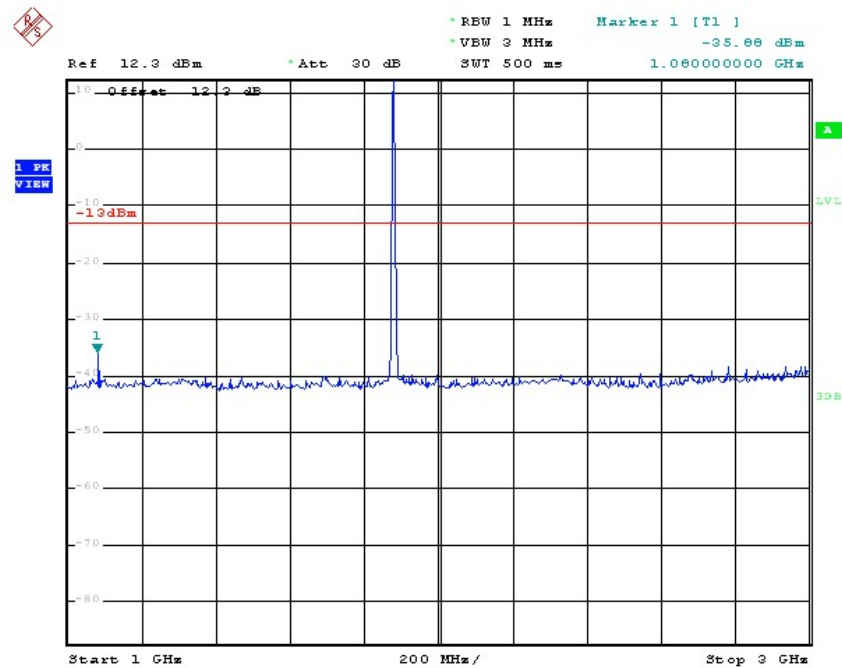Conducted Emission Plot between 1GHz ~ 3GHz


Date: 29.MAR.2012 11:02:40

Conducted Emission Plot between 3GHz ~ 7GHz

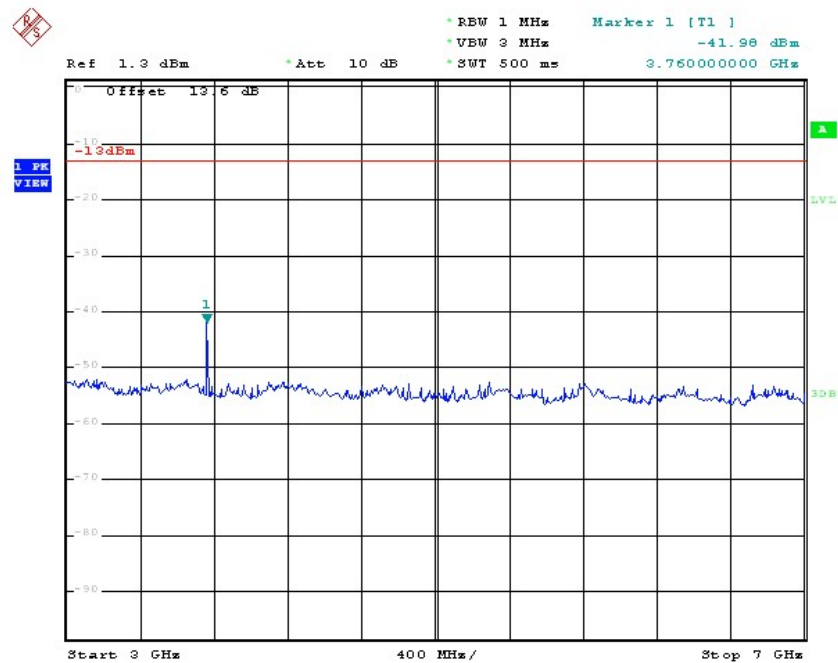


Date: 29.MAR.2012 11:01:32

Conducted Emission Plot between 7GHz ~ 13.6GHz

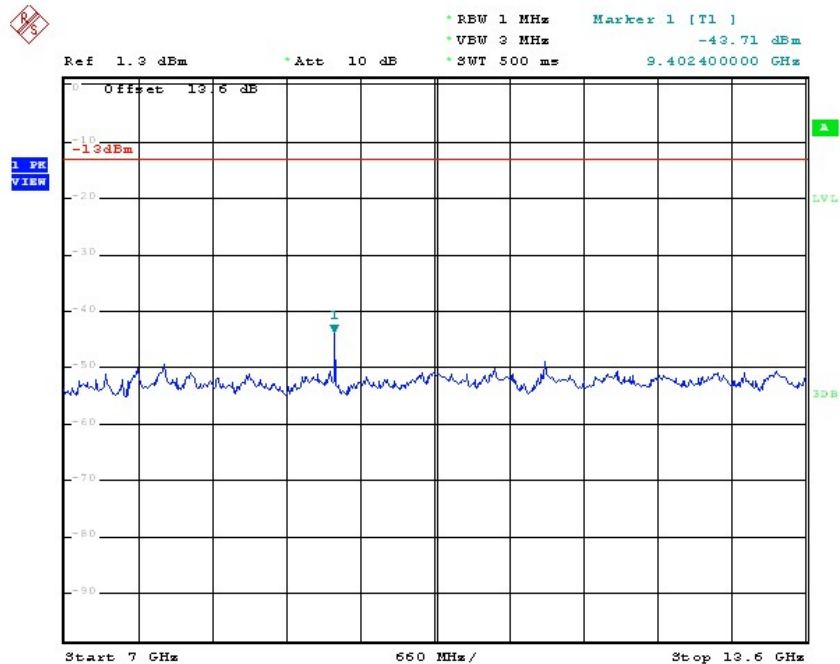

Date: 29.MAR.2012 10:59:47

Conducted Emission Plot between 13.6GHz ~ 19.1GHz

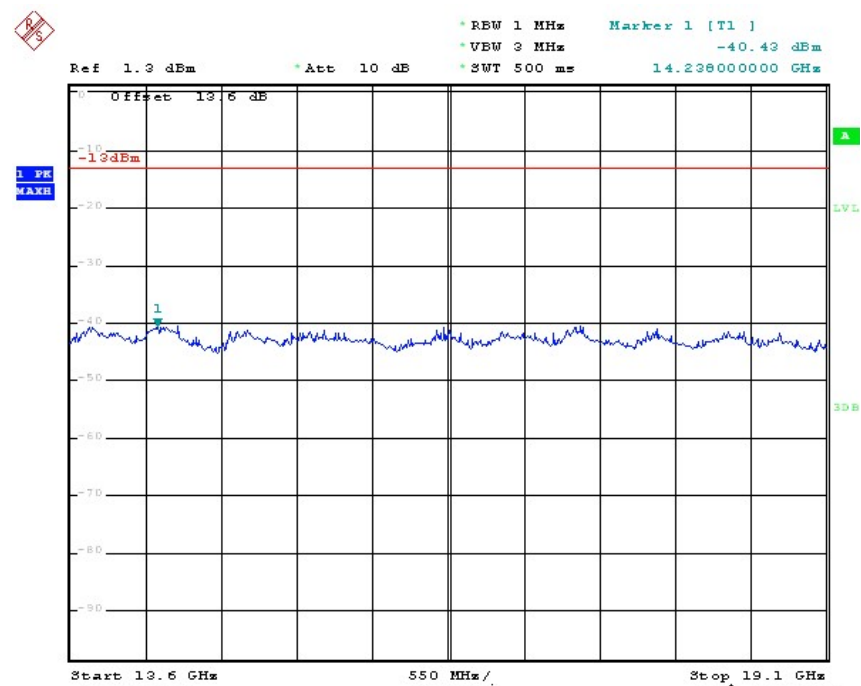

Date: 29.MAR.2012 10:58:56

3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedure


1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$

3.6.4 Test Setup

30MHz~1GHz

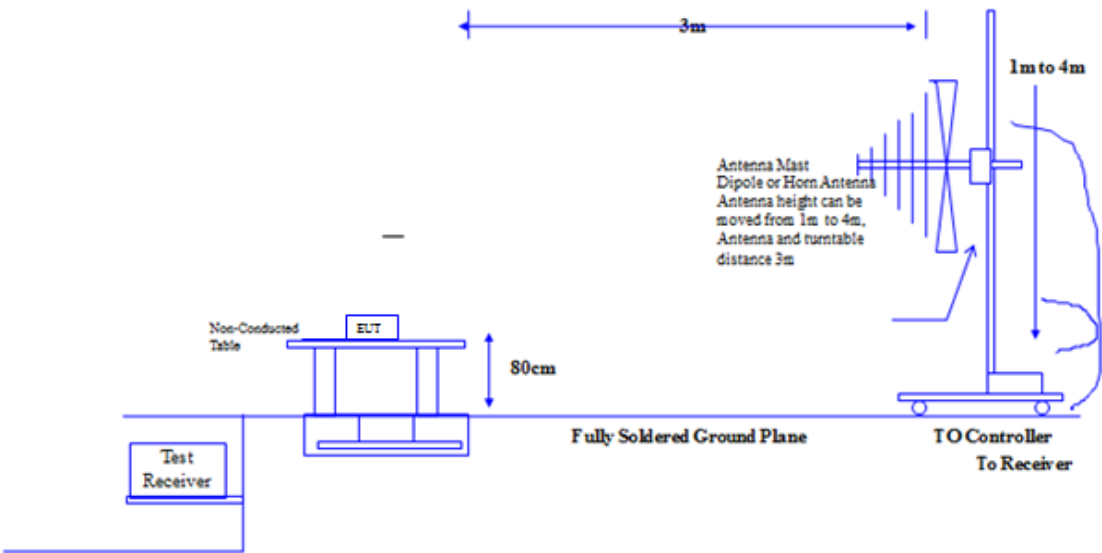


Above 1GHz

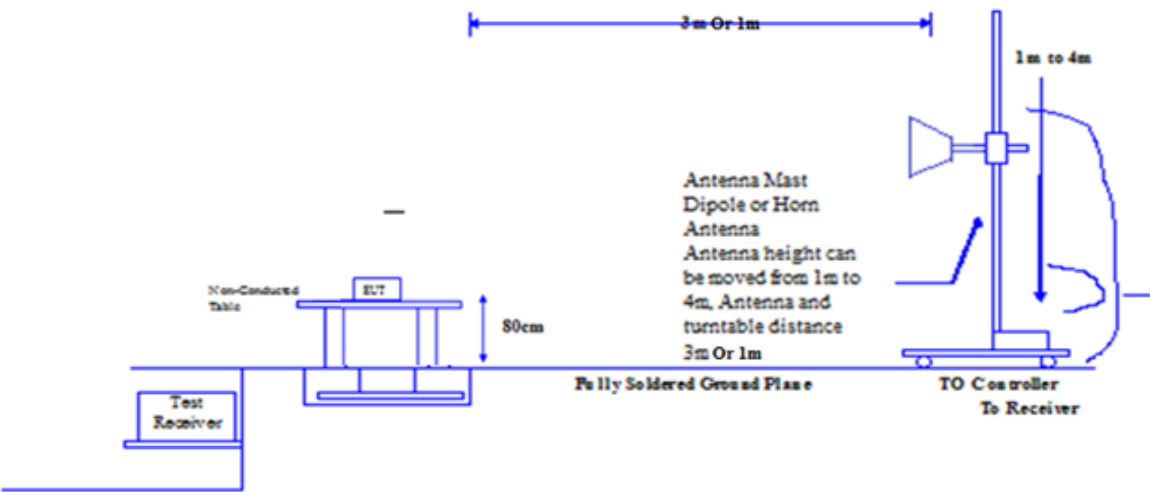


3.6.5 Test Result of Field Strength of Spurious Radiated (1G-9GHz / 1G-18GHz)

Band :	GSM850
Test Mode :	GSM850 Link + Adapter
Test Voltage	120V/60Hz


Field Strength of Spurious Radiated 30MHz-1GHz Vertical

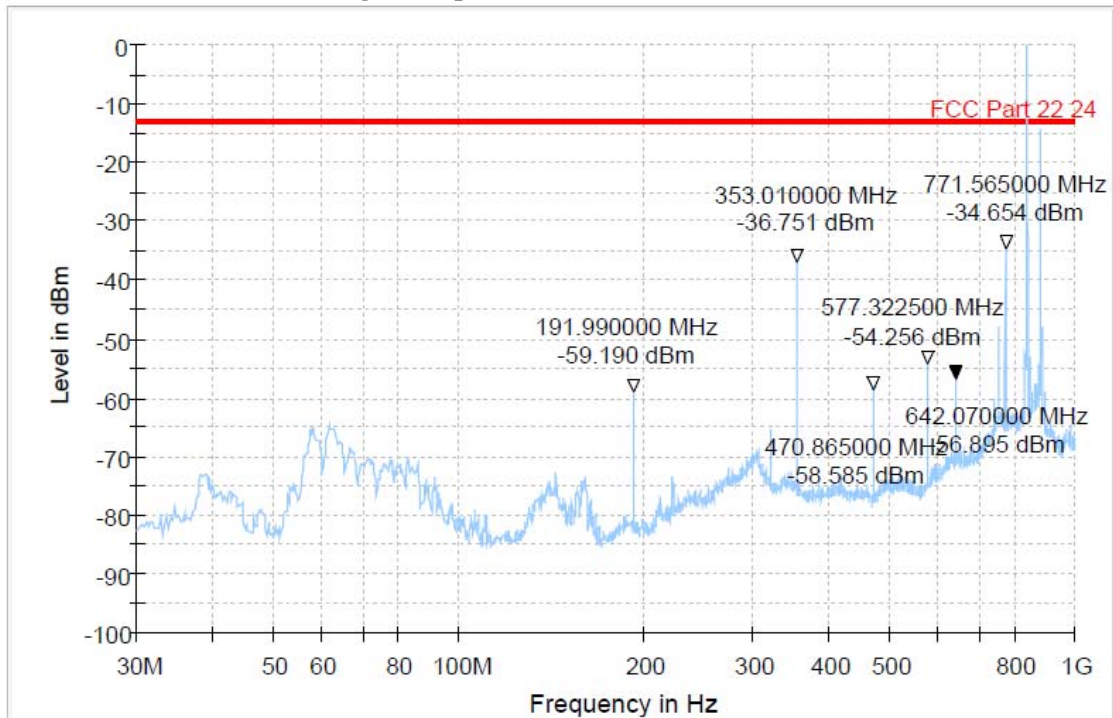


Field Strength of Spurious Radiated 1GHz-9GHz Vertical

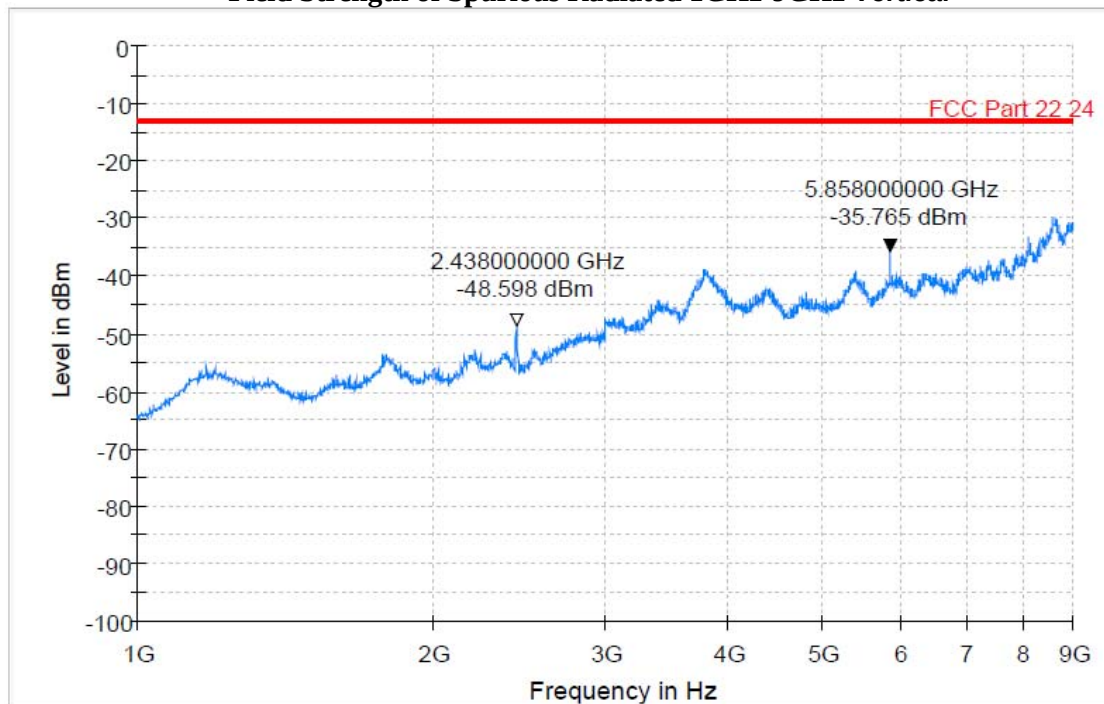



Field Strength of Spurious Radiated 30MHz-1GHz Horizontal

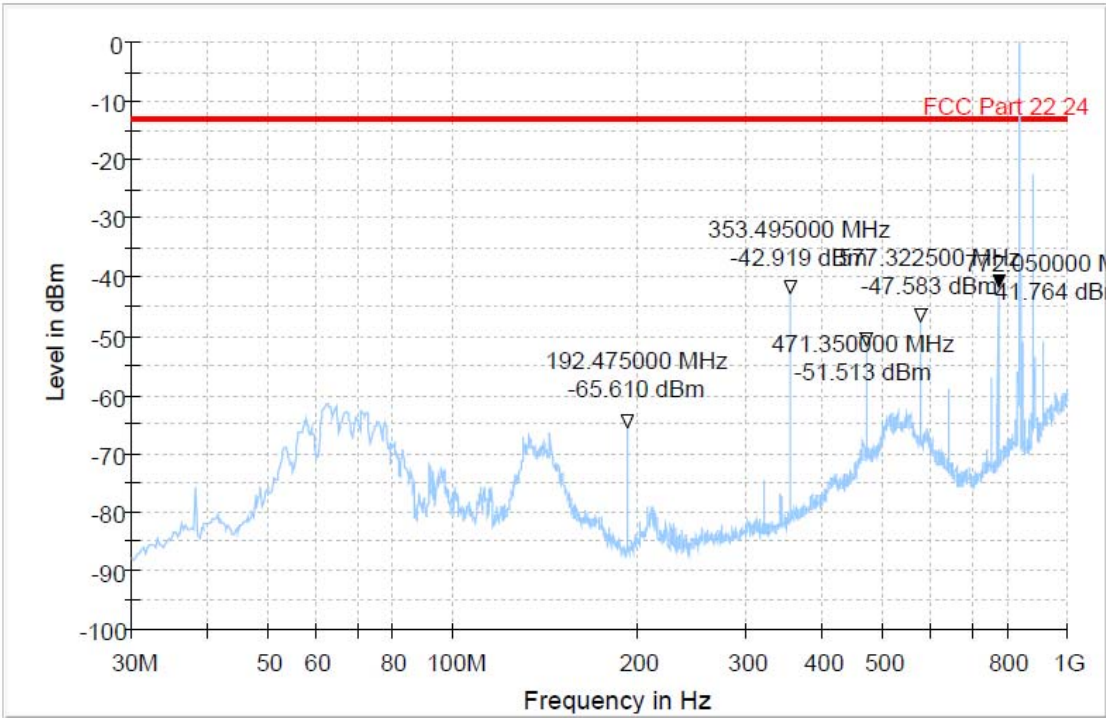



Field Strength of Spurious Radiated 1GHz-9GHz Horizontal

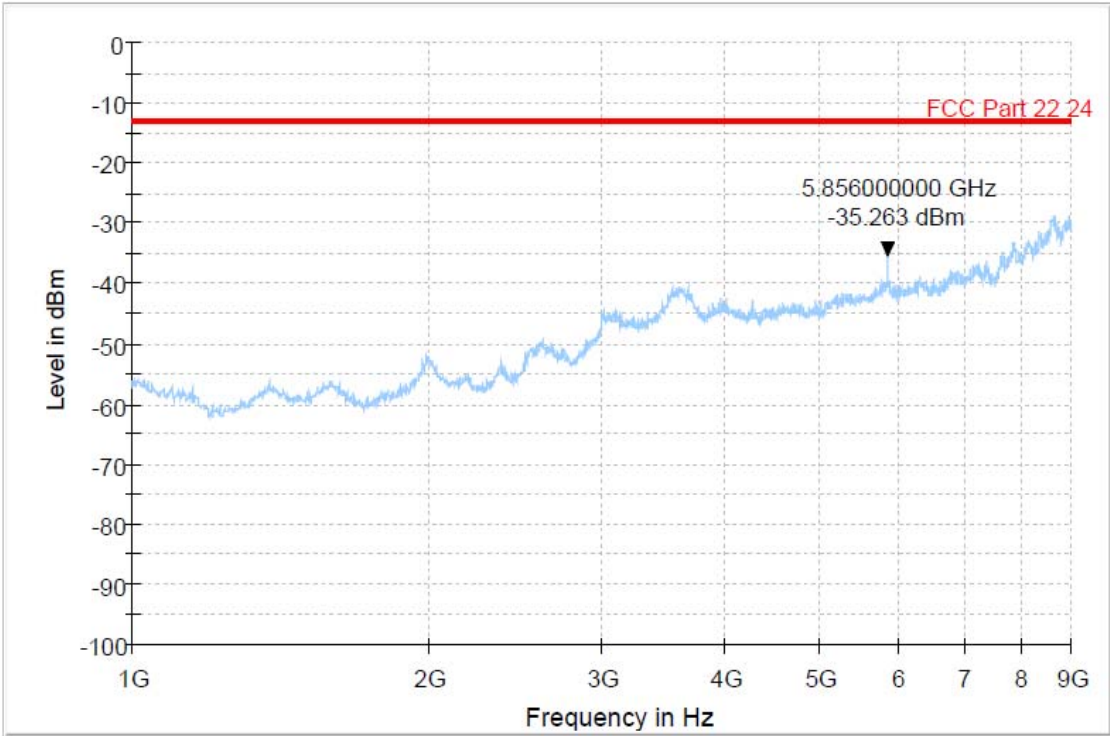



Band :	GSM1900
Test Mode :	GSM1900 Link + Adapter
Test Voltage	120V/60Hz

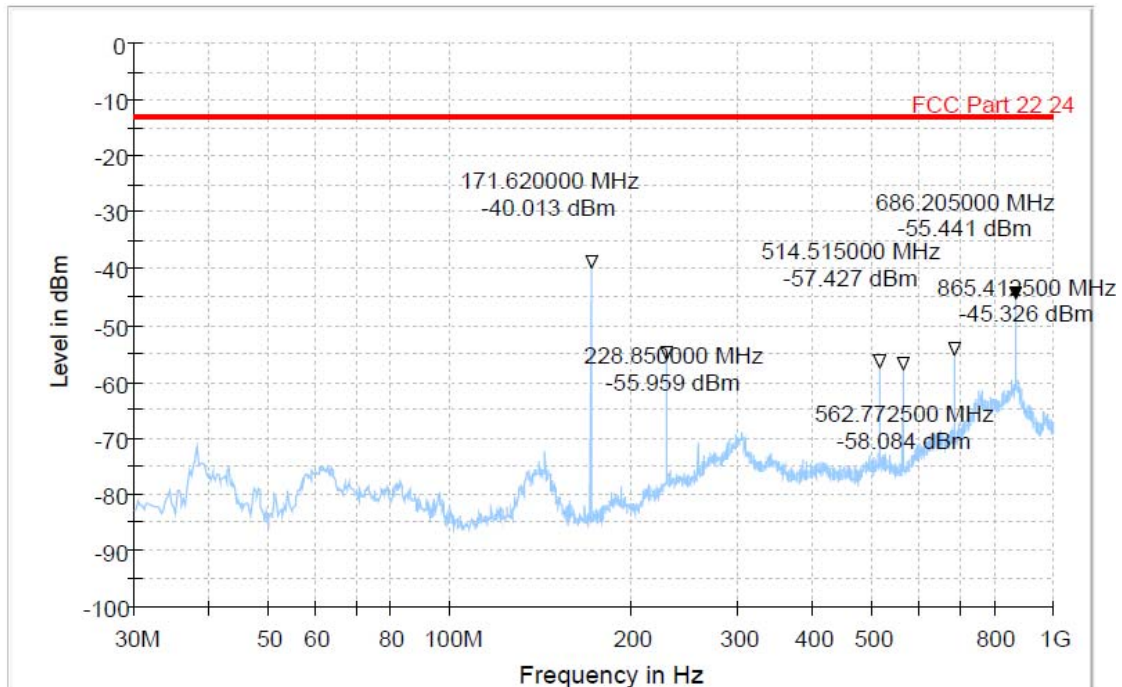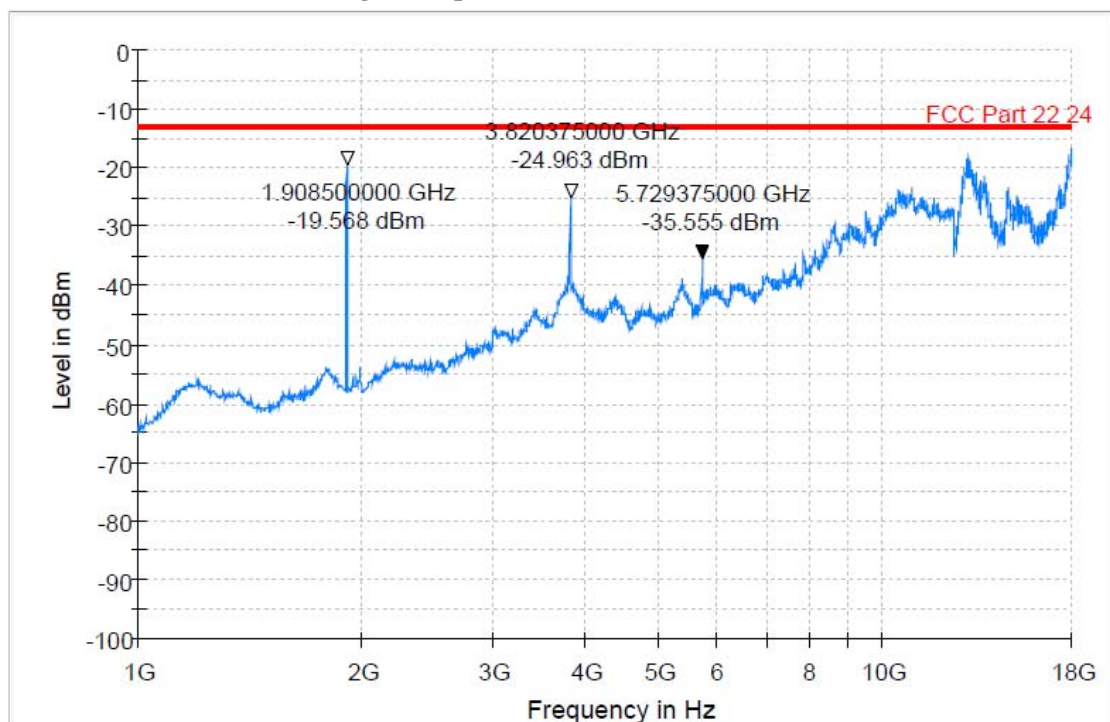Field Strength of Spurious Radiated 30MHz-1GHz Vertical**Field Strength of Spurious Radiated 1GHz-18GHz Vertical**


Band :	GSM1900
Test Mode :	GSM1900 Link + Adapter
Test Voltage	120V/60Hz

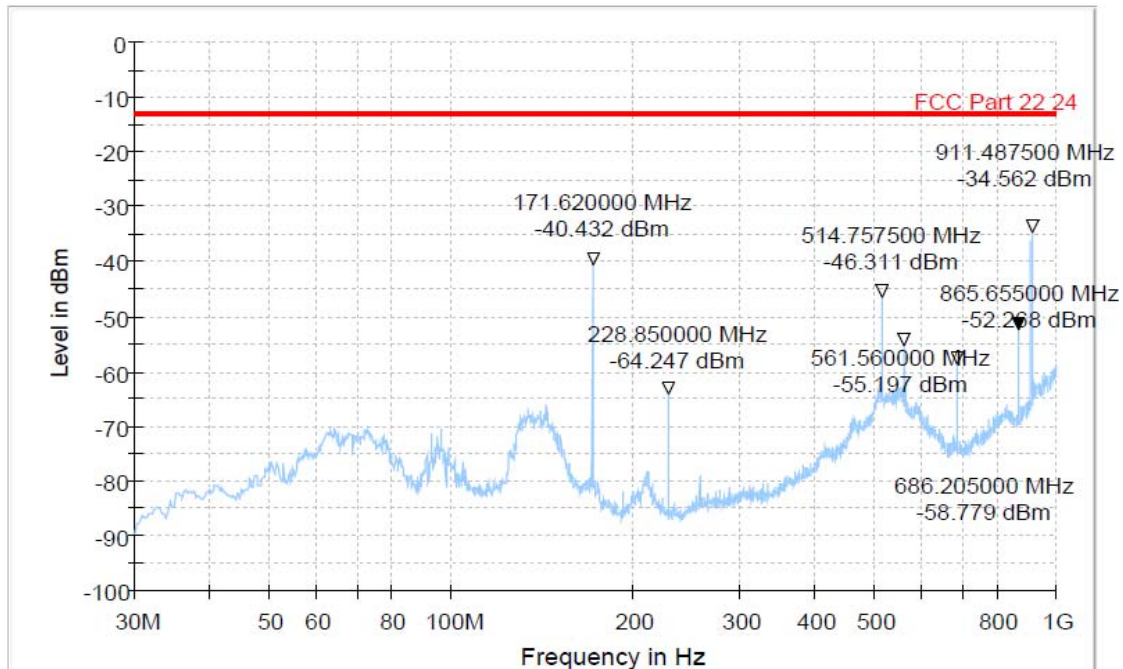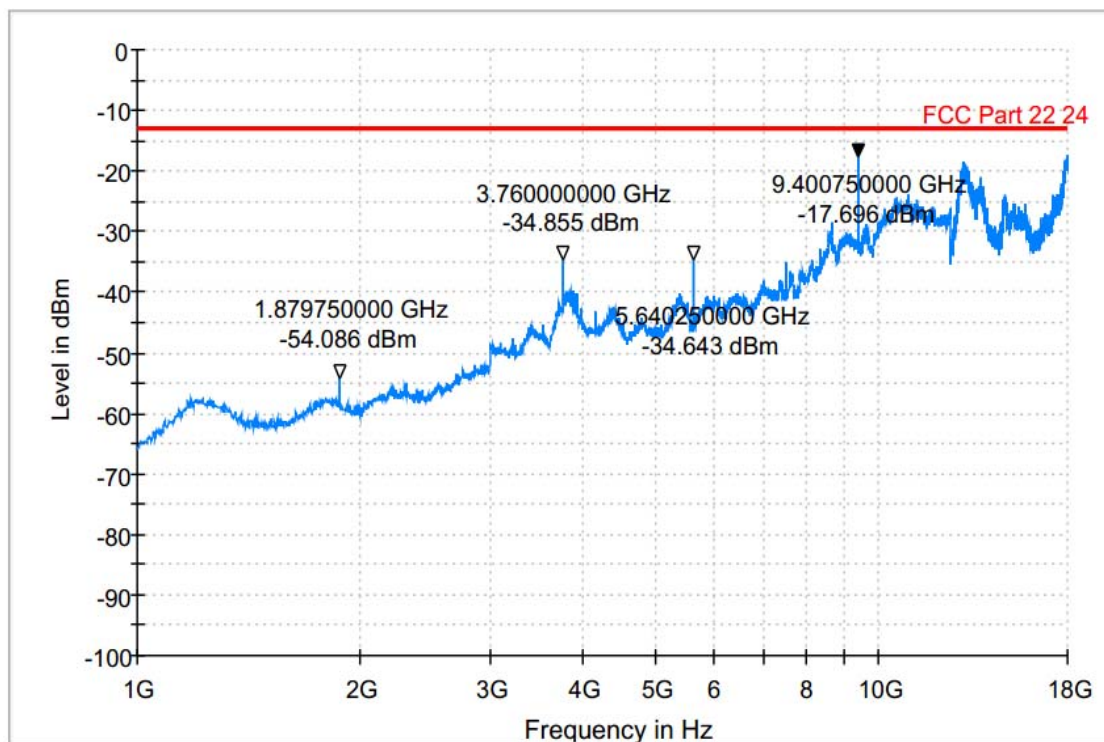Field Strength of Spurious Radiated 30MHz-1GHz Horizontal**Field Strength of Spurious Radiated 1GHz-18GHz Horizontal**


Band :	GPRS 850
Test Mode :	GPRS850 Link + Adapter
Test Voltage	120V/60Hz

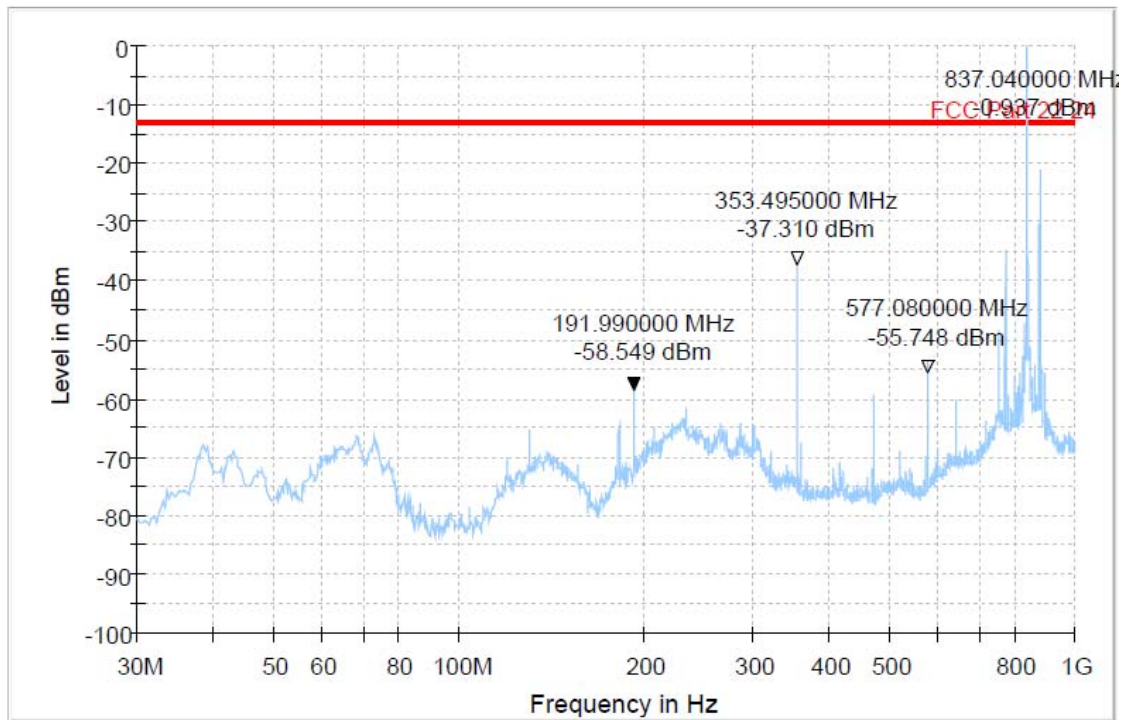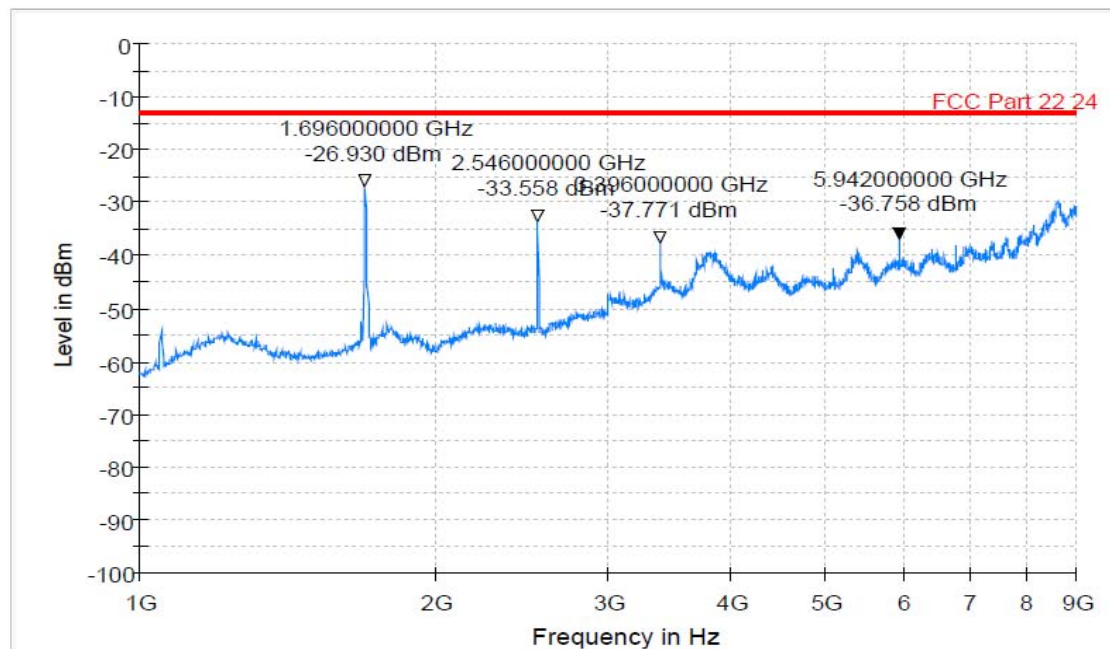Field Strength of Spurious Radiated 30MHz-1GHz Vertical**Field Strength of Spurious Radiated 1GHz-9GHz Vertical**



Field Strength of Spurious Radiated 30MHz-1GHz Horizontal


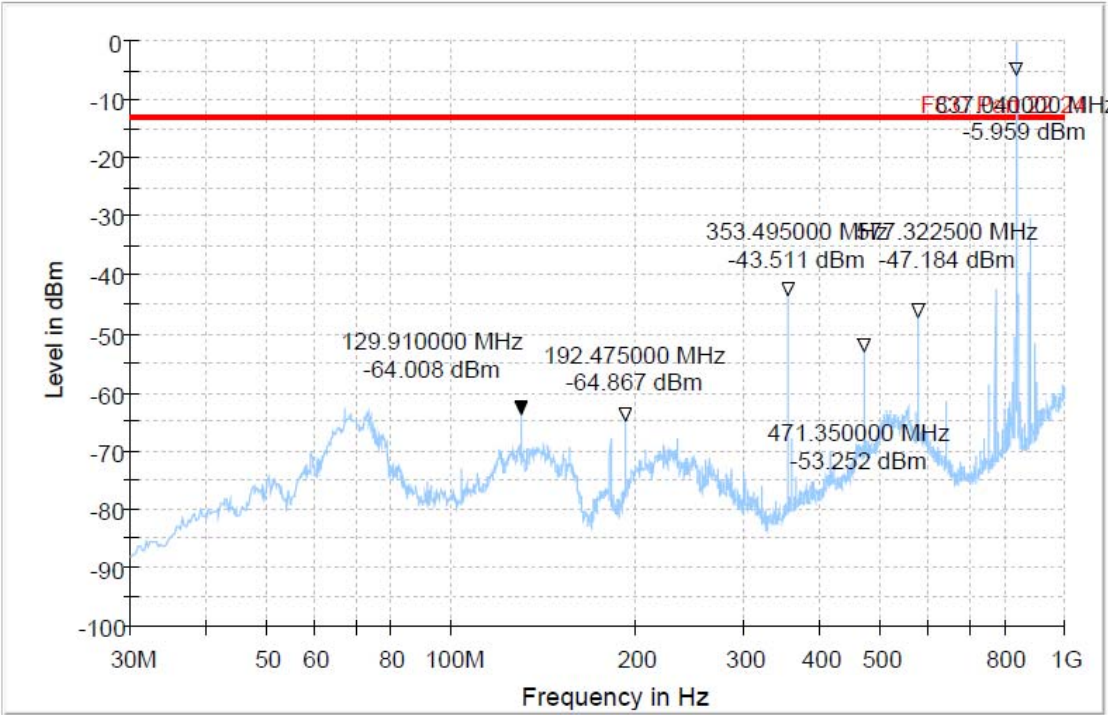


Field Strength of Spurious Radiated 1GHz-9GHz Horizontal

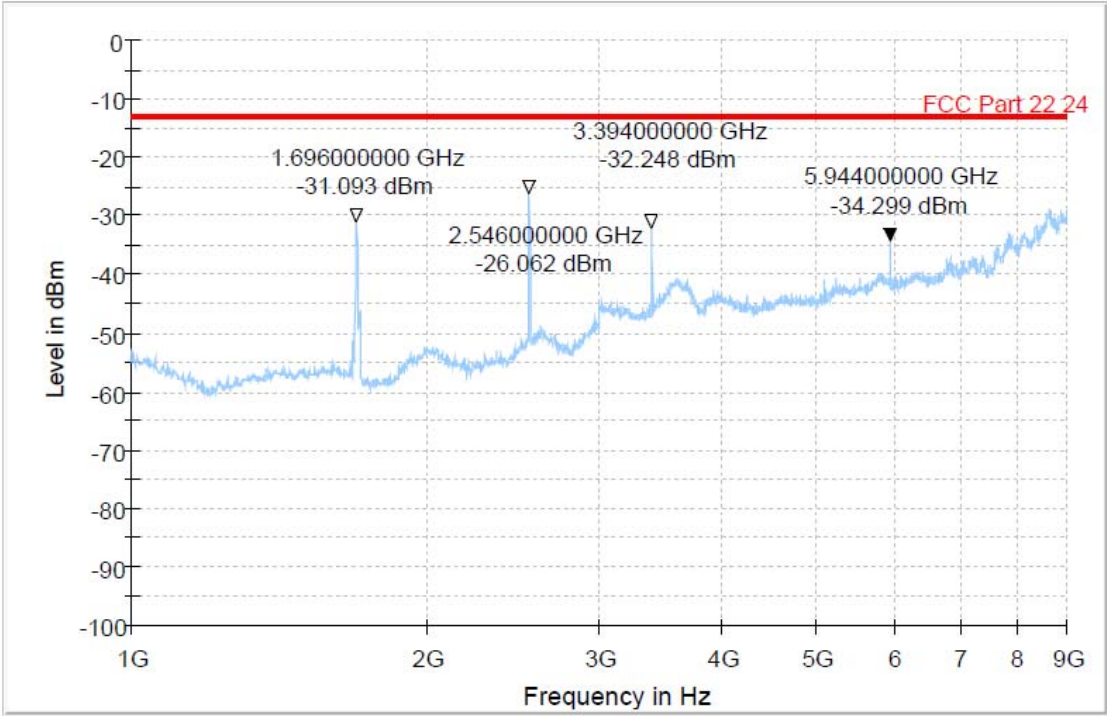

Band :	GPRS1900
Test Mode :	GPRS1900 Link + Adapter
Test Voltage	120V/60Hz

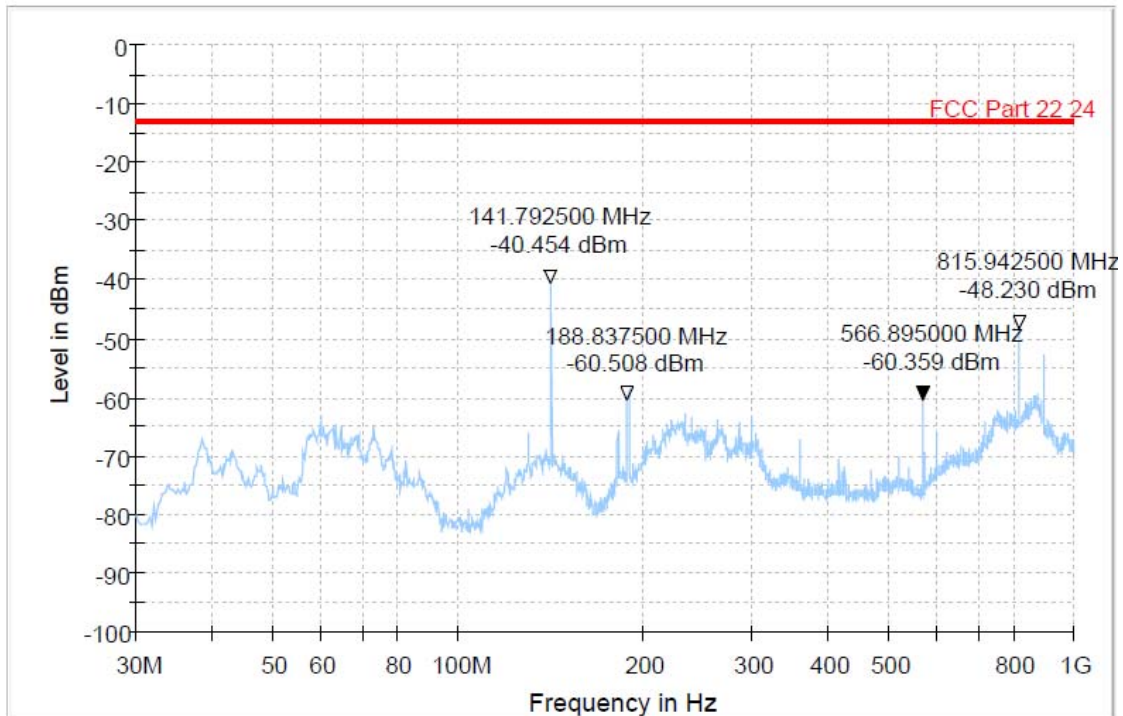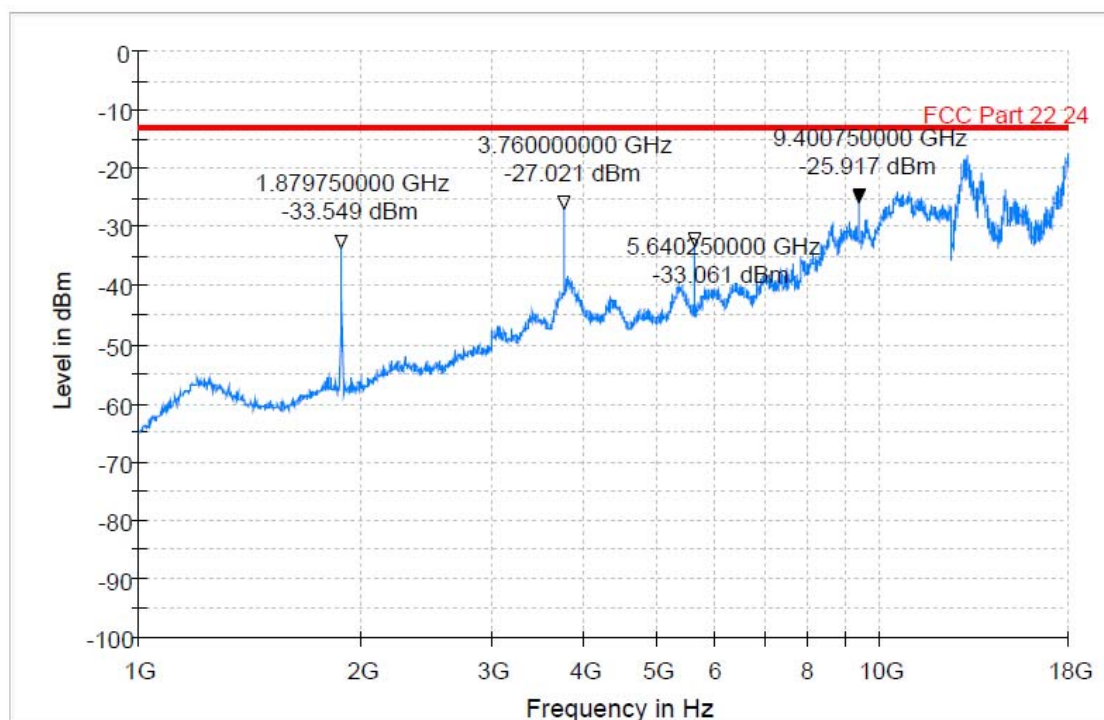Field Strength of Spurious Radiated 30MHz-1GHz Vertical**Field Strength of Spurious Radiated 1GHz-18GHz Vertical**

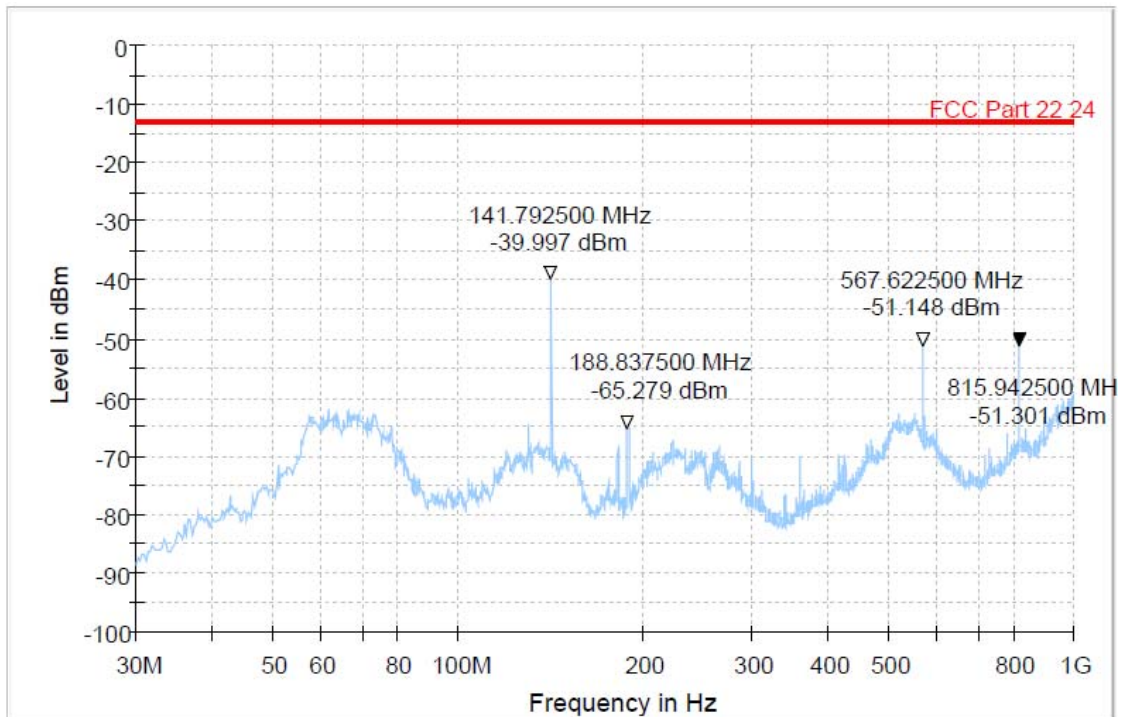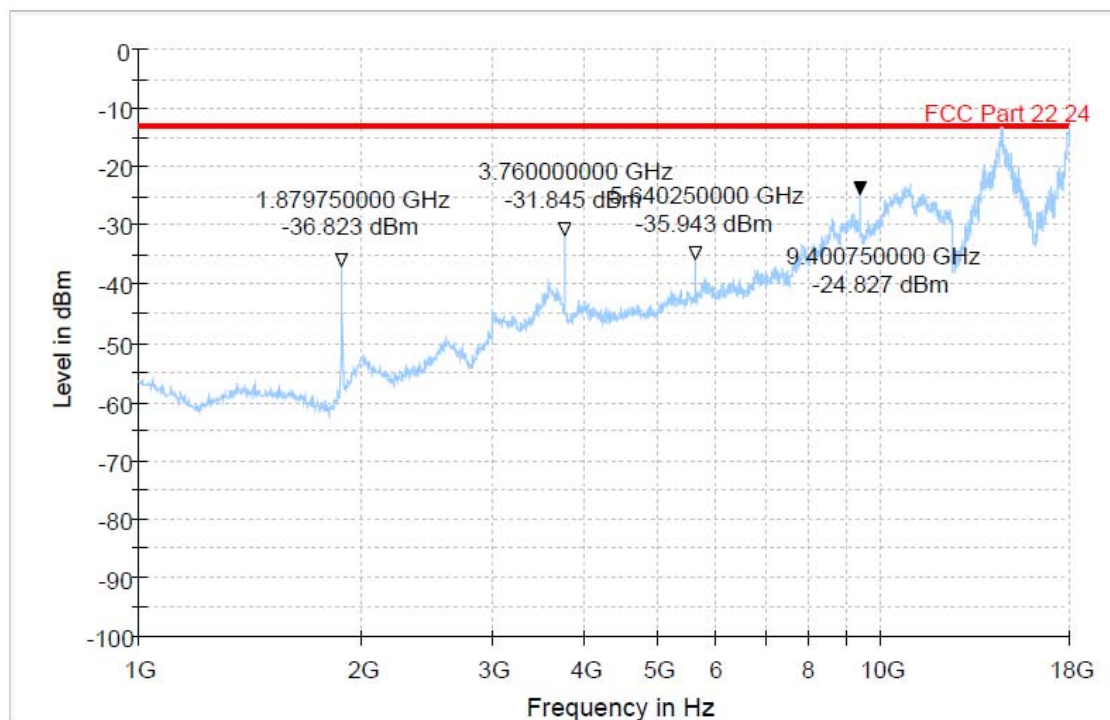Field Strength of Spurious Radiated 30MHz-1GHz Horizontal**Field Strength of Spurious Radiated 1GHz-18GHz Horizontal**

3.6.6 Radiated Emission Measurement Results (18GHz-19.1GHz)

Test Engineer :	Hogan. He	Temperature :	23℃~26℃
		Relative Humidity :	40%~60%

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Notes:

The amplitude of radiated emissions that are attenuated by more than 20dB below the permissible value has no need to be reported. The measurement performed at 1meter distance from turn table to antenna.

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Measuring Instruments

See list of measuring instruments of this test report.


3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each
4. step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
5. If the EUT can not be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.7.5 Test Setup

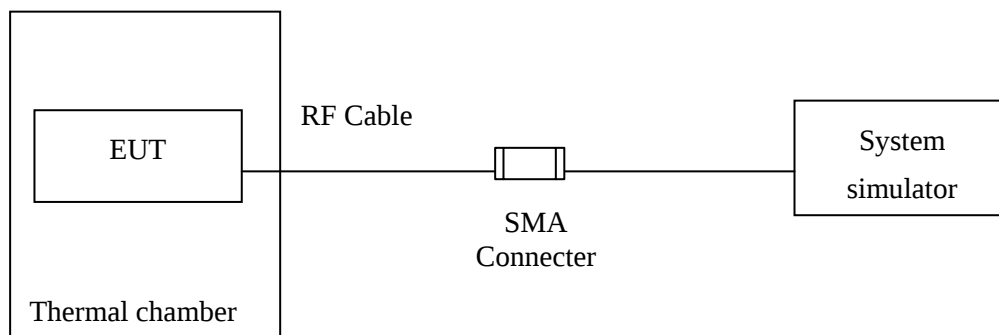

3.7.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature	GSM		GPRS		Result
	Feq. Dev. (Hz)	Deviation (ppm)	Feq. Dev. (Hz)	Deviation (ppm)	
-30	-56.2	-0.067	47.38	0.057	PASS
-20	-62.3	-0.074	-39.28	-0.047	
-10	-66.4	-0.079	-63.25	-0.076	
0	-62.3	-0.074	-45.61	-0.055	
10	43.7	0.052	-62.18	-0.074	
20	-43.2	-0.052	-55.74	-0.067	
30	-67.3	-0.080	-71.63	-0.086	
40	-71.3	-0.085	-64.62	-0.077	
50	-69.6	-0.083	-58.48	-0.070	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature	GSM		GPRS		Result
	Feq. Dev. (Hz)	Deviation (ppm)	Feq. Dev. (Hz)	Deviation (ppm)	
-30	43.9	0.023	-32.1	-0.017	PASS
-20	49.3	0.026	-43.2	-0.023	
-10	-67.2	-0.036	-59.4	-0.032	
0	-65.2	-0.035	-61.3	-0.033	
10	-47.2	-0.025	-58.4	-0.031	
20	-57.4	-0.031	-58.1	-0.031	
30	-63.5	-0.034	-62.4	-0.033	
40	-64.3	-0.034	-63.2	-0.034	
50	-62.4	-0.033	-70.3	-0.037	

3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Feq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	3.8	36.73	0.044	2.5	PASS
		3.55	-47.3	-0.057		
		4.2	52.1	0.062		
	GPRS	3.8	-57.2	-0.068		
		3.55	-62.4	-0.075		
		4.2	-35.3	-0.042		
GSM 1900 CH661	GSM	3.8	-52.3	-0.028		
		3.55	-42.4	-0.023		
		4.2	37.4	0.020		
	GPRS	3.8	-54.2	-0.029		
		3.55	-43.8	-0.023		
		4.2	-46.4	-0.025		

4 List of Measuring Equipment

No	Instrument/Ancillary	Provider	Type/Model	Cal. Date
01	Base Station	Agilent	E5515C	2011.12.14
02	Spectrum Analyzer	R&S	FSP30(9kHz~30GHz)	2011.07.19
03	Antenna	Schwarzbeck	VULB9165(30M-1G)	2011.11.09
04	Antenna	R&S	HF906(1G-18G)	2011.08.10
05	Antenna	Schwarzbeck	BBHA 9170 (15G-26.5G)	2011.11.09
06	High Pass Filter	R&S	System Integrated	2011.11.14
07	Thermal chamber	Hitachi	EC- 85MHP	2011.12.25
08	Pre-Amplifier	R&S	Pre-Amp	2012.1.18
09	Helical Antenna	ETS	3102 (1G-10G)	NCR
10	Power Meter	R&S	NRP(10MHz~8GHz)	2011.12.05
11	Relay Switch	R&S	TS-REMI	NCR


5 Uncertainty Evaluation


5.1 Uncertainty of Radiated Spurious Emission evaluation (30MHz~1GHz)



Radiated Spurious Emission Measurement Uncertainty Evaluation					
Contribution		Probability Distribution	Partition Coefficient	u(xi)	
				Horizontal 30-1000MHz	Vertical 30-1000MHz
Cable Loss Calibration	U ₀₁	U-Shape	1.41	0.17	0.17
Sine wave voltage accuracy of Spectrum analyzer	U ₀₂	Triangle	2.45	0.82	0.82
Impulse response of spectrum analyzer	U ₀₃	Triangle	2.45	0.61	0.61
Pulse repetition rate of spectrum analyzer	U ₀₄	Triangle	2.45	0.61	0.61
Spectrum analyzer noise level	U ₀₅	Normal	2.00	0.25	0.25
Measurement of the signal path mismatch	U ₀₆	U-Shape	1.41	0.13	0.13
Free-space antenna factor	U ₀₇	Normal	2.00	1.00	1.00
Antenna Factor Interpolation for Frequency	U ₀₈	Rectangular	1.73	0.17	0.17
Antenna factor with height in the correlation	U ₀₉	Rectangular	1.73	0.17	0.17
Measurement antenna and the absorbing material in the image of the mutual coupling effect	U ₁₀	Rectangular	1.73	0.50	0.50
Antenna phase center variation	U ₁₁	Rectangular	1.73	0.58	0.58
Antenna cross polarization response	U ₁₂	Rectangular	1.73	0.52	0.52
Antenna imbalance	U ₁₃	Rectangular	1.73	0.52	0.52
Test distance error	U ₁₄	Rectangular	1.73	0.17	0.17
Desktop terrain clearance variation	U ₁₅	Normal	2.00	0.05	0.05
Random uncertainty	U ₁₆	Standard deviation	1.00	0.20	0.19
Pre-Amplifier gain Calibration	U ₁₇	U-Shape	1.41	0.13	0.13
Combined Standard Uncertainty U _c (y)	U _c	Normal	1.00	1.95	1.95
Measuring Uncertainty for a level of Confidence of 95%(U=2U _c (y))	U=kU _c	Normal	2	3.90	3.89



5.2 Uncertainty of Radiated Spurious Emission evaluation (1GHz~26.5GHz)

Radiated Spurious Emission Measurement Uncertainty Evaluation					
Contribution		Probability Distribution	Partition Coefficient	u(xi)	
				Horizontal 1-18GHz	Vertical 1-18GHz
Cable Loss Calibration	U01	U-Shape	1.41	0.17	0.17
Sine wave voltage accuracy of Spectrum analyzer	U02	Triangle	2.45	0.82	0.82
Impulse response of spectrum analyzer	U03	Triangle	2.45	0.61	0.61
Pulse repetition rate of spectrum analyzer	U04	Triangle	2.45	0.61	0.61
Spectrum analyzer noise level	U05	Normal	2.00	0.25	0.25
Measurement of the signal path mismatch	U06	U-Shape	1.41	0.13	0.13
Free-space antenna factor	U07	Normal	2.00	1.00	1.00
Antenna Factor Interpolation for Frequency	U08	Rectangular	1.73	0.17	0.17
Antenna factor with height in the correlation	U09	Rectangular	1.73	NA	NA
Measurement antenna and the absorbing material in the image of the mutual coupling effect	U10	Rectangular	1.73	0.50	0.50
Antenna phase center variation	U11	Rectangular	1.73	0.58	0.58
Antenna cross polarization response	U12	Rectangular	1.73	0.52	0.52
Antenna imbalance	U13	Rectangular	1.73	0.52	0.52
Test distance error	U14	Rectangular	1.73	0.17	0.17
Desktop terrain clearance variation	U15	Normal	2.00	0.05	0.05
Random uncertainty	U16	Standard deviation	1.00	0.22	0.23
Pre-Amplifier gain Calibration	U17	U-Shape	1.41	0.13	0.13
Combined Standard Uncertainty $U_c(y)$	U_c	Normal	1.00	1.94	1.94
Measuring Uncertainty for a level of Confidence of 95%($U=2U_c(y)$)	$U=kU_c$	Normal	2	3.89	3.89

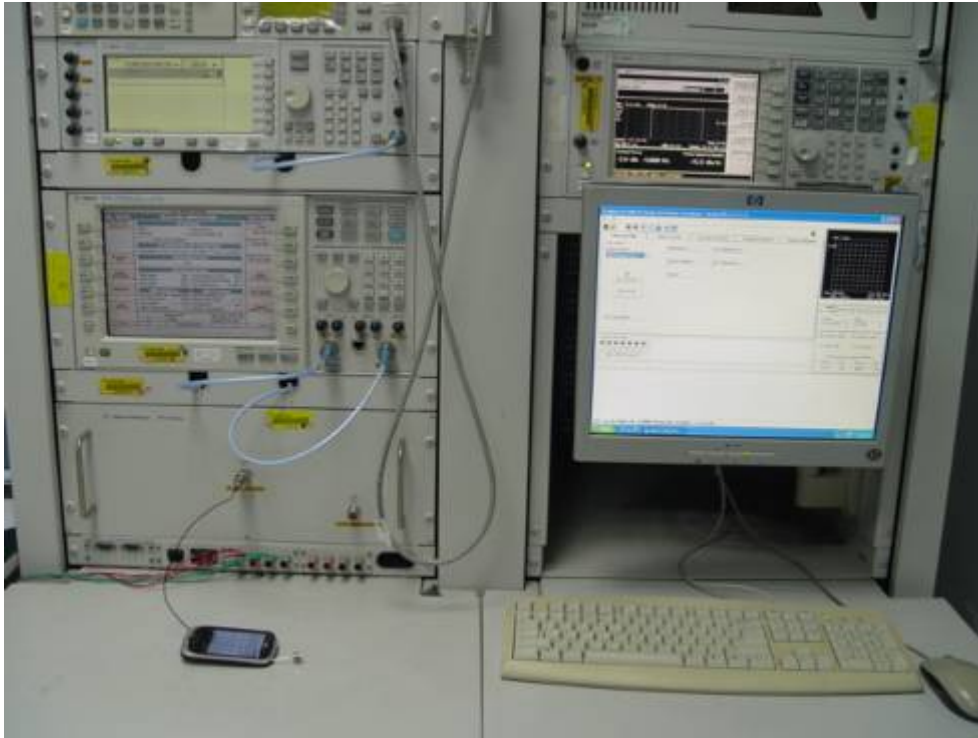APPENDIX C. SETUP PHOTOGRAPHS**FCC Part 22H/24E Output Power Measurement**

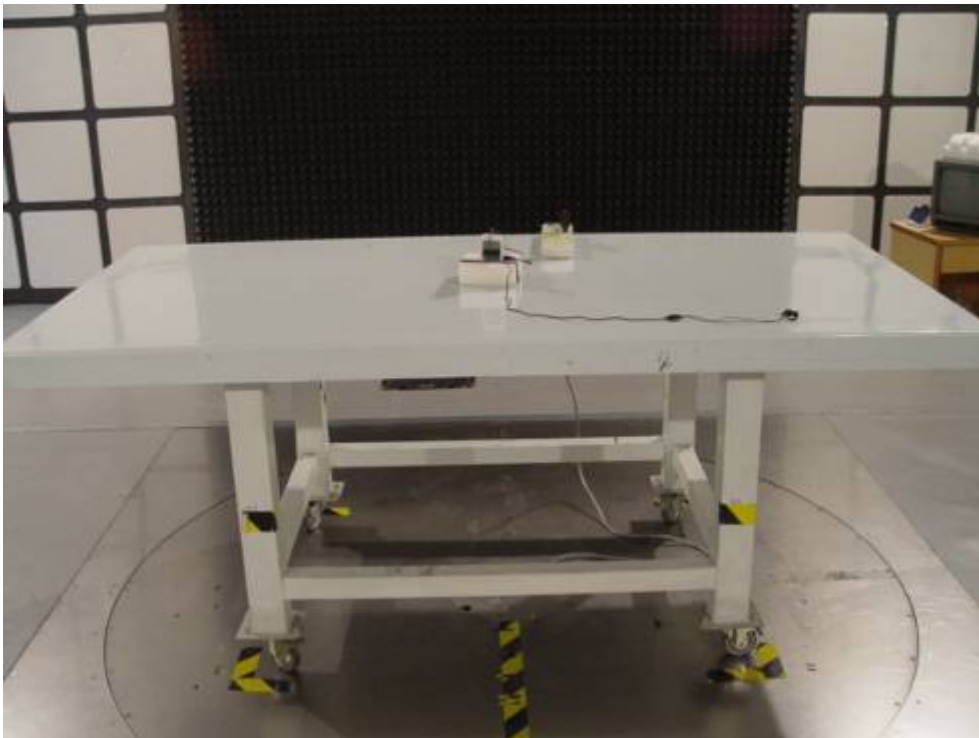FCC Part 22H/24E Radiated Emission below 1GHz**- Front****-Rear**

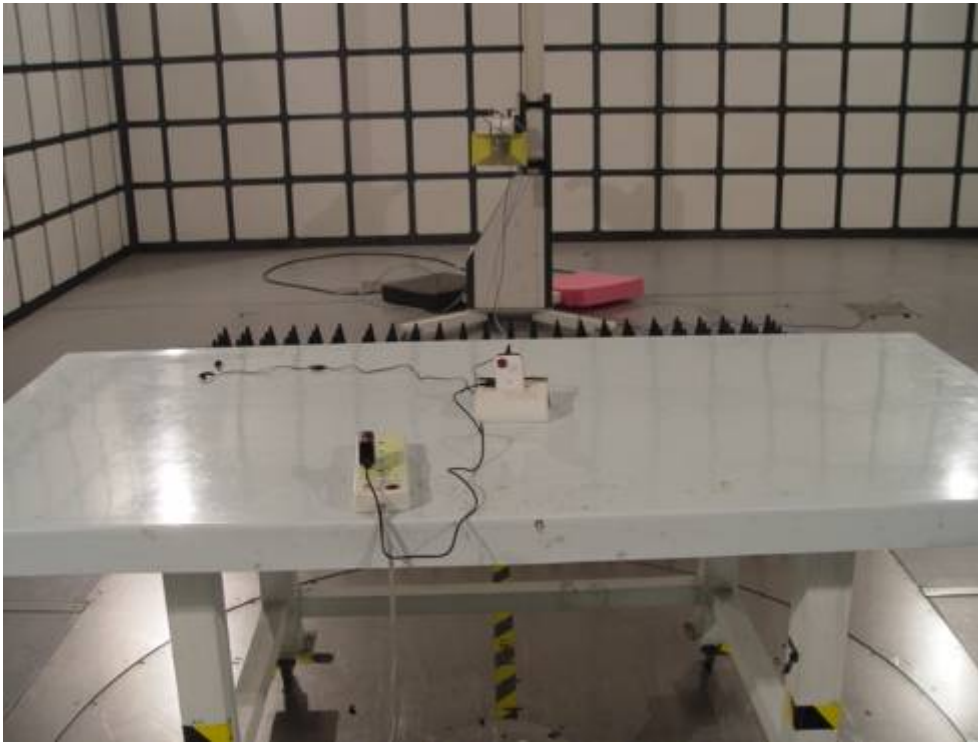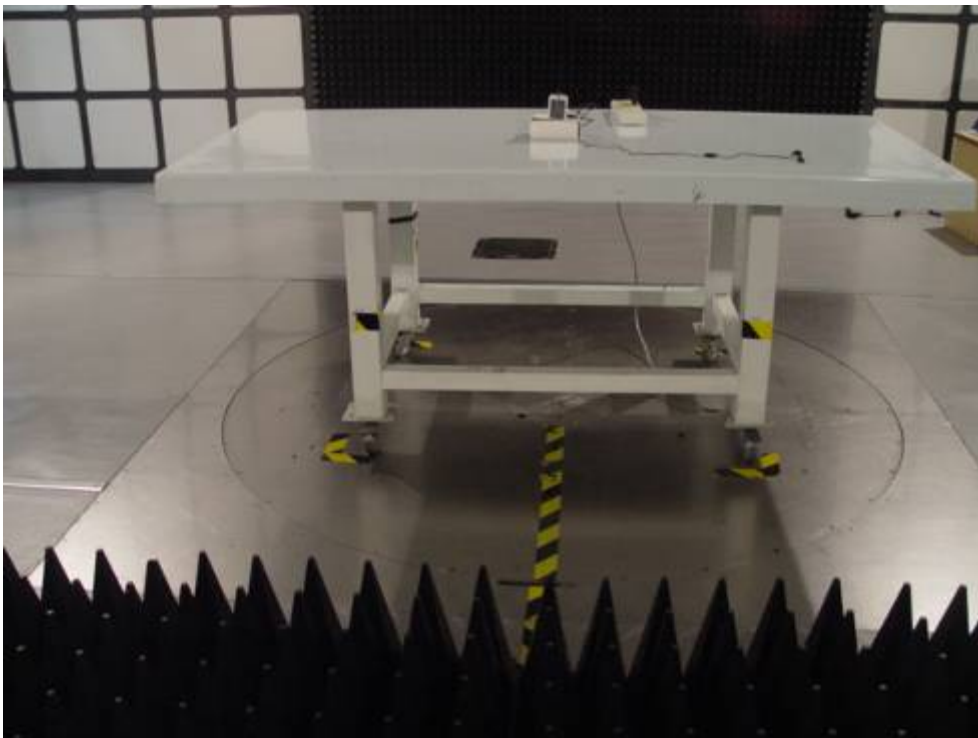FCC Part 22H/24E Radiated Emission above 1GHz**-Front****-Rear**

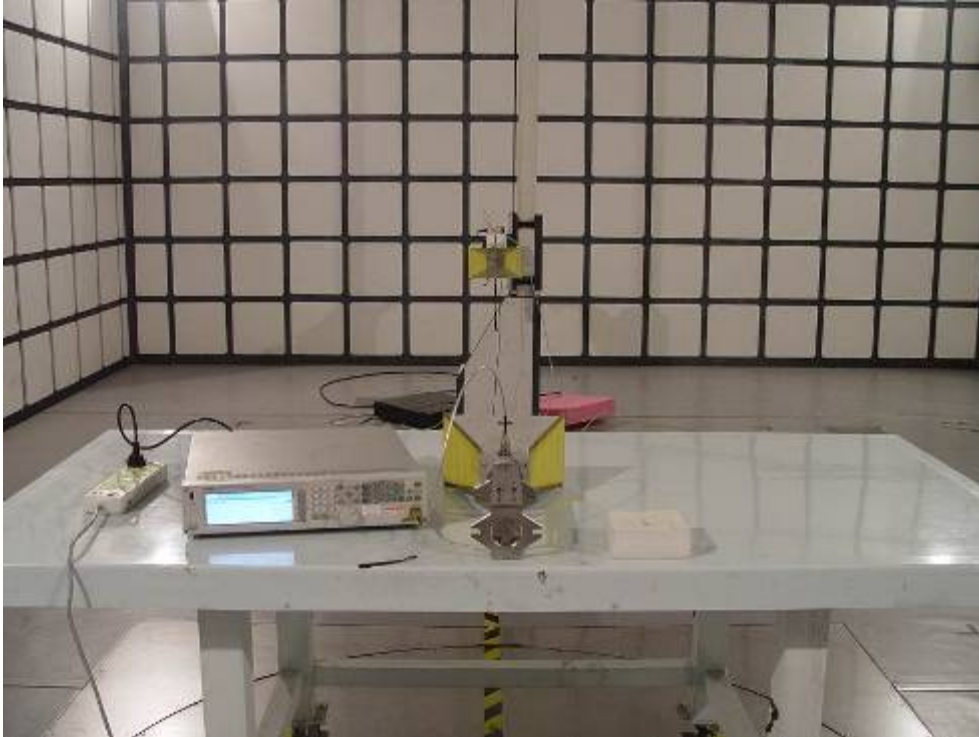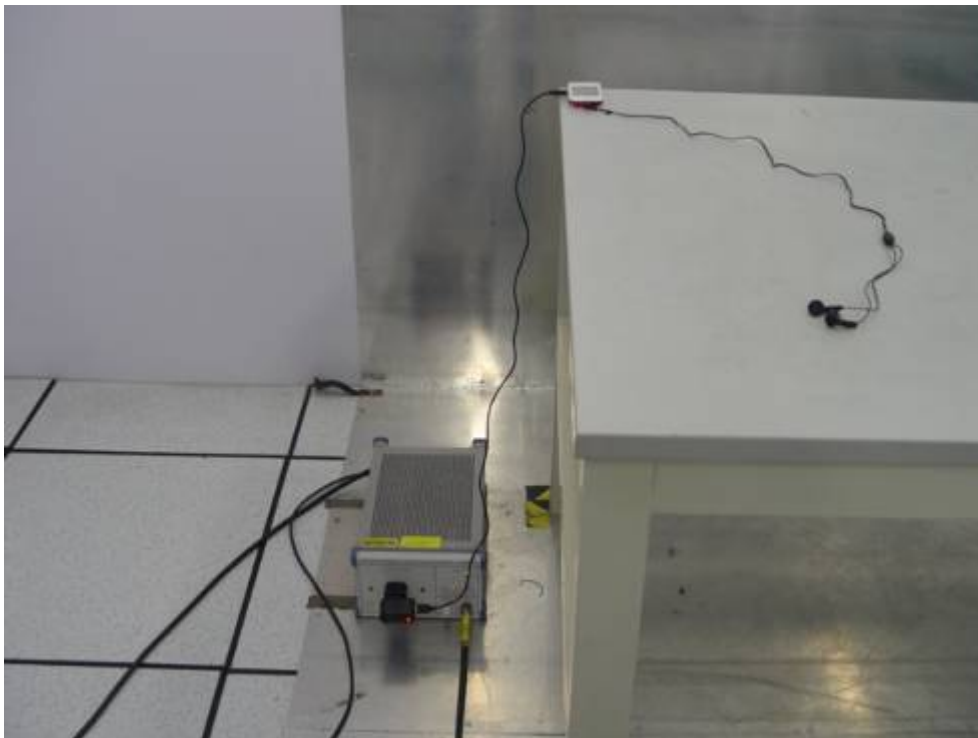ERP and EIRP Test Setup**AC Conducted Emission Test Setup****END.**