



BUREAU
VERITAS

Test Report No.: RF130816N020



TEST REPORT

Applicant	Jing Mold Electronics Technology(Shen Zhen)CO., LTD.
Address	Xinqiao, 3rd Industrial Estate, Shajing Baoan, Shenzhen, China

Manufacturer or Supplier	Lenovo PC HK Limited
Address	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong
Product	Bluetooth Keyboard Cover
Brand Name	lenovo
Model	BKC600
Additional Model & Model Difference	N/A
Date of tests	Aug. 16, 2013 ~ Aug. 21, 2013

the tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C , Section 15.249(2012-10)

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Venless long Project Engineer / EMC Department	Approved by Glyn He Supervisor / EMC Department

Date: Aug. 21, 2013

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



BUREAU
VERITAS

Test Report No.: RF130816N020

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY.....	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4 DESCRIPTION OF SUPPORT UNITS	8
4 TEST TYPES AND RESULTS.....	9
4.1 CONDUCTED EMISSION MEASUREMENT	9
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2 TEST INSTRUMENTS.....	9
4.1.3 TEST PROCEDURES	10
4.1.4 DEVIATION FROM TEST STANDARD	10
4.1.5 TEST SETUP	11
4.1.6 EUT OPERATING CONDITIONS	11
4.1.7 TEST RESULTS	12
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURES.....	16
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS.....	18
4.3 20dB BANDWIDTH MEASUREMENT.....	23
4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT	23
4.3.2 TEST INSTRUMENTS	23
4.3.3 TEST PROCEDURE	23
4.3.4 DEVIATION FROM TEST STANDARD	23
4.3.5 TEST SETUP	24
4.3.6 EUT OPERATING CONDITIONS.....	24
4.3.7 TEST RESULTS.....	24



BUREAU
VERITAS

Test Report No.: RF130816N020

5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	27
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	28



BUREAU
VERITAS

Test Report No.: RF130816N020

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130816N020	Original release	Aug. 21, 2013



BUREAU
VERITAS

Test Report No.: RF130816N020

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.249)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used
§15.207 (a)	Conducted Emission	PASS	Compliant
§15.205	Restricted Band of Operation	PASS	Compliant
§15.209 §15.249(a)	Radiated Emission	PASS	Compliant
§15.215(c)	20dB Bandwidth Test	PASS	Compliant

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.67dB
Radiated emissions	9KHz ~30MHz	2.74dB
	30MHz ~1GHz	4.81dB
	1GHz ~ 18GHz	4.3 dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



BUREAU
VERITAS

Test Report No.: RF130816N020

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth Keyboard Cover
MODEL NO.	BKC600
FCC ID	FPWBKC600
NOMINAL VOLTAGE	DC 3.7V from Battery or DC 5V from USB
MODULATION TECHNOLOGY	FHSS
MODULATION TYPE	GFSK
OPERATING FREQUENCY	2402-2480MHz
ANTENNA TYPE	Integral PCB Antenna with gain 1.94dBi
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB Cable: Unshielded, Detachable 1.0m

NOTE:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. This EUT is only support GFSK.



BUREAU
VERITAS

Test Report No.: RF130816N020

3.2 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on X axis for radiated emission. The EUT was tested under the following modes, and the final worst is marked in boldface and recorded in the report.

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	BW	
-	√	√	√	√	Powered by battery with Bluetooth link

Where

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

BW: 20db bandwidth

Following channel(s) was (were) selected for the test as listed below:

TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	PACKET TYPE
Low, Middle, High	FHSS	GFSK	1M	DH1/3/5

CHANNEL NUMBER	TESTED CHANNEL	TESTED FREQUENCY
0	Low	2402 MHz
39	Middle	2441 MHz
78	High	2480 MHz

After estimating all the combination of every test mode, the result shown as below is the worst case

TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	PACKET TYPE
Low, Middle, High	FHSS	GFSK	1M	DH5



BUREAU
VERITAS

Test Report No.: RF130816N020

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.249(2012-10)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	HP	A6608CN	3CR83825X3	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m



BUREAU
VERITAS

Test Report No.: RF130816N020

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU 26	100005	May 14,13	May 13,14
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	May 14,13	May 13,14
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	May 14,13	May 13,14
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
2. The test was performed in Shielded Room 553.



BUREAU
VERITAS

Test Report No.: RF130816N020

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.



BUREAU
VERITAS

Test Report No.: RF130816N020

4.1.5 TEST SETUP

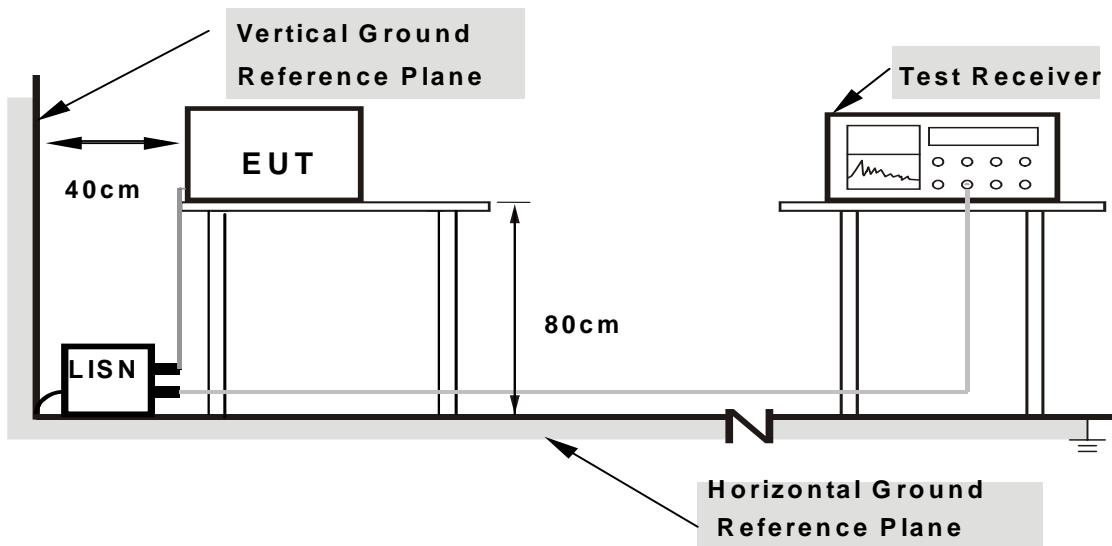

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

BUREAU
VERITAS

Test Report No.: RF130816N020

4.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA

PHASE	Line 1	6dB BANDWIDTH		9kHz	
-------	--------	---------------	--	------	--

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18508	10.57	26.73	19.62	37.3	30.19	64.25	54.25	-26.95	-24.06
2	0.40800	10.33	26.63	14.78	36.96	25.11	57.69	47.69	-20.73	-22.58
3	1.87431	9.91	31.11	21.29	41.02	31.2	56	46	-14.98	-14.8
4	3.95052	9.93	22.9	18.33	32.83	28.26	56	46	-23.17	-17.74
5	7.21062	9.98	18.79	14.67	28.77	24.65	60	50	-31.23	-25.35
6	16.57591	10.38	18.3	12.59	28.68	22.97	60	50	-31.32	-27.03

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

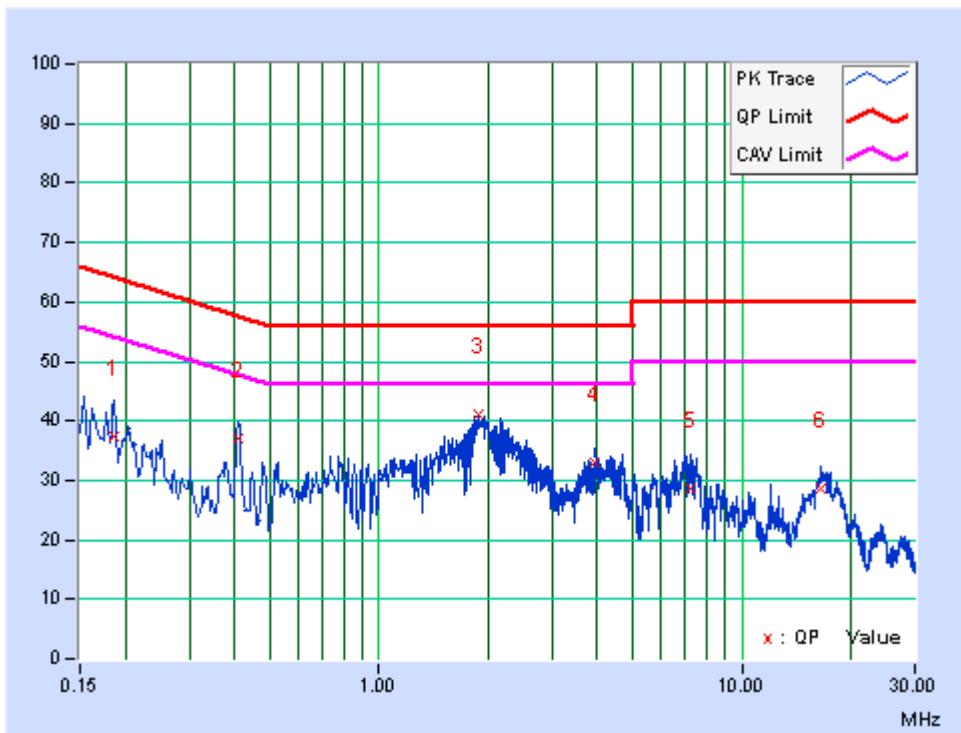

BUREAU
VERITAS


Test Report No.: RF130816N020

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	10.51	32.72	24.74	43.23	35.25	65.37	55.37	-22.14	-20.12
2	0.44978	10.5	28.47	27.93	38.97	38.43	56.88	46.88	-17.91	-8.45
3	1.80803	9.72	20.18	10.21	29.9	19.93	56	46	-26.1	-26.07
4	3.97007	9.74	26.38	17.11	36.12	26.85	56	46	-19.88	-19.15
5	5.07269	9.78	15.78	9.29	25.56	19.07	60	50	-34.44	-30.93
6	17.33836	10.46	21.79	16.06	32.25	26.52	60	50	-27.75	-23.48

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

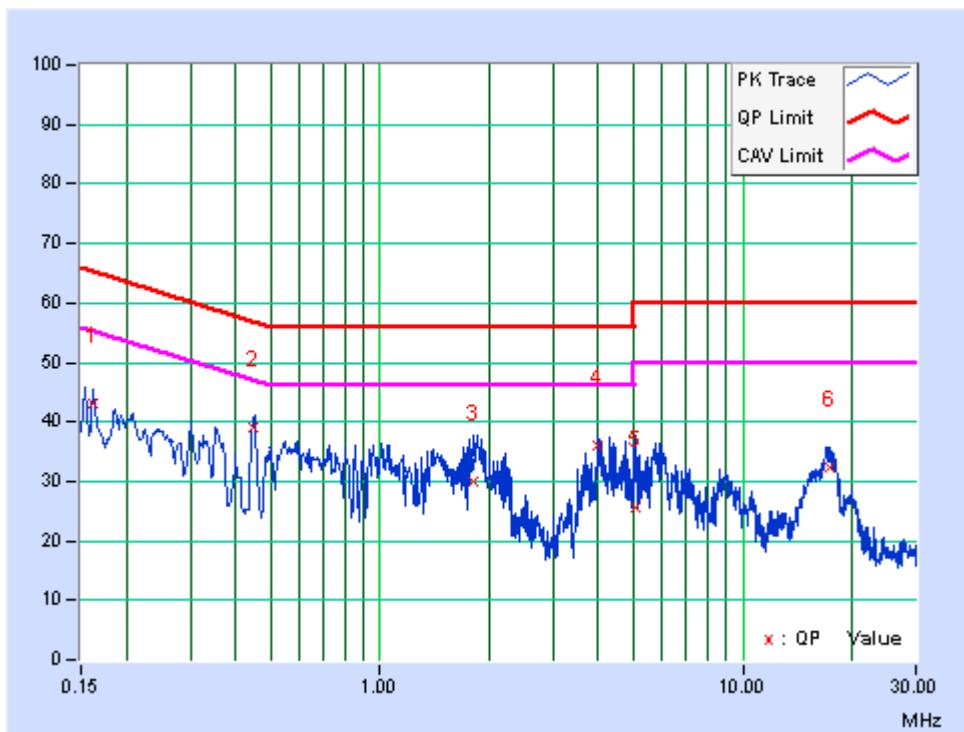



BUREAU
VERITAS

Test Report No.: RF130816N020

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



BUREAU
VERITAS

Test Report No.: RF130816N020

TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent	E4446A	MY46180622	April 24,13	April 23,14
EMI Test Receiver	Rohde&Schwarz	ESVD	847398/003	May 14,13	May 13,14
Bilog Antenna (20MHz-2GHz)	Teseq	CBL 6111D	25757	Nov. 22,12	Nov. 21,13
Horn Antenna (1GHz -18GHz)	EMCO	3117	00062558	Oct.18,12	Oct.17,13
Pre-Amplifier (20MHz-3GHz)	EMCI	EMC 330	980095	Nov. 02,12	Nov.01,13
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 14,13	May 13,14
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 04,11	Jan. 03,14
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,12	Nov. 03,13
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	Mar. 24,13	Mar. 23,14
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 31,12	Oct. 30,13
Loop antenna (9kHz~30MHz)	Daze	ZN30900A	0708	Nov. 28,12	Nov. 27,13
Pre-Amplifier (9kHz~1GHz)	SONOMA	310D	186955	Mar. 06,13	Mar. 05,14
Test Software	ADT	ADT_Radiated_V7.6.15	N/A	N/A	N/A
Spectrum Analyzer	Agilent	E4446A	MY46180622	April 24,13	April 23,14

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in Chamber
3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 502831.



BUREAU
VERITAS

Test Report No.: RF130816N020

4.2.2 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

- 1 The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
- 2 The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
- 3 Bluetooth duty factor correction is not correct as it is based on 79 channels, worst case would be with AFH enabled and device using the minimum of 20 channels. In this case the dwell time for a DH5 packet is $0.625 * 5$ per 75ms, (assuming one DH5 packet transmitted and then a DH1 packet received, 20 channels to cycle through would take 75ms on average before repeating a channel) so in any 100ms there would be, on average, two DH5 packets = 6.25ms per 100ms
Therefore, the duty cycle correlation factor be equal to: $20\log(6.25 / 100) = -24.1$ dB.
Average value = peak reading + $20\log(\text{duty cycle})$.
- 4 All modes of operation were investigated and the worst-case emissions are reported.




BUREAU
VERITAS

Test Report No.: RF130816N020

4.2.3 DEVIATION FROM TEST STANDARD

No deviation

4.2.4 TEST SETUP

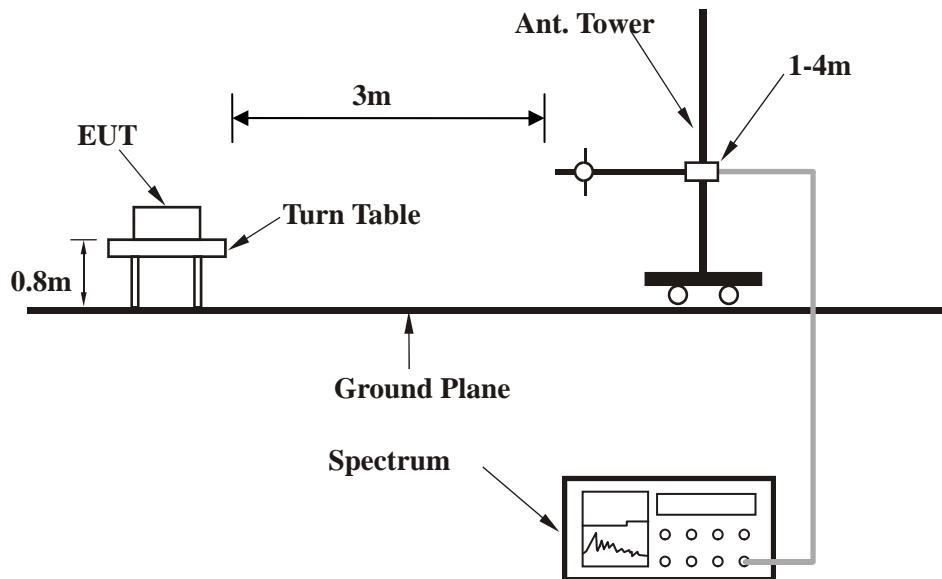

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU
VERITAS

Test Report No.: RF130816N020

4.2.6 TEST RESULTS


BELOW 1GHz WORST-CASE DATA: GFSK DH5

CHANNEL	Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.20	34.8 QP	43.5	-8.7	1.00 H	185	24.04	10.74
2	144.71	36.0 QP	43.5	-7.5	1.00 H	169	23.21	12.77
3	167.34	31.5 QP	43.5	-12.0	1.00 H	136	20.14	11.35
4	191.60	37.0 QP	43.5	-6.5	1.00 H	152	26.52	10.46
5	216.00	34.4 QP	43.5	-9.1	1.00 H	209	23.30	11.13
6	240.11	37.2 QP	46.0	-8.8	1.00 H	120	23.99	13.17

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. For the test results, the EUT had been tested from 9KHz ~25GHz. But only the worst case was shown in test report.

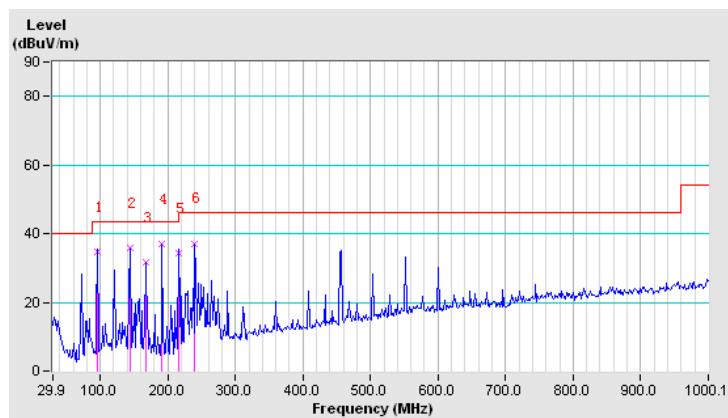



BUREAU
VERITAS


Test Report No.: RF130816N020

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	71.94	26.9 QP	40.0	-13.1	1.55 V	143	18.96	7.96
2	96.20	33.4 QP	43.5	-10.1	1.22 V	94	22.69	10.74
3	120.45	28.3 QP	43.5	-15.2	1.51 V	127	15.53	12.81
4	240.11	30.0 QP	46.0	-16.0	1.05 V	74	16.82	13.17
5	264.37	32.1 QP	46.0	-14.0	1.37 V	111	16.69	15.36
6	384.02	32.5 QP	46.0	-13.5	1.00 V	3	14.83	17.65

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. For the test results, the EUT had been tested from 9KHz ~25GHz. But only the worst case was shown in test report.

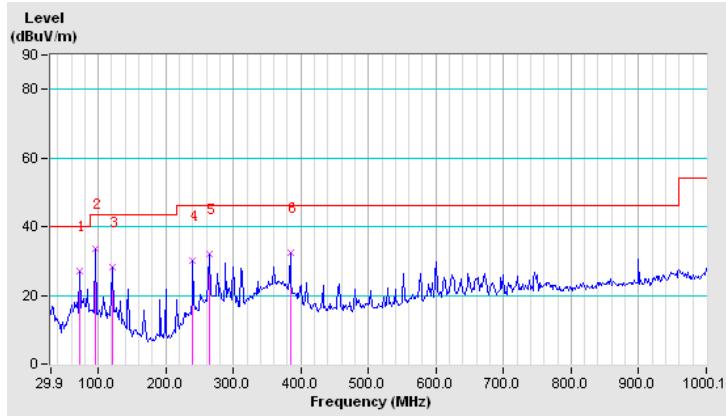



BUREAU
VERITAS

Test Report No.: RF130816N020

ABOVE 1GHz WORST-CASE DATA: GFSK DH5

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 0	FREQUENCY RANGE		1 ~ 25GHz
TEST VOLTAGE	DC 5V from USB	DETECTOR FUNCTION		Peak (PK) Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00 PK	59.1	74	-14.9	1.03 H	293	21.83	37.27
2	2400.00 AV	35.0	54	-19.0	1.03 H	293	-2.27	37.27
3	*2402.00 PK	98.4	114	-15.6	1.04 H	293	61.13	37.27
4	*2402.00 AV	74.3	94	-19.7	1.04 H	293	37.03	37.27
5	4804.00 PK	53.5	74	-20.5	1.00 H	276	11.89	41.61
6	4804.00 AV	29.4	54	-24.6	1.00 H	276	-12.21	41.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00 PK	50.8	74	-23.2	2.39 V	219	13.53	37.27
2	2400.00 AV	26.7	54	-27.3	2.39 V	219	-10.57	37.27
3	*2402.00 PK	88.6	114	-25.4	2.39 V	219	51.33	37.27
4	*2402.00 AV	64.5	94	-29.5	2.39 V	219	27.23	37.27
5	4804.00 PK	53.3	74	-20.7	1.00 V	174	11.69	41.61
6	4804.00 AV	29.2	54	-24.8	1.00 V	174	-12.41	41.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

BUREAU
VERITAS

Test Report No.: RF130816N020

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 39		FREQUENCY RANGE 1 ~ 25GHz
TEST VOLTAGE		DC 5V from USB		DETECTOR FUNCTION Peak (PK) Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00 PK	98.5	114	-15.5	1.00 H	281	61.16	37.34
2	*2441.00 AV	74.4	94	-19.6	1.00 H	281	37.06	37.34
3	4882.00 PK	53.8	74	-20.2	1.00 H	246	12.1	41.70
4	4882.00 AV	29.7	54	-24.3	1.00 H	246	-12	41.70
5	7323.00 PK	57.3	74	-16.7	1.00 H	213	11.51	45.79
6	7323.00 AV	33.2	54	-20.8	1.00 H	213	-12.59	45.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00 PK	86.4	114	-27.6	1.00 V	246	49.06	37.34
2	*2441.00 AV	62.3	94	-31.7	1.00 V	246	24.96	37.34
3	4882.00 PK	53.5	74	-20.5	1.00 V	195	11.8	41.70
4	4882.00 AV	29.4	54	-24.6	1.00 V	195	-12.3	41.70
5	7440.00 PK	58.3	74	-15.7	1.00 V	341	12.48	45.82
6	7440.00 AV	34.2	54	-19.8	1.00 V	341	-11.62	45.82

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

BUREAU
VERITAS

Test Report No.: RF130816N020

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
TEST VOLTAGE		DETECTOR FUNCTION		Peak (PK) Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00 PK	98.9	114	-15.1	1.00 H	106	61.49	37.41
2	*2480.00 AV	74.8	94	-19.2	1.00 H	106	37.39	37.41
3	2483.50 PK	48.7	74	-25.3	1.00 H	106	11.29	37.41
4	2483.50 AV	24.6	54	-29.4	1.00 H	106	-12.81	37.41
5	4960.00 PK	52.5	74	-21.5	1.00 H	147	10.7	41.80
6	4960.00 AV	28.4	54	-25.6	1.00 H	147	-13.4	41.80
7	7440.00 PK	58.3	74	-15.7	1.00 H	166	12.48	45.82
8	7440.00 AV	34.2	54	-19.8	1.00 H	166	-11.62	45.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00 PK	83.5	114	-30.5	1.00 V	142	46.09	37.41
2	*2480.00 AV	59.4	94	-34.6	1.00 V	142	21.99	37.41
3	2483.50 PK	47.7	74	-26.3	1.00 V	142	10.29	37.41
4	2483.50 AV	23.6	54	-30.4	1.00 V	142	-13.81	37.41
5	4960.00 PK	53.8	74	-20.2	1.00 V	169	12	41.80
6	4960.00 AV	29.7	54	-24.3	1.00 V	169	-12.1	41.80
7	7440.00 PK	58.2	74	-15.8	1.00 V	142	12.38	45.82
8	7440.00 AV	34.1	54	-19.9	1.00 V	142	-11.72	45.82

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



BUREAU
VERITAS

Test Report No.: RF130816N020

4.3 20dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

According to FCC 15.215(c), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer (9KHz-40GHz)	Agilent	E4446A	MY46180622	Apr. 24,13	Apr. 23,14
Spectrum Analyzer (9KHz-25GHz)	Agilent	E7405A	MY45118807	May 14,13	May 13,14
Power Meter	Anritsu	ML2495A	1139001	Nov. 04,12	Nov. 03,13
Power Sensor	Anritsu	MA2411B	1126068	Nov. 04,12	Nov. 03,13
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 31,12	Oct. 30,13

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations

are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.

2. The test was performed in Oven room

4.3.3 TEST PROCEDURE

The spectrum analyzer was receiving the maximum emission level. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3.4 DEVIATION FROM TEST STANDARD


No deviation.



BUREAU
VERITAS

Test Report No.: RF130816N020

4.3.5 TEST SETUP

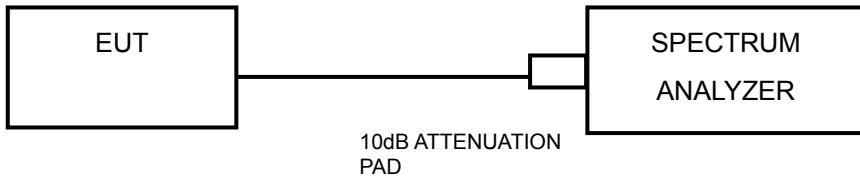

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

GFSK DH5


CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2402	1.17
Middle	2441	1.16
High	2480	1.15




BUREAU
VERITAS

Test Report No.: RF130816N020

Test Data: Low channel

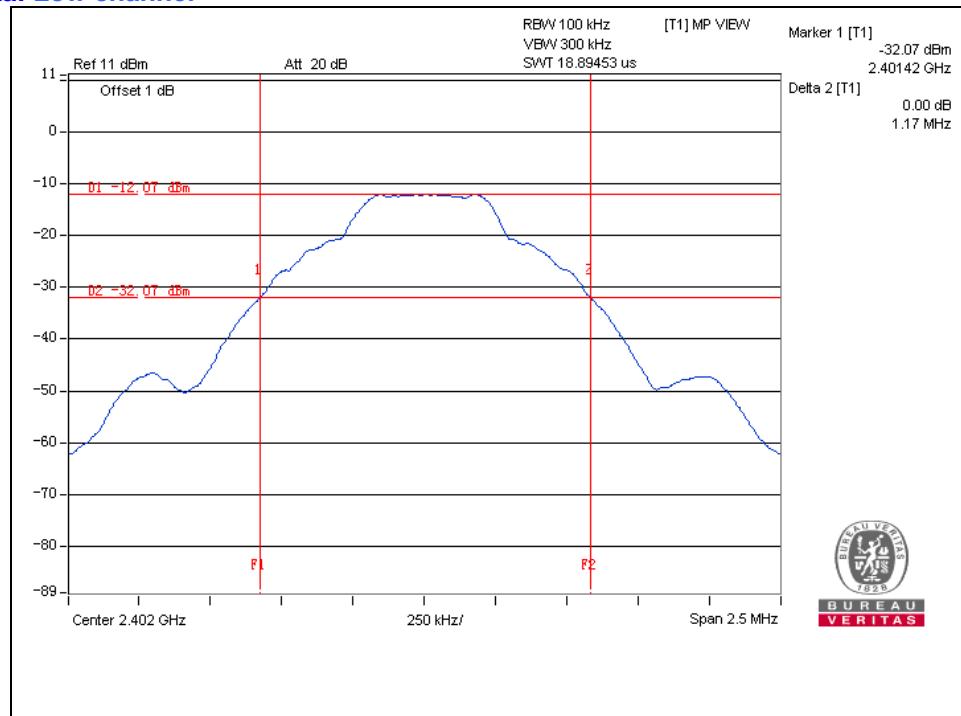

Test Data: Middle channel

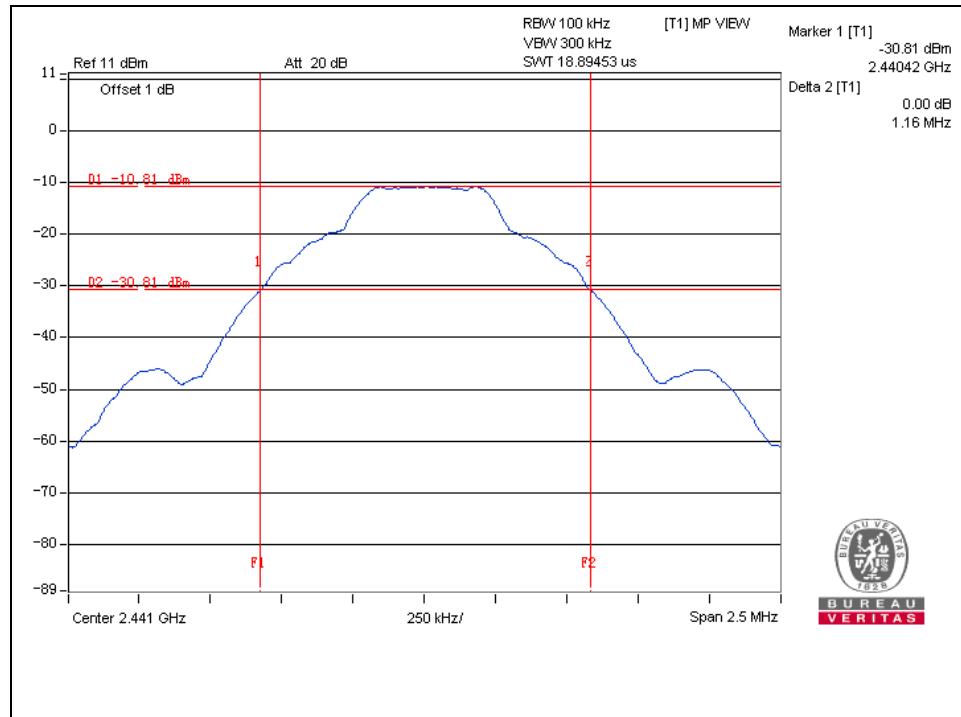




BUREAU
VERITAS

Test Report No.: RF130816N020

Test Data: High channel

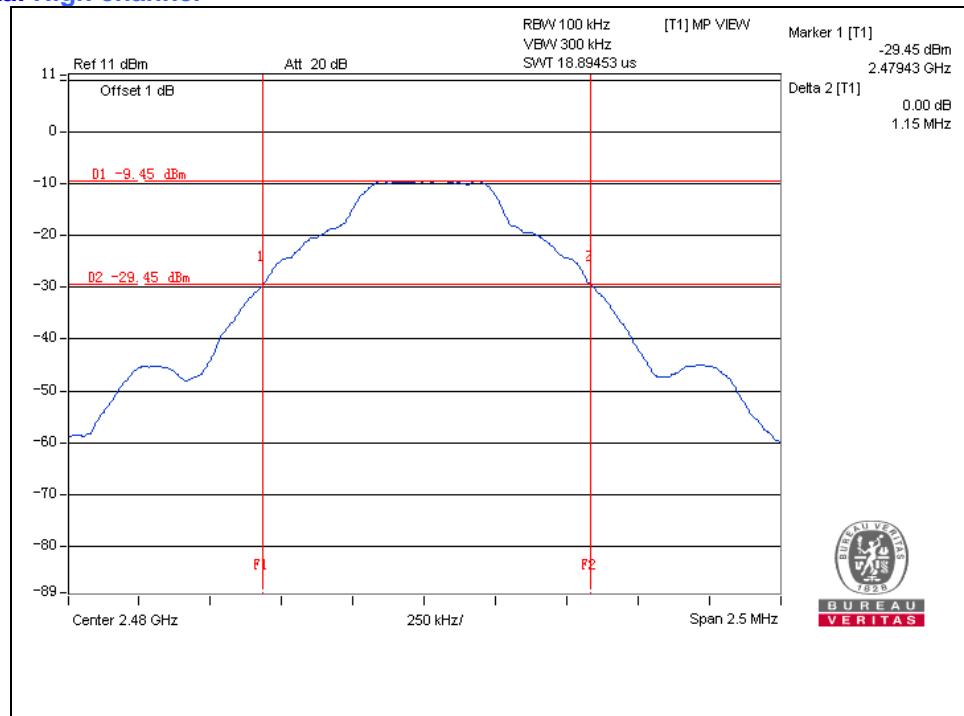



BUREAU
VERITAS

Test Report No.: RF130816N020

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



BUREAU
VERITAS

Test Report No.: RF130816N020

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---