

Jing Mold Electronics Technology (Shenzhen) Co., Ltd

RF Keyboard

Model Number: JME-8211R

Prepared for : Jing Mold Electronics Technology (Shenzhen) Co., Ltd
Xin Qian, 3rd Industrial Estate, Shajing Baoan, Shenzhen,
China.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F06046
Date of Test : Feb.23,2006
Date of Report : Mar.14,2006

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Tested Supporting System Details.....	1-1
1.3. Test Facility	1-2
1.4. Measurement Uncertainty.....	1-2
2. POWER LINE CONDUCTED EMISSION TEST.....	2-1
3. RADIATED EMISSION TEST.....	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit 30~1000MHz Standard: FCC 15.249	3-3
3.4. EUT Configuration on Test	3-3
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-4
3.7. Radiated Emission Test Results	3-5
4. BAND EDGES MEASUREMENT.....	4-15
4.1. Test Equipment.....	4-15
4.2. Block Diagram of Test Setup	4-15
4.3. Test Standard	4-15
4.4. Bandwidth Limit.....	4-15
4.5. Test Procedure	4-15
5. DEVIATION TO TEST SPECIFICATIONS	5-1
6. PHOTOGRAPH	6-1
6.1. Photos of Radiated Emission Test (In Anechoic Chamber)	6-1
6.2. Photos of Band Edges Test.....	6-1

APPENDIX I

(19 pages)

TEST REPORT DECLARATION

Applicant : Jing Mold Electronics Technology (Shenzhen) Co., Ltd
 Manufacturer : Jing Mold Electronics Technology (Shenzhen) Co., Ltd
 EUT Description : RF Keyboard
 (A) MODEL NO. : JME-8211R
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 3V

Test Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Sep.2005

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.


This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.
 This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Feb.23, 2006


Prepared by :


 Annie Wu / Assistant

Reviewer :


 Sean Xing / Assistant Manager

Approved & Authorized Signer :

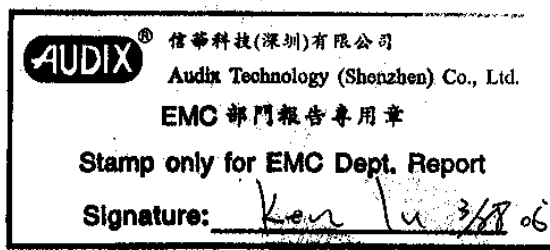
 Stamp only for EMC Dept. Report
 Signature: 
 Ken Lu / Deputy Manager

Name of the Representative of the Responsible Party : _____

Signature : _____

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : RF Keyboard

Model Number : JME-8211R

Applicant : Jing Mold Electronics Technology (Shenzhen) Co., Ltd
Xin Qian, 3rd Industrial Estate, Shajing Baoan, Shenzhen, China.

Manufacturer : Jing Mold Electronics Technology (Shenzhen) Co., Ltd
Xin Qian, 3rd Industrial Estate, Shajing Baoan, Shenzhen, China.

Adaptor : Manufacture: LI SHIN, M/N: LSE0202C1990
Cable: Unshielded, Detachable, 2m

SUB Cable : Shielded, Detachable, 1.8m

Date of Test : Feb.23,2006

1.2. Tested Supporting System Details

1.2.1. COMPUTER

Manufacture : TCL
M/N : V17N

1.2.2. MOUSE

EMC CODE : ACS-EMC-M01TA

M/N : M056UO

S/N : 512024284

Manufacturer : Dell

Data Cable : Shielded, undetachabled, 1.8m

1.3. Test Facility

Site Description

3m Anechoic Chamber	:	Certificated by FCC, USA Registration Number: 90454 Aug. 15, 2003
3m & 10m Anechoic Chamber	:	Certificated by FCC, USA Registration Number: 794232 Mar. 15, 2004
EMC Lab.	:	Certificated by DATech, German Registration Number: DAT-P-091/99-01 Feb. 02, 2004
		Certificated by NVLAP, USA NVLAP Code: 200372-0 Mar. 31, 2004
		Certificated by Nemko, Norway Aut. No.: ELA135 April. 22, 2004
		Certificated by Industry Canada Registration Number: IC 5183 Jul. 28, 2004
Name of Firm	:	Audix Technology (Shenzhen) Co., Ltd.
Site Location	:	No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China

1.4. Measurement Uncertainty

No.	Item	Uncertainty	Remark
1.	Uncertainty for Conducted Emission Test	1.22dB	
2.	Uncertainty for Radiated Emission Test	3.14dB	3m Chamber
3.	Uncertainty for Radiated Emission Test	3.18dB	10m Chamber
4.	Uncertainty for Power Clamp Test	1.38dB	

2. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (f) of FCC Part 15 section 15.249, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission Test :


3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 16, 05	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 16, 05	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.13, 06	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jan. 28, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jan. 28, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jan. 28, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jan. 28, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jan. 28, 06	1/2 Year

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 16, 05	1 Year
1.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 16, 05	1 Year
2.	Amplifier	HP	8447D	2944A07794	Mar.13, 06	1/2 Year
3.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
4.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jan. 28, 06	1/2 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jan. 28, 06	1/2 Year
6.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jan. 28, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jan. 28, 06	1/2 Year
8.	Coaxial Switch	Anritsu	MP59B	M73989	Jan. 28, 06	1/2 Year
9.	Spectrum	Agilent	E4407B	MY41440292	May 16, 05	1 Year
10.	Amp	HP	8449B	3008A00863	May 16, 05	1 Year
11.	Antenna	EMCO	3115	9607-4877	Jun. 05, 05	1.5 Year


3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

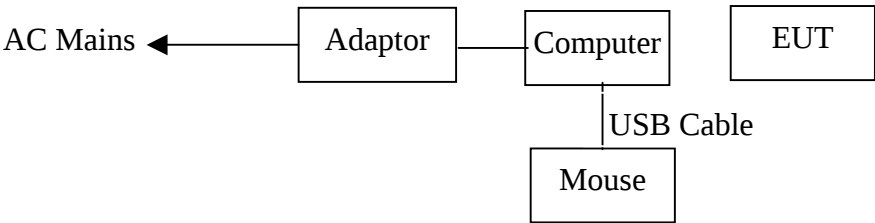

(EUT: RF Keyboard)

3.2.2. Anechoic Chamber Setup Diagram

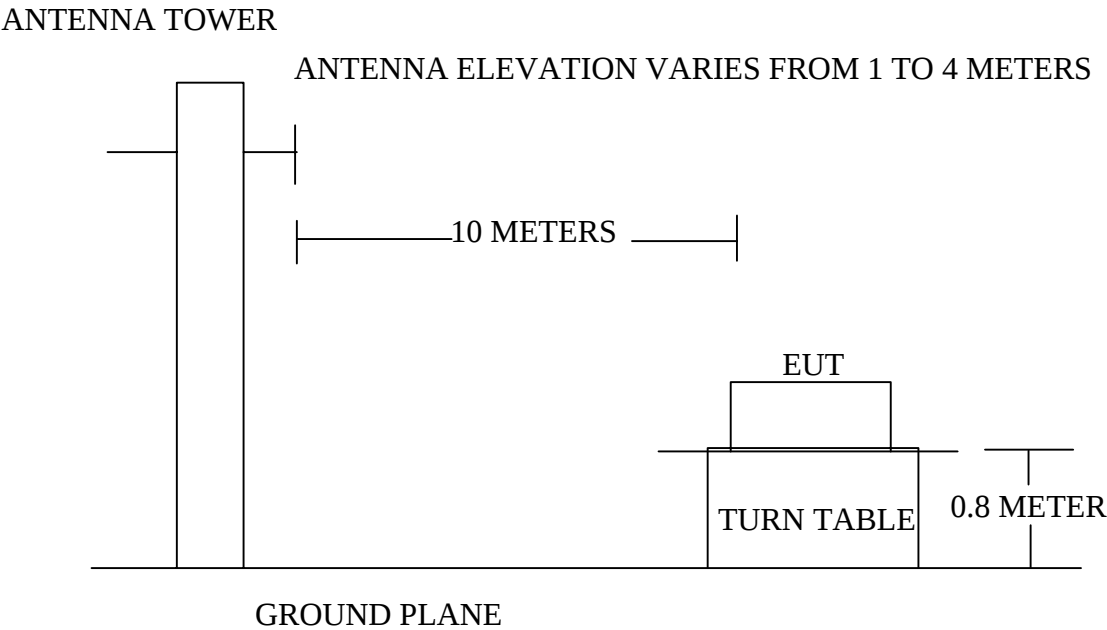

3.3. Radiated Emission Limit 30~1000MHz Standard: FCC 15.249

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Local Oscillator:	3	94.0 $\text{dB}(\mu\text{V})/\text{m}$	
Above 1000	3	Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. RF Keyboard (EUT)

Model Number	:	JME-8211R
Serial Number	:	N/A
Manufacturer	:	E-CORE Technology Co., Ltd

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (TX Mode) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2003 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the VBW is set at 300kHz and RBW is set at 120kHz for measurement below 1GHz.

The frequency range from 30MHz to 1000MHz and above 1000MHz are checked.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz and above 1000MHz is investigated.
Please see the following pages.

Date of Test :	Feb.23,2006	Temperature :	23.2
EUT :	RF Keyboard	Humidity :	55%
Model No. :	JME-8211R	Test Mode :	TX
Test Engineer:	Sworddance		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m
48.43	7.56	0.98	52.61	32.72	-7.28	40.00
96.93	10.77	1.55	51.91	35.95	-7.55	43.50
162.89	10.86	1.98	45.20	30.04	-13.46	43.50
268.62	12.98	2.61	44.43	42.47	-13.53	46.00
365.62	15.85	3.33	48.89	40.06	-5.94	46.00
541.19	17.91	4.20	40.23	33.60	-12.40	46.00


Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 365.62MHz with corrected signal level of 40.06dB μ V/m (Limit is 46.00dB μ V/m) when the antenna was at horizontal polarization and at 2m high and the turn table was at 160° .

4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer :



Date of Test :	Feb.23,2006	Temperature :	23.2
EUT :	RF Keyboard	Humidity :	55%
Model No. :	JME-8211R	Test Mode :	TX
Test Engineer:	Sworddance		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m
49.40	6.26	0.98	53.04	31.85	-8.15	40.00
95.96	9.39	1.55	55.81	38.44	-5.06	43.50
240.49	11.90	2.55	44.66	31.52	-14.48	46.00
300.63	13.52	2.71	44.10	32.82	-13.18	46.00
364.65	14.55	3.35	43.42	33.31	-12.69	46.00
541.19	18.32	4.20	43.03	36.81	-9.19	46.00


Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 95.96MHz with corrected signal level of 38.44dB μ V/m (Limit is 43.50dB μ V/m) when the antenna was at vertical polarization and at 1m high and the turn table was at 52 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer :



Date of Test : Feb.23,2006 Temperature : 23
 EUT : RF Keyboard Humidity : 50%
 Model No. : JME-8211R Test Mode : TX
 Test Jack
 Engineer: _____

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Horizontal	Horizontal	Limits		
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
1068.000	24.53	3.57	50.80	42.77	-31.23	74.00	Peak
2420.500	29.07	6.22	70.26	70.38	-43.62	114.00	Peak
4841.000	34.11	9.67	42.63	51.92	-22.08	74.00	Peak

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.


Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Horizontal	Horizontal	Limits		
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
1068.000	24.53	3.57	47.53	39.50	-14.50	54.00	Average
2420.500	29.07	6.22	65.18	65.30	-28.70	94.00	Average
4841.000	34.07	9.63	37.09	46.30	-7.70	54.00	Average

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer :



Date of Test : Feb.23,2006 Temperature : 22
 EUT : RF Keyboard Humidity : 50 %
 Model No. : JME-8211R Test Mode : TX
 Test Jack
 Engineer: _____

Frequency MHz	Probe Factor dB/m	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB μ V/m	Limits dB μ V/m	Remark
1884.000	27.43	5.38	46.83	44.23	-29.77	74.00	Peak
2420.500	29.07	6.22	70.35	70.47	-43.53	114.00	Peak
4841.000	34.11	9.67	43.22	52.51	-21.49	74.00	Peak


Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss-Preamp Factor
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency MHz	Probe Factor dB/m	Cable Loss dB	Meter Reading Vertical DB μ V	Emission Level Vertical dB μ V/m	Over Limits dB μ V/m	Limits dB μ V/m	Remark
1884.000	27.43	5.38	44.90	42.30	-11.70	54.00	Average
2420.500	29.07	6.22	65.98	66.10	-27.90	94.00	Average
4841.000	34.07	9.63	37.59	46.80	-7.20	54.00	Average


Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading + Cable Loss-Preamp Factor
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer : 




No.6,Ke Feng Road, Block #2,
Shenzhen Science&Industry Park
Nansu Shenzhen, Guangdong, China
Tel:+86-755-26639495
Fax:+86-755-26632877
Portcode:518857

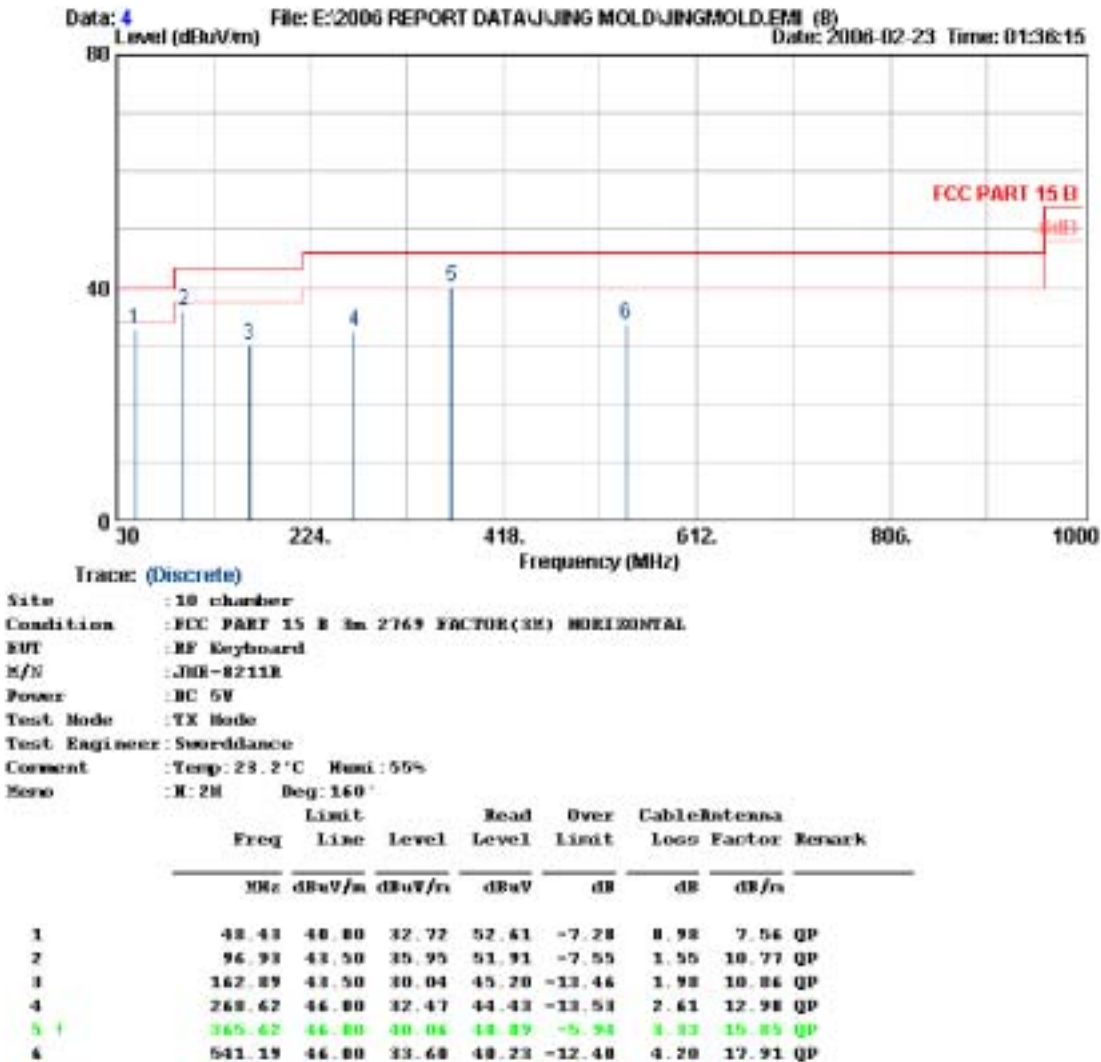



No.6,Ke Feng Road, Block E2,
Shenzhen Science Industry Park
Nantou Shenzhen, Guangdong, China
Tel:+86-755-26639495
Fax:+86-755-26632877
Portcode:518057

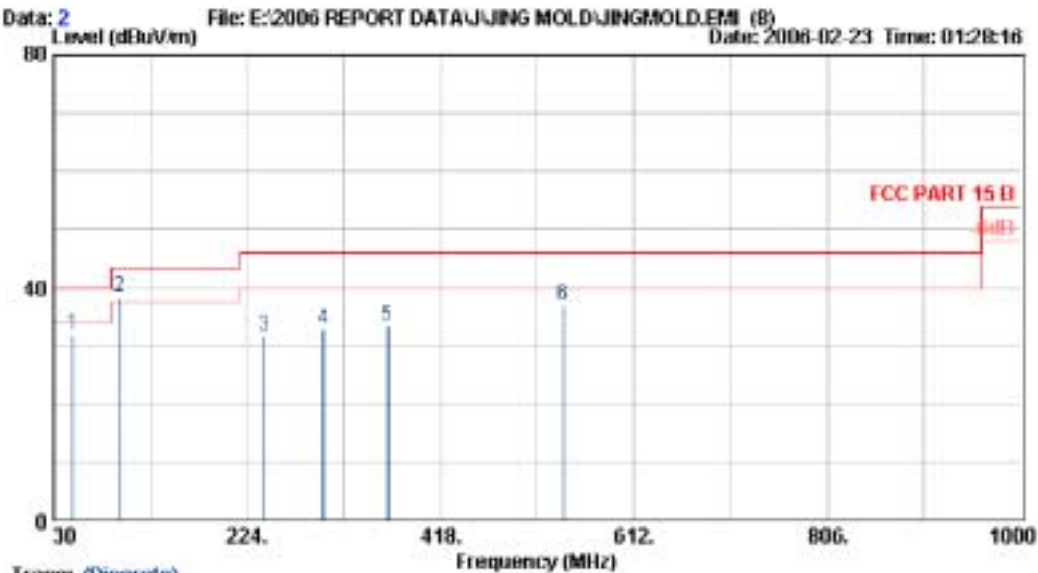

Trace: (Discrete)

Site : 10 chamber

Condition : FCC PART 15 B 3m 2769 FACTOR(3M) VERTICAL

EUT : RF Keyboard

M/N : JBR-8211R

Power : DC 5V

Test Mode : TX Mode

Test Engineer : Sworddance

Comment : Temp: 23.2°C Humi: 55%


Serie : H: 1H Beg: 52'

	Freq	Limit		Read Level	Over Limit	CableAntenna		Remark
		Line	Level			Loss	Factor	
	MHz		dBuV/m	dBuV/m	dB	dB	dB/m	
1	49.40	40.00	31.05	53.04	-8.15	0.98	6.26	QP
2 @	95.96	40.00	38.44	55.81	-5.06	1.55	9.39	QP
3	240.49	44.00	31.52	44.46	-14.48	2.55	11.90	QP
4	300.63	44.00	32.02	44.10	-13.18	2.71	13.52	QP
5	364.65	44.00	33.31	43.42	-12.69	3.35	14.55	QP
6	511.19	44.00	36.81	43.03	-9.19	4.20	18.32	QP



Audix Technology (Shenzhen) Co., Ltd.
Shenzhen Science & Ind.Park
Tel:+86-0755-26639495-7
Fax:+86-0755-26632877
<http://www.audix.com.cn>

Data#: 2 File#: D:\2006 Report Data\J.Jack\J.Jing made\ACS6 Q084.EMI

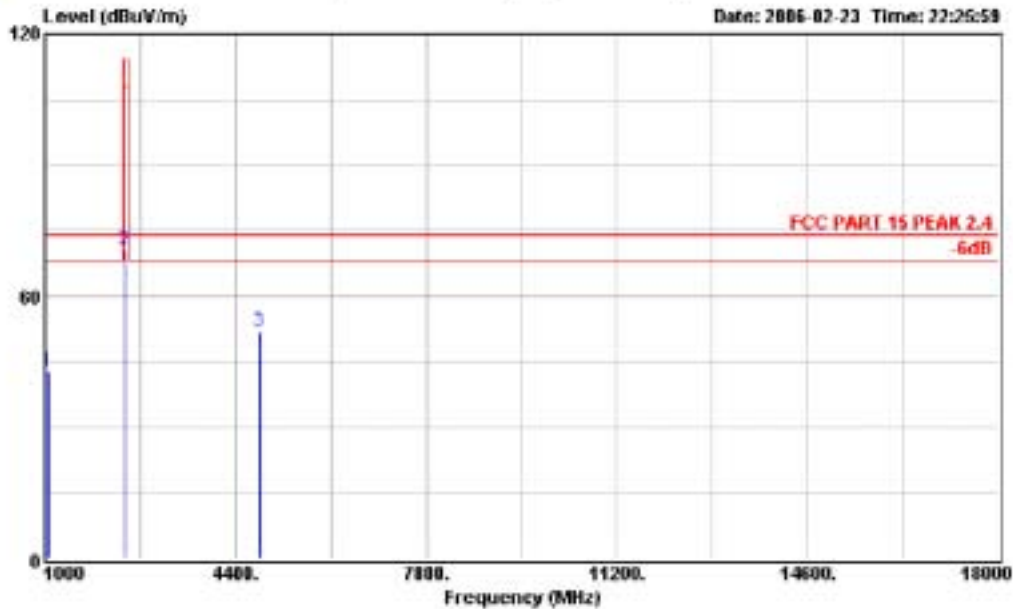


Site : 1# Chamber
Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
EUT : RF Keyboard
M/N : JME8211R
Power : DC 6V
Test Mode : TX Mode
Test Engineer : Jack
Memo : Temp:23° Humi:50%

	Freq	Level	Over Limit		Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
			Limit	Line					
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1060.000	42.77	-31.23	74.00	50.00	24.53	3.57	36.13	Peak
2	2420.500	70.30	-43.62	114.00	70.26	29.07	6.22	35.17	Peak
3	4841.000	51.92	-22.08	74.00	42.63	34.11	9.67	34.49	Peak



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 3 File#: D:\2006 Report Data\J.Jack\J.Jing made\ACS6Q084.EMI

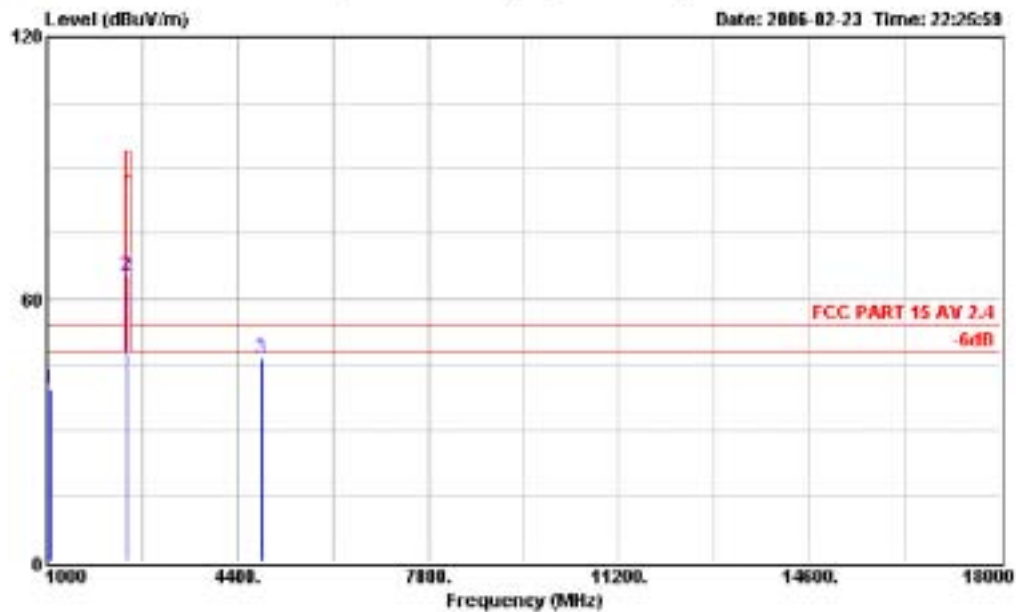


Site : 1# Chamber
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : RF Keyboard
 M/N : JME8211R
 Power : DC 6V
 Test Mode : TX Mode
 Test Engineer : Jack
 Memo : Temp:23° Humi:50%

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	dB	
1	1060.000	39.50	-14.50	54.00	47.53	24.53	3.57	36.13	Average
2	2420.500	65.30	-20.70	94.00	65.10	29.07	6.22	35.17	Average
3	4841.000	46.30	-7.70	54.00	37.09	34.07	9.63	34.49	Average



Audix Technology (Shenzhen) Co., Ltd.
Shenzhen Science & Ind.Park
Tel:+86-0755-26639495-7
Fax:+86-0755-26632877
<http://www.audix.com.cn>

Data#: 5 File#: D:\2006 Report Data\J.Jack\J.Jing made\ACS6 Q084.EMI

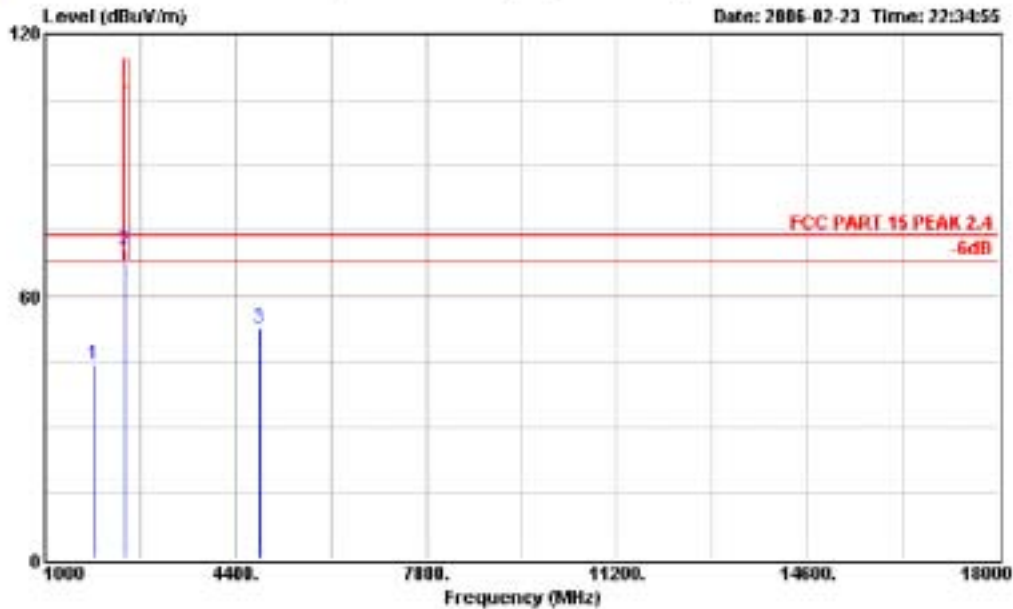

Site : 1# Chamber
Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
EUT : RF Keyboard
M/N : JME8211R
Power : DC 6V
Test Mode : TX Mode
Test Engineer : Jack
Memo : Temp:23° Humi:50%


	Freq	Level	Over Limit		Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
			Limit	Line					
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1884.000	44.23	-29.77	74.00	46.03	27.43	5.30	35.41	Peak
2	2420.500	70.47	-43.53	114.00	70.35	29.07	6.22	35.17	Peak
3	4841.000	52.51	-21.49	74.00	43.22	34.11	9.67	34.49	Peak



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 6

File#: D:\2006 Report Data\J\Jack\Jjing made\ACS6Q084.EMI

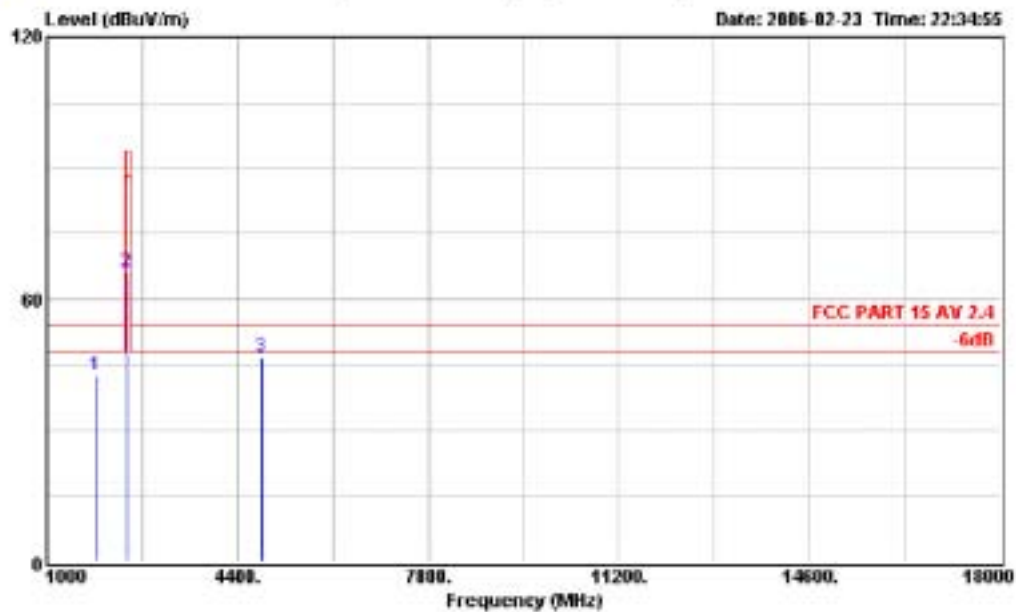

Site : 1# Chamber
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL
 EUT : RF Keyboard
 M/N : JME8211R
 Power : DC 6V
 Test Mode : TX Mode
 Test Engineer : Jack
 Memo : Temp:23° Humi:50%

	Freq	Level	Over Limit		Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
			Limit	Line					
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1884.000	42.30	-11.70	54.00	44.90	27.43	5.30	35.41	Average
2	2420.500	66.10	-27.90	94.00	65.90	29.07	6.22	35.17	Average
3	4841.000	46.80	-7.20	54.00	37.59	34.07	9.63	34.49	Average


4. BAND EDGES MEASUREMENT

4.1. Test Equipment

The following test equipment were used during the Emission Bandwidth Test :

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 23, 05	1 Year
2.	Amp	HP	8449B	3008A00863	May 23, 05	1 Year
3.	Antenna	EMCO	3115	9607-4877	Dec. 14, 05	1.5 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May 23, 05	1 Year

4.2. Block Diagram of Test Setup

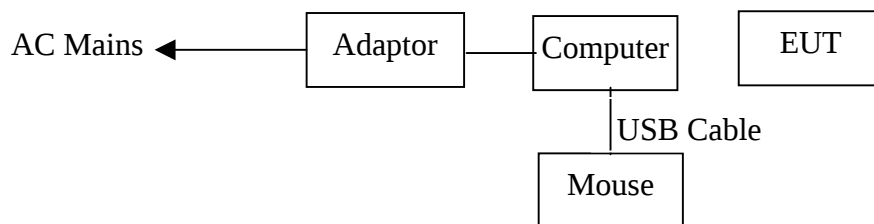

(EUT: RF Keyboard)

4.3. Test Standard

The test completeness FCC 15C (249).

4.4. Bandwidth Limit

200kHz wide centered on the operation frequency.

4.5. Test Procedure

PASS.


The testing data was attached in the next pages.



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind.Park
 Tel:+86-0755-26639495-7
 Fax:+86-0755-26632877
<http://www.audix.com.cn>

Data#: 9

File#: D:\2006 Report Data\J\Jack\Jjing made\ACS6Q084.EMI

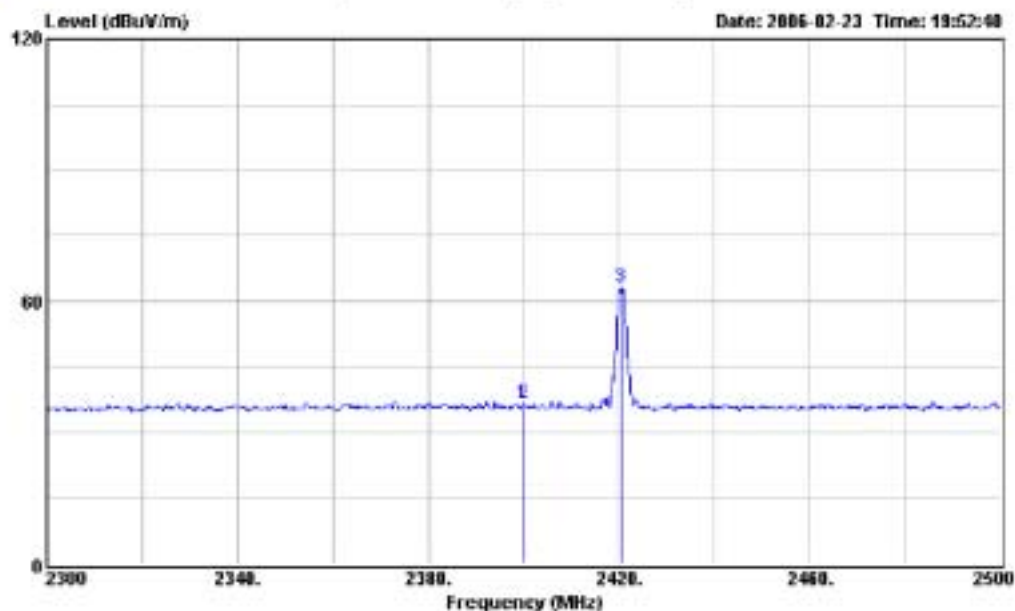


Site : 1# Chamber
 Condition : 3m 3115 FACTOR HORIZONTAL
 EUT : RF Keyboard
 M/N : JME8211R
 Power : DC 6V
 Test Mode : TX Mode
 Test Engineer : Jack
 Memo : Temp:23' Humi:50%

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2399.990	36.60	-----	-----	36.59	20.99	6.20	35.10	Peak
2	2400.000	36.60	-----	-----	36.59	20.99	6.20	35.10	Peak
3	2420.500	63.16	-----	-----	63.04	29.07	6.22	35.17	Peak



Audix Technology (Shenzhen) Co., Ltd.
Shenzhen Science & Ind.Park
Tel:+86-0755-26639495-7
Fax:+86-0755-26632877
<http://www.audix.com.cn>

Data#: 10 File#: D:\2006 Report Data\J\Jack\Jjing made\ACS6 Q084.EMI

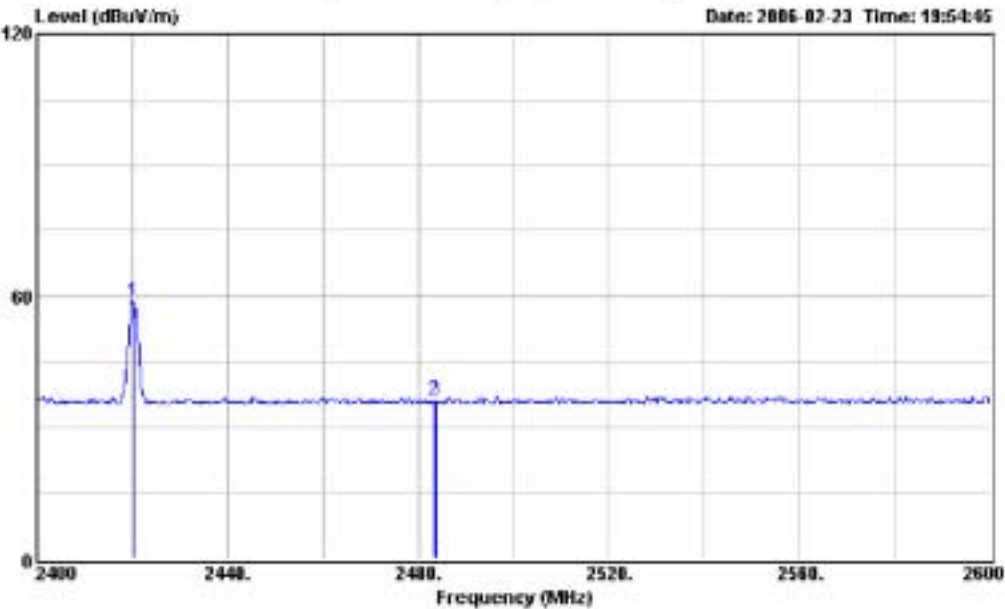

Site : 1# Chamber
Condition : 3m 3115 FACTOR HORIZONTAL
EUT : RF Keyboard
M/N : JME8211R
Power : DC 6V
Test Mode : TX Mode
Test Engineer : Jack
Memo : Temp:23° Humi:50%

	Freq	Level	Over Limit		Bead Level	Probe Factor	Cable Loss	Preamp Factor	Remark
			Limit	Line					
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2420.500	50.72	-----	-----	50.60	29.07	6.22	35.17	Peak
2	2483.500	36.09	-----	-----	35.76	29.19	6.30	35.16	Peak
3	2483.600	36.09	-----	-----	35.76	29.19	6.30	35.16	Peak


5. DEVIATION TO TEST SPECIFICATIONS

[NONE]

APPENDIX I



No.6,Ke Feng Road, Block #2,
Shenzhen Science Industry Park
Nantou Shenzhen, Guangdong, China
Tel: +86-755-26639495
Fax: +86-755-26632877
Partcode: 518057

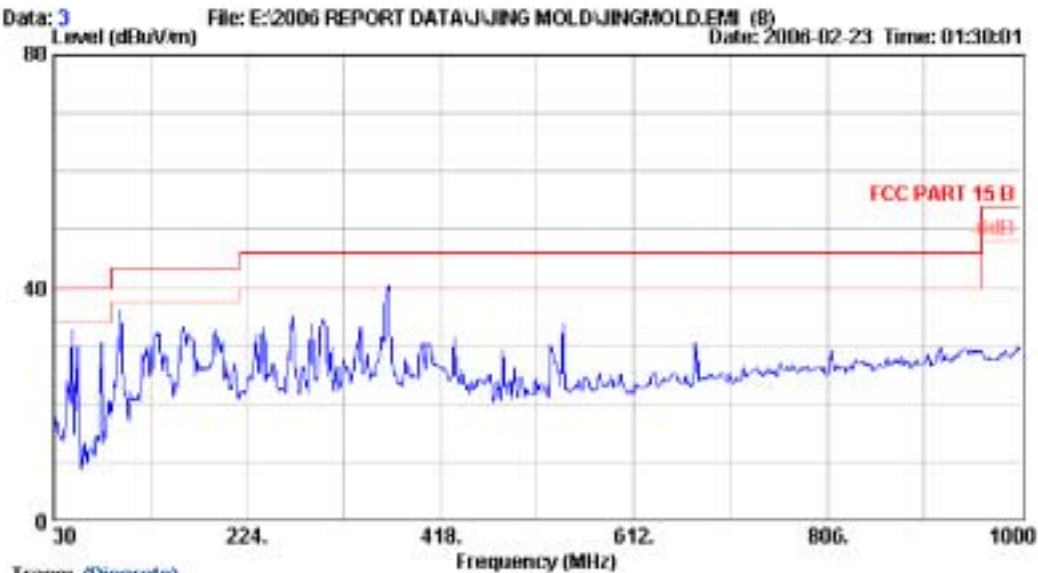

Trace: (Discrete)

Site : 10 chamber

Condition : FCC PART 15 B 3m 2769 FACTOR(3E) HORIZONTAL

EUT : RF Keyboard

M/N : JMR-8211R

Power : DC 5V

Test Mode : TX Mode


Test Engineer : Sworddance

Comment : Temp: 23.2°C Humi: 55%

Serial :




No.6,Ke Feng Road, Block #2,
Shenzhen Science Industry Park
Nantou Shenzhen,Guangdong,China
Tel: +86-755-26639495
Fax: +86-755-26632877
Partcode:518857

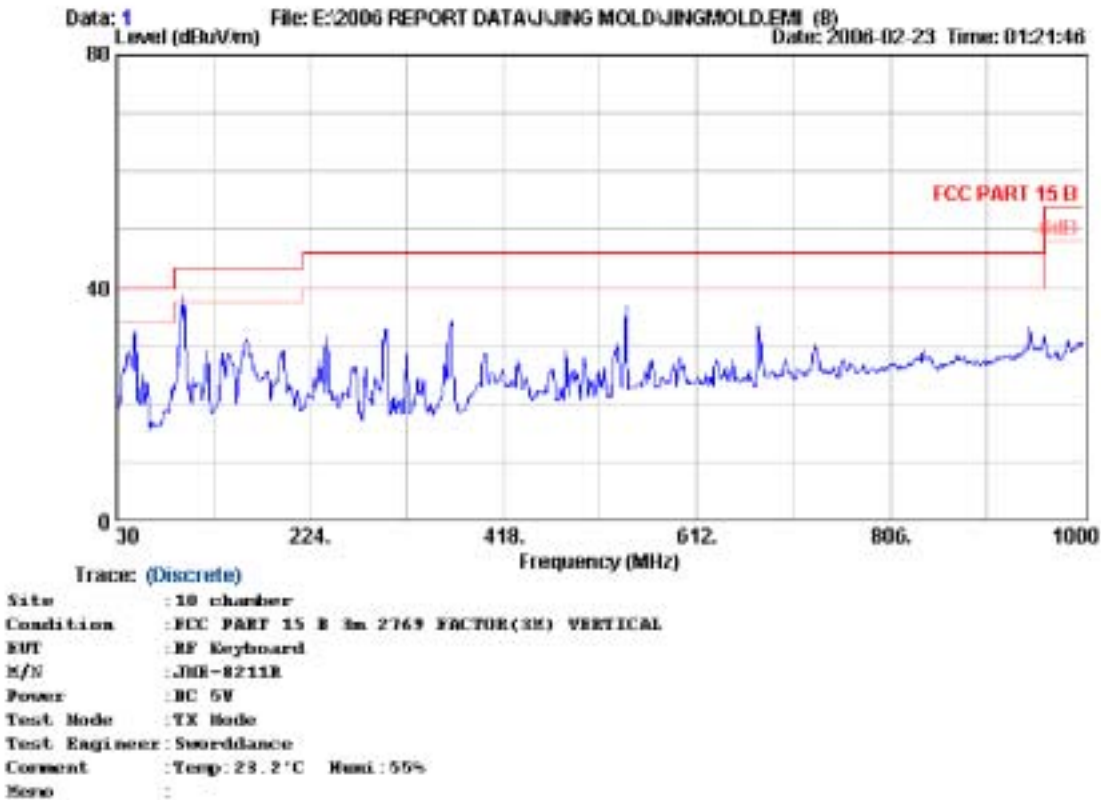



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 1 File#: D:\2006 Report Data\J\Jack\Jjing mode\ACS6 Q084.EMI

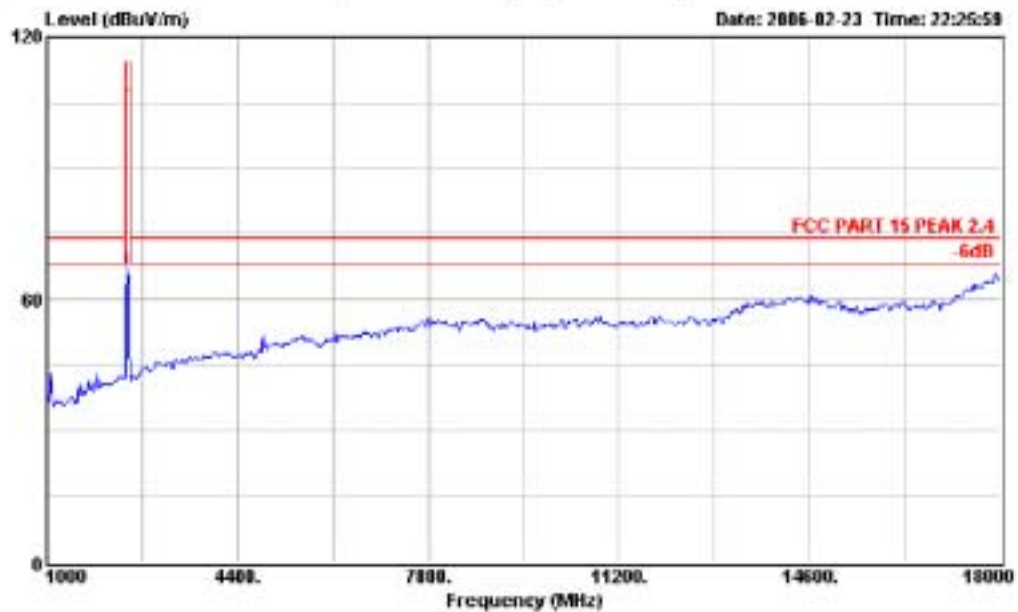


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : RF Keyboard
 M/N : JME8211R
 Power : DC 6V
 Test Mode : TX Mode
 Test Engineer : Jack
 Memo : Temp:23° Humi:50%



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 4

File#: D:\2006 Report Data\J\Jack\Jjing made\ACS6 Q084.EMI

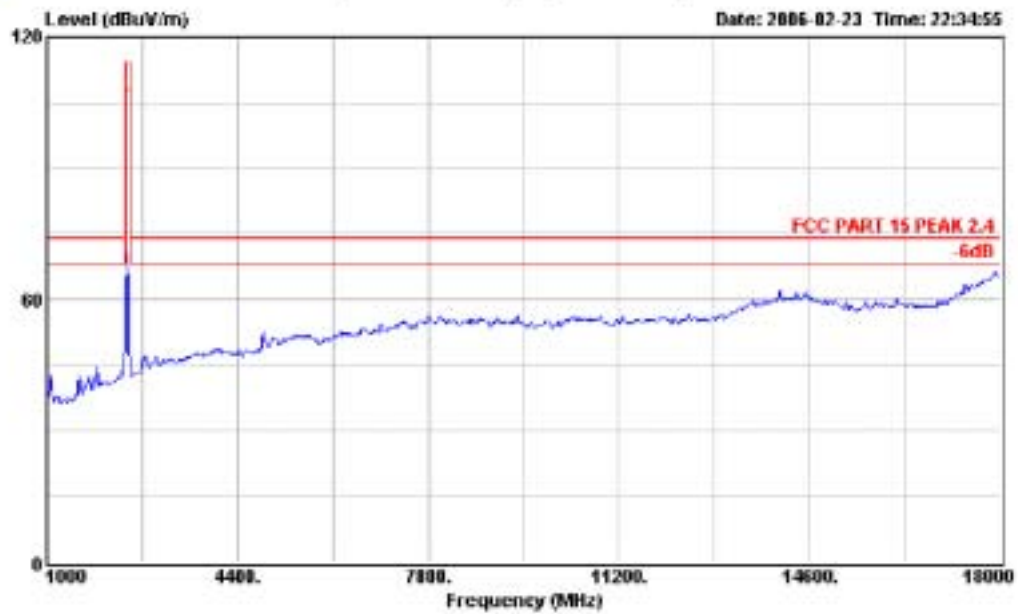


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : RF Keyboard
 M/N : JME8211R
 Power : DC 6V
 Test Mode : TX Mode
 Test Engineer : Jack
 Memo : Temp:23° Humi:50%



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 7

File#: D:\2006 Report Data\J\Jack\Jjing made\ACS6 Q084.EMI

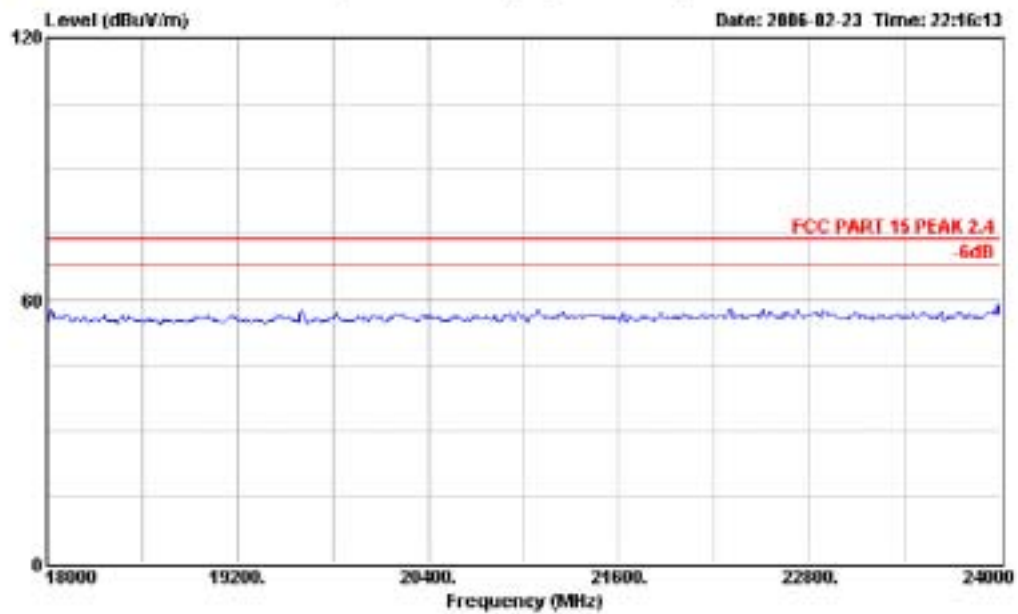


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR HORIZONTAL
 EUT : RF Keyboard
 M/N : JME-8211R
 Power : DC 6V
 Test Mode : Jack
 Test Engineer : TX Made
 Memo : Temp:23° Humi:50%



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 8

File#: D:\2006 Report Data\J\Jack\Jjing made\ACS6 Q084.EMI

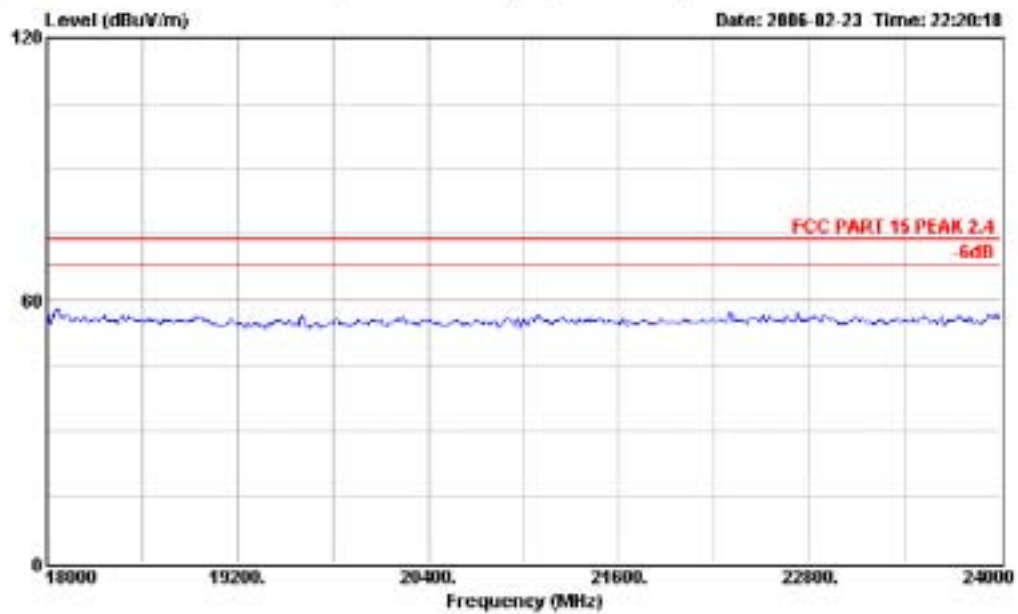

Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL
 EUT : RF Keyboard
 M/N : JME-8211R
 Power : DC 6V
 Test Mode : Jack
 Test Engineer : TX Made
 Memo : Temp:23° Humi:50%