

FCC TEST REPORT

for

CISPR PUB. 22 Class B

Equipment : VGA CARD

Model No. : A4-SIS300SG-B1

FCC ID : FQISIS300

Filing Type : Original Grant

Applicant : **JOYTECH COMPUTER CO., LTD.**
3F, No. 1, ALLEY 2, SZU-WEI LANE,
CHUNG CHENG RD., HSIN TIEN CITY,
TAIPEI HSIEN, TAIWAN, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE	3
1. General Description of Equipment under Test	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Basic Description of Equipment under Test	4
1.4. Feature of Equipment under Test	4
2. Test Configuration of Equipment under Test	5
2.1. Test Manner	5
2.2. Description of Test System	5
2.3. Connection Diagram of Test System	7
3. Test Software	8
4. General Information of Test	9
4.1. Test Facility	9
4.2. Standard for Methods of Measurement	9
4.3. Test in Compliance with	9
4.4. Frequency Range Investigated	9
4.5. Test Distance	9
5. Test of Conducted Powerline	10
5.1. Major Measuring Instruments	10
5.2. Test Procedures	10
5.3. Typical Test Setup Layout of Conducted Powerline	12
5.4. Test Result of AC Powerline Conducted Emission	13
5.5. Photographs of Conducted Powerline Test Configuration	16
6. Test of Radiated Emission	20
6.1. Major Measuring Instruments	20
6.2. Test Procedures	20
6.3. Typical Test Setup Layout of Radiated Emission	22
6.4. Test Result of Radiated Emission	23
6.5. Photographs of Radiated Emission Test Configuration	26
7. Antenna Factor & Cable Loss	28
8. List of Measuring Equipment Used	29

CERTIFICATE OF COMPLIANCE

for

CISPR PUB. 22 Class B

Equipment : VGA CARD

Model No. : A4-SIS300SG-B1

FCC ID : FQISIS300

Applicant : **JOYTECH COMPUTER CO., LTD.**
3F, No. 1, ALLEY 2, SZU-WEI LANE,
CHUNG CHENG RD., HSIN TIEN CITY,
TAIPEI HSIEN, TAIWAN, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was ***passed* CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Feb. 11, 2000 at **SPORTON International Inc.** LAB. in Nei Hwu.

Lenore Chang
President

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

JOYTECH COMPUTER CO., LTD.
3F, No. 1, ALLEY 2, SZU-WEI LANE,
CHUNG CHENG RD., HSIN TIEN CITY,
TAIPEI HSIEN, TAIWAN, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment : VGA CARD
Model No. : A4-SIS300SG-B1
Trade Name : JOYTECH
VGA Cable : Shielded, 2.0m
S+AV Video Cable : Braided-Shielded, 0.15m
3D Simulation Glasses Cable : Non-Shielded, 1.9m
Remark : A ferrite core is add on the S+AV Video cable at EUT end
Power Supply Type : From PC
Power Cord : N/A

1.4. Feature of Equipment under Test

- Dualview and TV-out:
 - Built-in TMDS transmitter with Bi-Linear scaling capability for LCD panel
 - Built-in NTSC/PAL video encoder for TV display
 - TV-Output with S-video Output
- Fully Advanced 3D Hardware
- Refresh Rates (Hz) up to: 1600*1200/106KHz/85Hz

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The HITACHI Monitor, DELL PS/2 Keyboard, PRIMAX PS/2 Mouse, HP Printer, ACEEX Modem, SONY TV and EUT were connected to the FIC PC for EMI test.
- c. The Following display resolution were investigated during the compliance test:
 1. Horizontal frequency (640x480 to 1,600x1,200, 31.5 KHz to 106 KHz)
 2. Vertical frequency (60 Hz to 85 Hz)
- d. According to the above tests, we listed the following display modes as the worst cases:
 1. 1,600x1,200 (non-interlanced 106 KHz), refresh rate 85 Hz, CRT mode.
 2. 1,280x1,024 (non-interlanced 91 KHz), refresh rate 85 Hz, CRT mode.
 3. 640x480, TV+CRT 3D TEST mode.
- e. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 2,000 MHz.

2.2. Description of Test System

Support Unit 1. -- Monitor (HITACHI)

FCC ID	: M9U9705C97BMD
Model No.	: CM803ET
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0181
Data Cable	: Shielded, 2.0m

Support Unit 2. -- PS/2 Keyboard (DELL)

FCC ID	: GYUM90SK
Model No.	: AT101W
Serial No.	: SP0019
Data Cable	: Shielded, 2.0m

Support Unit 3. -- PS/2 Mouse (PRIMAX)

FCC ID	: EMJMJUSJQ
Model No.	: MUS9J
Serial No.	: SP0045
Data Cable	: Non-Shielded, 1.75m

Support Unit 4. -- Printer (HP)

FCC ID	: DSI6XU2225
Model No.	: 2225C
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0014
Data Cable	: Shielded, 1.35m

Support Unit 5. -- Modem (ACEEX)

FCC ID	: IFAXDM1414
Model No.	: DM1414
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0015
Data Cable	: Shielded, 1.15m


Support Unit 6. -- TV (SONY)

Model No.	: PVM-14N2E
Power Supply Type	: Switching
Serial No.	: SP0097
S-Video Data Cable	: Non-Shielded, 1.5m
AV-Video Data Cable	: Non-Shielded, 1.5m

Support Unit 7. -- Personal Computer (FIC)

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3. Connection Diagram of Test System

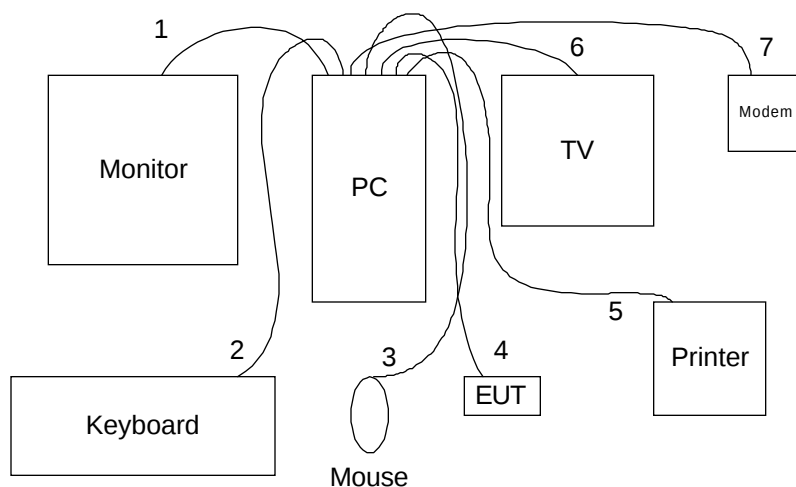

1. The I/O cable is connected from EUT to the support unit 1.
2. The I/O cable is connected to the support unit 2.
3. The I/O cable is connected to the support unit 3.
4. The I/O cable is connected to the EUT.
5. The I/O cable is connected to the support unit 4.
6. The I/O cable is connected from EUT to the support unit 6.
7. The I/O cable is connected to the support unit 5.

3. Test Software

An executive program, WINFCC.EXE under WIN 98, which generates a complete line of continuously repeating " H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
(for CRT only)
- d. The PC sends Video message to monitor and TV, and the monitor and TV display Video message on the screen. (for CRT and TV)
- e. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- f. The PC sends " H" messages to the modem.
- g. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- h. Repeat the steps from b to g.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc.

Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,
Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-4739

FAX : 886-2-2631-9740

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

CISPR PUB. 22 Class B

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 2,000 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 10 M.

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1. Major Measuring Instruments

● Test Receiver	(R&S ESH3)
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 KHz

5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

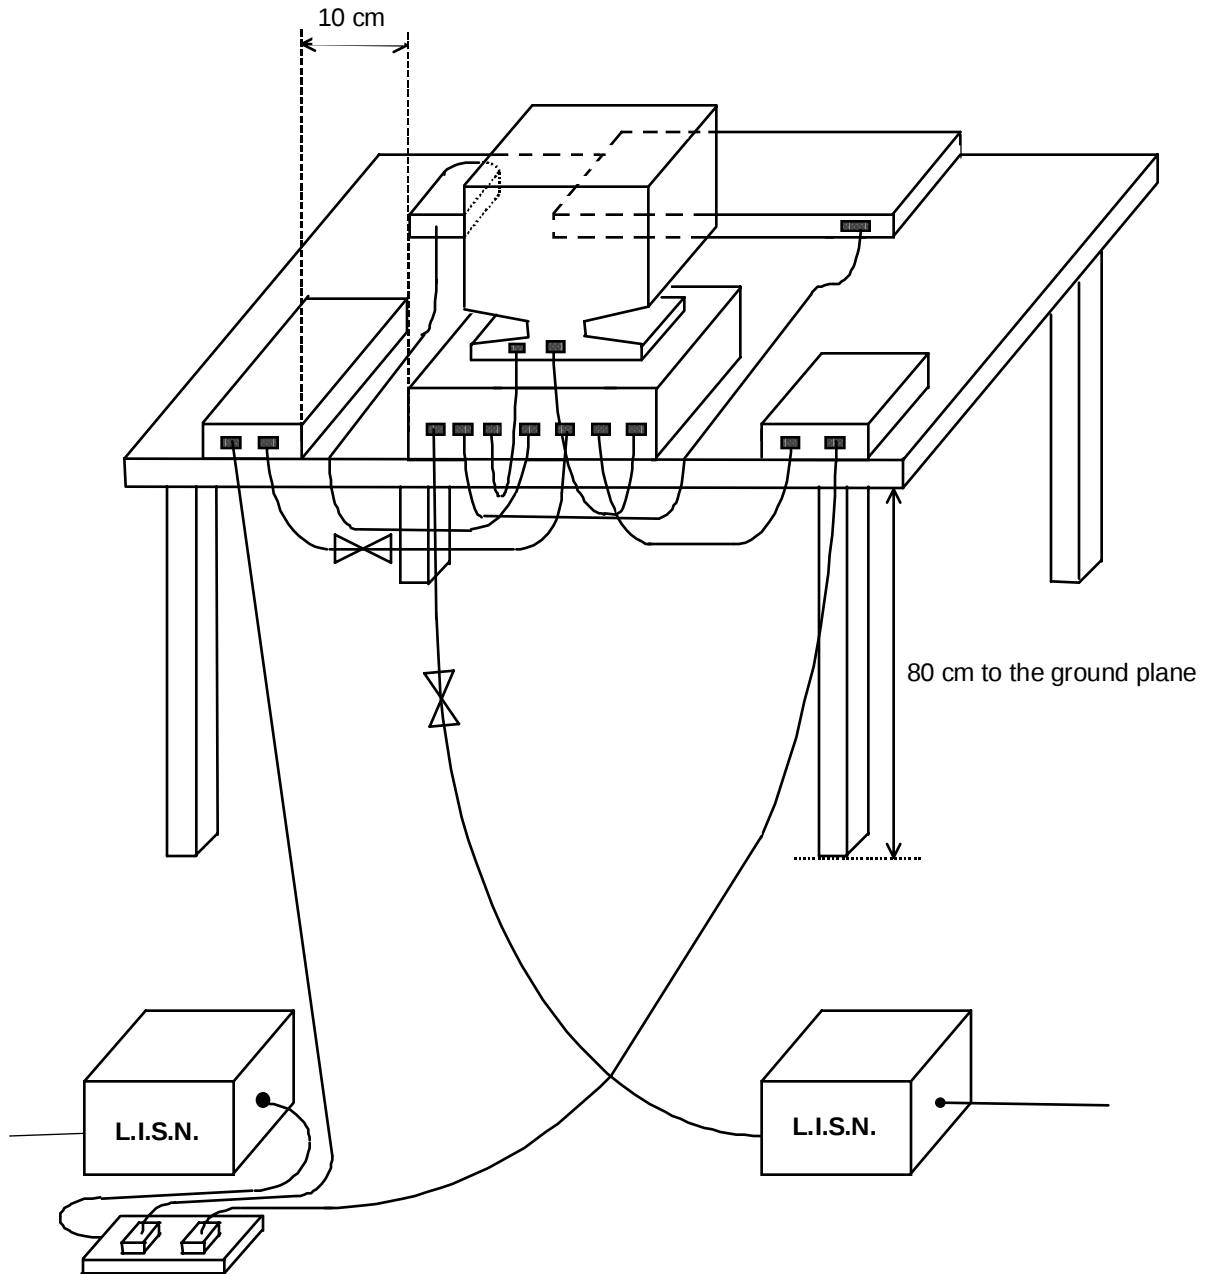

5.4. Test Result of AC Powerline Conducted Emission

5.4.1. Test mode : 1600*1200/106K/85Hz

- Temperature : 23°C
- Relative Humidity : 50 %
- Test Date : Feb. 11, 2000

The Conducted Emission test was passed at minimum margin

NEUTRAL 0.270 MHz / 45.30 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.270	L	48.50	44.20	266.07	162.18	61.12	51.12	1137.36	359.66	-12.6	-6.9
9.570	L	46.20	38.50	204.17	84.14	60.00	50.00	1000.00	316.23	-13.8	-11.5
20.220	L	47.30	36.20	231.74	64.57	60.00	50.00	1000.00	316.23	-12.7	-13.8
0.270	N	50.10	45.30	319.89	184.08	61.12	51.12	1137.36	359.66	-11.0	-5.8
9.570	N	50.20	32.10	323.59	40.27	60.00	50.00	1000.00	316.23	-9.8	-17.9
20.220	N	48.60	37.90	269.15	78.52	60.00	50.00	1000.00	316.23	-11.4	-12.1

Test Engineer : _____
LOUIS LIN

5.4.2. Test mode : 1280*1024/91K/85Hz

- Temperature : 23°C
- Relative Humidity : 50 %
- Test Date : Feb. 11, 2000

The Conducted Emission test was passed at minimum margin

NEUTRAL 0.270 MHz / 45.90 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.270	L	47.60	43.20	239.88	144.54	61.12	51.12	1137.36	359.66	-13.5	-7.9
2.960	L	43.60	32.60	151.36	42.66	56.00	46.00	630.96	199.53	-12.4	-13.4
20.220	L	47.50	36.80	237.14	69.18	60.00	50.00	1000.00	316.23	-12.5	-13.2
0.270	N	50.80	45.90	346.74	197.24	61.12	51.12	1137.36	359.66	-10.3	-5.2
9.570	N	48.90	34.30	278.61	51.88	60.00	50.00	1000.00	316.23	-11.1	-15.7
20.220	N	46.30	35.10	206.54	56.89	60.00	50.00	1000.00	316.23	-13.7	-14.9

Test Engineer : _____
LOUIS LIN

5.4.3. Test mode : 640*480 TV+CRT 3D TEST

- Temperature : 23°C
- Relative Humidity : 50 %
- Test Date : Feb. 11, 2000

The Conducted Emission test was passed at minimum margin

NEUTRAL 0.270 MHz / 44.30 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.270	L	47.40	42.80	234.42	138.04	61.12	51.12	1137.36	359.66	-13.7	-8.3
9.570	L	49.30	38.50	291.74	84.14	60.00	50.00	1000.00	316.23	-10.7	-11.5
20.220	L	43.40	32.30	147.91	41.21	60.00	50.00	1000.00	316.23	-16.6	-17.7
0.270	N	49.30	44.30	291.74	164.06	61.12	51.12	1137.36	359.66	-11.8	-6.8
9.570	N	49.40	35.20	295.12	57.54	60.00	50.00	1000.00	316.23	-10.6	-14.8
20.220	N	46.20	36.80	204.17	69.18	60.00	50.00	1000.00	316.23	-13.8	-13.2

Test Engineer : _____
LOUIS LIN

5.5. Photographs of Counducted Powerline Test Configuration

- The photographs show the configuration that generates the maximum emission.

CRT ONLY

FRONT VIEW



REAR VIEW



SIDE VIEW



TV+CRT

FRONT VIEW



REAR VIEW



SIDE VIEW



6. Test of Radiated Emission

Radiated emissions from 30 MHz to 2,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments


- Amplifier (HP 87405A)
 - Attenuation 0 dB
 - RF Gain 20 dB
 - Signal Input 10 MHz to 3 GHz

- Spectrum Analyzer (HP 8594A)
 - Attenuation 0 dB
 - Start Frequency 30 MHz
 - Stop Frequency 2000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 2.9 GHz

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

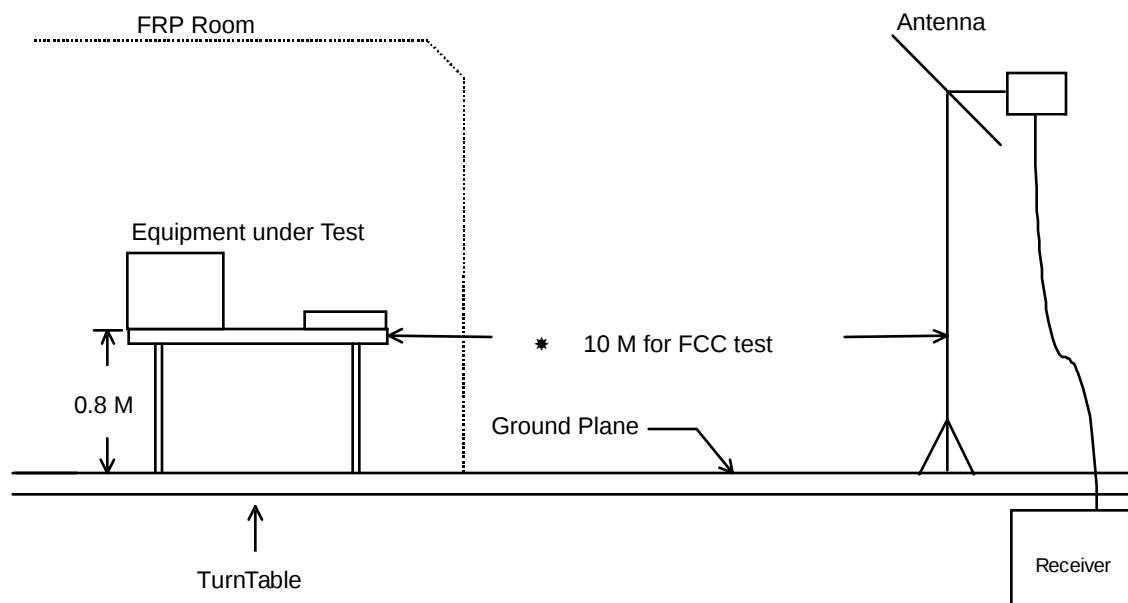

6.4. Test Result of Radiated Emission

6.4.1. Test mode : 1600*1200/106K/85Hz

- Test Distance : 10 M
- Temperature : 26°C
- Relative Humidity : 55 %
- Test Date : Feb. 10, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

228.800 MHz / 24.42 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 190 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
171.800	H	9.33	1.82	10.20	30.00	31.62	21.35	11.68	-8.65
57.200	V	7.42	1.14	13.60	30.00	31.62	22.16	12.82	-7.84
114.500	V	11.88	1.75	7.91	30.00	31.62	21.54	11.94	-8.46
171.800	V	9.33	1.82	13.00	30.00	31.62	24.15	16.13	-5.85
228.800	V	10.77	2.14	11.51	30.00	31.62	24.42	16.63	-5.58
527.200	V	18.32	3.45	8.50	37.00	70.79	30.27	32.62	-6.73

Test Engineer : _____
LOUIS LIN

6.4.2. Test mode : 1280*1024/91K/85Hz

- Test Distance : 10 M
- Temperature : 26°C
- Relative Humidity : 55 %
- Test Date : Feb. 10, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

172.800 MHz / 25.43 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 277 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
460.000	H	16.61	3.16	8.70	37.00	70.79	28.47	26.52	-8.53
50.400	V	10.16	1.00	11.90	30.00	31.62	23.06	14.22	-6.94
113.300	V	11.80	1.76	7.10	30.00	31.62	20.66	10.79	-9.34
172.800	V	9.31	1.83	14.29	30.00	31.62	25.43	18.69	-4.57
196.900	V	9.59	1.94	9.00	30.00	31.62	20.53	10.63	-9.47
488.000	V	17.51	3.32	7.60	37.00	70.79	28.43	26.39	-8.57

Test Engineer : _____
LOUIS LIN

6.4.3. Test mode : 640*480 TV+CRT 3D TEST

- Test Distance : 10 M
- Temperature : 26°C
- Relative Humidity : 55 %
- Test Date : Feb. 11, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

501.254 MHz / 33.83 dBuV (HORIZONTAL) Antenna Height 4 Meter, Turntable Degree 66 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
162.095	H	9.61	1.80	14.30	30.00	31.62	25.71	19.30	-4.29
376.000	H	14.88	2.90	15.30	37.00	70.79	33.08	45.08	-3.92
501.254	H	17.92	3.40	12.51	37.00	70.79	33.83	49.15	-3.17
135.060	V	11.93	1.70	13.20	30.00	31.62	26.83	21.95	-3.17
400.993	V	15.95	3.00	14.00	37.00	70.79	32.95	44.41	-4.05
432.000	V	16.17	3.06	14.00	37.00	70.79	33.23	45.87	-3.77

Test Engineer : _____

LOUIS LIN

6.5. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

CRT ONLY

FRONT VIEW



REAR VIEW



TV+CRT

FRONT VIEW



REAR VIEW



7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	21.0	0.6
35	17.4	0.8
40	16.5	0.8
45	12.8	1.0
50	10.2	1.0
55	8.2	1.1
60	6.2	1.2
65	7.0	1.3
70	7.7	1.3
75	7.6	1.4
80	7.5	1.6
85	7.9	1.6
90	8.3	1.8
95	9.5	1.8
100	10.6	1.8
110	11.5	1.8
120	12.4	1.7
130	12.1	1.7
140	11.7	1.7
150	10.9	1.7
160	9.7	1.8
170	9.4	1.8
180	9.4	1.9
190	9.5	1.8
200	9.6	2.0
220	10.4	2.1
240	11.2	2.2
260	11.8	2.4
280	12.2	2.6
300	12.6	2.9
320	13.0	2.8
340	13.4	2.8
360	14.2	2.8
380	15.1	2.9
400	15.9	3.0
450	16.3	3.1
500	17.9	3.4
550	18.7	3.5
600	19.2	4.1
650	17.5	3.8
700	16.5	4.3
750	17.3	4.3
800	17.4	4.5
850	17.5	4.7
900	20.4	4.7
950	20.7	5.0
1000	19.6	5.3
2000	26.4	8.6

NHOP1

8. List of Measuring Equipment Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Test Receiver	R&S	ESH3	893495/013	9 KHz - 30 MHz	Apr. 19, 1999	Conduction
Spectrum Monitor	R&S	EZM	894987/011	N/A	Apr. 21, 1999	Conduction
LISN (for EUT)	KYORITSU	KNW-407	8-1010-15	50 ohm / 50 μ H	Nov. 16, 1999	Conduction
LISN (for support device)	EMCO	3810/2	9703-1838	50 ohm / 50 μ H	Aug. 30, 1999	Conduction
EMI Filter	CORCOM	MRI-2030	N/A	480VAC / 30A	N/A	Conduction
Amplifier (Site 1)	HP	87405A	3207A01437	10MHz ~3.0GHz	Jun. 25, 1999	Radiation
Spectrum Analyzer (site 1)	HP	8594A	3051A00172	9KHz ~2.9GHz	Apr. 16, 1999	Radiation
Bilog Antenna (site 1)	CHASE	CBL6112A	2302	30MHz - 2GHz	Jan. 25, 2000	Radiation
Half-wave dipole antenna (site 1)	EMCO	3121C	8912-1285	20MHz - 1GHz	May. 18, 1999	Radiation
Turn Table	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	N/A	Radiation
Antenna Mast	EMCO	2075	9806-2160	1 m - 4 m	N/A	Radiation