

FCC TEST REPORT

for

CISPR PUB. 22 Class B

Equipment : VGA CARD
Model No. : A4-TNT2SD-A3-O
FCC ID : FQITNT2
Filing Type : Original Grant
Applicant : JOYTECH COMPUTER CO., LTD.
3F, No. 1, ALLEY 2, SZU-WEI LANE,
CHUNG CHENG RD., HSIN TIEN CITY,
TAIPEI HSIEN, TAIWAN, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE	3
1. General Description of Equipment under Test	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Basic Description of Equipment under Test	4
1.4. Feature of Equipment under Test	4
2. Test Configuration of Equipment under Test	5
2.1. Test Manner	5
2.2. Description of Test System	7
2.3. Connection Diagram of Test System	7
3. Test Software	9
4. General Information of Test	9
4.1. Test Facility	9
4.2. Standard for Methods of Measurement	9
4.3. Test in Compliance with	9
4.4. Frequency Range Investigated	9
4.5. Test Distance	9
5. Test of Conducted Powerline	10
5.1. Major Measuring Instruments	11
5.2. Test Procedures	12
5.3. Typical Test Setup Layout of Conducted Powerline	13
5.4. Test Result of AC Powerline Conducted Emission	17
5.5. Photographs of Couducted Powerline Test Configuration	23
6. Test of Radiated Emission	23
6.1. Major Measuring Instruments	24
6.2. Test Procedures	25
6.3. Typical Test Setup Layout of Radiated Emission	26
6.4. Test Result of Radiated Emission	30
6.5. Photographs of Radiated Emission Test Configuration	33
7. Antenna Factor & Cable Loss	34
8. List of Measuring Equipments Used	34

CERTIFICATE OF COMPLIANCE


for

CISPR PUB. 22 Class B

Equipment : VGA CARD
Model No. : A4-TNT2SD-A3-O
FCC ID : FQITNT2
Applicant : **JOYTECH COMPUTER CO., LTD.**
3F, No. 1, ALLEY 2, SZU-WEI LANE,
CHUNG CHENG RD., HSIN TIEN CITY,
TAIPEI HSIEN, TAIWAN, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Jun. 22, 1999 at **SPORTON International Inc.** LAB. in Lin Kou.

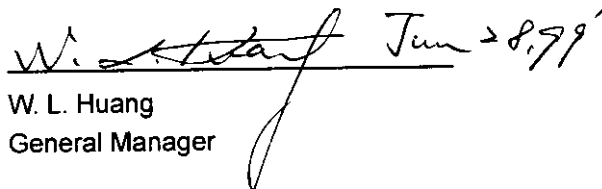
W. L. Huang
General Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

JOYTECH COMPUTER CO., LTD.
3F, No. 1, ALLEY 2, SZU-WEI LANE,
CHUNG CHENG RD., HSIN TIEN CITY,
TAIPEI HSIEN, TAIWAN, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment	: VGA CARD
Model No.	: A4-TNT2SD-A3-O
FCC ID	: FQITNT2
Trade Name	: JOYTECH
VGA Data Cable	: Shielded, 1.15m
LCD Data Cable	: Shielded, 1.7m
TV Data Cable	: Shielded, 1.7m
Power Supply Type	: N/A
Power Cord	: N/A

1.4. Feature of Equipment under Test

- Optimized Direct 3D and OpenGL acceleration
- 32-bit Z/stencil Buffer
- Anti-aliasing: full scene, order independent
- Anisotropic filtering
- Texture Blend Support
- Per- pixel perspective correct texture mapping
- Flat Panel Desktop Monitor Support
- 24-bit digital interface for flat panel encoders(TMDS Transmitter)
- Support for resolution up to SXGA at 1024x768@60Hz

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The HITACHI Monitor, DELL PS/2 Keyboard, PRIMAX PS/2 Mouse, HP Printer, ACEEX Modem, PANASONIC TV-Monitor, COMPAQ LCD Monitor and EUT were connected to the FIC PC for EMI test.
- c. The Following display resolution were investigated during the compliance test:
 1. Horizontal frequency (640x480 to 1,600x1,200, 31.5 KHz to 109 KHz)
 2. Vertical frequency (60 Hz to 100 Hz)
- d. According to the above tests, we listed the following display modes as the worst cases:
 1. 1,600x1,200 (non-interlanced 106 KHz), refresh rate 85 Hz ;VGA mode.
 2. 1,280x1,024 (non-interlanced 109KHz), refresh rate 100 Hz ;VGA mode.
 3. 1,024x768 (non-interlanced 48 KHz), refresh rate 60 Hz ;LCD mode.
 4. 800x600, refresh rate 60 Hz; TV mode.
- e. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 2000MHz.

2.2. Description of Test System

Support Unit 1. -- Personal Computer (FIC)

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded, 360 degree via metal backshells
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (HITACHI)

FCC ID	: M9U9705C97BMD
Model No.	: CM803ET
Power Supply Type	: Switching
Power Cord	: N/A
Serial No.	: SP0181
Data Cable	: Shielded, 360 degree via metal backshells, 1.15m

Support Unit 3. -- PS/2 Keyboard (DELL)

FCC ID : GYUM92SK
Model No. : AT101(DE8M)
Serial No. : SP0054
Data Cable : Shielded, 360 degree via metal backshells, 1.9m

Support Unit 4. -- PS/2 Mouse (PRIMAX)

FCC ID : EMJMUSJQ
Model No. : MUS9J
Serial No. : SP0045
Data Cable : Shielded, 360 degree via metal backshells, 1.7m

Support Unit 5. -- Printer (HP)

FCC ID : B94C2642X
Model No. : DeskJet 400
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Braided-Shielded, 360 degree via metal backshells, 1.35m

Support Unit 6. -- Modem (ACEEX)


FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : N/A
Serial No. : SP0076
Data Cable : Braided-Shielded, 360 degree via metal backshells, 1.15m

Support Unit 7. -- TV-Monitor (Panasonic)

FCC ID : N/A
Model No. : WV-CM1450
Serial No. : SP0041
Data Cable : Shielded, 1.7 M

Support Unit 8. -- LCD Monitor (COMPAQ)

FCC ID : N/A
Model No. : FP500
Serial No. : SP00190
Data Cable : Shielded, 360 degree via metal backshells, 1.7m

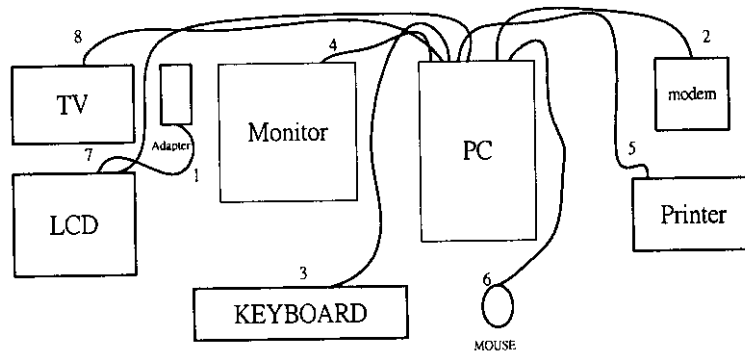2.3. Connection Diagram of Test System

1. The power cord is connected from LCD to the Adapter .
2. The I/O cable is connected from PC to the support unit 6.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from EUT to the support unit 2.
5. The I/O cable is connected from PC to the support unit 5.
6. The I/O cable is connected from PC to the support unit 4.
7. The I/O cable is connected from EUT to the support unit 8.
8. The I/O cable is connected from EUT to the support unit 7.

3. Test Software

Two executive program, EMITEST.EXE & WINFCC.EXE under WIN 98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc. in an openarea test site.
Openarea Test Site Location: No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,
Taipei Hsien, Taiwan, R.O.C.
TEL : 886-2-2601-1640
FAX : 886-2-2601-1695

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

CISPR PUB. 22 Class B

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 2,000 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 10 M.

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1. Major Measuring Instruments

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

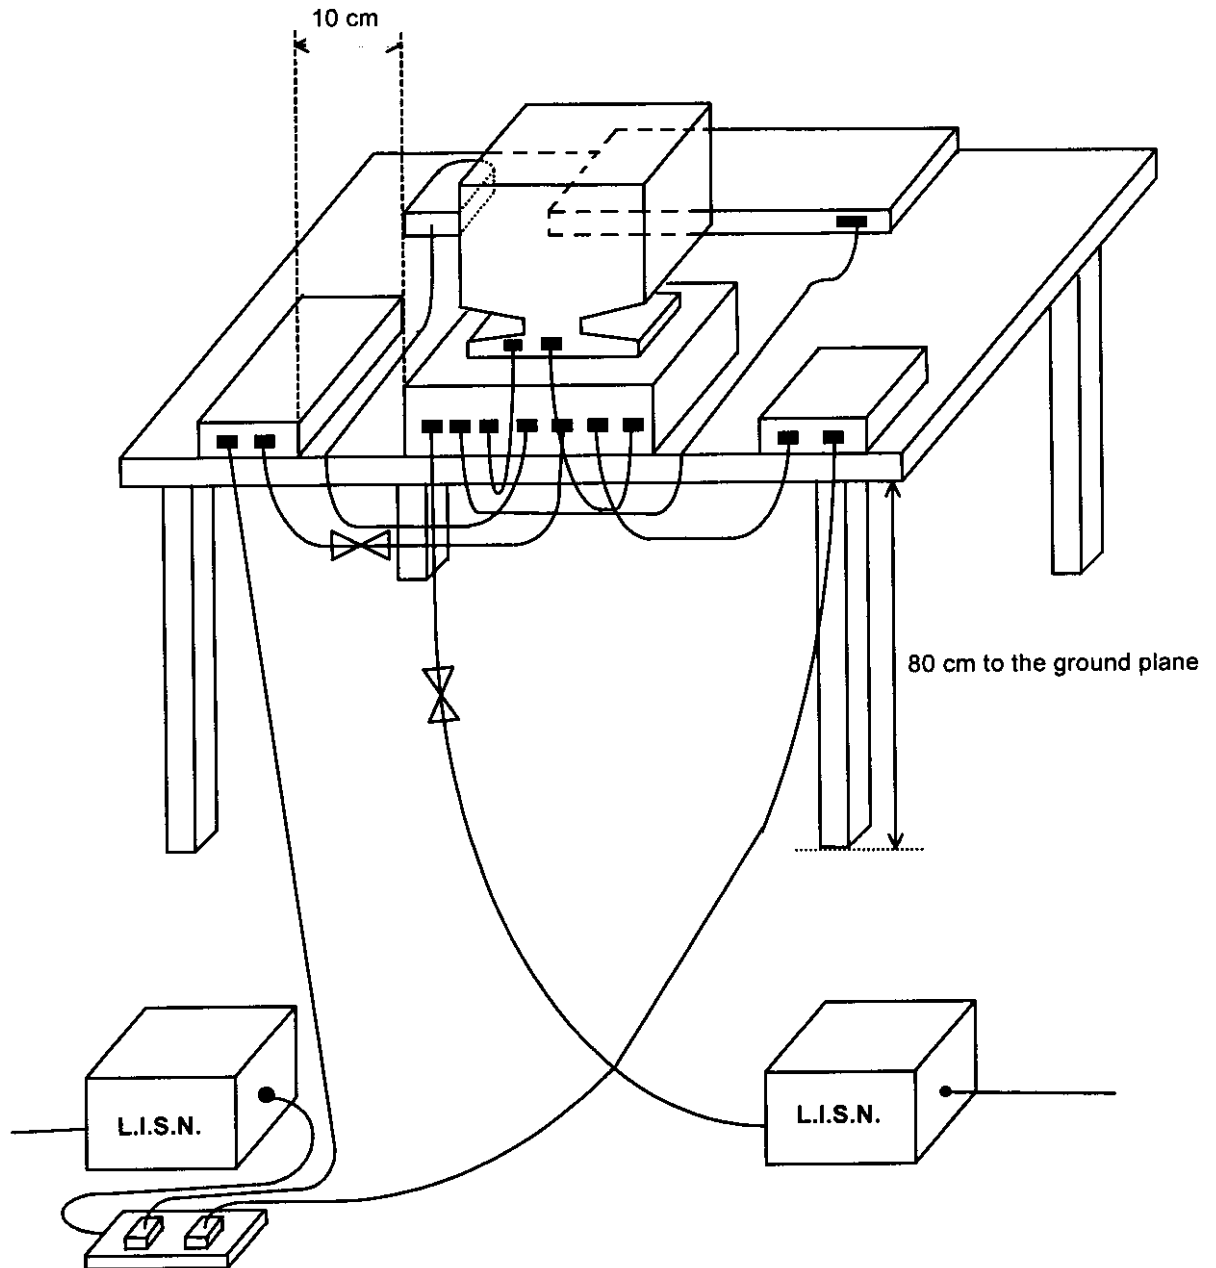

5.4. Test Result of AC Powerline Conducted Emission

5.4.1. Test mode : 1600x1200 85Hz/106K (VGA mode)

- Temperature : 26°C
- Relative Humidity : 57 %
- Test Date : Jun. 22, 1999

The Conducted Emission test was passed at minimum margin

NEUTRAL 0.245 MHz / 45.20 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.212	L	44.70	44.10	171.79	160.32	63.13	53.13	1433.92	453.45	-18.43	-9.03
0.454	L	33.20	31.60	45.71	38.02	56.81	46.81	692.40	218.95	-23.61	-15.21
15.998	L	28.50	22.60	26.61	13.49	60.00	50.00	1000.00	316.23	-31.50	-27.40
0.245	N	45.20	42.90	181.97	139.64	61.92	51.92	1248.10	394.68	-16.72	-9.02
0.455	N	33.70	32.20	48.42	40.74	56.79	46.79	690.79	218.45	-23.09	-14.59
15.999	N	30.10	24.50	31.99	16.79	60.00	50.00	1000.00	316.23	-29.90	-25.50

Test Engineer : 
KENNY CHUANG

5.4.2. Test mode : 1280x1024 100Hz/109K (VGA mode)

- Temperature : 26°C
- Relative Humidity : 57 %
- Test Date : Jun. 22, 1999

The Conducted Emission test was passed at minimum margin

NEUTRAL 0.245 MHz / 45.20 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.247	L	43.60	42.40	151.36	131.83	61.87	51.87	1239.93	392.10	-18.27	-9.47
1.275	L	21.10	14.90	11.35	5.56	56.00	46.00	630.96	199.53	-34.90	-31.10
9.137	L	25.10	20.50	17.99	10.59	60.00	50.00	1000.00	316.23	-34.90	-29.50
0.245	N	45.20	42.60	181.97	134.90	61.93	51.93	1249.07	394.99	-16.73	-9.33
8.901	N	25.10	20.30	17.99	10.35	60.00	50.00	1000.00	316.23	-34.90	-29.70
16.000	N	30.30	24.50	32.73	16.79	60.00	50.00	1000.00	316.23	-29.70	-25.50

Test Engineer : 
KENNY CHUANG

5.4.3. Test mode : 1024x768 60Hz/48K (LCD mode)

- Temperature : 26°C
- Relative Humidity : 57 %
- Test Date : Jun. 22, 1999

The Conducted Emission test was passed at minimum margin

NEUTRAL 0.245 MHz / 45.10 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.245	N	45.10	42.60	179.89	134.90	61.93	51.93	1249.09	395.00	-16.83	-9.33
0.457	N	32.80	31.10	43.65	35.89	56.75	46.75	688.05	217.58	-23.95	-15.65
19.490	N	27.90	21.60	24.83	12.02	60.00	50.00	1000.00	316.23	-32.10	-28.40
25.385	N	27.10	22.30	22.65	13.03	60.00	50.00	1000.00	316.23	-32.90	-27.70
0.245	L	43.80	41.60	154.88	120.23	61.92	51.92	1248.10	394.68	-18.12	-10.32
15.999	L	29.80	25.70	30.90	19.28	60.00	50.00	1000.00	316.23	-30.20	-24.30

Test Engineer :


KENNY CHUANG

5.4.4. Test mode : 800x600 60Hz (TV mode)

- Temperature : 26°C
- Relative Humidity : 57 %
- Test Date : Jun. 22, 1999

The Conducted Emission test was passed at minimum margin

NEUTRAL 0.245 MHz / 45.10 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.245	L	43.60	40.80	151.36	109.65	61.94	51.94	1249.81	395.22	-18.34	-11.14
9.693	L	37.60	31.40	75.86	37.15	60.00	50.00	1000.00	316.23	-22.40	-18.60
19.385	L	35.40	28.60	58.88	26.92	60.00	50.00	1000.00	316.23	-24.60	-21.40
0.245	N	45.10	42.70	179.89	136.46	61.93	51.93	1249.07	394.99	-16.83	-9.23
0.335	N	36.80	35.10	69.18	56.89	59.33	49.33	925.37	292.63	-22.53	-14.23
9.692	N	38.30	32.10	82.22	40.27	60.00	50.00	1000.00	316.23	-21.70	-17.90

Test Engineer :


KENNY CHUANG

6. Test of Radiated Emission

Radiated emissions from 30 MHz to 2,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


6.1. Major Measuring Instruments

Amplifier	(HP 87405A)
Attenuation	0 dB
RF Gain	20 dB
Signal Input	10 MHz to 3 GHz
Spectrum Analyzer	(HP 8594A)
Attenuation	0 dB
Start Frequency	30 MHz
Stop Frequency	2,000 MHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	9 KHz to 2.9 GHz
Quasi-Peak Adapter	(HP 8594A)
Resolution Bandwidth	120 KHz
Frequency Band	30 MHz to 1 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode OFF for Peak Mode

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

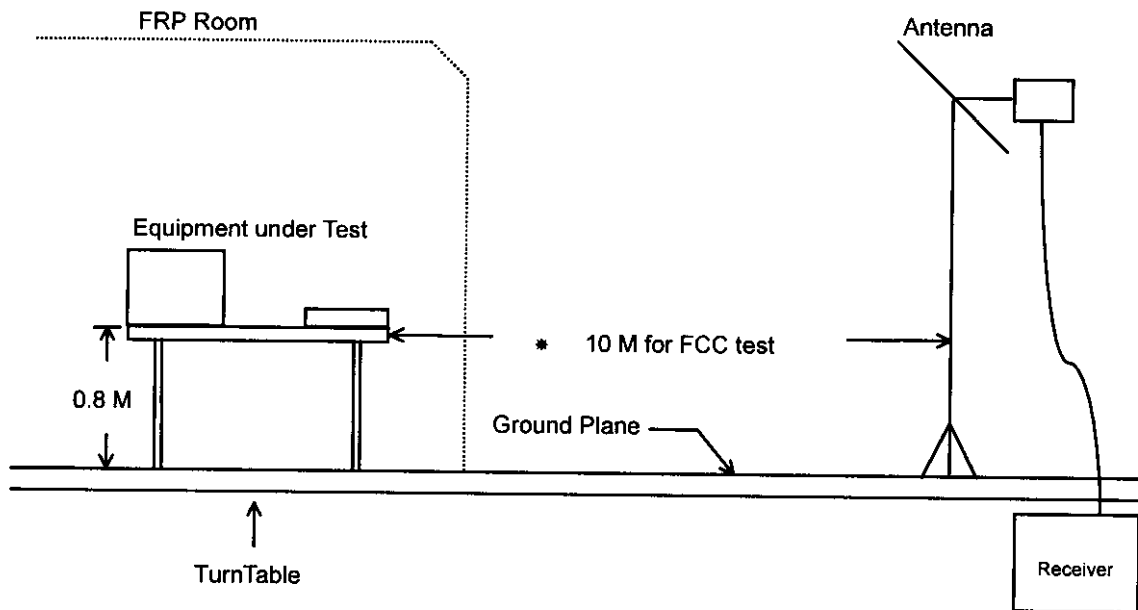

6.4. Test Result of Radiated Emission

6.4.1. Test mode : 1600x1200 85Hz/106K (VGA mode)

- Test Distance : 10 M
- Temperature : 30°C
- Relative Humidity : 64 %
- Test Date : Jun. 16, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

83.700 MHz / 25.07 dBuV (HORIZONTAL) Antenna Height 4 Meter, Turntable Degree 255 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
68.600	H	5.97	0.93	16.32	30.00	31.62	23.22	14.49	-6.78
83.700	H	7.80	1.10	16.17	30.00	31.62	25.07	17.93	-4.93
122.000	H	12.39	1.19	10.93	30.00	31.62	24.51	16.81	-5.49
428.000	H	16.66	2.42	11.40	37.00	70.79	30.48	33.42	-6.52
66.800	V	5.79	0.97	17.91	30.00	31.62	24.67	17.12	-5.33
158.300	V	10.53	1.32	11.51	30.00	31.62	23.36	14.72	-6.64

Test Engineer : William Lee
WILLIAM LEE

6.4.2. Test mode : 1280x1024 100Hz/109K (VGA mode)

- Test Distance : 10 M
- Temperature : 30°C
- Relative Humidity : 64 %
- Test Date : Jun. 16, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

57.289 MHz / 26.99 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 267 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
207.200	H	9.39	1.58	13.63	30.00	31.62	24.60	16.98	-5.40
228.000	H	10.41	1.61	14.58	30.00	31.62	26.60	21.38	-3.40
57.289	V	6.12	0.90	19.97	30.00	31.62	26.99	22.36	-3.01
63.500	V	5.51	0.97	17.51	30.00	31.62	23.99	15.83	-6.01
134.100	V	11.38	1.31	11.30	30.00	31.62	23.99	15.83	-6.01
164.100	V	10.33	1.43	10.94	30.00	31.62	22.70	13.65	-7.30

Test Engineer : William Lee
WILLIAM LEE

6.4.3. Test mode : 1024x768 60Hz/48K (LCD mode)

- Test Distance : 10 M
- Temperature : 30°C
- Relative Humidity : 64 %
- Test Date : Jun. 16, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

196.000 MHz / 26.95 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 301 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
182.900	H	9.62	1.50	15.23	30.00	31.62	26.35	20.77	-3.65
196.200	H	9.15	1.44	16.32	30.00	31.62	26.91	22.16	-3.09
226.400	H	10.31	1.61	13.59	30.00	31.62	25.51	18.86	-4.49
84.400	V	8.01	1.10	17.56	30.00	31.62	26.67	21.55	-3.33
196.000	V	9.15	1.44	16.36	30.00	31.62	26.95	22.26	-3.05
226.400	V	10.31	1.61	12.89	30.00	31.62	24.81	17.40	-5.19

Test Engineer : William Lee
WILLIAM LEE

6.4.4. Test mode : 800x600 60Hz (TV mode)

- Test Distance : 10 M
- Temperature : 30°C
- Relative Humidity : 64 %
- Test Date : Jun. 16, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

120.300 MHz / 25.36 dBuV (VERTICAL) Antenna Height 1.5 Meter, Turntable Degree 164 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
174.000	H	9.99	1.56	12.08	30.00	31.62	23.63	15.19	-6.37
47.400	V	10.11	0.80	12.14	30.00	31.62	23.05	14.21	-6.95
63.500	V	5.51	0.97	18.51	30.00	31.62	24.99	17.76	-5.01
120.300	V	12.43	1.10	11.83	30.00	31.62	25.36	18.54	-4.64
168.900	V	10.16	1.56	11.36	30.00	31.62	23.08	14.26	-6.92
221.600	V	10.12	1.68	11.87	30.00	31.62	23.67	15.26	-6.33

Test Engineer : William Lee
WILLIAM LEE

7. Antenna Factor & Cable Loss

Frequency (Mhz)	Antenna Factor (dB)	Cable Loss (dB)
30	16.7	0.7
35	15.5	0.7
40	14.2	0.9
45	11.3	0.8
50	8.4	0.8
55	6.8	0.9
60	5.1	0.9
65	5.6	1.0
70	6.1	0.9
75	6.6	1.0
80	7.2	0.9
85	8.2	1.1
90	9.2	1.0
95	10.0	1.1
100	10.8	1.1
110	11.7	1.0
120	12.4	1.1
130	11.8	1.4
140	10.8	1.2
150	10.8	1.4
160	10.5	1.3
170	10.1	1.6
180	9.7	1.5
190	9.4	1.5
200	9.0	1.5
220	10.0	1.7
240	11.0	1.6
260	11.8	1.7
280	12.3	1.6
300	12.9	1.9
320	13.8	1.9
340	14.8	2.0
360	15.6	2.0
380	16.1	2.1
400	16.6	2.2
450	16.7	2.6
500	17.7	2.1
550	19.0	2.7
600	19.0	2.9
650	18.7	2.9
700	18.7	3.0
750	19.9	3.0
800	21.3	2.9
850	21.4	3.3
900	21.2	3.5
950	22.4	3.7
1000	23.0	3.3
2000	31.57	6.2

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz – 1.8 GHz	Sep. 18, 1998	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Jan. 22, 1999	Conduction
LISN (Support Unit) (site 2)	EMCO	3810/2NM	9703-1839	50 ohm / 50 uH	Jul. 06, 1998	Conduction
Amplifier (Site 3)	HP	87405A	3207A01437	10MHz –3.0GHz	Jun. 26, 1998	Radiation
Spectrum Analyzer (site 3)	HP	8594A	3051A00172	9KHz –2.9GHz	Apr. 16, 1999	Radiation
Bilog Antenna (Site 3)	CHASE	CBL6112A	2320	30MHz -2GHz	Sep. 10, 1998	Radiation
Half-wave dipole antenna (Site 3)	EMCO	3121C	9705-1285	28M - 1GHz	May 19, 1999	Radiation
Turn Table (site 3)	EMCO	2080	9711-2022	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 3)	EMCO	2075	9710-2101	1 m - 4 m	N/A	Radiation