



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

FOR

Product Name: ScrollToo 700

Model : GM-080019/T

Trade Name: Genius

Issued to

KYE SYSTEMS CORP.

No.492,Sec.5, Chung Hsin Rd., San Chung, Taipei Hsien, 24160, Taiwan, R.O.C.

Issued by

Global Certification Corp.

EMI Test Site	Sansia Lab	No. 34-3, Zihhe Rd., Sansia Township, Taipei County 237, Taiwan (R.O.C.)
EMS Test Site	Sijhih Office and Lab	No. 112-3, Sec. 2, Siangjhang Rd., Sijhih City, Taipei County 221, Taiwan (R.O.C.)



Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of Global Certification Corporation. This document may be altered or revised by Global Certification Corporation. Personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS	2
1. GENERAL INFORMATION	3
1.1 DESCRIPTION OF THE TESTED SAMPLES	4
2. TEST METHODOLOGY	4
2.1 GENERAL TEST PROCEDURES	4
2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	5
2.3 DESCRIPTION OF TEST MODES	6
2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS	7
3. TEST AND MEASUREMENT EQUIPMENT	9
3.1 CALIBRATION	9
3.2 EQUIPMENT	9
4. SECTION 15.227 REQUIREMENTS	10
4.1 TEST SETUP	10
4.2 LIMIT	10
4.3 RESULT: PASSED	10
4.4 TEST DATA:	10
5. SECTION 15.209 REQUIREMENTS	13
5.1 TEST SETUP	13
5.2 LIMIT	14
5.3 TEST PROCEDURE	15
5.4 RESULT: PASSED	15
5.5 TEST DATA:	15
6. POWERLINE CONDUCTED EMISSIONS	16
APPENDIX 1	
PHOTOS OF TEST CONFIGURATION	
APPENDIX 2	
TEST DATA	
PHOTOS OF EUT	



1. GENERAL INFORMATION

Applicant : KYE SYSTEMS CORP.

Address : No.492,Sec.5, Chung Hsin Rd., San Chung, Taipei Hsien, 24160, Taiwan, R.O.C.

Manufacturer : KYE SYSTEMS CORP.

Address : No.492,Sec.5, Chung Hsin Rd., San Chung, Taipei Hsien, 24160, Taiwan, R.O.C.

EUT : ScrollToo 700

Model Name : GM-080019/T

Model Differences : N/A

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.4-2003. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

FCC part 15 subpart C

Receipt Date : 12/11/2008

Final Test Date : 12/31/2008

Taipei, Taiwan

DEC. 31, 2008

(Place)

(Date)

Albert Tsai / Manager

(Signature)

Designation Number: TW1030



1.1 DESCRIPTION OF THE TESTED SAMPLES

EUT Name : **ScrollToo 700**
Model Number : **GM-080019/T**
FCC ID : FSUGMZIN
Input Voltage : 5Vdc
Power From ☒Inside ☐Outside
☐Adaptor ☒BATTERY ☐Power Supply ☐DC Power Source
☐Support Unit PC
Operate Frequency : 27.045MHz
Modulation Technique : FSK
Number of Channels : 1
Channel spacing : ☒N/A ☐_____KHz
Operating Mode : ☒Simplex ☐Duplex
Antenna Type : ☒integral antenna ☐a dedicated antenna

2. TEST METHODOLOGY

All testing as described bellowed were performed in accordance with ANSI C63.4 and FCC CFR 47 Part 15 Subpart C.

2.1 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.4. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.



2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



2.3 DESCRIPTION OF TEST MODES

The EUT was tested under following modes:

Modes:

- 1. Continuous transmitting**

Channels:

- 1. 27.045MHz**


Note: The EUT is designed to operating under channels as mentioned above.



2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

Setup Diagram

See test photographs attached in appendix I for the actual connections between EUT and support equipment.

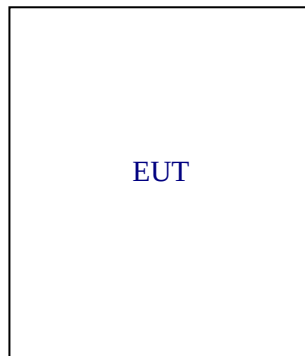



Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
	N/A						
INSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
	N/A						

Note: All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

Grounding: Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



3. TEST AND MEASUREMENT EQUIPMENT

3.1 CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

3.2 EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

TABLE 1 LIST OF TEST AND MEASUREMENT EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Calibration Due Date	Note
Test Receiver	AFJ	ER55R	55300508277	May.20.2009	
Bilog Antenna	SUNOL	JB1	A052104	SEP.30.2009	
Turn table	EMCO	2080	9508-1805	N/A	
Controller	EMCO	2090	9804-1328	N/A	
Amplifier	G.W	GAP-801	EF150001	Jul.18.2009	
EMC Analyzer	AGILENT	E7401A	MY42000145	May.23.2009	
RF Cable	BELDEN	RG-8/U	E037	Jun.07.2009	
Thermo-Hygro meter	WISEWIND	4-IN-1	0412	Apr.10.2009	
Loop Antenna	Teseq GmbH	HLA 6120	26439	Sep. 11.2009	

✂ Calibration interval of instruments listed above is one year



4. SECTION 15.227 REQUIREMENTS

4.1 TEST SETUP

Refer to paragraph 6.1.

4.2 LIMIT

The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters.
The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

4.3 RESULT: PASSED

4.4 TEST DATA:


Axes	Frequency (MHz)	Ant. Polarization	Reading (dBμV)	Correction factor(dB)	Emission (dBμV/m)	Limit (dBμV/m)	Detector
X	27.04	H	36.23	5.44	30.79	80	Peak
Y	27.04	H	52.87	5.44	47.43	80	Peak
Z	27.04	H	52.84	5.44	47.40	80	Peak
X	27.04	V	31.23	5.44	25.79	80	Peak
Y	27.04	V	62.53	5.44	57.09	80	Peak
Z	27.04	V	63.16	5.44	57.72	80	Peak

Note:

1. Average Emission level = Peak Emission level - $20\log(\text{Duty Cycle})$.
2. Duty cycle = 1, Peak-to-Average Factor = $20\log(1) = 0\text{dB}$
3. Emission level = Reading level – Correction factor
4. Duty cycle measurement, please refer to next page



Duty cycle measurement

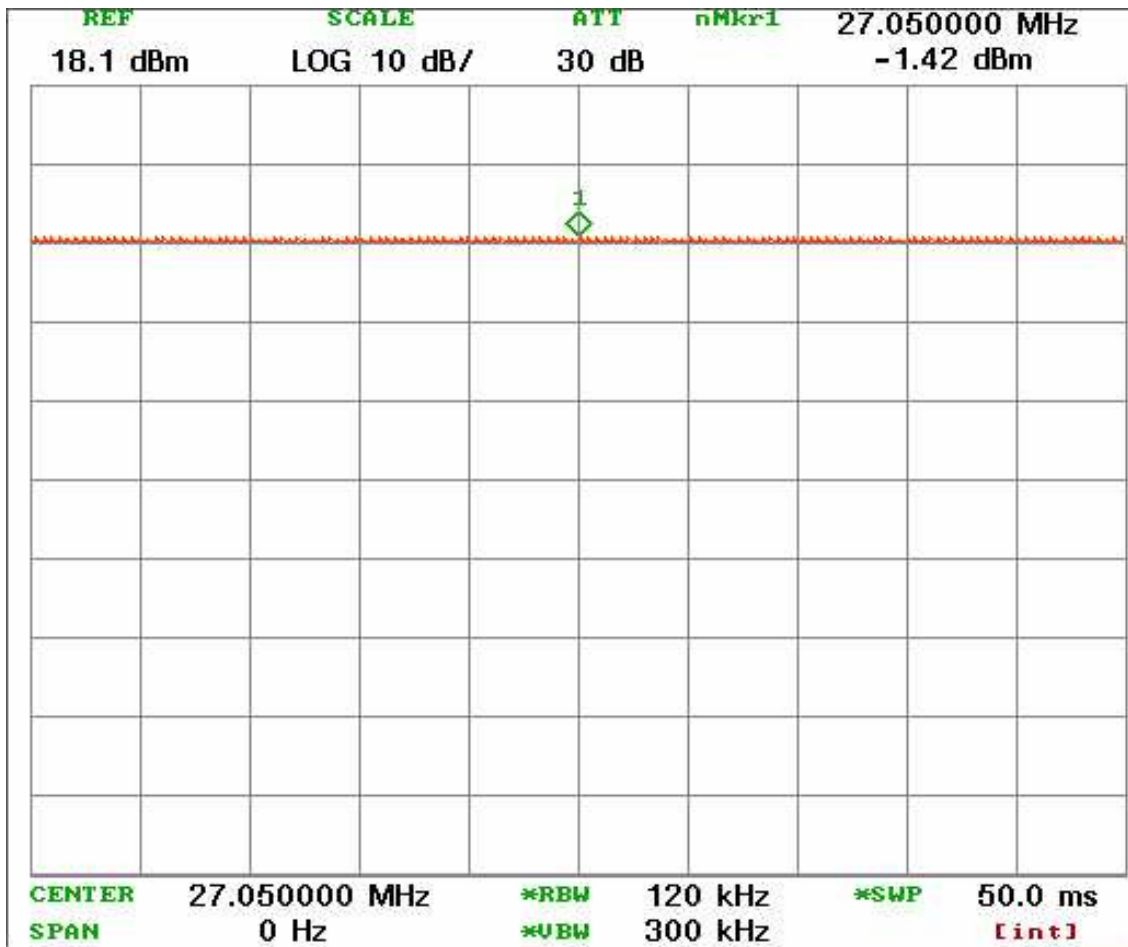



5. SECTION 15.215 REQUIREMENTS

5.1 TEST SETUP


Refer to paragraph 6.1.

5.2 LIMIT

The 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


5.3 RESULT: PASSED

5.4 TEST DATA:

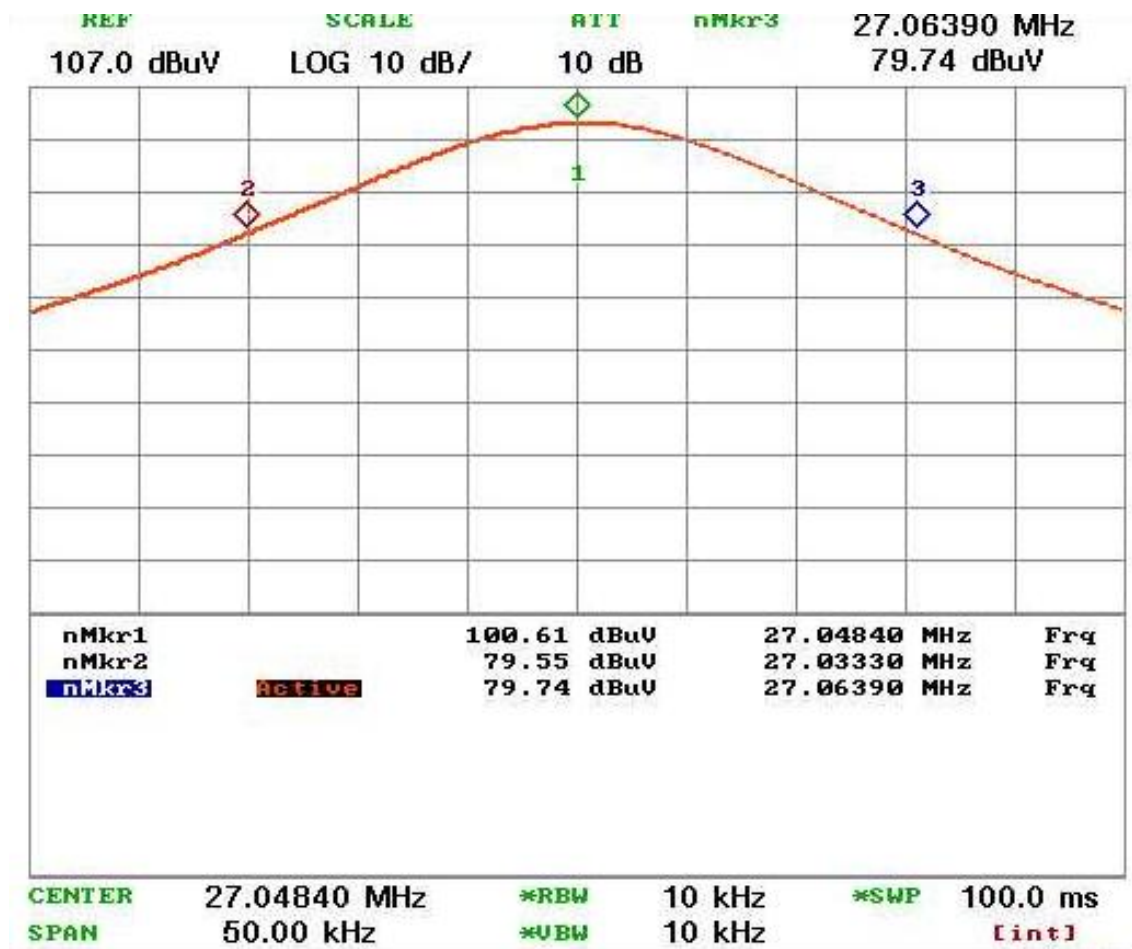

6. SECTION 15.209 REQUIREMENTS

6.1 TEST SETUP

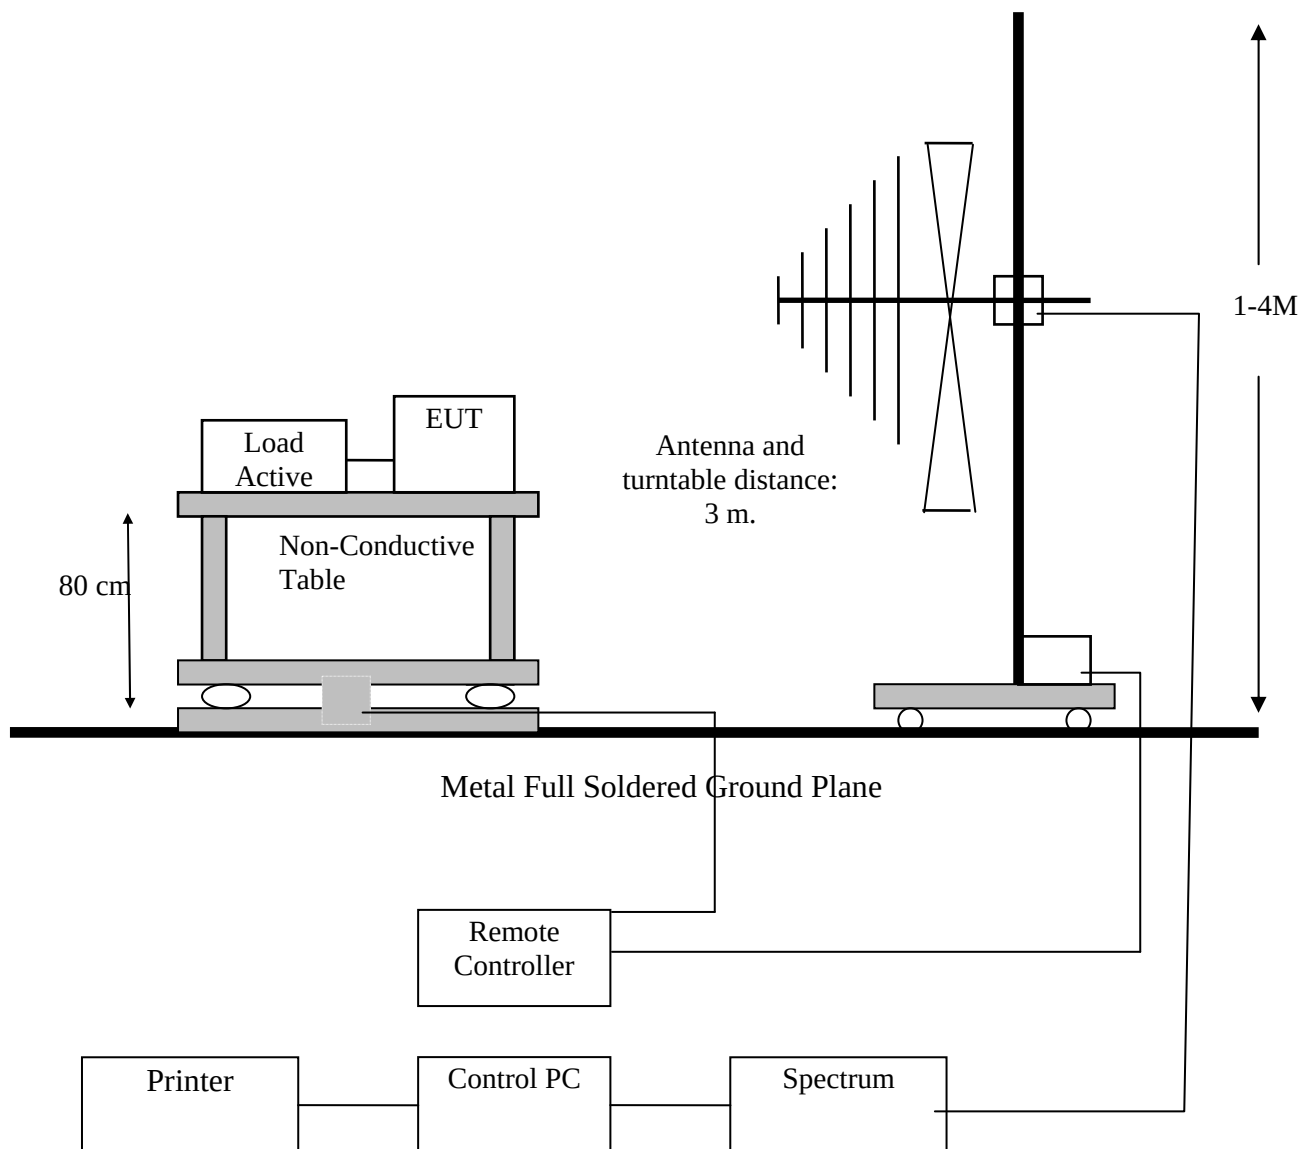



6.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
1.705-30	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500*	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
1.705-30	30 #	29.5#
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54

: The Measurement Distance is at 30 meters.



6.3 TEST PROCEDURE

1. The EUT was placed on a turntable, which was 0.8m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.

6.4 RESULT: PASSED

6.5 TEST DATA:

Please refer to appendix 2

(All frequencies within the range of the general radiated emission limits are not detectable significantly except for the general radiated emission shown in the Appendix 2.)



7. POWERLINE CONDUCTED EMISSIONS

The EUT is powered by the battery; therefore this test item is not applicable.



Global Certification Corp.

Appendix 1

PHOTOS OF TEST CONFIGURATION





Global Certification Corp.

Appendix 2

TEST DATA



Test Data Of Radiated Emission Measurement (Horizontal)




環球認證有限公司

Global Certification Corp.

Global Certification Corp.
No.112-3, Sec.2, Siangjhang Rd.
Sijhih City, Taipei County 221, Taiwan
TEL:886-2-26426992 FAX:886-2-26487450
WebSite: <http://www.gcc.tw>

Data: 7

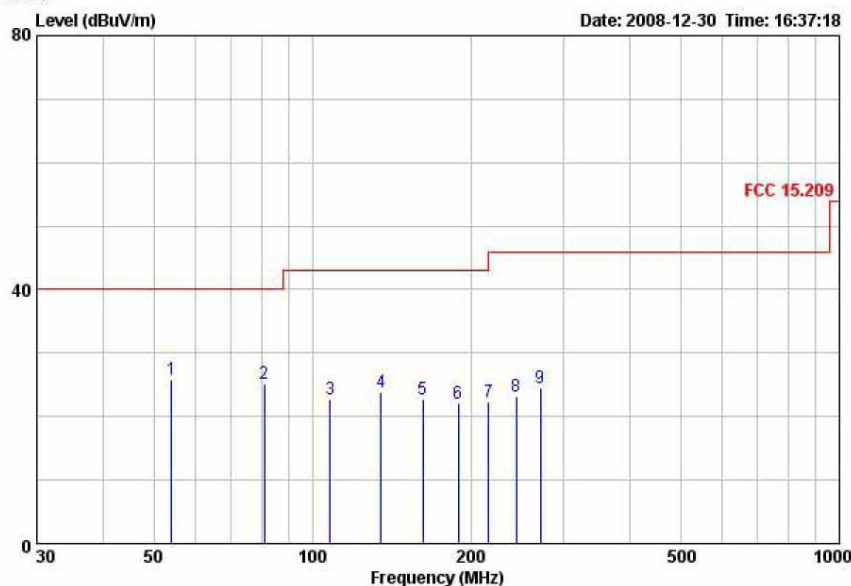

Site : CONDUCTED Test Site 1
Condition: FCC 15.209 HORIZONTAL
EUT : Scroll Too 700
MODE : (TX) GM-080019/T
MEMO :

	Freq	Read Level	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Aux Factor	Remark
	MHz	dBuV	dBuV/m	dB	dBuV/m	dB/m	dB	dB	
1	54.10	15.97	25.84	-14.16	40.00	8.44	1.44	9.92	QP
2	81.15	15.39	25.19	-14.81	40.00	8.05	1.71	9.95	QP
3	108.20	7.84	22.78	-20.22	43.00	12.91	1.98	9.99	QP
4	135.24	7.67	23.87	-19.13	43.00	14.03	2.20	9.93	QP
5	162.29	7.75	22.74	-20.26	43.00	12.61	2.41	9.92	QP
6	189.34	7.70	22.16	-20.84	43.00	12.07	2.62	9.87	QP
7	216.39	8.02	22.19	-23.81	46.00	11.49	2.81	9.95	QP
8	243.44	8.21	23.19	-22.81	46.00	12.10	2.96	9.97	QP
9	270.48	7.70	24.55	-21.45	46.00	13.80	3.13	10.01	QP



Test Data Of Radiated Emission Measurement (Vertical)




環球認證有限公司

Global Certification Corp.

Global Certification Corp.
No.112-3, Sec.2, Siangjhang Rd.
Sijhih City, Taipei County 221, Taiwan
TEL:886-2-26426992 FAX:886-2-26487450
WebSite: <http://www.gcc.tw>

Data: 8

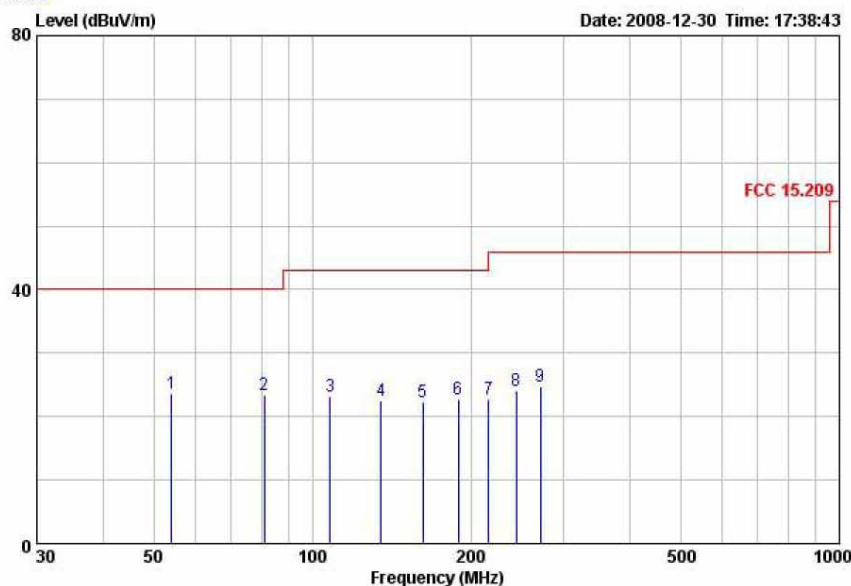

Site : CONDUCTED Test Site 1
Condition: FCC 15.209 VERTICAL
EUT : Scroll Too 700
MODE : (TX) GM-080019/T
MEMO :

	Freq	Read Level	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Aux Factor	Remark
	MHz	dBuV	dBuV/m	dB	dBuV/m	dB/m	dB	dB	
1	54.10	13.77	23.64	-16.36	40.00	8.44	1.44	9.92	QP
2	81.15	13.69	23.49	-16.51	40.00	8.05	1.71	9.95	QP
3	108.20	8.25	23.19	-19.81	43.00	12.91	1.98	9.99	QP
4	135.24	6.36	22.56	-20.44	43.00	14.03	2.20	9.93	QP
5	162.29	7.21	22.20	-20.80	43.00	12.61	2.41	9.92	QP
6	189.34	8.19	22.65	-20.35	43.00	12.07	2.62	9.87	QP
7	216.39	8.48	22.65	-23.35	46.00	11.49	2.81	9.95	QP
8	243.44	9.11	24.09	-21.91	46.00	12.10	2.96	9.97	QP
9	270.48	7.80	24.65	-21.35	46.00	13.80	3.13	10.01	QP