

FCC PART 15 SUBPART B

MEASUREMENT AND TEST REPORT

For

GiiNii Global Limited

Product description: GiiNii Home Monitor Camera
Model No.: SC-NH1-W
Supplementary Model: SC-NH1-B,SC-NH1-G,SC-NH1-S (Test models just do not like shell)
FCC ID: FUOSC-NH1-W


Prepared for: GiiNii Global Limited
20/F, Sunning Plaza 10 Hysan Avenue Causeway Bay, Hong Kong

Prepared by: Bontek Compliance Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028


Report No.: BCT12KR-2177E-1
Issue Date: December 18, 2012
Test Date: November 22~December 18, 2012

Tested by: 

Lion Cai

Approved by: 

Tony Wu

Reviewed by: 

Kendy Wang

TABLE OF CONTENTS

1 - GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	3
1.3 TEST SUMMARY	4
1.4 TEST METHODOLOGY	4
1.5 TEST FACILITY	5
1.6 TEST EQUIPMENT LIST AND DETAILS	6
2 - SYSTEM TEST CONFIGURATION	8
2.1 JUSTIFICATION	8
2.2 EUT EXERCISE SOFTWARE	8
2.3 SPECIAL ACCESSORIES	8
2.4 EQUIPMENT MODIFICATIONS	8
2.5 CONFIGURATION OF TEST SYSTEM	8
2.6 TEST SETUP DIAGRAM	8
3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS	9
3.1 MEASUREMENT UNCERTAINTY	9
3.2 LIMIT OF DISTURBANCE VOLTAGE AT THE MAINS TERMINALS	9
3.3 EUT SETUP	9
3.4 INSTRUMENT SETUP	9
3.5 TEST PROCEDURE	10
3.6 SUMMARY OF TEST RESULTS	10
3.7 DISTURBANCE VOLTAGE TEST DATA	10
3.8 TEST RESULT	10
4 - RADIATED DISTURBANCES	13
4.1 MEASUREMENT UNCERTAINTY	13
4.2 LIMIT OF RADIATED DISTURBANCES	13
4.3 EUT SETUP	13
4.4 TEST RECEIVER SETUP	14
4.5 TEST PROCEDURE	14
4.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
4.7 RADIATED EMISSIONS TEST RESULT	14
4.8 TEST RESULT	14

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **GiiNii Global Limited**
Address of applicant: 20/F, Sunning Plaza 10 Hysan Avenue Causeway Bay, Hong Kong
Manufacturer: **GiiNii Global Limited**
Address of manufacturer: 20/F, Sunning Plaza 10 Hysan Avenue Causeway Bay, Hong Kong

General Description of E.U.T

EUT Description: **GiiNii Home Monitor Camera**
Model No.: SC-NH1-W
Supplementary Model: SC-NH1-B,SC-NH1-G,SC-NH1-S (Test models just do not like shell)
Trade Mark: GiiNii
Power Supply: Input: DC5V 2A
Adapter description: Model: SAW-0502000
Input:100-240V 50/60Hz 0.5A Output: 5VDC 2.0A

Remark: * *The test data gathered are from the production sample provided by the manufacturer.*
* *Supplementary models have same circuit and appearance, Just sales for different customers.*

1.2 Test Standards

The following Declaration of Conformity report of EUT is prepared in accordance with
FCC Rules and Regulations Part 15 Subpart B 2006

The objective of the manufacturer is to demonstrate compliance with the described above standards.

1.3 Test Summary

For the EUT described above. The standards used were FCC Part 15 Subpart B for Emissions

Table 1 : Tests Carried Out Under FCC Part 15 Subpart B

Standard	Test Items	Status
FCC Part 15 Subpart B	Conduction Emission, 0.15MHz to 30MHz	✓
FCC Part 15 Subpart B	Radiation Emission, 30MHz to 1000MHz	✓

✓ Indicates that the test is applicable
✗ Indicates that the test is not applicable

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

The maximum emission levels emanating from the device are compared to the FCC Part 15 Subpart B limits for radiation emissions and the measurement results contained in this test report show that EUT is to be technically compliant with FCC requirements.

All measurement required was performed at Shenzhen Bontek Compliance Testing Laboratory Co., Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd , EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25,2011.

CNAS - Registration No.: L3923

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

The acceptance letter from the CNAS is maintained in our files: Registration:L3923, March 22, 2012.

TUV - Registration No.: UA 50203122-0001

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. An assessment of the laboratory was conducted according to the"Procedures and Conditions for EMC Test Laboratories"with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

1.6 Test Equipment List and Details

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd .

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2012-7-25	2013-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
5	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
6	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-4-6	2013-4-5
7	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
8	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2012-4-11	2013-4-10
9	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2012-4-6	2013-4-5
10	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2012-6-16	2013-6-15
11	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
12	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2012-4-6	2013-4-5
14	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2012-4-6	2013-4-5
15	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2012-11-28	2013-11-27
16	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2012-11-28	2013-11-27
17	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2012-11-28	2013-11-27
18	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	N/A	N/A
19	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2012-11-28	2013-11-27
20	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2012-10-24	2013-10-23
21	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-4-6	2013-4-5
22	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
23	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2012-4-6	2013-4-5
24	CDN	FRANKONIA	CDN M2+M3	A3027019	2012-4-6	2013-4-5
25	6DB Attenuator	FRANKONIA	N/A	1001698	2012-4-6	2013-4-5
26	EM Injection clamp	FCC	F-203I-23mm	091536	2012-4-6	2013-4-5
27	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5
28	10dB attenuator	ELECTRO-	EM-7600	836	2012-4-6	2013-4-5

		METRICS				
29	ISN	TESEQ	ISN-T800	30301	2012-6-23	2013-6-22
30	10KV surge generator	SANKI	SKS-0510M	048110003E 321	2012-11-14	2013-11-13
31	HRMONICS&FLICK RE ANALYSER	VOLTECH	PM6000	200006700433	2012-6-27	2013-6-26
32	Spectrum Analyzer	R&S	FSP	100397	2012-11-2	2013-11-1
33	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
34	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as only used by a typical user).

2.2 EUT Exercise Software

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software offered by manufacturer, can let the EUT being ON operation.


2.3 Special Accessories

As shown in section 2.5, interface cable used for compliance testing is shielded as normally supplied by **GiiNii Global Limited** and its respective support equipment manufacturers.


2.4 Equipment Modifications

The EUT tested was not modified by BCT.

2.5 Configuration of Test System

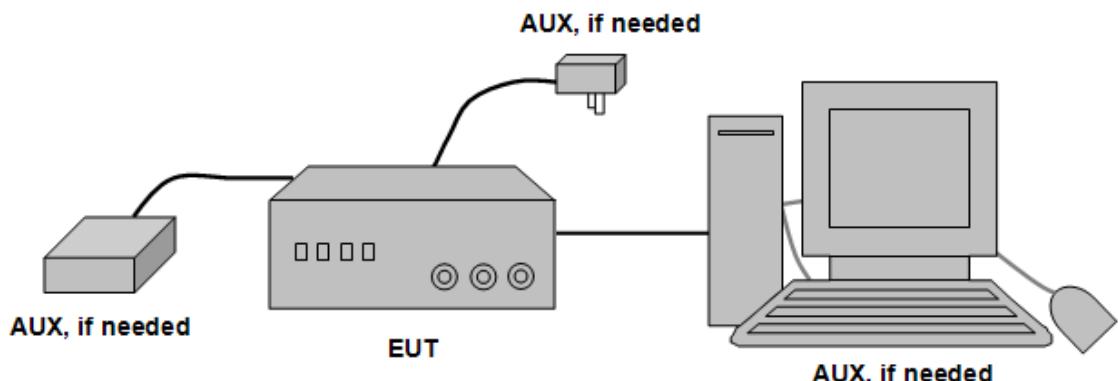

2.6 Test Setup Diagram

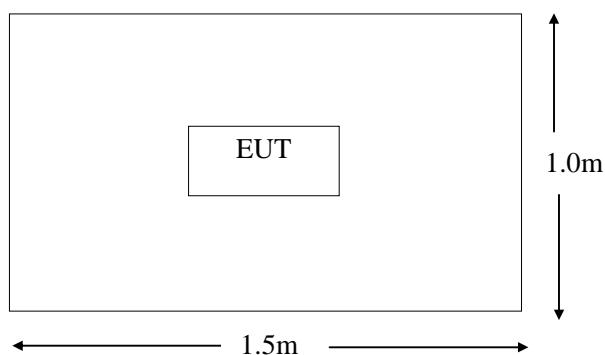

3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS

3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is 3.4 dB.

3.2 Limit of Disturbance Voltage at The Mains Terminals

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

Note: (1)The tighter limit shall apply at the edge between two frequency bands.

3.3 EUT Setup


The setup of EUT is according with ANSI C63.4-2009 measurement procedure. The specification used was the FCC Rules and Regulations Part 15 Subpart B limits.

The EUT was placed center and the back edge of the test table.

The AV cables were draped along the test table and bundled to 30-40cm in the middle.

The spacing between the peripherals was 10 cm.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

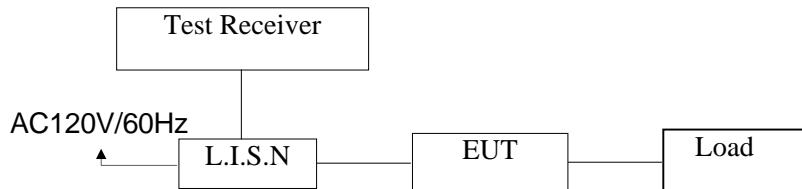

3.4 Instrument Setup

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz
Detector.....Peak & Quasi-Peak & Average
Sweep Speed.....Auto
IF Band Width.....9 KHz

3.5 Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first Artificial Mains.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak and Average readings were only performed when an emission was found to be marginal (within -10 dB μ V of specification limits). Quasi-peak readings are distinguished with a "QP". Average readings are distinguished with a "AV".

3.6 Summary of Test Results

According to the data in section 3.6, the EUT complied with the FCC Part 15 B Conducted margin, with the *worst* margin reading of:

3.7 Disturbance Voltage Test Data

Temperature (°C)	22~25
Humidity (%RH)	50~55
Barometric Pressure (mbar)	950~1000
EUT	GiiNii Home Monitor Camera
M/N	SC-NH1-W
Operating Mode	Normal operation/ Connect to PC

Test data see following pages

Remark: (1) When PK reading is less than relevant limit 20dB, the QP reading and AV reading will not be recorded.
(2) Where QP reading is less than relevant AV limit, the AV reading will not be measured


3.8 Test Result

PASS

Conducted Emission:

EUT: GiiNii Home Monitor Camera
M/N: SC-NH1-W
Operating Condition: Normal operation
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: L Line

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

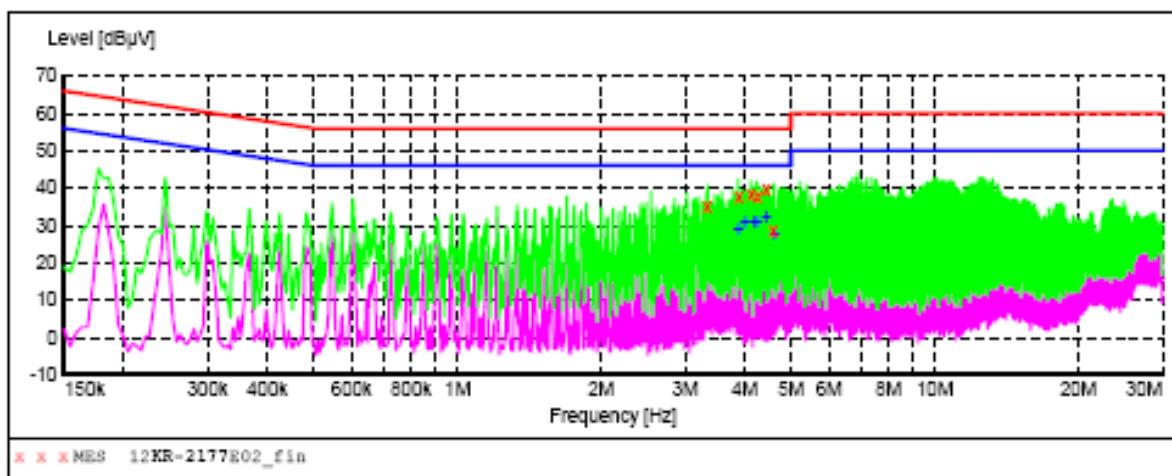**MEASUREMENT RESULT: "12KR-2177E02_fin"**

12/10/2012 9:03PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
3.336000	34.80	10.3	56	21.2	QP	L1	GND
3.880500	37.40	10.3	56	18.6	QP	L1	GND
4.119000	38.20	10.3	56	17.8	QP	L1	GND
4.245000	37.50	10.3	56	18.5	QP	L1	GND
4.425000	39.30	10.3	56	16.7	QP	L1	GND
4.569000	28.50	10.3	56	27.5	QP	L1	GND

MEASUREMENT RESULT: "12KR-2177E02_fin2"


12/10/2012 9:03PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
3.876000	29.00	10.3	46	17.0	AV	L1	GND
3.997500	30.90	10.3	46	15.1	AV	L1	GND
4.182000	31.30	10.3	46	14.7	AV	L1	GND
4.240500	30.80	10.3	46	15.2	AV	L1	GND
4.425000	32.50	10.3	46	13.5	AV	L1	GND
4.609500	27.50	10.3	46	18.5	AV	L1	GND

Conducted Emission:

EUT: GiiNii Home Monitor Camera
M/N: SC-NH1-W
Operating Condition: Normal operation
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: N Line

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

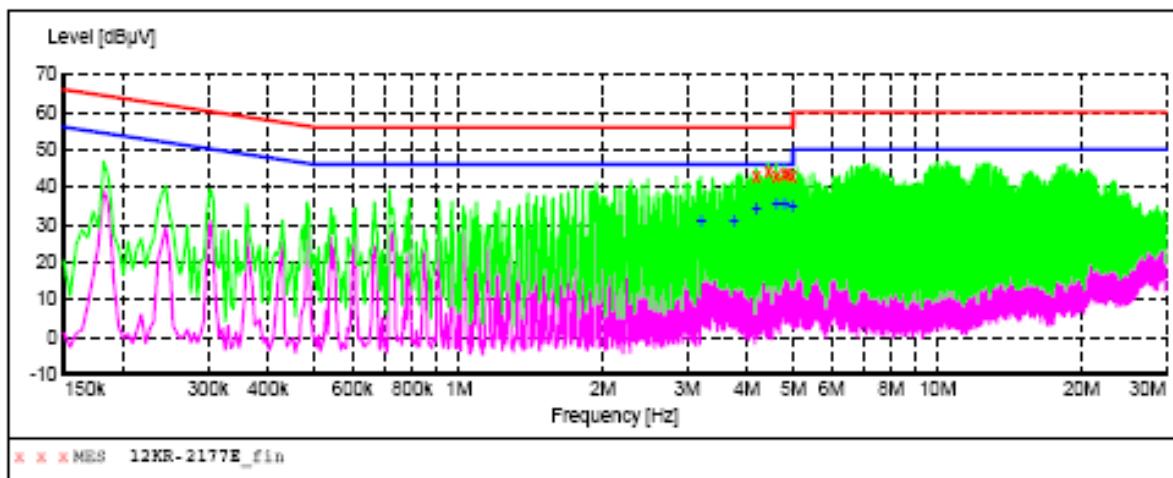**MEASUREMENT RESULT: "12KR-2177E01_fin"**

12/10/2012 9:00PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
4.182000	43.10	10.3	56	12.9	QP	N	GND
4.425000	43.90	10.3	56	12.1	QP	N	GND
4.609500	42.60	10.3	56	13.4	QP	N	GND
4.789500	43.70	10.4	56	12.3	QP	N	GND
4.848000	43.60	10.4	56	12.4	QP	N	GND
4.969500	43.00	10.4	56	13.0	QP	N	GND

MEASUREMENT RESULT: "12HR-1448E01_fin2"

12/10/2012 9:00PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
3.214500	30.90	10.3	46	15.1	AV	N	GND
3.759000	31.40	10.3	46	14.6	AV	N	GND
4.182000	34.30	10.3	46	11.7	AV	N	GND
4.605000	35.50	10.3	46	10.5	AV	N	GND
4.789500	35.60	10.4	46	10.4	AV	N	GND
4.969500	35.20	10.4	46	10.8	AV	N	GND

4 - RADIATED DISTURBANCES

4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is 4.0 dB.

4.2 Limit of Radiated Disturbances

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	40
88~216	3	43.5
216 ~ 960	3	46
960 ~ 1000	3	54

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

4.3 EUT Setup


The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15 Subpart B limits.

The EUT was placed on the center of the test table.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

Block diagram of test setup (In chamber)

Below 1 GHz

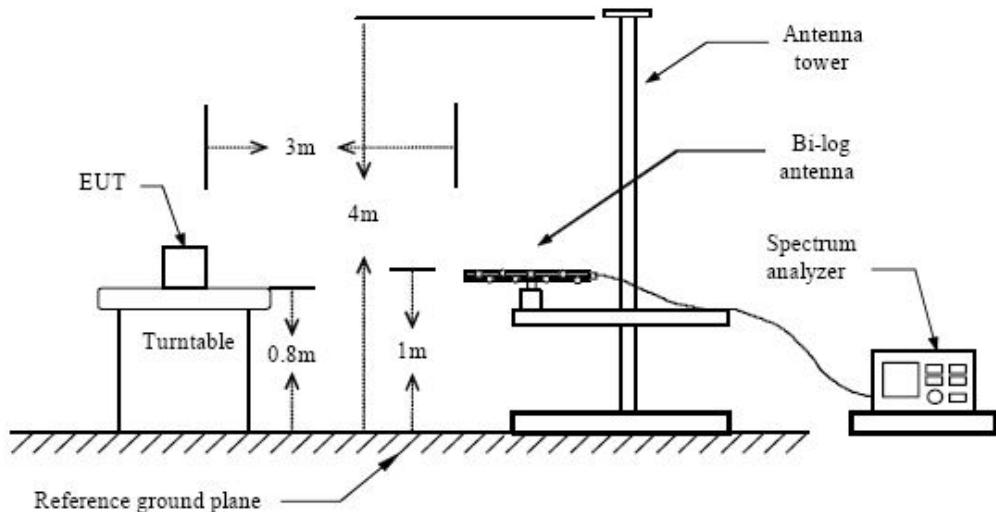

4.4 Test Receiver Setup

According to FCC Part 15 rule, the frequency was investigated from 30 to 1000 MHz. During the radiated emission test, the test receiver was set with the following configurations:

Test Receiver Setting:

Detector.....Peak & Quasi-Peak
IF Band Width.....120KHz
Frequency Range.....30MHz to 1000MHz
Turntable Rotated.....0 to 360 degrees

Antenna Position:

Height.....1m to 4m
Polarity.....Horizontal and Vertical

4.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within $-10 \text{ dB}\mu\text{V}$ of specification limits), and are distinguished with a "QP" in the data table.

4.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-7 \text{ dB}\mu\text{V}$ means the emission is $7 \text{ dB}\mu\text{V}$ below the maximum limit for Subpart B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

4.7 Radiated Emissions Test Result

Temperature (°C)	22~25
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	GiiNii Home Monitor Camera
M/N	SC-NH1-W
Operating Mode	Normal operation/Connect to pc

Test data see following pages

Remark: (1) When PK reading is less than relevant limit 20dB, the QP reading and AV reading will not be recorded.
(2) Where QP reading is less than relevant AV limit, the AV reading will not be measured


4.8 Test Result

PASS

Radiated Emission Test Data:

EUT: GiiNii Home Monitor Camera
M/N: SC-NH1-W
Operating Condition: Normal operation
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength
Start Frequency: 30.0 MHz Stop Frequency: 1.0 GHz
Detector: MaxPeak Meas.: Coupled IF: 100 kHz Transducer: VULB9163 NEW

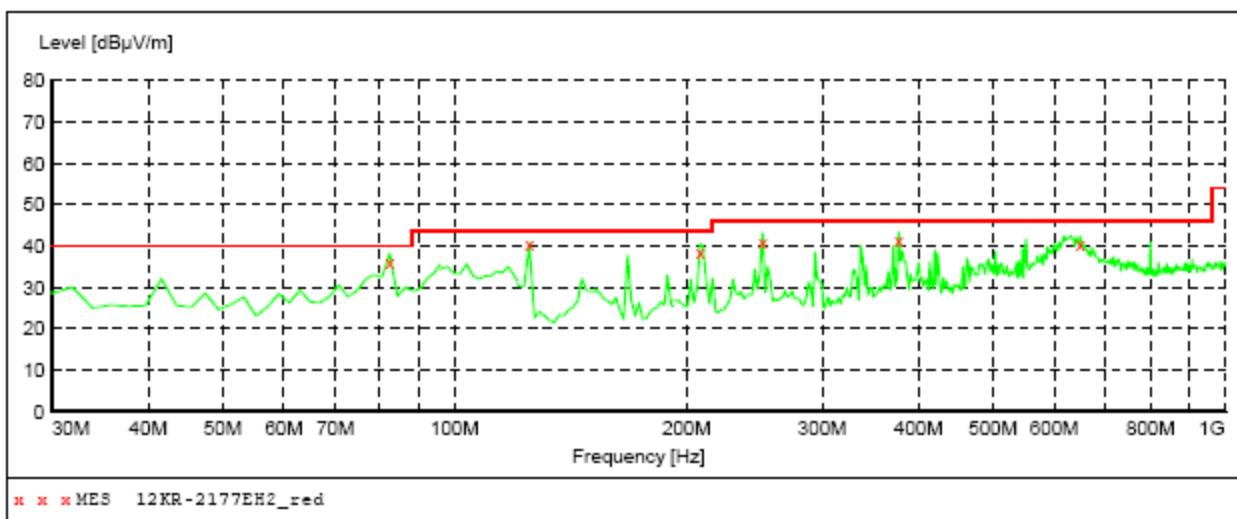**MEASUREMENT RESULT: "12KR-2177EH2_red"**

12/10/2012 11:57


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
82.380000	37.10	13.4	40.0	2.9	QP	100.0	0.00	HORIZONTAL
125.060000	40.50	13.8	43.5	2.5	QP	100.0	0.00	HORIZONTAL
208.480000	39.60	15.1	43.5	3.9	QP	100.0	0.00	HORIZONTAL
251.160000	42.10	17.3	46.0	3.9	QP	100.0	0.00	HORIZONTAL
377.260000	42.30	20.9	46.0	3.7	QP	100.0	0.00	HORIZONTAL
648.860000	40.40	26.2	46.0	5.6	QP	100.0	0.00	HORIZONTAL

Radiated Emission Test Data:

EUT: GiiNii Home Monitor Camera
M/N: SC-NH1-W
Operating Condition: Normal operation
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Vertical

SWEET TABLE: "test (30M-1G)"

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz
				Transducer
				VULB9163 NEW

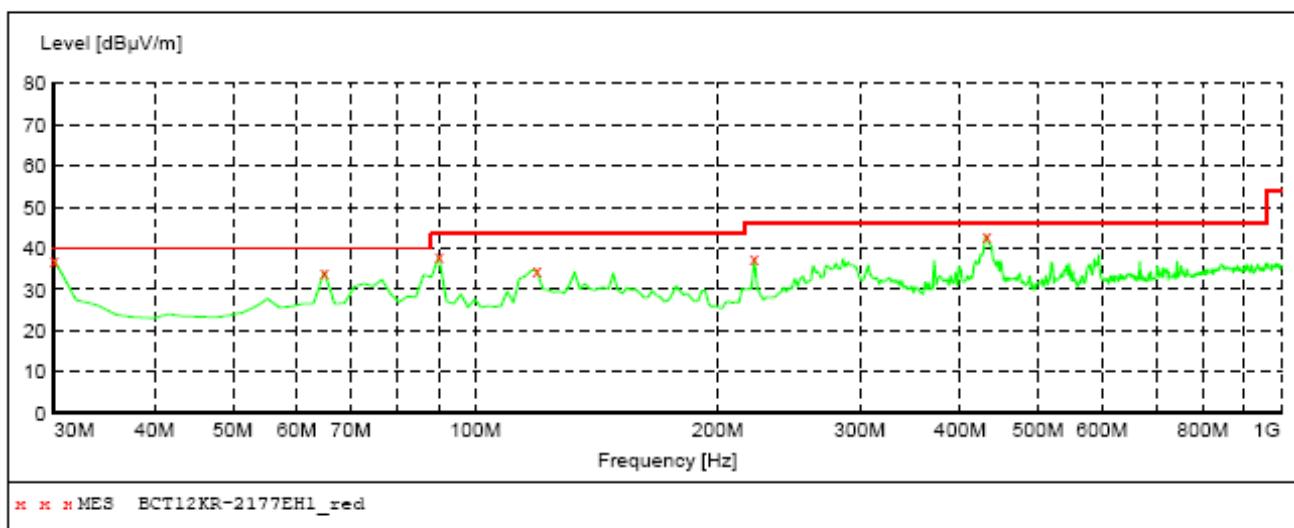

MEASUREMENT RESULT: "BCT12KR-2177EH1_red"

12/10/2012 22:27

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
30.000000	37.10	14.3	40.0	2.9	QP	300.0	0.00	VERTICAL
64.920000	34.40	13.5	40.0	5.6	QP	300.0	0.00	VERTICAL
90.140000	38.10	16.1	40.0	1.9	QP	300.0	0.00	VERTICAL
119.240000	34.70	14.8	40.0	5.3	QP	300.0	0.00	VERTICAL
222.060000	37.50	15.5	40.0	2.5	QP	100.0	0.00	VERTICAL
431.580000	43.20	22.0	47.0	3.8	QP	100.0	0.00	VERTICAL