



**Test Report:** 5W47050 Issue2

**Applicant:** LOTEK WIRELESS  
115 Pony Drive  
Newmarket, ON  
L3Y 7B5

**Apparatus:** Portable VHF Telemetry Receiver SRX400A

**FCC ID:** FW9SRX400158-170

**In Accordance With:** FCC Part 15 Subpart B, 15.107 and 15.109  
Unintentional Radiators

**Tested By:** Nemko Canada Inc.  
303 River Road  
Ottawa, Ontario  
K1V 1H2

**Authorized By:**   
Sim Jagpal, Resource Manager

**Date:** 7 September 2005

**Total Number of Pages:** 21

## Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart B. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

**Apparatus Assessed:** Portable VHF Telemetry Receiver SRX400A

**Specification:** FCC Part 15 Subpart B, 15.107 and 15.109

**Compliance Status:** Complies

**Exclusions:** None

**Non-compliances:** None

**Report Release History:** Issue 2, added test results per clause 15.121.

Author: Roman Kuleba

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

---

## TABLE OF CONTENTS

<b>Report Summary</b> .....	<b>2</b>
<b>Section 1 : Equipment Under Test</b> .....	<b>4</b>
1.1    Product Identification .....	4
1.2    Samples Submitted for Assessment.....	4
1.3    Theory of Operation .....	4
1.4    Technical Specifications of the EUT .....	5
1.5    Block Diagram of the EUT.....	5
<b>Section 2 : Test Conditions</b> .....	<b>6</b>
2.1    Specifications .....	6
2.2    Deviations From Laboratory Test Procedures .....	6
2.3    Test Environment .....	6
2.4    Test Equipment.....	6
<b>Section 3 : Observations</b> .....	<b>7</b>
3.1    Modifications Performed During Assessment .....	7
3.2    Record Of Technical Judgements .....	7
3.3    EUT Parameters Affecting Compliance .....	7
3.4    Test Deleted.....	7
<b>Section 4 : Results Summary</b> .....	<b>8</b>
4.1    FCC Part 15 Subpart C : Test Results .....	9
<b>Appendix A : Test Results</b> .....	<b>10</b>
<b>Appendix B : Setup Photographs</b> .....	<b>18</b>
<b>Appendix C : Block Diagram of Test Setups</b> .....	<b>20</b>

## Section 1 : Equipment Under Test

### 1.1 Product Identification

The Equipment Under Test was identified as follows: SRX400A Portable VHF Telemetry Receiver

### 1.2 Samples Submitted for Assessment

The following samples of the apparatus have been submitted for type assessment:

Sample No.	Description	Serial No.
Item #1	SRX400A Telemetry Receiver, $f_{RX} = 160.180$ MHz, 158 – 162 MHz Range	10238A
Item #3	SRX400A Telemetry Receiver, $f_{RX} = 168.000$ MHz, 166 – 170 MHz Range	10032A

The first samples were received on: June 16, 2005

### 1.3 Theory of Operation

SRX400A is a super heterodyne VHF receiver operating in 158 – 170 MHz band. Local Oscillator Frequencies: 116 MHz and 135.99 MHz; IF: 10.7 MHz; other frequencies: 32.68 kHz.


The SRX400 receiver has three variants: SRX400A, SRX400, and STR-1000, which can be considered as a family, the SRX400A being the most advanced.

For this family, two SRX400A devices were configured for the test, to cover the whole range of 158 to 170 MHz:

S/N: 10238A, Range: 158 – 162 MHz  
S/N: 10238A, Range: 166 – 170 MHz

**1.4 Technical Specifications of the EUT**

<b>Manufacturer:</b>	LOTEK WIRELESS
<b>Receive Frequency:</b>	158 – 170 MHz
<b>Receiver Type:</b>	Super Heterodyne
<b>Antenna Data:</b>	Detachable, Whip, 0 dBi
<b>Power Source:</b>	120 VAC / 60 Hz to 16 VDC Adapter/Charger Internal Rechargeable Battery 12 VDC

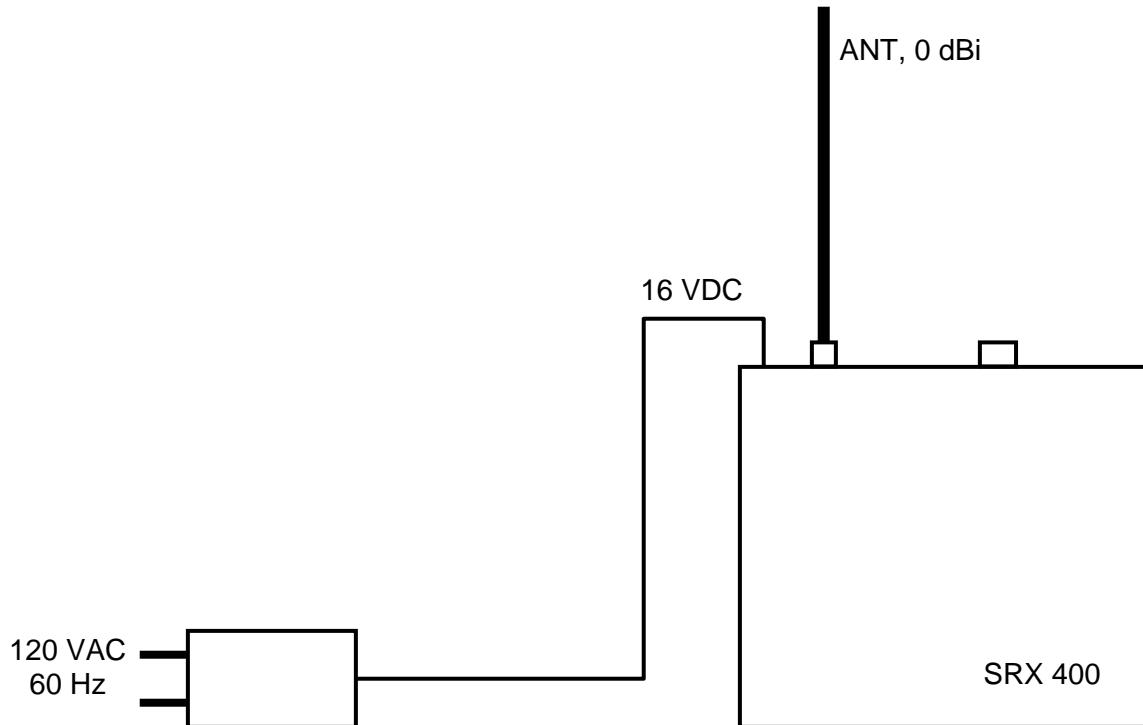**1.5 Block Diagram of the EUT**

## Section 2 : Test Conditions

### 2.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart B, 15.107 and 15.109  
Unintentional Radiators

### 2.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

### 2.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	:	15 – 30 °C
Humidity range	:	20 - 75 %
Pressure range	:	86 - 106 kPa
Power supply range	:	+/- 5% of rated voltages

### 2.4 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No	Last Cal.	Next Cal.
Receiver	Rohde & Schwarz	ESVS-30	FA001437	July 26/04	July 26/05
Spectrum Analyzer	Rohde & Schwarz	FSU	FA001877	May 17/05	May 17/06
Biconical (1) Antenna	EMCO	3109	FA000805	April 22/05	April 22/06
Horn Antenna #2	EMCO	3115	FA000825	Dec. 14/04	Dec. 14/05
Log Periodic Antenna #1	EMCO	LPA-25	FA000477	Aug. 26/04	Aug. 26/05
1.0 – 2.0 GHz Amplifier	JCA	12-400	FA001498	COU	COU
LISN	EMCO	4825/2	FA001545	Jan. 13/05	Jan. 13/06
Receiver	Rohde & Schwarz	ESHS 10	FA001918	Feb. 28/05	Feb. 28/06
Spectrum Analyzer	Hewlett-Packard	8566B	FA001309	May 18/05	May 18/06
Spectrum Analyzer Display	Hewlett-Packard	85662A	FA001309	May 18/05	May 18/06
Transient Limiter	Hewlett-Packard	1194 7A	FA000975	May 25/05	May 25/06
Radiocommunication Analyzer	Rohde & Schwarz	CMTA 54	FA001317	Jan 25/05	Jan 25/06
Signal Generator	Rohde & Schwarz	SMIQ 03E	FA001269	Feb 02/05	Feb 02/06

\* COU – Calibrate on Use

---

## **Section 3 : Observations**

### **3.1 Modifications Performed During Assessment**

No modifications were performed during assessment.

### **3.2 Record Of Technical Judgements**

No technical judgements were made during the assessment.

### **3.3 EUT Parameters Affecting Compliance**

The user of the apparatus could not alter parameters that would affect compliance.

### **3.4 Test Deleted**

No Tests were deleted from this assessment.

## Section 4 : Results Summary

This section contains the following:

### FCC Part 15 Subpart B : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N      No : not applicable / not relevant.

Y      Yes : Mandatory i.e. the apparatus shall conform to these tests.

N/T     Not Tested, mandatory but not assessed. (See section 3.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

**4.1 FCC Part 15 Subpart C : Test Results**

Part 15	Test Description	Required	Result
15.107(a) 15.109(a) 15.121	Conducted Emissions for Class B Radiated Emissions for Class B Scanning receivers and frequency converters used with scanning receivers	Y Y Y	PASS PASS PASS

Notes: None

## Appendix A : Test Results

### Criteria: Clause 15.107(a) Conducted Emissions

Frequency of Conducted limit (dBmV)

Emission (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

**Test Conditions:**

<b>Sample Number:</b>	1 and 3	<b>Temperature:</b>	23 °C
<b>Date:</b>	June 23, 2005	<b>Humidity:</b>	45 %
<b>Modification State:</b>	0	<b>Tester:</b>	Roman Kuleba
		<b>Laboratory:</b>	Ottawa

**Test Results:** See Attached Table and Plots.


## Conducted Emissions, continued

Test Date: June 23, 2005													
Engineer's Name: Roman Kuleba													
<b>Tested as per: Table Top</b>													
<b>Mains Input Voltage: 120 VAC</b>				<b>Mains Input Frequency: 60 Hz</b>									
Port Investigation Data													
Port under test: AC Mains													
Results: Refer to Plots of this section and or tables.													
Conductor	Frequency (MHz)	Detector	Emission Level (dBuV)	LISN Loss (dB)	Cable Loss (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)					
Phase	0.1500	Quasi Peak	52.9	0.00	0.00	52.90	66.0	13.1					
		Average	27.8	0.00	0.00	27.80	56.0	28.2					
	0.2200	Quasi Peak	52.7	0.00	0.20	52.90	62.8	9.9					
		Average	24.8	0.00	0.20	25.00	52.8	27.8					
	0.2900	Quasi Peak	48.9	0.00	0.20	49.10	60.5	11.4					
		Average	22.7	0.00	0.20	22.90	50.5	27.6					
	0.3600	Quasi Peak	45.2	0.00	0.20	45.40	58.7	13.3					
		Average	20.6	0.00	0.20	20.80	48.7	27.9					
	0.4300	Quasi Peak	41.2	0.00	0.20	41.40	57.3	15.9					
		Average	19.0	0.00	0.20	19.20	47.3	28.1					
	0.5000	Quasi Peak	40.0	0.00	0.20	40.20	56.0	15.8					
		Average	18.2	0.00	0.20	18.40	46.0	27.6					
Neutral	0.1500	Quasi Peak	52.9	0.00	0.00	52.90	66.0	13.1					
		Average	27.2	0.00	0.00	27.20	56.0	28.8					
	0.2200	Quasi Peak	52.9	0.00	0.20	53.10	62.8	9.7					
		Average	24.8	0.00	0.20	25.00	52.8	27.8					
	0.2900	Quasi Peak	58.0	0.00	0.20	58.20	60.5	2.3					
		Average	23.3	0.00	0.20	23.50	50.5	27.0					
	0.3600	Quasi Peak	46.9	0.00	0.20	47.10	58.7	11.6					
		Average	21.3	0.00	0.20	21.50	48.7	27.2					
	0.4300	Quasi Peak	43.0	0.00	0.20	43.20	57.3	14.1					
		Average	19.5	0.00	0.20	19.70	47.3	27.6					
	0.8500	Quasi Peak	46.0	0.00	0.05	46.05	56.0	10.0					
		Average	21.0	0.00	0.05	21.05	46.0	25.0					
Notes													
<b>None</b>													
Test Result													
<b>Final Test Result: Pass</b>													


Conducted Emissions, continued

Conducted Emissions Plots

Phase, 0.150 – 0.500 MHz

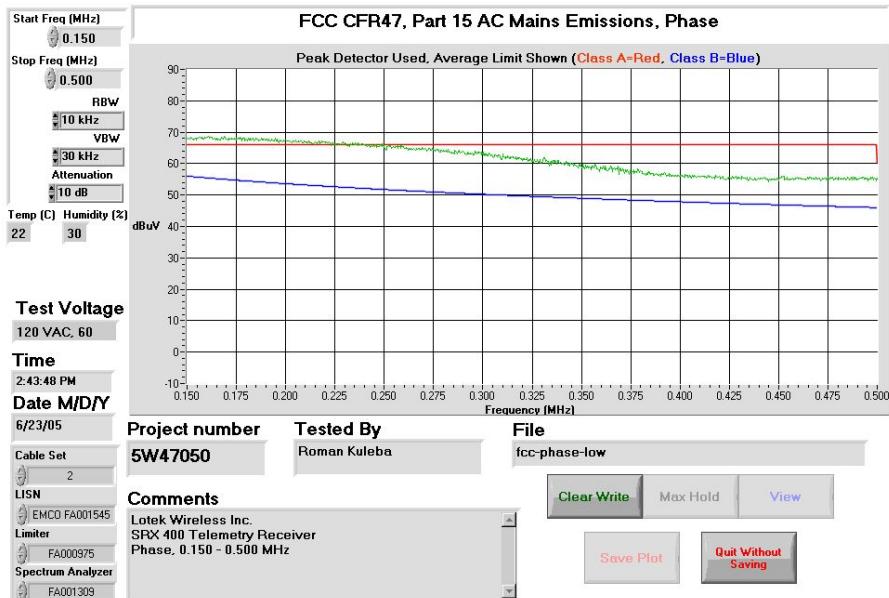


Phase, 0.500 – 30 MHz

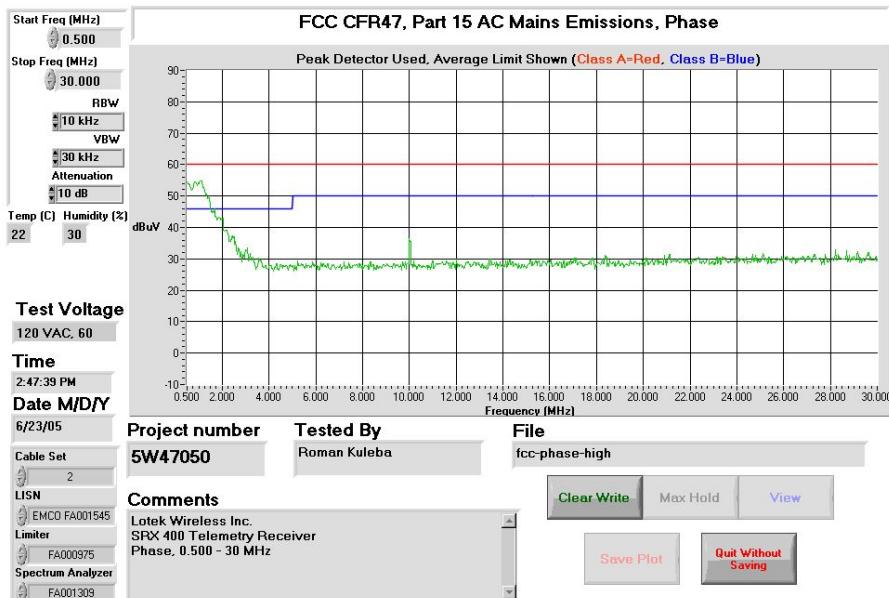


Conducted Emissions, continued

Conducted Emissions Plots

Neutral, 0.150 – 0.500 MHz

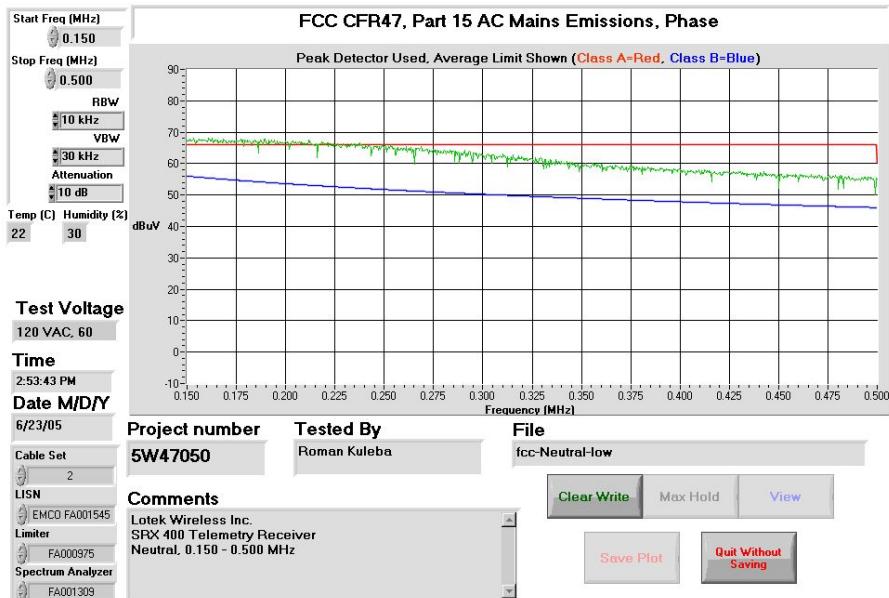

Neutral, 0.500 – 30 MHz

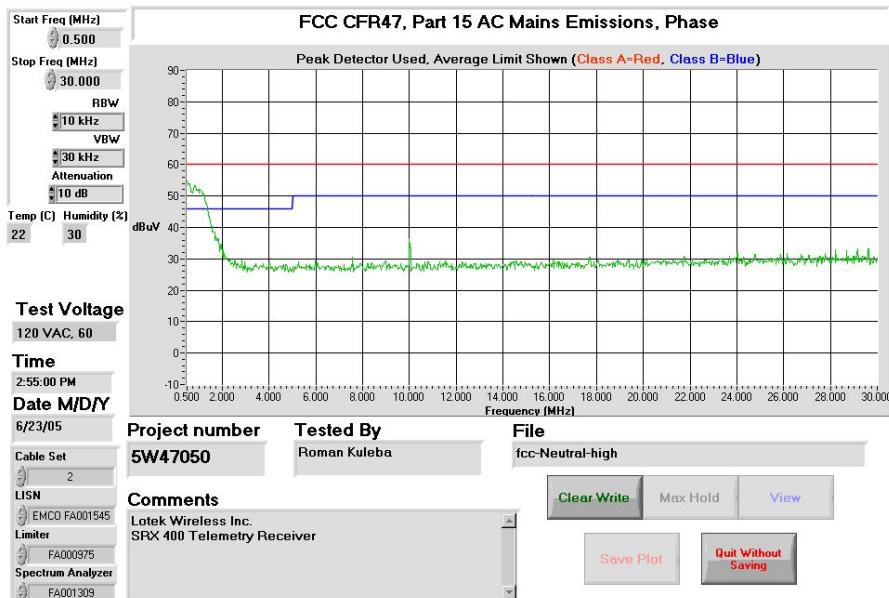

**Criteria: Clause 15.109(a) Radiated Emissions**

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvoltsmeter)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

**Test Conditions:**

<b>Sample Number:</b>	1 and 3	<b>Temperature:</b>	23 °C
<b>Date:</b>	June 23, 2005	<b>Humidity:</b>	45 %
<b>Modification State:</b>	0	<b>Tester:</b>	Roman Kuleba
		<b>Laboratory:</b>	Ottawa

**Test Results:**

See Attached Table(s) for Results

**Additional Observations:**

The Spectrum was searched from 30 MHz to 2 GHz.

The EUT was measured on three orthogonal axes.

Measurement equipment setup was 120 kHz RBW Quasi-peak Detector for measurements below 1GHz and 1MHz RBW/VBW Peak/Average Detector above 1GHz.

All Measurements were performed at 3 meters distance.

## Radiated Emissions, continued

**Receiver tuned to: 160.180 MHz (Lower Range 158 – 162 MHz)**

Freq. (MHz)	Ant.	Pol. V/H	RCVD Signal (dB $\mu$ V)	Ant. Factor (dB)	Amp. Gain (dB)	Cable Loss (dB)	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
149.4793	BC1	V	13.5	12.9	0.0	1.5	27.9	43.5	15.6	Q-Peak
448.4355	LP1	V	13.0	16.5	0.0	2.7	32.2	46.4	14.2	Q-Peak
579.9976	LP1	V	19.0	18.8	0.0	3.1	40.9	46.4	5.5	Q-Peak
597.9143	LP1	V	13.8	18.8	0.0	3.2	35.8	46.4	10.7	Q-Peak
149.4778	BC1	H	8.5	12.6	0.0	1.5	22.6	43.5	20.9	Q-Peak
1046.4600	Horn2	V	60.1	25.2	46.1	3.4	42.6	74.0	31.4	Peak
1046.4600	Horn2	V	57.0	25.2	46.1	3.4	39.5	54.0	14.5	Average
1159.9500	Horn2	V	62.6	25.3	46.5	3.2	44.6	74.0	29.4	Peak
1159.9500	Horn2	V	56.0	25.3	46.5	3.2	38.0	54.0	16.0	Average
1345.3200	Horn2	V	56.0	25.4	46.5	3.3	38.2	74.0	35.8	Peak
1345.3200	Horn2	V	51.6	25.4	46.5	3.3	33.8	54.0	20.2	Average
1623.9400	Horn2	V	61.2	27.3	46.5	3.9	45.9	74.0	28.1	Peak
1623.9400	Horn2	V	56.0	27.3	46.5	3.9	40.7	54.0	13.3	Average
1046.4600	Horn2	H	55.6	25.1	46.1	3.4	38.0	74.0	36.0	Peak
1046.4600	Horn2	H	48.4	25.1	46.1	3.4	30.8	54.0	23.2	Average
1159.9500	Horn2	H	58.5	25.2	46.5	3.2	40.4	74.0	33.6	Peak
1159.9500	Horn2	H	52.0	25.2	46.5	3.2	33.9	54.0	20.1	Average
1345.3200	Horn2	H	58.5	25.3	46.5	3.3	40.6	74.0	33.4	Peak
1345.3200	Horn2	H	53.0	25.3	46.5	3.3	35.1	54.0	18.9	Average
1623.9400	Horn2	H	54.7	27.5	46.5	3.9	39.5	74.0	34.5	Peak
1623.9400	Horn2	H	48.7	27.5	46.5	3.9	33.5	54.0	20.5	Average

Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole

## Radiated Emissions, continued

**Receiver tuned to: 168.000 MHz (Higher Range 166 – 170 MHz)**

Freq. (MHz)	Ant.	Pol. V/H	RCVD Signal (dB $\mu$ V)	Ant. Factor (dB)	Amp. Gain (dB)	Cable Loss (dB)	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
157.2978	BC1	V	11.0	13.2	0.0	1.5	25.7	43.5	17.8	Q-Peak
471.8965	LP1	V	11.0	17.2	0.0	2.9	31.1	46.4	15.4	Q-Peak
579.9976	LP1	V	17.1	18.8	0.0	3.1	39.0	46.4	7.4	Q-Peak
695.9979	LP1	V	13.3	21.0	0.0	3.5	37.8	46.4	8.7	Q-Peak
157.2978	BC1	H	9.5	12.3	0.0	1.5	23.3	43.5	20.2	Q-Peak
695.9962	LP1	H	10.3	21.2	0.0	3.5	35.0	46.4	11.5	Q-Peak
1101.1280	Horn2	V	53.3	25.3	46.5	3.1	35.2	74.0	38.8	Peak
1101.1280	Horn2	V	48.8	25.3	46.5	3.1	30.7	54.0	23.3	Average
1275.9400	Horn2	V	54.0	25.3	46.5	3.5	36.3	74.0	37.7	Peak
1275.9400	Horn2	V	47.7	25.3	46.5	3.5	30.0	54.0	24.0	Average
1623.9400	Horn2	V	59.8	27.3	46.5	3.9	44.5	74.0	29.5	Peak
1623.9400	Horn2	V	54.8	27.3	46.5	3.9	39.5	54.0	14.5	Average
1101.1280	Horn2	H	55.1	25.2	46.5	3.1	36.9	74.0	37.1	Peak
1101.1280	Horn2	H	49.8	25.2	46.5	3.1	31.6	54.0	22.4	Average
1159.9500	Horn2	H	57.2	25.2	46.5	3.2	39.1	74.0	34.9	Peak
1159.9500	Horn2	H	50.7	25.2	46.5	3.2	32.6	54.0	21.4	Average
1623.9400	Horn2	H	53.4	27.5	46.5	3.9	38.2	74.0	35.8	Peak
1623.9400	Horn2	H	47.3	27.5	46.5	3.9	32.1	54.0	21.9	Average

Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole

**Criteria: Clause §15.121 Scanning receivers and frequency converters used with scanning receivers - Rejection of Cellular Telephony Signals**

§15.121 (a)(1) Except as provided in paragraph (c) of this section, scanning receivers and frequency converters designed or marketed for use with scanning receivers, shall be incapable of operating (tuning), or readily being altered by the user to operate, within the frequency bands allocated to the Cellular Radiotelephone Service in Part 22 of this chapter (cellular telephone bands).

§15.121 (2)(b) Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are **38 dB** or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

§22.905 Channels for cellular service - The following frequency bands are allocated for assignment to service providers in the Cellular Radiotelephone Service:

- (a) Channel Block A: 869-880 MHz paired with 824-835 MHz, and 890-891.5 MHz paired with 845-846.5 MHz.
- (b) Channel Block B: 880-890 MHz paired with 835-845 MHz, and 891.5-894 MHz paired with 846.5-849 MHz.

**Test Conditions:**

<b>Sample Number:</b>	1 and 3	<b>Temperature:</b>	23 °C
<b>Date:</b>	June 23, 2005	<b>Humidity:</b>	45 %
<b>Modification State:</b>	0	<b>Tester:</b>	Roman Kuleba
		<b>Laboratory:</b>	Ottawa

**Test Method Used:**

- 1) The EUT was connected as illustrated on page 21.
- 2) Reference sensitivity of the EUT was measured according to the following procedure. In the absence of any other signals the standard input signal (50% AM/1 kHz at nominal frequency) from Radio-communication Analyzer was applied to RF Antenna port through a calibrated combining network. The level of the signal was reduced to obtain 12 dB SINAD value at the AF output of the receiver. The highest sensitivity value obtained in this way in all frequency bands was recorded as reference sensitivity (-90 dBm).
- 3) The reference input signal was then increased by 3 dB.
- 4) An unwanted input signal was added through the second input terminal of the combining network. The level of the unwanted signal was adjusted according to the following:

$$P_{\text{Unwanted}} = P_{\text{Reference}} + \text{Required Rejection} + 6 \text{ dB}$$
$$P_{\text{Unwanted}} = (-96 \text{ dBm} + 3 \text{ dB}) + 38 \text{ dB} + 6 \text{ dB} = -49 \text{ dBm}$$

- 5) The frequency of the unwanted signal was swept through the frequency bands allocated to the Cellular Radiotelephone Service.
- 6) The test was performed with two different types of modulation applied to the unwanted signal:
  - a) 80% Amplitude Modulation, 1kHz tone
  - b) Frequency Modulation, 8 kHz deviation, 400 Hz tone


No change in SINAD value was measured at the output of the receiver(s).

**Test Results:** Pass

---

## Appendix B : Setup Photographs

### Conducted Emissions Setup:


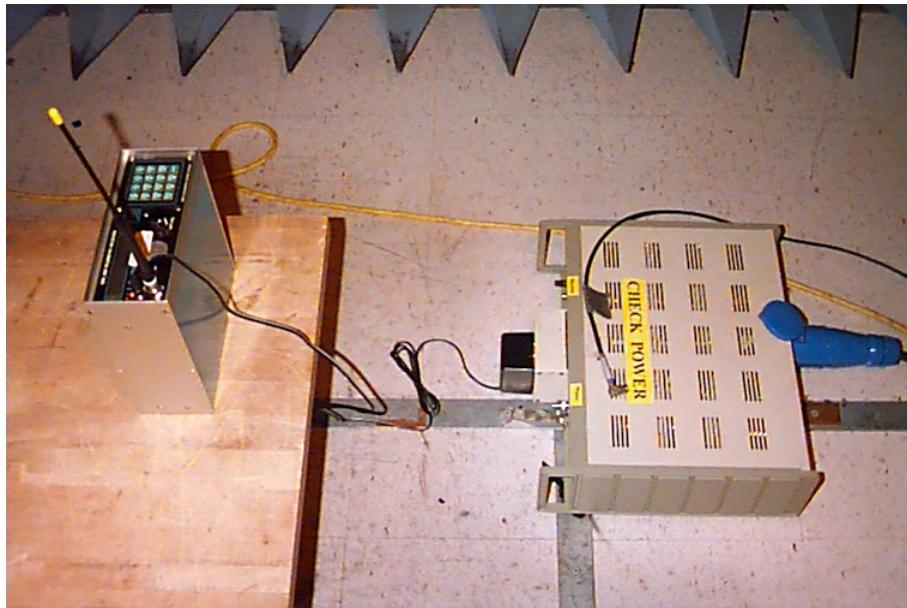


### Spurious Emissions Setup:



**Rejection of Cellular Telephony Signals Test Setup:**

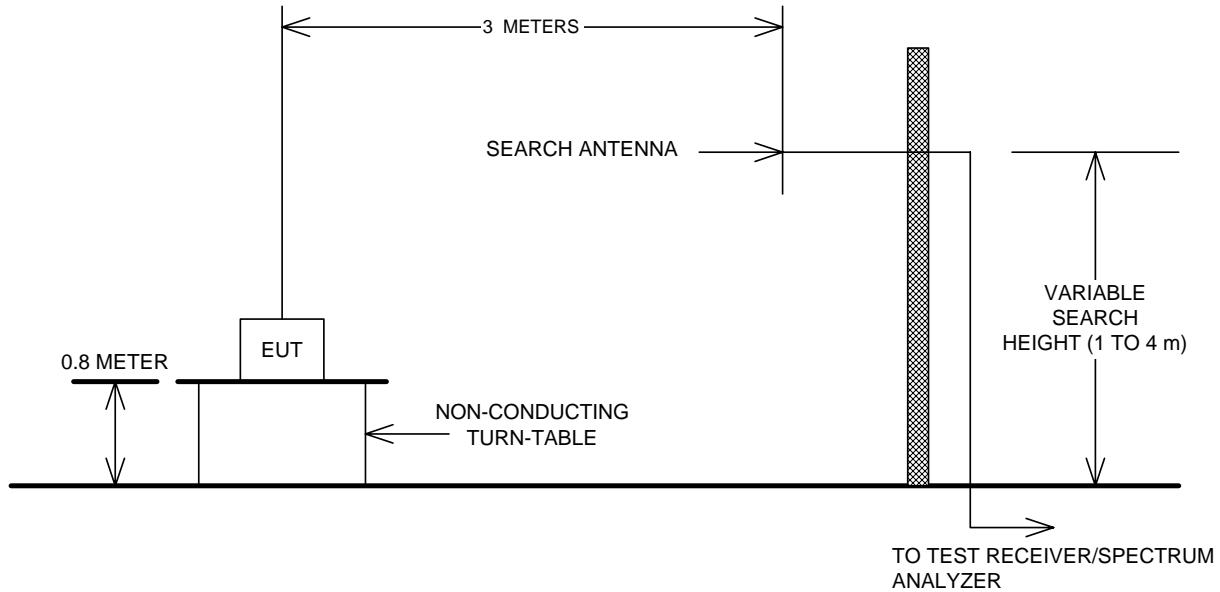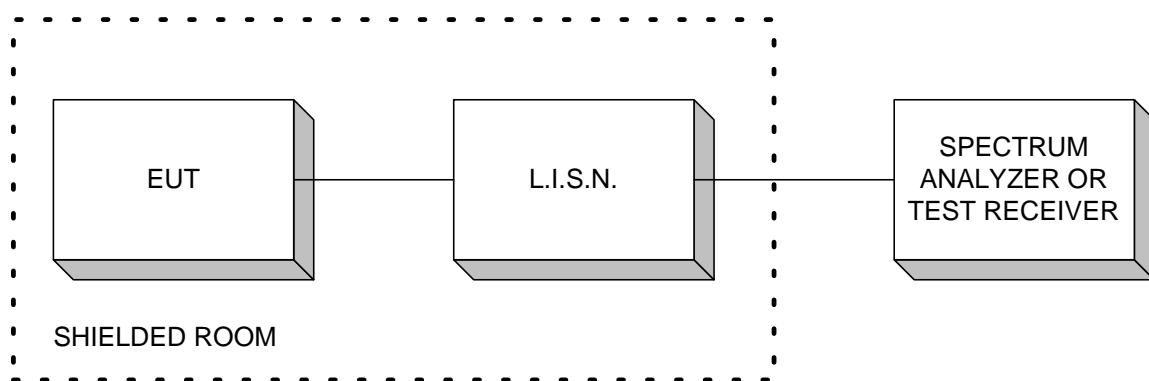

**Appendix C : Block Diagram of Test Setups****Test Site For Radiated Emissions****Conducted Emissions**

**Rejection of Cellular Telephony Signals**