



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

**BLUETOOTH 3-CD STEREO SYSTEM**

**Model: MC-3943, BWA17AA010**

**Brand: OHAYO, BLACKWEB**

**Test Report Number:**

**C170228Z03-RP1**

Issued for

**ACE INTERNATIONAL ELECTRONICS LTD.**

**Unit 2308, 23th FLOOR RILEY HOUSE 88 LEI MUK ROAD, KWAI CHUNG,  
N.T HONG KONG**

Issued by:

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.**

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,  
Guan Lan Town, Baoan District, Shenzhen China**

**TEL: 86-755-28055000**

**FAX: 86-755-28055221**

**E-Mail: service@ccssz.com**

**Issued Date: March 24, 2017**



中国认可  
国际互认  
检测  
TESTING  
CNAS L4818



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.



## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	March 24, 2017	Initial Issue	ALL	Amzula Chen



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY.....</b>	<b>6</b>
3.1 DESCRIPTION OF TEST MODES.....	6
<b>4. FACILITIES AND ACCREDITATIONS .....</b>	<b>7</b>
4.1 FACILITIES .....	7
4.2 ACCREDITATIONS .....	7
4.3 MEASUREMENT UNCERTAINTY .....	7
<b>5. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
5.1 SETUP CONFIGURATION OF EUT .....	8
5.2 SUPPORT EQUIPMENT .....	8
<b>6. FCC PART 15.247 REQUIREMENTS.....</b>	<b>9</b>
6.1 20DB BANDWIDTH .....	9
6.2 PEAK POWER.....	14
6.3 PEAK POWER SPECTRAL DENSITY .....	16
6.4 BAND EDGES MEASUREMENT .....	17
6.5 FREQUENCY SEPARATION .....	27
6.6 NUMBER OF HOPPING FREQUENCY .....	30
6.7 TIME OF OCCUPANCY (DWELL TIME) .....	32
6.8 SPURIOUS EMISSIONS .....	39
6.9 POWERLINE CONDUCTED EMISSIONS .....	62



## 1. TEST RESULT CERTIFICATION

<b>Product</b>	BLUETOOTH 3-CD STEREO SYSTEM
<b>Model</b>	MC-3943, BWA17AA010
<b>Brand</b>	OHAYO, BLACKWEB
<b>Tested</b>	February 28 ~ March 23, 2017
<b>Applicant</b>	<b>ACE INTERNATIONAL ELECTRONICS LTD.</b> Unit 2308, 23th FLOOR RILEY HOUSE 88 LEI MUK ROAD, KWAI CHUNG, N.T HONG KONG
<b>Manufacturer</b>	<b>ACE INTERNATIONAL ELECTRONICS LTD.</b> Unit 2308, 23th FLOOR RILEY HOUSE 88 LEI MUK ROAD, KWAI CHUNG, N.T HONG KONG

### APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

*Approved by:*

Sunday Hu  
Supervisor of EMC Dept.  
Compliance Certification Services (Shenzhen) Inc.

*Reviewed by:*

Ruby Zhang  
Supervisor of Report Dept.  
Compliance Certification Services (Shenzhen) Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	BLUETOOTH 3-CD STEREO SYSTEM
<b>Model Number</b>	MC-3943, BWA17AA010
<b>Brand</b>	OHAYO, BLACKWEB
<b>Model Discrepancy</b>	<ol style="list-style-type: none"><li>1. In addition to the model name, trademark and packaging, all models are the same product.</li><li>2. The model "MC-3943" correspondence brand is "OHAYO" and The model "BWA17AA010" correspondence brand is "BLACKWEB"</li></ol>
<b>Identify Number</b>	C170228Z03-RP1
<b>Received Date</b>	February 28, 2017
<b>Power Supply</b>	DC 12V supplied by adapter
<b>Adapter Manufacturer/Model No.</b>	SHEN ZHEN CITY HONGBEN ELECTRONIC CO., LTD / HB18-120150SPA I/P: AC 100-240V~ 50/60Hz, 0.5A O/P: DC 12V, 1500mA DC output Cable: Unshielded, 1.50m
<b>Frequency Range</b>	2402 ~ 2480 MHz
<b>Transmit Power</b>	GFSK: 0.6dBm $\pi/4$ -DQPSK: 1.0dBm 8DPSK: 0.9dBm
<b>Modulation Technique</b>	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
<b>Number of Channels</b>	79 Channels
<b>Antenna Specification</b>	PCB Antenna with 0dBi gain (Max)
<b>Temperature Range</b>	0°C ~ +40°C
<b>Hardware Version</b>	1.0
<b>Software Version</b>	203

**Note:** This submittal(s) (test report) is intended for FCC ID: G30BWA17AA010 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### 3. TEST METHODOLOGY

#### 3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	<b>Mode 1:</b> CD IN	<input type="checkbox"/>
	<b>Mode 2:</b> Line IN	<input type="checkbox"/>
	<b>Mode 3:</b> Phones IN	<input type="checkbox"/>
	<b>Mode 4:</b> BT	<input checked="" type="checkbox"/>
	<b>Mode 5:</b> FM (88M)	<input type="checkbox"/>
	<b>Mode 6:</b> FM (98M)	<input type="checkbox"/>
	<b>Mode 7:</b> FM (108M)	<input type="checkbox"/>
	<b>Mode 8:</b> FM (Other)	<input type="checkbox"/>
Radiated Emission	<b>Mode 1:</b> Continuously TX	<input checked="" type="checkbox"/>

**Note:**

1. Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) were chosen for pre-testing for GFSK,  $\pi/4$ -DQPSK and 8DPSK, GFSK and 8DPSK were the worse case and print in the report.  
For  $\pi/4$  QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worst case 8-DPSK and GFSK.
2. Radiated band edges were tested with both fixed and hopping mode, the fixed mode was the worst case and recorded in the report.



## 4. FACILITIES AND ACCREDITATIONS

### 4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,  
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

<b>USA</b>	A2LA
<b>China</b>	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>USA</b>	FCC
<b>Japan</b>	VCCI(C-4815, R-4320, T-2317, G-10624)
<b>Canada</b>	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

### 4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



## 5. SETUP OF EQUIPMENT UNDER TEST

### 5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC	Brand	Data Cable	Power Cord
1	Notebook	E335	R9-WN1EF	DoC	Thinkpad	N/A	Unshielded 1.50m (AC Cable) Unshielded 1.00m (DC Cable)
2	CD	N/A	N/A	DoC	N/A	N/A	N/A
3	Mobile phone	HUAWEI MLA-AL10	MLA-AL10C00B 133	DoC	HUAWEI	N/A	N/A
4	IPOD-1	A1285	YM91546Y3QY	DoC	APPLE	Shielded 1.20m	N/A
5	IPOD-2	A1285	YM9149223QX	DoC	APPLE	Shielded 1.00m	N/A

#### Notes:

*Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



## 6. FCC PART 15.247 REQUIREMENTS

### 6.1 20DB BANDWIDTH


None; for reporting purpose only.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### TEST CONFIGURATION




### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

### TEST RESULTS


No non-compliance noted


Test plot

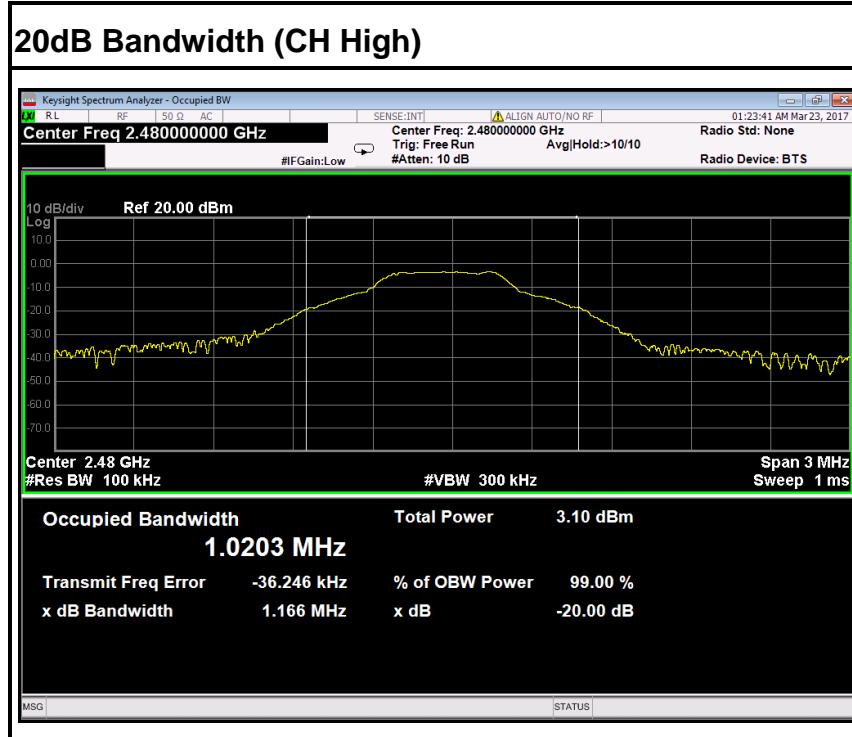



### Test plot

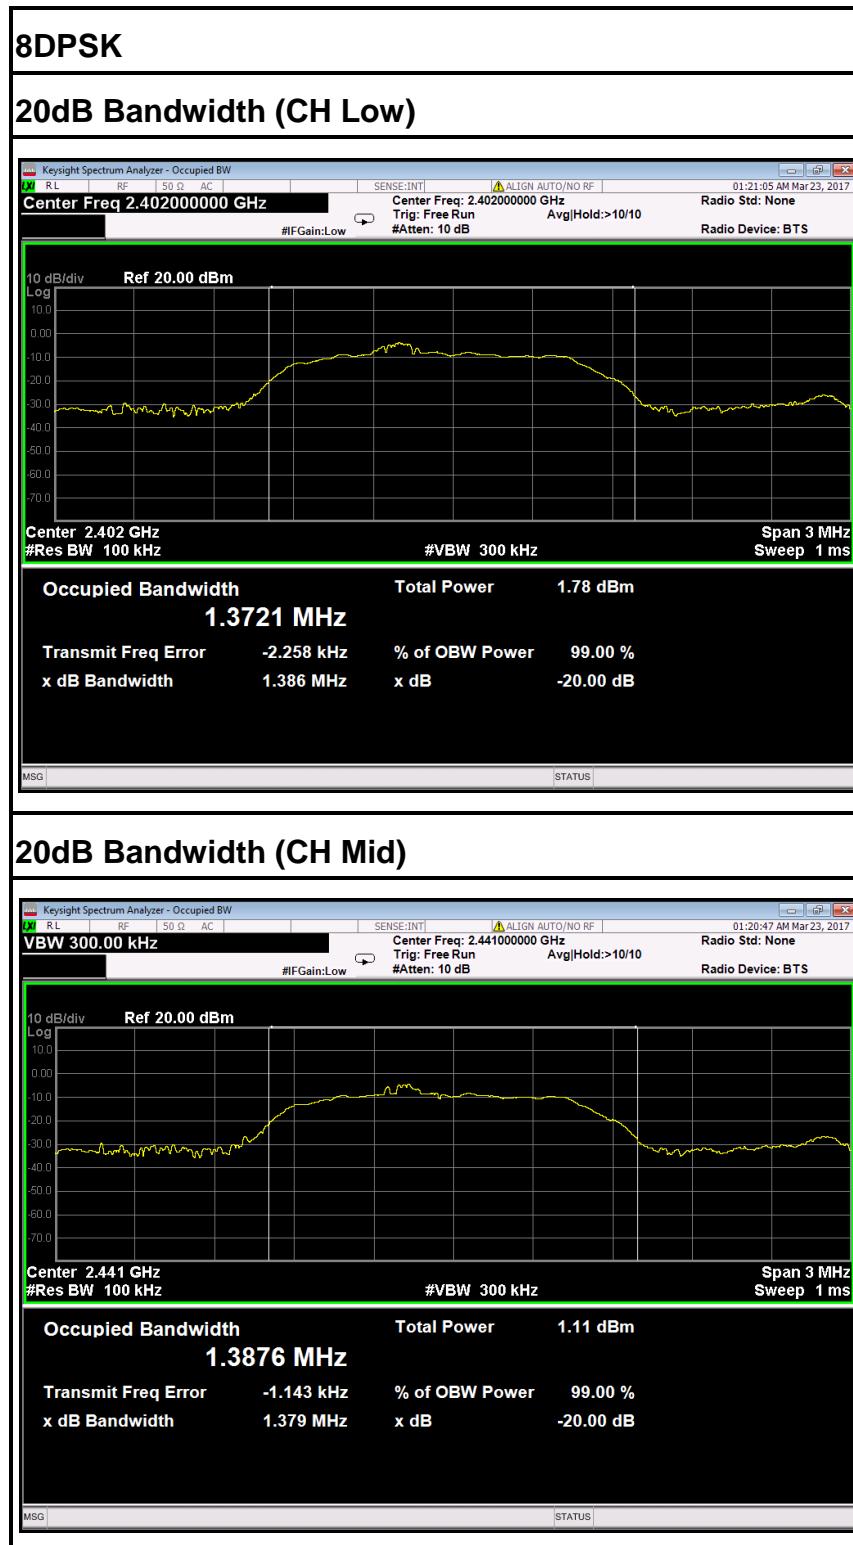

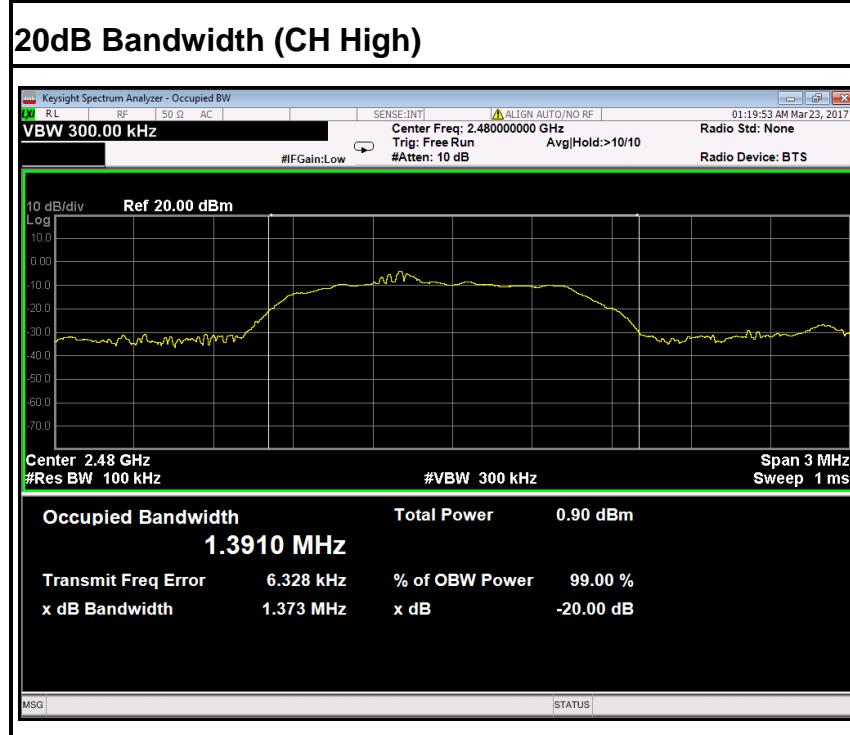



## 6.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	02/21/2017	02/20/2018
Power Sensor	Anritsu	MA2411B	1126150	02/21/2017	02/20/2018

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration

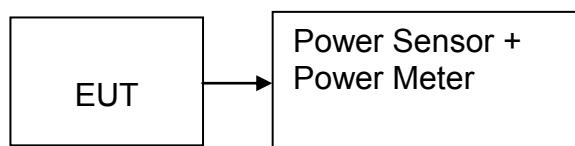

### TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



## TEST RESULTS

No non-compliance noted

### Test Data

#### GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AV	Result
Low	2402	-2.90	3.50	0.60	0.00115	0.125	peak	PASS
Mid	2441	-3.40	3.50	0.10	0.00102			PASS
High	2480	-3.40	3.50	0.10	0.00102			PASS
Low	2402	-3.00	3.50	0.50	0.00112	0.125	AVG	PASS
Mid	2441	-3.50	3.50	0.00	0.00100			PASS
High	2480	-3.60	3.50	-0.10	0.00098			PASS

#### $\pi/4$ -DQPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AV	Result
Low	2402	-2.50	3.50	1.00	0.00126	0.125	peak	PASS
Mid	2441	-3.00	3.50	0.50	0.00112			PASS
High	2480	-3.50	3.50	0.00	0.00100			PASS
Low	2402	-6.90	3.50	-3.40	0.00046	0.125	AVG	PASS
Mid	2441	-7.50	3.50	-4.00	0.00040			PASS
High	2480	-8.10	3.50	-4.60	0.00035			PASS

#### 8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AV	Result
Low	2402	-2.60	3.50	0.90	0.00123	0.125	peak	PASS
Mid	2441	-3.40	3.50	0.10	0.00102			PASS
High	2480	-4.00	3.50	-0.50	0.00089			PASS
Low	2402	-6.90	3.50	-3.40	0.00046	0.125	AVG	PASS
Mid	2441	-7.50	3.50	-4.00	0.00040			PASS
High	2480	-8.10	3.50	-4.60	0.00035			PASS



## 6.3 PEAK POWER SPECTRAL DENSITY

### LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST RESULTS

Not applicable. Since EUT is the FHSS device.



## 6.4 BAND EDGES MEASUREMENT


### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018
Amplifier	EMEC	EM330	060661	03/18/2017	03/17/2018
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2017	02/20/2018
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2017	02/20/2018
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2017	02/27/2018
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2017	02/27/2018
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2017	02/20/2018
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

### Test Configuration

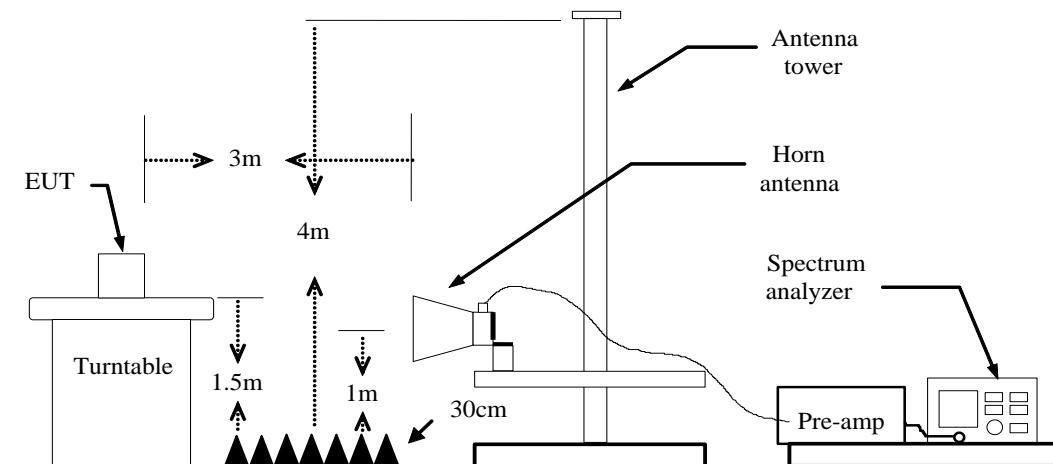

### TEST PROCEDURE




1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=330Hz, 360Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

## **TEST RESULTS**


Refer to attach spectrum analyzer data chart.

Test Data (GFSK )

## Band Edges (CH-Low)

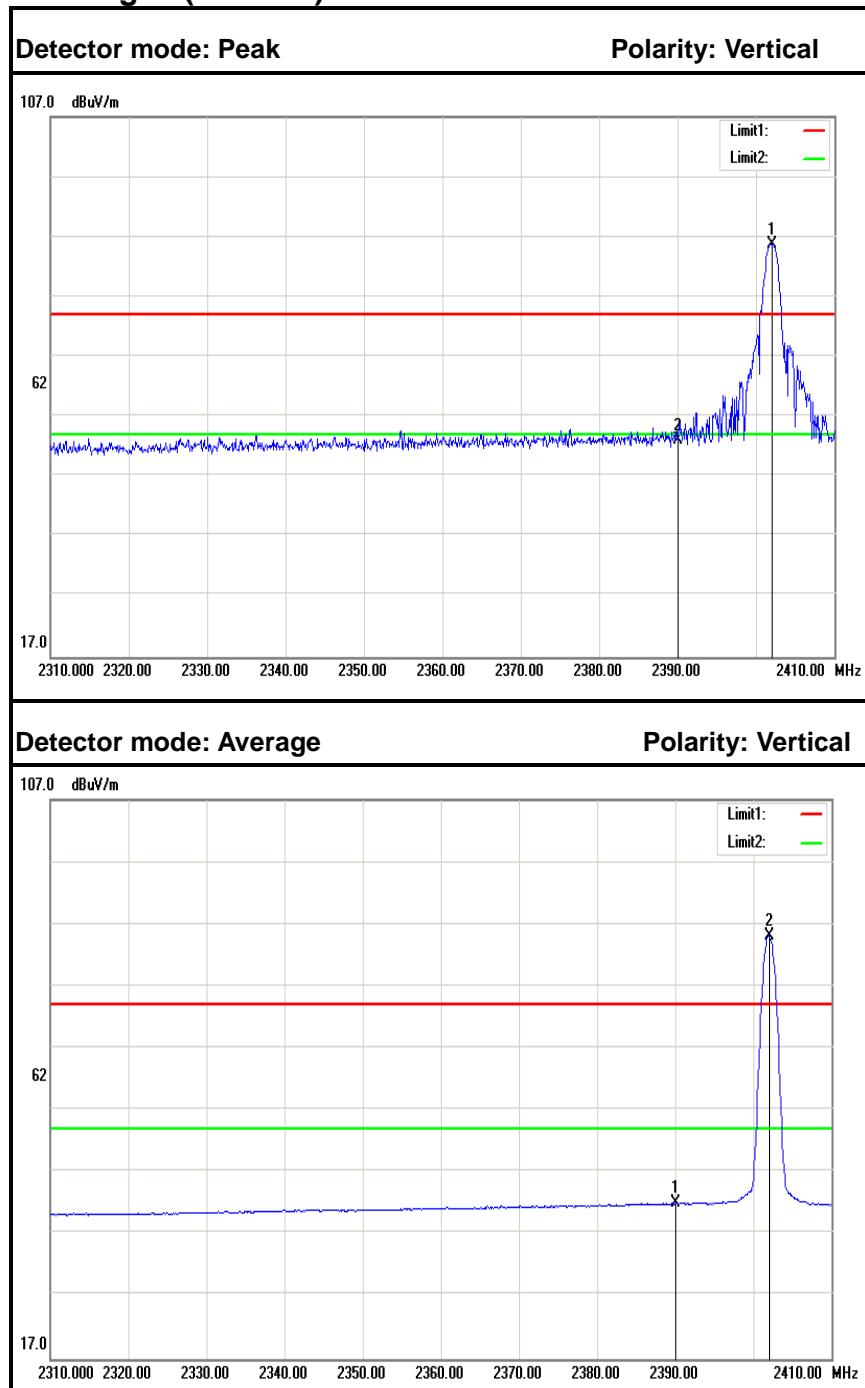


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	55.92	-2.86	53.06	74.00	-20.94	Peak	Vertical
2.	2402.100	88.52	-2.80	85.72	---	---	Peak	Vertical
3.	2390.000	44.84	-2.86	41.98	54.00	-12.02	Average	Vertical
4.	2402.000	87.91	-2.80	85.11	---	---	Average	Vertical

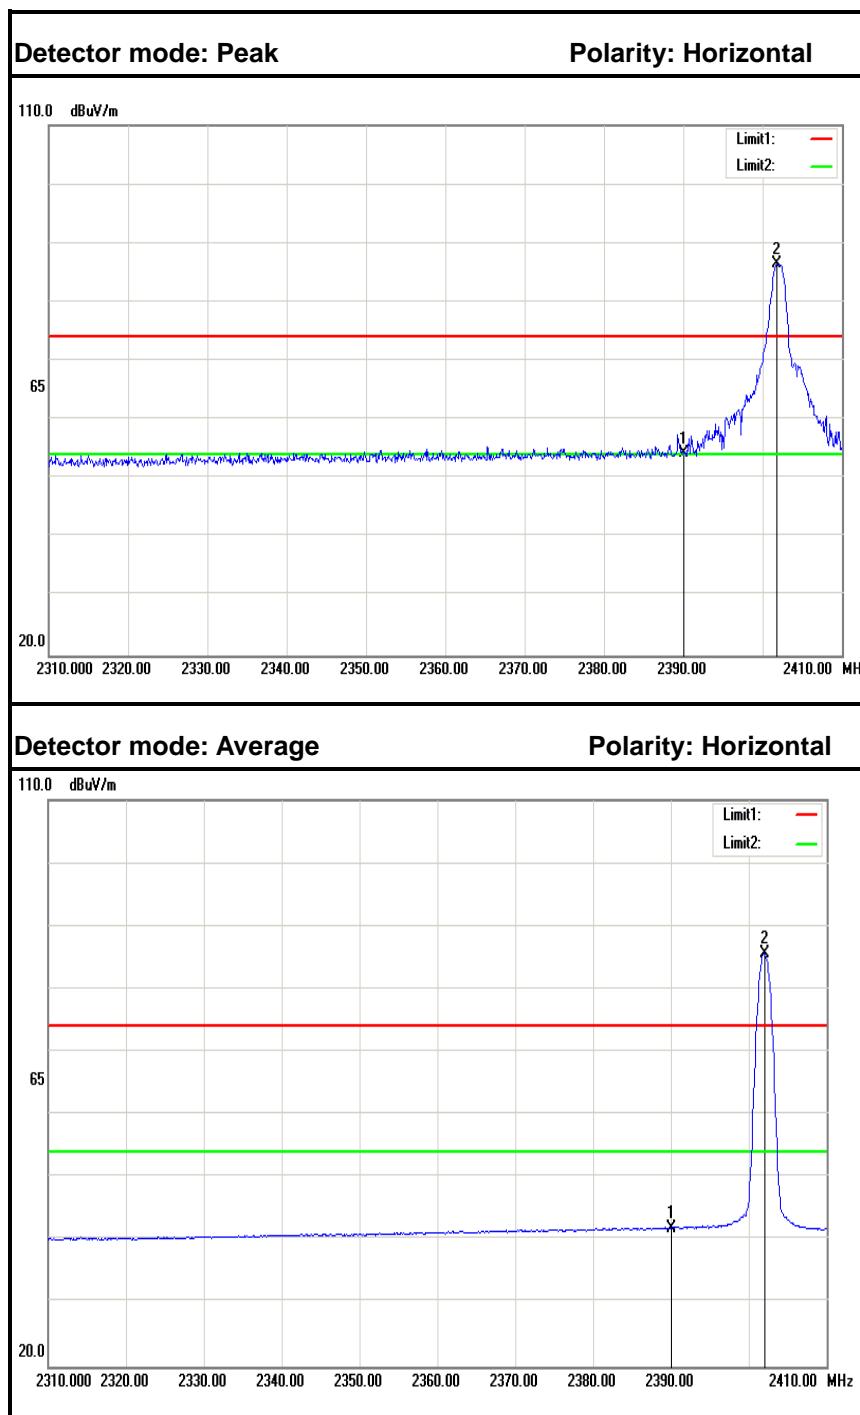


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	57.28	-2.86	54.42	74.00	-19.58	Peak	Horizontal
2.	2401.800	89.18	-2.80	86.38	---	---	Peak	Horizontal
3.	2390.000	44.84	-2.86	41.98	54.00	-12.02	Average	Horizontal
4.	2402.000	88.49	-2.80	85.69	---	---	Average	Horizontal




## Band Edges (CH-High)

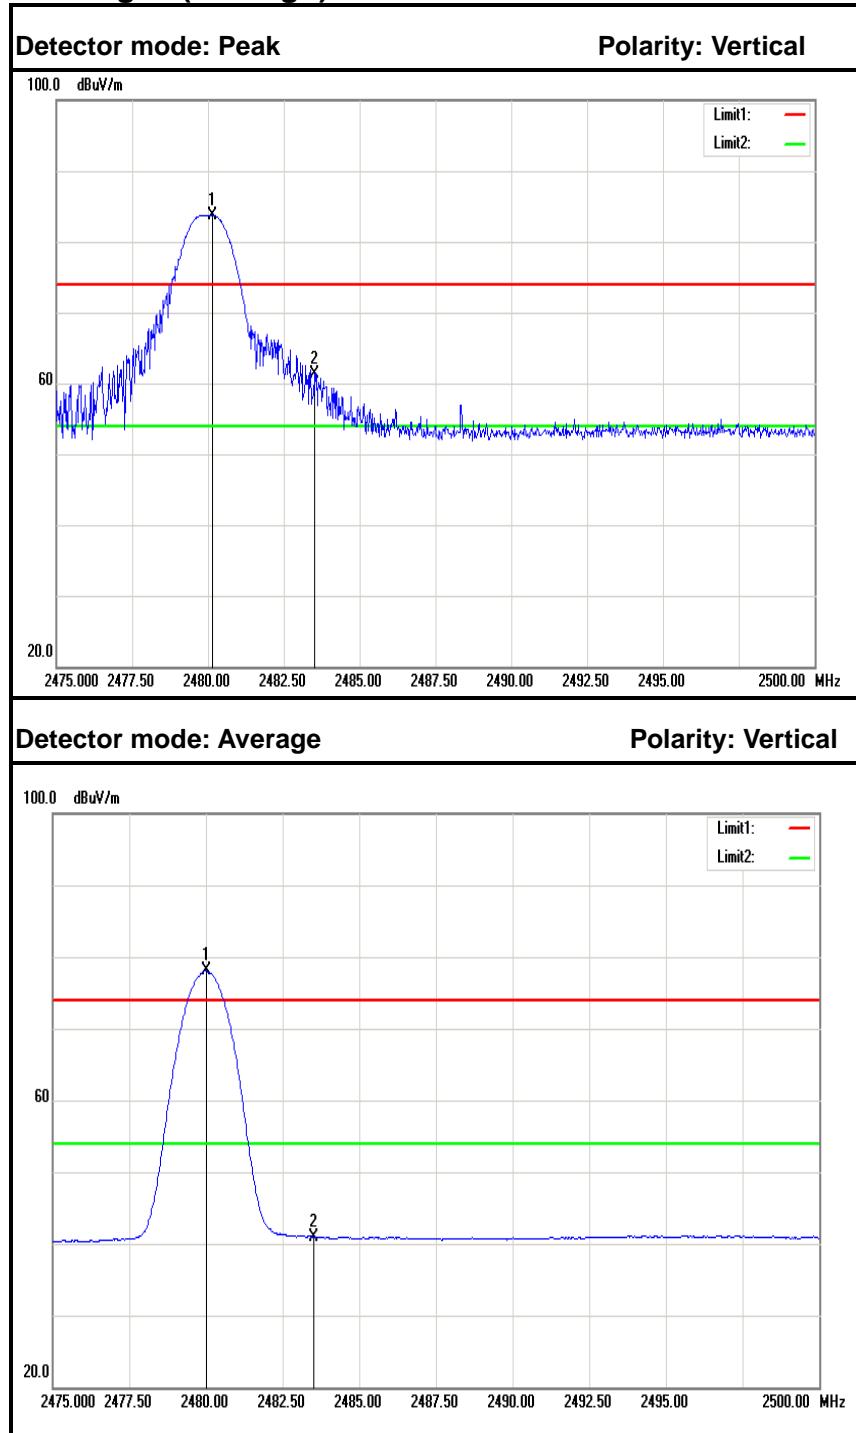


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2480.150	86.15	-2.37	83.78	---	---	Peak	Vertical
2.	2483.500	63.57	-2.35	61.22	74.00	-12.78	Peak	Vertical
3.	2480.000	80.44	-2.37	78.07	---	---	Average	Vertical
4.	2483.500	43.25	-2.35	40.90	54.00	-13.10	Average	Vertical

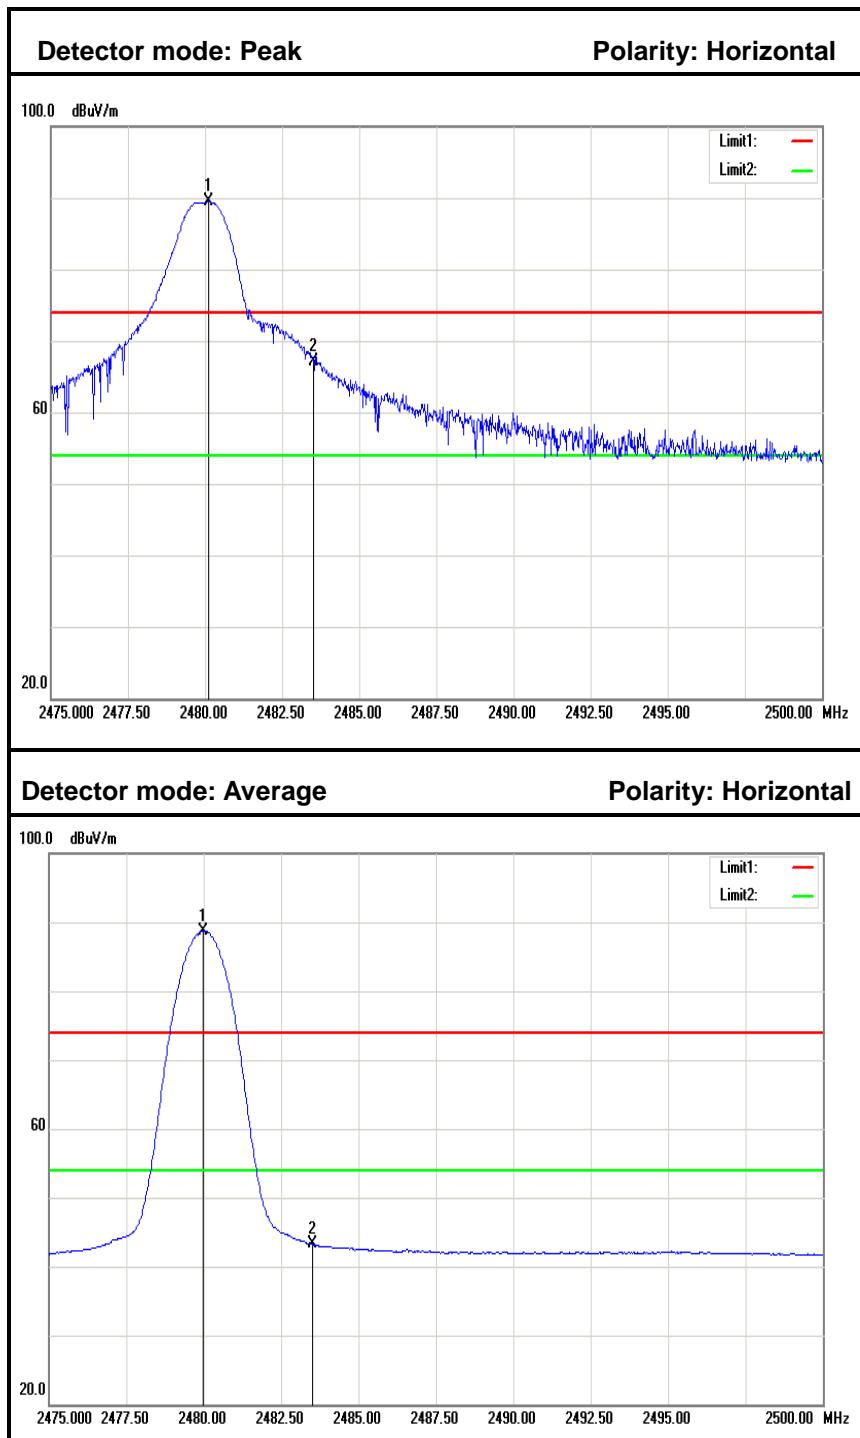

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2480.125	91.79	-2.37	89.42	---	---	Peak	Horizontal
2.	2483.500	69.44	-2.35	67.09	74.00	-6.91	Peak	Horizontal
3.	2479.975	91.13	-2.37	88.76	---	---	Average	Horizontal
4.	2483.500	45.61	-2.35	43.26	54.00	-10.74	Average	Horizontal

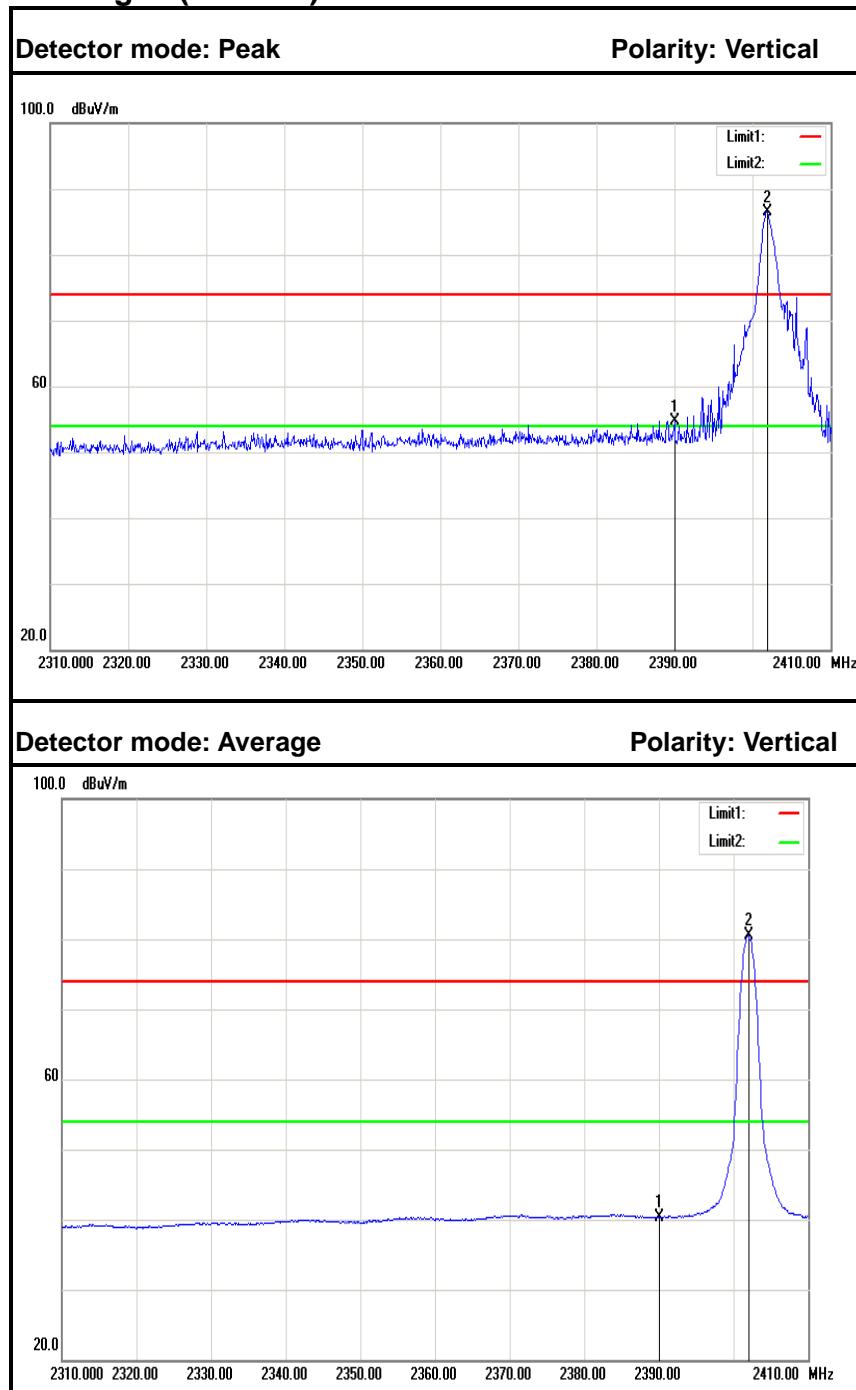**8DPSK****Band Edges (CH-Low)**


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	57.50	-2.86	54.64	74.00	-19.36	Peak	Vertical
2.	2401.900	89.23	-2.80	86.43	---	---	Peak	Vertical
3.	2390.000	43.19	-2.86	40.33	54.00	-13.67	Average	Vertical
4.	2402.000	83.37	-2.80	80.57	---	---	Average	Vertical

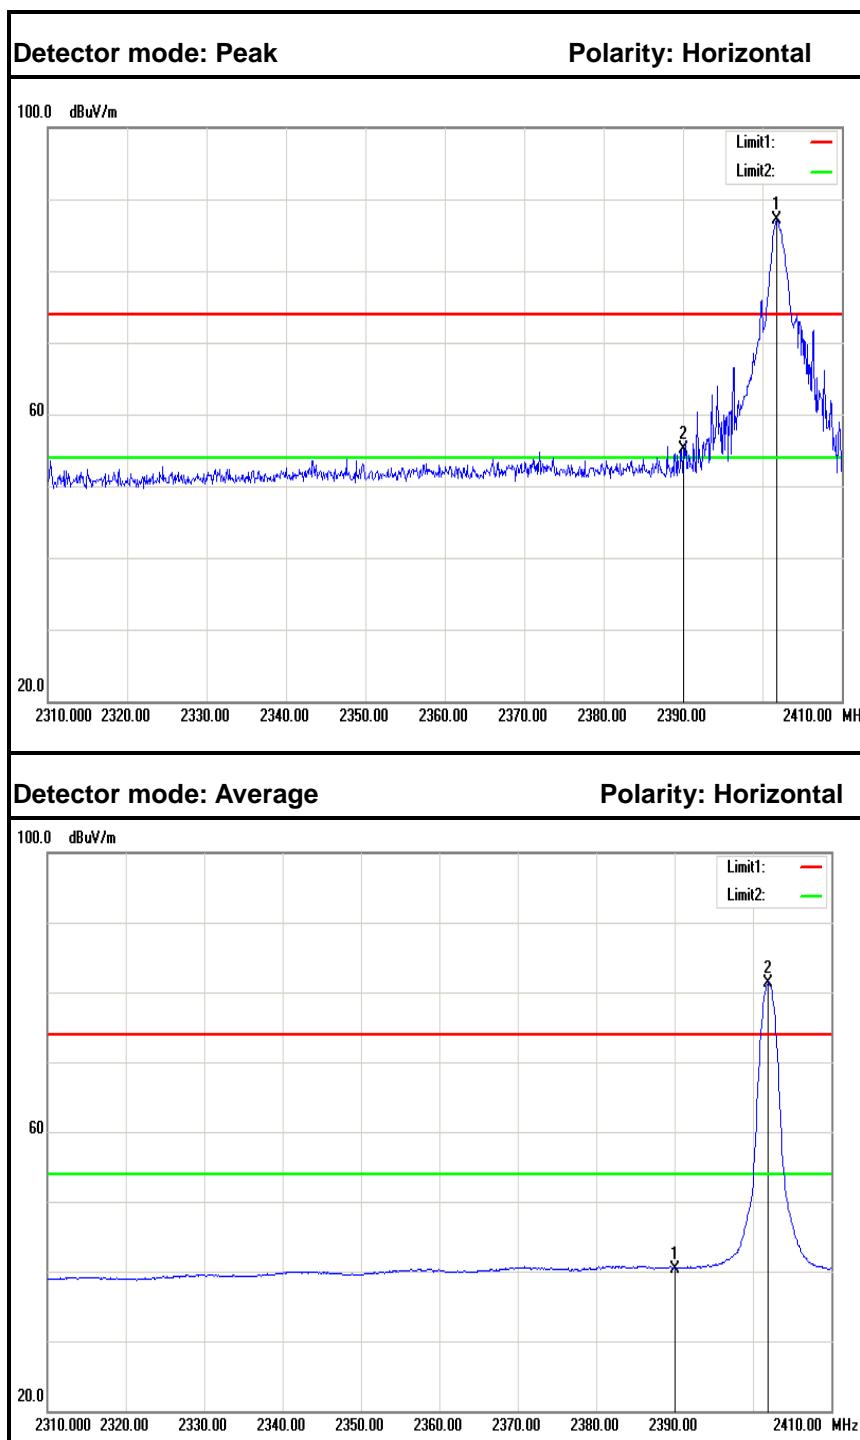


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	57.92	-2.86	55.06	74.00	-18.94	Peak	Horizontal
2.	2401.800	89.87	-2.80	87.07	---	---	Peak	Horizontal
3.	2390.000	43.24	-2.86	40.38	54.00	-13.62	Average	Horizontal
4.	2401.900	84.14	-2.80	81.34	---	---	Average	Horizontal



## Band Edges (CH-High)

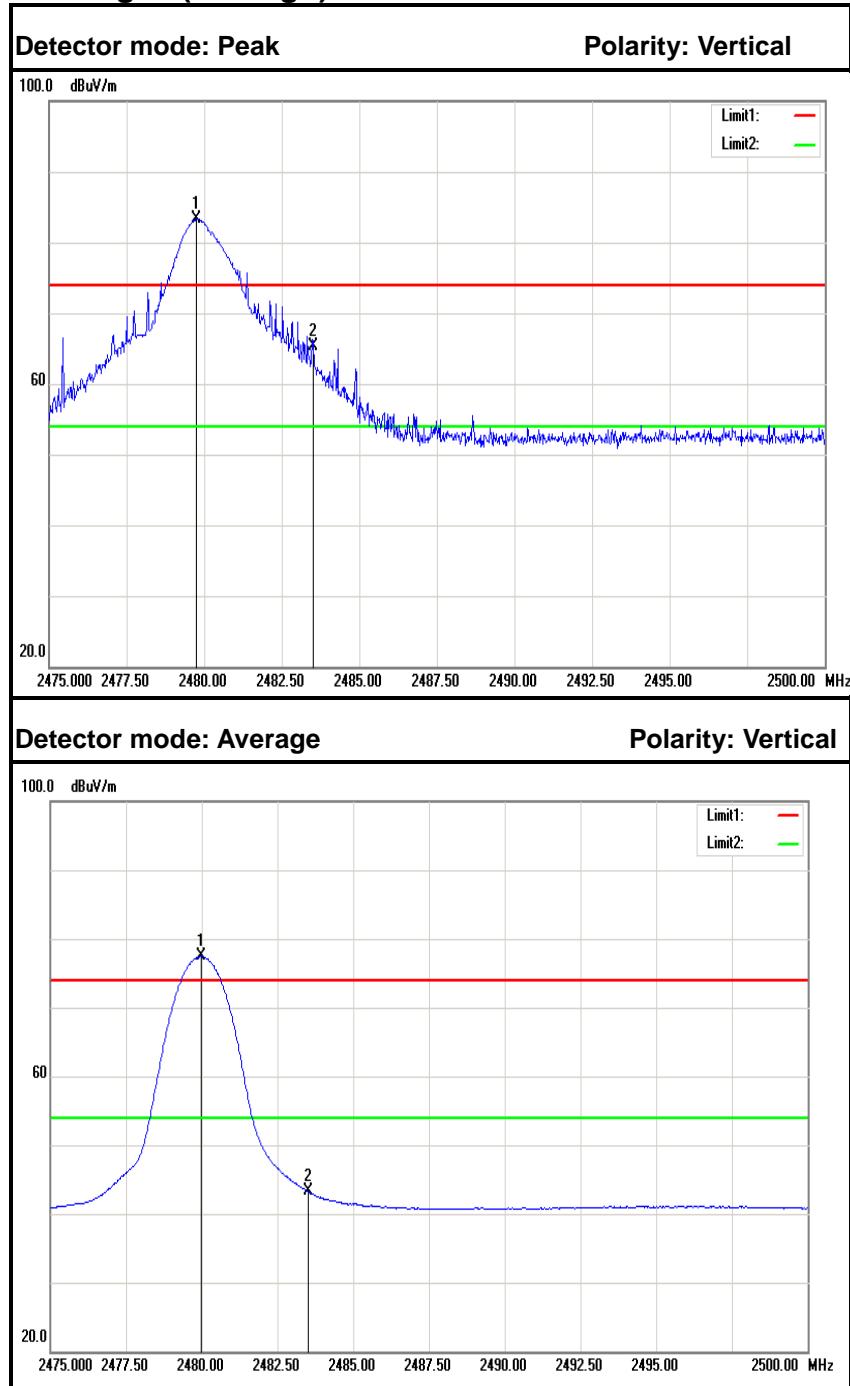

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2479.750	85.64	-2.37	83.27	---	---	Peak	Vertical
2.	2483.500	67.69	-2.35	65.34	74.00	-8.66	Peak	Vertical
3.	2479.975	79.80	-2.37	77.43	---	---	Average	Vertical
4.	2483.500	45.57	-2.35	43.22	54.00	-10.78	Average	Vertical

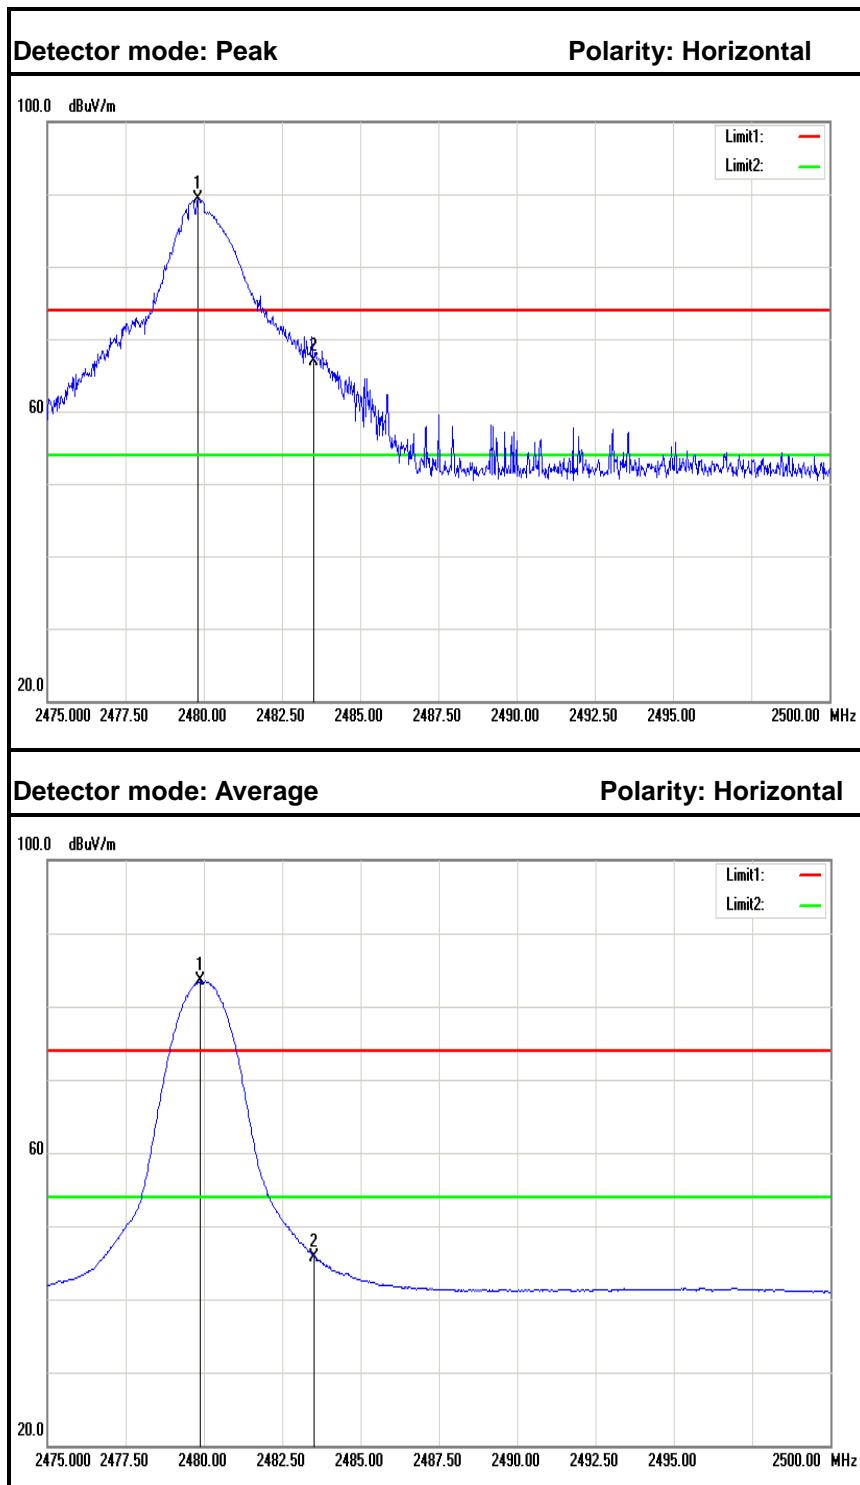

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2479.800	91.62	-2.37	89.25	---	---	Peak	Horizontal
2.	2483.500	69.33	-2.35	66.98	74.00	-7.02	Peak	Horizontal
3.	2479.875	85.80	-2.37	83.43	---	---	Average	Horizontal
4.	2483.500	48.15	-2.35	45.80	54.00	-8.20	Average	Horizontal



## 6.5 FREQUENCY SEPARATION

### LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

### TEST RESULTS

No non-compliance noted

#### Test Data

##### GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	766.000	> Two-thirds of the 20 dB Bandwidth	Pass

##### 8DPSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	924.000	> Two-thirds of the 20 dB Bandwidth	Pass




## GFSK

### Test Plot

#### Measurement of Channel Separation



#### 20 dB bandwidth(CH Low)

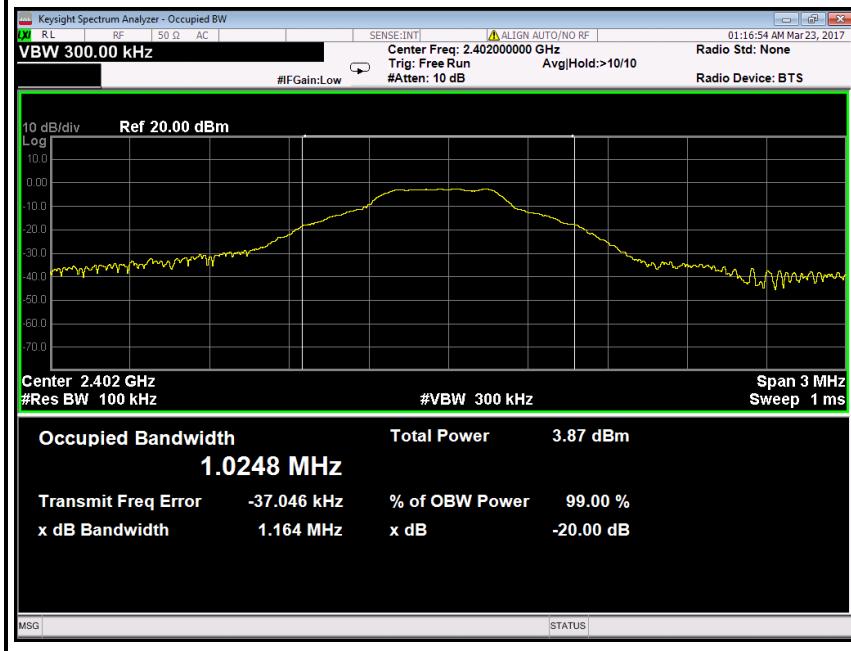




## 8DPSK

## Test Plot

## Measurement of Channel Separation



## 20 dB bandwidth(CH Low)

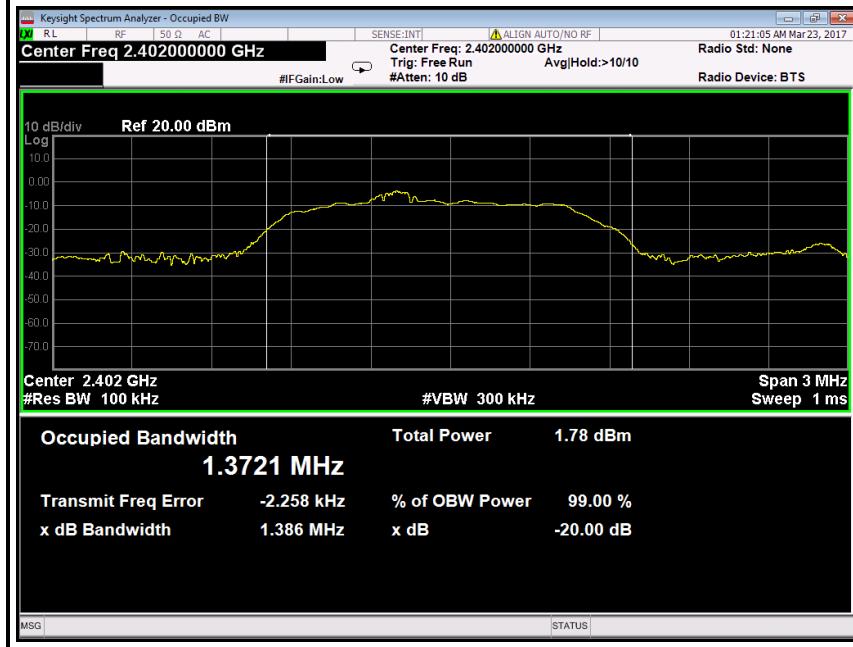



## 6.6 NUMBER OF HOPPING FREQUENCY

### LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

### TEST RESULTS

*No non-compliance noted*

### Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

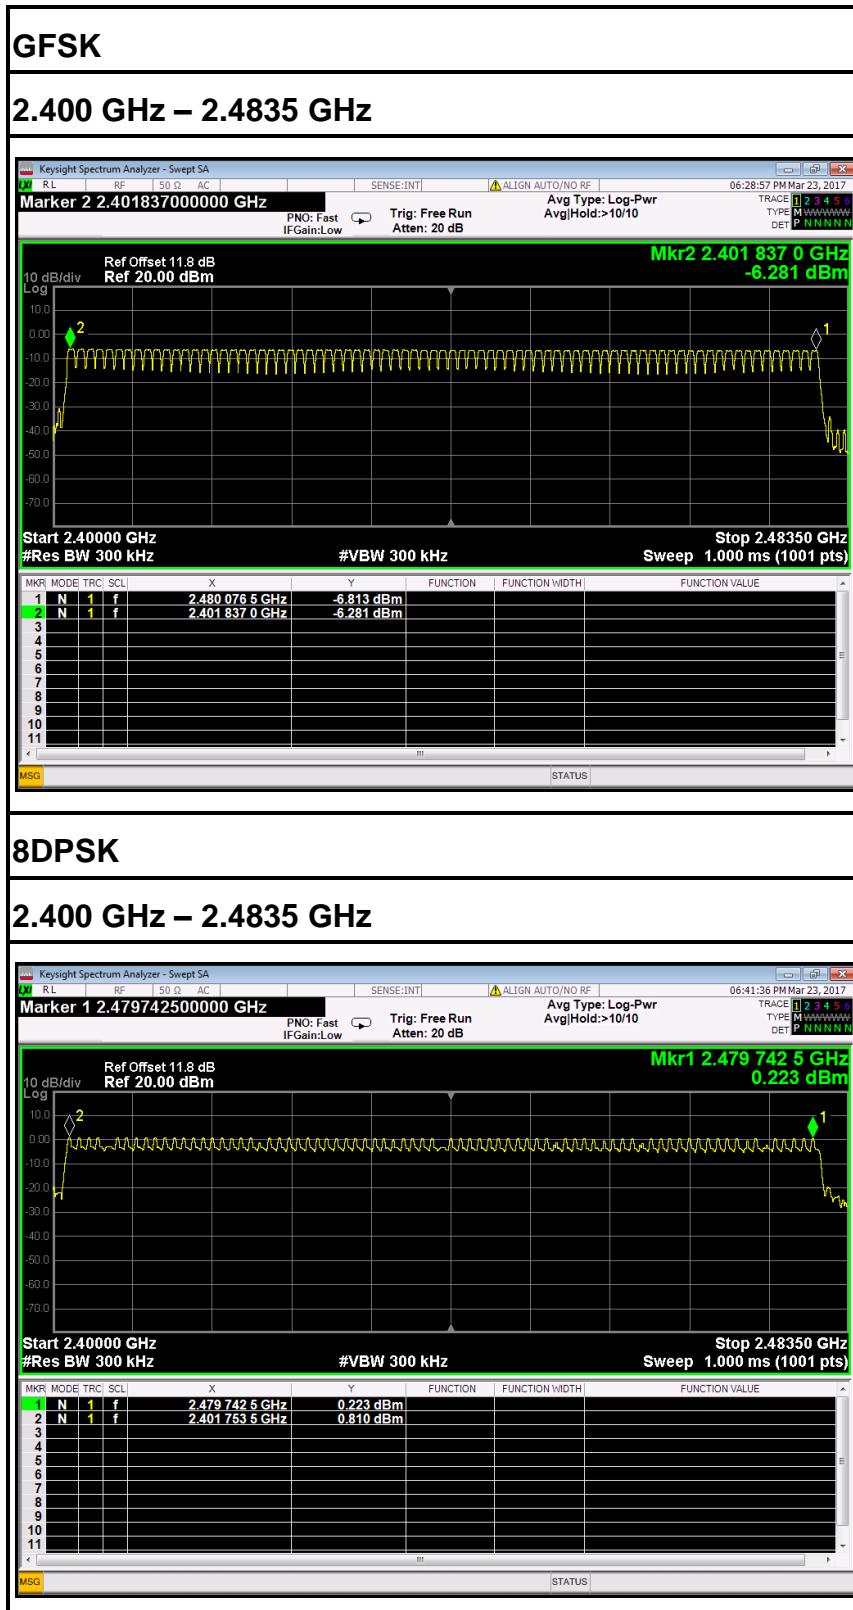Test PlotChannel Number



## 6.7 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4s multiplied by the number of hopping channels employed.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



## **TEST RESULTS**

*No non-compliance noted*

### **Test Data**

#### **GFSK**

##### **DH 1**

CH Mid:  $0.421 * (1600/2)/79 * 31.6 = 134.72(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.421	134.72	31.60	400.00	PASS

##### **DH 3**

CH Mid:  $1.785 * (1600/4)/79 * 31.6 = 285.60 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.785	285.60	31.60	400.00	PASS

##### **DH 5**

CH Mid:  $2.960 * (1600/6)/79 * 31.6 = 315.73(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.960	315.73	31.60	400.00	PASS

**8DPSK****3DH 1**CH Mid:  $0.420 * (1600/2)/79 * 31.6 = 134.40$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.420	134.40	31.60	400.00	PASS

**3DH 3**CH Mid:  $1.758 * (1600/4)/79 * 31.6 = 281.28$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.758	281.28	31.60	400.00	PASS

**3DH 5**CH Mid:  $2.960 * (1600/6)/79 * 31.6 = 315.73$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.960	315.73	31.60	400.00	PASS




## Test Plot

### GFSK


#### DH 1


#### CH Mid

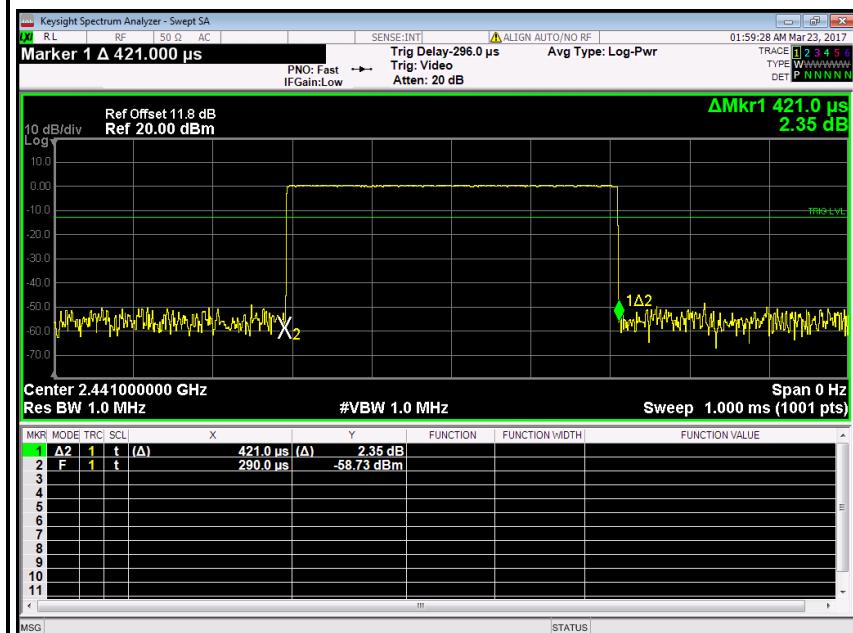

#### DH 3

#### CH Mid

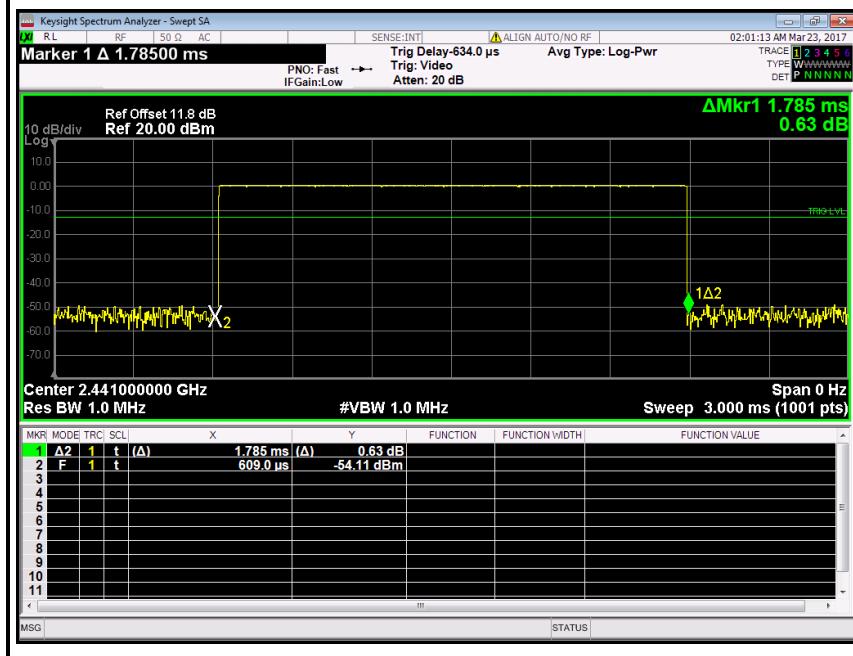


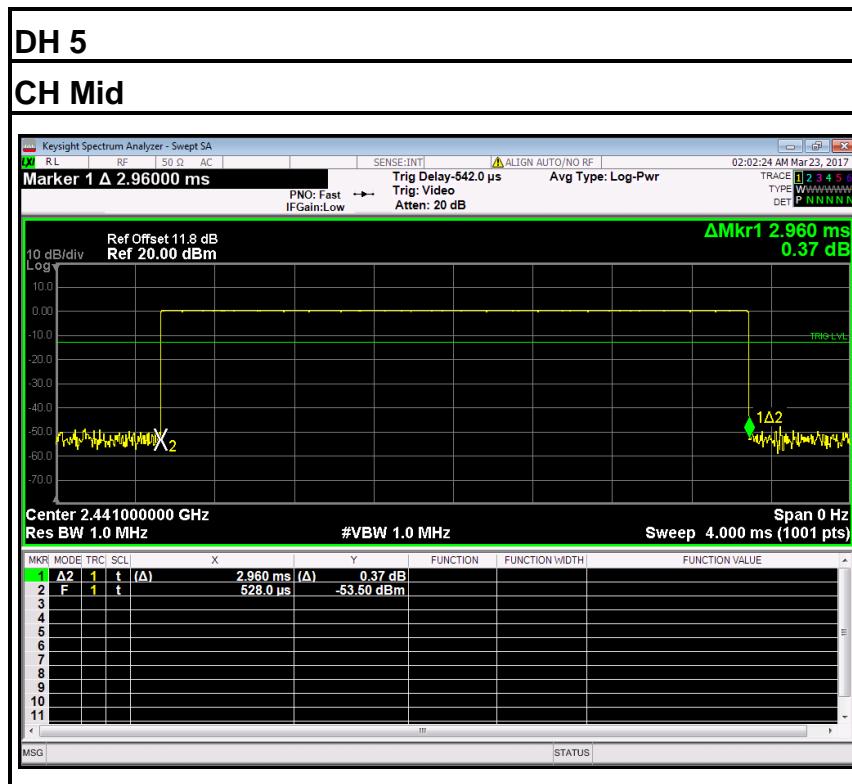




## Test Plot

### 8DPSK

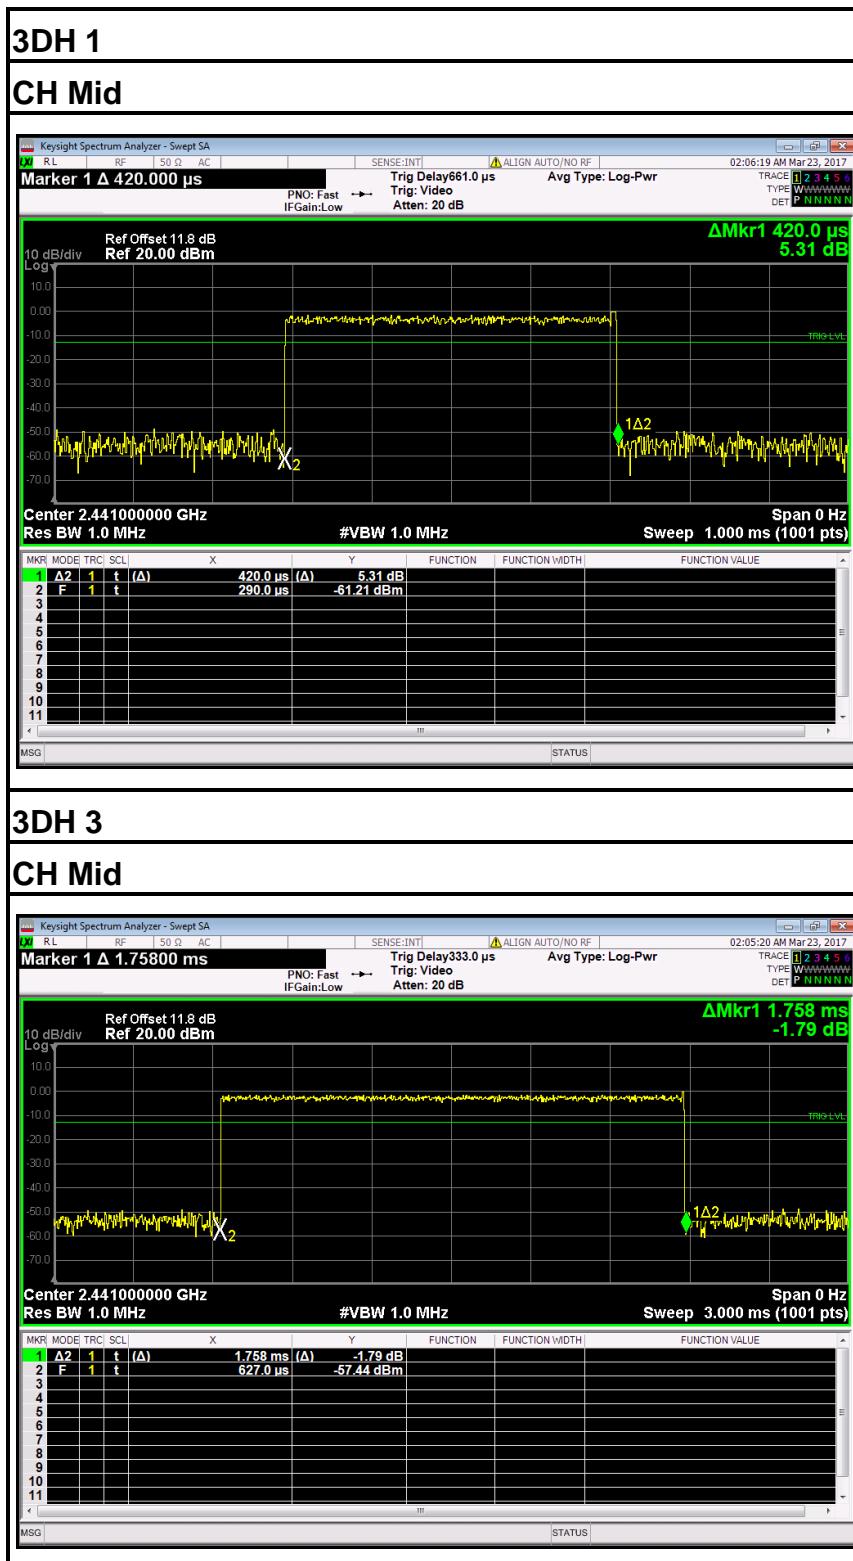

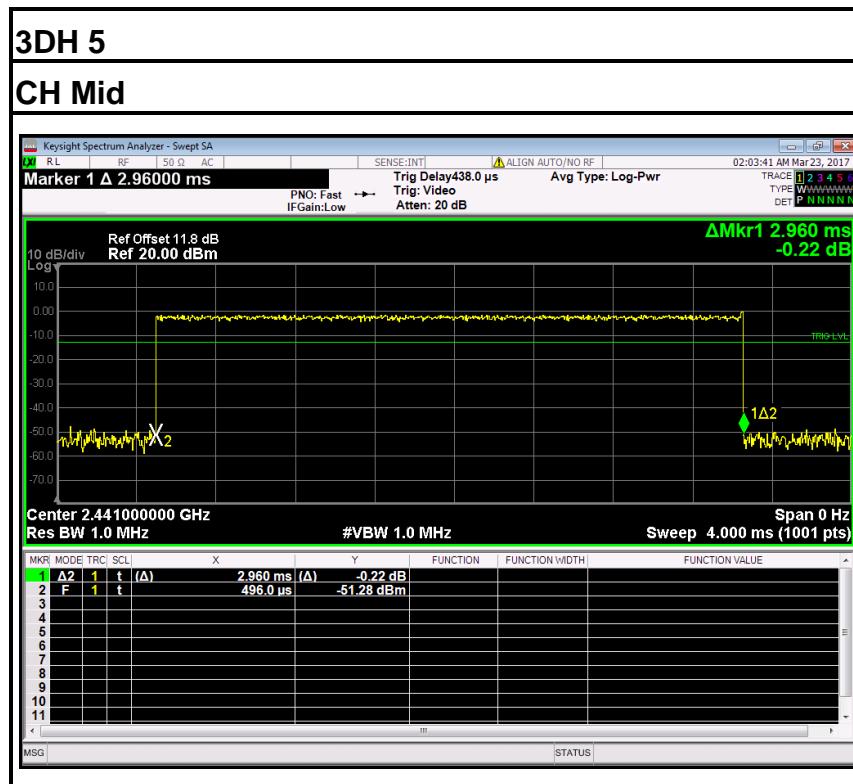



## 6.8 SPURIOUS EMISSIONS

### 6.8.1. CONDUCTED MEASUREMENT

#### LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### **TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 10MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz , it is only recorded 10MHz to 26GHz.

#### **TEST RESULTS**


*No non-compliance noted*


*Remark: The hopping on mode and hopping off mode were chosen for pre-test and the hopping off mode was the worse case and print in the report.*



## Hopping Off


### Test Plot (GFSK )

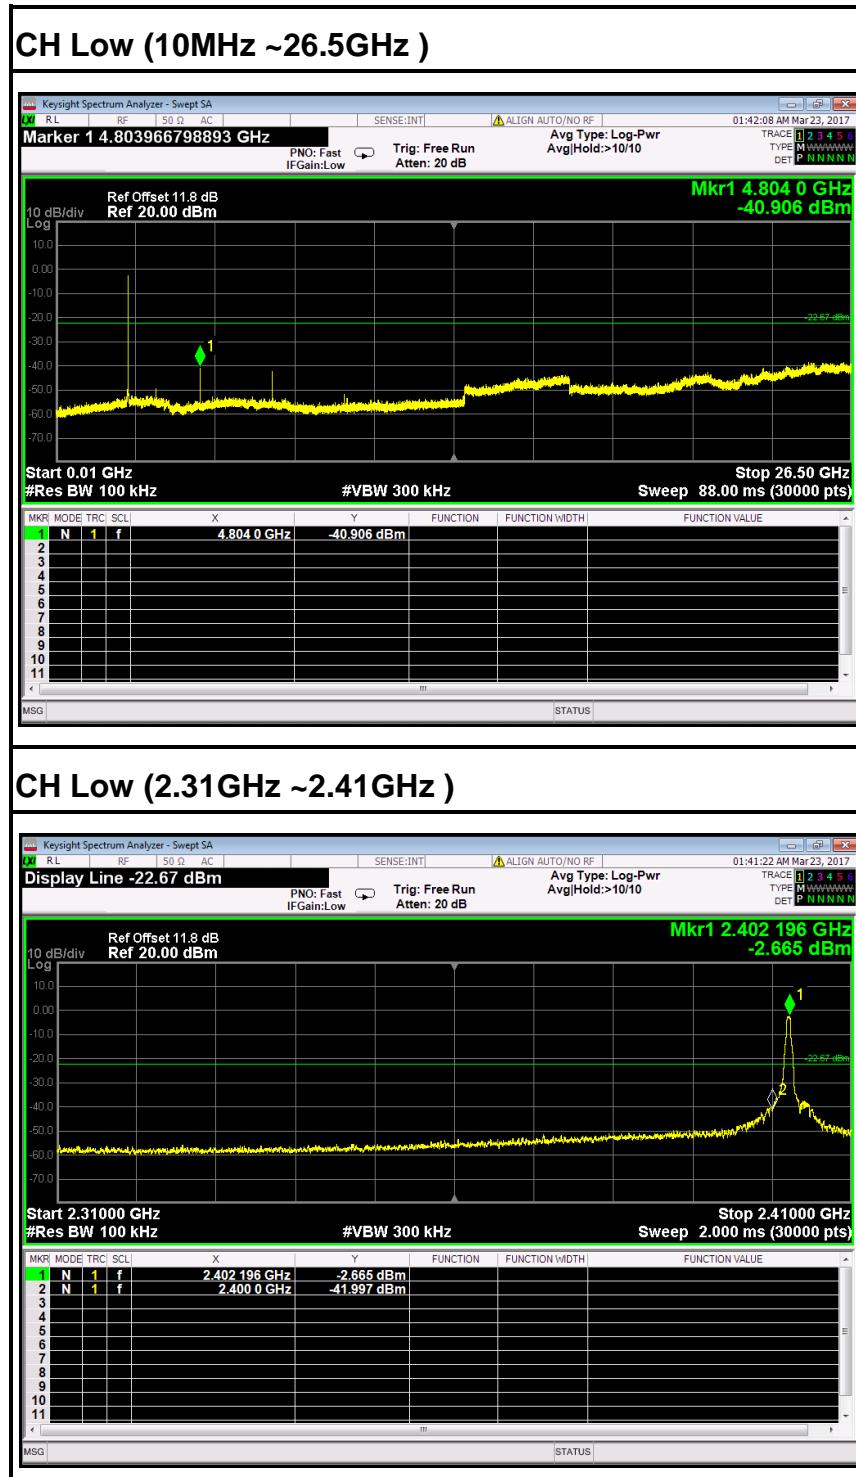

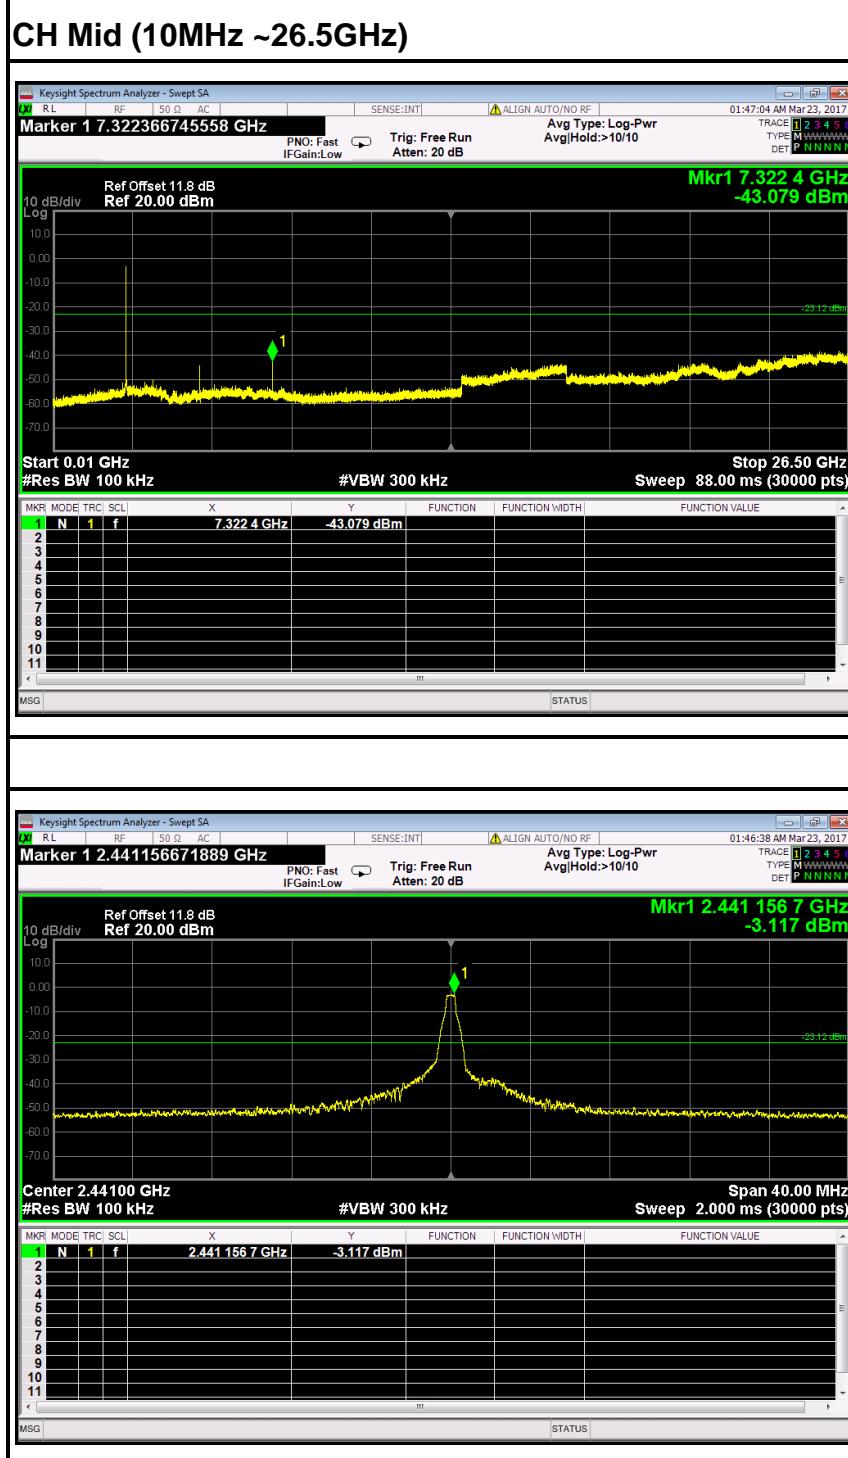




### CH High (10MHz ~26.5GHz)

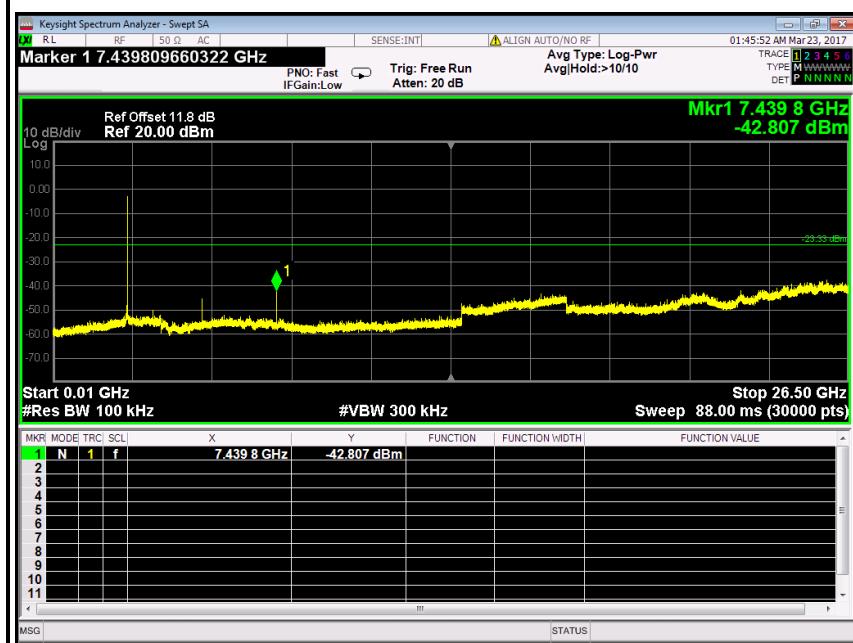


### CH High (2.475GHz ~ 2.5GHz)

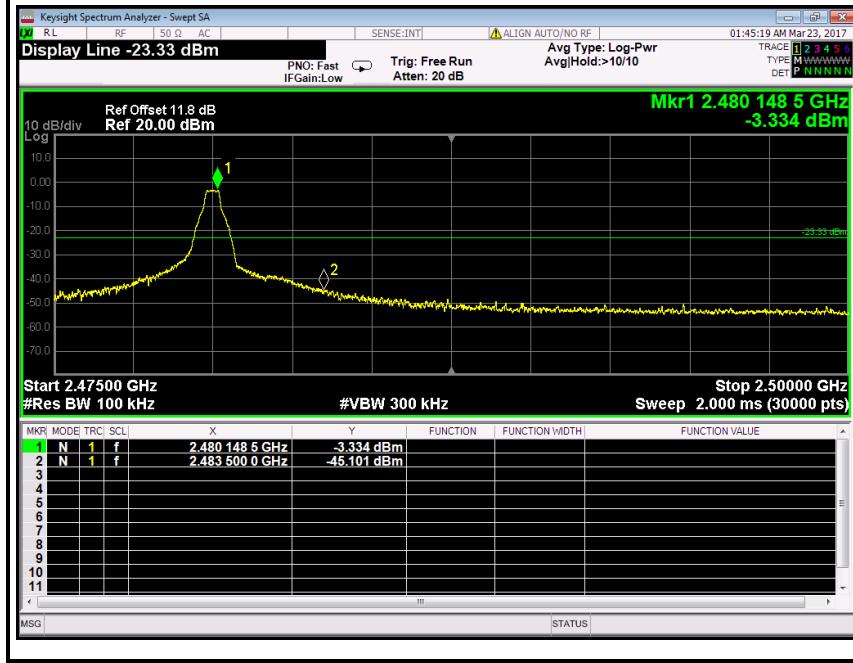


Test Plot (8DPSK )



### CH Mid (10MHz ~26.5GHz)

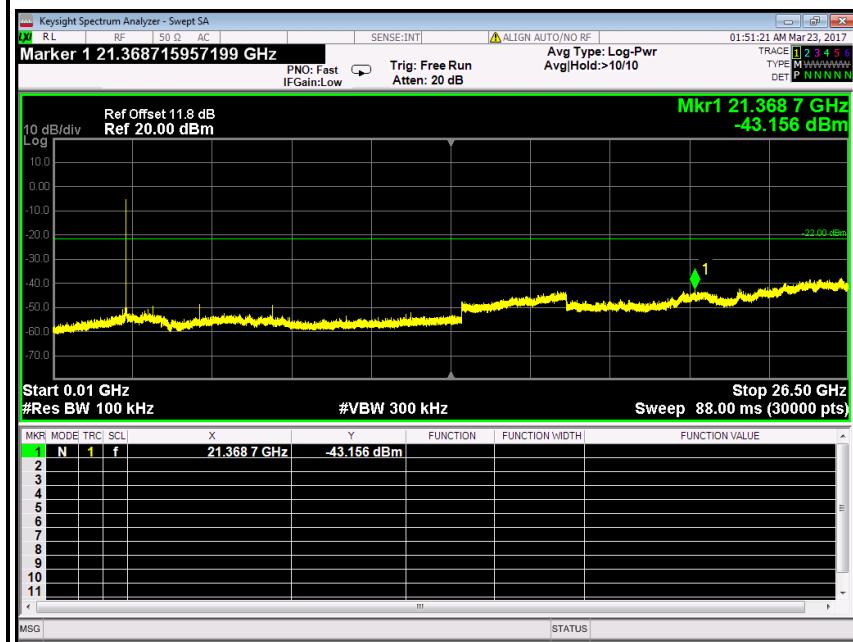


### CH Mid (2.441GHz ~ 2.5GHz)

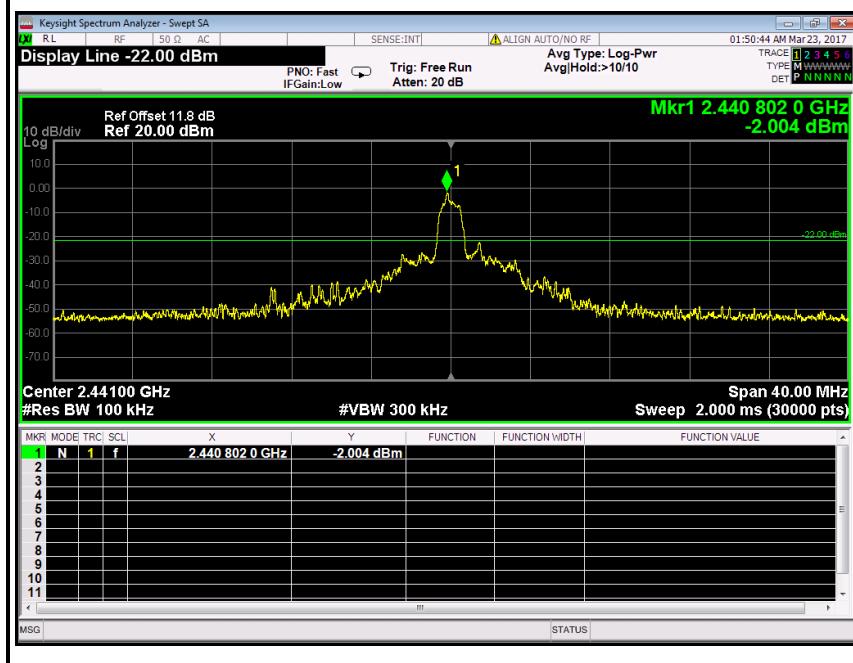




### CH High (10MHz ~26.5GHz)

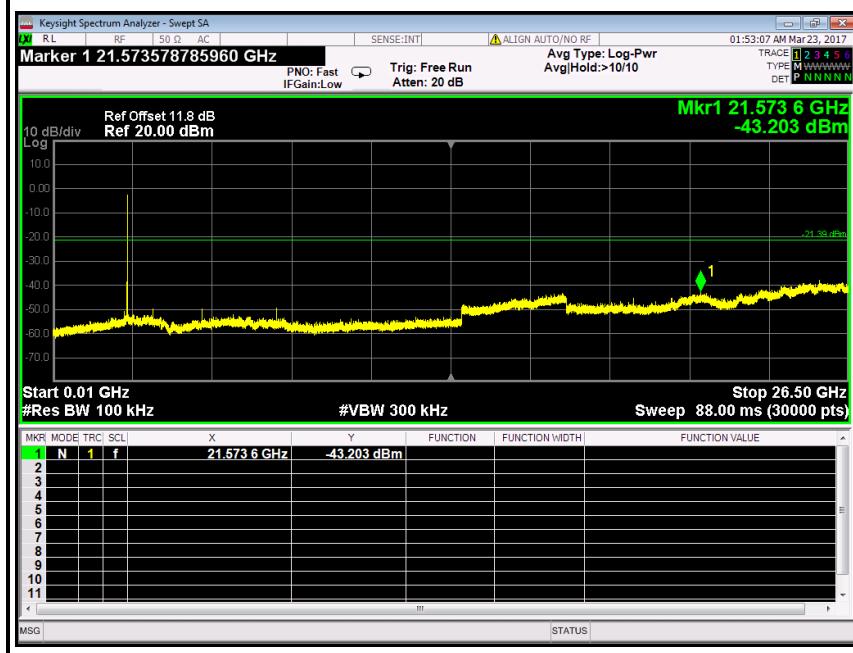


### CH High (2.475GHz ~ 2.5GHz)

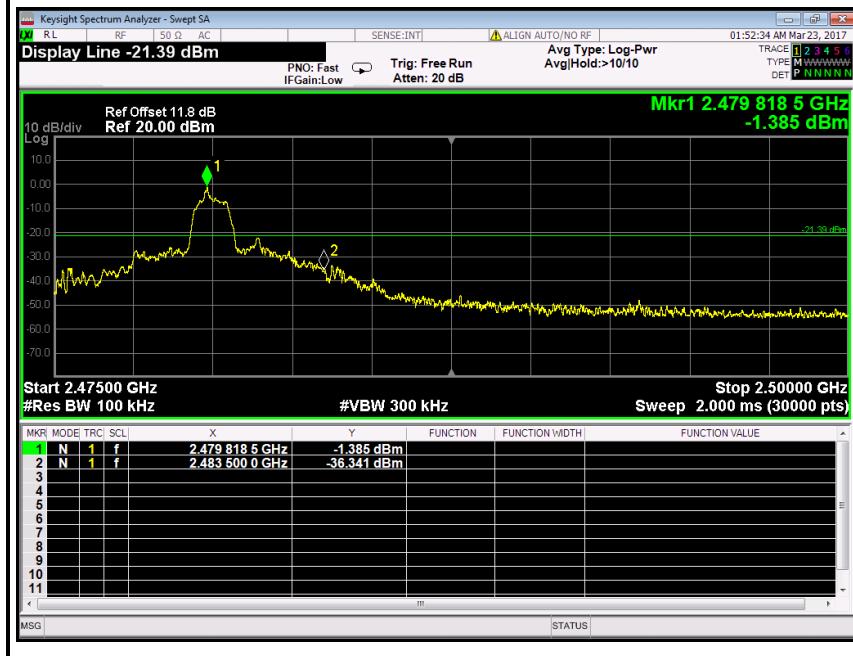




## Hopping On

### Test Data (GFSK)

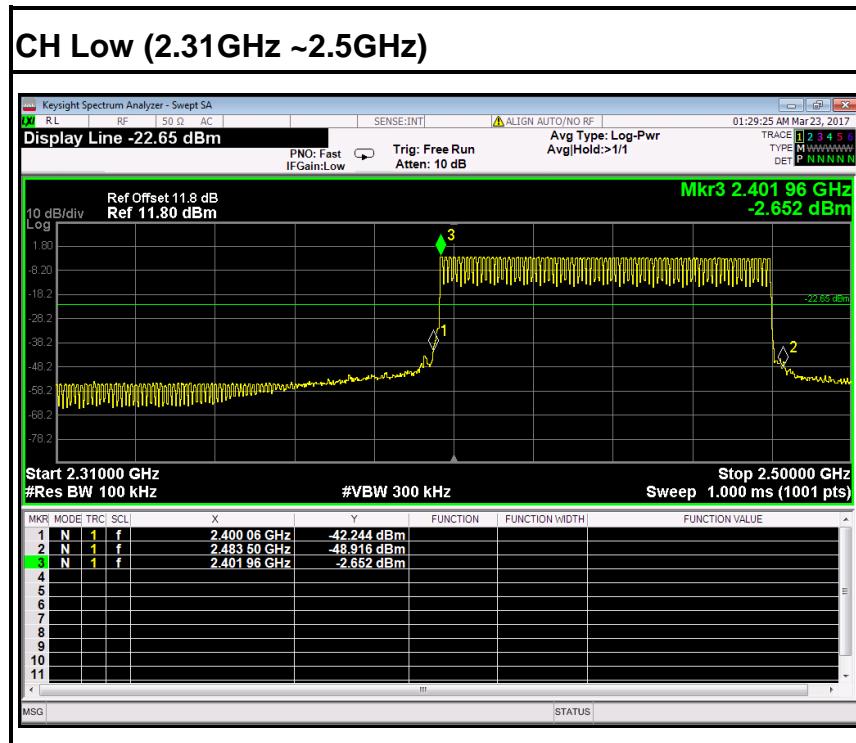

### Test Data (8DPSK)

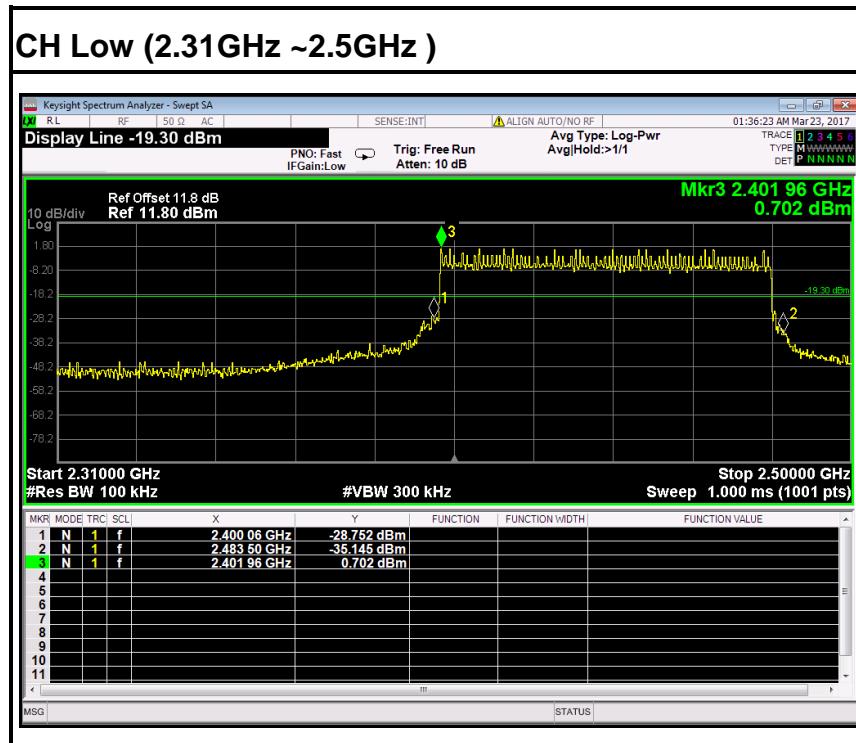



## 6.8.2. Radiated Emissions

### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




## MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018
Amplifier	EMEC	EM330	060661	03/18/2017	03/17/2018
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2017	02/20/2018
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2017	02/20/2018
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2017	02/27/2018
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2017	02/27/2018
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2017	02/20/2018
Test S/W	FARAD		LZ-RF / CCS-SZ-3A2		


**Remark:** Each piece of equipment is scheduled for calibration once a year.

## Test Configuration


### Below 30MHz

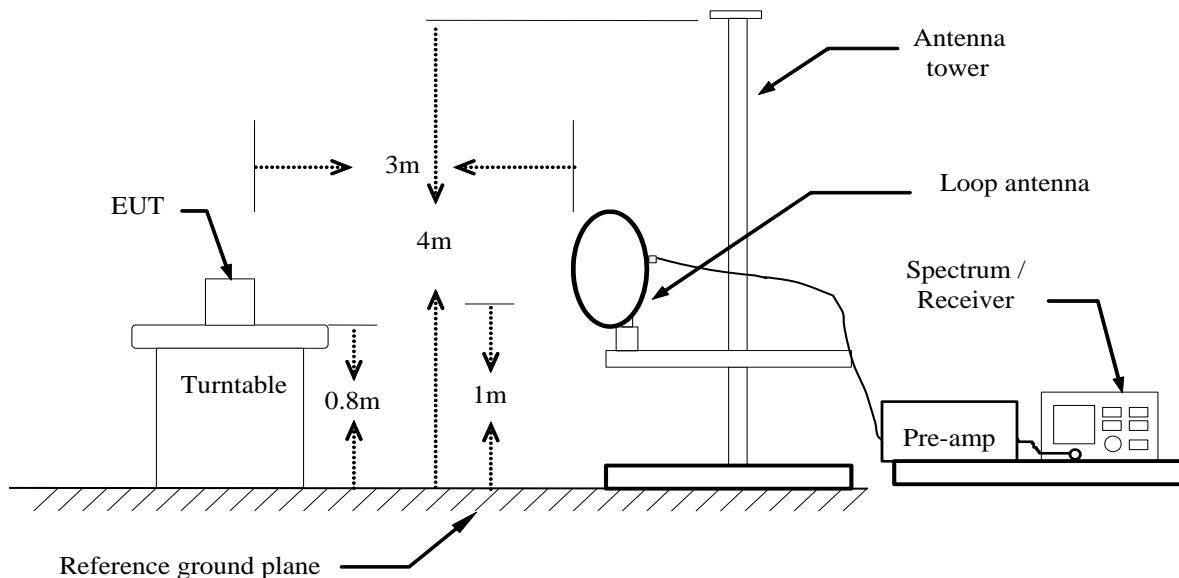

### Below 1 GHz

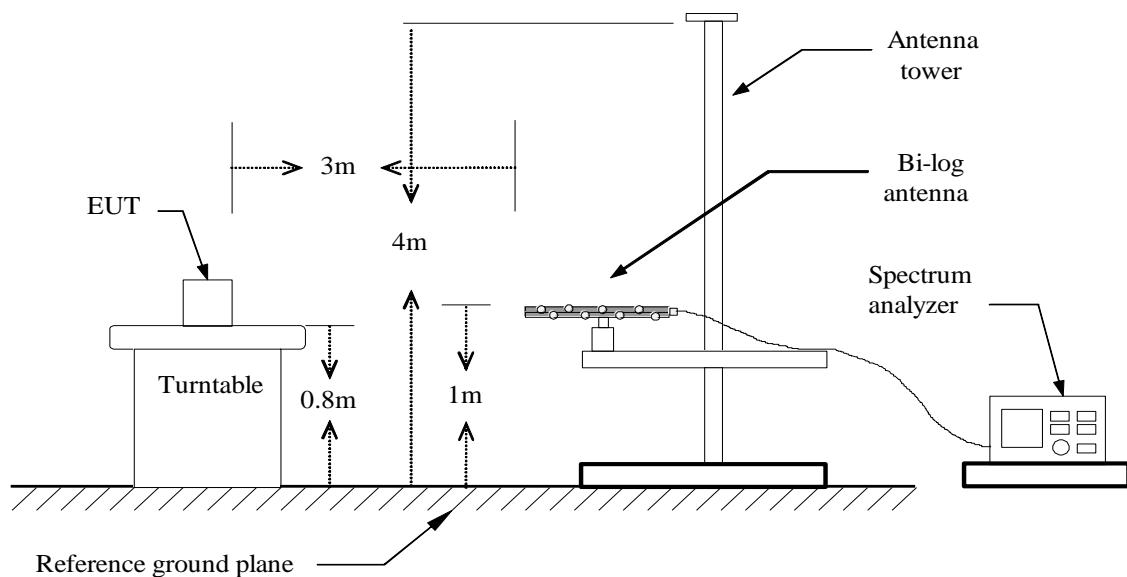

### Above 1 GHz

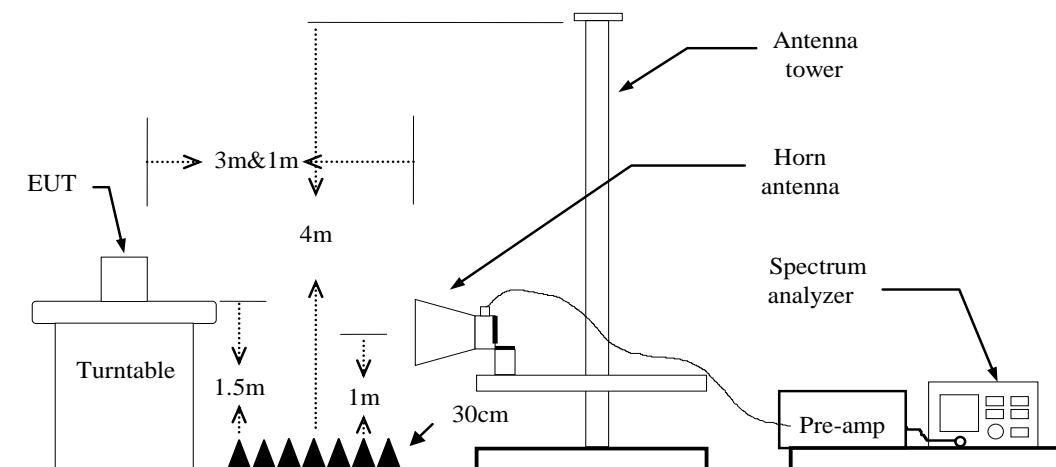



## **MEASURING SETTING**

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

## **TEST PROCEDURE**

### **1) Sequence of testing 9 kHz to 30 MHz**

#### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### **Pre measurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions



#### **Final measurement:**

- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

#### **2) Sequence of testing 30 MHz to 1 GHz**

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### **Pre measurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



**Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

**3) Sequence of testing 1 GHz to 18 GHz**

**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

**Pre measurement:**

- The turntable rotates from  $0^\circ$  to  $315^\circ$  using  $45^\circ$  steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



### **Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

## **4) Sequence of testing above 18 GHz**

### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

### **Pre measurement:**

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

### **Final measurement:**

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



## TEST RESULTS

### Below 1 GHz

#### GFSK

**Test Mode:** TX(CH High)

**Tested by:** Darry Wu

**Ambient temperature:** 24°C **Relative humidity:** 52% RH

**Date:** March 14, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
38.7300	47.06	-15.79	31.27	40.00	-8.73	V	QP
101.7800	54.86	-23.35	31.51	43.50	-11.99	V	QP
191.9900	55.44	-22.83	32.61	43.50	-10.89	V	QP
450.9800	48.06	-15.43	32.63	46.00	-13.37	V	QP
552.8300	47.84	-13.15	34.69	46.00	-11.31	V	QP
601.3300	47.35	-12.84	34.51	46.00	-11.49	V	QP
101.7800	57.21	-23.35	33.86	43.50	-9.64	H	QP
143.4900	56.42	-21.43	34.99	43.50	-8.51	H	QP
191.9900	62.44	-22.83	39.61	43.50	-3.89	H	QP
240.4900	62.57	-21.48	41.09	46.00	-4.91	H	QP
456.8000	50.42	-15.27	35.15	46.00	-10.85	H	QP
552.8300	49.04	-13.15	35.89	46.00	-10.11	H	QP

**\*\*Remark:** No emission found between lowest internal used/generated frequency to 30MHz.


Pre-scan all mode and recorded the worst case results in this report (TX- High Channel(1Mbps)).

#### **Notes:**


1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5. Frequency (MHz). = Emission frequency in MHz  
Reading (dBuV) = Receiver reading  
Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain  
Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
Limit (dBuV/m) = Limit stated in standard  
Margin(dB) = Measured (dBuV/m) – Limits (dBuV/m)  
Antenna Pole(V/H) = Current carrying line of reading



## Vertical

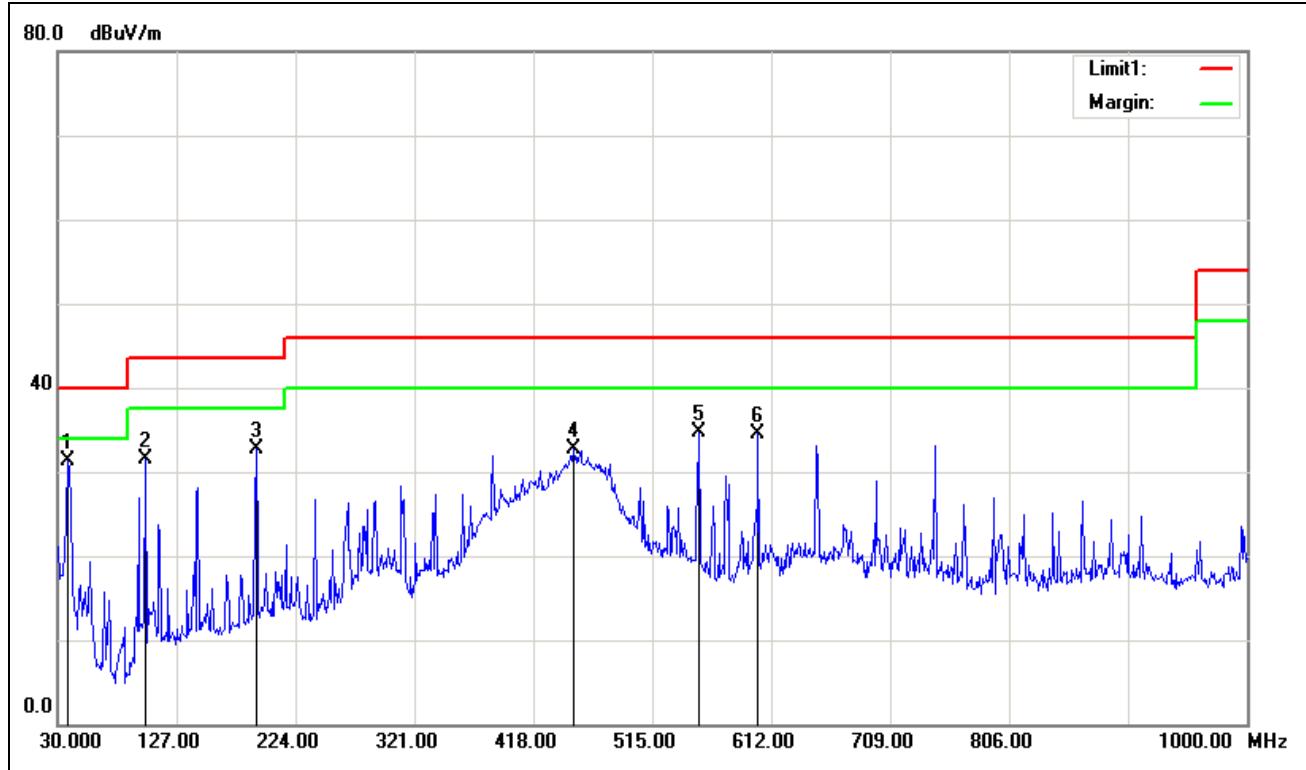

## Horizontal

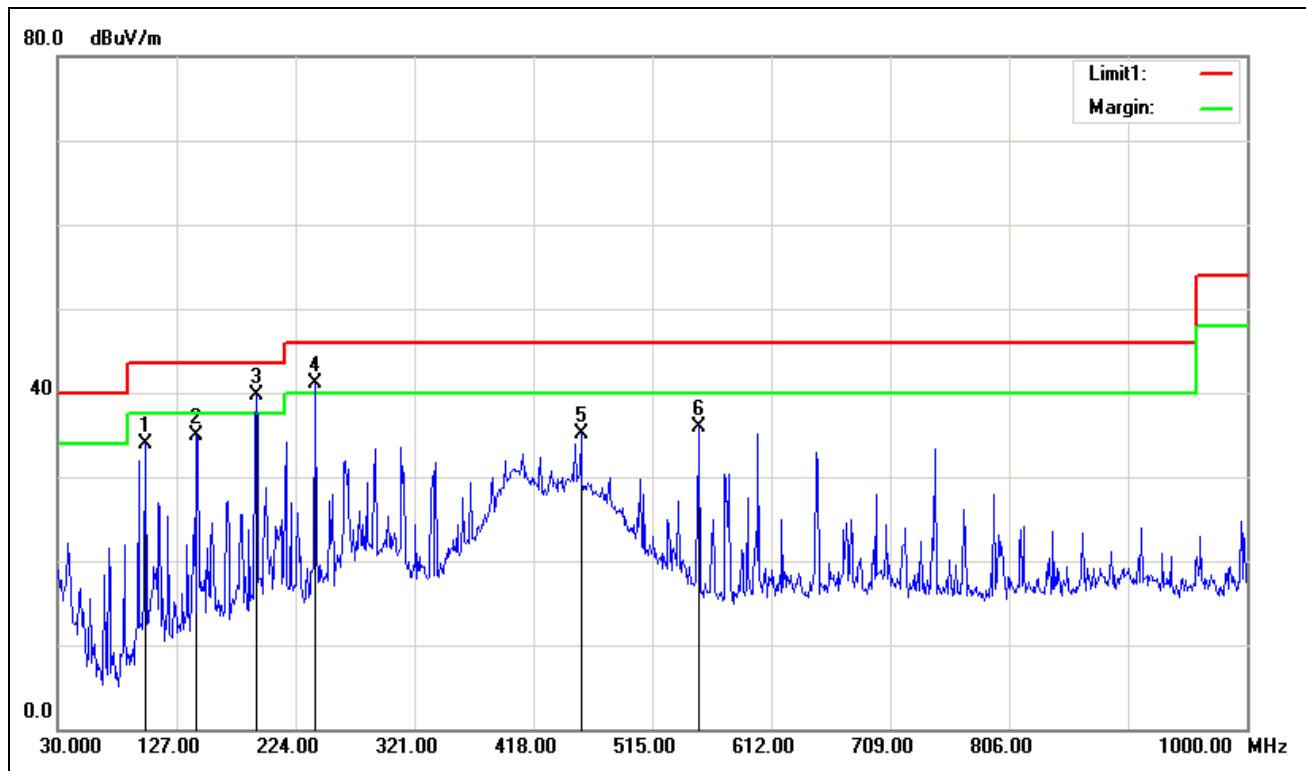

Above 1 GHzGFSKTest Mode: TX(CH Low)Tested by: Darry WuAmbient temperature: 24°C Relative humidity: 52% RHDate: March 14, 2017

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1090.000	50.09	-8.21	41.88	74.00	-32.12	V	peak
1765.000	60.25	-6.35	53.90	74.00	-20.10	V	peak
1765.000	55.72	-6.35	49.37	54.00	-4.63	V	AVG
2503.000	46.21	-2.25	43.96	74.00	-30.04	V	peak
4987.000	42.41	4.94	47.35	74.00	-26.65	V	peak
6391.000	43.39	6.71	50.10	74.00	-23.90	V	peak
7327.000	45.87	8.34	54.21	74.00	-19.79	V	peak
7327.000	41.91	8.34	50.25	54.00	-3.75	V	AVG
1747.000	58.89	-6.38	52.51	74.00	-21.49	H	Peak
1747.000	55.71	-6.38	49.33	54.00	-4.67	H	AVG
2530.000	46.80	-2.21	44.59	74.00	-29.41	H	Peak
3997.000	44.33	1.58	45.91	74.00	-28.09	H	peak
4807.000	46.15	4.35	50.50	74.00	-23.50	H	peak
5545.000	42.44	5.89	48.33	74.00	-25.67	H	peak
7327.000	45.61	8.34	53.95	74.00	-20.05	H	peak
7327.000	42.48	8.34	50.82	54.00	-3.18	H	AVG

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.

5. Frequency (MHz) = Emission frequency in MHz

Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain

Limit (dB $\mu$ V/m) = Limit stated in standardMargin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

Pk = Peak Reading

AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Darry WuAmbient temperature: 24°CRelative humidity: 52% RHDate: March 14, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1747.000	58.11	-6.38	51.73	74.00	-22.27	V	peak
3196.000	48.06	-1.03	47.03	74.00	-26.97	V	peak
4681.000	43.15	3.94	47.09	74.00	-26.91	V	peak
4879.000	49.84	4.59	54.43	74.00	-19.57	V	peak
4879.000	43.75	4.59	48.34	54.00	-5.66	V	AVG
7327.000	43.64	8.34	51.98	74.00	-22.02	V	peak
8074.000	42.19	9.61	51.80	74.00	-22.20	V	peak
1747.000	61.59	-6.38	55.21	74.00	-18.79	H	Peak
1747.000	57.67	-6.38	51.29	54.00	-2.71	H	AVG
2530.000	46.23	-2.21	44.02	74.00	-29.98	H	Peak
4879.000	47.83	4.59	52.42	74.00	-21.58	H	peak
4879.000	44.72	4.59	49.31	54.00	-4.69	H	AVG
5194.000	42.77	5.33	48.10	74.00	-25.90	H	peak
6562.000	42.30	6.99	49.29	74.00	-24.71	H	peak
7327.000	49.16	8.34	57.50	74.00	-16.50	H	peak
7327.000	42.72	8.34	51.06	54.00	-2.94	H	AVG

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
- Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading
- Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
- Limit (dB $\mu$ V/m) = Limit stated in standard
- Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)
- Pk = Peak Reading
- AV. = Average Reading
- Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Darry WuAmbient temperature: 24°CRelative humidity: 52% RHDate: March 14, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1747.000	58.12	-6.38	51.74	74.00	-22.26	V	peak
2548.000	46.18	-2.17	44.01	74.00	-29.99	V	peak
4519.000	43.68	3.41	47.09	74.00	-26.91	V	peak
4960.000	45.65	4.85	50.50	74.00	-23.50	V	peak
6598.000	42.36	7.05	49.41	74.00	-24.59	V	peak
7417.000	43.29	8.51	51.80	74.00	-22.20	V	peak
1747.000	59.32	-6.38	52.94	74.00	-21.06	H	Peak
1747.000	57.73	-6.38	51.35	54.00	-2.65	H	AVG
2539.000	47.03	-2.19	44.84	74.00	-29.16	H	Peak
3088.000	44.95	-1.21	43.74	74.00	-30.26	H	peak
4960.000	48.95	4.85	53.80	74.00	-20.20	H	peak
4960.000	44.43	4.85	49.28	54.00	-4.72	H	AVG
7228.000	42.79	8.14	50.93	74.00	-23.07	H	peak
7444.000	49.28	8.57	57.85	74.00	-16.15	H	peak
7444.000	41.62	8.57	50.19	54.00	-3.81	H	AVG

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)  
Pk = Peak Reading  
AV. = Average Reading  
Remark = Mark Peak Reading or Average Reading

8DPSKTest Mode: TX(CH Low)Tested by: Darry WuAmbient temperature: 24°CRelative humidity: 52% RHDate: March 14, 2017

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1603.000	51.60	-6.69	44.91	74.00	-29.09	V	peak
1747.000	61.26	-6.38	54.88	74.00	-19.12	V	peak
1747.000	57.91	-6.38	51.53	54.00	-2.47	V	AVG
1864.000	50.51	-5.86	44.65	74.00	-29.35	V	peak
4807.000	47.11	4.35	51.46	74.00	-22.54	V	peak
6346.000	42.42	6.64	49.06	74.00	-24.94	V	peak
7201.000	43.58	8.09	51.67	74.00	-22.33	V	peak
<hr/>							
1747.000	61.08	-6.38	54.70	74.00	-19.30	H	Peak
1747.000	58.00	-6.38	51.62	54.00	-2.38	H	AVG
4861.000	47.50	4.53	52.03	74.00	-21.97	H	Peak
5410.000	42.51	5.71	48.22	74.00	-25.78	H	peak
6049.000	42.59	6.16	48.75	74.00	-25.25	H	peak
6949.000	41.51	7.62	49.13	74.00	-24.87	H	peak
7615.000	42.30	8.90	51.20	74.00	-22.80	H	Peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:

- a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
- b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.

5. Frequency (MHz) = Emission frequency in MHz

Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dB $\mu$ V/m) = Limit stated in standard

Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

Pk = Peak Reading

AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Darry WuAmbient temperature: 24°CRelative humidity: 52% RHDate: March 14, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1594.000	51.84	-6.71	45.13	74.00	-28.87	V	peak
1747.000	57.93	-6.38	51.55	74.00	-22.45	V	peak
4150.000	46.48	2.12	48.60	74.00	-25.40	V	peak
4834.000	47.31	4.44	51.75	74.00	-22.25	V	peak
6346.000	42.42	6.64	49.06	74.00	-24.94	V	peak
7741.000	43.45	9.14	52.59	74.00	-21.41	V	peak
7741.000	42.23	9.14	51.37	54.00	-2.63	V	AVG
1747.000	58.59	-6.38	52.21	74.00	-21.79	H	Peak
2530.000	46.83	-2.21	44.62	74.00	-29.38	H	Peak
4861.000	46.12	4.53	50.65	74.00	-23.35	H	Peak
6823.000	42.37	7.41	49.78	74.00	-24.22	H	peak
7426.000	44.55	8.53	53.08	74.00	-20.92	H	peak
7426.000	42.75	8.53	51.28	54.00	-2.72	H	AVG
8191.000	41.97	9.54	51.51	74.00	-22.49	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz

Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dB $\mu$ V/m) = Limit stated in standard

Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

Pk = Peak Reading

AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Darry WuAmbient temperature: 24°CRelative humidity: 52% RHDate: March 14, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1747.000	58.55	-6.38	52.17	74.00	-21.83	V	peak
1747.000	55.74	-6.38	49.36	54.00	-4.64	V	AVG
3718.000	44.92	0.40	45.32	74.00	-28.68	V	peak
4834.000	47.44	4.44	51.88	74.00	-22.12	V	peak
6076.000	42.10	6.20	48.30	74.00	-25.70	V	peak
6382.000	41.90	6.70	48.60	74.00	-25.40	V	peak
7444.000	46.27	8.57	54.84	74.00	-19.16	V	peak
7444.000	42.29	8.57	50.86	54.00	-3.14	V	AVG
<hr/>							
1747.000	59.14	-6.38	52.76	74.00	-21.24	H	Peak
1747.000	55.67	-6.38	49.29	54.00	-4.71	H	AVG
4393.000	44.62	2.97	47.59	74.00	-26.41	H	Peak
4834.000	47.77	4.44	52.21	74.00	-21.79	H	peak
5491.000	43.25	5.85	49.10	74.00	-24.90	H	peak
7435.000	44.29	8.55	52.84	74.00	-21.16	H	peak
7435.000	42.38	8.55	50.93	54.00	-3.07	H	AVG
7876.000	42.36	9.41	51.77	74.00	-22.23	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz

Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dB $\mu$ V/m) = Limit stated in standard

Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

Pk = Peak Reading

AV. = Average Reading

Remark = Mark Peak Reading or Average Reading



## 6.9 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/11/2017	02/10/2018
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	02/11/2017	02/10/2018
LISN	EMCO	3825/2	8901-1459	02/12/2017	02/11/2018
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	02/15/2017	02/14/2018
Test S/W	FARAD		EZ-EMC/ CCS-3A1-CE		

**Remark:** Each piece of equipment is scheduled for calibration once a year.

## Test Configuration

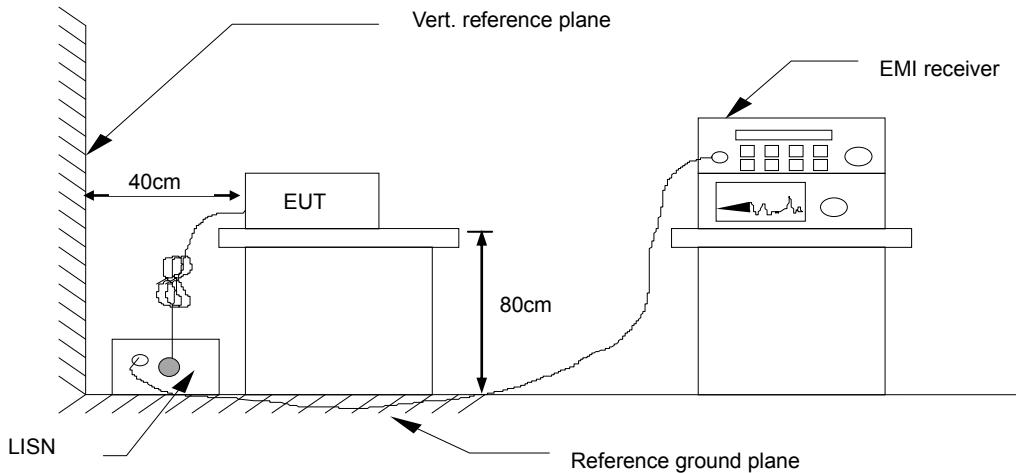

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

## TEST PROCEDURE


1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**

<b>Model No.</b>	MC-3943	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	22°C, 45% RH	<b>Test Mode</b>	Mode 4
<b>Tested by</b>	Evan Ai	<b>Line</b>	L1
<b>Test Date</b>	March 13, 2017	<b>Test Voltage</b>	120Vac/60Hz

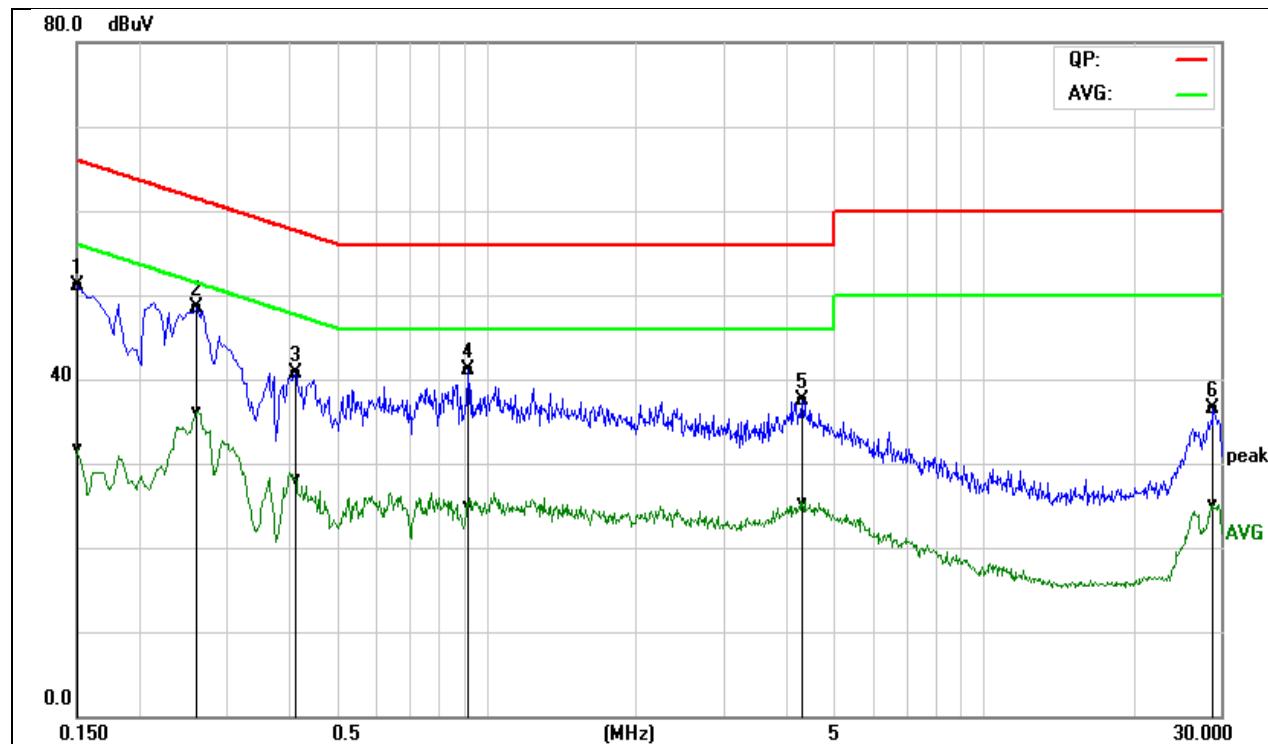


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	31.55	12.15	19.52	51.07	31.67	65.99	56.00	-14.92	-24.33	Pass
0.2620	28.79	16.53	19.64	48.43	36.17	61.36	51.37	-12.93	-15.20	Pass
0.4140	21.09	8.53	19.63	40.72	28.16	57.57	47.57	-16.85	-19.41	Pass
0.9220	21.38	5.27	19.70	41.08	24.97	56.00	46.00	-14.92	-21.03	Pass
4.3260	17.90	5.66	19.65	37.55	25.31	56.00	46.00	-18.45	-20.69	Pass
29.0380	16.40	5.12	20.07	36.47	25.19	60.00	50.00	-23.53	-24.81	Pass

**REMARKS:** L1 = Line One (Live Line)



<b>Model No.</b>	MC-3943	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	22°C, 45% RH	<b>Test Mode</b>	Mode 4
<b>Tested by</b>	Evan Ai	<b>Line</b>	L2
<b>Test Date</b>	March 13, 2017	<b>Test Voltage</b>	120Vac/60Hz

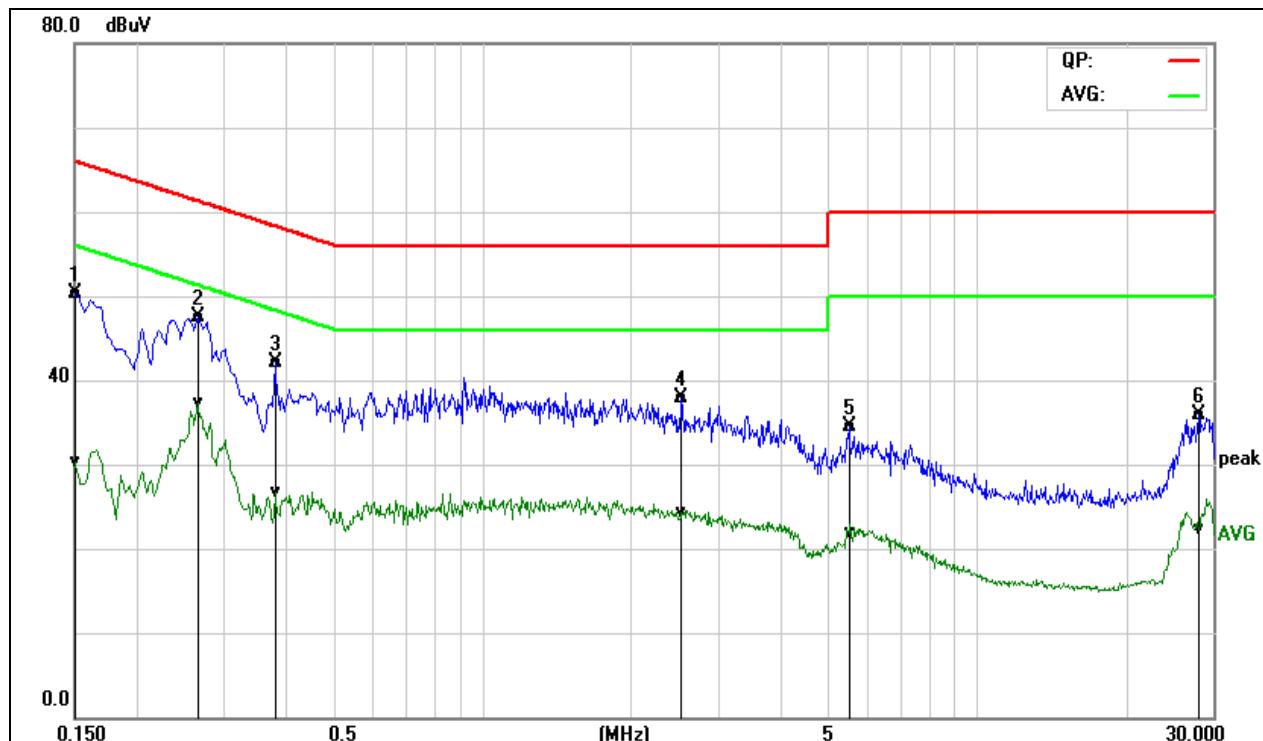


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	30.66	10.64	19.72	50.38	30.36	65.99	56.00	-15.61	-25.64	Pass
0.2660	27.80	17.62	19.72	47.52	37.34	61.24	51.24	-13.72	-13.90	Pass
0.3820	22.40	7.00	19.67	42.07	26.67	58.23	48.24	-16.16	-21.57	Pass
2.5300	18.24	4.64	19.72	37.96	24.36	56.00	46.00	-18.04	-21.64	Pass
5.5060	14.77	2.26	19.73	34.50	21.99	60.00	50.00	-25.50	-28.01	Pass
28.1220	16.05	2.31	19.94	35.99	22.25	60.00	50.00	-24.01	-27.75	Pass

**REMARKS:** L2 = Line Two (Neutral Line)



Model No.	MC-3943	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 4
Tested by	Evan Ai	Line	L1
Test Date	March 13, 2017	Test Voltage	240Vac/50Hz

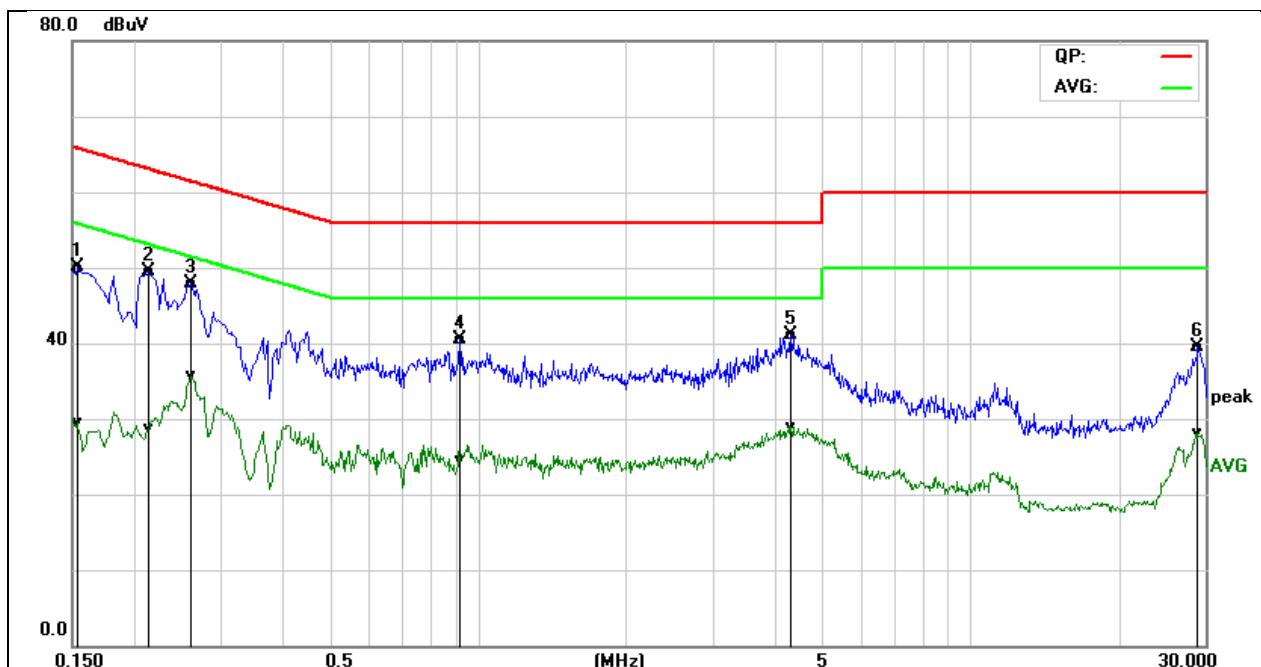


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1532	30.47	9.90	19.53	50.00	29.43	65.82	55.82	-15.82	-26.39	Pass
0.2140	29.95	8.98	19.64	49.59	28.62	63.04	53.05	-13.45	-24.43	Pass
0.2620	28.29	16.03	19.64	47.93	35.67	61.36	51.37	-13.43	-15.70	Pass
0.9220	20.88	4.77	19.70	40.58	24.47	56.00	46.00	-15.42	-21.53	Pass
4.3260	21.40	9.16	19.65	41.05	28.81	56.00	46.00	-14.95	-17.19	Pass
29.0380	19.40	8.12	20.07	39.47	28.19	60.00	50.00	-20.53	-21.81	Pass

REMARKS: L1 = Line One (Live Line)



<b>Model No.</b>	MC-3943	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	22°C, 45% RH	<b>Test Mode</b>	Mode 4
<b>Tested by</b>	Evan Ai	<b>Line</b>	L2
<b>Test Date</b>	March 13, 2017	<b>Test Voltage</b>	240Vac/50Hz

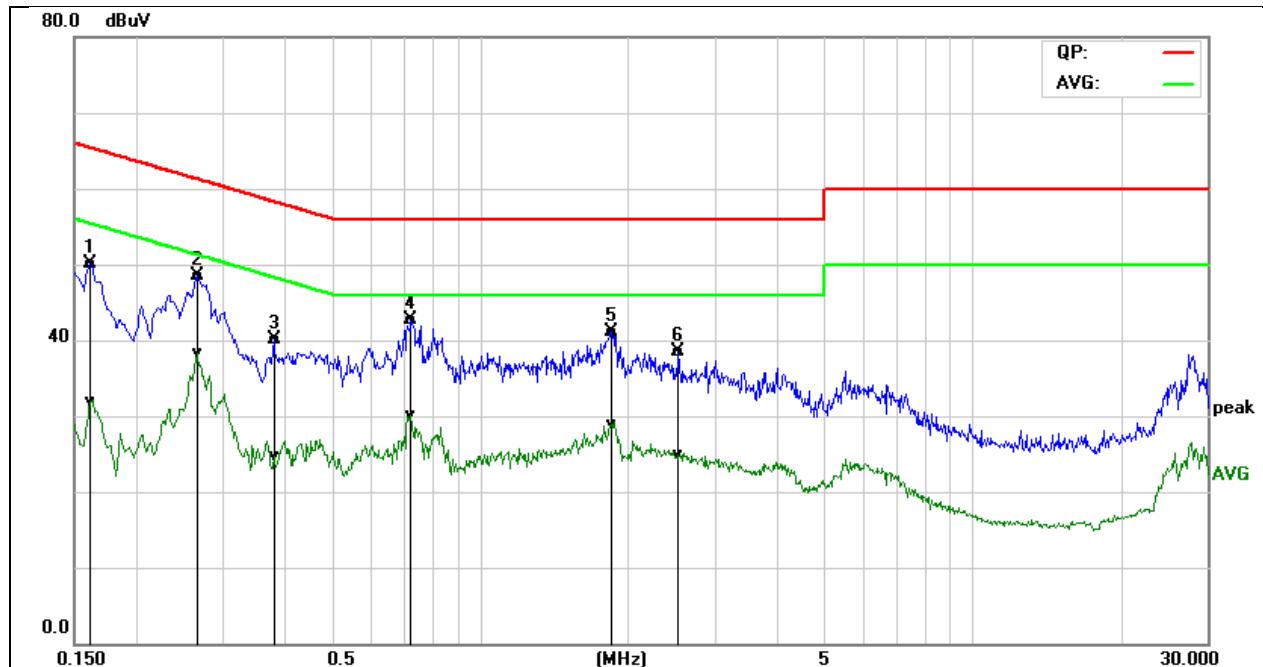

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1620	30.32	12.16	19.72	50.04	31.88	65.36	55.36	-15.32	-23.48	Pass
0.2660	28.80	18.62	19.72	48.52	38.34	61.24	51.24	-12.72	-12.90	Pass
0.3820	20.40	5.00	19.67	40.07	24.67	58.23	48.24	-18.16	-23.57	Pass
0.7260	23.05	10.42	19.71	42.76	30.13	56.00	46.00	-13.24	-15.87	Pass
1.8540	21.41	9.19	19.72	41.13	28.91	56.00	46.00	-14.87	-17.09	Pass
2.5300	18.74	5.14	19.72	38.46	24.86	56.00	46.00	-17.54	-21.14	Pass

**REMARKS:** L2 = Line Two (Neutral Line)