

TEST REPORT No.: (5212)132-1372

TEST REPORT

To:	NEW BRIGHT INDUSTRIAL CO., LTD	To:	-
Attn:	Lee Tak Chi	Attn:	-
Address:	9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, HONG KONG	Address:	-
Fax:	852 27953665	Fax:	-
E-mail:	tclee@newbright.com	E-mail:	-
Folder No.:	NBT-12MY119MTHS-B		

Factory Name:	NEW BRIGHT INDUSTRIAL CO., LTD
Location:	9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, HONG KONG
Product:	Radio Control Toy Transmitter Model No.: G6D1038H-2

	Sample No:	HK120508/010
	Test Date(s):	May 11, 2012
	Test Requested:	FCC Part 15 – 2011
	Test Method:	ANSI C63.4 – 2009
	FCC ID:	G6D1038H-2

The results given in this report are related to the tested specimen of the described electrical apparatus.

CONCLUSION: The submitted sample was found to **COMPLY** with requirement of FCC Part 15 Subpart C.

Authorized Signature:

	
Reviewed by: Keith Yeung	Approved by: Steven Tsang
Date: May 28, 2012	Date: May 28, 2012



TEST REPORT No.: (5212)132-1372

Test Result Summary

EMISSION TEST			
Test requirement: FCC Part 15 - 2011			
Test Condition	Test Method	Test Result	
		Pass	Failed
Radiated Emission Test, 9kHz to 1GHz	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Report Revision & Sample Re-submit History:

--



TEST REPORT No.: (5212)132-1372

Test Laboratory & Test Instruments List

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at:

BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,
26 Hung To Road,
Kwun Tong, Kowloon,
Hong Kong

Test Instrument List

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCI	100379	18-OCT-2012
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	07-AUG-2012
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	16-SEP-2012
OPEN AREA TEST SITE	BVCPS	N/A	N/A	07-JUL-2012
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	01-DEC-2012
COAXIAL CABLE	SUHNER	N/A	N/A	06-OCT-2012

Remarks: -

N/A: Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

TEST REPORT No.: (5212)132-1372

Equipment Under Test [EUT]

Description of Sample:

Product: Radio Control Toy Transmitter
Model No.: G6D1038H-2
Power Supply: 6Vd.c. ("AA" size battery x 4)

Description of EUT Operation:

The Equipment Under Test (EUT) is a NEW BRIGHT INDUSTRIAL CO., LTD of Radio Control toy. The transmitter is 2 sticks transmitter and operating at 27.145MHz. The EUT continues to transmit sticks are being pushed or pulled, Modulation by IC, and type is pulse modulation.

The transmitter has different control:

1. Left stick – forward and backward control
2. Right stick – leftward and rightward control

Antenna Requirement

The EUT is use of a permanently antenna. The antenna consists of 36cm long wire antenna. It is soldered on the PCB. The antenna is not replaceable or user serviceable. There are no deviations or exceptions to the specifications.

Photo of Antenna



TEST REPORT No.: (5212)132-1372

Test Results

Radiated Emissions (Fundamental)

Test Requirement: FCC Part 15 Section 15.227
 Test Method: ANSI C63.4
 Test Date(s): 2012-05-11
 Temperature: 26.0 °C
 Humidity: 72.0 %
 Atmospheric Pressure: 100.3 kPa
 Mode of Operation: Transmission mode
 Tested Voltage: 6Vd.c. ("AA" size battery x 4)

Test Method:


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be performed using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Test Setup: Open Area Test Site

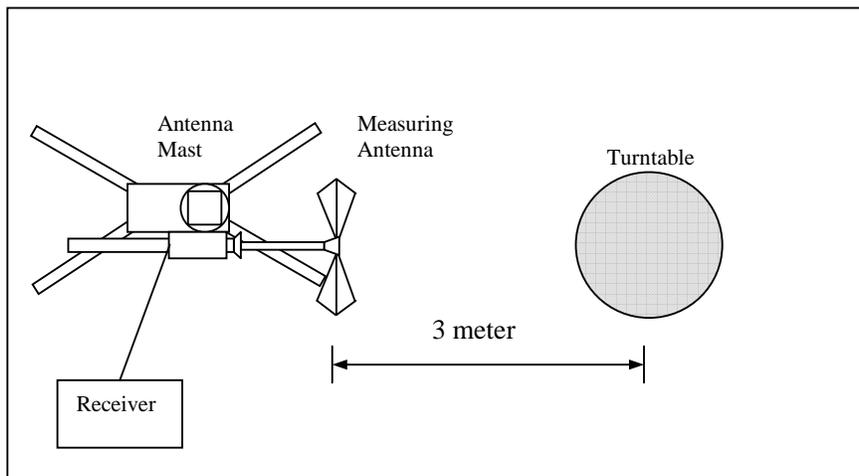



TEST REPORT No.: (5212)132-1372

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [μV/m]	Field Strength of Fundamental Emission [Average] [μV/m]
26.96 – 27.28	100,000 (100 dBμV/m)	10,000 (80 dBμV/m)

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Peak

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.145	V/0°	9.9	58.5	100	-41.5

Detection mode: # Average

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.145	V/0°	9.9	**38.5	80	-41.5

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

****Duty Cycle Correction = 20Log(0.033) = -29.6dB**

Therefore -20 dB is taken as precedence.

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz
VBW = 300KHz



TEST REPORT No.: (5212)132-1372

Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209
Test Method: ANSI C63.4
Test Date(s): 2012-05-11
Temperature: 26.0 °C
Humidity: 72.0 %
Atmospheric Pressure: 100.3 kPa
Mode of Operation: Transmission mode
Tested Voltage: 6Vd.c. ("AA" size battery x 4)

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
1.705-30	300
30-88	100
88-216	150
216-960	200
Above960	500



TEST REPORT No.: (5212)132-1372

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
54.290	H	5.4	28.3	40.0	-11.7
81.435	H	6.5	29.2	40.0	-10.8
108.580	H	12.4	22.7	43.5	-20.8
135.725	H	11.8	20.7	43.5	-22.8
162.870	H	9.0	20.5	43.5	-23.0
190.015	H	8.1	21.2	43.5	-22.3
217.160	H	8.7	20.7	46.0	-25.3
244.305	H	12.1	25.6	46.0	-20.4
271.450	H	13.6	27.6	46.0	-18.4
298.595	H	14.3	25.9	46.0	-20.1

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
54.290	V	5.4	28.5	40.0	-11.5
81.435	V	6.5	25.3	40.0	-14.7
108.580	V	12.4	23.2	43.5	-20.3
135.725	V	11.8	20.4	43.5	-23.1
162.870	V	9.0	21.2	43.5	-22.3
190.015	V	8.1	20.6	43.5	-22.9
217.160	V	8.7	22.3	46.0	-23.7
244.305	V	12.1	22.1	46.0	-23.9
271.450	V	13.6	23.4	46.0	-22.6
298.595	V	14.3	24.3	46.0	-21.7

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz
VBW = 120KHz



TEST REPORT No.: (5212)132-1372

26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227
 Test Method: ANSI C63.4
 Test Date(s): 2012-05-11
 Temperature: 26.0 °C
 Humidity: 72.0 %
 Atmospheric Pressure: 100.3 kPa
 Mode of Operation: Transmission mode
 Tested voltage: 6Vd.c. ("AA" size battery x 4)

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Limits for 26dB Bandwidth of Fundamental Emission:

Frequency [MHz]	26dB Bandwidth [KHz]	Limits [MHz]
27.14688	224.64	within 26.96 – 27.28



BUREAU VERITAS

TEST REPORT No.: (5212)132-1372


Measurement Data

Test Result of 26dB Bandwidth of Fundamental Emission: PASS



*RBW 30 kHz Marker 1 [T1]
 VBW 100 kHz 60.85 dB μ V/m
 SWT 2.5 ms 27.146880000 MHz

Ref 82 dB μ V/m *Att 10 dB

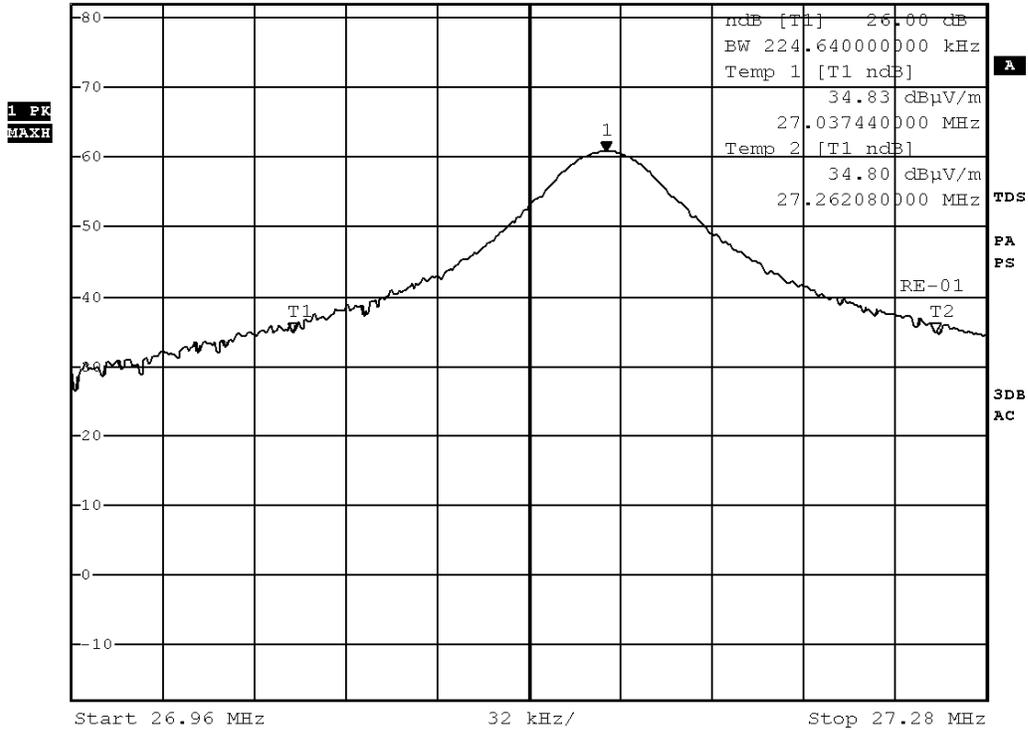

Date: 11.MAY.2012 17:38:45



TEST REPORT No.: (5212)132-1372

Duty Cycle Correction During 100msec:

Each function key sends a different series of characters, but each packet period (70.2 msec) never exceeds a series of 1 long (0.6msec), 3 medium (0.3msec) and 8 short (0.1msec) pulses. Assuming any combination of short and long pulses maybe obtained due to encoding the worst case transmit duty cycle would be considered $(0.6+3 \times 0.3+8 \times 0.1 \text{msec})$ per 70.2msec = 3.3% duty cycle. Figure A through C shows the characteristics of the pulse train for one of these functions.

Remarks: -

Duty Cycle Correction = $20 \text{Log}(0.033) = -29.6 \text{dB}$
Therefore -20 dB is taken as precedence.


The following figures [Figure A to Figure D] show the characteristics of the pulse train for one of these functions.



BUREAU VERITAS


TEST REPORT No.: (5212)132-1372

Figure A [Pulse Train]

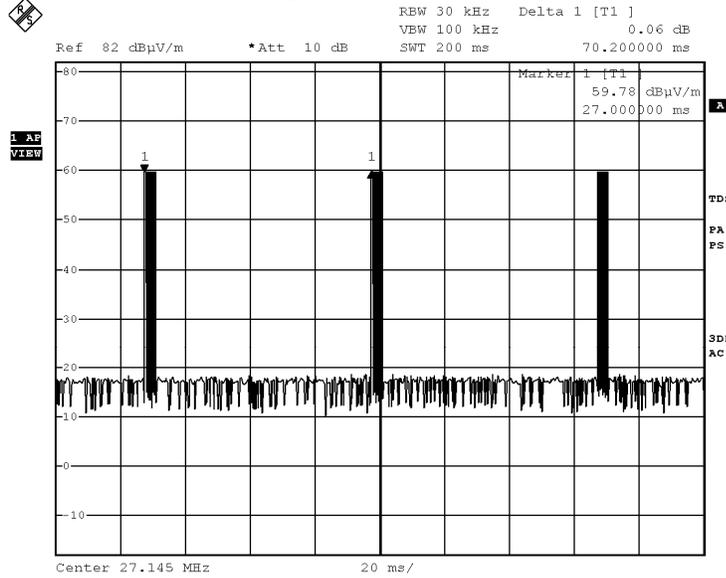

Date: 11.MAY.2012 17:42:21

Figure B [Long Pulse]

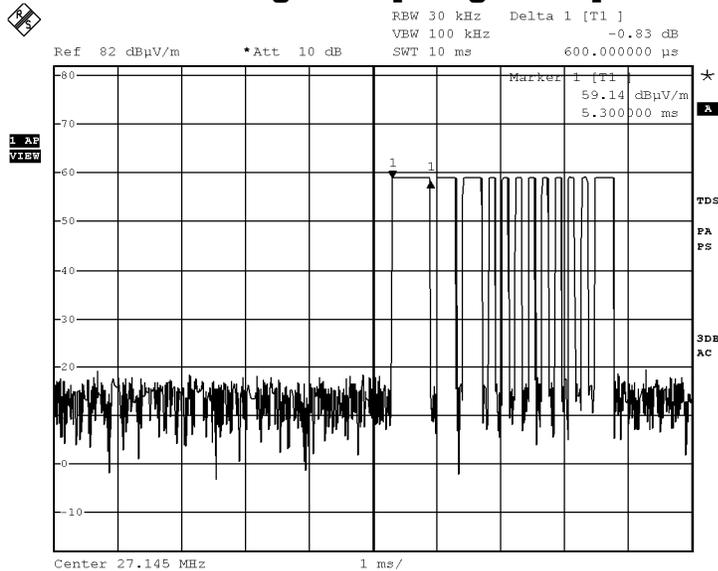


Date: 11.MAY.2012 17:45:01



BUREAU VERITAS


TEST REPORT No.: (5212)132-1372

Figure C [Medium Pulse]

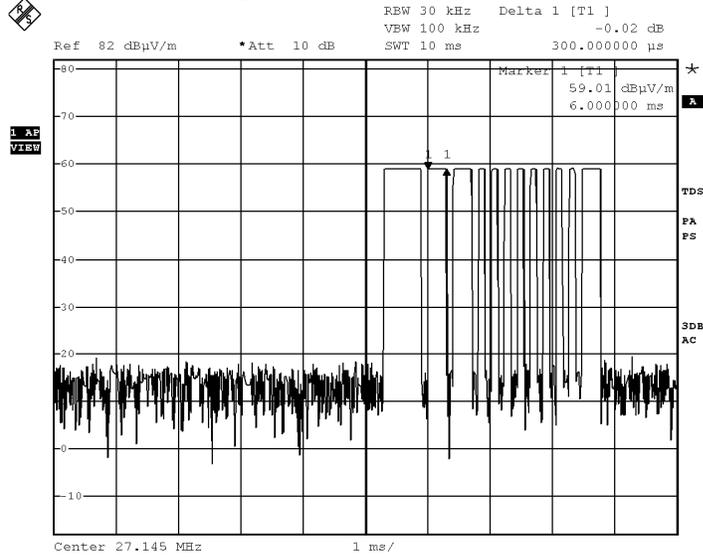

Date: 11.MAY.2012 17:45:23

Figure D [Short Pulse]

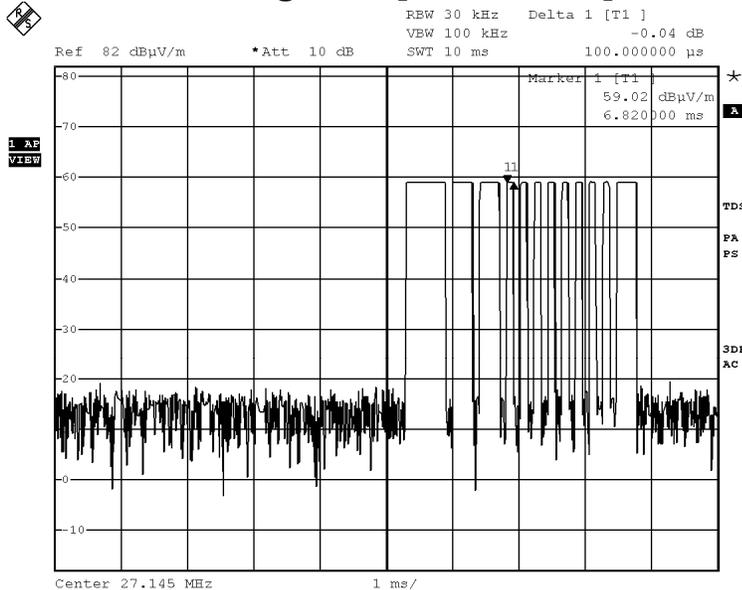

Date: 11.MAY.2012 17:45:40



**BUREAU
VERITAS**

TEST REPORT No.: (5212)132-1372

Photographs of EUT

Front View of the product




Rear View of the product



Battery compartment



Battery Cover

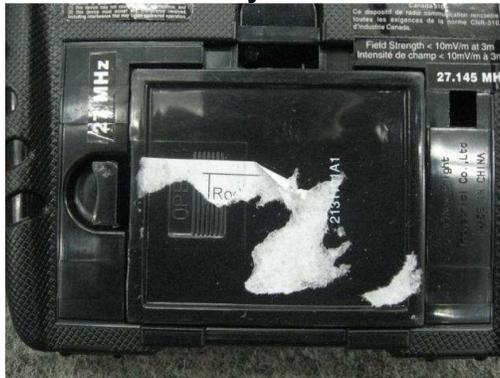

TEST REPORT No.: (5212)132-1372

Photographs of EUT


Front View of the product (Internal)



Rear View of the product (Internal)



Inner Circuit Top View

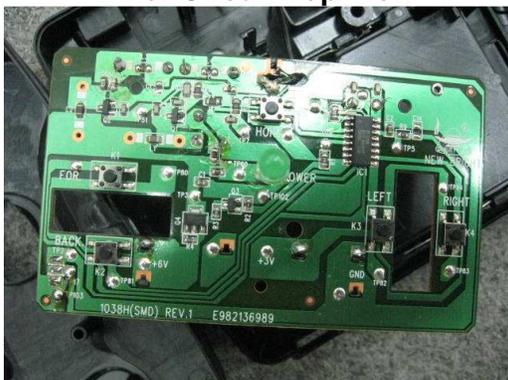

Inner Circuit Bottom View



TEST REPORT No.: (5212)132-1372

Measurement of Radiated Emission Test Set Up



******* End of Report *******