

Date: 2008-12-17 Page 1 of 17

No. : HM162861

Applicant (NEB001): New Bright Industrial Co. Ltd.

9/F, New Bright Building, 11 Sheung Yuet Road

Kowloon Bay Hong Kong China

Manufacturer: New Bright Industrial Co. Ltd.

9/F, New Bright Building, 11 Sheung Yuet Road

Kowloon Bay Hong Kong China

Description of Samples: Product: Radio Control Toy Transmitter

Brand Name: NEW BRIGHT Model Number: G6D2424HK FCC ID: G6D2424HK

Date Samples Received: 2008-12-09

Date Tested: 2008-12-16

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2008 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product COMPLIED with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks: ----

Dr. LEE Kam Chuen, ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2008-12-17 Page 2 of 17

No. : HM162861

CONTENT:

	Cover Content	Page 1 of 17 Page 2-3 of 17
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 17
1.2	Applicant Details Applicant Manufacturer	Page 4 of 17
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 17
1.4	Date of Order	Page 5 of 17
1.5	Submitted Samples	Page 5 of 17
1.6	Test Duration	Page 5 of 17
1.7	Country of Origin	Page 5 of 17
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 6 of 17
2.2	Test Standards and Results Summary	Page 6 of 17
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 7-9 of 17
3.2	Bandwidth Measurement	Page 10-11 of 17



Date: 2008-12-17 Page 3 of 17

No. : HM162861

Appendix A

List of Measurement Equipment Page 12 of 17

Appendix B

Duty Cycle Correction During 100 msec Page 13-15 of 17

Appendix C

Photographs Page 16-17 of 17



Date : 2008-12-17 Page 4 of 17

No. : HM162861

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

1.2 Applicant Details

Applicant

New Bright Industrial Co. Ltd. 9/F, New Bright Building, 11 Sheung Yuet Road Kowloon Bay Hong Kong China

Manufacturer

New Bright Industrial Co. Ltd. 9/F, New Bright Building, 11 Sheung Yuet Road Kowloon Bay Hong Kong China



Date: 2008-12-17 Page 5 of 17

No. : HM162861

1.3 Equipment Under Test [EUT] Description of Sample

Product: Radio Control Toy Transmitter
Manufacturer: New Bright Industrial Co. Ltd.

Brand Name: NEW BRIGTH Model Number: G6D2424HK

Rating: 3Vd.c. ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a New Bright Industrial Co. Ltd., Radio Control Toy Transmitter. The transmitter is a 2 joystick transmitter. The EUT continues to transmit while joystick is being pressed, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2008-12-09

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2008-12-16

1.7 Country of Origin

China



Date : 2008-12-17 Page 6 of 17

No. : HM162861

2.0 <u>Technical Details</u>

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2008 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary									
Test Condition	Test Requirement	Test Method	Class /	Т	est Result				
			Severity	Pass	Failed	N/A			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.227	ANSI C63.4:2003	N/A	\boxtimes					
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2003	N/A						

Note: N/A - Not Applicable



Date: 2008-12-17 Page 7 of 17

No. : HM162861

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.227
Test Method: ANSI C63.4:2003
Test Date: 2008-12-16
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane on a standard radiated emission test site. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

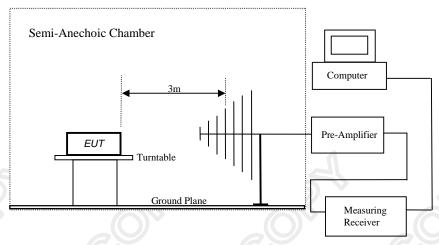



Date : 2008-12-17 Page 8 of 17

No. : HM162861

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of			Field Strength of	Field Strength of		
Fundamental			Fundamental Emission	Fundamental Emission		
			[Peak]	[Average]		
	[MHz]		$[\mu V/m]$	$[\mu V/m]$		
	26.96-27.28		100,000	10,000		

Results of Tx Mode: PASS

Field Strength of Fundamental Emissions								
Peak Value								
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field							
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m			
27.15	57.90	10.4	68.3	2,600.2	100,000	Vertical		

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty: 30MHz to 1GHz 5.2dB



Date : 2008-12-17 Page 9 of 17

No. : HM162861

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx Mode: PASS

Radiated Emissions Quasi-Peak								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	dBμV/m	$\mu V/m$	μV/m			
54.29	20.7	8.8	29.5	29.9	100	Vertical		
81.44	22.5	8.1	30.6	33.9	100	Vertical		
108.58	15.6	9.1	24.7	17.2	150	Vertical		
135.73	< 1.0	7.8	< 8.8	< 2.8	150	Vertical		
162.87	< 1.0	9.9	< 10.9	< 3.5	150	Vertical		
190.02	< 1.0	12.4	< 13.4	< 4.7	150	Vertical		
217.16	< 1.0	12.8	< 13.8	< 4.9	200	Vertical		
244.31	< 1.0	15.0	< 16.0	< 6.3	200	Vertical		
271.00	< 1.0	14.2	< 15.2	< 5.8	200	Vertical		
271.45	< 1.0	16.1	< 17.1	< 7.2	200	Vertical		

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: 30MHz to 1GHz 5.2dB



Date : 2008-12-17 Page 10 of 17

No. : HM162861

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2008-12-16 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Date: 2008-12-17 Page 11 of 17

No. : HM162861

Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
27.145	14.749	within 26.96-27.28

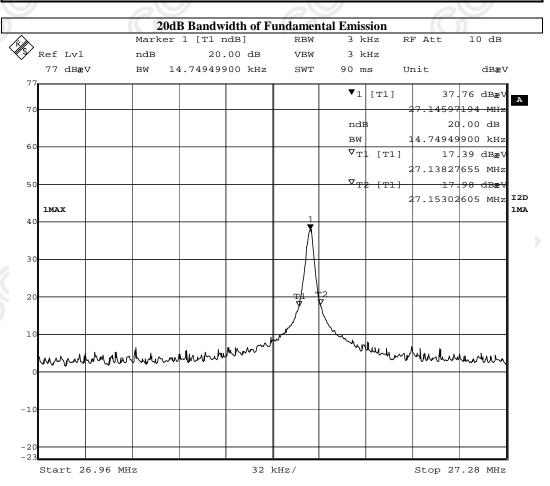



Date : 2008-12-17 Page 12 of 17

No. : HM162861

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM020	HORN ANTENNA	EMCO	3115	4032	2006/07/11	2009/07/11
EM215	MULTIDEVICE CONTROLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Lindgren	FACT-3		2006/05/02	2009/05/02
EM174	BICONILOG ANTENNA	EMCO	3142C	00029071	2008/01/24	2010/01/24
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2008/06/16	2009/06/16
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2006/07/26	2009/07/26

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined



Date: 2008-12-17 Page 13 of 17

No. : HM162861

Appendix B


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (100msec) never exceeds a series of 4 long (1.48msec) and 92 short (0.48msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered (4x1.48msec)+(92x0.48msec) per 100msec = 50.08% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remark:

Duty Cycle Correction = 20Log(0.5008) =-6dB (-20dB used as field strength of fundamental emissions calculation)


The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

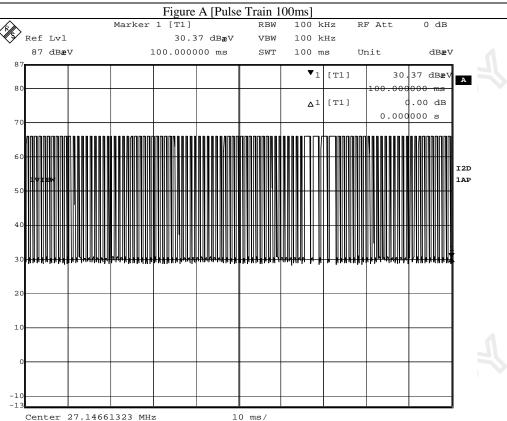



Date: 2008-12-17 Page 14 of 17


No. : HM162861

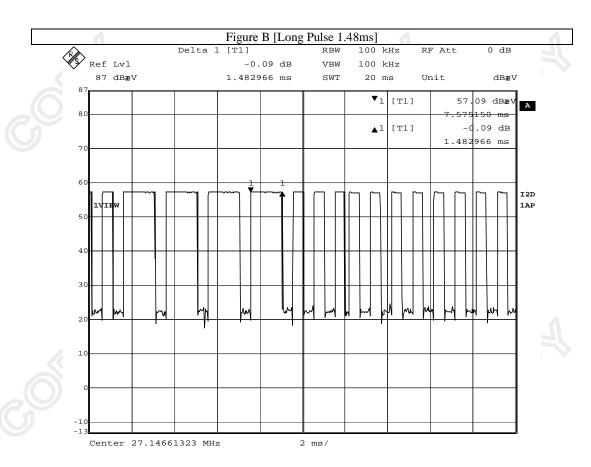



Date: 2008-12-17 Page 15 of 17

No. : HM162861

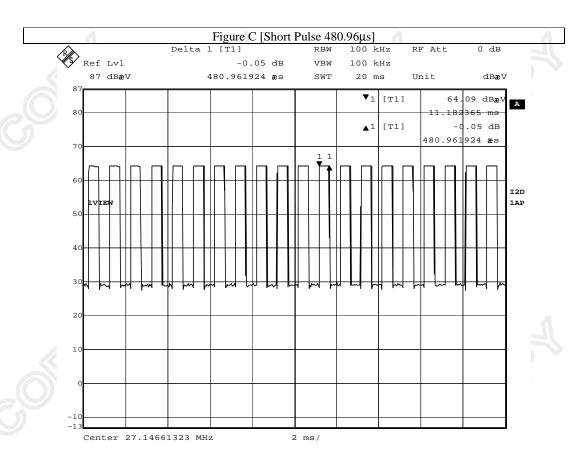



Date: 2008-12-17 Page 16 of 17


No. : HM162861


Appendix C

Photographs of EUT












Date : 2008-12-17 Page 17 of 17

No. : HM162861

Photographs of EUT

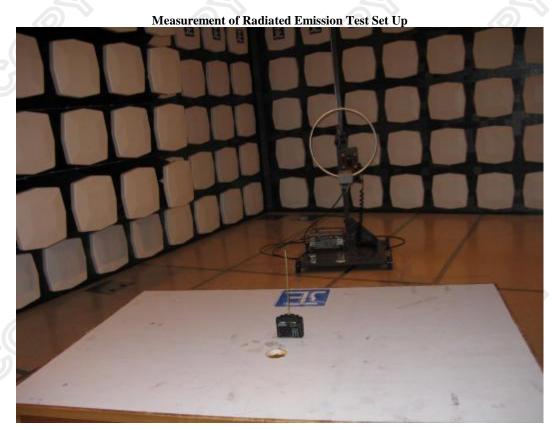

***** End of Test Report *****