



BUREAU VERITAS

TEST REPORT No.: (5212)121-1664

# TEST REPORT

To:	<b>NEW BRIGHT INDUSTRIAL CO., LTD</b>	To:	-
Attn:	Lee Tak Chi	Attn:	-
Address:	9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, HONG KONG	Address:	-
Fax:	852 2795 3665	Fax:	-
E-mail:	<a href="mailto:tclee@newbright.com">tclee@newbright.com</a>	E-mail:	-
Folder No.:	NBT-12AP241MTHS-B-A		

Factory name:	<b>NEW BRIGHT INDUSTRIAL CO., LTD</b>
Location:	9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, HONG KONG
Product:	Radio Control Toy Transmitter Model No.: G6DTH1



Sample No:	HK120423/052
Test Date(s):	April 30, 2012 to May 4, 2012
Test Requested:	FCC Part 15 – 2011
Test Method:	ANSI C63.4 – 2009
FCC ID:	G6DTH1

The results given in this report are related to the tested specimen of the described electrical apparatus.

**CONCLUSION:** The submitted sample was found to COMPLY with requirement of FCC Part 15 Subpart C.

Authorized Signature:

Reviewed by: Keith Yeung	Approved by: Steven Tsang
Date: May 28, 2012	Date: May 28, 2012

**BUREAU VERITAS HONG KONG LIMITED –**  
**Kowloon Bay Office**  
 1/F Pacific Trade Centre,  
 2 Kai Hing Road, Kowloon Bay,  
 Kowloon, HONG KONG  
 Tel: +852 2331 0888  
 Fax: +852 2331 0889  
[www.cps.bureauveritas.com](http://www.cps.bureauveritas.com)

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



**TEST REPORT No.: (5212)121-1664**

## Test Result Summary

<b>EMISSION TEST</b>			
<b>Test requirement: FCC Part 15 - 2011</b>			
Test Condition	Test Method	Test Result	
		Pass	Failed
Radiated Emission Test, 9kHz to 40GHz	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Report Revision & Sample Re-submit History:

--



**TEST REPORT No.: (5212)121-1664**

## Test Laboratory & Test Instruments List

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at :

### **BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE**

No. 2106-2107, 21/F., Westin Centre,  
26 Hung To Road,  
Kwun Tong, Kowloon,  
Hong Kong

## Test Instrument List

### Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCI	100379	18-OCT-2012
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	07-AUG-2012
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	16-SEP-2012
OPEN AREA TEST SITE	BVCPS	N/A	N/A	06-JUL-2012
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	01-DEC-2012
COAXIAL CABLE	SUHNER	RG214	N/A	06-OCT-2012

**Remarks: -**

N/A: Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

TEST REPORT No.: (5212)121-1664

## Equipment Under Test [EUT]

### Description of Sample:

Product: Radio Control Toy Transmitter  
Model No.: G6DTH1  
Power Supply: 3Vd.c. ("AA" size battery x 2)

### Description of EUT Operation:

The Equipment Under Test (EUT) is a **NEW BRIGHT INDUSTRIAL CO., LTD** of Remote Control Transmitter. It is a 1 wheel, 1 trigger and 4 buttons transmitter. It includes 4 channels and operating at 909.06MHz, 913.06MHz, 917.06MHz and 921.06MHz. The EUT continues to transmit while trigger is being pressed, Modulation by IC, and type is pulse modulation.

The transmitter has different control:

1. Wheel – control leftward and rightward
2. Trigger– control forward and backward
3. Auto-pairing buttons, 1-4 button – channels selection control

### Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. It is a 38cm long PCB trace and metal wire. The antenna is not replaceable or user serviceable. The requirements of S15.203 are met. There are no deviations or exceptions to the specifications.

#### Photo of Antenna



**TEST REPORT No.: (5212)121-1664**

**Radiated Emissions (Fundamental)**

Test Requirement: FCC Part 15 Section 15.249  
 Test Method: ANSI C63.4  
 Test Date(s): 2012-05-04  
 Temperature: 25.0 °C  
 Humidity: 62.0 %  
 Atmospheric Pressure: 100.3 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 3Vd.c. ("AA" size battery x 2)

**Test Procedure:**


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

**Test Setup: Open Area Test Site**

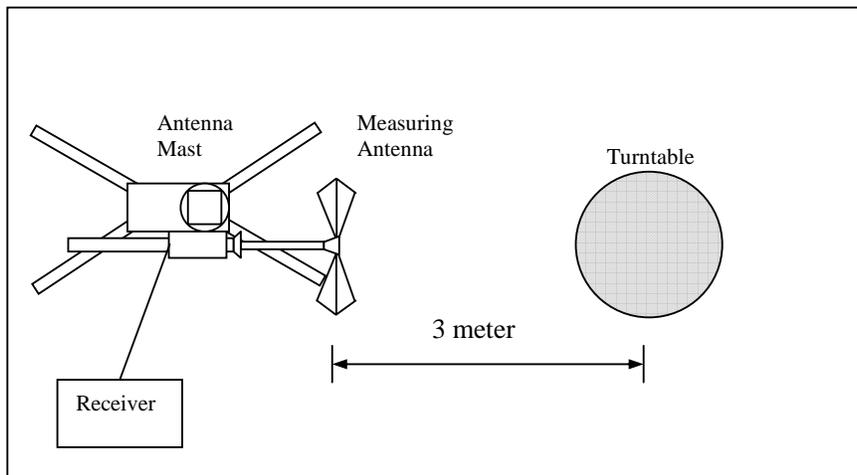



**TEST REPORT No.: (5212)121-1664**

**Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.249]:**

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission (Quasi-Peak) [mV/m]	Field Strength of Harmonics Emission (Average) [μV/m]
902-928	50	500

**Measurement Data**

**Test Result of (Transmission mode, first channel): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
909.06	H	22.4	84.3	94.0	-9.7
909.06	V	22.4	86.2	94.0	-7.8

**Test Result of (Transmission mode, second channel): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
913.06	H	22.3	84.0	94.0	-10.0
913.06	V	22.3	85.8	94.0	-8.2

Note: Field Strength includes Antenna Factor and Cable Loss.



**TEST REPORT No.: (5212)121-1664**

**Measurement Data**

**Test Result of (Transmission mode, third channel): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
917.06	H	22.1	83.8	94.0	-10.2
917.06	V	22.1	86.8	94.0	-7.2

Note: Field Strength includes Antenna Factor and Cable Loss.

**Test Result of (Transmission mode, fourth channel): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
921.06	H	22.0	83.8	94.0	-10.2
921.06	V	22.0	85.6	94.0	-8.4

Note: Field Strength includes Antenna Factor and Cable Loss.



**TEST REPORT No.: (5212)121-1664**

**Radiated Emissions (Spurious Emission)**

Test Requirement: FCC Part 15 Section 15.249  
 Test Method: ANSI C63.4  
 Test Date(s): 2012-05-04  
 Temperature: 25.0 °C  
 Humidity: 62.0 %  
 Atmospheric Pressure: 100.3 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 3Vd.c. ("AA" size battery x 2)

**Measurement Data**

**Test Result of (Transmission mode, first channel): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
1818.12	H	-8.0	64.1	74.0	-9.9
2727.18	H	-1.1	67.2	74.0	-6.8
3636.24	H	2.9	50.4	74.0	-23.6
4545.30	H	4.7	49.6	74.0	-24.4
5454.36	H	5.2	44.5	74.0	-29.5
6363.42	H	6.9	44.4	74.0	-29.6
7272.48	H	13.1	53.5	74.0	-20.5
8181.54	H	20.0	60.5	74.0	-13.5
9090.60	H	19.6	59.0	74.0	-15.0
9999.66	H	12.4	50.3	74.0	-23.7

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
 VBW = 1MHz



**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, first channel): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
1818.12	V	-8.0	55.8	74.0	-18.2
2727.18	V	-1.1	70.6	74.0	-3.4
3636.24	V	2.9	63.2	74.0	-10.8
4545.30	V	4.7	51.6	74.0	-22.4
5454.36	V	5.2	43.1	74.0	-30.9
6363.42	V	6.9	46.6	74.0	-27.4
7272.48	V	13.1	53.7	74.0	-20.3
8181.54	V	20.0	59.8	74.0	-14.2
9090.60	V	19.6	59.7	74.0	-14.3
9999.66	V	12.4	52.3	74.0	-21.7

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
 VBW = 1MHz



**BUREAU  
VERITAS**

## TEST REPORT No.: (5212)121-1664

### Measurement Data

Test Result of (Transmission mode, first channel): **PASS**

Detection mode: # Average

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
1818.12	H	-8.0	**44.1	54.0	-9.9
2727.18	H	-1.1	**47.2	54.0	-6.8
3636.24	H	2.9	**30.4	54.0	-23.6
4545.30	H	4.7	**29.6	54.0	-24.4
5454.36	H	5.2	**24.5	54.0	-29.5
6363.42	H	6.9	**24.4	54.0	-29.6
7272.48	H	13.1	**33.5	54.0	-20.5
8181.54	H	20.0	**40.5	54.0	-13.5
9090.60	H	19.6	**39.0	54.0	-15.0
9999.66	H	12.4	**30.3	54.0	-23.7
Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
1818.12	V	-8.0	**35.8	54.0	-18.2
2727.18	V	-1.1	**50.6	54.0	-3.4
3636.24	V	2.9	**43.2	54.0	-10.8
4545.30	V	4.7	**31.6	54.0	-22.4
5454.36	V	5.2	**23.1	54.0	-30.9
6363.42	V	6.9	**26.6	54.0	-27.4
7272.48	V	13.1	**33.7	54.0	-20.3
8181.54	V	20.0	**39.8	54.0	-14.2
9090.60	V	19.6	**39.7	54.0	-14.3
9999.66	V	12.4	**32.3	54.0	-21.7

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction = 20Log(0.04) = -27.9dB

Therefore -20 dB is taken as precedence.

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz

VBW = 1MHz

**BUREAU VERITAS HONG KONG LIMITED –  
Kowloon Bay Office  
1/F Pacific Trade Centre,  
2 Kai Hing Road, Kowloon Bay,  
Kowloon, HONG KONG**  
Tel: +852 2331 0888  
Fax: +852 2331 0889  
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, second channel): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
1826.12	H	-8.1	63.9	74.0	-10.1
2739.18	H	-1.0	67.0	74.0	-7.0
3652.24	H	2.9	51.1	74.0	-22.9
4565.30	H	4.7	50.5	74.0	-23.5
5478.36	H	5.2	44.5	74.0	-29.5
6391.42	H	7.1	45.1	74.0	-28.9
7304.48	H	13.4	53.4	74.0	-20.6
8217.54	H	19.5	59.9	74.0	-14.1
9130.60	H	19.2	59.5	74.0	-14.5
10043.66	H	12.2	50.8	74.0	-23.2

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
VBW = 1MHz



**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, second channel): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
1826.12	V	-8.1	55.6	74.0	-18.4
2739.18	V	-1.0	71.5	74.0	-2.5
3652.24	V	2.9	63.7	74.0	-10.3
4565.30	V	4.7	52.1	74.0	-21.9
5478.36	V	5.2	44.0	74.0	-30.0
6391.42	V	7.1	46.5	74.0	-27.5
7304.48	V	13.4	53.8	74.0	-20.2
8217.54	V	19.5	59.1	74.0	-14.9
9130.60	V	19.2	59.1	74.0	-14.9
10043.66	V	12.2	52.0	74.0	-22.0

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
VBW = 1MHz



**BUREAU  
VERITAS**

**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, second channel): PASS**

**Detection mode: # Average**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
1826.12	H	-8.1	**43.9	54.0	-10.1
2739.18	H	-1.0	**47.0	54.0	-7.0
3625.24	H	2.9	**31.1	54.0	-22.9
4565.30	H	4.7	**30.5	54.0	-23.5
5478.36	H	5.2	**24.5	54.0	-29.5
6391.42	H	7.1	**25.1	54.0	-28.9
7304.48	H	13.4	**33.4	54.0	-20.6
8217.54	H	19.5	**39.9	54.0	-14.1
9130.60	H	19.2	**39.5	54.0	-14.5
10043.66	H	12.2	**30.8	54.0	-23.2
Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
1826.12	V	-8.1	**35.6	54.0	-18.4
2739.18	V	-1.0	**51.5	54.0	-2.5
3625.24	V	2.9	**43.7	54.0	-10.3
4565.30	V	4.7	**32.1	54.0	-21.9
5478.36	V	5.2	**24.0	54.0	-30.0
6391.42	V	7.1	**26.5	54.0	-27.5
7304.48	V	13.4	**33.8	54.0	-20.2
8217.54	V	19.5	**39.1	54.0	-14.9
9130.60	V	19.2	**39.1	54.0	-14.9
10043.66	V	12.2	**32.0	54.0	-22.0

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction = 20Log(0.04) = -27.9dB

Therefore -20 dB is taken as precedence.

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz

VBW = 1MHz

**BUREAU VERITAS HONG KONG LIMITED –  
Kowloon Bay Office  
1/F Pacific Trade Centre,  
2 Kai Hing Road, Kowloon Bay,  
Kowloon, HONG KONG**  
Tel: +852 2331 0888  
Fax: +852 2331 0889  
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, third channel): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
1834.12	H	-8.2	64.7	74.0	-9.3
2751.18	H	0.8	68.6	74.0	-5.4
3668.24	H	2.9	51.0	74.0	-23.0
4585.30	H	4.7	50.5	74.0	-23.5
5502.36	H	5.1	44.0	74.0	-30.0
6419.42	H	7.1	44.4	74.0	-29.6
7336.48	H	13.8	55.1	74.0	-18.9
8253.54	H	18.9	60.3	74.0	-13.7
9170.60	H	18.9	58.2	74.0	-15.8
10087.66	H	12.1	50.0	74.0	-24.0

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
 VBW = 1MHz



**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, third channel): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
1834.12	V	-8.2	56.4	74.0	-17.6
2751.18	V	0.8	72.2	74.0	-1.8
3668.24	V	2.9	63.1	74.0	-10.9
4585.30	V	4.7	51.3	74.0	-22.7
5502.36	V	5.1	42.6	74.0	-31.4
6419.42	V	7.1	47.4	74.0	-26.6
7336.48	V	13.8	54.2	74.0	-19.8
8253.54	V	18.9	58.5	74.0	-15.5
9170.60	V	18.9	59.8	74.0	-14.2
10087.66	V	12.1	53.0	74.0	-21.0

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
 VBW = 1MHz

**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, third channel): PASS**

**Detection mode: # Average**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
1834.12	H	-8.2	**44.7	54.0	-9.3
2751.18	H	0.8	**48.6	54.0	-5.4
3668.24	H	2.9	**31.0	54.0	-23.0
4585.30	H	4.7	**30.5	54.0	-23.5
5502.36	H	5.2	**24.0	54.0	-30.0
6419.42	H	7.1	**24.4	54.0	-29.6
7336.48	H	13.8	**35.1	54.0	-18.9
8253.54	H	18.9	**40.3	54.0	-13.7
9170.60	H	18.9	**38.2	54.0	-15.8
10087.66	H	12.1	**30.0	54.0	-24.0
Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
1834.12	V	-8.2	**36.4	54.0	-17.6
2751.18	V	0.8	**52.2	54.0	-1.8
3668.24	V	2.9	**43.1	54.0	-10.9
4585.30	V	4.7	**31.3	54.0	-22.7
5502.36	V	5.2	**22.6	54.0	-31.4
6419.42	V	7.1	**27.4	54.0	-26.6
7336.48	V	13.8	**34.2	54.0	-19.8
8253.54	V	18.9	**38.5	54.0	-15.5
9170.60	V	18.9	**39.8	54.0	-14.2
10087.66	V	12.1	**33.0	54.0	-21.0

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction =  $20\log(0.04) = -27.9\text{dB}$

Therefore -20 dB is taken as precedence.

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
VBW = 1MHz



**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, fourth channel): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
1842.12	H	-8.1	63.6	74.0	-10.4
2763.18	H	0.7	68.8	74.0	-5.2
3684.24	H	2.9	51.2	74.0	-22.8
4605.30	H	4.7	49.4	74.0	-24.6
5526.36	H	5.1	45.2	74.0	-28.8
6447.42	H	7.3	44.7	74.0	-29.3
7368.48	H	14.1	54.1	74.0	-19.9
8289.54	H	18.3	59.4	74.0	-14.6
9210.60	H	18.6	58.8	74.0	-15.2
10131.66	H	11.9	50.3	74.0	-23.7

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
 VBW = 1MHz



**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, fourth channel): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
1842.12	V	-8.1	55.4	74.0	-18.6
2763.18	V	0.7	72.9	74.0	-1.1
3684.24	V	2.9	63.2	74.0	-10.8
4605.30	V	4.7	52.3	74.0	-21.7
5526.36	V	5.1	42.7	74.0	-31.3
6447.42	V	7.3	46.6	74.0	-27.4
7368.48	V	14.1	55.4	74.0	-18.6
8289.54	V	18.3	59.1	74.0	-14.9
9210.60	V	18.6	58.3	74.0	-15.7
10131.66	V	11.9	52.5	74.0	-21.5

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
 VBW = 1MHz

**TEST REPORT No.: (5212)121-1664**

**Test Result of (Transmission mode, fourth channel): PASS**

**Detection mode: # Average**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
1842.12	H	-8.1	43.6	54.0	-10.4
2763.18	H	0.7	48.8	54.0	-5.2
3684.24	H	2.9	31.2	54.0	-22.8
4605.30	H	4.7	29.4	54.0	-24.6
5526.36	H	5.1	25.2	54.0	-28.8
6447.42	H	7.3	24.7	54.0	-29.3
7368.48	H	14.1	34.1	54.0	-19.9
8289.54	H	18.3	39.4	54.0	-14.6
9210.60	H	18.6	38.8	54.0	-15.2
10131.66	H	11.9	30.3	54.0	-23.7
Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
1842.12	V	-8.1	35.4	54.0	-18.6
2763.18	V	0.7	52.9	54.0	-1.1
3684.24	V	2.9	43.2	54.0	-10.8
4605.30	V	4.7	32.3	54.0	-21.7
5526.36	V	5.1	22.7	54.0	-31.3
6447.42	V	7.3	26.6	54.0	-27.4
7368.48	V	14.1	35.4	54.0	-18.6
8289.54	V	18.3	39.1	54.0	-14.9
9210.60	V	18.6	38.3	54.0	-15.7
10131.66	V	11.9	32.5	54.0	-21.5

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction =  $20\log(0.04) = -27.9\text{dB}$

Therefore -20 dB is taken as precedence.

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz

VBW = 1MHz



## TEST REPORT No.: (5212)121-1664

### Radiated Emissions (30MHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209  
 Test Method: ANSI C63.4  
 Test Date(s): 2012-05-04  
 Temperature: 25.0 °C  
 Humidity: 62.0 %  
 Atmospheric Pressure: 100.3 kPa  
 Mode of Operation: On mode  
 Tested Voltage: 3Vd.c. ("AA" size battery x 2)

#### Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu\text{V}/\text{m}$ ]
1.705-30	300
30-88	100
88-216	150
216-960	200
Above960	500

### Measurement Data

**Test Result of (On mode): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu\text{V}/\text{m}$ )	Limit at 3m (dB $\mu\text{V}/\text{m}$ )	Margin (dB)
33.92	H	16.0	29.3	40.0	-10.7
57.28	H	4.4	27.1	40.0	-12.9
232.72	H	10.6	22.3	46.0	-23.7
372.16	H	15.7	24.5	46.0	-21.5
465.12	H	17.3	28.9	46.0	-17.1
599.52	H	18.9	30.1	46.0	-15.9



**TEST REPORT No.: (5212)121-1664**

**Measurement Data**

**Test Result of (On mode): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
33.92	V	16.0	29.0	40.0	-11.0
57.28	V	4.4	26.8	40.0	-13.2
232.72	V	10.6	22.5	46.0	-23.5
372.16	V	15.7	24.7	46.0	-21.3
465.12	V	17.3	28.9	46.0	-17.1
599.52	V	18.9	30.7	46.0	-15.3

Note: Field Strength includes Antenna Factor and Cable Loss.



## TEST REPORT No.: (5212)121-1664

### Frequency range of Fundamental Emission

Test Requirement: FCC 47 CFR 15.249  
Test Method: ANSI C63.4  
Test Date(s): 2012-04-30  
Temperature: 24.0 °C  
Humidity: 71.0 %  
Atmospheric Pressure: 100.6 kPa  
Mode of Operation: Transmission mode  
Tested Voltage: 3Vd.c. ("AA" size battery x 2)

### Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

### Limits for Frequency range of Fundamental Emission:

Frequency [MHz]	FCC Limits [MHz]
909.06 to 921.06	902-928




**BUREAU  
VERITAS**

## TEST REPORT No.: (5212)121-1664

### Measurement Data:


### Test Result of Frequency Range of Fundamental Emission: PASS

#### First channel:

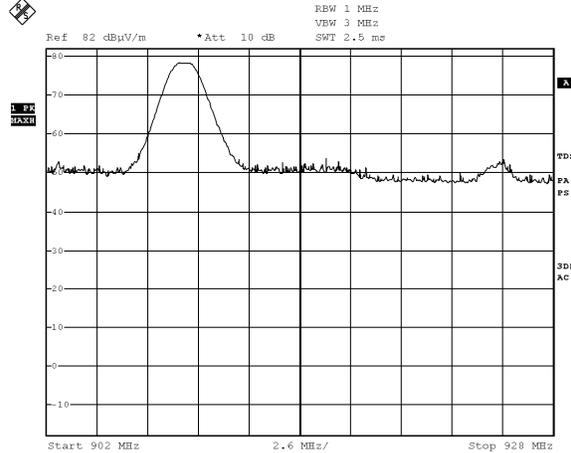

Date: 30.APR.2012 16:38:09

#### Second channel:

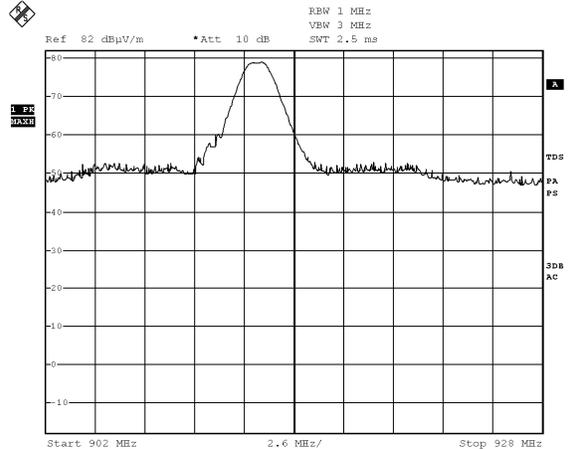

Date: 30.APR.2012 16:39:45

**BUREAU VERITAS HONG KONG LIMITED –  
Kowloon Bay Office  
1/F Pacific Trade Centre,  
2 Kai Hing Road, Kowloon Bay,  
Kowloon, HONG KONG  
Tel: +852 2331 0888  
Fax: +852 2331 0889  
www.cps.bureauveritas.com**


This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



**BUREAU  
VERITAS**


## TEST REPORT No.: (5212)121-1664

### Third channel:

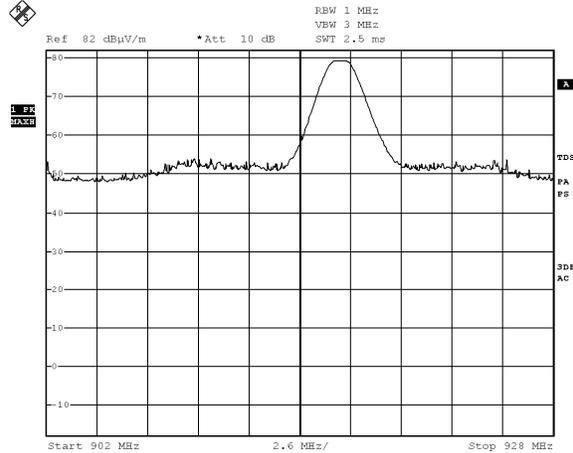

Date: 30.APR.2012 17:04:33

### Fourth channel:

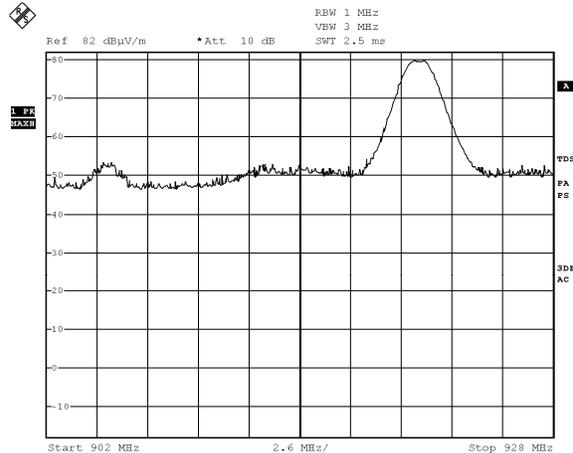

Date: 30.APR.2012 17:05:37




BUREAU VERITAS

# TEST REPORT No.: (5212)121-1664

## Measurement Data


### Test Result of 26dB Bandwidth of Fundamental Emission: PASS

#### First channel:

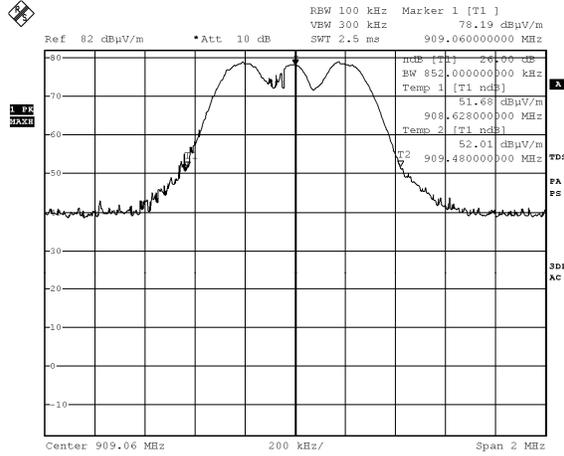

Date: 30.APR.2012 16:32:42

#### Second channel:

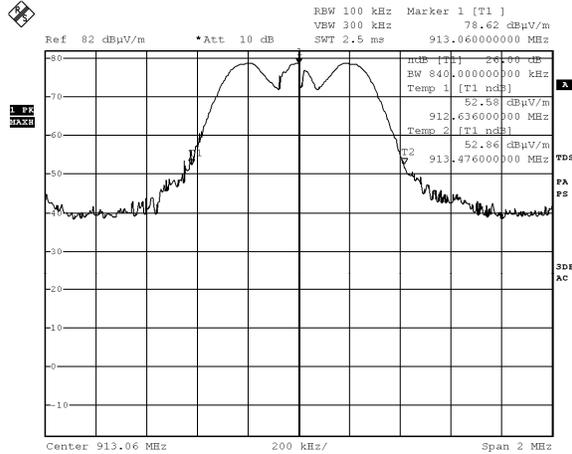

Date: 30.APR.2012 16:40:36

**BUREAU VERITAS HONG KONG LIMITED –**  
**Kowloon Bay Office**  
**1/F Pacific Trade Centre,**  
**2 Kai Hing Road, Kowloon Bay,**  
**Kowloon, HONG KONG**  
 Tel: +852 2331 0888  
 Fax: +852 2331 0889  
 www.cps.bureauveritas.com


This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



BUREAU VERITAS


# TEST REPORT No.: (5212)121-1664

## Third channel:

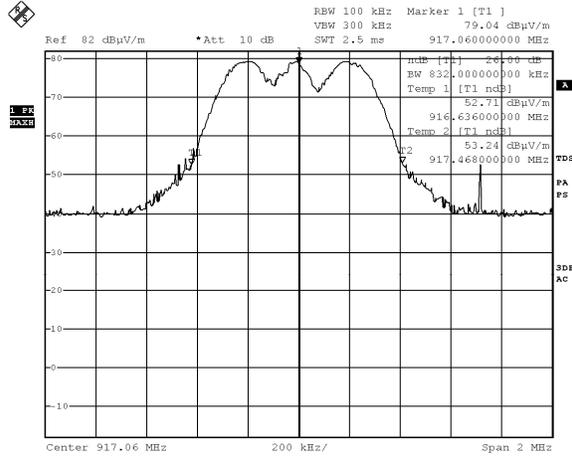

Date: 30.APR.2012 16:57:53

## Fourth channel:

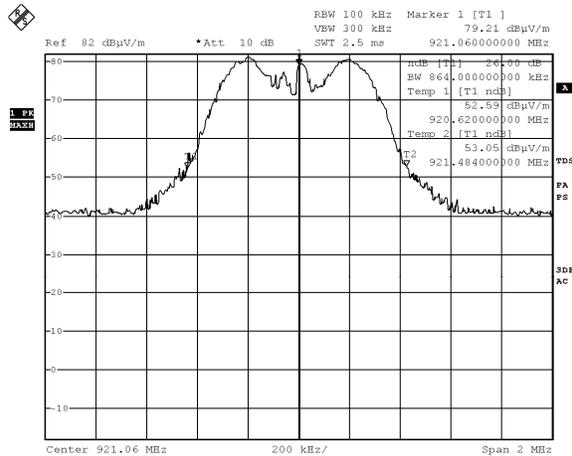

Date: 30.APR.2012 17:15:43

**BUREAU VERITAS HONG KONG LIMITED –**  
**Kowloon Bay Office**  
 1/F Pacific Trade Centre,  
 2 Kai Hing Road, Kowloon Bay,  
 Kowloon, HONG KONG  
 Tel: +852 2331 0888  
 Fax: +852 2331 0889  
 www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



**TEST REPORT No.: (5212)121-1664**

### **Duty Cycle Correction During 100msec:**

Each function key sends a different series of characters, but each packet period (100msec) never exceeds a series of 2 pulses (2msec). Assuming any combination of short and long pulses maybe obtained due to encoding the worst case transmit duty cycle would be considered  $(2*2)$  per 100msec = 4% duty cycle.

Remarks:

Duty Cycle Correction =  $20\text{Log}(0.04) = -27.9\text{dB}$   
Therefore  $-20$  dB is taken as precedence.


The following figures [Figure A to Figure B] show the characteristics of the pulse train for one of these functions.



BUREAU VERITAS


TEST REPORT No.: (5212)121-1664

Figure A [Pulse Train]

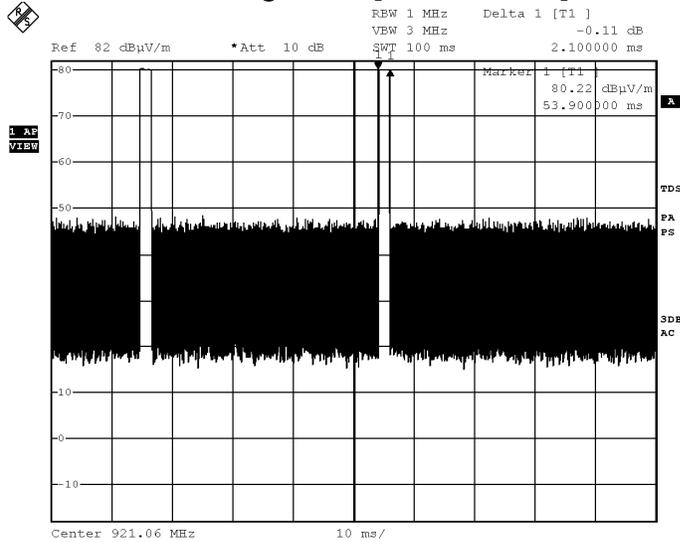

Date: 30.APR.2012 17:24:41

Figure B [Long or Short Pulse]

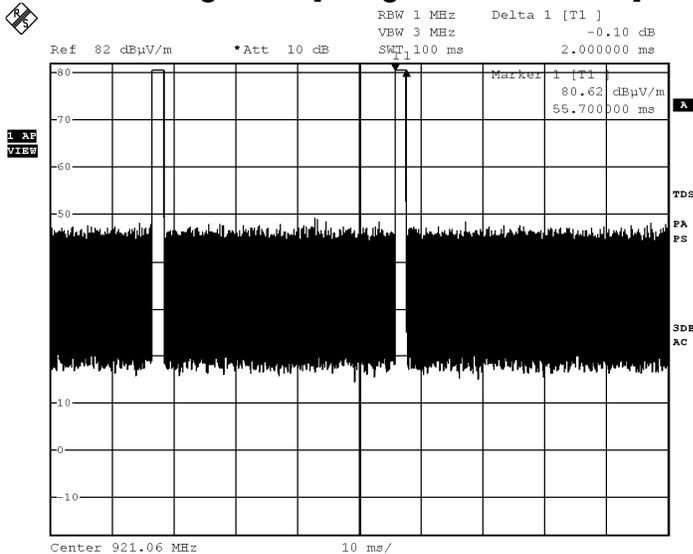

Date: 30.APR.2012 18:00:31

**TEST REPORT No.: (5212)121-1664**

**Photographs of EUT**

**Front View of the product**



**Rear View of the product**



**Side View of the product**



**Side View of the product**



**Battery Compartment**



**Battery Cover**



**TEST REPORT No.: (5212)121-1664**

**Photographs of EUT**

**Internal View of the product**



**Inner Circuit Top View**



**Internal View of the product**



**Inner Circuit Bottom View**



**TEST REPORT No.: (5212)121-1664**

**Measurement of Radiated Emission Test Set Up**



**\*\*\*\*\* End of Report \*\*\*\*\***