

EMC Test Report

Project Number: 4227659

Report Number: 4227659EMC03

Revision Level: 0

Client: Technicolor Connected Home USA LLC

Equipment Under Test: Channel Master Android TV

Model Number: CM-7600

FCC ID: G95-CM-7600

IC ID: 431C-DWT765CHA

Applicable Standards: ANSI C63.10: 2013 (FCC Part 15 Subpart C, § 15.247)

RSS-247, Issue 2

RSS-GEN Issue 4

Report issued on: 20 December 2017

Test Result: Compliant

Tested by:



Jeremy Pickens, Senior EMC Engineer

Reviewed by:



David Schramm, Operations Manager

Remarks: This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This document is issued by the Company under its General Conditions of Service accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Table of Contents

1	SUMMARY OF TEST RESULTS	4
1.1	MODIFICATIONS REQUIRED FOR COMPLIANCE	4
2	GENERAL INFORMATION.....	5
2.1	CLIENT INFORMATION	5
2.2	TEST LABORATORY	5
2.3	GENERAL INFORMATION OF EUT	5
2.4	OPERATING MODES AND CONDITIONS	6
2.5	EUT CONNECTION BLOCK DIAGRAM – CONDUCTED MEASUREMENTS.....	6
2.6	EUT CONNECTION BLOCK DIAGRAM – RADIATED MEASUREMENTS	7
2.7	SYSTEM CONFIGURATIONS	7
3	OCCUPIED BANDWIDTH	8
3.1	TEST RESULT.....	8
3.2	TEST METHOD.....	8
3.3	TEST SITE	8
3.4	TEST EQUIPMENT	8
3.5	TEST DATA.....	9
4	PEAK OUTPUT POWER	10
4.1	TEST RESULT.....	10
4.2	TEST METHOD.....	10
4.3	TEST SITE	10
4.4	TEST EQUIPMENT	10
4.5	TEST DATA.....	11
5	CONDUCTED SPURIOUS EMISSIONS	12
5.1	TEST RESULT.....	12
5.2	TEST METHOD.....	12
5.3	TEST SITE	12
5.4	TEST EQUIPMENT	12
5.5	TEST DATA – BAND EDGE.....	13
5.6	TEST DATA – CONDUCTED SPURIOUS EMISSIONS	15
6	FIELD STRENGTH OF SPURIOUS RADIATION.....	17
6.1	TEST RESULT.....	17
6.2	TEST METHOD.....	17
6.3	TEST SITE	17
6.4	TEST EQUIPMENT	18
6.5	TEST DATA – PEAK PLOTS.....	19
6.6	TEST DATA – TABULAR DATA.....	29
7	RADIATED EMISSIONS AT BAND EDGE / RESTRICTED BAND	30
7.1	TEST RESULT.....	30
7.2	TEST METHOD.....	30
7.3	TEST SITE	30
7.4	TEST EQUIPMENT	30
7.5	TEST DATA – RESTRICTED BAND EDGE	31
8	PSEUDO-RANDOM HOP SEQUENCE.....	34
8.1	TEST RESULT.....	34
8.2	TEST METHOD.....	34

9	CHANNEL SEPARATION	35
9.1	TEST RESULT.....	35
9.2	TEST METHOD.....	35
9.3	TEST SITE	35
9.4	TEST EQUIPMENT	35
9.5	TEST DATA.....	36
10	NUMBER OF HOPPING CHANNELS	37
10.1	TEST RESULT.....	37
10.2	TEST METHOD.....	37
10.3	TEST SITE	37
10.4	TEST EQUIPMENT	37
10.5	TEST DATA.....	38
11	DWELL TIME	39
11.1	TEST RESULT.....	39
11.2	TEST METHOD.....	39
11.3	TEST SITE	39
11.4	TEST EQUIPMENT	39
11.5	TEST DATA.....	40
11.6	SAMPLE PLOTS	41
12	CONDUCTED EMISSIONS	44
12.1	TEST RESULT.....	44
12.2	TEST METHOD.....	44
12.3	TEST SITE	44
12.4	TEST EQUIPMENT	44
12.5	TEST DATA.....	45
13	REVISION HISTORY	47

1 Summary of Test Results

Test Description	Test Specification		Test Result
Occupied Bandwidth	15.247(a)(1)	RSS-247 5.1(1) RSS-GEN 6.6	Compliant
Peak Power Output	15.247(a)(1)	RSS-247 5.4(2)	Compliant
Conducted Spurious Emissions	15.247(d)	RSS-247 5.5	Compliant
Band Edge	15.247(d)	RSS-247 5.5	Compliant
Radiated Spurious Emissions	15.247(d), 15.35(b),15.209	RSS-GEN 8.10	Compliant
Pseudo-Random Hop Sequence	15.247(a)(1)	RSS-247 5.1(1)	Compliant
Channel Separation	15.247(a)(1)	RSS-247 5.1(2)	Compliant
Number of Hopping Channels	15.247(a)(1)(iii)	RSS-247 5.1(4)	Compliant
Dwell Time	15.247(a)(1)(iii)	RSS-247 5.1(4)	Compliant
Number of hopping frequencies	15.247(a)(1)(iii)	RSS-247 5.1(4)	Compliant
Antenna Requirement	15.203	RSS-GEN S8.3	Compliant (1)
AC Powerline Conducted Emission	15.107, 15.207	RSS-GEN 7.2.4	Compliant

1) Internal PCB trace antenna

1.1 Modifications Required for Compliance

None

2 General Information

2.1 Client Information

Name: Technicolor Connected Home USA LLC
Address: 5030 Sugarloaf Parkway Building 6
City, State, Zip, Country: Lawrenceville, GA 30044, USA

2.2 Test Laboratory

Name: SGS North America, Inc.
Address: 620 Old Peachtree Road NW, Suite 100
City, State, Zip, Country: Suwanee, GA 30024, USA

Accrediting Body: A2LA
Type of lab: Testing Laboratory
Certificate Number: 3212.01

2.3 General Information of EUT

Type of Product: Channel Master Android TV
Model Number: CM-7600
Serial Number: 211930007386700018

Frequency Range: 2402 to 2480 MHz, 79 Channels
Data Modes: Bluetooth GFSK, EDR-2, EDR-3 (DH1, DH3, DH5)
Antenna: 2x Internal PCB Trace
 #1 3.34 dBi Max Gain
 #2 2.4 dBi Max Gain (BT uses this antenna only)


Rated Voltage: 12Vdc (Supplied via 100-120Vac, 60Hz AC Adapter)
Test Voltage: 12Vdc, (120Vac, 60Hz)

Sample Received Date: 30 October 2017
Dates of testing: 13 November - 08 December 2017


2.4 Operating Modes and Conditions

During radiated spurious emissions tests, continuous traffic was generated using test commands. For conducted measurements, the EUT was placed in test mode and a Bluetooth tester was connected to the device. Where the duty cycle measured below 98%, ANSI C63.10, Section 7.5 was used.

2.5 EUT Connection Block Diagram – Conducted Measurements

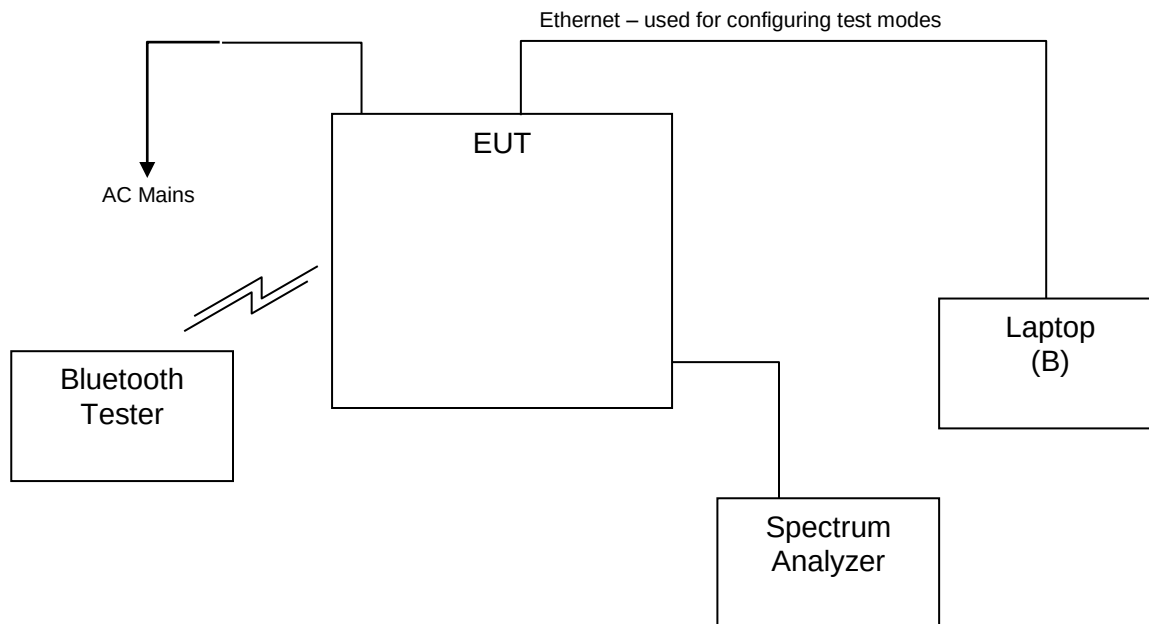

2.6 EUT Connection Block Diagram – Radiated Measurements

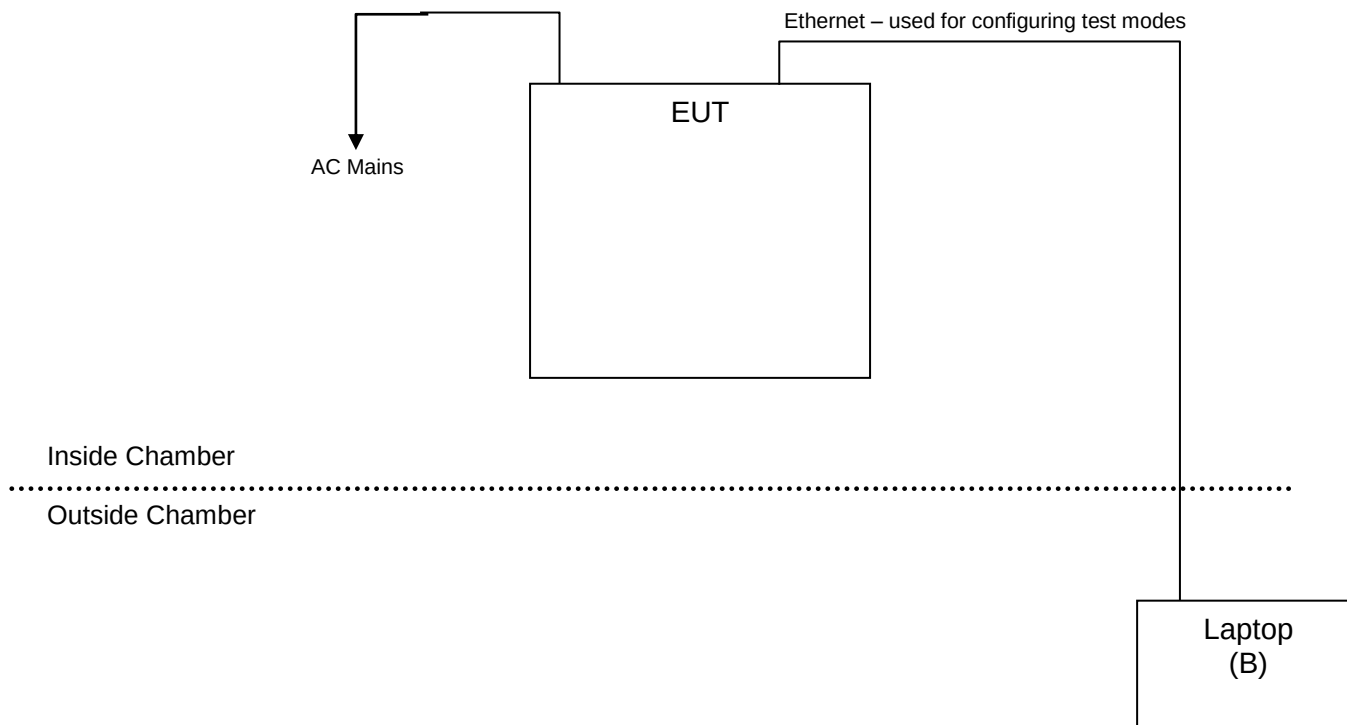

2.7 System Configurations

Device reference	Manufacturer	Description	Model Number	Serial Number
A	Johnson Controls Inc	Wireless Thermostat	SiO2	173800048
B	Dell	Laptop	Latitude ES420	11033846857
C	Rohde & Schwarz	Communications Tester	CMW-500	127722

3 Occupied Bandwidth

3.1 Test Result

Test Description	Basic Standards	Test Result
99% bandwidth	ANSI C63.10: 2013 15.247(a)(1) RSS-247 5.1(1) RSS-GEN 6.6	Compliant

3.2 Test Method

Occupied bandwidth measurements were taken using the methods defined in ANSI C63.10, Clause 6.9; Measurements were recorded using the 99% OBW function of the measurement receiver.

3.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.1 °C
Relative Humidity: 25.9 %
Atmospheric Pressure: 97.8 kPa

3.4 Test Equipment

Test End Date: 8-Dec-2017

Tester: JOP


Equipment	Model	Manufacturer	Asset Number	Cal Due Date
EMI TEST RECEIVER	ESU40	ROHDE & SCHWARZ	B079629	25-Apr-2018
RF CABLE	SF102	HUBER & SUHNER	B079823	26-Jul-2018

Note: The equipment calibration period is 1 year.

3.5 Test Data

Frequency	Channel No	Modulation	99% bandwidth MHz
2402	0	Basic Rate	0.949
		EDR-2	1.195
		EDR-3	1.209
2441	39	Basic Rate	0.943
		EDR-2	1.196
		EDR-3	1.209
2480	78	Basic Rate	0.943
		EDR-2	1.194
		EDR-3	1.208

Sample Plot

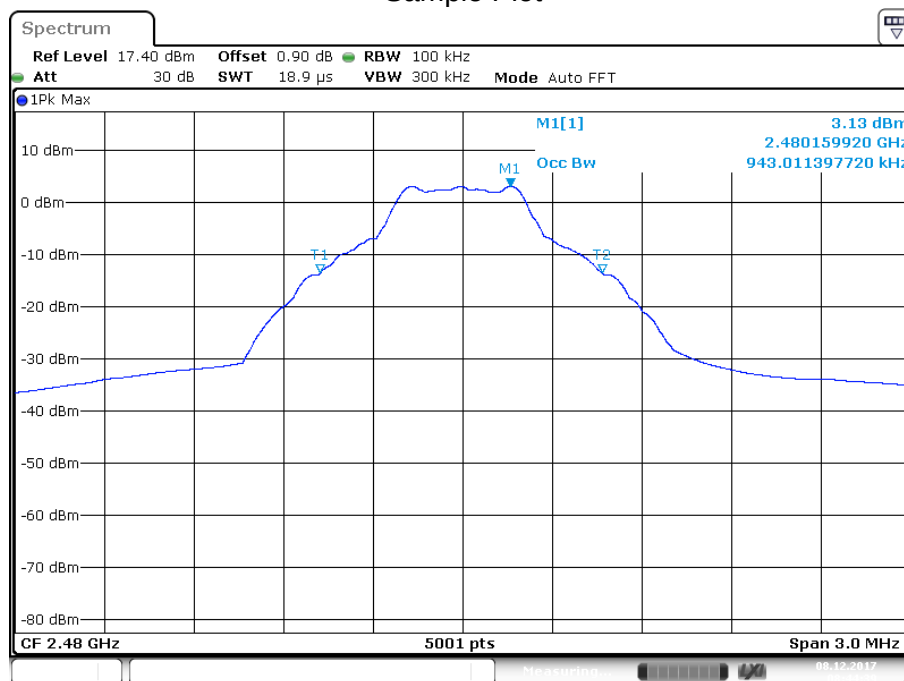

Date: 8 DEC 2017 08:44:39

4 Peak Output Power

4.1 Test Result

Test Description	Test Specification	Test Result
Peak Output Power	ANSI C63.10: 2013 15.247(a)(1) RSS-247 5.4(2)	Compliant

4.2 Test Method

Output power measurements were taken using the methods defined in ANSI C63.10, Clause 7.8.5. A peak power meter was used for final measurements.

Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt.

4.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.1 °C
Relative Humidity: 25.9 %
Atmospheric Pressure: 97.8 kPa

4.4 Test Equipment

Test End Date: 8-Dec-2017

Tester: JOP


Equipment	Model	Manufacturer	Asset Number	Cal Due Date
EMI TEST RECEIVER	ESU40	ROHDE & SCHWARZ	B079629	25-Apr-2018
RF CABLE	SF102	HUBER & SUHNER	B079823	26-Jul-2018

Note: The equipment calibration period is 1 year.

4.5 Test Data

Modulation	Frequency (MHz)	Peak Power (dBm)	Peak Power (Watts)	Limit (dBm)	Margin (dB)
Basic Rate (DH5)	2402.000000	3.29	0.0021	30	-26.71
	2441.000000	3.23	0.0021	30	-26.77
	2480.000000	3.18	0.0021	30	-26.82
EDR-2 (DH5)	2402.000000	2.88	0.0019	30	-27.12
	2441.000000	2.77	0.0019	30	-27.23
	2480.000000	2.75	0.0019	30	-27.25
EDR-3 (DH5)	2402.000000	3.18	0.0021	30	-26.82
	2441.000000	3.07	0.0020	30	-26.93
	2480.000000	3.04	0.0020	30	-26.96

Sample Plot:

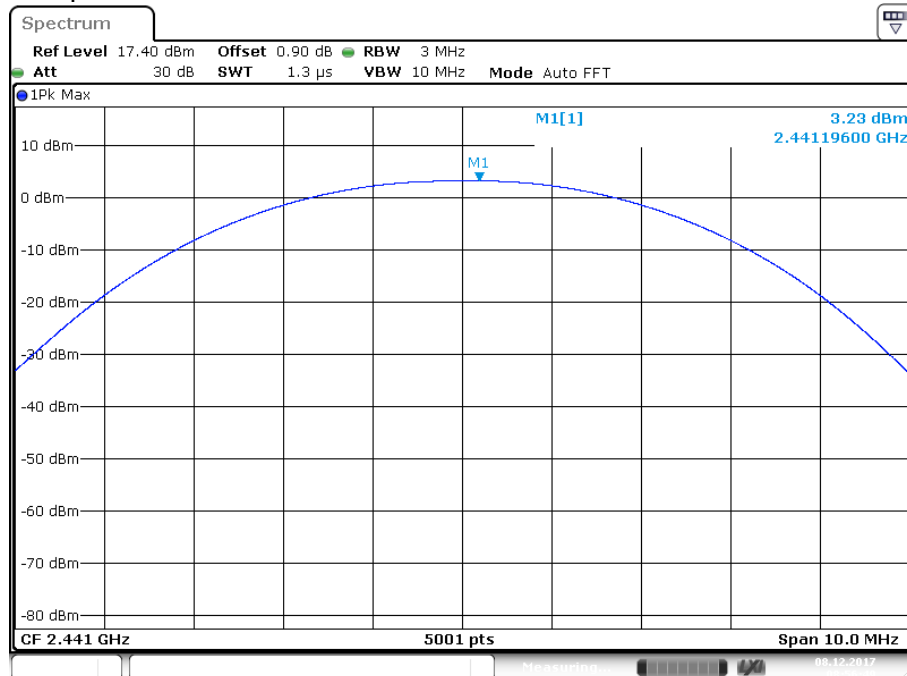

Date: 8 DEC 2017 08:56:49

5 Conducted Spurious Emissions

5.1 Test Result

Test Description	Test Specification	Test Result
Conducted Spurious Emissions	ANSI C63.10: 2013 15.247(d) RSS-247 5.4(2)	Compliant

5.2 Test Method

Conducted spurious emissions measurements were taken using the methods defined in ANSI C63.10, Clauses 5.5 and 5.6. Authorized band edge measurements were recorded using the methods in clause 6.10.4. EDR-3 with a DH5 packet type was used as the worst-case mode of operation for spurious measurements. Band edge measurements were recorded using each modulation (Basic Rate, EDR-2, and EDR-3).

The limit is 20 dB below the measured peak power.

5.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.1 °C
Relative Humidity: 25.9 %
Atmospheric Pressure: 97.8 kPa

5.4 Test Equipment

Test End Date: 8-Dec-2017


Tester: JOP

Equipment	Model	Manufacturer	Asset Number	Cal Due Date
EMI TEST RECEIVER	ESU40	ROHDE & SCHWARZ	B079629	25-Apr-2018
RF CABLE	SF102	HUBER & SUHNER	B079823	26-Jul-2018


Note: The equipment calibration period is 1 year.

5.5 Test Data –Band Edge


Basic Rate Lower band edge / Upper band edge

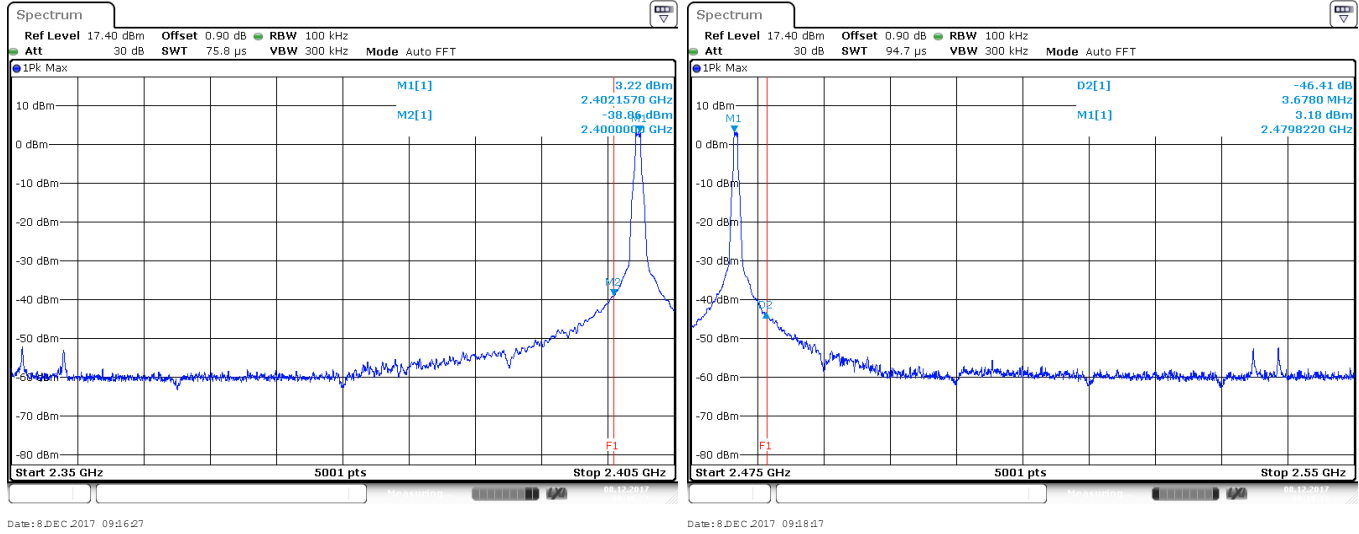

EDR 2 Lower band edge / Upper band edge

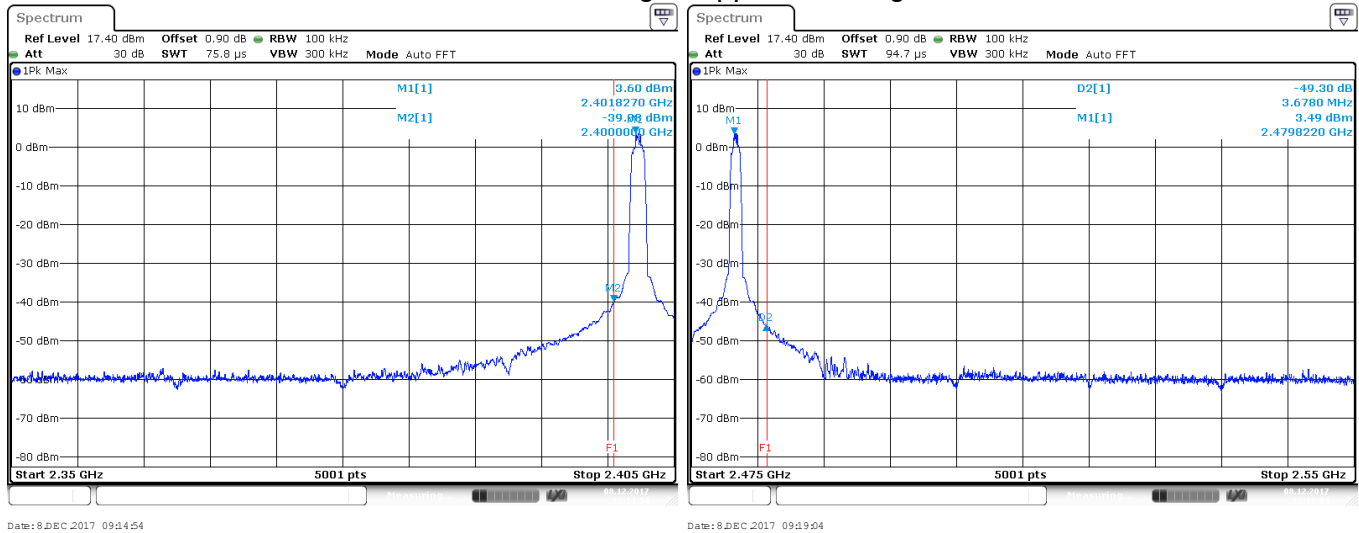


EDR 3 Lower band edge / Upper band edge

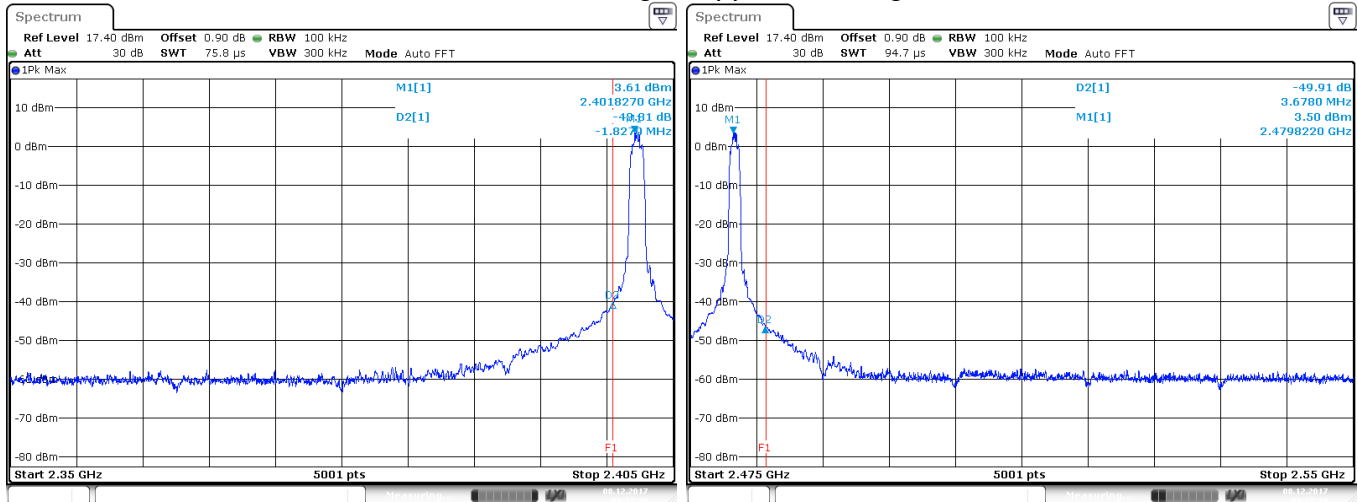

Date: 8 DEC 2017 09:12:30

Date: 8 DEC 2017 09:20:10


EDR 3 (Hopping Mode) Lower band edge / Upper band edge

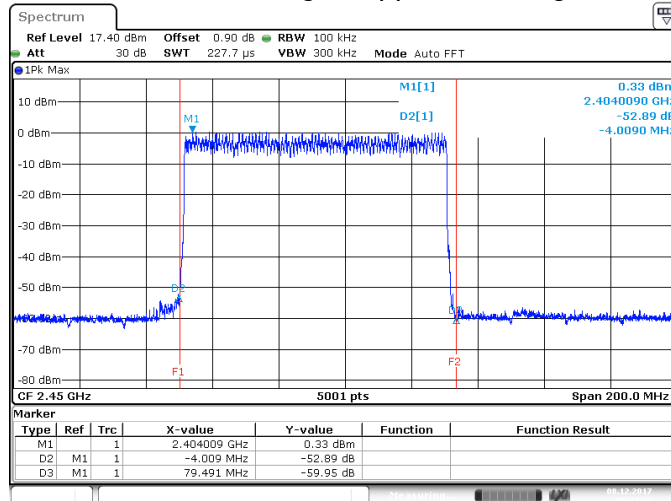


Date: 8 DEC 2017 10:24:33

5.6 Test Data – Conducted Spurious Emissions


BR, Channel 0, 2402 MHz

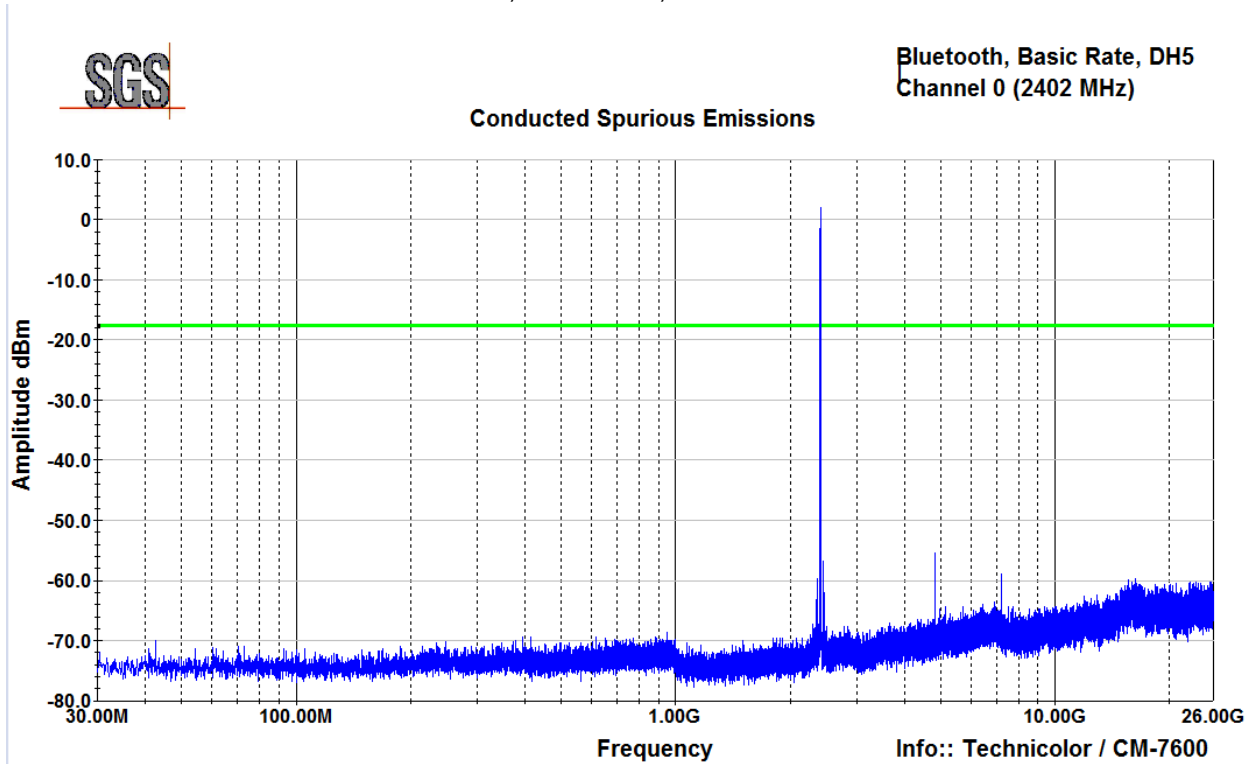

BR, Channel 39, 2441 MHz

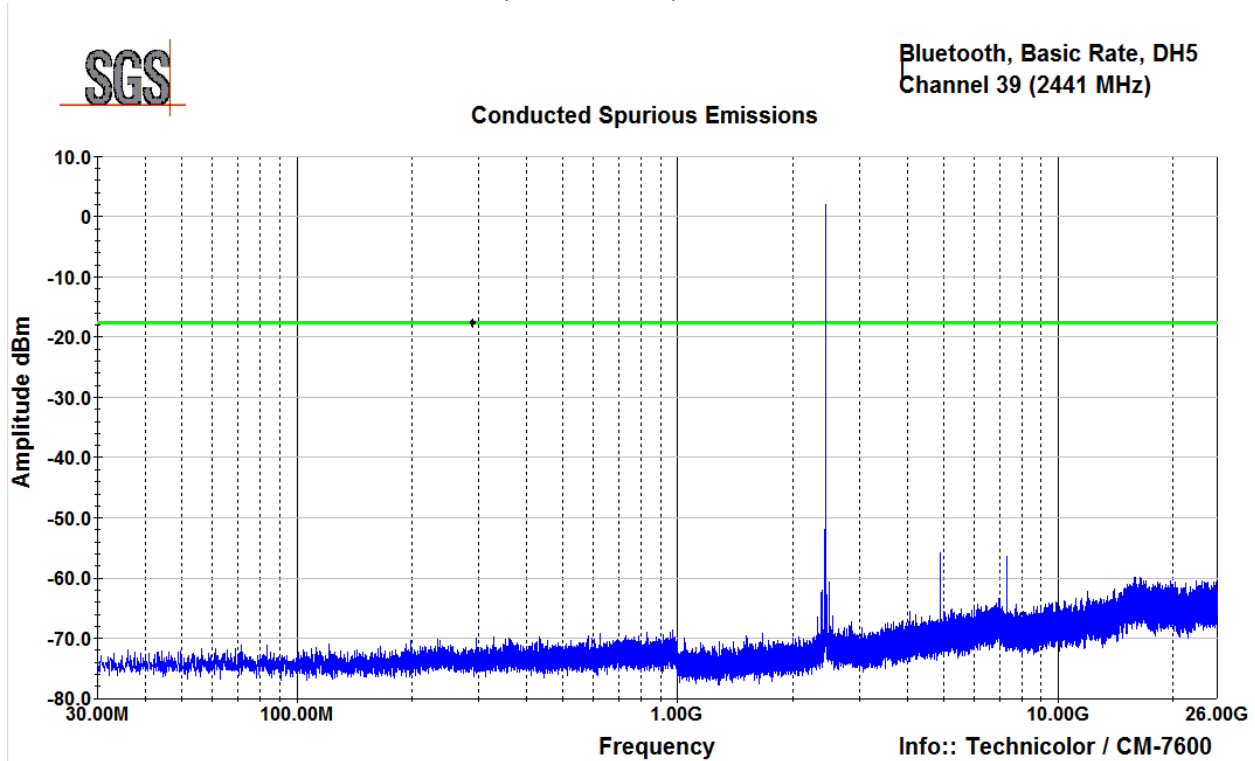

BR, Channel 78, 2480 MHz

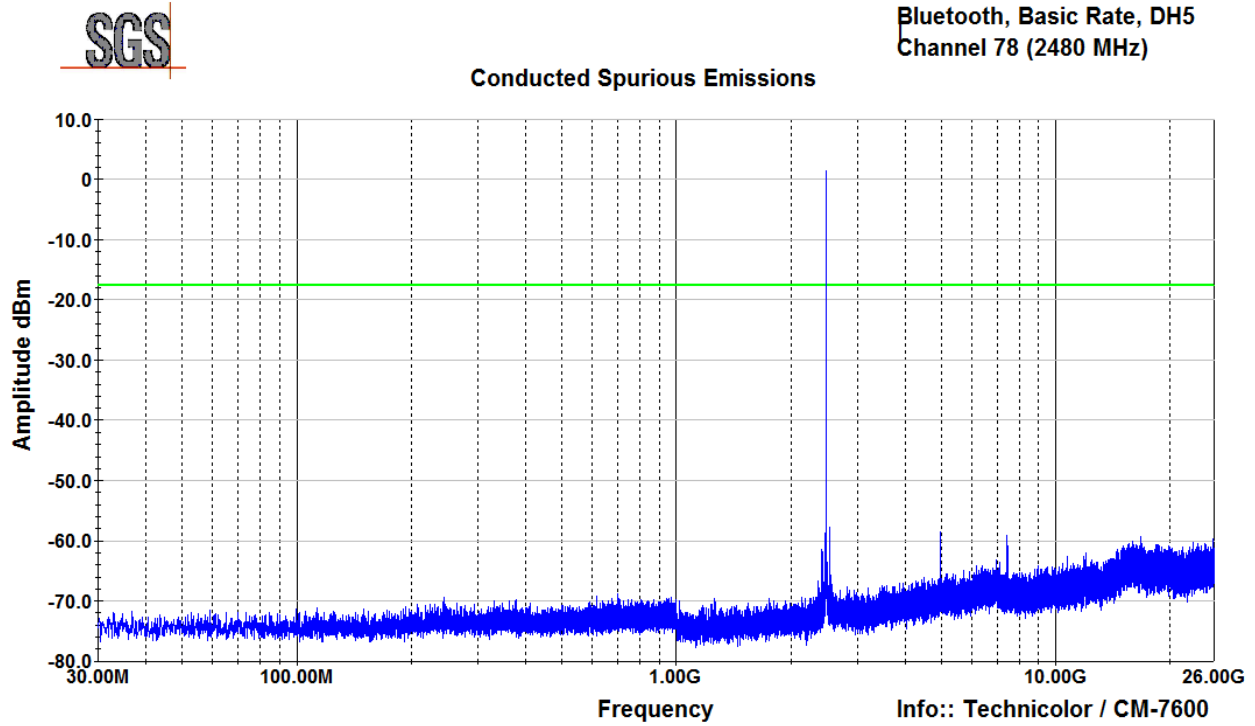

6 Field Strength of Spurious Radiation

6.1 Test Result

Test Description	Test Specification		Test Result
Spurious Emissions	15.247 (d) and 15.209	RSS-247 S5.5	Compliant

6.2 Test Method

The measurement methods defined in ANSI C63.10: 2013 were used.

Lowest, middle, and highest channels were investigated – the device was commanded to continuously transmit on channels 0, 39, and 78. Worst-case mode was determined to be Basic Rate with DH5 packet type.

Test distance:

- 9k to 30 MHz – Near field prescan to determine if there were any emissions.
- 30 to 1000 MHz - The EUT to measurement antenna distance was 3 meters
- 1 to 18 GHz - The EUT to measurement antenna distance was 3 meters
- 18 to 26 GHz - The EUT to measurement antenna distance was 3 meter

Limits within restricted bands of operation:

Frequency	Limits ⁽¹⁾		Peak Limits dBuV/m
	Microvolts/m	dBuV/m	
30 - 88 MHz	100	40 ⁽²⁾	--
88 - 216 MHz	150	43.5 ⁽²⁾	--
216 - 960 MHz	200	46 ⁽²⁾	--
960 - 1000 MHz	500	54 ⁽²⁾	--
1 - 40 GHz	500	54 ⁽³⁾	74

(1) These limits are applicable to emissions outside of the intentional transmit frequency band.

(2) Quasi-peak limit

(3) Average limit

6.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

- Temperature: 23.5 °C
- Relative Humidity: 31.2 %
- Atmospheric Pressure: 97.9 kPa

6.4 Test Equipment

Test End Date: 7-Dec-2017

Tester: JOP/AF


Equipment	Model	Manufacturer	Asset Number	Cal Due Date
EMI TEST RECEIVER	ESU8	ROHDE & SCHWARZ	B085759	25-Jul-2018
EMI TEST RECEIVER	ESU40	ROHDE & SCHWARZ	B079629	25-Apr-2018
ANTENNA, BILOG	JB6	SUNOL	B079689	16-Oct-2018
RF CABLE	SF106	HUBER & SUHNER	B079712	24-Jul-2018
RF CABLE	NFS-290-78.7-NFS	FLORIDA RF LABS	B095019	24-Jul-2018
RF CABLE	UC-N-MM-78	MAURY MICROWAVE	17017	25-Jul-2018
RF CABLE	SUCOFLEX 100	HUBER & SUHNER	B108523	24-Jul-2018
LOW NOISE AMPLIFIER	TS-PR18	ROHDE & SCHWARZ	B094463	22-Feb-2018
ANTENNA, DRG HORN (MEDIUM)	3117	ETS LINDGREN	B079691	27-Jul-2018
RF CABLE	104PE	HUBER & SUHNER	B079793	24-Jul-2018
LOW NOISE AMPLIFIER	TS-PR18	ROHDE & SCHWARZ	15003	28-Jul-2018
FILTER, HIGH PASS (>2800MHZ)	HPM50111	MICRO-TRONICS	B085747	27-Jul-2018
HORN(SMALL)	LB-180400-20-C-KF	A-INFO	15007	21-Mar-2018
RF CABLE	SF102	HUBER & SUHNER	B079822	27-Jul-2018
RF CABLE	SF102	HUBER & SUHNER	B079824	26-Jul-2018
LOW NOISE AMPLIFIER	NSP1840-HG	MITEQ	B087572	28-Jul-2018
ANTENNA, LOOP, ACTIVE	6502	ETS LINDGREN	B085752	22-Aug-2018

Note: The equipment calibration period is 1 year.

6.5 Test Data – Peak Plots


No emissions associated with the radio were detected in the range 9kHz to 30MHz.

Bluetooth Channel 0
 Vertical (30-1000MHz)

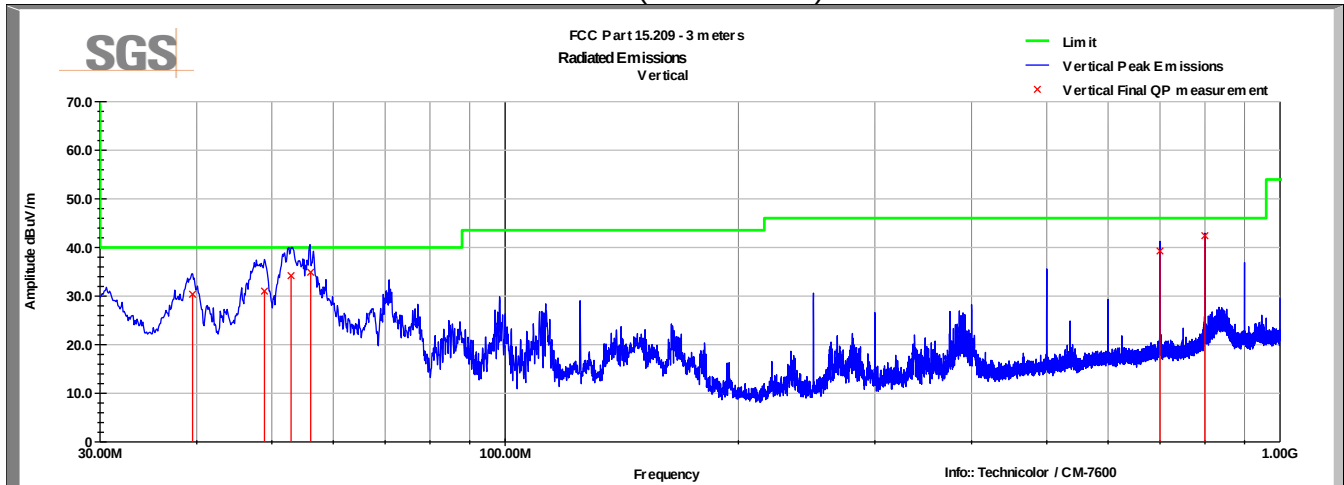


Below 1GHz, there was no discernible difference among the different transmit channels.

Bluetooth Channel 0
 Horizontal (30-1000MHz)

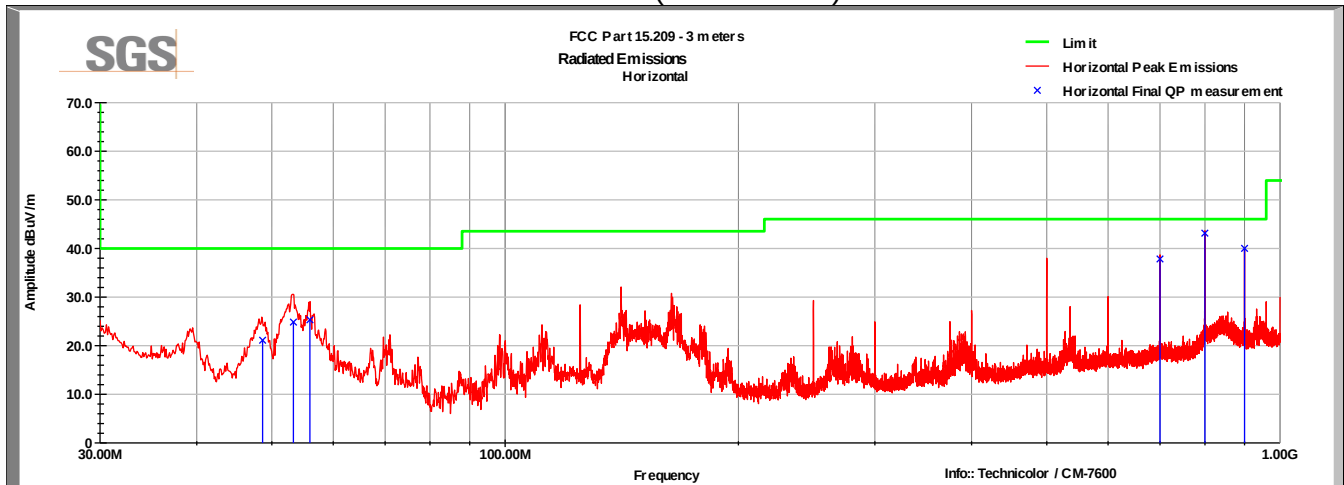


Below 1GHz, there was no discernible difference among the different transmit channels.


Bluetooth Channel 0
Vertical (1-3GHz)

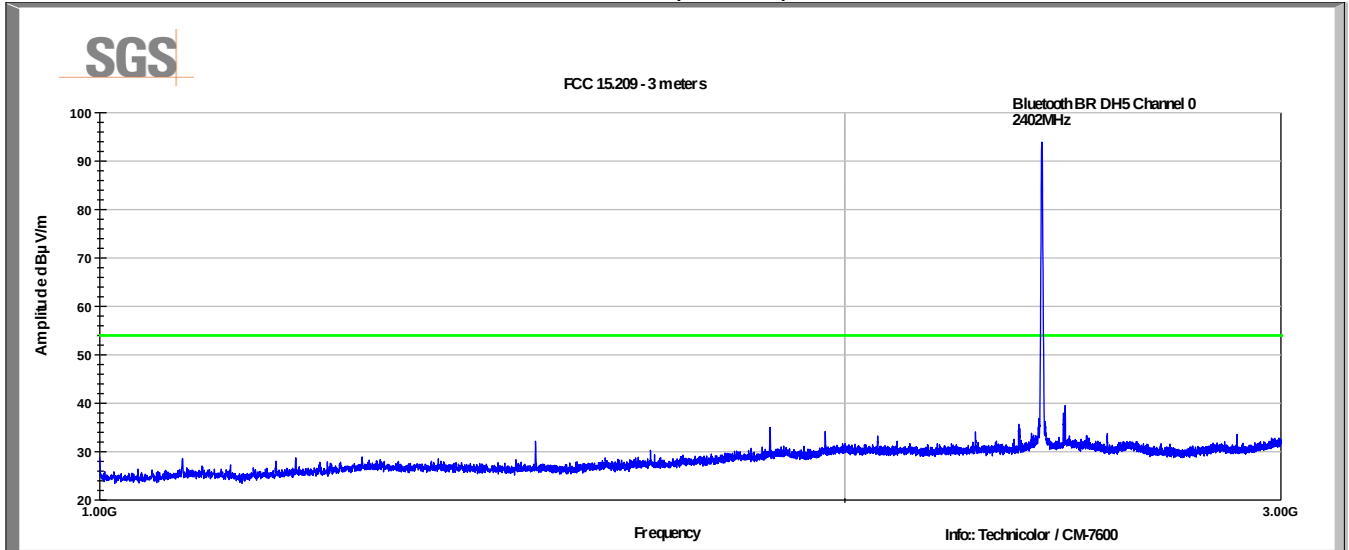

Bluetooth Channel 0
Horizontal (1-3GHz)

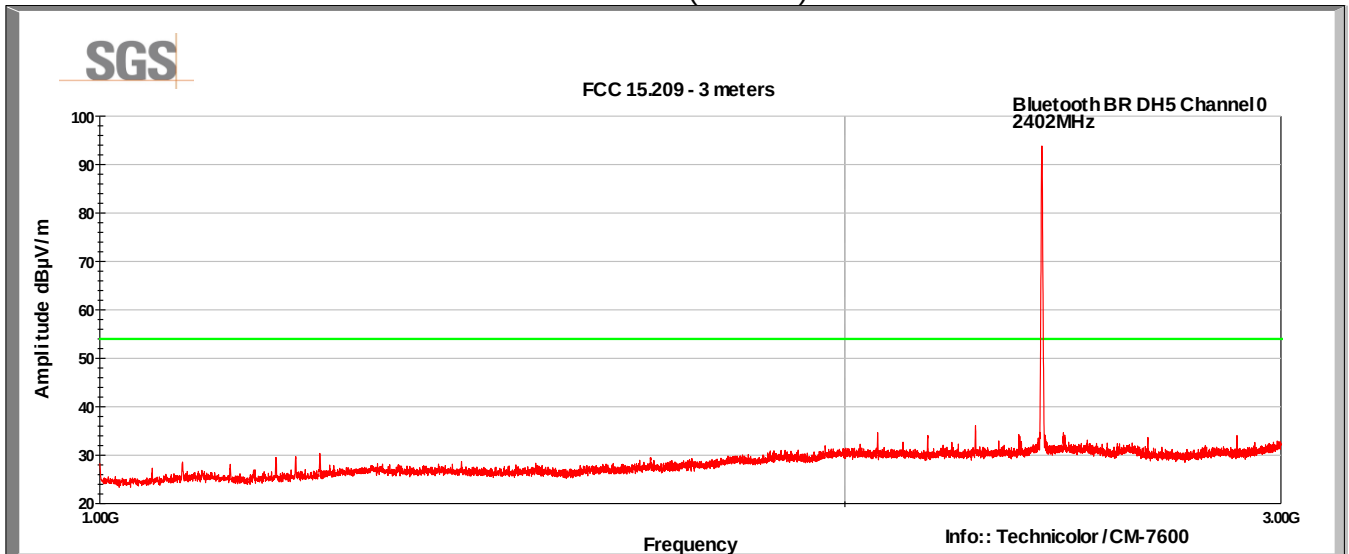


Bluetooth Channel 0
Vertical (3-18GHz)

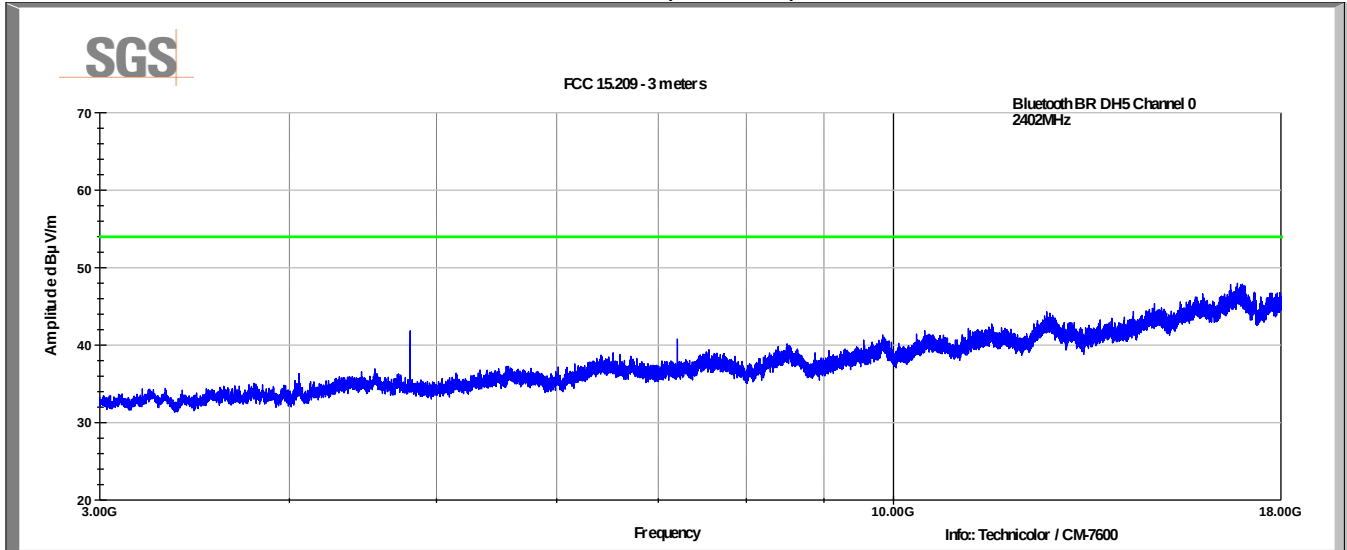


Worst-case spur: 41.9dBµV/m (Peak) @ 4804MHz (12.1dB Margin to average limit)

Bluetooth Channel 0
Horizontal (3-18GHz)

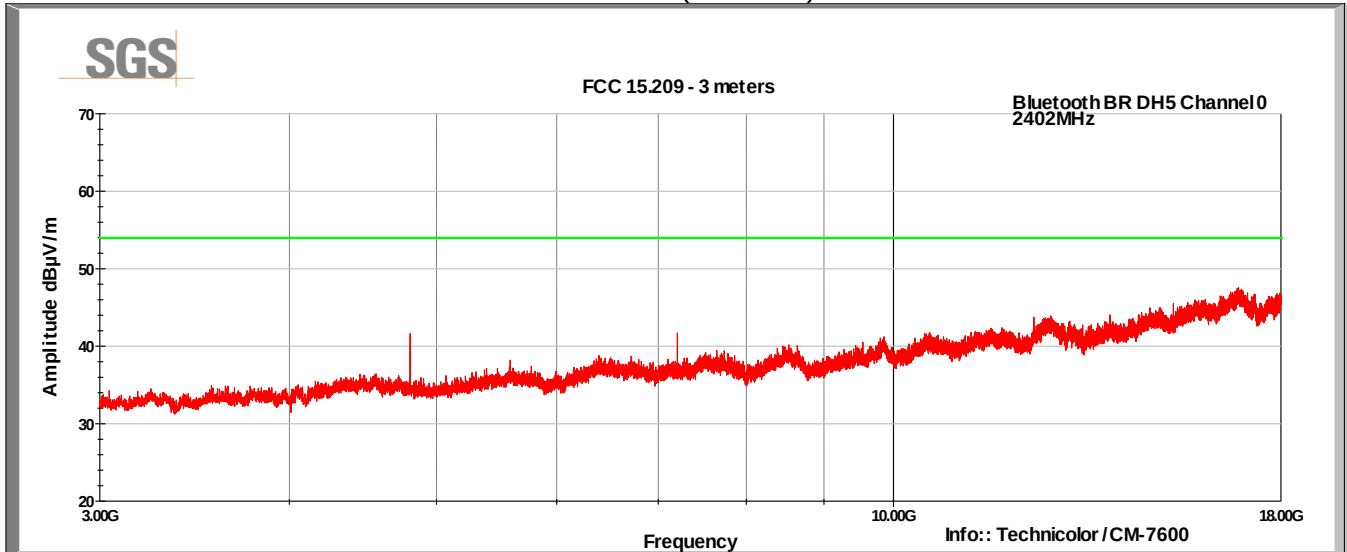


Worst-case spur: 41.6dBµV/m (Peak) @ 4804MHz (12.4dB Margin to average limit)


Bluetooth Channel 0
 Vertical (18-40GHz)

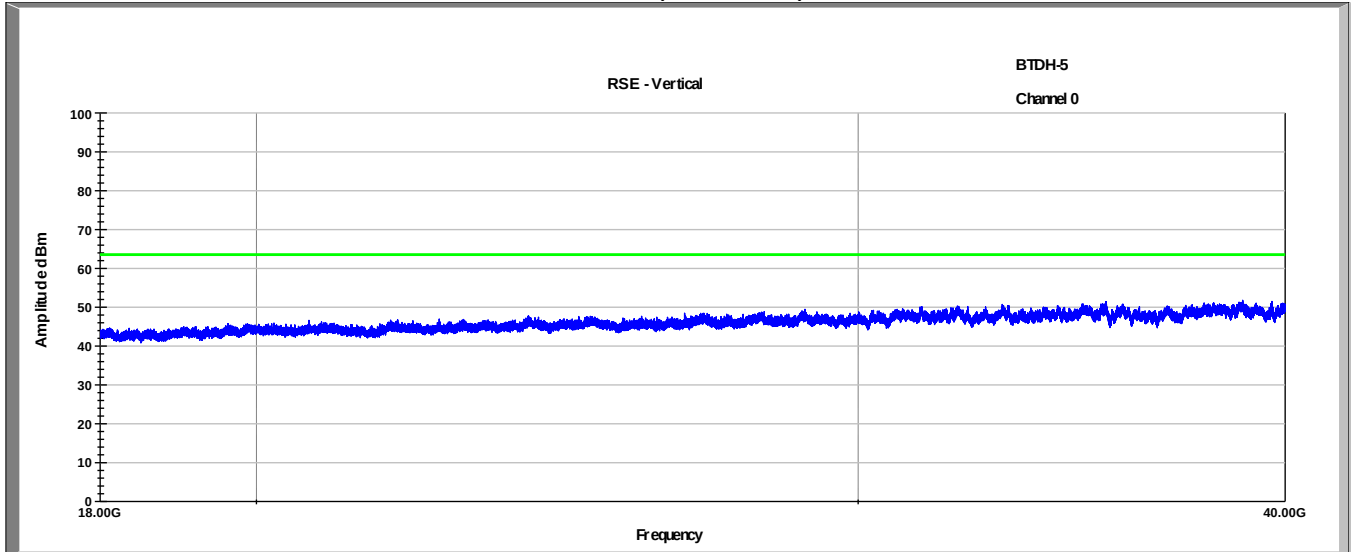


Bluetooth Channel 0
 Horizontal (18-40GHz)

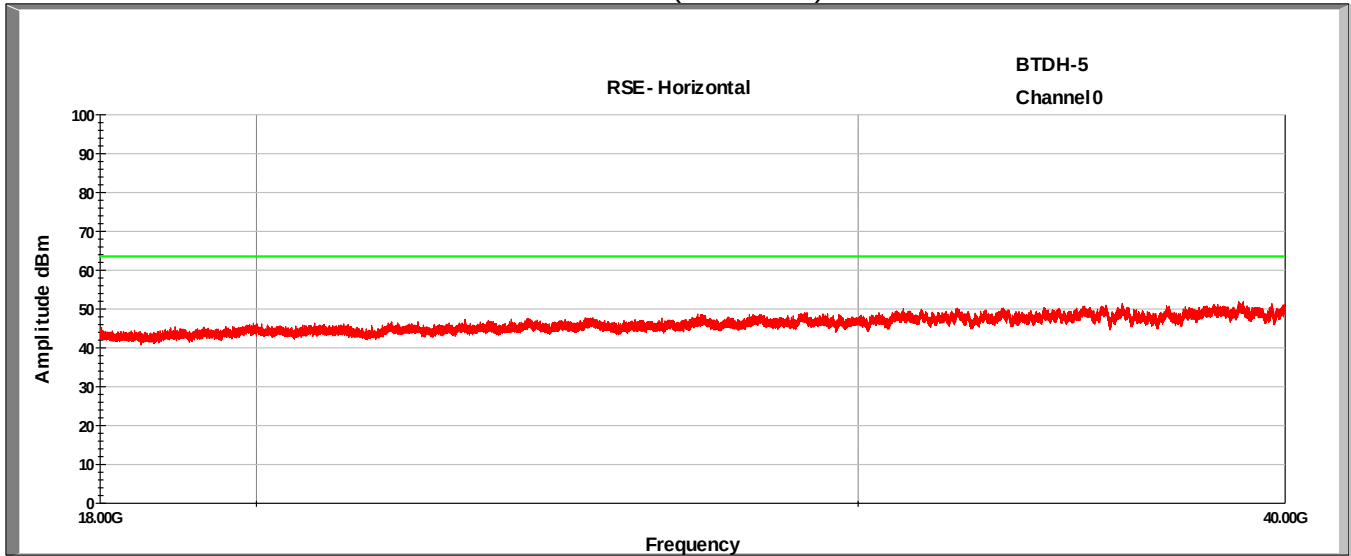


Bluetooth Channel 39
Vertical (1-3GHz)

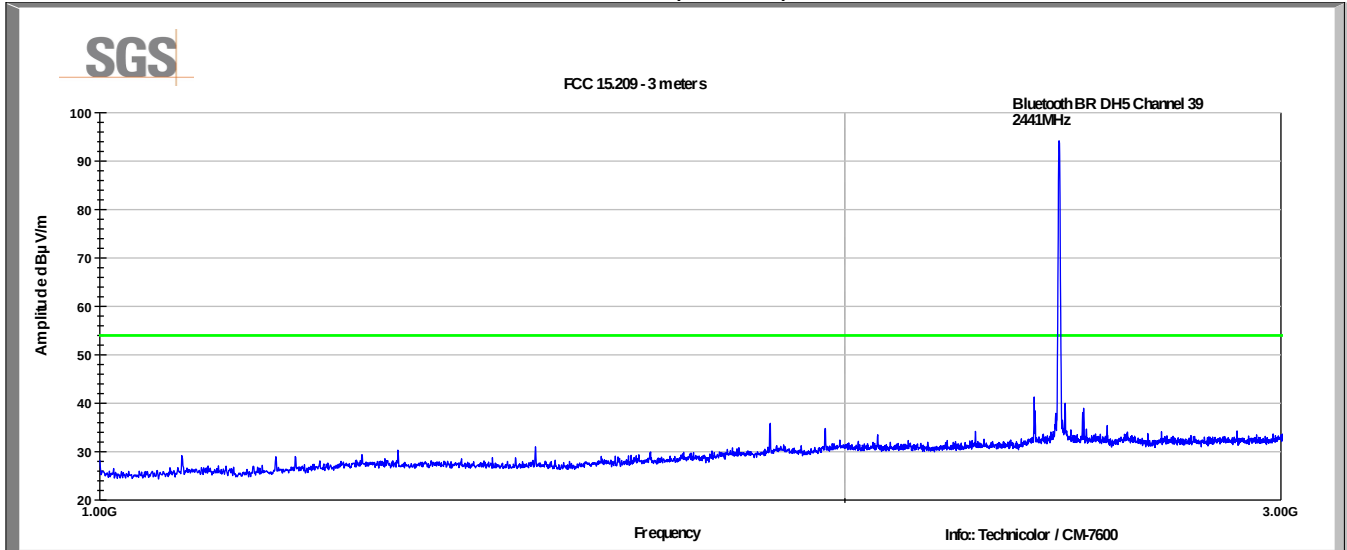


Bluetooth Channel 39
Horizontal (1-3GHz)

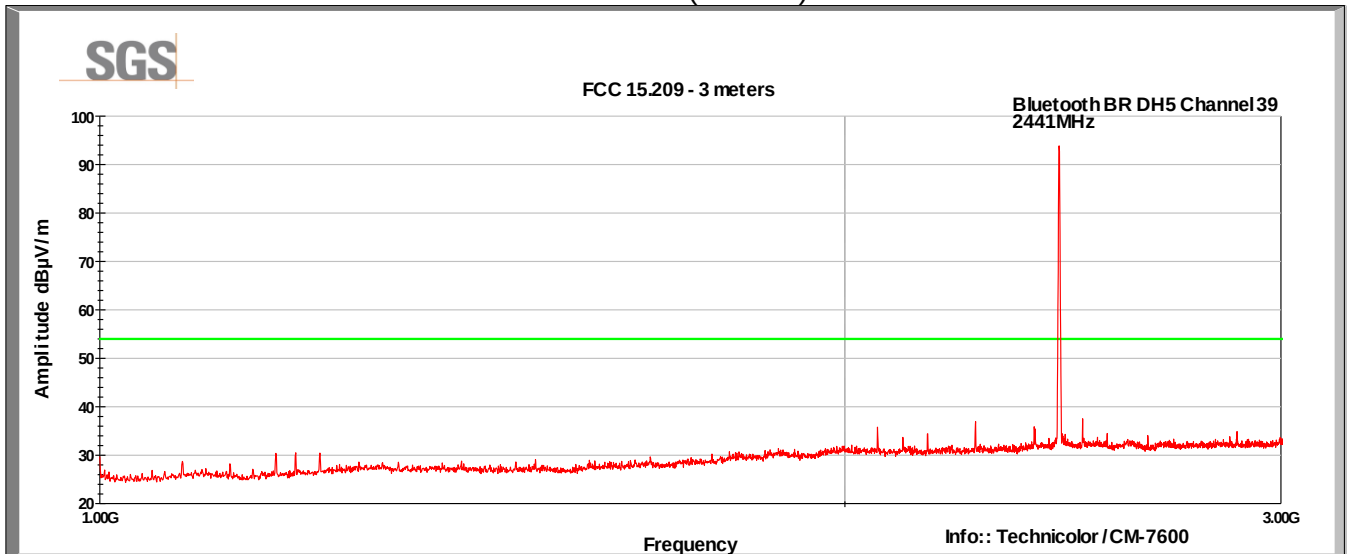


Bluetooth Channel 39
Vertical (3-18GHz)

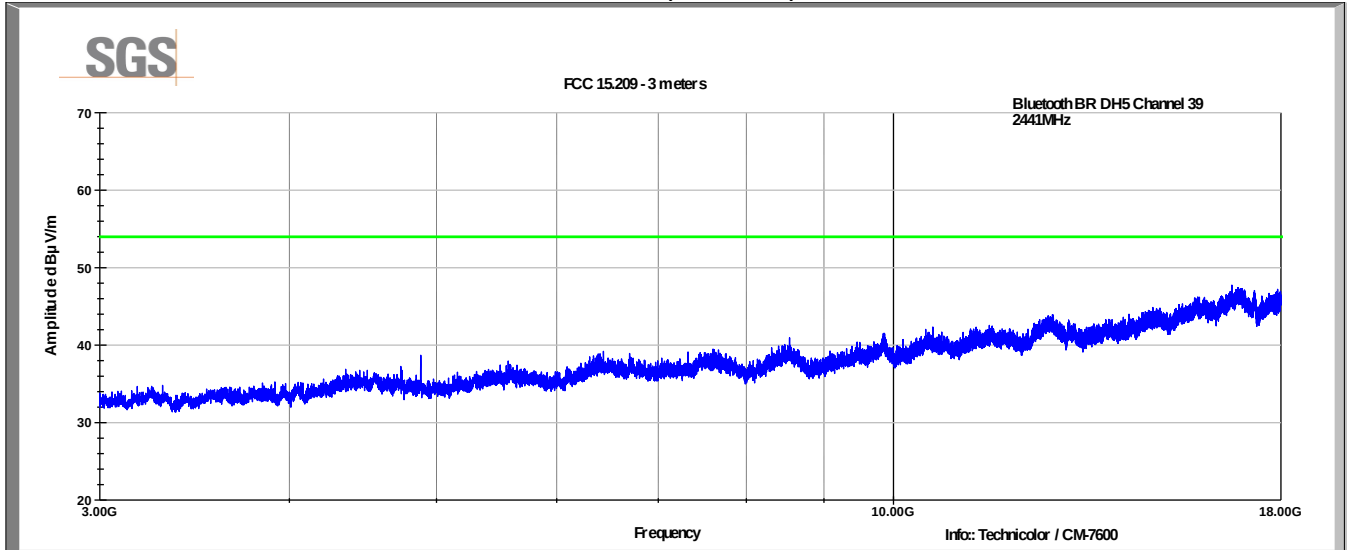


Bluetooth Channel 39
Horizontal (3-18GHz)

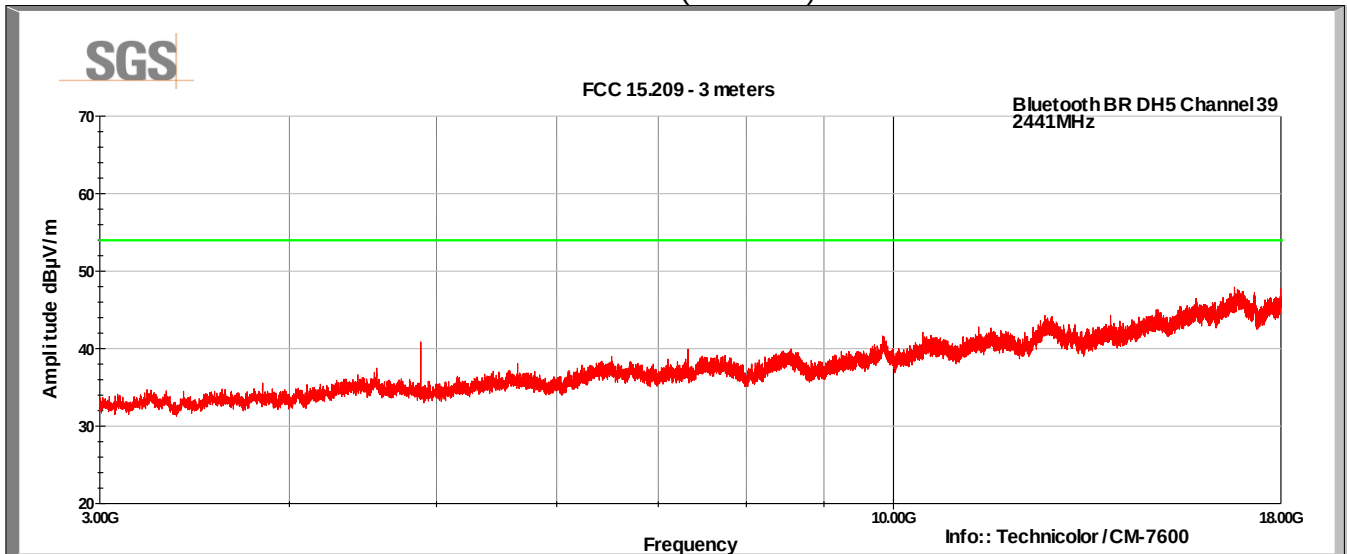


Bluetooth Channel 39
 Vertical (18-40GHz)

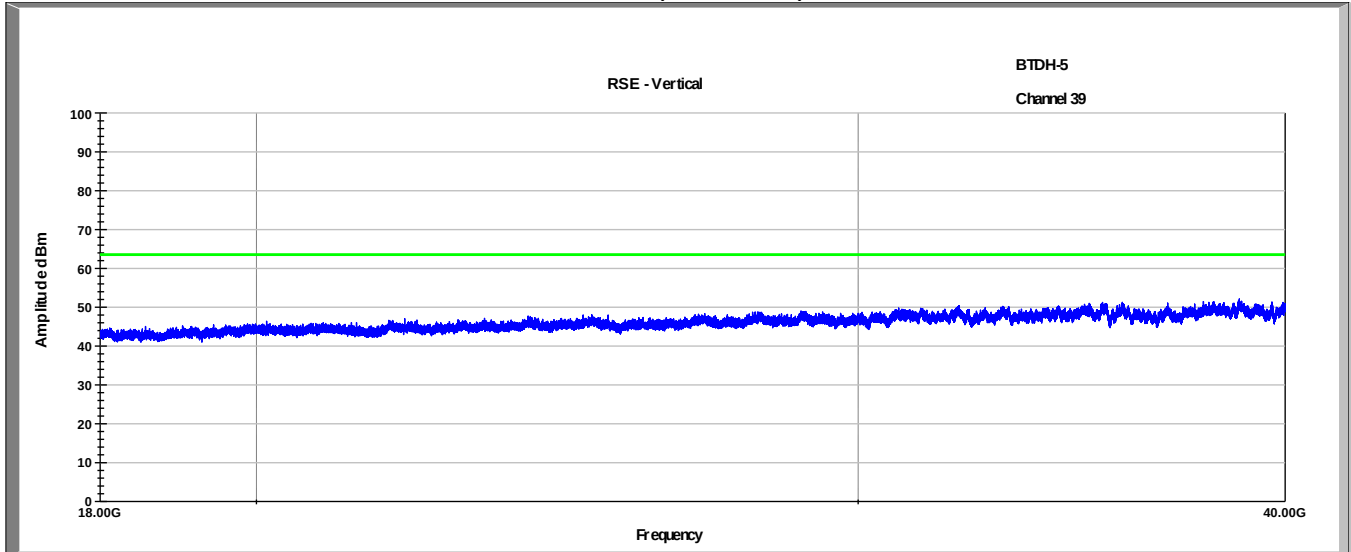


Bluetooth Channel 39
 Horizontal (18-40GHz)

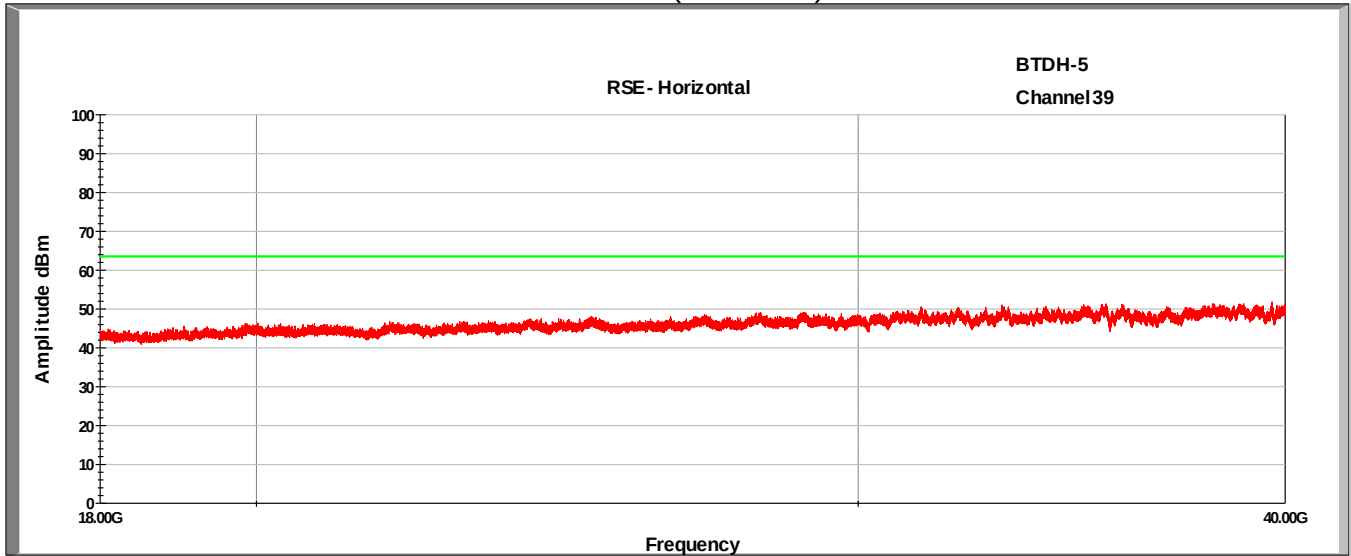


Bluetooth Channel 78
Vertical (1-3GHz)

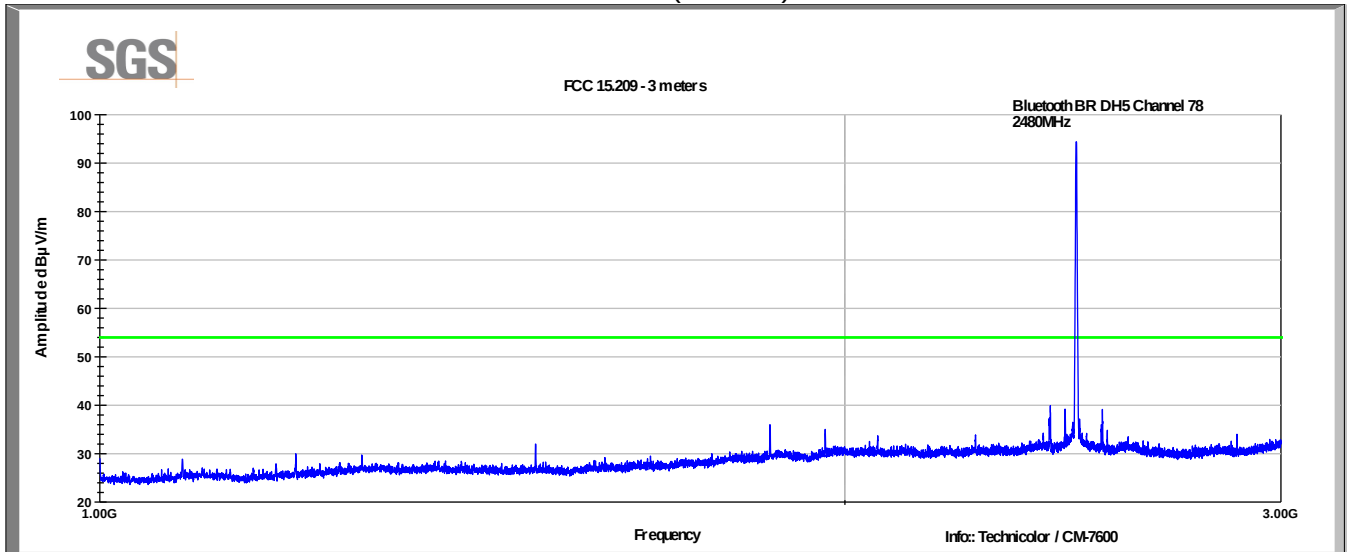


Bluetooth Channel 78
Horizontal (1-3GHz)

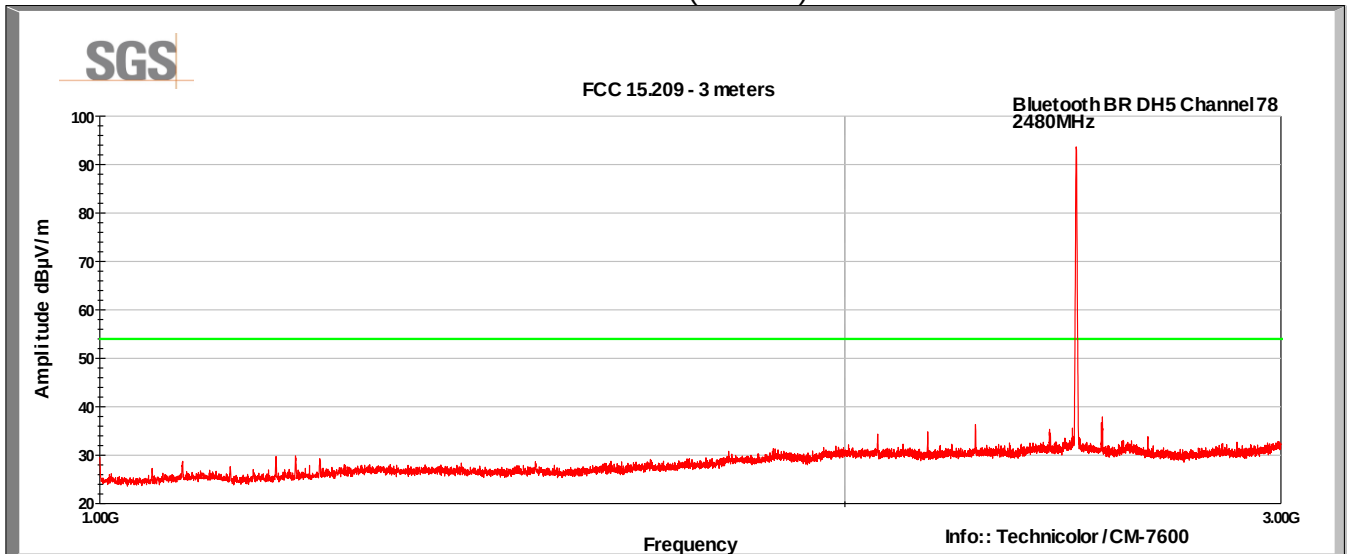

Bluetooth Channel 78
Vertical (3-18GHz)

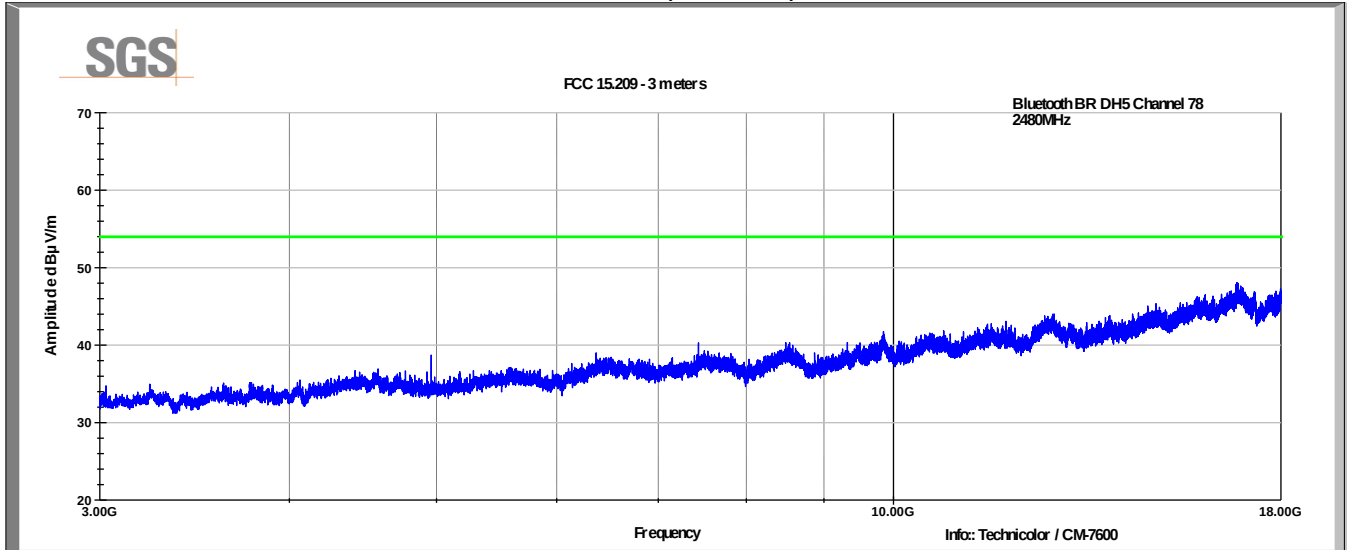


Bluetooth Channel 78
Horizontal (3-18GHz)

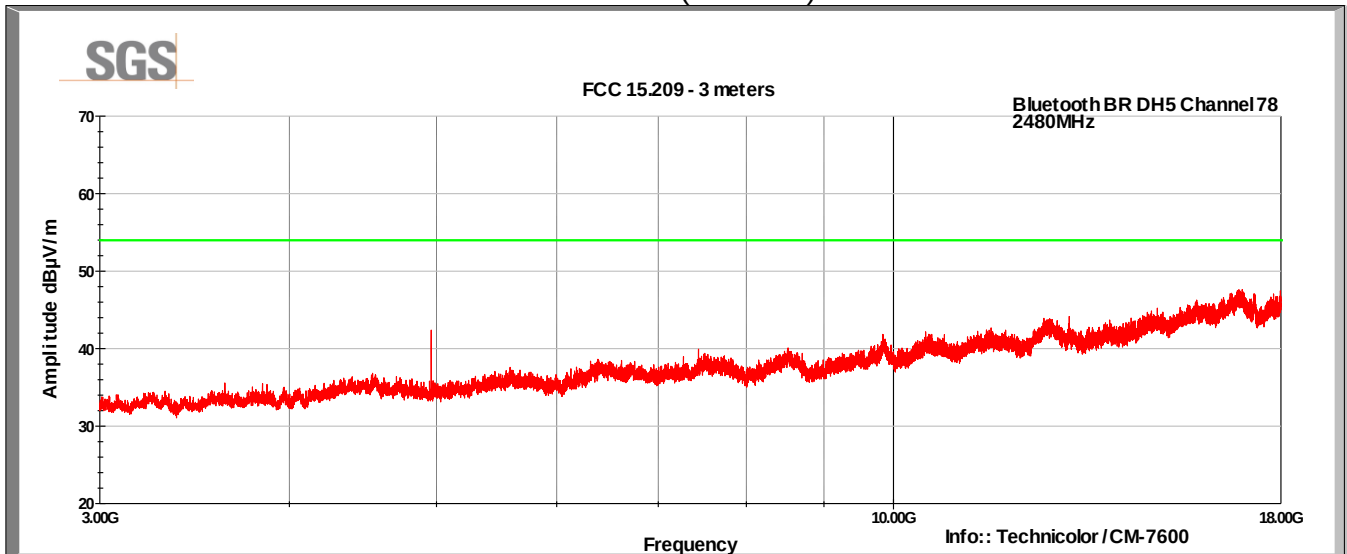


Worst-case spur: 42.4dBμV/m (Peak) @ 4960MHz (11.6dB Margin to average limit)

Bluetooth Channel 78
 Vertical (18-40GHz)

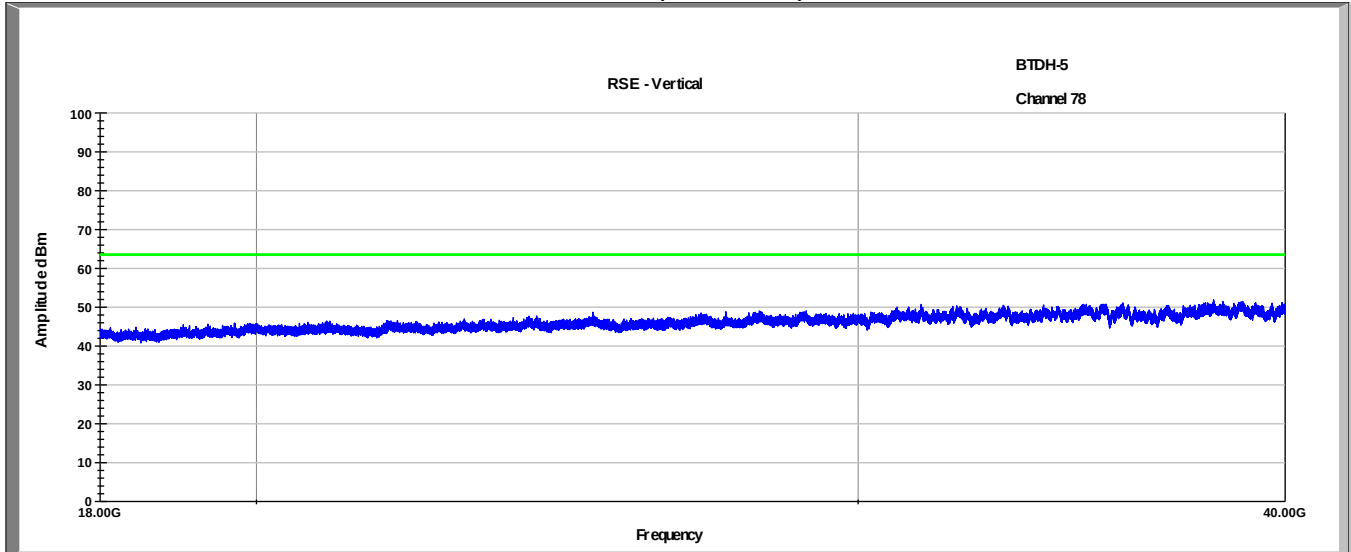

Bluetooth Channel 78
 Horizontal (18-40GHz)

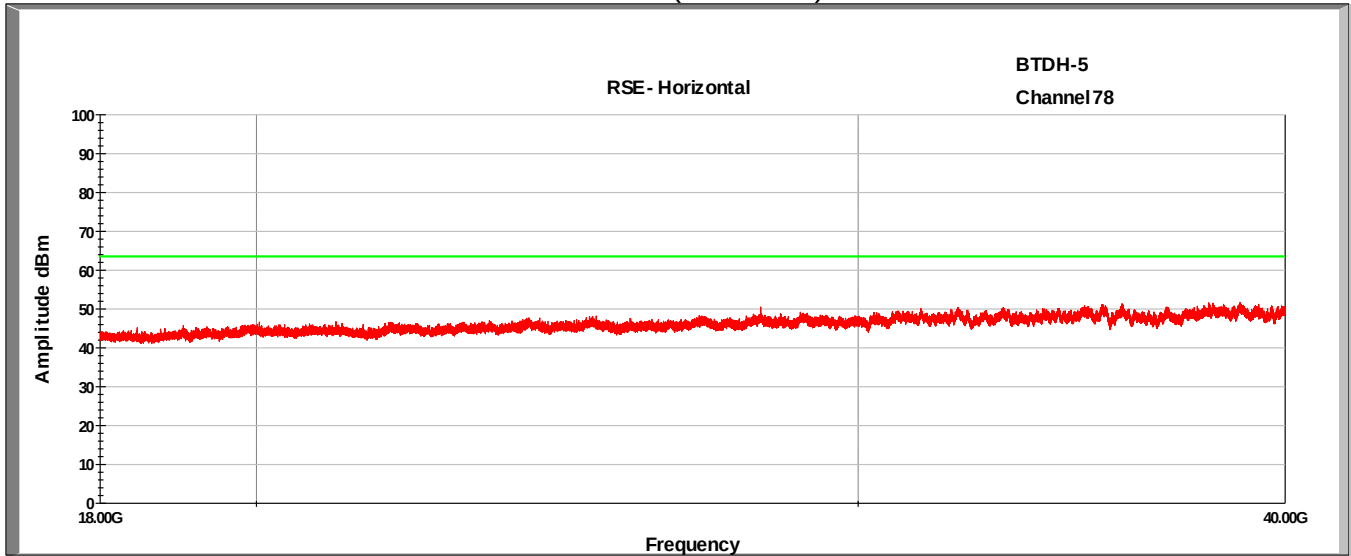

6.6 Test Data – Tabular Data

Frequency MHz	Raw QP (dBuV)	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	QP Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
39.50	47.6	V	222.0	175.0	14.6	0.4	32.3	30.4	40.0	-9.6
48.92	54.0	V	8.0	175.0	9.1	0.5	32.6	31.0	40.0	-9.0
52.94	58.6	V	230.0	175.0	7.9	0.5	32.9	34.2	40.0	-5.8
56.11	59.7	V	339.0	175.0	7.6	0.5	32.9	34.9	40.0	-5.1
700.00	49.8	V	-2.0	175.0	20.7	1.9	33.2	39.3	46.0	-6.7
800.00	51.4	V	141.0	175.0	22.1	2.1	33.2	42.4	46.0	-3.6
48.64	44.1	H	253.0	325.0	9.2	0.5	32.7	21.1	40.0	-18.9
53.31	49.4	H	271.0	325.0	7.9	0.5	32.9	24.9	40.0	-15.1
55.99	50.1	H	273.0	325.0	7.6	0.5	32.9	25.3	40.0	-14.7
700.00	48.4	H	206.0	175.0	20.7	1.9	33.2	37.8	46.0	-8.2
799.99	52.2	H	40.0	175.0	22.1	2.1	33.2	43.2	46.0	-2.9
899.99	47.8	H	26.0	175.0	23.2	2.2	33.2	40.0	46.0	-6.0
QP Value = Level + AF + CL - Amp										
Margin = QP Value - Limit										

No spurious emissions above 1GHz were within 10dB of the limit.

7 Radiated Emissions at Band Edge / Restricted Band

7.1 Test Result

Test Description	Test Specification	Test Result
Field strength of spurious radiation	ANSI C63.10: 2013 15.247(d), 15.35(b), 15.209, RSS-GEN S8.10	Compliant

7.2 Test Method

Field strength measurements were performed at the restricted band edges of 2390MHz and 2483.5MHz for each modulation. Measurements were made using the conducted methods defined in ANSI C63.10, Section 11.12.2.

Offset Calculations:

Offset calculations so that conducted measurements on the spectrum analyzer in dBμV represent field strength measurements in dBμV/m.

$$\text{Offset} = -20\log(D) + 104.8 - 107 + \text{CL} + \text{DC} + \text{AG}$$

$$\text{Offset}_{3m} = -11.7 + \text{CL} + \text{DC} + \text{AG}$$

D = 3m Distance
 CL = 0.9 dB Cable Loss
 DC = 1.1 dB (77.9%) Duty Cycle Correction Factor (Basic Rate)
 AG = 2.4 dB Antenna Gain

$$\text{Offset} = -7.3 \text{ dB}$$

7.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.1 °C
 Relative Humidity: 25.9 %
 Atmospheric Pressure: 97.8 kPa

7.4 Test Equipment

Test End Date: 8-Dec-2017


Tester: JOP

Equipment	Model	Manufacturer	Asset Number	Cal Due Date
EMI TEST RECEIVER	ESU40	ROHDE & SCHWARZ	B079629	25-Apr-2018
RF CABLE	SF102	HUBER & SUHNER	B079823	26-Jul-2018

Note: The equipment calibration period is 1 year.


7.5 Test Data – Restricted Band Edge

Basic Rate - DH5, Ch0

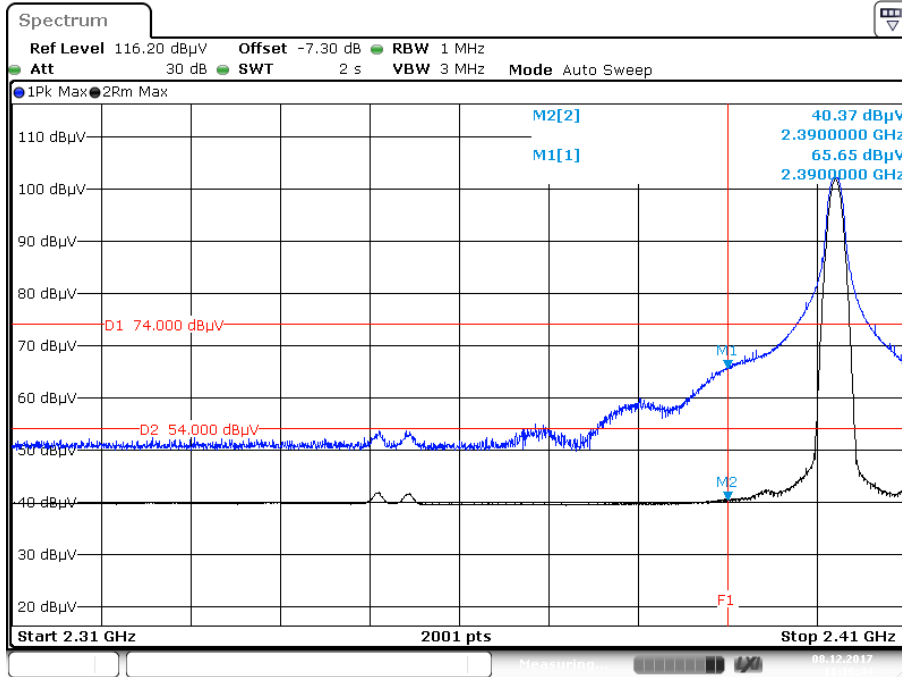


Date: 8 DEC 2017 11:10:44

Basic Rate - DH5, Ch78

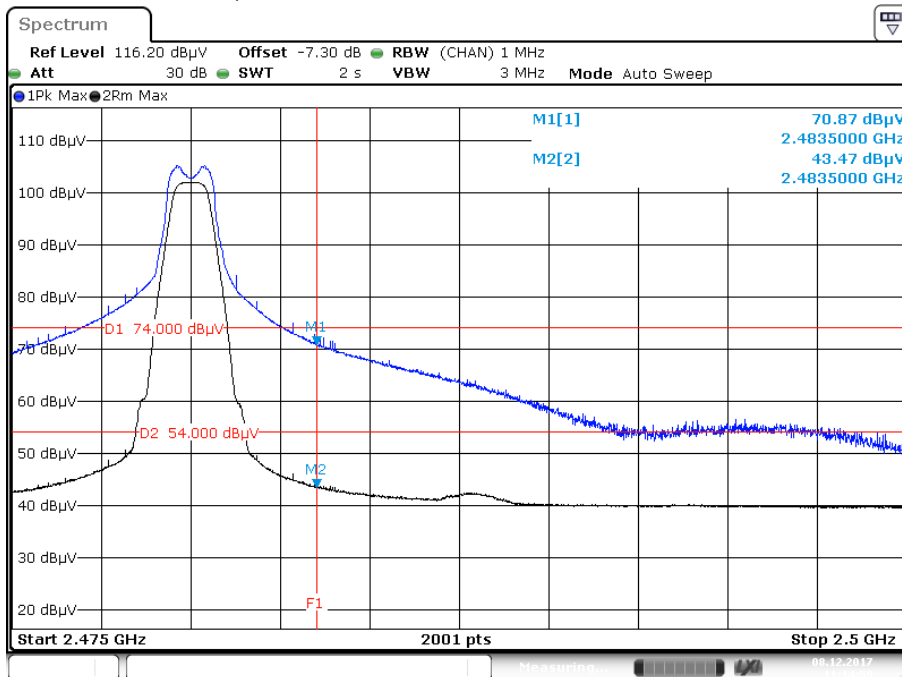


Date: 8 DEC 2017 11:14:59

EDR-2 - DH5, Ch0

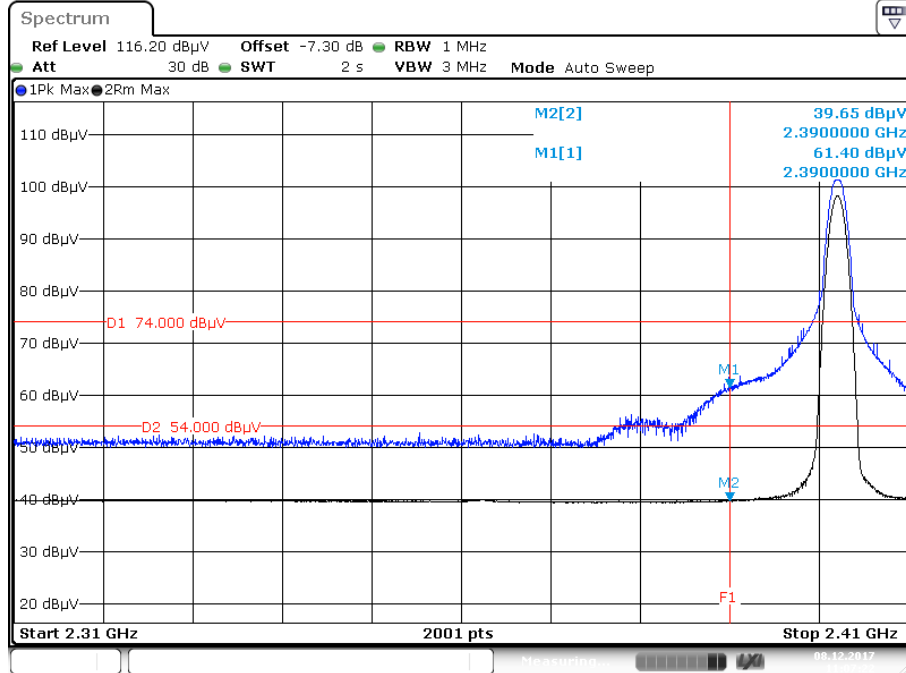


Date: 8 DEC 2017 11:07:23

EDR-2 - DH5, Ch78

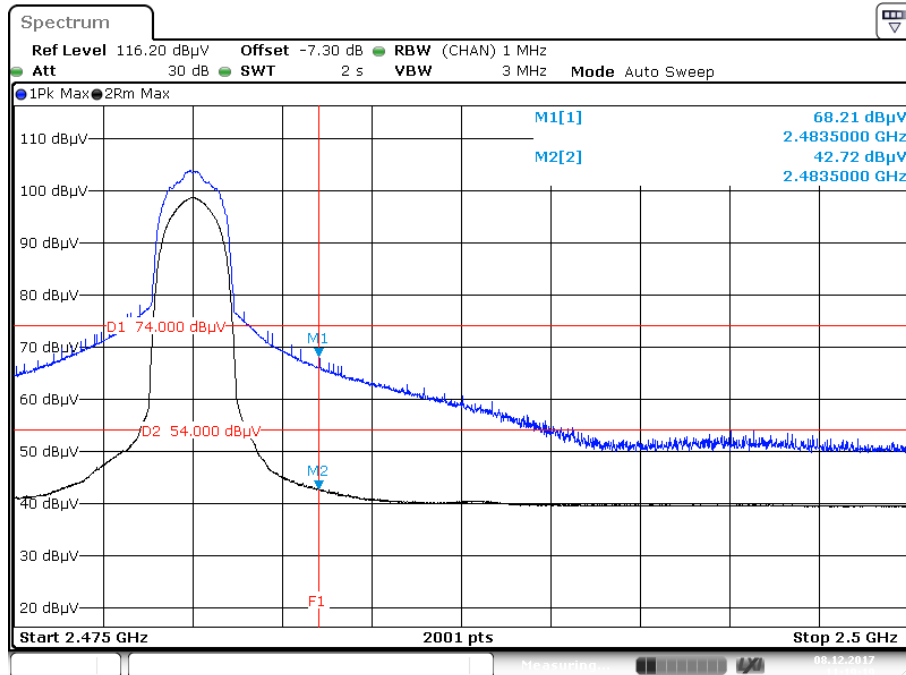


Date: 8 DEC 2017 11:19:19

EDR-3 - DH5, Ch0

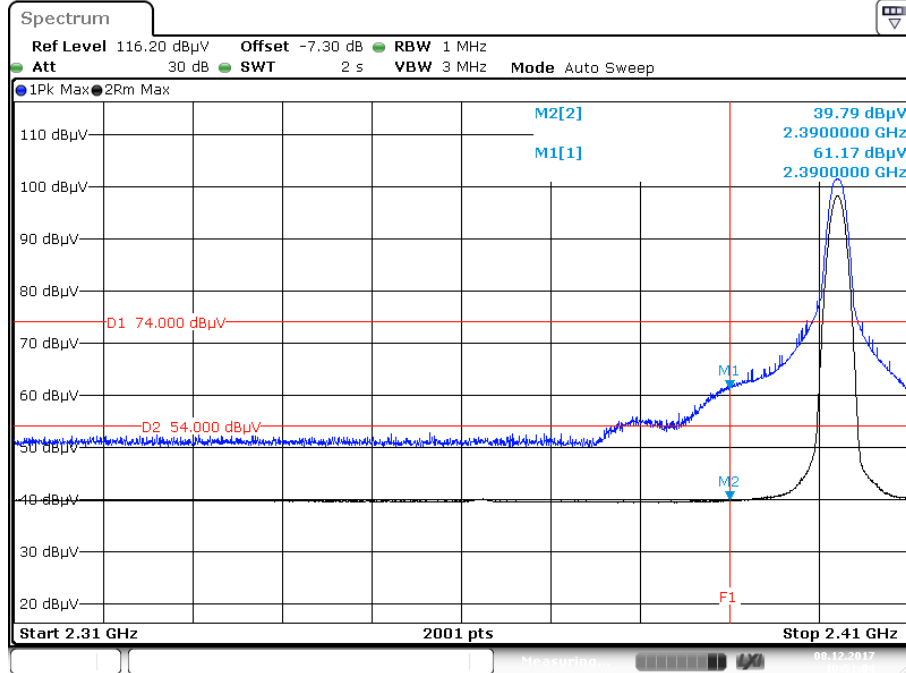

EDR-3 - DH5, Ch78

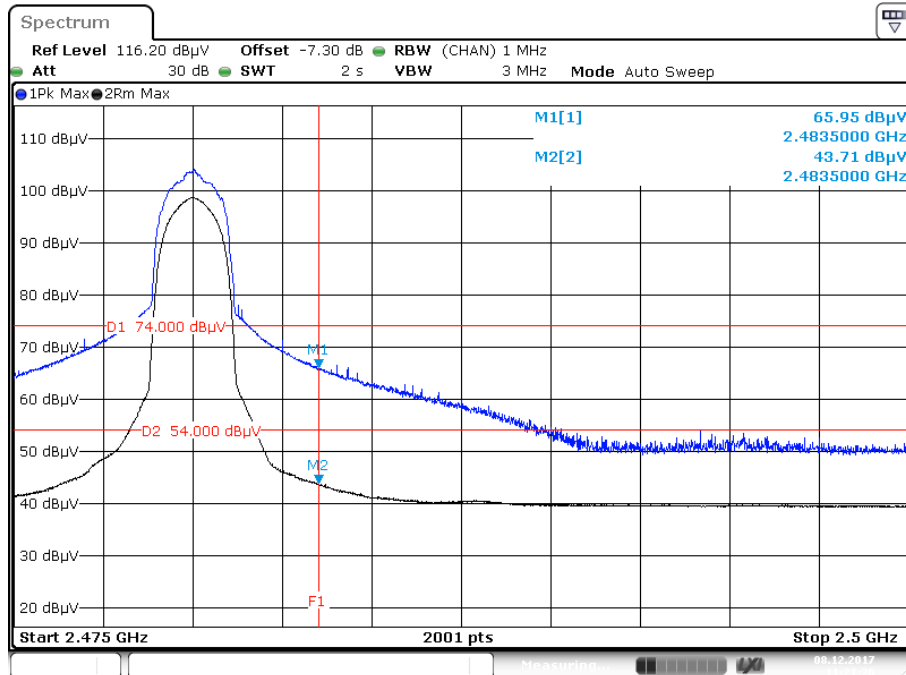

8 Pseudo-Random Hop Sequence

8.1 Test Result

Test Description	Test Specification	Test Result
Pseudo-Random Hop Sequence	15.247(a)(1), RSS-247 5.1(1) ANSI C63.10	Compliant ⁽¹⁾

Note (1): The theory of operation states that the device is Bluetooth and operates using a pseudo-random hopping technique.

8.2 Test Method

Compliance is demonstrated by Manufacturer's declaration or is stated in the Theory of Operation.

Requirement

The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset, while the long-term distribution appears evenly distributed.

9 Channel Separation

9.1 Test Result

Test Description	Test Specification	Test Result
Number of Hopping Channels	ANSI C63.10:2013 15.247(a)(1)(iii) RSS-247 5.1(2)	Compliant

9.2 Test Method

Measurements were taken using the methods defined in ANSI C63.10, Clause 7.8.2. The test data was measured using a spectrum analyzer with Peak detector (max hold) and a resolution bandwidth of 100 kHz. The trace was allowed to stabilize until all channels were displayed.

Requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

9.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.1 °C
Relative Humidity: 25.9 %
Atmospheric Pressure: 97.8 kPa

9.4 Test Equipment


Test End Date: 8-Dec-2017

Tester: JOP

Equipment	Model	Manufacturer	Asset Number	Cal Due Date
EMI TEST RECEIVER	ESU40	ROHDE & SCHWARZ	B079629	25-Apr-2018
RF CABLE	SF102	HUBER & SUHNER	B079823	26-Jul-2018


Note: The equipment calibration period is 1 year.

9.5 Test Data

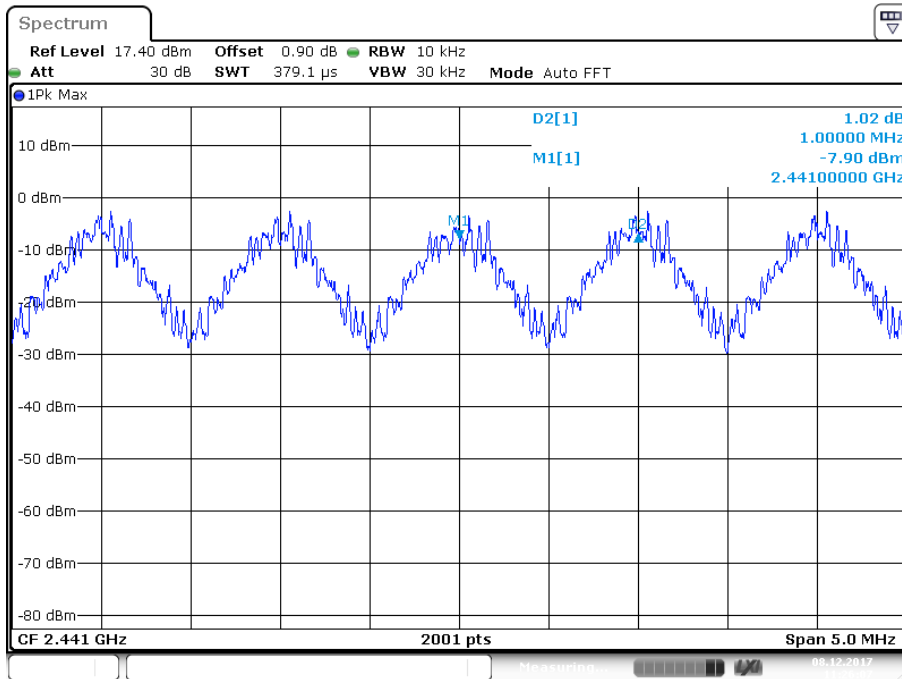

Date: 8 DEC 2017 11:26:08

20dB BW

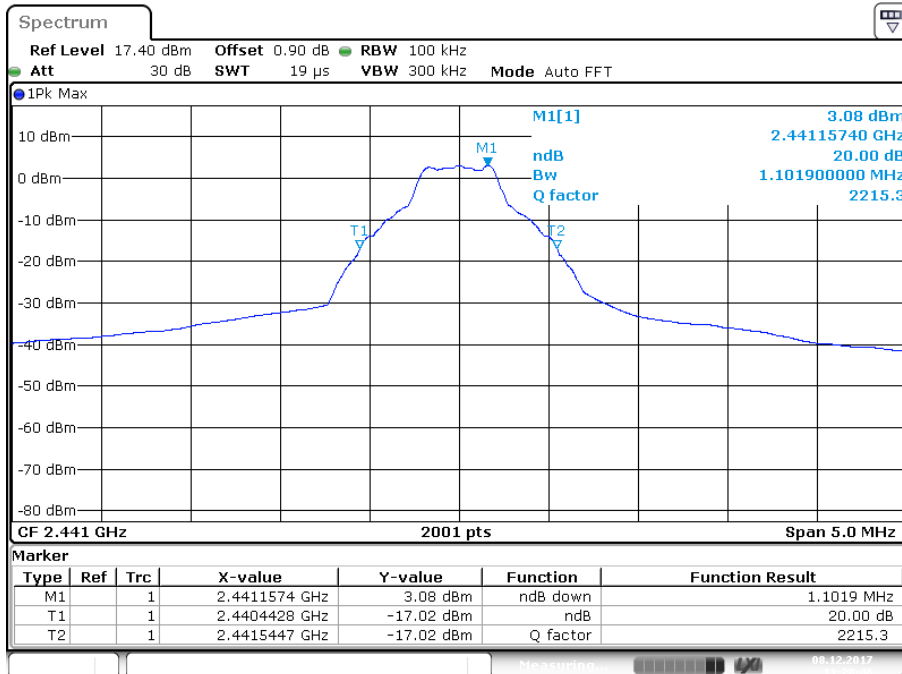

Date: 8 DEC 2017 11:28:45

10 Number of Hopping Channels

10.1 Test Result

Test Description	Test Specification	Test Result
Number of Hopping Channels	15.247(a)(1)(iii) RSS-247 5.1(4)	Compliant

10.2 Test Method

Measurements were taken using the methods defined in ANSI C63.10, Clause 7.8.3. The test data was measured using a spectrum analyzer with Peak detector (max hold) and a resolution bandwidth of 30 kHz. The trace was allowed to stabilize until all channels were displayed.

Requirement

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

10.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.1 °C
Relative Humidity: 25.9 %
Atmospheric Pressure: 97.8 kPa

10.4 Test Equipment

Test End Date: 8-Dec-2017


Tester: JOP

Equipment	Model	Manufacturer	Asset Number	Cal Due Date
EMI TEST RECEIVER	ESU40	ROHDE & SCHWARZ	B079629	25-Apr-2018
RF CABLE	SF102	HUBER & SUHNER	B079823	26-Jul-2018

Note: The equipment calibration period is 1 year.

10.5 Test Data

There are 79 Channels.

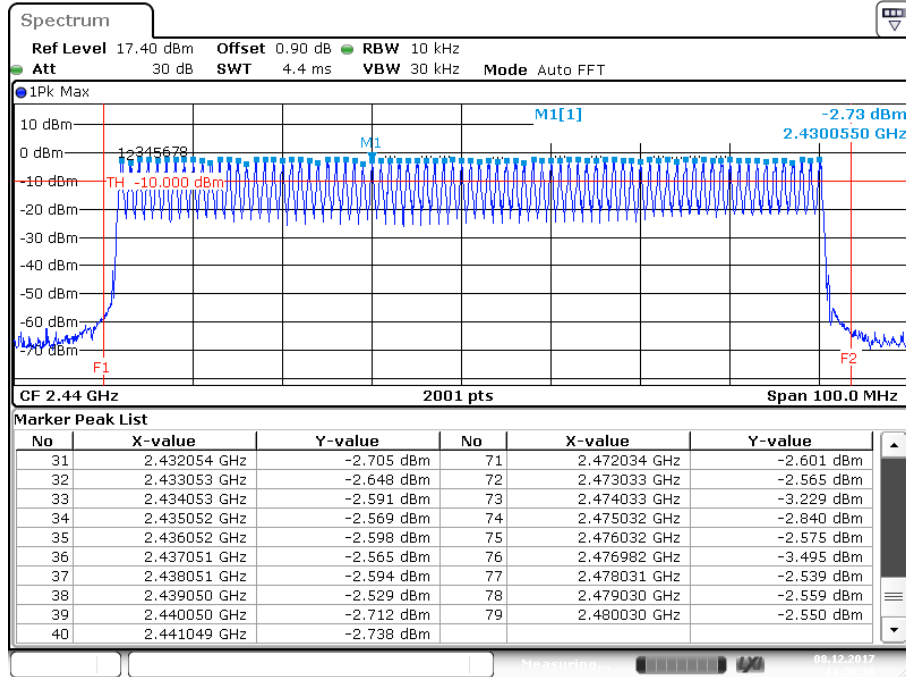

Date: 8 DEC 2017 11:35:36

11 Dwell Time

11.1 Test Result

Test Description	Test Specification	Test Result
Dwell Time	ANSI C63.10:2013 15.247(a)(1)(iii) RSS-247 5.1(4)	Compliant

11.2 Test Method

Measurements were taken using the methods defined in ANSI C63.10, Clause 7.8.4. The EUT was set to test mode which allowed it to be controlled by the Bluetooth Tester. The Bluetooth Tester was then set to operate on US/EU Hopping Scheme with pseudo-random data. For each packet type and data rate, the pulse width of the packet was measured and the pulses were counted over the total observation period.

Requirement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed ($0.4 \times 79 = 31.6s$).

11.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.1 °C
Relative Humidity: 25.9 %
Atmospheric Pressure: 97.8 kPa

11.4 Test Equipment

Test End Date: 8-Dec-2017

Tester: JOP

Equipment	Model	Manufacturer	Asset Number	Cal Due Date
EMI TEST RECEIVER	ESU40	ROHDE & SCHWARZ	B079629	25-Apr-2018
RF CABLE	SF102	HUBER & SUHNER	B079823	26-Jul-2018


Note: The equipment calibration period is 1 year.

11.5 Test Data


	Packet Type	Pulse Width ms	Pulses per 31.6 sec	Dwell Time Sec	Limit	Result
BR	DH1	0.394	310	0.122	0.4	PASS
	DH3	1.653	150	0.248	0.4	PASS
	DH5	2.900	100	0.290	0.4	PASS
EDR2	DH1	0.397	320	0.127	0.4	PASS
	DH3	1.653	170	0.281	0.4	PASS
	DH5	2.900	130	0.377	0.4	PASS
EDR3	DH1	0.398	320	0.127	0.4	PASS
	DH3	1.650	170	0.281	0.4	PASS
	DH5	2.900	100	0.290	0.4	PASS

11.6 Sample Plots

DH1 Packet Type, Basic Rate

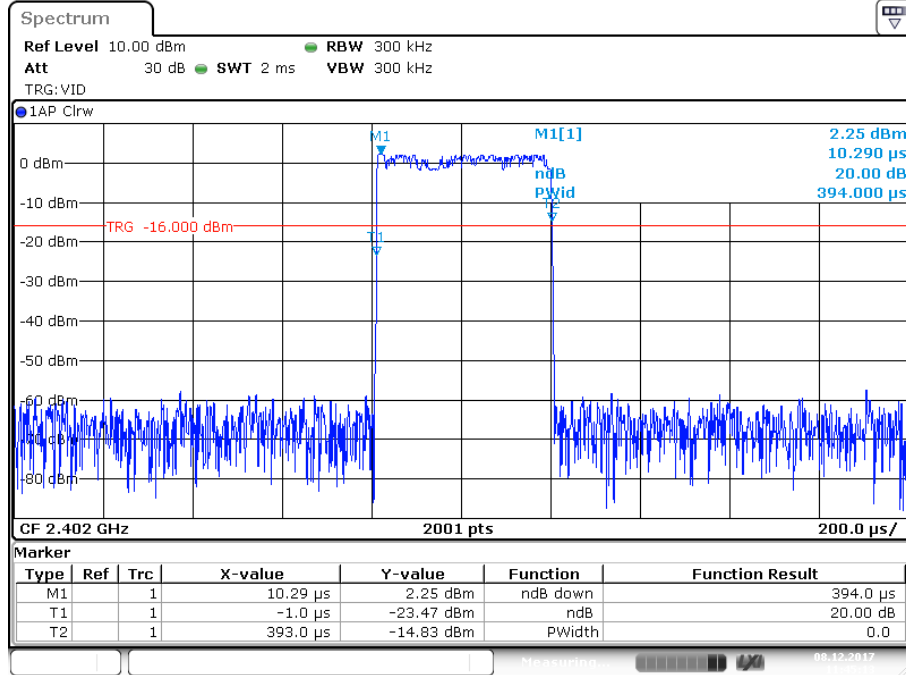


Date: 8 DEC 2017 11:45:13

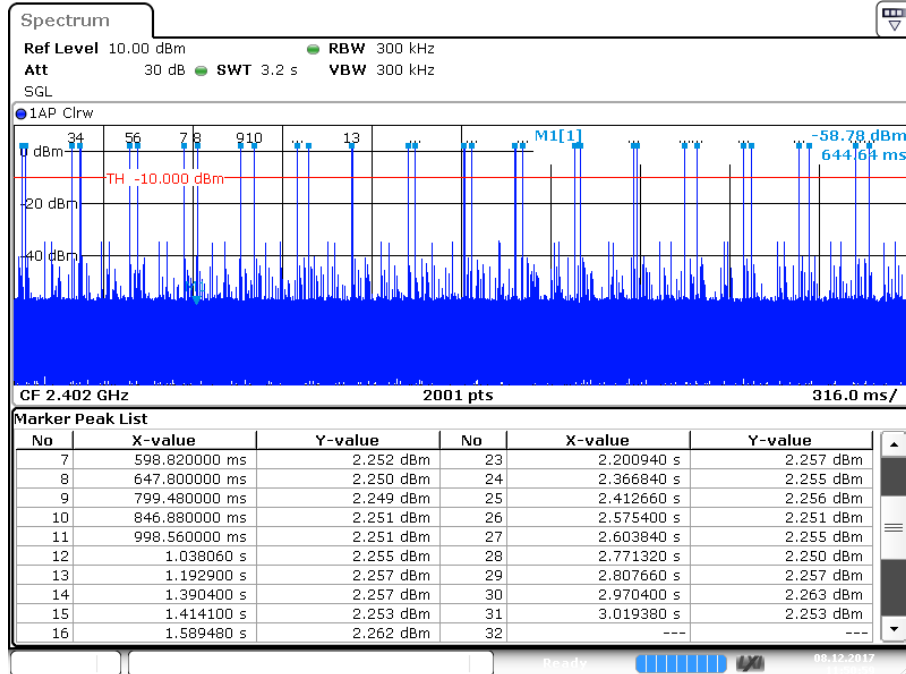


Date: 8 DEC 2017 11:51:00

DH3 Packet Type, Basic Rate

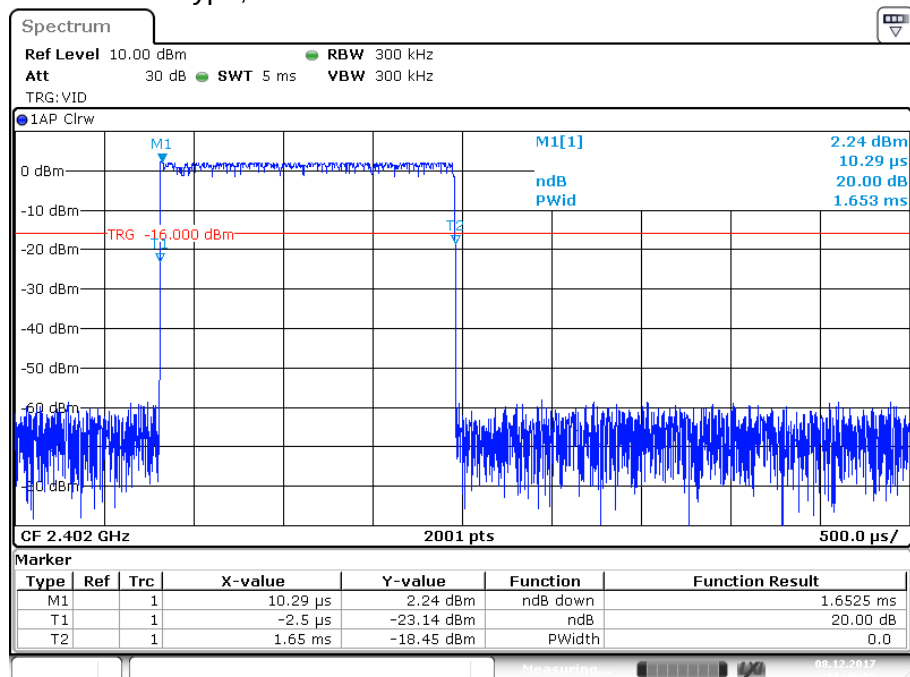


Date: 8.DEC.2017 11:46:05

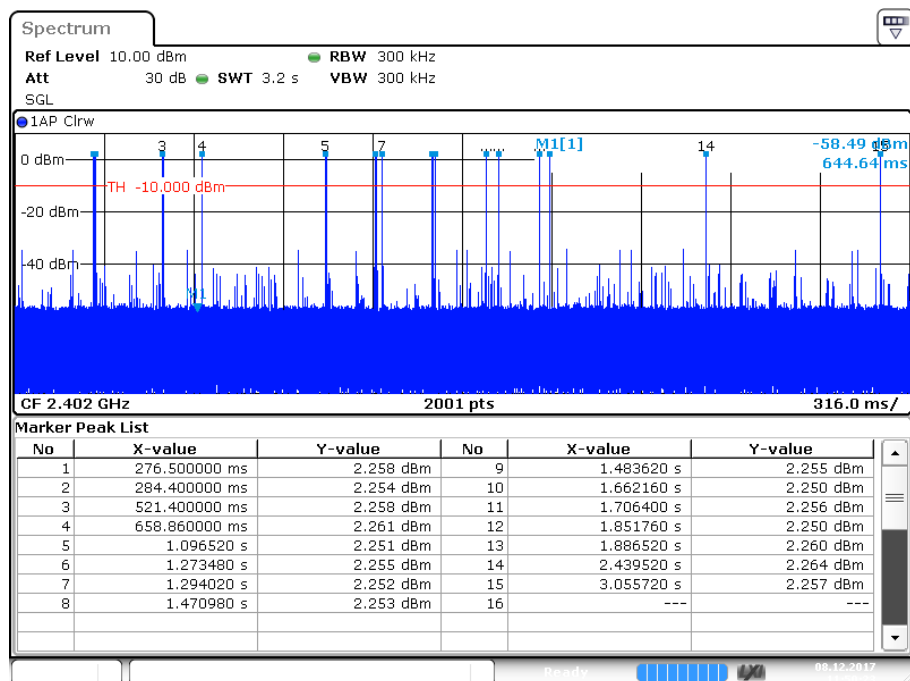


Date: 8 DEC 2017 11:50:23

DH5 Packet Type, Basic Rate

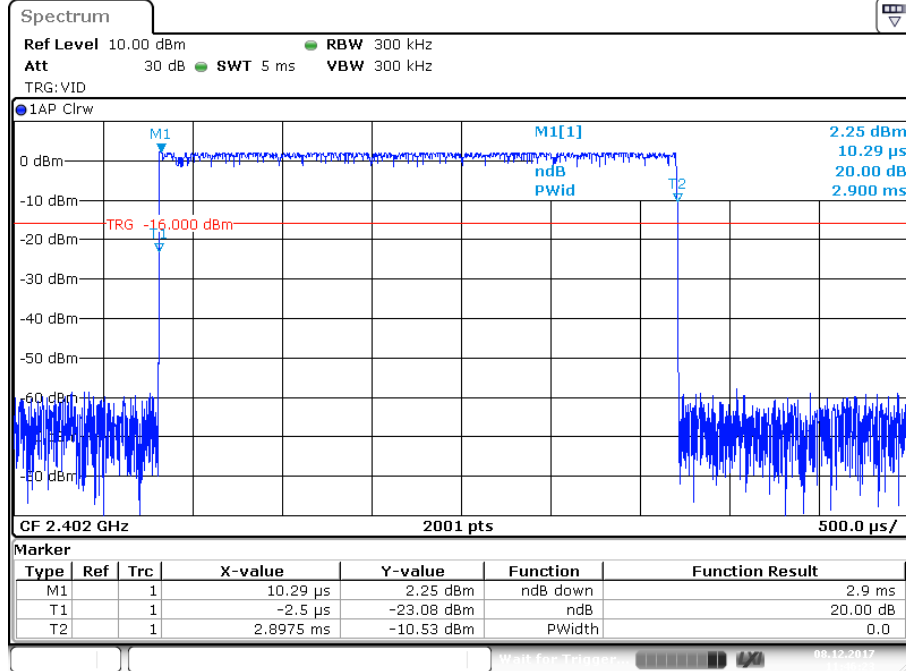

Date: 8 DEC 2017 11:46:23

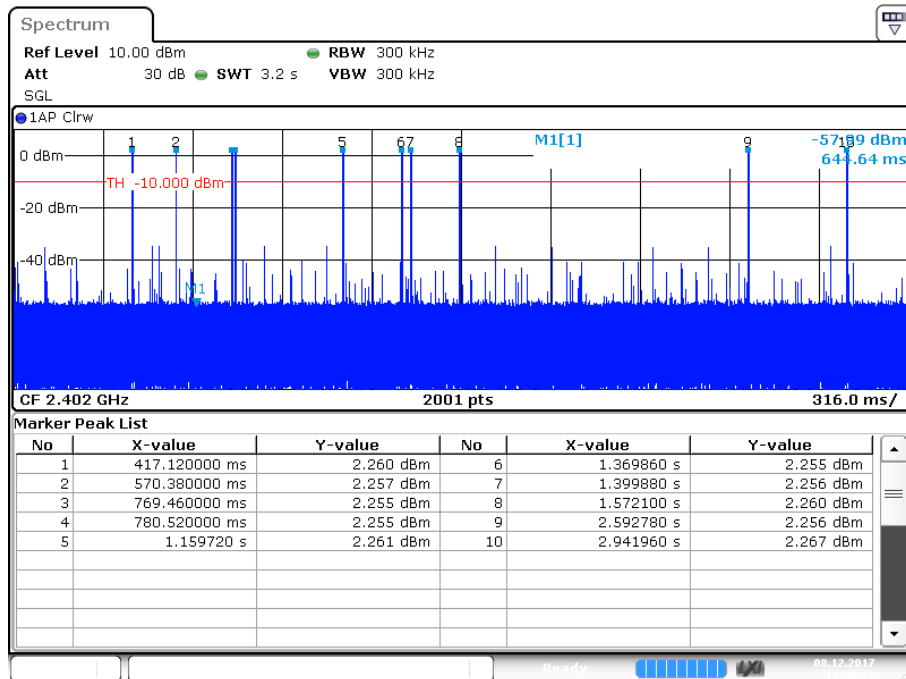

Date: 8 DEC 2017 11:49:17

12 Conducted Emissions

12.1 Test Result

Test Description	Basic Standards	Test Result
Conducted Emissions, Class B	RSS-GEN, Issue 4 ANSI C63.4:2014	Compliant

12.2 Test Method

With the receivers resolution bandwidth was set to 9 kHz the exploratory scans were performed over the measuring frequency range (0.15MHz to 30MHz) using a max hold mode incorporating a Peak detector and Average detector and using the TILE! software. The final test data was measured using a Quasi-Peak detector and Average detector and compared against the limits indicated in the table below.

Frequency Range	Class A Limits (dBuV)	Class B Limits (dBuV) CISPR
0.15 to 0.5 MHz	Avg 66 QP 79	Avg 56 to 46 QP 66 to 56
0.5 to 5 MHz	Avg 60 QP 73	Avg 46 Pk 56
5 to 30 MHz	Avg 60 QP 73	Avg 50 Pk 60

12.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 23.8°C
 Relative Humidity: 21.2%

12.4 Test Equipment

Test End Date: 12-Dec-2017

Tester: JOP

Equipment	Model	Manufacturer	Asset Number	Cal Due Date
EMI TEST RECEIVER	ESU8	ROHDE & SCHWARZ	B085759	25-Jul-2018
LINE IMPEDANCE STABILIZATION NETWORK	NNB 51	TESEQ	B085882	8-Nov-2018
RF CABLE	CBL-25FT-NMNM	MINI-CIRCUITS	B094941	25-Jul-2018


Note: The equipment calibration period is 1 year.

Software:

“Conducted Emissions” TILE! profile dated Dec 2015

12.5 Test Data


Line 1 Conducted Emissions Plot 150-30MHz

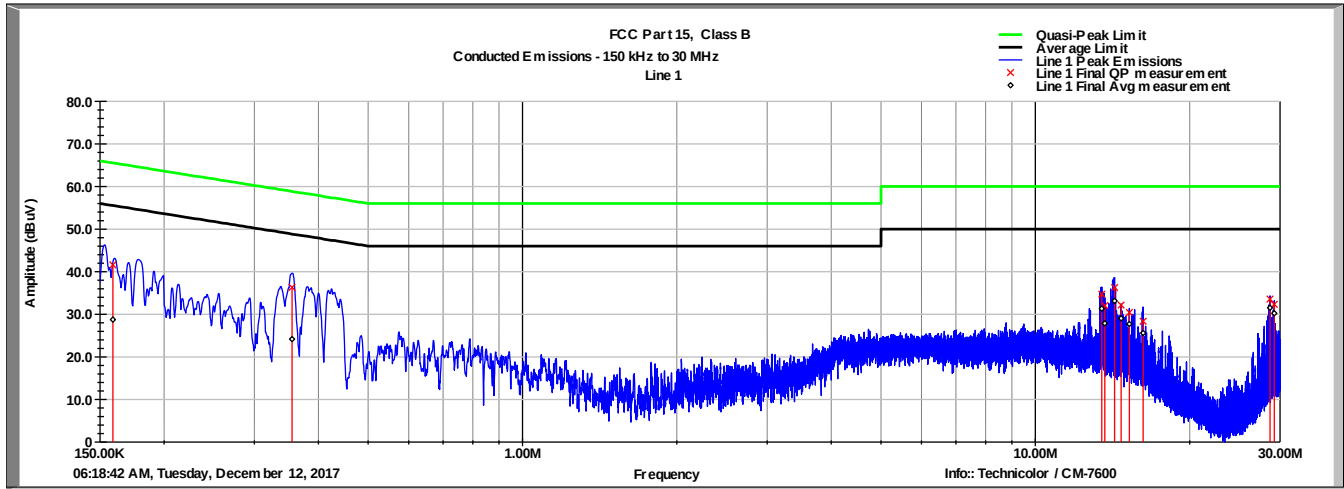

Line 1 Conducted Emissions Data 150-30MHz

Frequency MHz	QP Value dBuV	QP Limit dBuV	QP Margin dB	Avg Value dBuV	Avg Limit dBuV	Avg Margin dB
0.159	41.6	65.5	-24.0	28.7	55.5	-26.8
0.355	36.3	58.8	-22.5	24.2	48.8	-24.6
13.479	34.7	60.0	-25.3	31.3	50.0	-18.7
13.662	32.0	60.0	-28.0	27.9	50.0	-22.1
14.273	36.3	60.0	-23.7	33.1	50.0	-16.9
14.701	32.2	60.0	-27.8	29.0	50.0	-21.0
15.251	30.4	60.0	-29.6	27.7	50.0	-22.3
16.231	28.3	60.0	-31.7	25.6	50.0	-24.4
28.685	33.6	60.0	-26.4	31.5	50.0	-18.5
29.234	32.3	60.0	-27.7	30.2	50.0	-19.8

Neutral Conducted Emissions Plot 150-30MHz

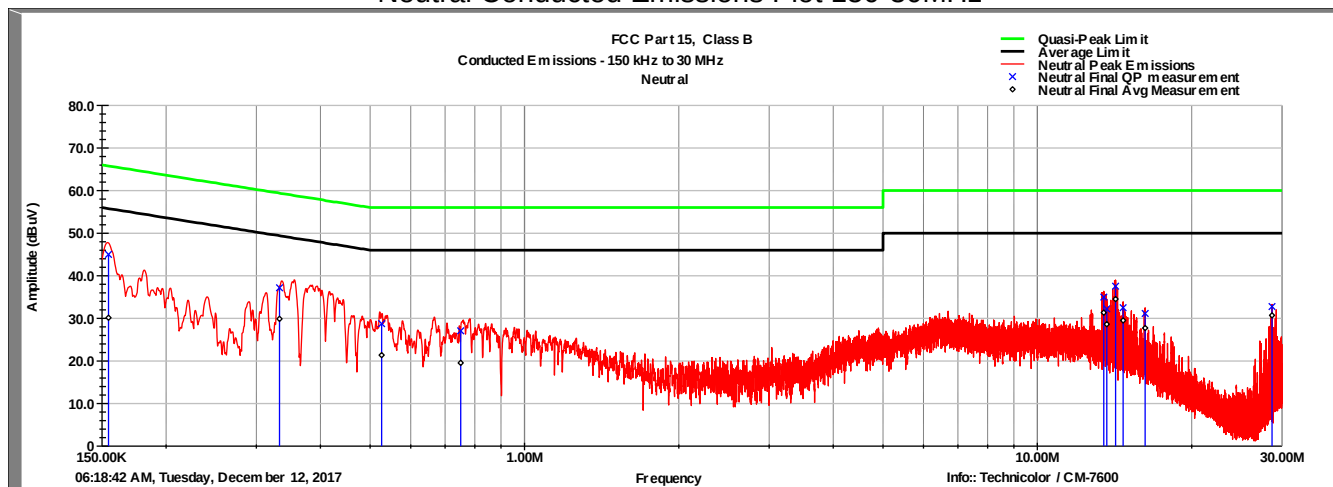

Neutral Conducted Emissions Data 150-30MHz

Frequency MHz	QP Value dBuV	QP Limit dBuV	QP Margin dB	Avg Value dBuV	Avg Limit dBuV	Avg Margin dB
0.155	45.0	65.7	-20.7	30.1	55.7	-25.6
0.333	37.2	59.4	-22.2	29.9	49.4	-19.5
0.527	28.7	56.0	-27.3	21.4	46.0	-24.6
0.751	27.1	56.0	-28.9	19.5	46.0	-26.5
13.481	35.0	60.0	-25.0	31.3	50.0	-18.7
13.661	32.2	60.0	-27.8	28.6	50.0	-21.4
14.212	37.6	60.0	-22.4	34.5	50.0	-15.5
14.700	32.5	60.0	-27.5	29.5	50.0	-20.5
16.227	31.1	60.0	-28.9	27.7	50.0	-22.3
28.685	32.8	60.0	-27.2	30.7	50.0	-19.3

13 Revision History

Revision Level	Description of changes	Revision Date
0	Initial release	08 December 2017