

Notes:

Item	Content	Detail	Format
1	Model	Model: UIW4020WOW	Arial Bold, 6pt
2	Input	Input: 12V DC 1.5A	Arial, 4.5pt
3	SN + barcode	SN: MMMTPPHHYWWDLNNNNN + Barcode, see SN definition rule below	code128,height 3mm Arial, 4.5pt
4	Ethernet MAC + barcode	Ethernet MAC: XXXXXXXXXXXX + Barcode	code128,height 3mm Arial, 4.5pt
5	FCC SDoC Authorization	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.	Arial, 4.5pt
6	FCC LOGO	FCC LOGO	height 5.5mm
7	UL LOGO	E198937 (where 198937 is UL Report File Number.)	UL LOGO 7.3mm E198937 Arial, 4.5pt
8	Made In	Made in Vietnam Manufactured by Technicolor	Arial, 4.5pt
9	1. Canada radio ISED ID number, 2. FCC ID.	ISED IC ID: 431C-UIW4020A FCC ID: G95-UIW4020A	Arial, 4.5pt
10	Google ID+ Barcode	Google ID: XXXXXXXXXXXX + barcode	code128,height 3mm Arial, 4.5pt
11	WiFi MAC 5G + Barcode	WiFi MAC 5: XXXXXXXXXXXX + barcode	code128,height 3mm Arial, 4.5pt
12	WiFi MAC 2.4G + Barcode	WiFi MAC 2.4: XXXXXXXXXXXX + barcode	code128,height 3mm Arial, 4.5pt
13	Technicolor LOGO	Technicolor LOGO	height 4mm

SN definition rule:

Serial number definition:

297 9 30 00 8 50 3 9 00001

MMM T PP HH Y WW D L NNNNN

Digits 1-3,MMM = Model code. 297=UIW4020WOW;

Digit 4,T = Type of serial number; 9=Set-Top-Box S/N

Digits 5,6, PP = Plant Code. 30 = Foxconn Vietnam;

Digits 7,8, HH = Hardware version ID. For UIW4020WOW FGR, HH=01,

it's Decimal format for GPIO47+GPIO46+GPIO45.

if no HW change, it will keep no change.

Digit 9, Y = Year of production; 8=2018,9=2019,0=2020,1=2021

Digits 10,11,WW = Week of production;

Digit 12,D = Day of production; 1=Sunday,2=Monday...

7=Saturday

Digit 13,L =Production Line;



Digits 14-18, NNNNN = Counter. Reset to 00001 every day;

background color: PANTONE Process Black C

printing color: White

標籤製作黏貼方式/U46X437.01/00/4 of 8

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	2019.02.22	First Release	Cun
2.0	NA	NA	2019.03.28	update HH define and add certification No.	Cun
3.0	NA	NA	2019.05.31	update UL logo	Cun

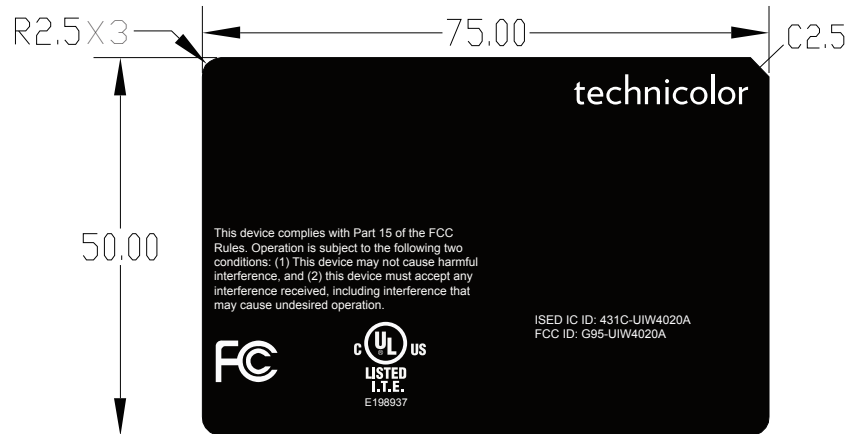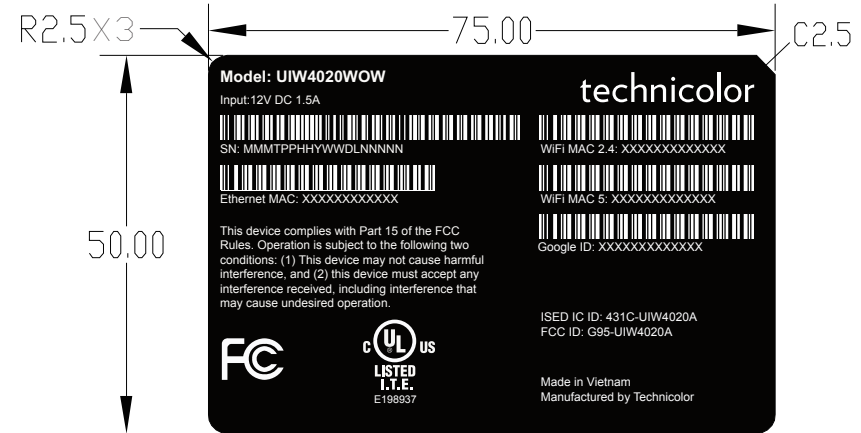

vendor supply

1 MATERIAL (SPEC.) 50#壓花Mylar+25#PET						SCALE 1:1		 Foxconn Industrial Internet 富士康工业互联网			
FINISH						SHEET 1/1					
Select						V		UNIT	PART NAME		DESIGNED Zhou Cun
 Tol. Dim.	PARTITION	CARTON (water-based printing)			Label	USR	MM	Housing label			
		Dircut	Pr. content	Pr. orientation							
0~6	±2(Dim. 3)	±2	±1.5(Dim. 2)	±3(Dim. 5)	0.20		SIZE	MODEL	PART NO.	CHECKED	
6~50	±2	±2	±1.5	±5	0.20		A4	U46X437.01	500.02372.025	Aveline Chen	
50~200	±2	±3	±2	±5	0.25						
200~500	±2	±3	±3	±5	0.30			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED	
500~790	±3	±3	±3	±10	0.50			UIW4020WOW			
DRAFT TOLERANCE		± 0.2°		CRITICAL DIM. MARK		*					

Model: URW4020WQW

Input 12V DC 1.5A



S/N: MMUTPRPhYWWGLNNNN



Ethernet MAC: XXXXXXXXXXXXX

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



technicolor



WiFi MAC 3.4: XXXXXXXXXXXXX



WiFi MAC 5: XXXXXXXXXXXXX



Google ID: XXXXXXXXXXXXX

ISED IC ID: 431C-URW4020A
FCC ID: GR5-URW4020A

Made in Vietnam
Manufactured by Technicolor

location

Notes:

Item	Content	Detail	Format
1	Model	Model/Modele: UIW4020COG	Arial Bold, 6pt
2	Input	Input/Energie: 12V DC 1.5A	Arial, 4.5pt
3	SN + barcode	SN: MMTTPPHHYWWDLNNNNN + Barcode, see SN definition rule below	code128,height 3mm Arial, 4.5pt
4	Ethernet MAC + barcode	Ethernet MAC: XXXXXXXXXXXX + Barcode	code128,height 3mm Arial, 4.5pt
5	FCC SDoC Authorization	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.	Arial, 4.5pt
6	FCC LOGO	FCC LOGO	height 5.5mm
7	UL LOGO	E198937 (where 198937 is UL Report File Number.)	UL LOGO 7.3mm E198937 Arial, 4.5pt
8	Made In	Made in Vietnam Manufactured by Technicolor	Arial, 4.5pt
9	1. The EMC statement for ICES003; 2. Canada radio ISSED ID number, 3. FCC ID.	CAN ICES-3 (B) / NMB-3 (B) ISED IC ID: 431C-UIW4020A FCC ID: G95-UIW4020A	Arial, 4.5pt
10	WiFi MAC 5G + Barcode	WiFi MAC 5: XXXXXXXXXXXX + barcode	code128,height 3mm Arial, 4.5pt
11	WiFi MAC 2.4G + Barcode	WiFi MAC 2.4: XXXXXXXXXXXX + barcode	code128,height 3mm Arial, 4.5pt
12	Technicolor LOGO	Technicolor LOGO	height 4mm

SN definition rule:

Serial number definition:

293 9 30 00 8 50 3 9 00001

MMM T PP HH Y WW D L NNNNN

Digits 1-3,MMM = Model code. 293=UIW4020COG;

Digit 4,T = Type of serial number; 9=Set-Top-Box S/N

Digits 5,6, PP = Plant Code. 30 = Foxconn Vietnam;

Digits 7,8, HH = Hardware version ID. For UIW4020COG FGR, HH=01,

it's Decimal format for GPIO47+GPIO46+GPIO45.

if no HW change, it will keep no change.

Digit 9, Y = Year of production; 8=2018,9=2019,0=2020,1=2021

Digits 10,11,WW = Week of production;



Digit 12,D = Day of production; 1=Sunday,2=Monday...

7=Saturday

Digit 13,L =Production Line;

Digits 14-18, NNNNN = Counter. Reset to 00001 every day;

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	2018.12.26	First Release	Cun
2.0	NA	NA	2019.04.03	change "Double-D" to "double-D"	Cun
3.0	NA	NA	2019.04.16	delete "Manufactured under license....."	Cun
4.0	NA	NA	2019.05.31	update UL logo	Cun

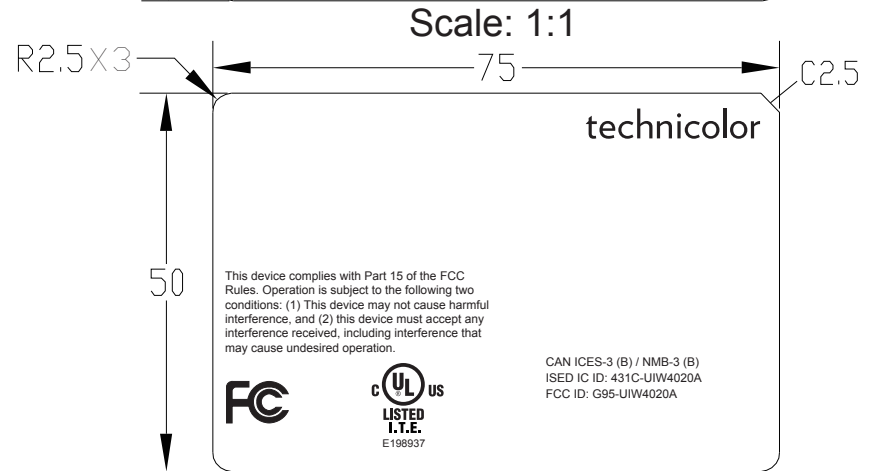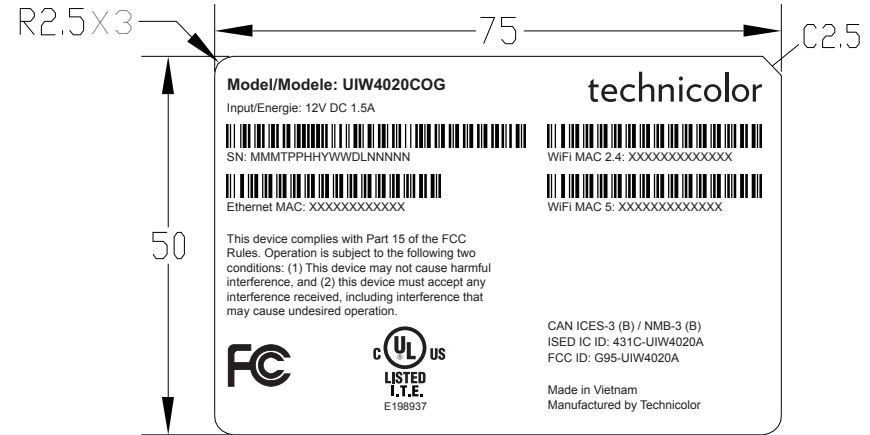

vendor supply

MATERIAL (SPEC.)						SCALE		 Foxconn Industrial Internet 富士康工业互联网							
50#壓花Mylar(matte white)						1:1									
FINISH						SHEET									
						1/1									
Select					V		UNIT	PART NAME			DESIGNED				
 Tol. Dim.	PARTITION	CARTON (water-based printing)			Label	USR	MM	Housing label			Zhou Cun				
		Dircut	Pr. content	Pr. orientation											
0~6	±2(Dim. 3)	±2	±1.5(Dim. 2)	±3(Dim. 5)	0.20		SIZE	MODEL	U46X437.00	PART NO.	500.02371.005	CHECKED			
6~50	±2	±2	±1.5	±5	0.20								CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
50~200	±2	±3	±2	±5	0.25										
200~500	±2	±3	±3	±5	0.30										
500~790	±3	±3	±3	±10	0.50										
DRAFT TOLERANCE		± 0.2°		CRITICAL DIM. MARK		*									



location

Notes:

Item	Content	Detail	Format
1	Model	Model/Modele: UIW4020TLU	Arial Bold, 6pt
2	Input	Input/Energie:12V DC 1.5A	Arial, 4.5pt
3	SN + barcode	SN: MMTTPPHHYWWDLNNNNN + Barcode, see SN definition rule below	code128,height 3mm Arial, 4.5pt
4	Ethernet MAC + barcode	Ethernet MAC: XXXXXXXXXXXX + Barcode	code128,height 3mm Arial, 4.5pt
5	FCC SDoC Authorization	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.	Arial, 4.5pt
6	FCC LOGO	FCC LOGO	height 5.5mm
7	UL LOGO	UL LOGO E198937 (where 198937 is UL Report File Number.)	UL LOGO 7.3mm E198937 Arial, 4.5pt
8	Made In	Made in Vietnam Manufactured by Technicolor	Arial, 4.5pt
9	1. The EMC statement for ICES003; 2. Canada radio ISSED ID number, 3. FCC ID.	CAN ICES-3 (B) / NMB-3 (B) ISED IC ID: 431C-UIW4020A FCC ID: G95-UIW4020A	Arial, 4.5pt
10	Google ID+ Barcode	Google ID: XXXXXXXXXXXXX + barcode	code128,height 3mm Arial, 4.5pt
11	WiFi MAC 5G + Barcode	WiFi MAC 5: XXXXXXXXXXXXX + barcode	code128,height 3mm Arial, 4.5pt
12	WiFi MAC 2.4G + Barcode	WiFi MAC 2.4: XXXXXXXXXXXXX + barcode	code128,height 3mm Arial, 4.5pt
13	Technicolor LOGO	Technicolor LOGO	height 4mm

SN definition rule:

Serial number definition:

298 9 30 00 8 50 3 9 00001

MMM T PP HH Y WW D L NNNNN

Digits 1-3,MMM = Model code. 298=UIW4020TLU;

Digit 4,T = Type of serial number; 9=Set-Top-Box S/N

Digits 5,6, PP = Plant Code. 30 = Foxconn Vietnam;

Digits 7,8, HH = Hardware version ID. For UIW4020TLU FGR, HH=01, it's Decimal format for GPIO47+GPIO46+GPIO45.

if no HW change, it will keep no change.

Digit 9, Y = Year of production; 8=2018,9=2019,0=2020,1=2021

Digits 10,11,WW = Week of production;


Digit 12,D = Day of production; 1=Sunday,2=Monday...

7=Saturday


Digit 13,L =Production Line;

Digits 14-18, NNNNN = Counter. Reset to 00001 every day;

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	2019.03.14	First Release	Cun
2.0	NA	NA	2019.04.19	update layout	Cun
3.0	NA	NA	2019.05.31	update UL logo	Cun

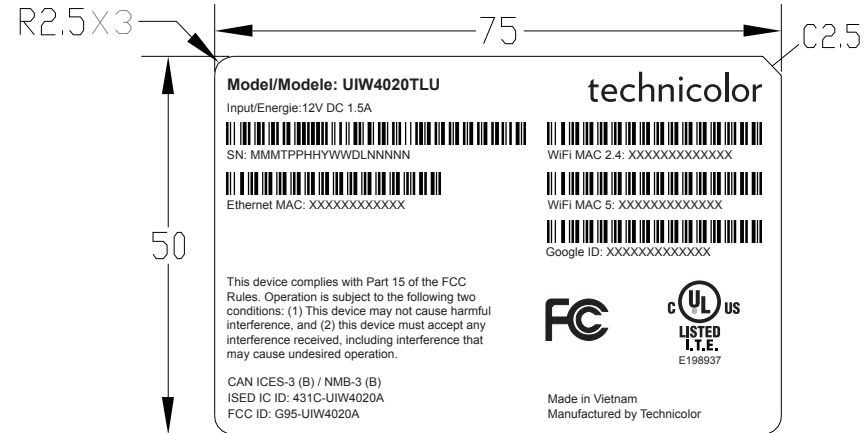

Scale: 1:1

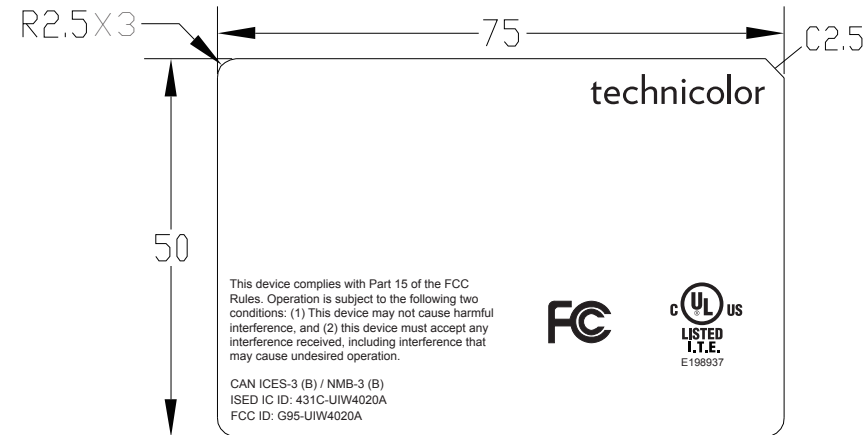

vendor supply

1 MATERIAL (SPEC.) 50#壓花Mylar(matte white)						SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG			
FINISH						SHEET 1/1					
Select					V		UNIT	PART NAME		DESIGNED	
Tol. Dim.	PARTITION	CARTON (water-based printing)			Label	USR	MM	Housing label		Zhou Cun	
		Dicut	Pr. content	Pr. orientation							
0~6	±2(Dim. 3)	±2	±1.5(Dim. 2)	±3(Dim. 5)	0.20		SIZE	MODEL		CHECKED	
6~50	±2	±2	±1.5	±5	0.20		A4	U46X437.02		500.02373.005	
50~200	±2	±3	±2	±5	0.25					Aveline Chen	
200~500	±2	±3	±3	±5	0.30						
500~790	±3	±3	±3	±10	0.50			CUSTOMER MODEL		CUSTOMER PART NO.	
DRAFT TOLERANCE		± 0.2°		CRITICAL DIM. MARK		*		UIW4020TLU		APPROVED	

Model/Modèle: URW4020TLU

Input/Entrée: 12V DC 1.5A

SN: WMTTPPHYWDLNMBUS

Ethernet MAC: XXXXXXXXXX

technicolor

WiFi MAC 2: XXXXXXXXXX

WiFi MAC 1: XXXXXXXXXX

Google ID: XXXXXXXXXX

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.





CAN ICES-3 (B) / NMB-3 (B)
ISED IC ID: 431C-URW4020A
FCC ID: DAB-LN64020A



Made in Vietnam
Manufactured by Technicolor

location

The picture just refer to label placement,housing color is black

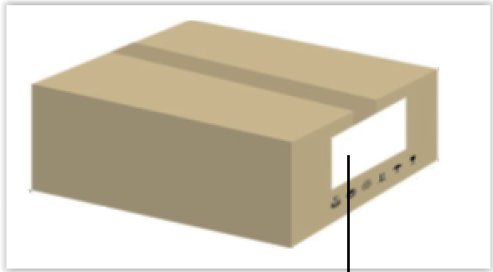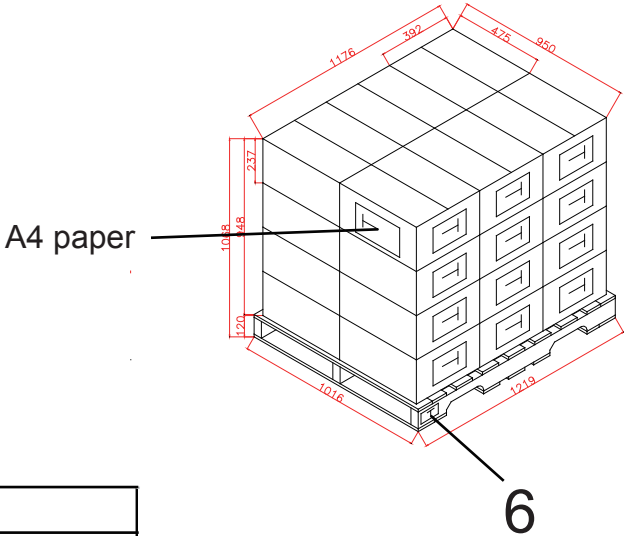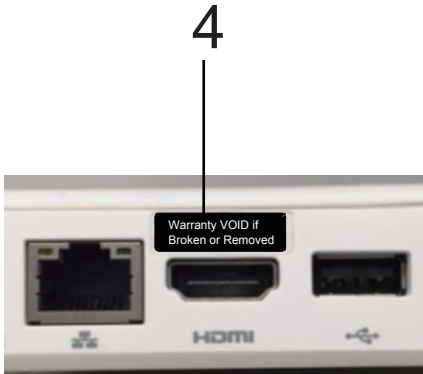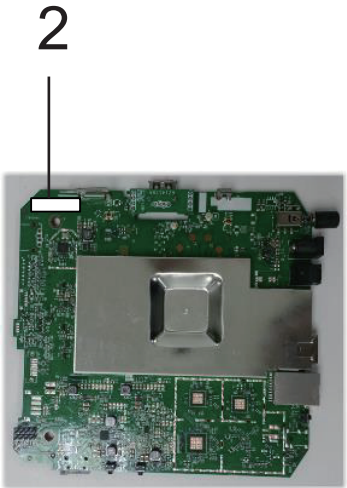

1 suspend

	pallet sheet	A4 paper	
6	pallet label	503.00089.015	1/480
5	carton label	504.00783.005	1/20
4	Warranty label	504.01717.025	1
3	housing label	500.0XXXX.005	1
2	Main board label	503.00039.015	1
1	HH label	503.00096.005	1
Item	Description	Foxconn PN	QTY


Notes:

- Font: Arial, 4pt
- Barcode: Code128, height: 2.5mm
- Narrow bar width: 3 dots (600 dpi printer)
- Barcode content: Serial number(18digits)
Material: 50# mylar
Serial number definition:
299 0 30 00 8 50 3 9 00001
MMM T PP HH Y WW D L NNNNN
Digits 1-3,MMM = Model code. MMM=299=UIW4020DRV1;
Digit 4,T = Type of serial number;
0 =Main Board S/N, 1=Front panel board S/N,
2=Power supply board S/N, 9=Set-Top-Box S/N
Digits 5,6, PP = Plant Code. 30 = Foxconn Vietnam;
Digits 7,8, HH = Hardware version ID. For UIW4020WOW FGR, HH=01,
it's Decimal format for GPIO47+GPIO46+GPIO45.
if no HW change, it will keep no change.
Digit 9, Y = Year of production; 8=2018,9=2019, 0=2020, 1=2021
Digits 10,11,WW = Week of production;
Digit 12,D = Day of production; 1=Sunday,2=Monday... 7=Saturday
Digit 13,L =Production Line;
Digits 14-18, NNNNN = Counter. Reset to 00001 every day;

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	2019.03.16	First Release	Cun
1.0	NA	NA	2019.03.28	update MMM and HH define	Cun




Scale: 1:1



Scale: 2:1

MATERIAL (SPEC.)							SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG					
FINISH							SHEET 1/1							
Select						V		UNIT	PART NAME Main board label			DESIGNED Zhou Cun		
Tol. Dim.	PARTITION	CARTON (water-based printing)				Label	USR	MM						
		Dircut	Pr. content	Pr. orientation										
0~6	±2(Dim. 2.3)	±2	±1.5(Dim. 2.2)	±3(Dim. 2.5)		0.20		SIZE	MODEL U46X437.01		PART NO. 503.00039.015		CHECKED Aveline Chen	
6~50	±2	±2	±1.5	±5		0.20		A4						
50~200	±2	±3	±2	±5		0.25								
200~500	±2	±3	±3	±5		0.30								
500~790	±3	±3	±3	±10		0.50			CUSTOMER MODEL UIW4020WOW		CUSTOMER PART NO.		APPROVED	
DRAFT TOLERANCE		±0.2°		CRITICAL DIM. MARK		*								
D							C		B			A		


REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	2019.03.16	First Release	Cun

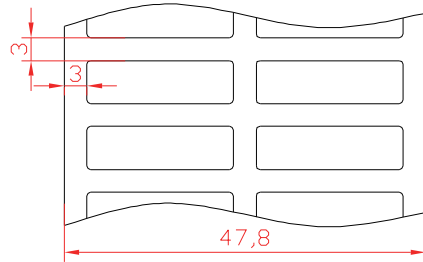

packaging style



Scale: 1:1

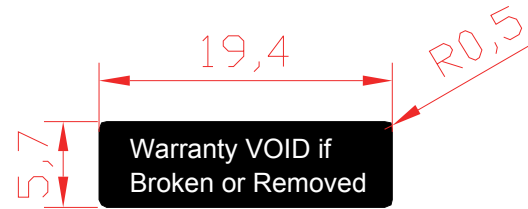

Scale: 2:1

- 1.Material: Tamper evident label material,50# 黑色陽版防偽PET
Thickness: 0.05±0.003mm
when removed to leave behind the word"VOID"
- 2.Label color: printing color White
background color: Pantone Process Black C
- 3.label size: 19.4*5.7mm
4. Liner: white glassine release paper
5. Adhesive: Acrylic
Thickness: 0.02±0.002mm
6. Adhesion to steel: 0.3~0.85KG/inch
Initial tack>= 5# ball
Holding power>= 8hr/kg*inch2
7. Must be ROHS cpmpliant.
8. paste on housing directly.

MATERIAL (SPEC.)							SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG			
FINISH							SHEET 1/1					
Select						V		UNIT MM	PART NAME			DESIGNED Zhou Cun
Tol. Dim.	PARTITION	CARTON (water-based printing)				Label	USR	SIZE A4	Warranty label			CHECKED Aveline Chen
		Dircut	Pr. content	Pr. orientation								
0~6	±2(Dim. 3)	±2	±1.5(Dim. 2)		±3(Dim. 5)	0.20		CUSTOMER MODEL UIW4020WOW	PART NO. 504.01717.025		APPROVED	
6~50	±2	±2	±1.5		±5	0.20						
50~200	±2	±3	±2		±5	0.25						
200~500	±2	±3	±3		±5	0.30						
500~790	±3	±3	±3		±10	0.50			CUSTOMER PART NO.			
DRAFT TOLERANCE		±0.2°		CRITICAL DIM. MARK		*						
D						C		B		A		

Notes:
carton label size:135*205mm

Item	Content	Detail	Format
1	Model	Model: UIW4020WOW	Arial, 8pt
2	Quantity	Qty:20 units	Arial, 8pt
3	Carton ID	Carton ID: CMMMPYWWDNNNN + barcode	Arial, 8pt, code128, height 4mm
4	Made in	Made in Vietnam Manufactured by Technicolor	Arial, 6pt
5	SN + barcode	SN:MMMTPPHYWDLNNNNN + barcode	Arial, 6pt, code128, height 4mm
6	Ethernet MAC + Barcode	MAC: XXXXXXXXXXXX	Arial, 6pt, code128, height 4mm

Carton SN definition:

Digit	SN details	Example	Remark
1	Constant	C	Always "C" for Carton ID
2-4	Model Code	MMM=297	297=UIW4020WOW
5-6	Plant Code	PP=30	30=Foxconn Vietnam
7	Year	Y=8	8=2018,9=2019
8-9	Week	WW=45	range from 01 to 53
10	Day	D=4	1=Sunday, 2=Monday, 3=Tuesday, etc
11-14	Counter	NNNN=0001	Range from 0001 to 9999

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	2019.03.16	First Release	Cun
1.0	NA	NA	2019.04.10	remove “.” from MAC	Cun

Model: UIW4020WOW
Qty: 20 units
Carton ID: CMMMPYWWDNNNN

technicolor
Made in Vietnam
Manufactured by Technicolor

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

SN:MMMTPPHYWDLNNNNN
MAC: XXXXXXXXXXXX

Scale: 1:2

MATERIAL (SPEC.)						SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG			
art paper						SHEET 1/1					
FINISH											
Select						V		UNIT	PART NAME		DESIGNED
Dim.	Tol.	PARTITION	CARTON (water-based printing)			Label	USR	MM	carton label		Zhou Cun
			Dicut	Pr. content	Pr. orientation						
0~6	±2(Dim. 2)	±2	±1.5(Dim. 2)	±3(Dim. 5)	0.20			SIZE	MODEL	PART NO.	CHECKED
6~50	±2	±2	±1.5	±5	0.20			A4	U46X437.01	504.00783.005	Aveline Chen
50~200	±2	±3	±2	±5	0.25				CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
200~500	±2	±3	±3	±5	0.30				UIW4020WOW		
500~790	±3	±3	±3	±10	0.50						
DRAFT TOLERANCE			±0.2°		CRITICAL DIM. MARK	*					

1. All font: Arial.
SN/MAC font height 10pt
Pallet ID font height 15pt
others font height 12pt
2. List all the STB S/N and MAC with Barcode of the STBs
included in the pallet. the STB S/N and MAC are bar-coded with code-128.
barcode height 6mm
3. a complete pallet sheet is consist of 18 pages, it lists all 480 STB S/N per pallet

D		C		B		A
REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION		SIGNATURE
00	N/A	N/A	2019.03.16	First Release		Cun
1.0	NA	NA	2019.04.10	remove “.” from MAC		Cun

Digit	SN details	Example	Remark
1	Constant	P	Always "P" for Pallet ID
2-4	Model Code	MMM=297	297=UIW4020WOW
5-6	Plant Code	PP=30	30=Foxconn Vietnam
7	Year	Y=8	8=2018,9=2019
8-9	Week	WW=45	range from 01 to 53
10	Day	D=4	1=Sunday, 2=Monday, 3=Tuesday, etc
11-14	Counter	NNNN=0001	Range from 0001 to 9999

Manufacture: Technicolor Technicolor PID: UIW4020WOW	Description: Production unit of UIW4020WOW Date of mfg: xx/xx	
Pallet ID: MPMMPYWDNNN		
 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X
 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X
 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X
 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X
 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X
 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X
 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X
 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X
 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X	 SN: MM1MTPPHYYWDLNNNN  MAC: XXX00000000X
Page x of xx		

Scale: 1:3

MATERIAL (SPEC.)					A4 paper		SCALE 1:1		FOXconn HON HAI PRECISION IND. CO., LTD CNSBG			
FINISH							SHEET 1/1					
Select					V		UNIT	PART NAME pallet sheet label			DESIGNED	
Tol. Dim.	PARTITION	CARTON (water-based printing)			Label	USR	MM				Zhou Cun	
		Dircut	Pr. content	Pr. orientation								
0~6	±2(Dim.±3)	±2	±1.5(Dim.±2)	±3(Dim.±5)	0.20		SIZE	MODEL	PART NO.	CHECKED		
6~50	±2	±2	±1.5	±5	0.20		A4	U46X437.01		Aveline Chen		
50~200	±2	±3	±2	±5	0.25							
200~500	±2	±3	±3	±5	0.30							
500~790	±3	±3	±3	±10	0.50			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED		
DRAFT TOLERANCE		±0.2°		CRITICAL DIM. MARK		*	UIW4020WOW					

REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
0.0	NA	NA	2019.03.16	First Release	Cun

LOCATION	LOCATIONNAME
0	新竹
1	中山
2	福田
3	土城
4	泰詠
5	精陽
6	廣川
7	台表
8	宏鉅
9	新進
A	香港
B	國璉
C	捷克
D	FOR DUMMY
E	國基
F	龍華E5
G	龍華N系列
H	TMM
I	保留
J	龍華E6
K	南寧
L	環電
M	EASTAR
N	CBTI
O	保留
P	龍華RMA
Q	重慶
R	上海RMA
S	CPEII
T	煙台
U	越南桂武CMB
V	煙台
Y	越南黃田
Z	越南桂武CPEII



SCALE:1:1

Notes :

1. P/N:U46X437.01,Font:Arial,H:6.3mm(output height)
2. PIPPYWWSSSS
P:Pallet
I:Location code, refer to foxconnlocation code table
PP:product line name
Y:last digit of year
WW:Week
SSSS:code stream/Serial number(0001-zzzz,reset to 0001 every two weeks)
Font:Arial ,H:4.7mm(output height)
Code 128,height:8mm
Barcode Content:PIPPYWWSSSS
3. REV:VVSS Font:Arial ,H:4.7mm(output height)
VV:the engineering version(refer to Foxconn label Rev column in the cover of the MFG document)
SS:the version of A300/A400 product(refer to Doc Rev.in the cover of MFG document)

MATERIAL (SPEC.)						80g art paper	SCALE 1:1	FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG					
FINISH							SHEET 1/1						
Select							UNIT mm	PART NAME pallet label			DESIGNED Zhou Cun		
Tol. Dim.	PARTITION	CARTON (water-based printing)			Label	USR	SIZE A4	MODEL U46X437.01	PART NO. 503.00089.015	REV.	CHECKED		
		Dircut	Pr. content	Pr. orientation							Sunny Wu		
0~6	±2(Dim.≥3)	±2	±1.5(Dim.≥2)	±3(Dim.≥5)	0.20								
6~50	±2	±2	±1.5	±5	0.20								
50~200	±2	±3	±2	±5	0.25								
200~500	±2	±3	±3	±5	0.30		CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED P.K				
500~790	±3	±3	±3	±10	0.50								
DRAFT TOLERANCE		±0.2°		CRITICAL DIM. MARK		*							