


|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5745 MHz |

## Vertical

80 dBuV/m

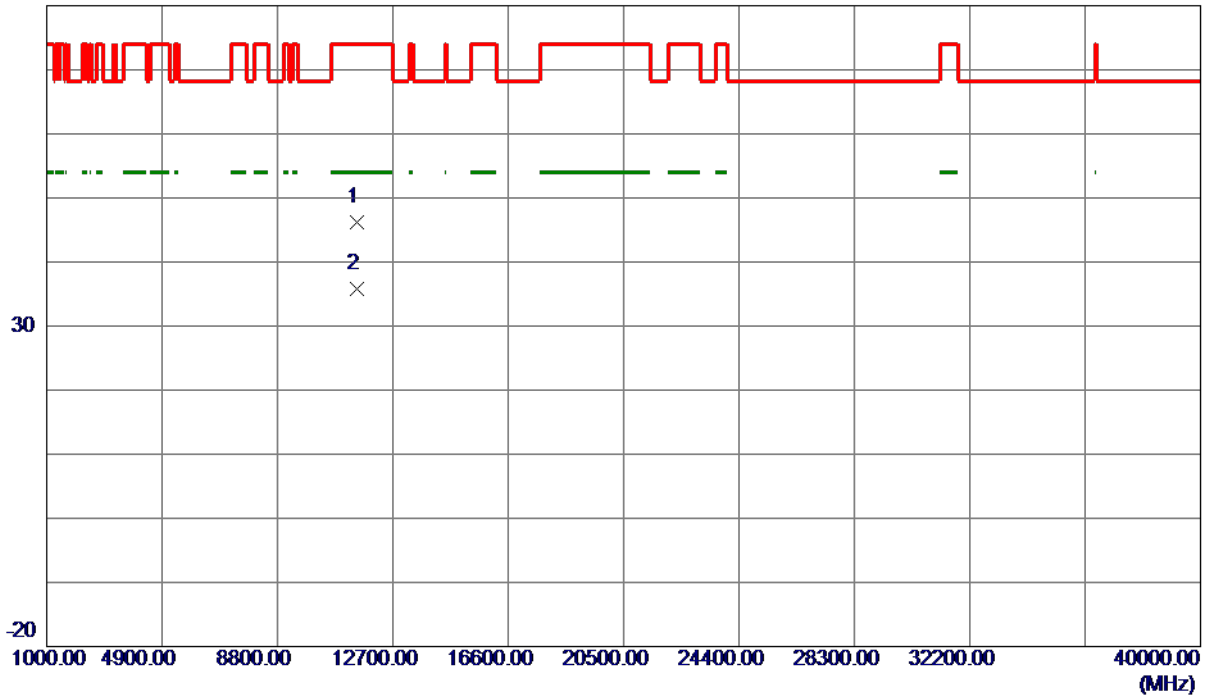

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11481.7750   | 34.18                      | 12.06                   | 46.24                     | 74.00           | -27.76       | Peak     |         |
| 2 * | 11498.5250   | 23.80                      | 12.07                   | 35.87                     | 54.00           | -18.13       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5745 MHz |

## Horizontal

130 dBuV/m

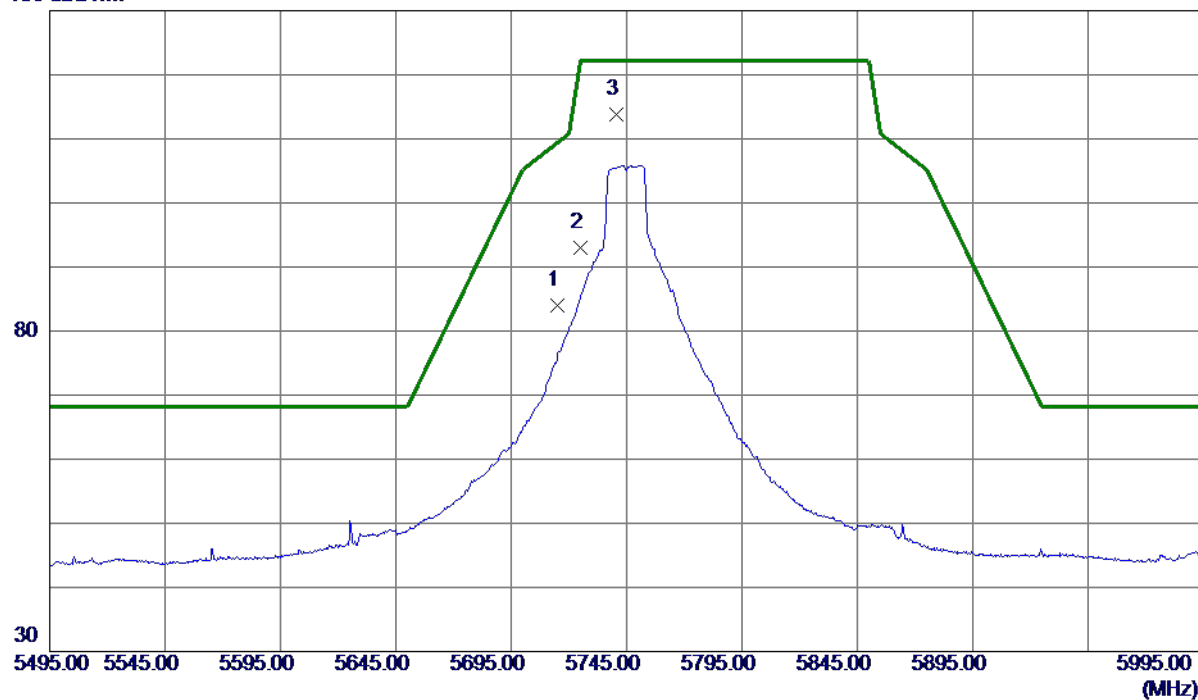

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 68.27                      | 15.65                   | 83.92                     | 109.40          | -25.48       | Peak     |          |
| 2   | 5725.0000    | 77.22                      | 15.68                   | 92.90                     | 122.20          | -29.30       | Peak     |          |
| 3 * | 5740.5000    | 98.00                      | 15.72                   | 113.72                    | 122.20          | -8.48        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5745 MHz |

## Horizontal

80 dBuV/m

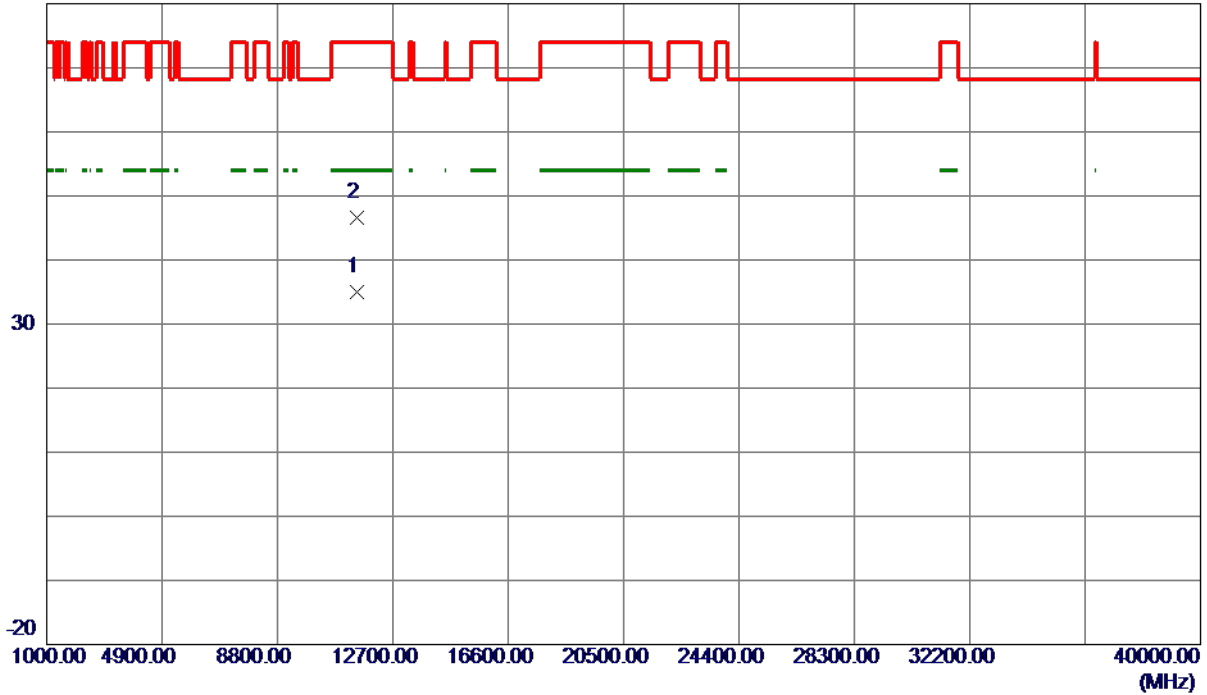

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11493.3500   | 22.85                      | 12.07                   | 34.92                     | 54.00           | -19.08       | AVG      |         |
| 2   | 11495.5750   | 34.58                      | 12.07                   | 46.65                     | 74.00           | -27.35       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5785 MHz |

## Vertical

130 dBuV/m

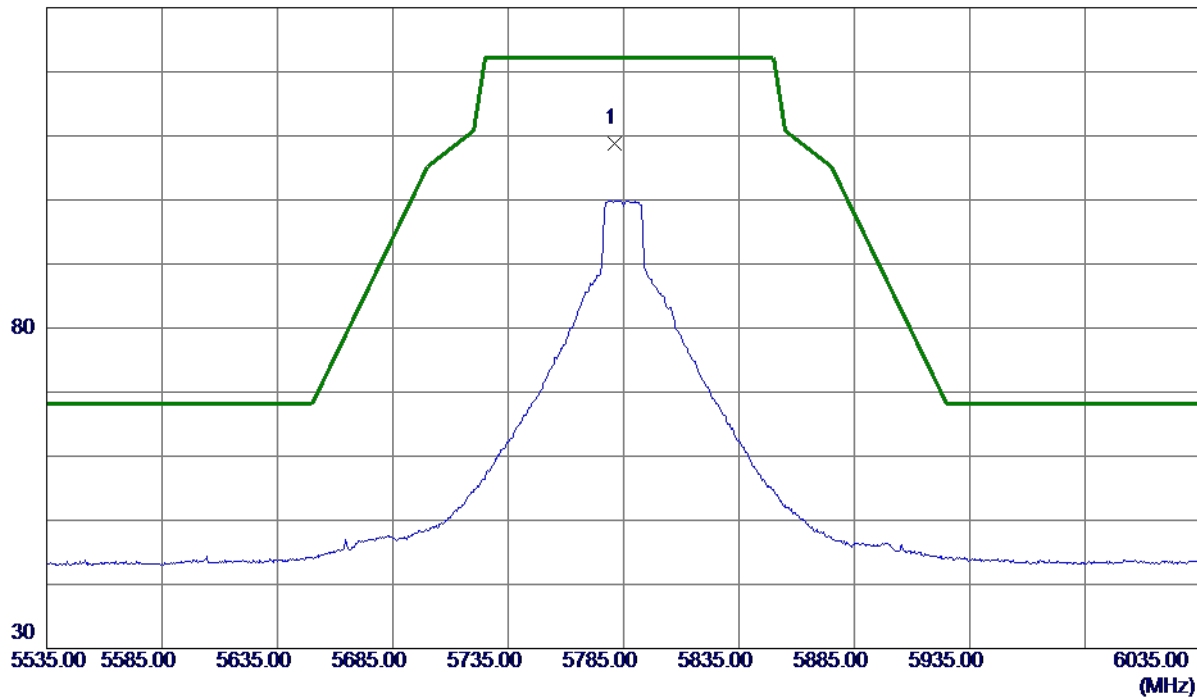

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5781.2500    | 93.05                      | 15.81                   | 108.86                    | 122.20          | -13.34       | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5785 MHz |

## Vertical

80 dBuV/m

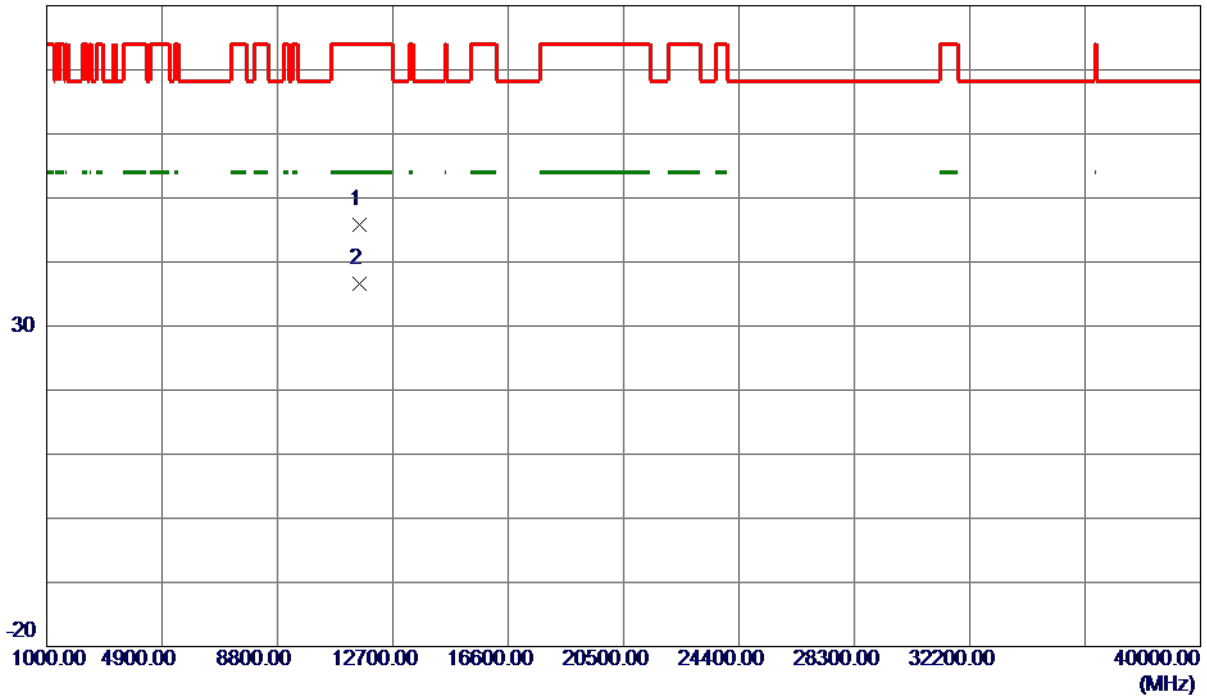

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11567.7500   | 33.74                      | 12.14                   | 45.88                     | 74.00           | -28.12       | Peak     |         |
| 2 * | 11572.8500   | 24.51                      | 12.15                   | 36.66                     | 54.00           | -17.34       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5785 MHz |

## Horizontal

130 dBuV/m

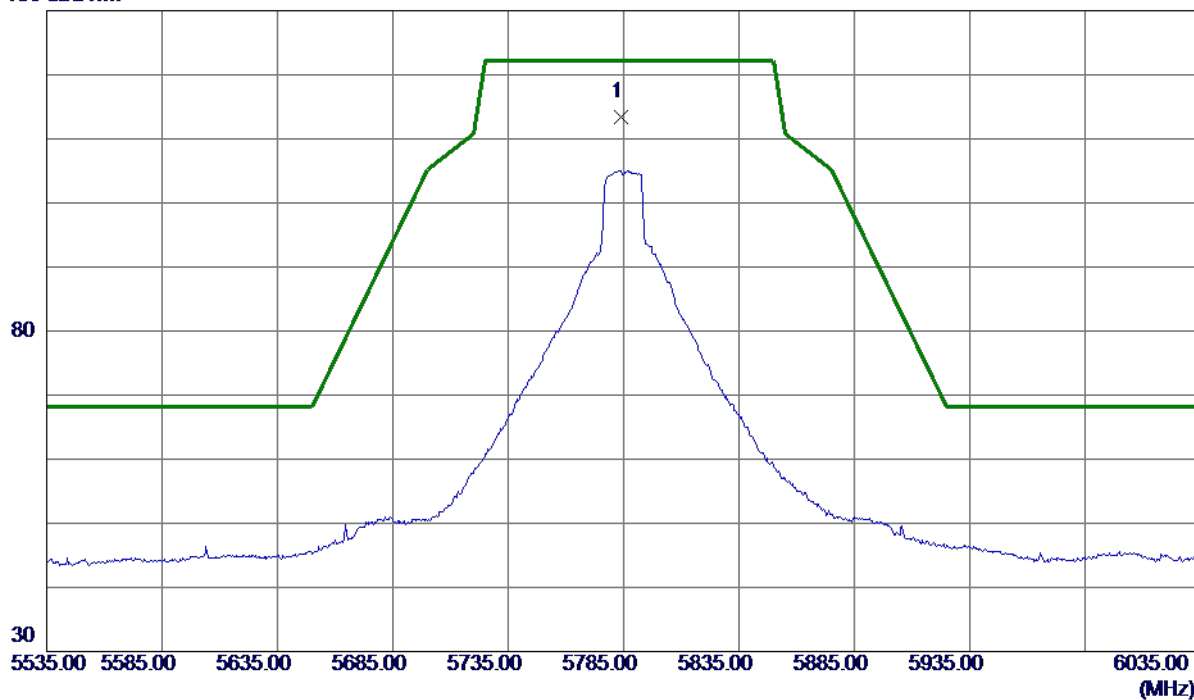

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5784.0000    | 97.51                      | 15.82                   | 113.33                    | 122.20          | -8.87        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5785 MHz |

## Horizontal

80 dBuV/m

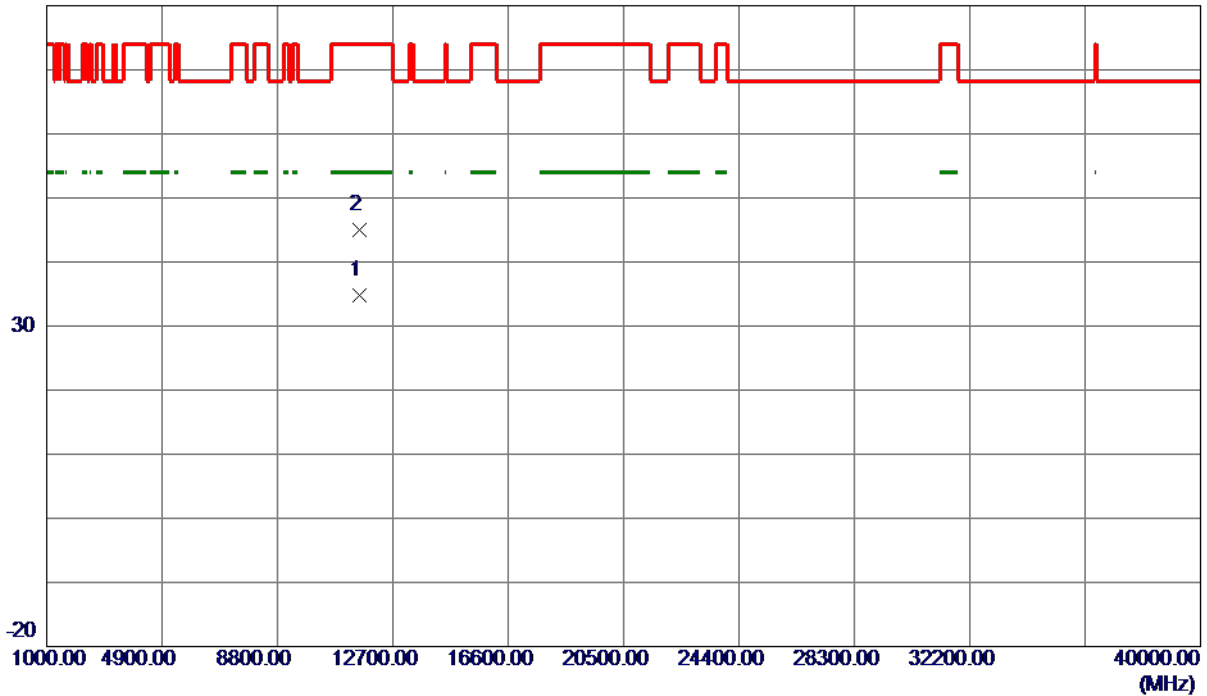

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11560.8000   | 22.67                      | 12.14                   | 34.81                     | 54.00           | -19.19       | AVG      |         |
| 2   | 11564.5750   | 32.87                      | 12.14                   | 45.01                     | 74.00           | -28.99       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5825 MHz |

## Vertical

130 dBuV/m

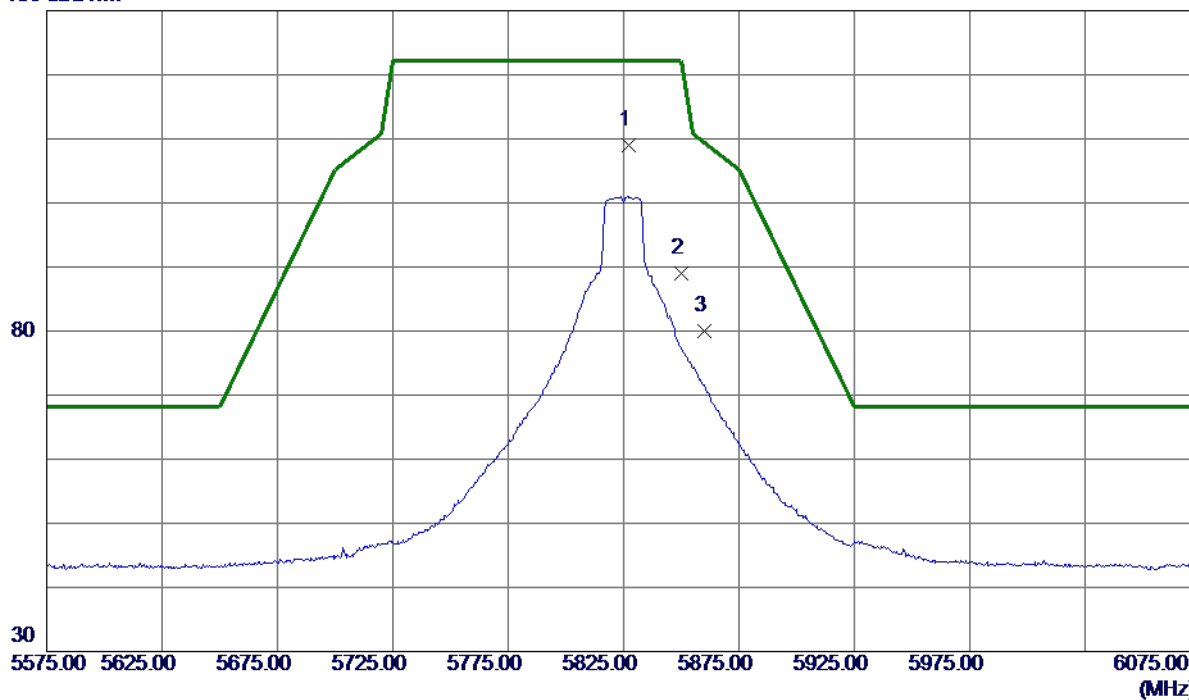

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5827.2500    | 93.03                      | 15.92                   | 108.95                    | 122.20          | -13.25       | Peak     | No Limit |
| 2   | 5850.0000    | 72.93                      | 15.97                   | 88.90                     | 122.20          | -33.30       | Peak     |          |
| 3   | 5860.0000    | 64.09                      | 16.00                   | 80.09                     | 109.40          | -29.31       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5825 MHz |

## Vertical

80 dBuV/m

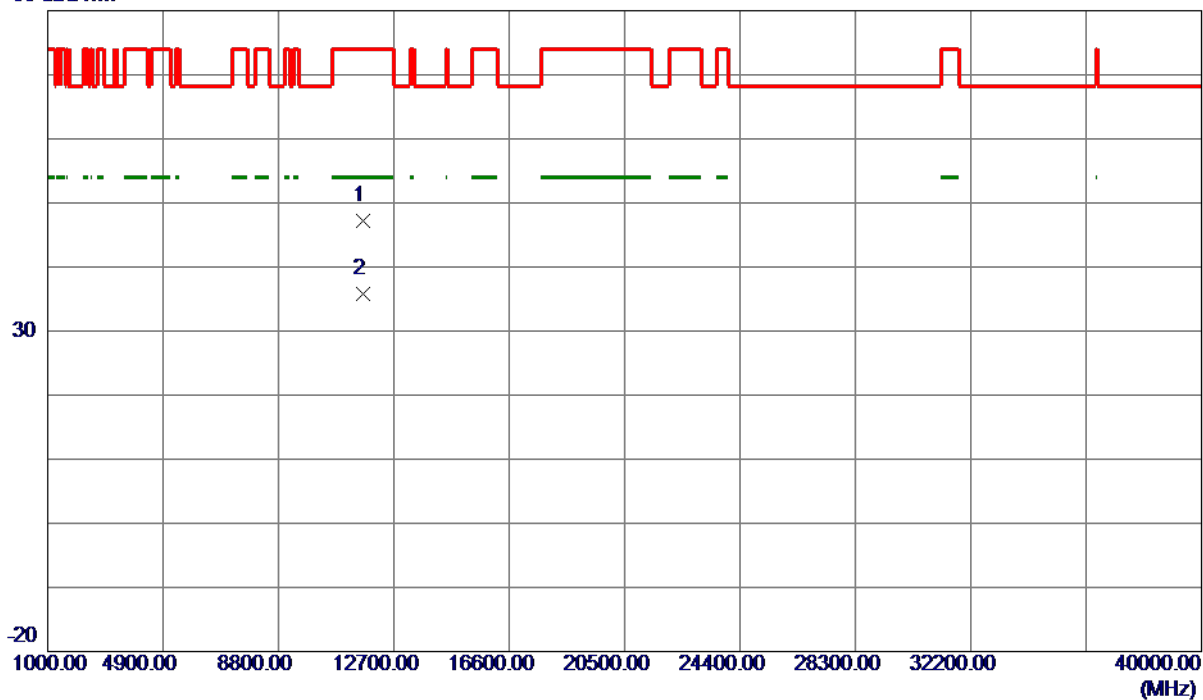

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11638.5500   | 34.92                      | 12.21                   | 47.13                     | 74.00           | -26.87       | Peak     |         |
| 2 * | 11651.6500   | 23.65                      | 12.23                   | 35.88                     | 54.00           | -18.12       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5825 MHz |

## Horizontal

130 dBuV/m

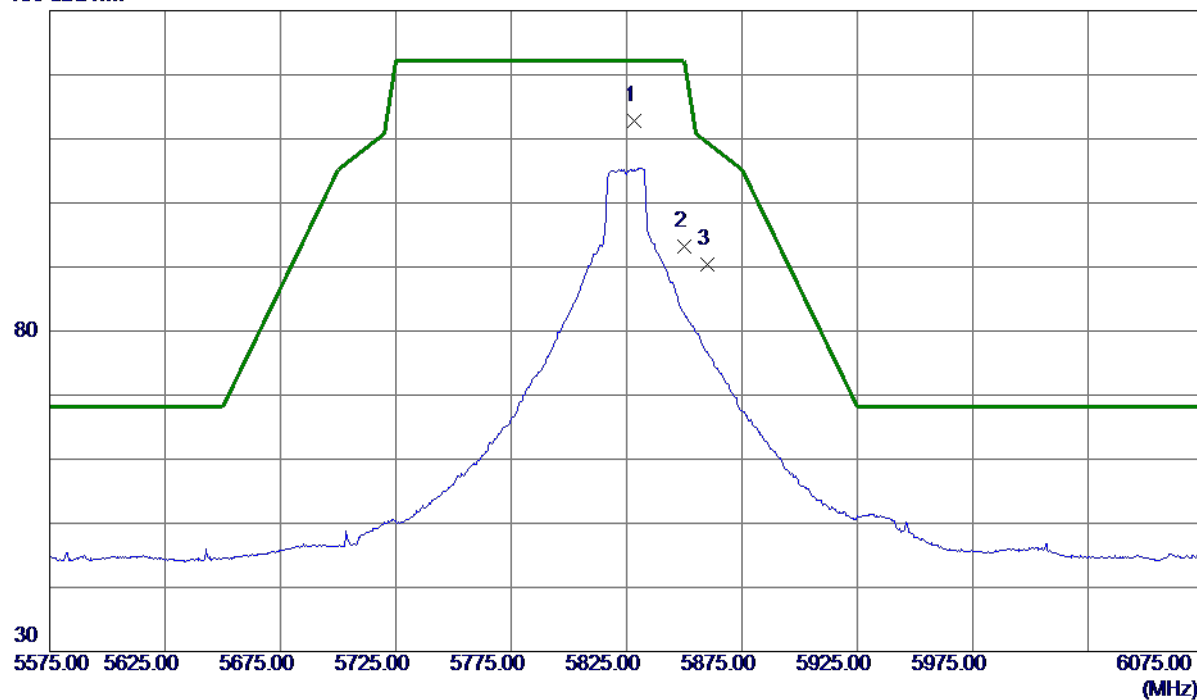

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5828.2500    | 96.94                      | 15.92                   | 112.86                    | 122.20          | -9.34        | Peak     | No Limit |
| 2   | 5850.0000    | 77.16                      | 15.97                   | 93.13                     | 122.20          | -29.07       | Peak     |          |
| 3   | 5860.0000    | 74.34                      | 16.00                   | 90.34                     | 109.40          | -19.06       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5825 MHz |

## Horizontal

80 dBuV/m

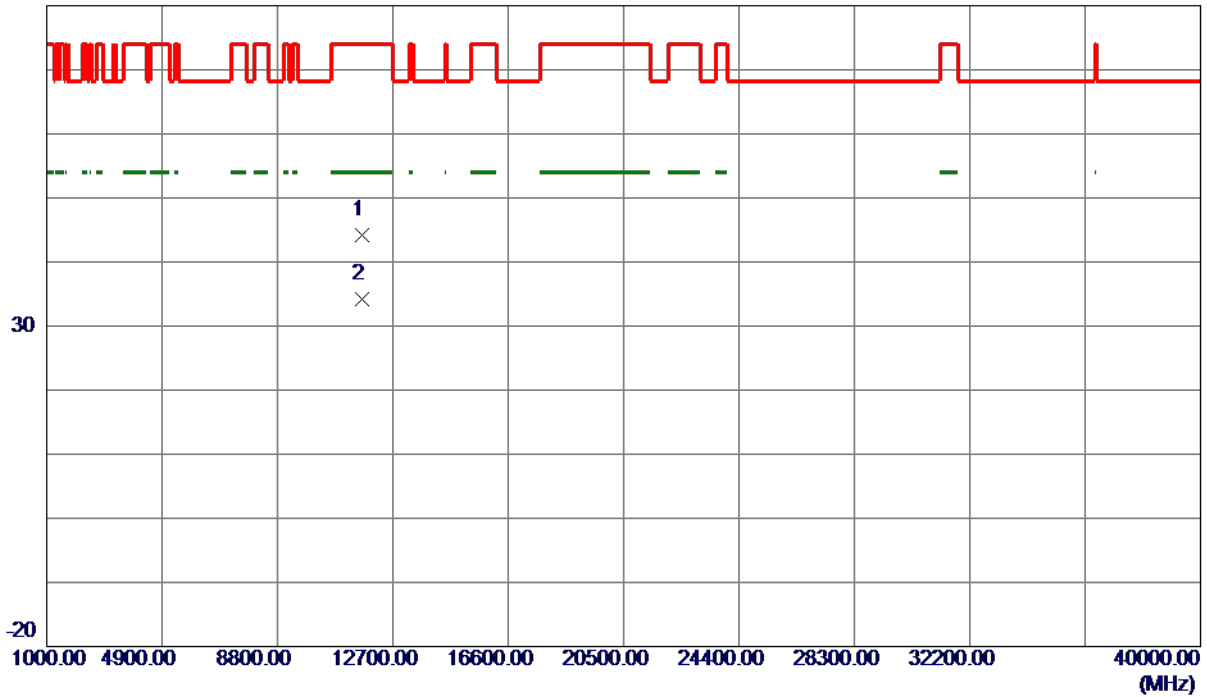

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11639.2000   | 32.07                      | 12.22                   | 44.29                     | 74.00           | -29.71       | Peak     |         |
| 2 * | 11653.5750   | 21.89                      | 12.23                   | 34.12                     | 54.00           | -19.88       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Vertical

130 dBuV/m

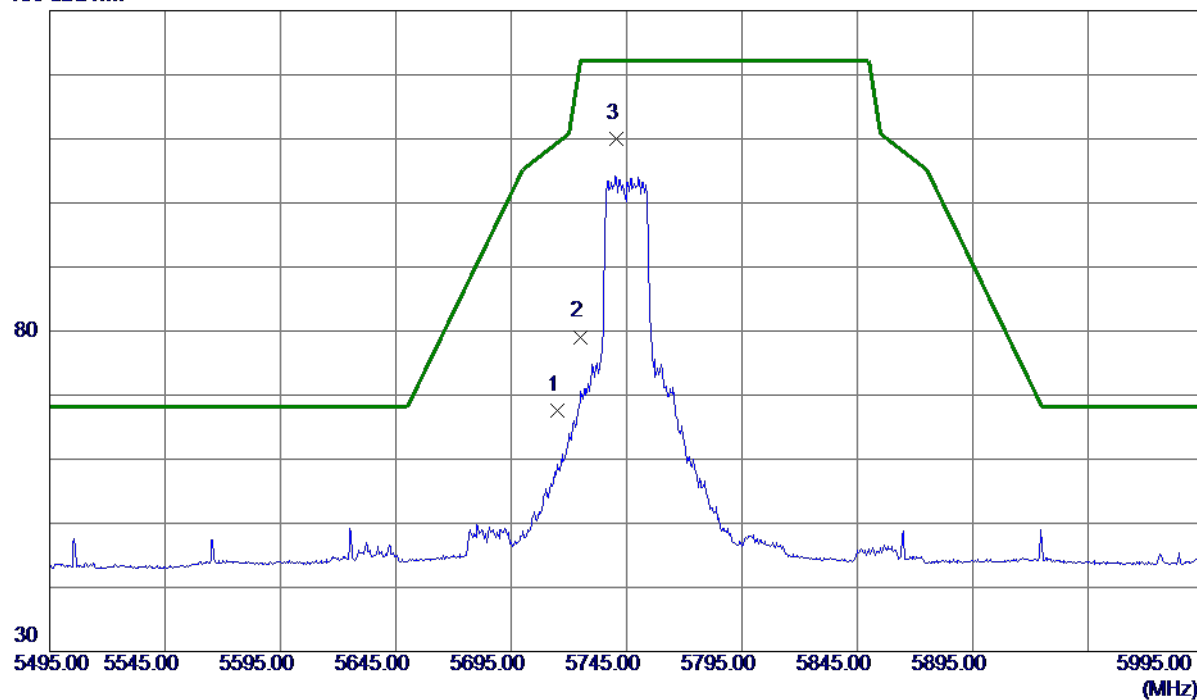

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 51.86                      | 15.65                   | 67.51                     | 109.40          | -41.89       | Peak     |          |
| 2   | 5725.0000    | 63.42                      | 15.68                   | 79.10                     | 122.20          | -43.10       | Peak     |          |
| 3 * | 5740.5000    | 94.34                      | 15.72                   | 110.06                    | 122.20          | -12.14       | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Vertical

80 dBuV/m

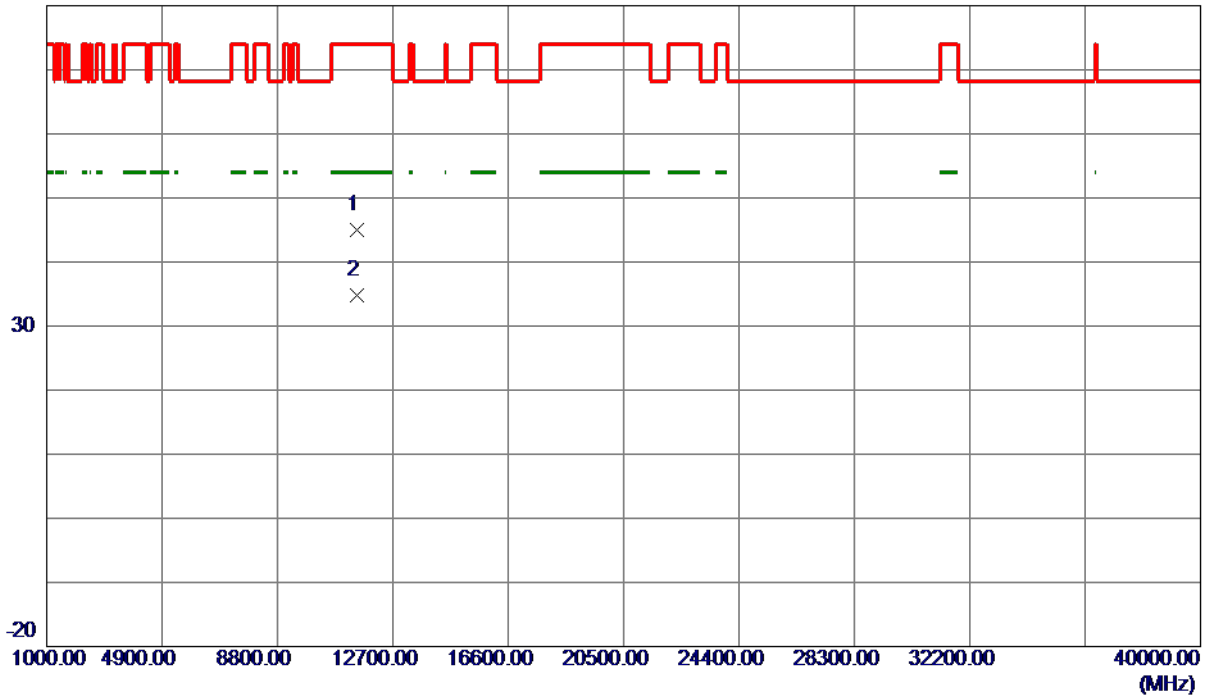

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11472.1000   | 33.02                      | 12.05                   | 45.07                     | 74.00           | -28.93       | Peak     |         |
| 2 * | 11495.1500   | 22.77                      | 12.07                   | 34.84                     | 54.00           | -19.16       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Horizontal

130 dBuV/m

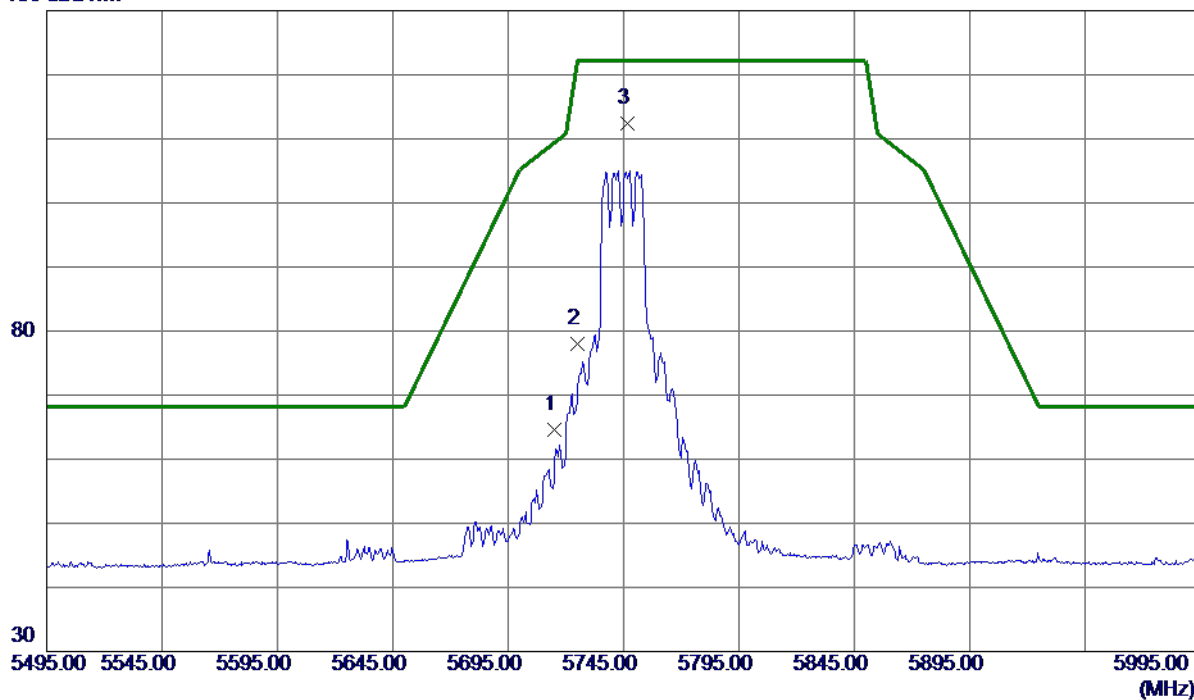

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 49.01                      | 15.65                   | 64.66                     | 109.40          | -44.74       | Peak     |          |
| 2   | 5725.0000    | 62.41                      | 15.68                   | 78.09                     | 122.20          | -44.11       | Peak     |          |
| 3 * | 5746.7500    | 96.63                      | 15.73                   | 112.36                    | 122.20          | -9.84        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Horizontal

80 dBuV/m

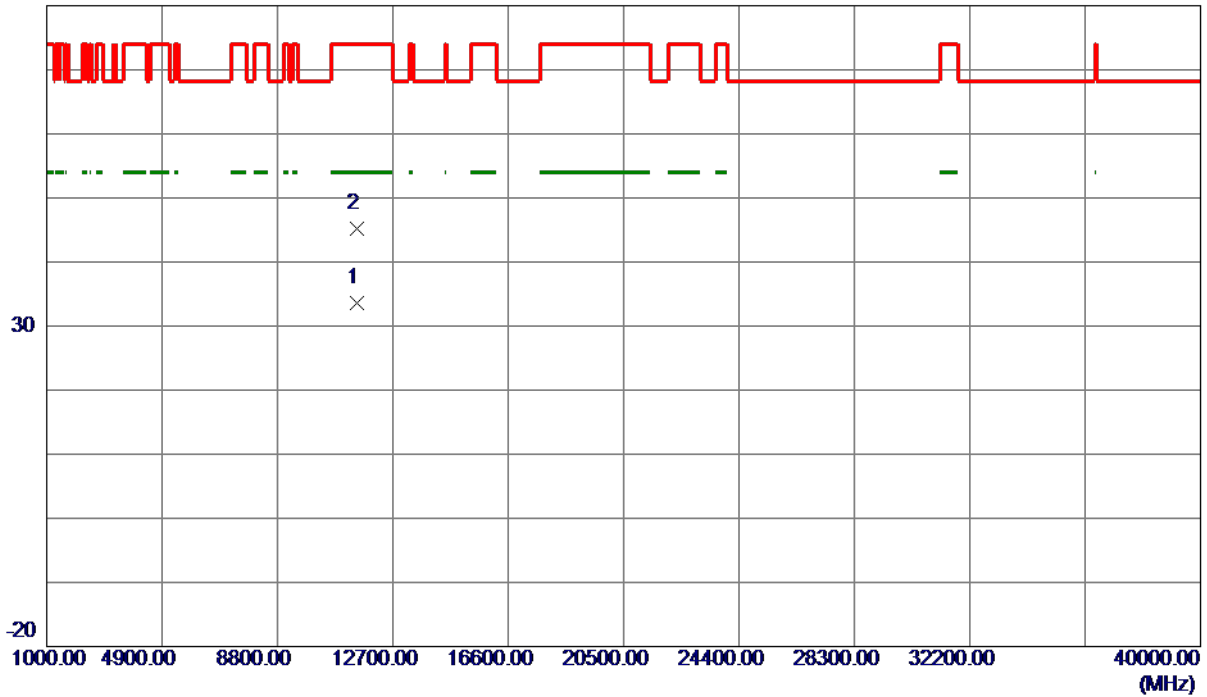

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11470.6250   | 21.59                      | 12.05                   | 33.64                     | 54.00           | -20.36       | AVG      |         |
| 2   | 11497.2750   | 33.09                      | 12.07                   | 45.16                     | 74.00           | -28.84       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5785 MHz |

## Vertical

130 dBuV/m

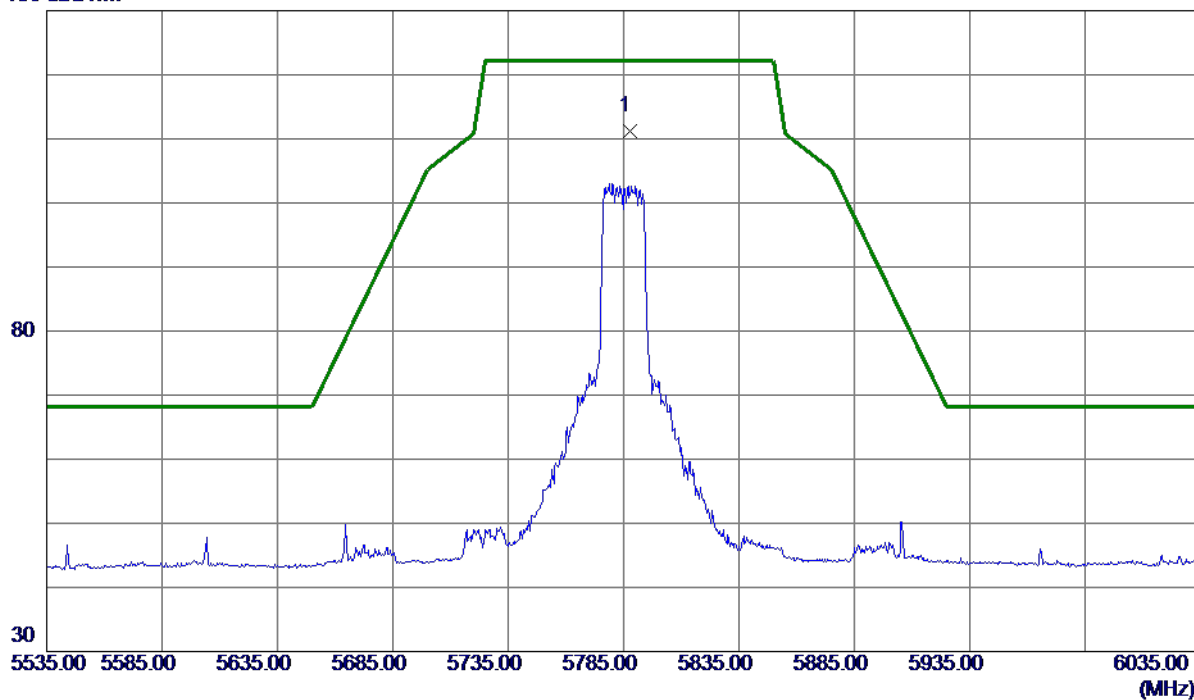


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5787.5000    | 95.29                      | 15.83                   | 111.12                    | 122.20          | -11.08       | Peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5785 MHz |

## Vertical

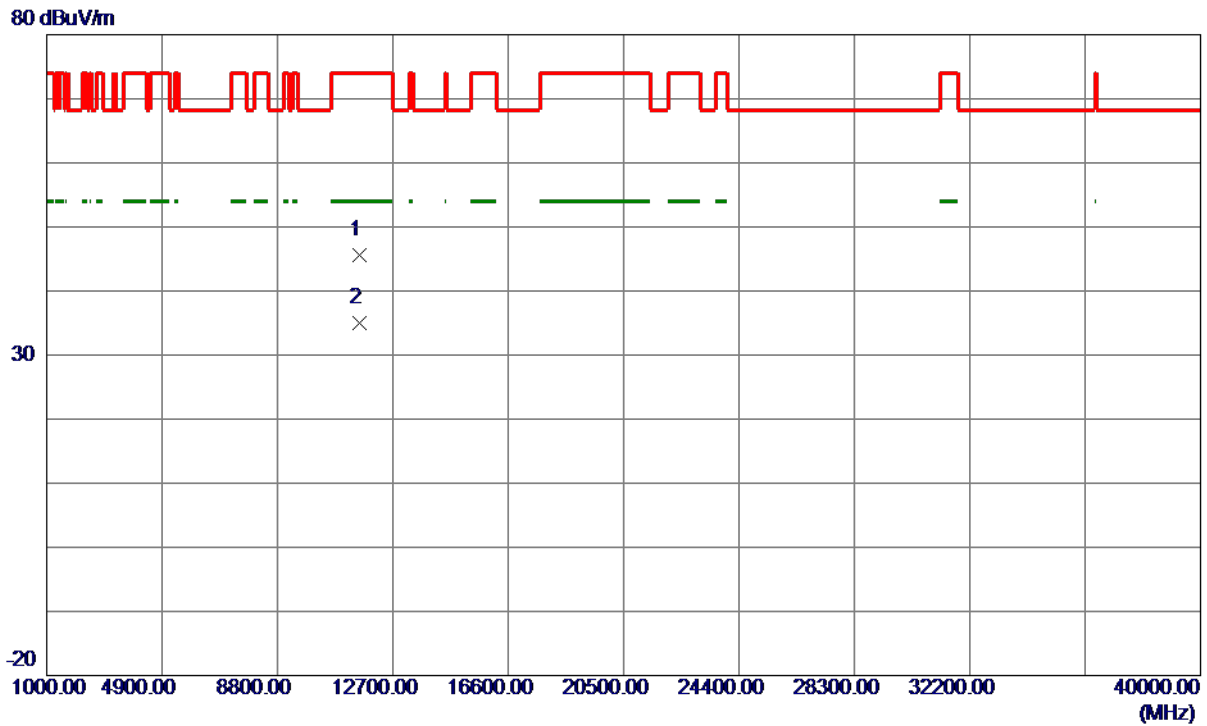

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11563.6250   | 33.49                      | 12.14                   | 45.63                     | 74.00           | -28.37       | Peak     |         |
| 2 * | 11567.0750   | 22.93                      | 12.14                   | 35.07                     | 54.00           | -18.93       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5785 MHz |

## Horizontal

130 dBuV/m

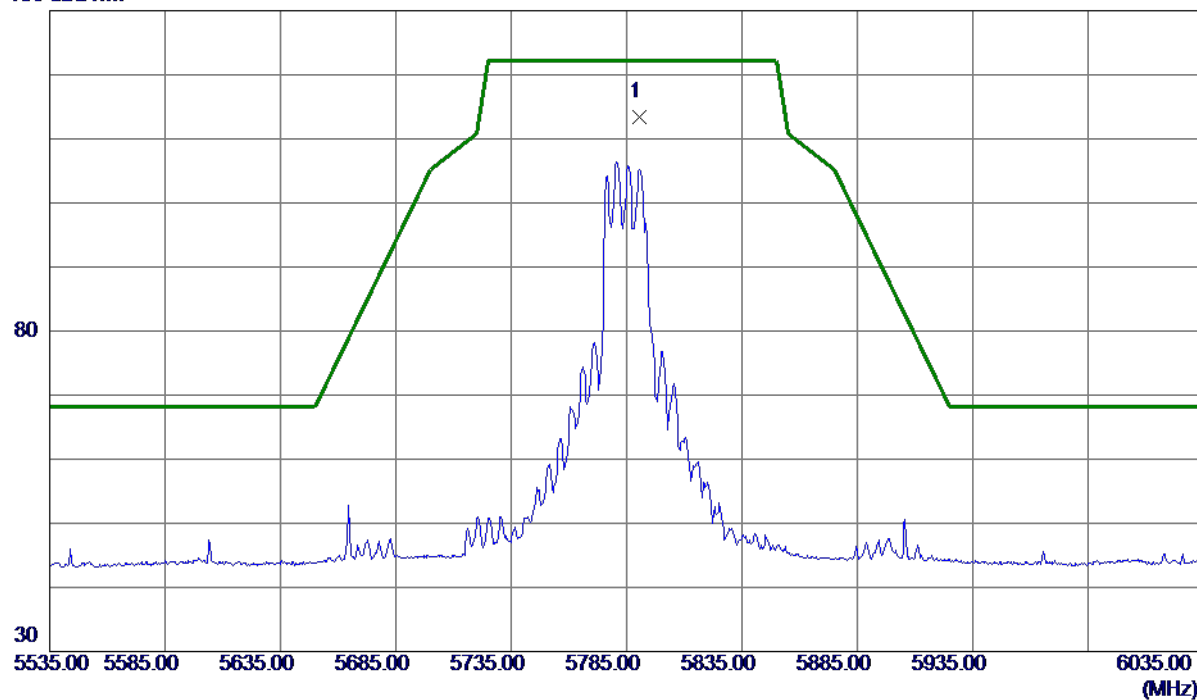

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5790.7500    | 97.62                      | 15.83                   | 113.45                    | 122.20          | -8.75        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5785 MHz |

## Horizontal

80 dBuV/m

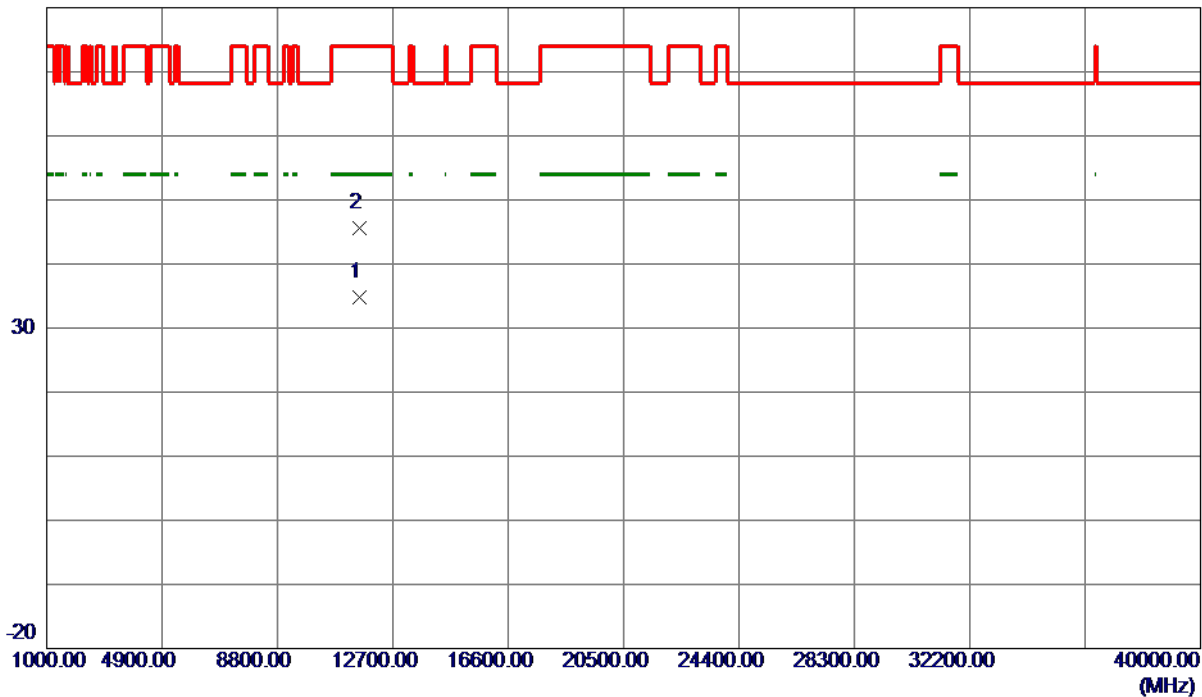

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11577.5250   | 22.74                      | 12.15                   | 34.89                     | 54.00           | -19.11       | AVG      |         |
| 2   | 11578.6500   | 33.50                      | 12.15                   | 45.65                     | 74.00           | -28.35       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5825 MHz |

## Vertical

130 dBuV/m

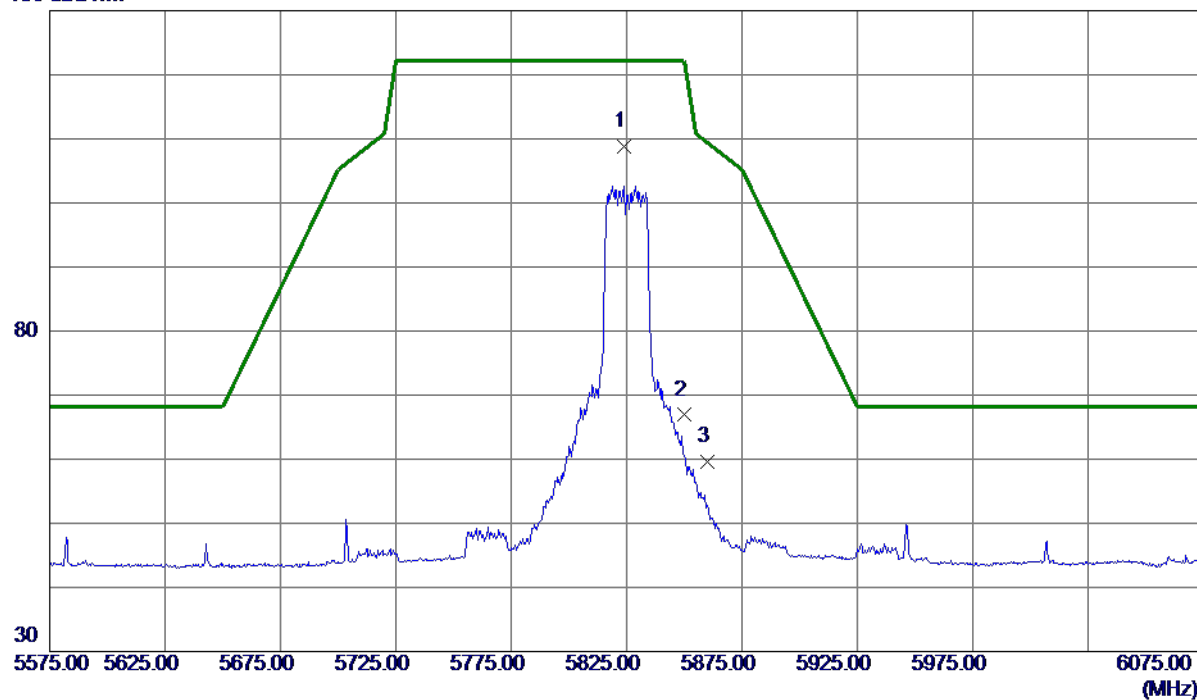

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5823.7500    | 92.82                      | 15.91                   | 108.73                    | 122.20          | -13.47       | Peak     | No Limit |
| 2   | 5850.0000    | 50.93                      | 15.97                   | 66.90                     | 122.20          | -55.30       | Peak     |          |
| 3   | 5860.0000    | 43.60                      | 16.00                   | 59.60                     | 109.40          | -49.80       | Peak     |          |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5825 MHz |

## Vertical

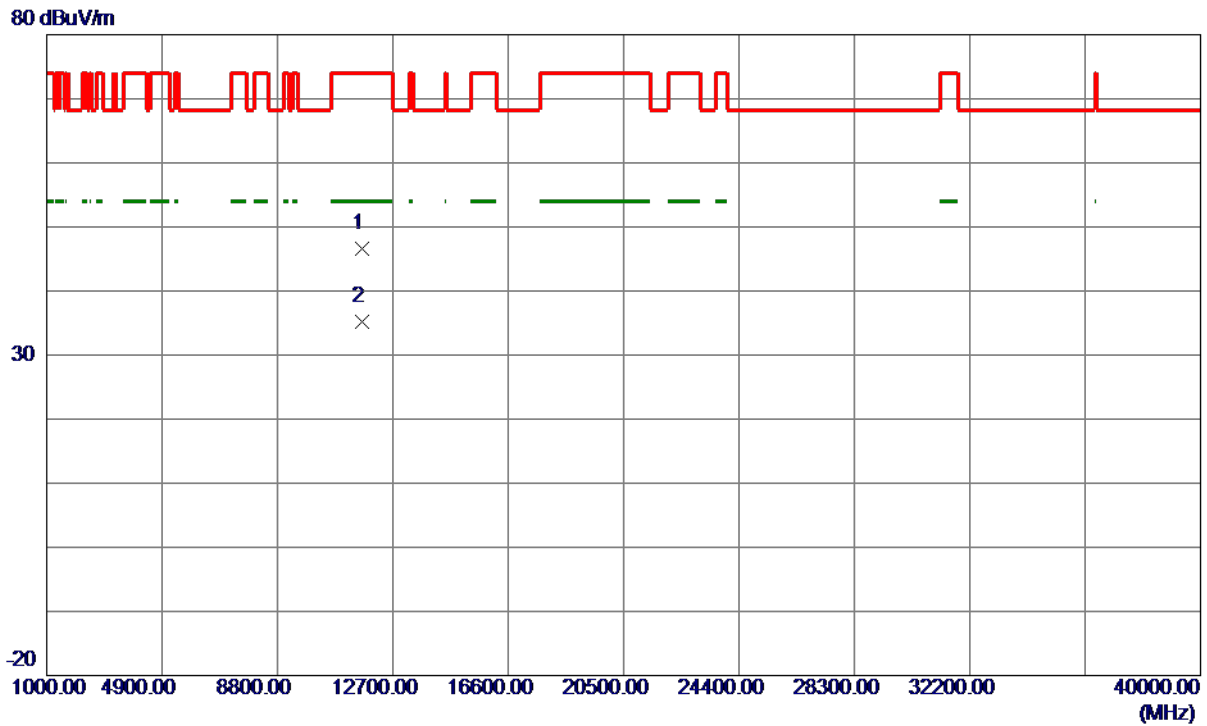

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11650.6000   | 34.44                      | 12.23                   | 46.67                     | 74.00           | -27.33       | Peak     |         |
| 2 * | 11651.6750   | 23.01                      | 12.23                   | 35.24                     | 54.00           | -18.76       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5825 MHz |

## Horizontal

130 dBuV/m

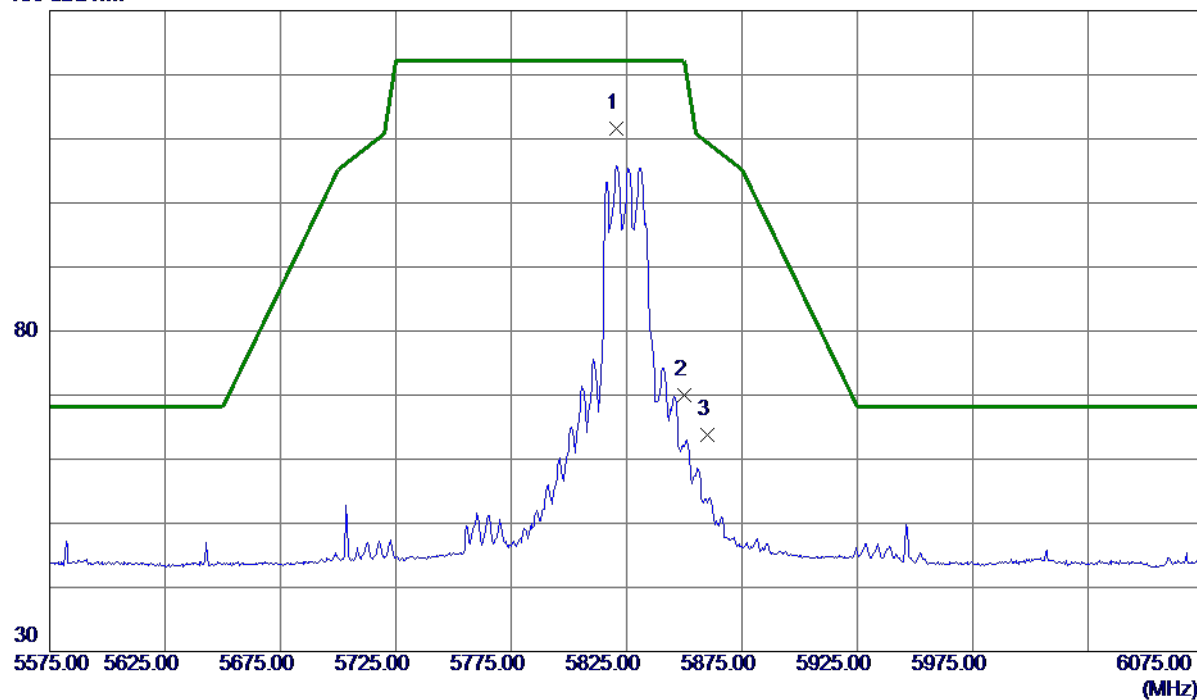

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5820.5000    | 95.76                      | 15.90                   | 111.66                    | 122.20          | -10.54       | Peak     | No Limit |
| 2   | 5850.0000    | 54.03                      | 15.97                   | 70.00                     | 122.20          | -52.20       | Peak     |          |
| 3   | 5860.0000    | 47.84                      | 16.00                   | 63.84                     | 109.40          | -45.56       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5825 MHz |

## Horizontal

80 dBuV/m

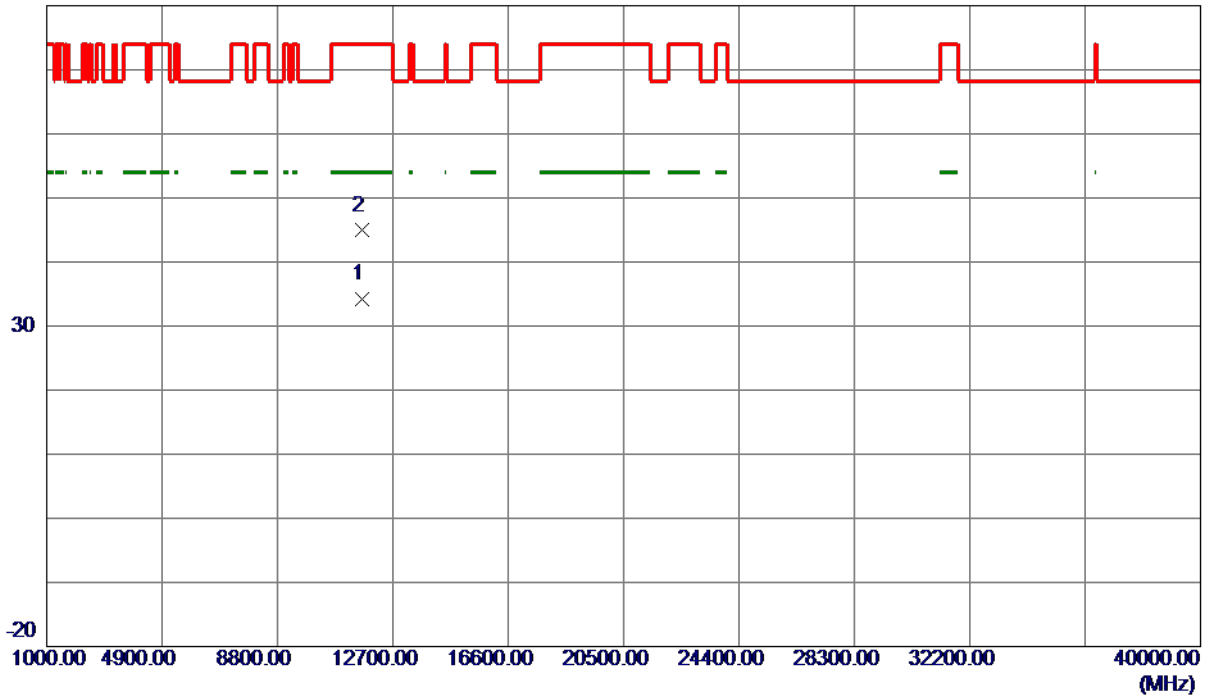

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11654.3250   | 21.93                      | 12.23                   | 34.16                     | 54.00           | -19.84       | AVG      |         |
| 2   | 11655.8000   | 32.67                      | 12.23                   | 44.90                     | 74.00           | -29.10       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5755 MHz |

## Vertical

130 dBuV/m

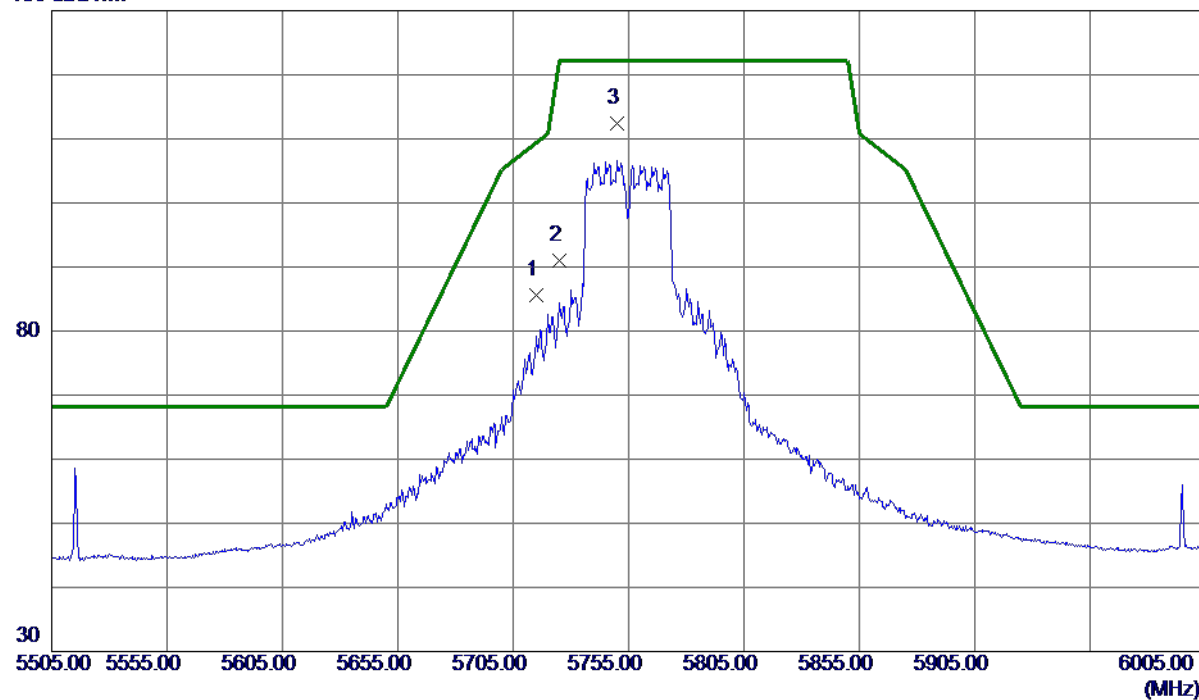

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 69.89                      | 15.65                   | 85.54                     | 109.40          | -23.86       | Peak     |          |
| 2   | 5725.0000    | 75.27                      | 15.68                   | 90.95                     | 122.20          | -31.25       | Peak     |          |
| 3 * | 5750.2500    | 96.57                      | 15.74                   | 112.31                    | 122.20          | -9.89        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5755 MHz |

## Vertical

80 dBuV/m

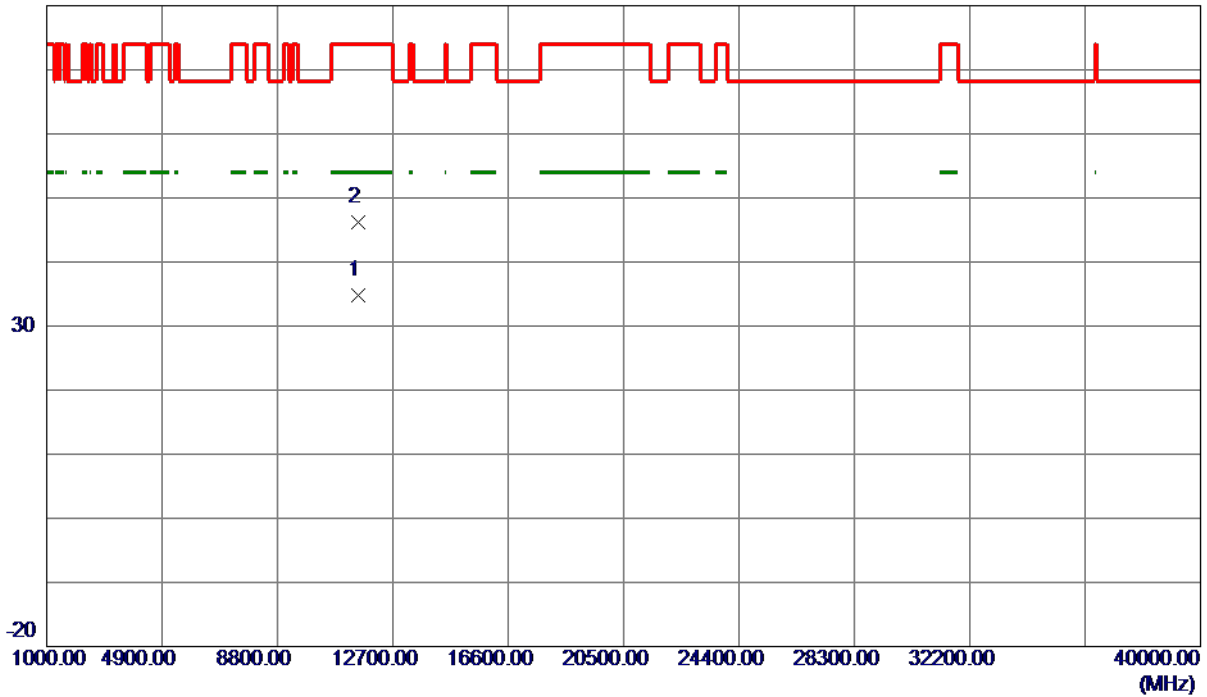

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11508.6550   | 22.80                      | 12.08                   | 34.88                     | 54.00           | -19.12       | AVG      |         |
| 2   | 11508.7200   | 34.12                      | 12.08                   | 46.20                     | 74.00           | -27.80       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5755 MHz |

## Horizontal

130 dBuV/m

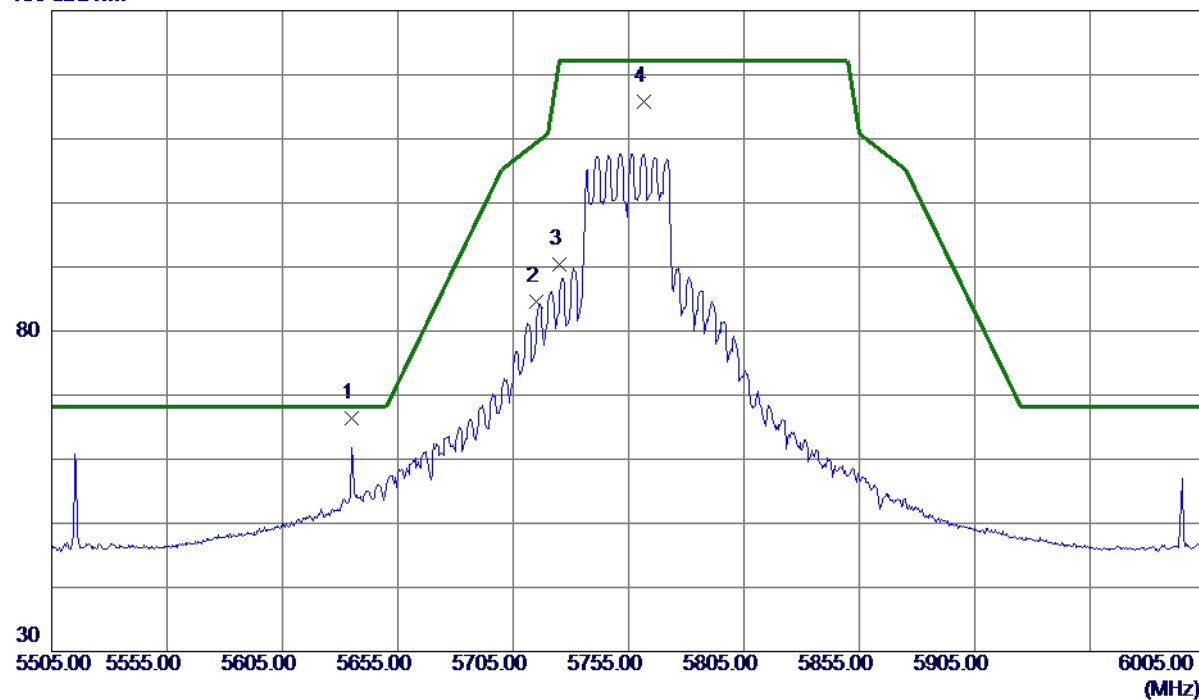

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5635.0000    | 50.96                      | 15.47                   | 66.43                     | 68.20           | -1.77        | Peak     |          |
| 2   | 5715.0000    | 68.89                      | 15.65                   | 84.54                     | 109.40          | -24.86       | Peak     |          |
| 3   | 5725.0000    | 74.66                      | 15.68                   | 90.34                     | 122.20          | -31.86       | Peak     |          |
| 4   | 5761.5000    | 100.01                     | 15.76                   | 115.77                    | 122.20          | -6.43        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5755 MHz |

## Horizontal

80 dBuV/m

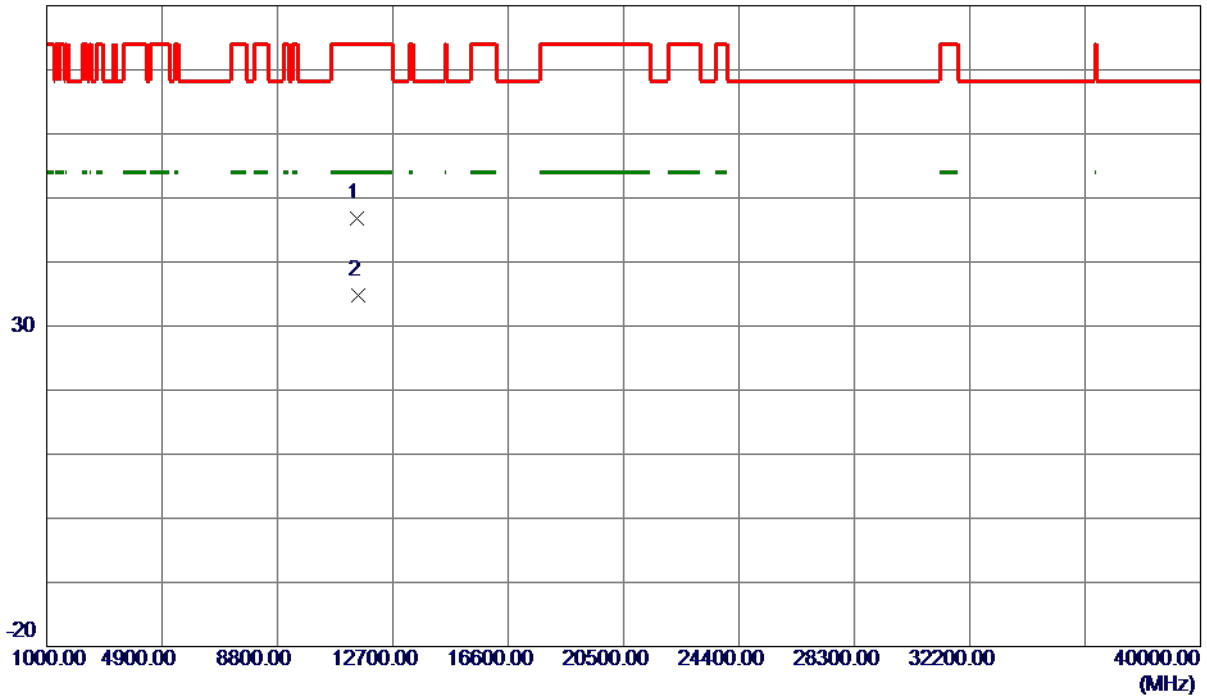

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11507.7430   | 34.66                      | 12.08                   | 46.74                     | 74.00           | -27.26       | Peak     |         |
| 2 * | 11511.0070   | 22.63                      | 12.09                   | 34.72                     | 54.00           | -19.28       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5795 MHz |

## Vertical

130 dBuV/m

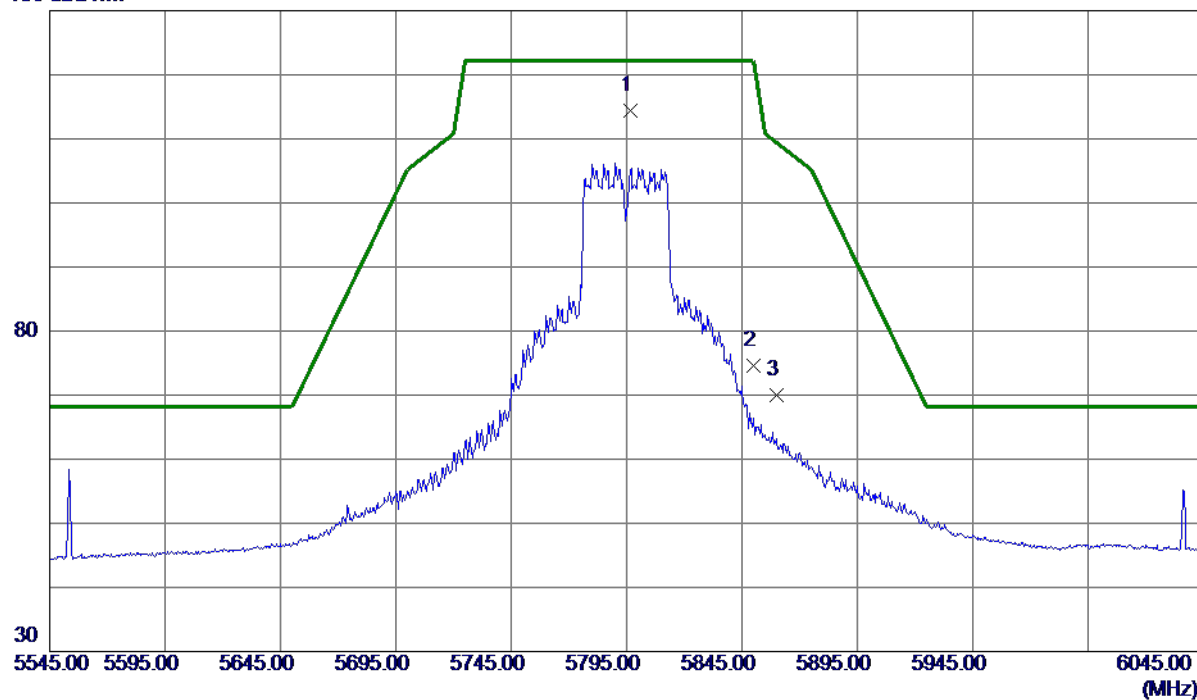

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5796.7500    | 98.47                      | 15.85                   | 114.32                    | 122.20          | -7.88        | Peak     | No Limit |
| 2   | 5850.0000    | 58.56                      | 15.97                   | 74.53                     | 122.20          | -47.67       | Peak     |          |
| 3   | 5860.0000    | 53.91                      | 16.00                   | 69.91                     | 109.40          | -39.49       | Peak     |          |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5795 MHz |

## Vertical

80 dBuV/m

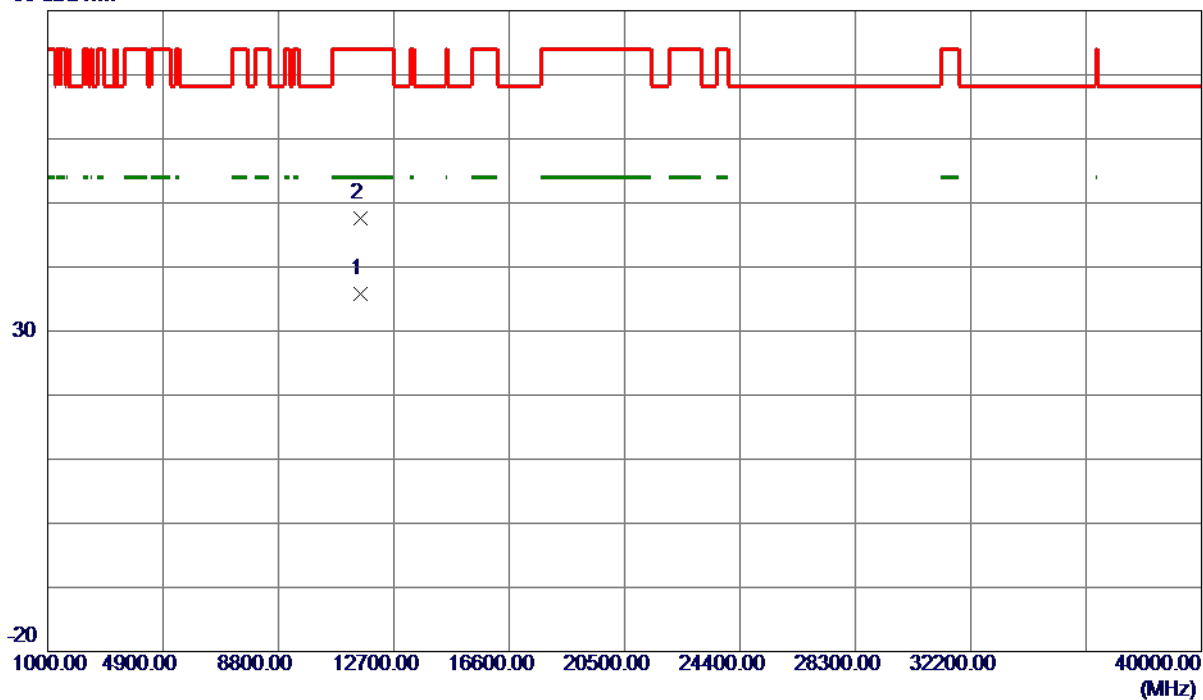

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11588.6030   | 23.58                      | 12.16                   | 35.74                     | 54.00           | -18.26       | AVG      |         |
| 2   | 11591.8800   | 35.45                      | 12.17                   | 47.62                     | 74.00           | -26.38       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5795 MHz |

## Horizontal

130 dBuV/m

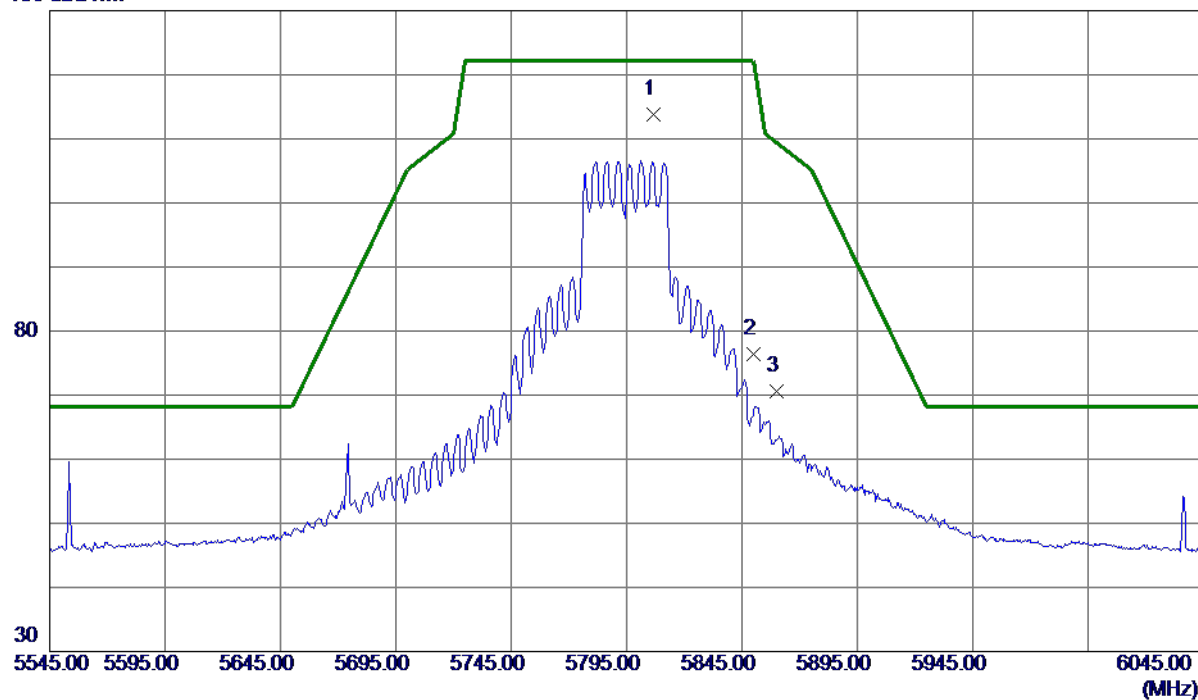

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5806.5000    | 97.83                      | 15.87                   | 113.70                    | 122.20          | -8.50        | Peak     | No Limit |
| 2   | 5850.0000    | 60.51                      | 15.97                   | 76.48                     | 122.20          | -45.72       | Peak     |          |
| 3   | 5860.0000    | 54.62                      | 16.00                   | 70.62                     | 109.40          | -38.78       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5795 MHz |

## Horizontal

80 dBuV/m

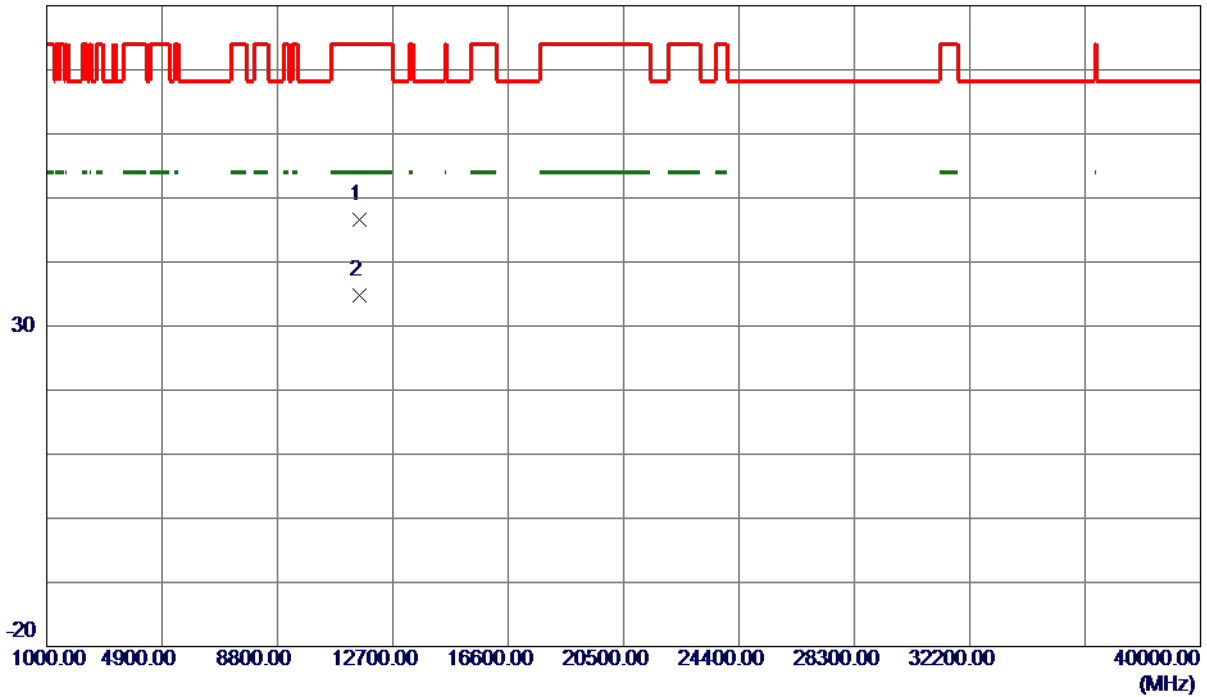

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11587.6420   | 34.49                      | 12.16                   | 46.65                     | 74.00           | -27.35       | Peak     |         |
| 2 * | 11590.9150   | 22.65                      | 12.17                   | 34.82                     | 54.00           | -19.18       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5180 MHz |

## Vertical

130 dBuV/m

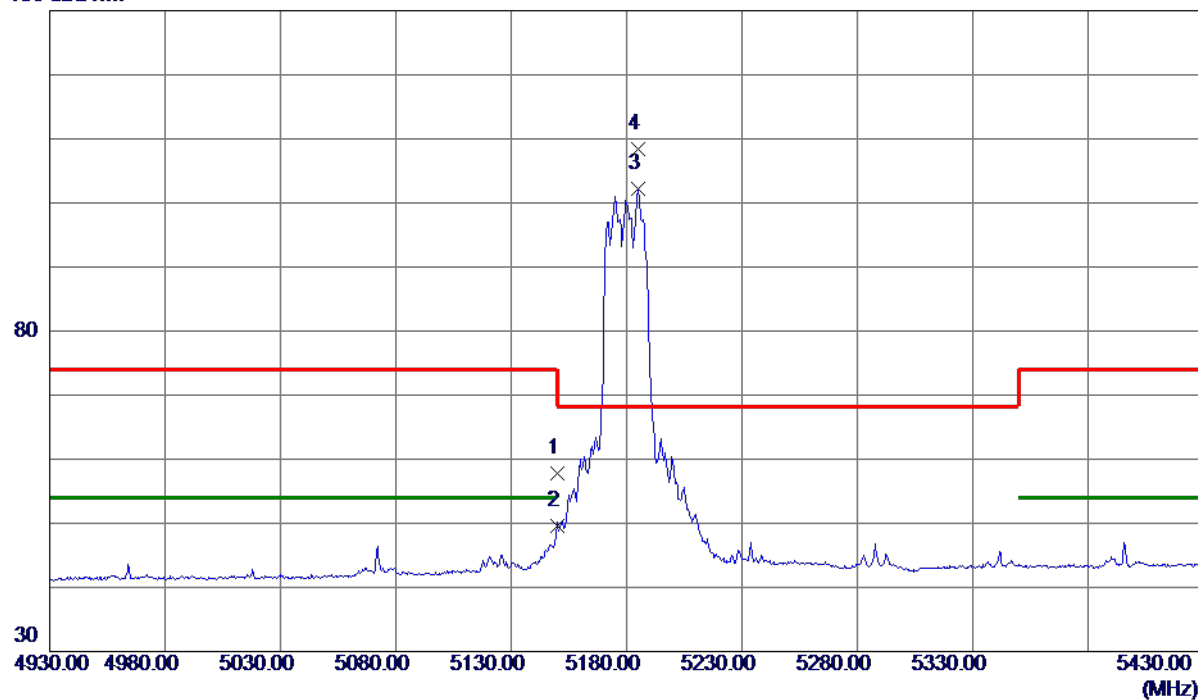

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 43.44                      | 14.32                   | 57.76                     | 74.00           | -16.24       | Peak     |          |
| 2   | 5150.0000    | 35.23                      | 14.32                   | 49.55                     | 54.00           | -4.45        | AVG      |          |
| 3   | 5184.7500    | 87.76                      | 14.40                   | 102.16                    | 999.00          | -896.84      | AVG      | No Limit |
| 4 * | 5185.0000    | 94.09                      | 14.40                   | 108.49                    | 68.30           | 40.19        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5180 MHz |

## Vertical

80 dBuV/m

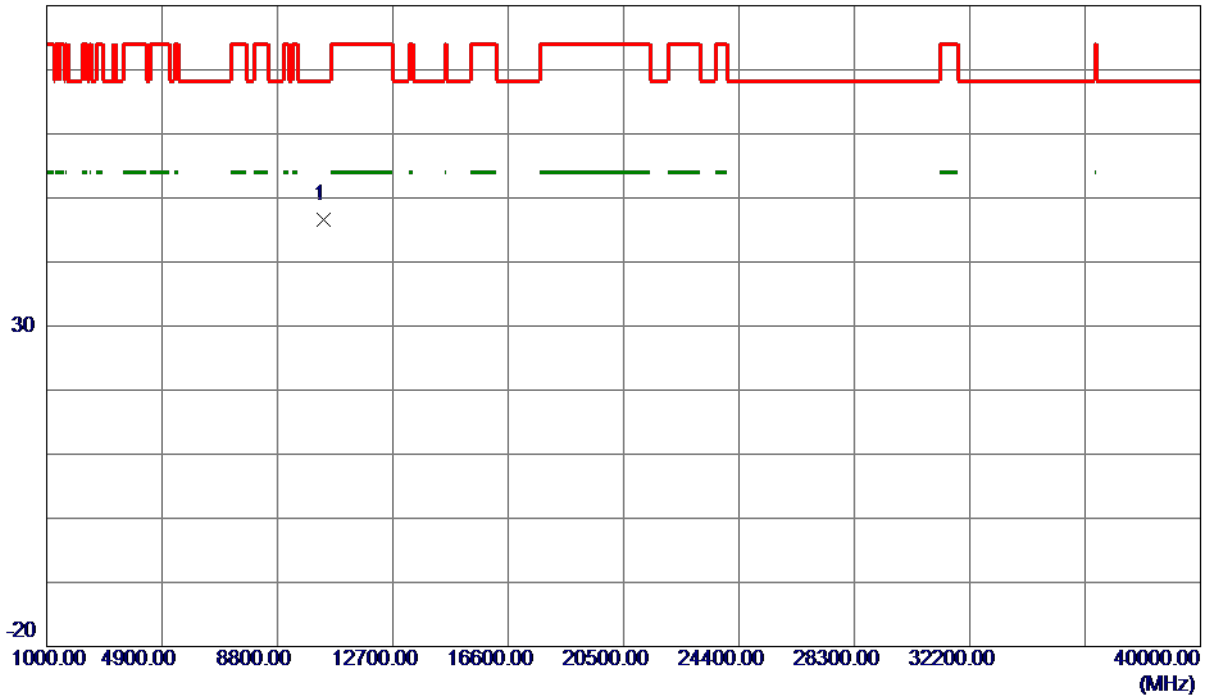

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10352.2300   | 35.29                      | 11.29                   | 46.58                     | 68.30           | -21.72       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5180 MHz |

## Horizontal

130 dBuV/m

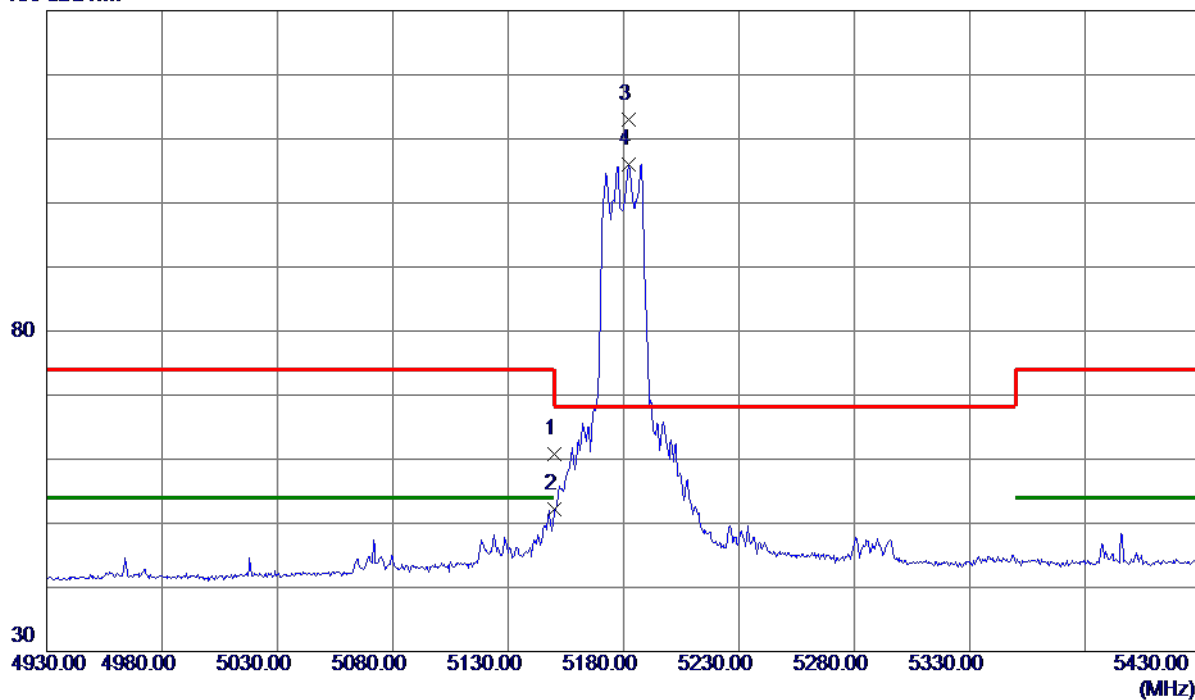

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 46.51                      | 14.32                   | 60.83                     | 74.00           | -13.17       | Peak     |          |
| 2   | 5150.0000    | 37.94                      | 14.32                   | 52.26                     | 54.00           | -1.74        | AVG      |          |
| 3 * | 5182.2500    | 98.54                      | 14.39                   | 112.93                    | 68.30           | 44.63        | Peak     | No Limit |
| 4   | 5182.2500    | 91.68                      | 14.39                   | 106.07                    | 999.00          | -892.93      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5180 MHz |

## Horizontal

80 dBuV/m

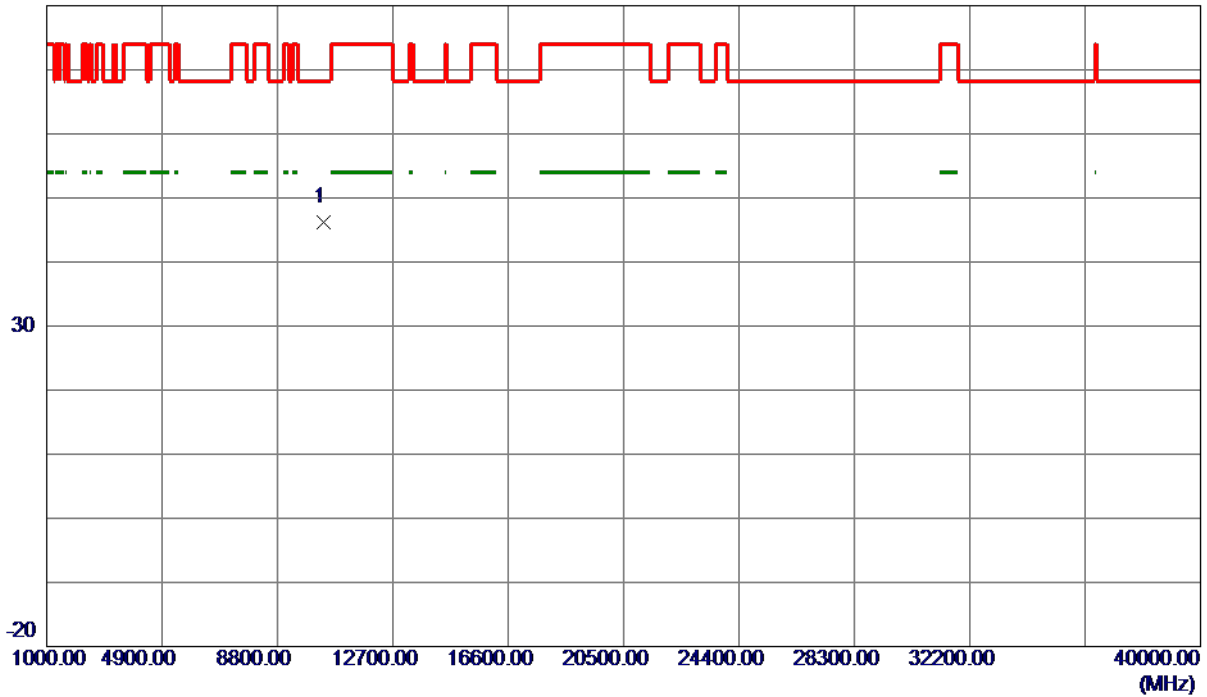

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10355.5000   | 34.99                      | 11.29                   | 46.28                     | 68.30           | -22.02       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5200 MHz |

## Vertical

130 dBuV/m

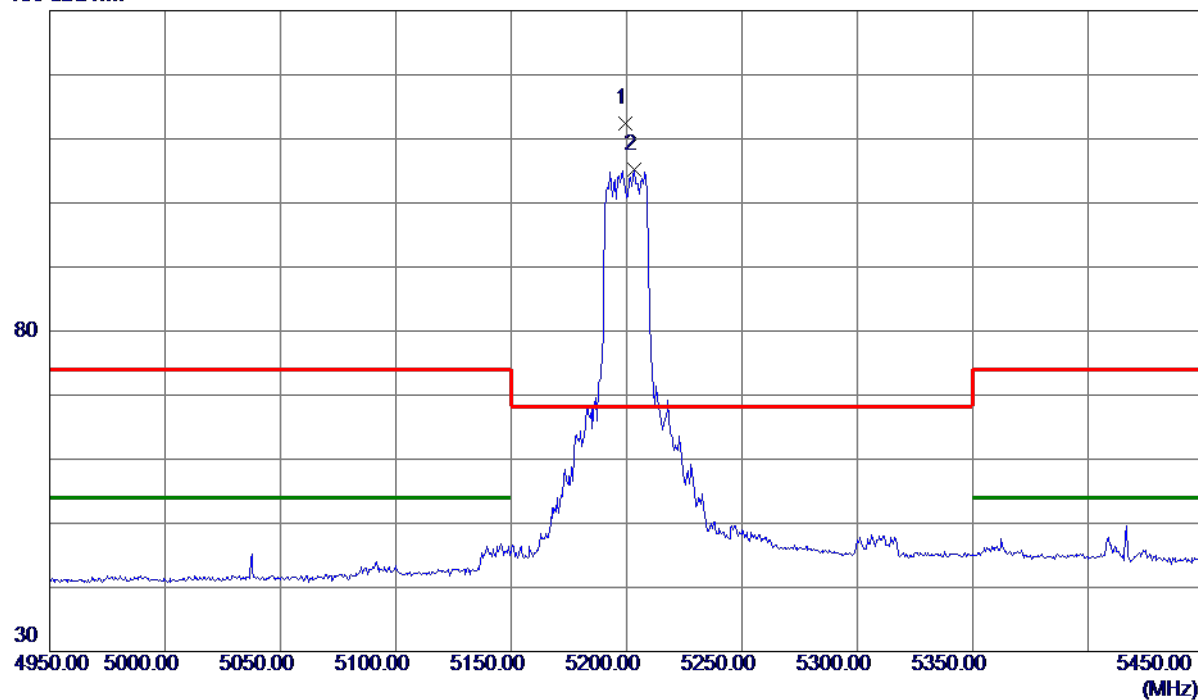

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5199.2500    | 97.99                      | 14.43                   | 112.42                    | 68.30           | 44.12        | Peak     | No Limit |
| 2   | 5203.2500    | 90.73                      | 14.44                   | 105.17                    | 999.00          | -893.83      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5200 MHz |

## Vertical

80 dBuV/m

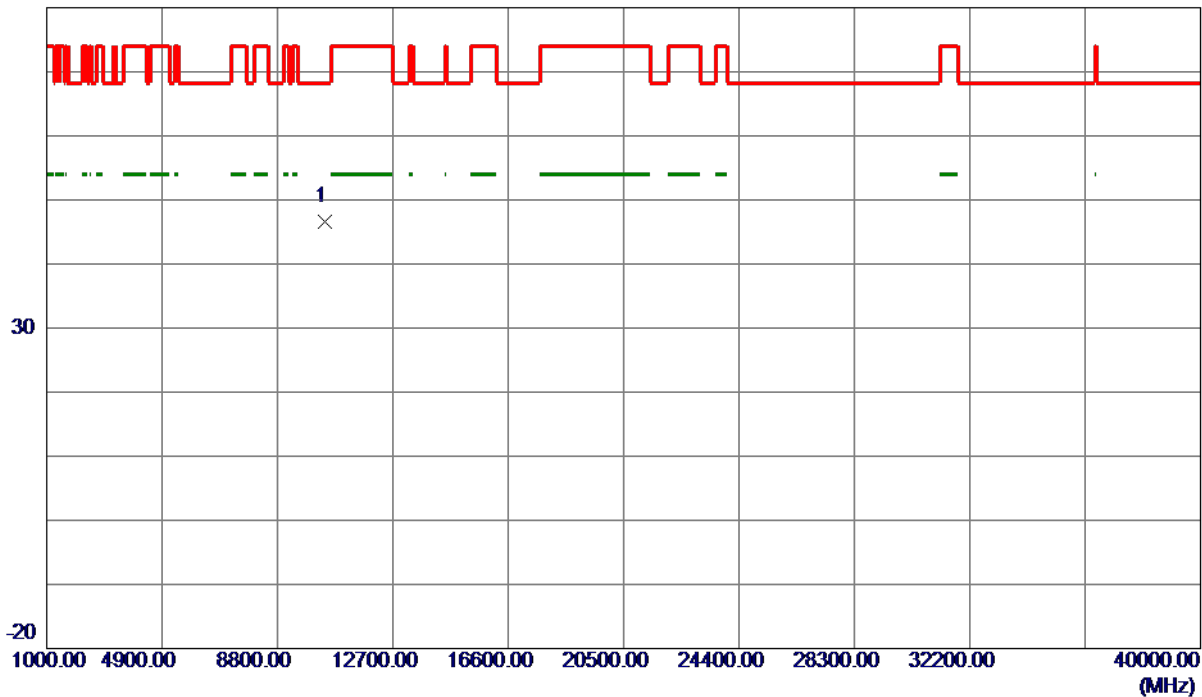

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10403.5700   | 35.31                      | 11.37                   | 46.68                     | 68.30           | -21.62       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5200 MHz |

## Horizontal

130 dBuV/m

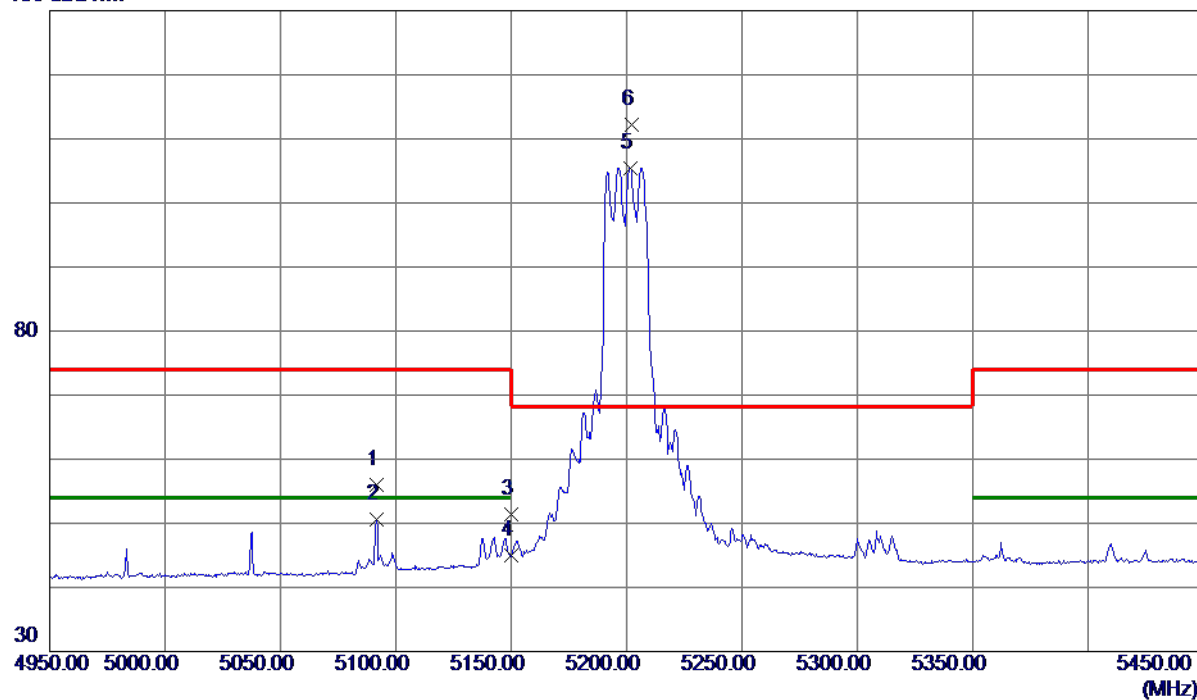

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5091.5000    | 41.90                      | 14.18                   | 56.08                     | 74.00           | -17.92       | Peak     |          |
| 2   | 5091.5000    | 36.48                      | 14.18                   | 50.66                     | 54.00           | -3.34        | AVG      |          |
| 3   | 5150.0000    | 37.07                      | 14.32                   | 51.39                     | 74.00           | -22.61       | Peak     |          |
| 4   | 5150.0000    | 30.77                      | 14.32                   | 45.09                     | 54.00           | -8.91        | AVG      |          |
| 5   | 5201.7500    | 91.02                      | 14.44                   | 105.46                    | 999.00          | -893.54      | AVG      | No Limit |
| 6 * | 5202.0000    | 97.77                      | 14.44                   | 112.21                    | 68.30           | 43.91        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5200 MHz |

## Horizontal

80 dBuV/m

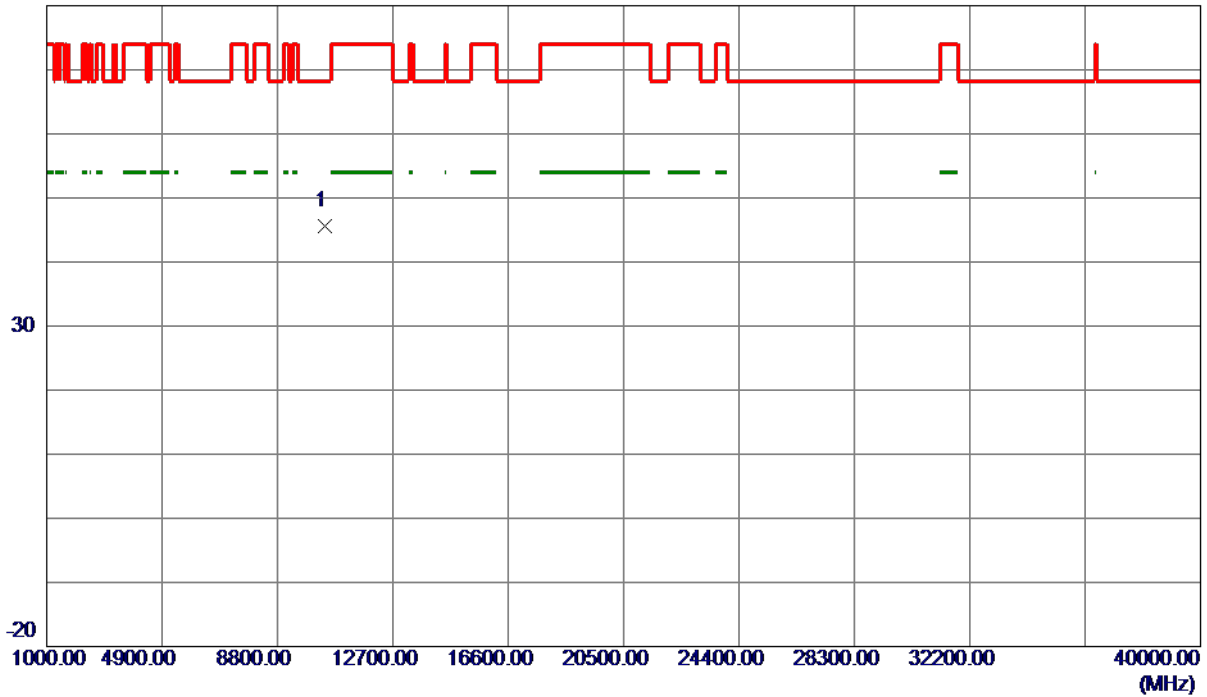

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10399.4450   | 34.25                      | 11.37                   | 45.62                     | 68.30           | -22.68       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5240 MHz |

## Vertical

130 dBuV/m

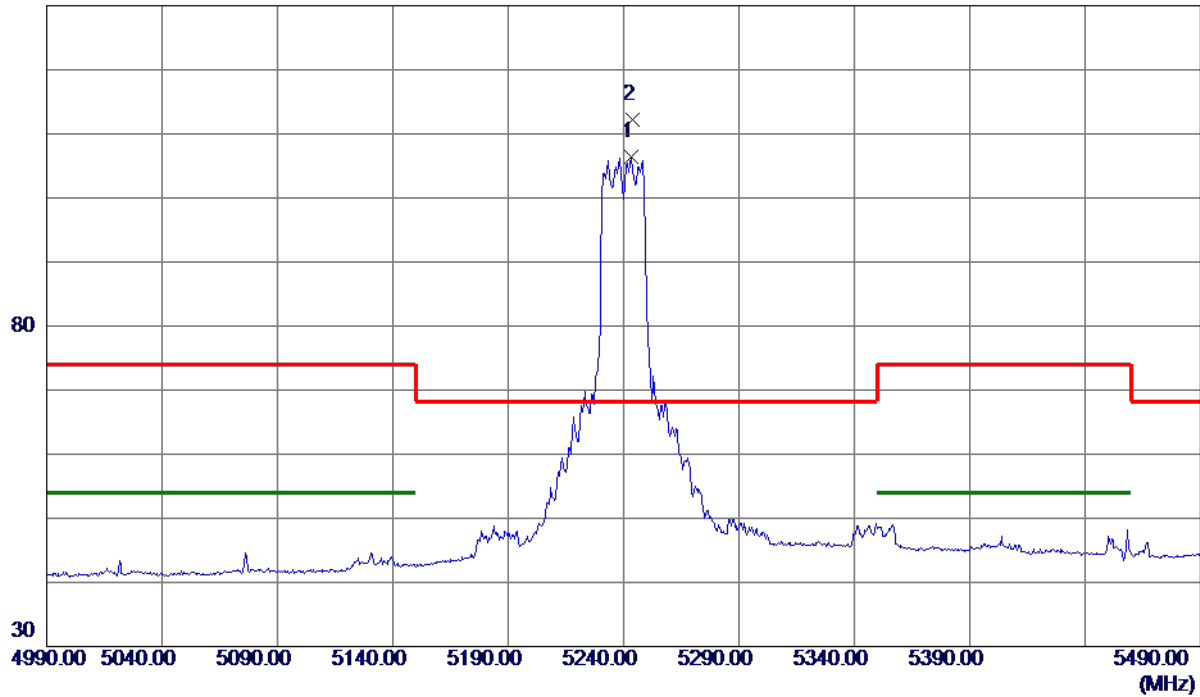

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5243.2500    | 91.87                      | 14.54                   | 106.41                    | 999.00          | -892.59      | AVG      | No Limit |
| 2 * | 5244.0000    | 97.67                      | 14.54                   | 112.21                    | 68.30           | 43.91        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5240 MHz |

## Vertical

80 dBuV/m

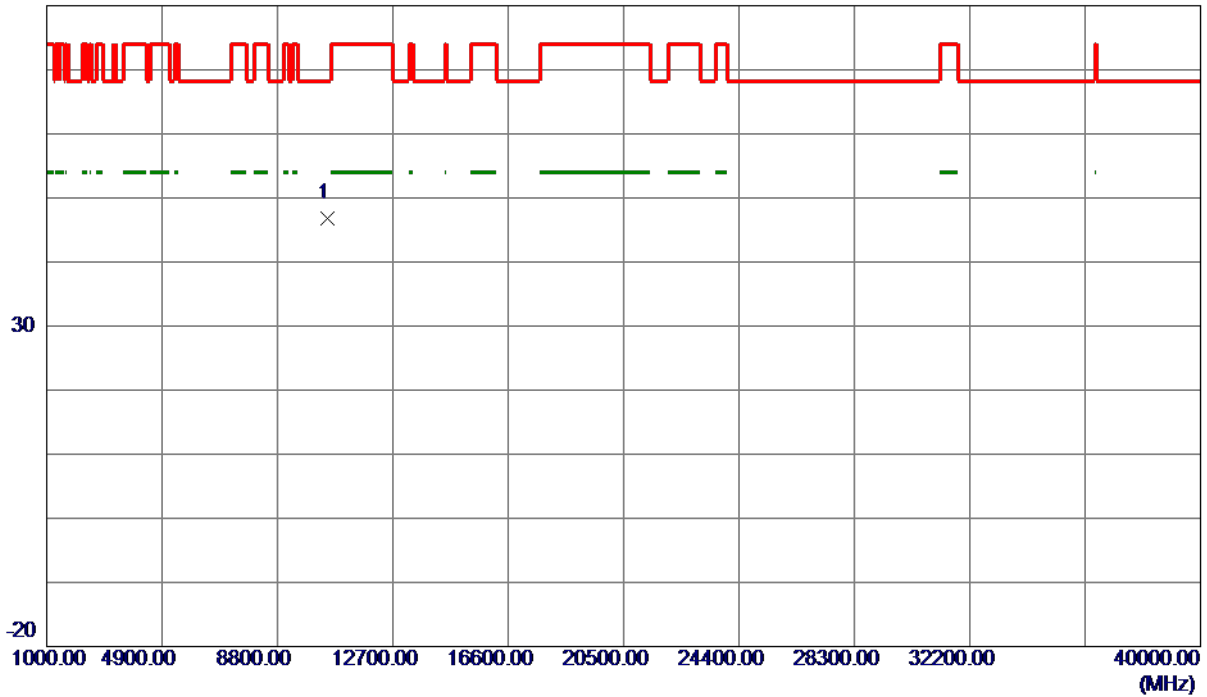

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10476.7050   | 35.21                      | 11.50                   | 46.71                     | 68.30           | -21.59       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5240 MHz |

## Horizontal

130 dBuV/m

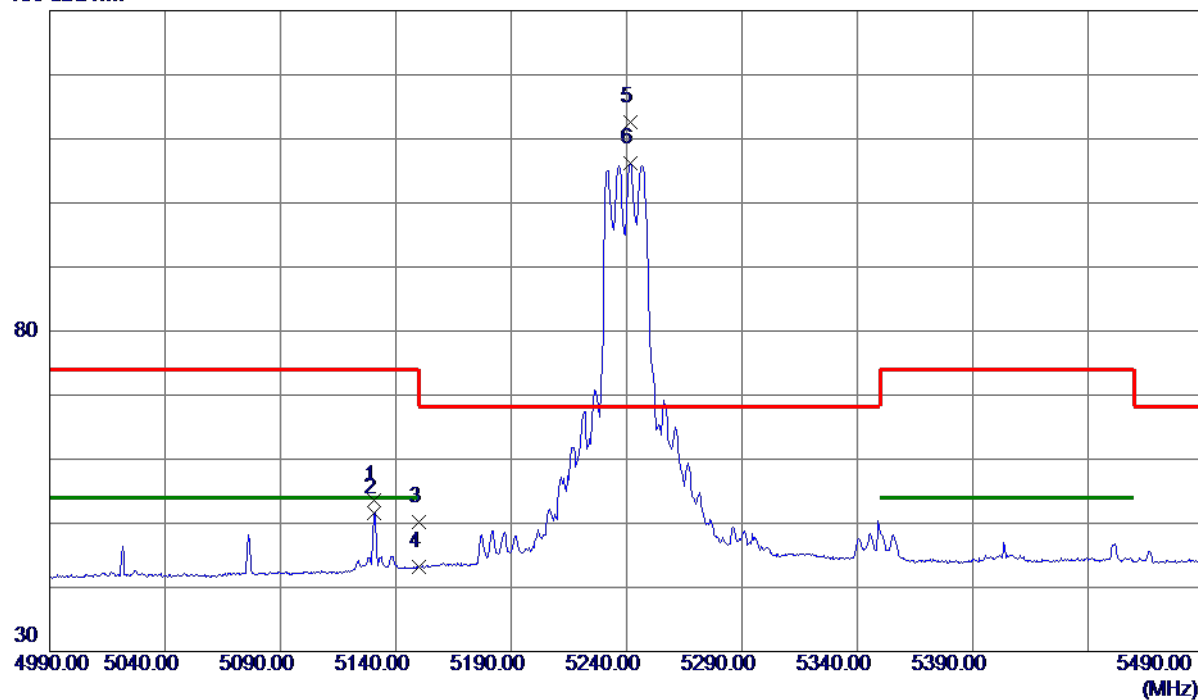

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5130.7500    | 39.32                      | 14.27                   | 53.59                     | 74.00           | -20.41       | Peak     |          |
| 2   | 5130.7500    | 37.39                      | 14.27                   | 51.66                     | 54.00           | -2.34        | AVG      |          |
| 3   | 5150.0000    | 35.82                      | 14.32                   | 50.14                     | 74.00           | -23.86       | Peak     |          |
| 4   | 5150.0000    | 28.87                      | 14.32                   | 43.19                     | 54.00           | -10.81       | AVG      |          |
| 5 * | 5241.5000    | 98.11                      | 14.53                   | 112.64                    | 68.30           | 44.34        | Peak     | No Limit |
| 6   | 5241.7500    | 91.68                      | 14.53                   | 106.21                    | 999.00          | -892.79      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT20) Mode 5240 MHz |

## Horizontal

80 dBuV/m

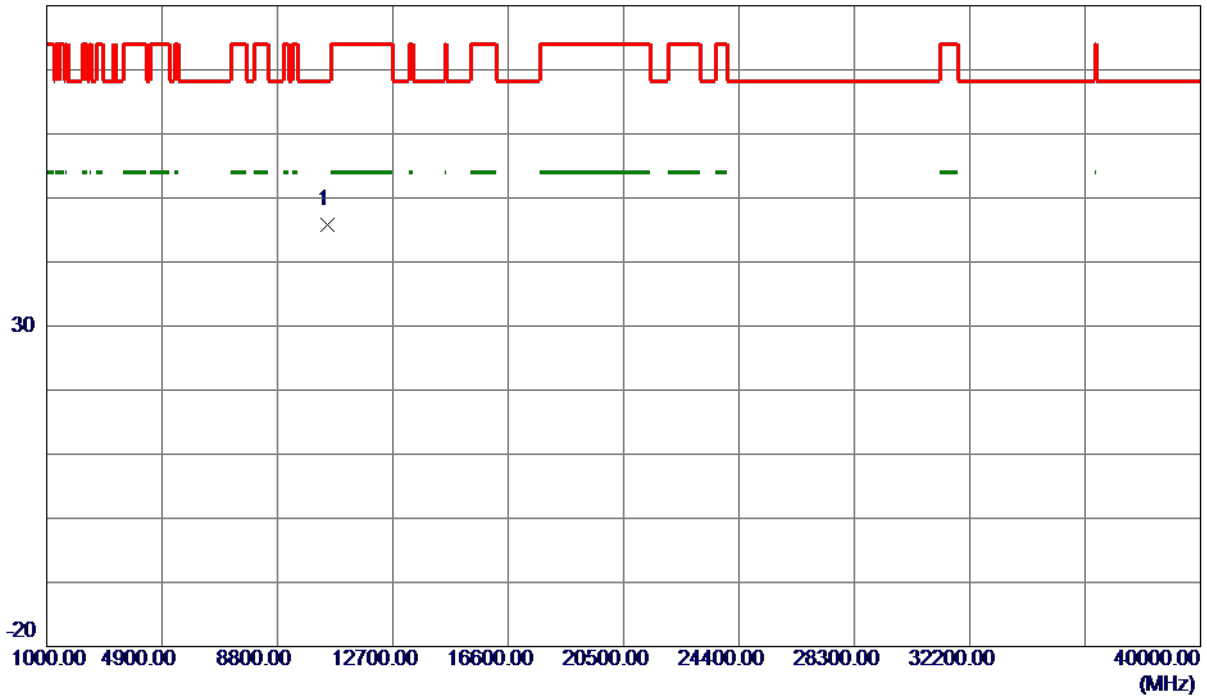

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10478.6650   | 34.37                      | 11.50                   | 45.87                     | 68.30           | -22.43       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5190 MHz |

## Vertical

130 dBuV/m

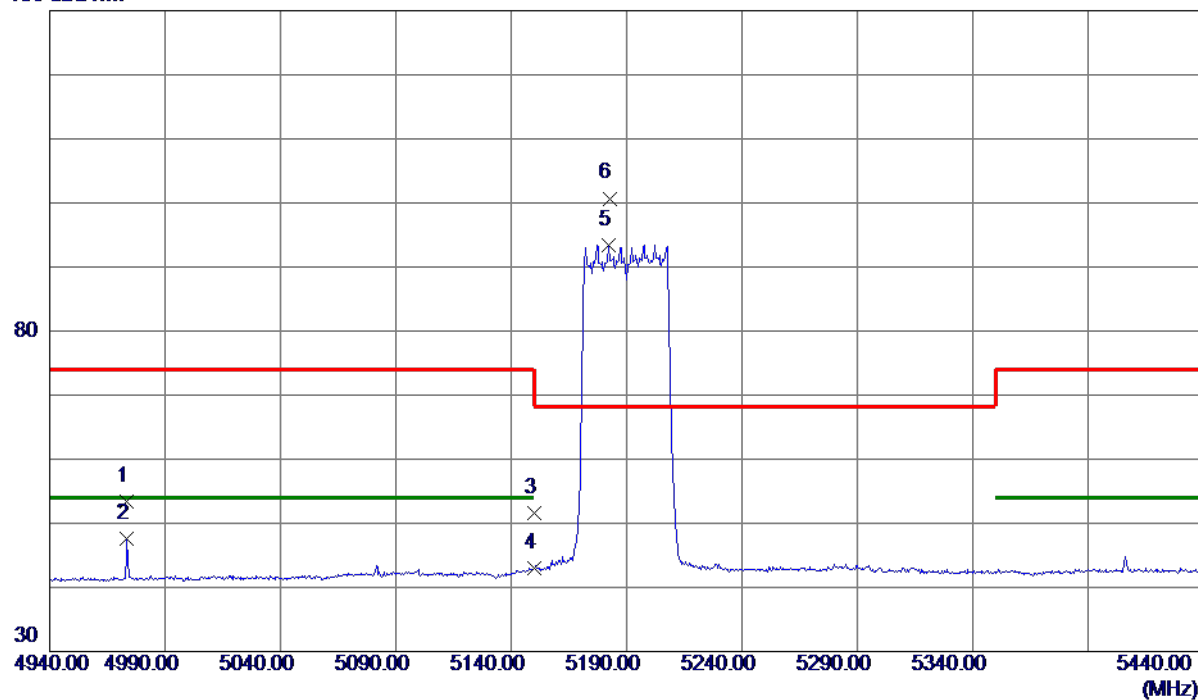

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 4973.5000    | 39.51                      | 13.88                   | 53.39                     | 74.00           | -20.61       | Peak     |          |
| 2   | 4973.5000    | 33.66                      | 13.88                   | 47.54                     | 54.00           | -6.46        | AVG      |          |
| 3   | 5150.0000    | 37.27                      | 14.32                   | 51.59                     | 74.00           | -22.41       | Peak     |          |
| 4   | 5150.0000    | 28.59                      | 14.32                   | 42.91                     | 54.00           | -11.09       | AVG      |          |
| 5   | 5182.2500    | 79.08                      | 14.39                   | 93.47                     | 999.00          | -905.53      | AVG      | No Limit |
| 6 * | 5182.5000    | 86.31                      | 14.39                   | 100.70                    | 68.30           | 32.40        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5190 MHz |

## Vertical

80 dBuV/m

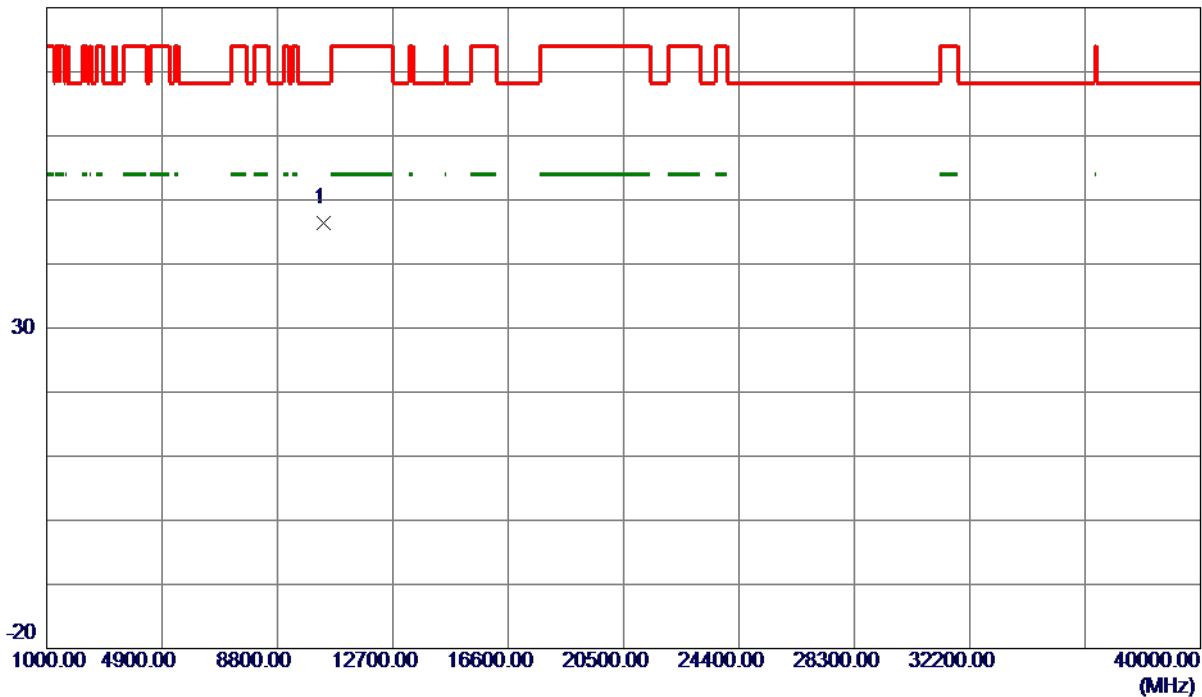

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.8000   | 35.04                      | 11.33                   | 46.37                     | 68.30           | -21.93       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5190 MHz |

## Horizontal

130 dBuV/m

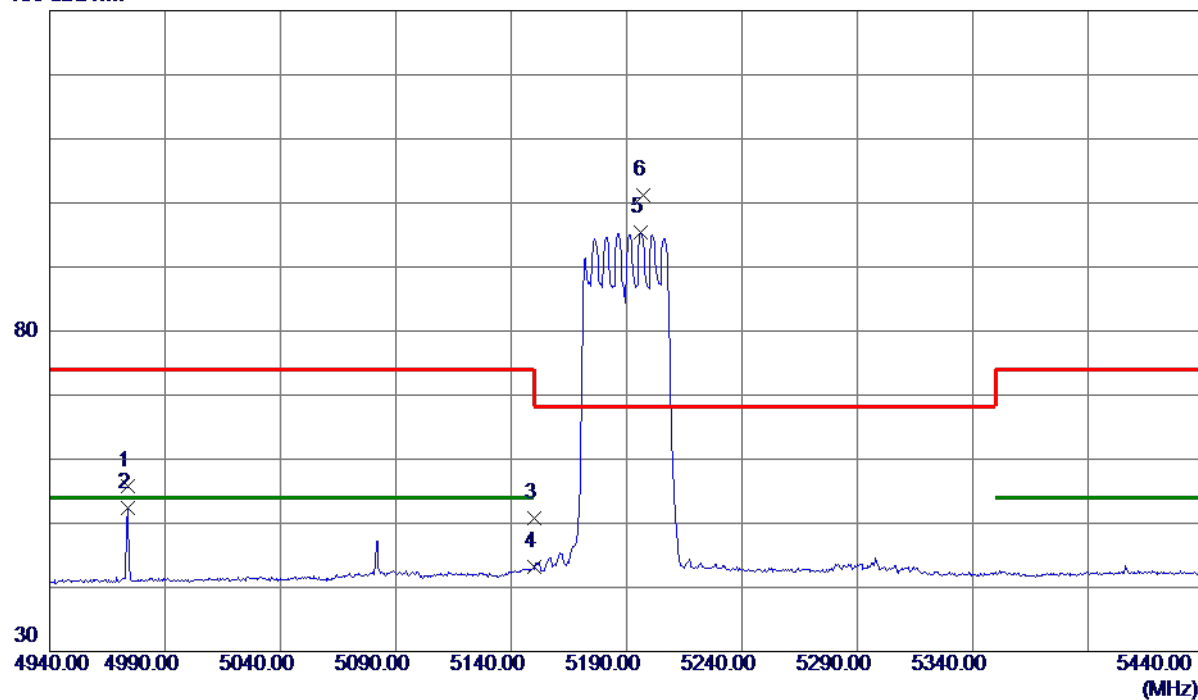

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 4973.7500    | 41.85                      | 13.88                   | 55.73                     | 74.00           | -18.27       | Peak     |          |
| 2   | 4973.7500    | 38.48                      | 13.88                   | 52.36                     | 54.00           | -1.64        | AVG      |          |
| 3   | 5150.0000    | 36.50                      | 14.32                   | 50.82                     | 74.00           | -23.18       | Peak     |          |
| 4   | 5150.0000    | 28.91                      | 14.32                   | 43.23                     | 54.00           | -10.77       | AVG      |          |
| 5   | 5196.2500    | 80.93                      | 14.43                   | 95.36                     | 999.00          | -903.64      | AVG      | No Limit |
| 6 * | 5197.0000    | 86.75                      | 14.43                   | 101.18                    | 68.30           | 32.88        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5190 MHz |

## Horizontal

80 dBuV/m

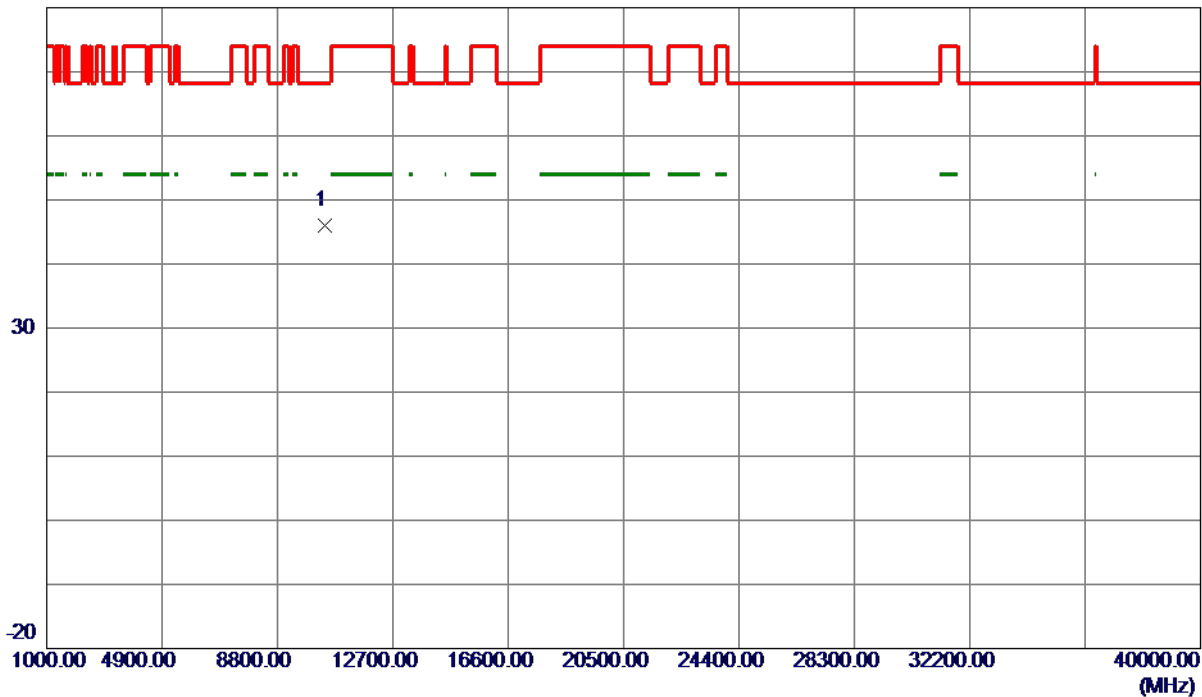

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10382.8050   | 34.60                      | 11.34                   | 45.94                     | 68.30           | -22.36       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5230 MHz |

## Vertical

130 dBuV/m

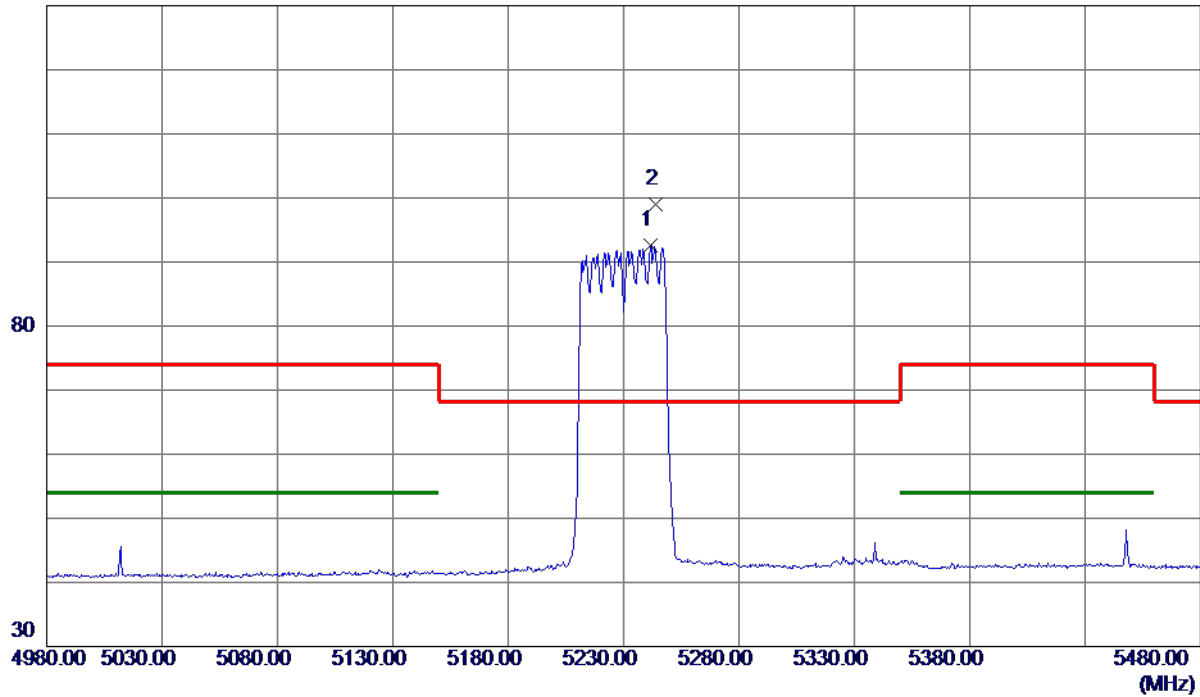

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5241.7500    | 78.10                      | 14.53                   | 92.63                     | 999.00          | -906.37      | AVG      | No Limit |
| 2 * | 5243.7500    | 84.55                      | 14.54                   | 99.09                     | 68.30           | 30.79        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5230 MHz |

## Vertical

80 dBuV/m

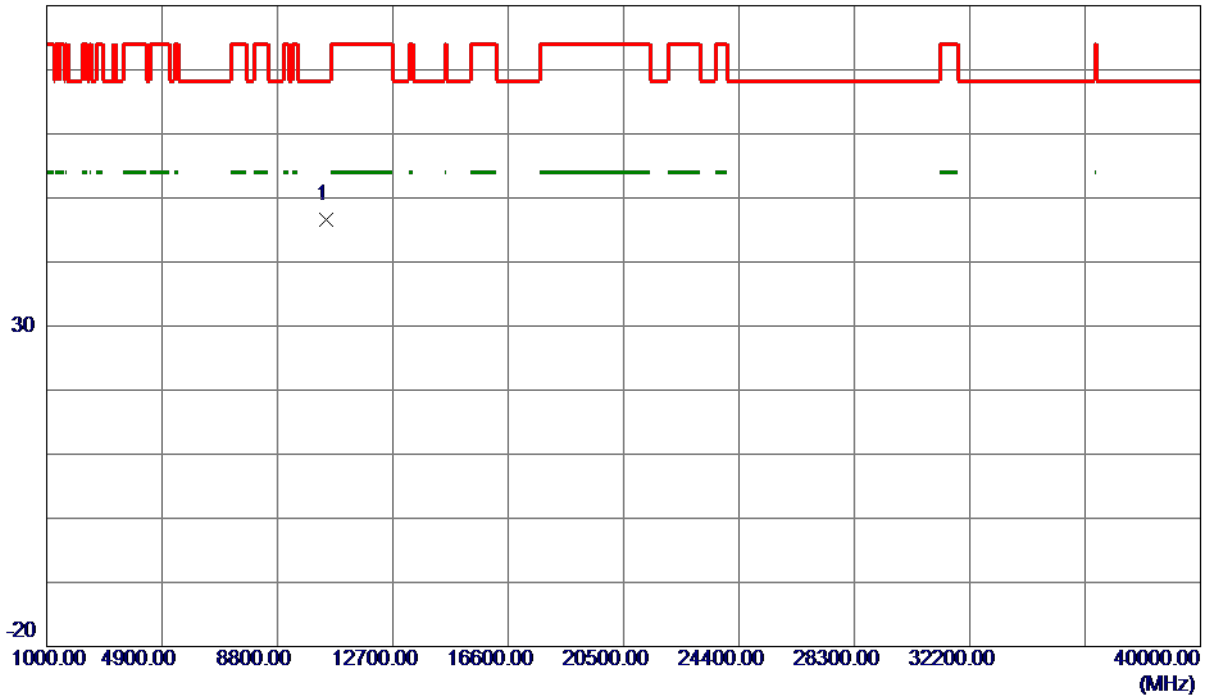

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10456.2350   | 35.06                      | 11.46                   | 46.52                     | 68.30           | -21.78       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5230 MHz |

## Horizontal

130 dBuV/m

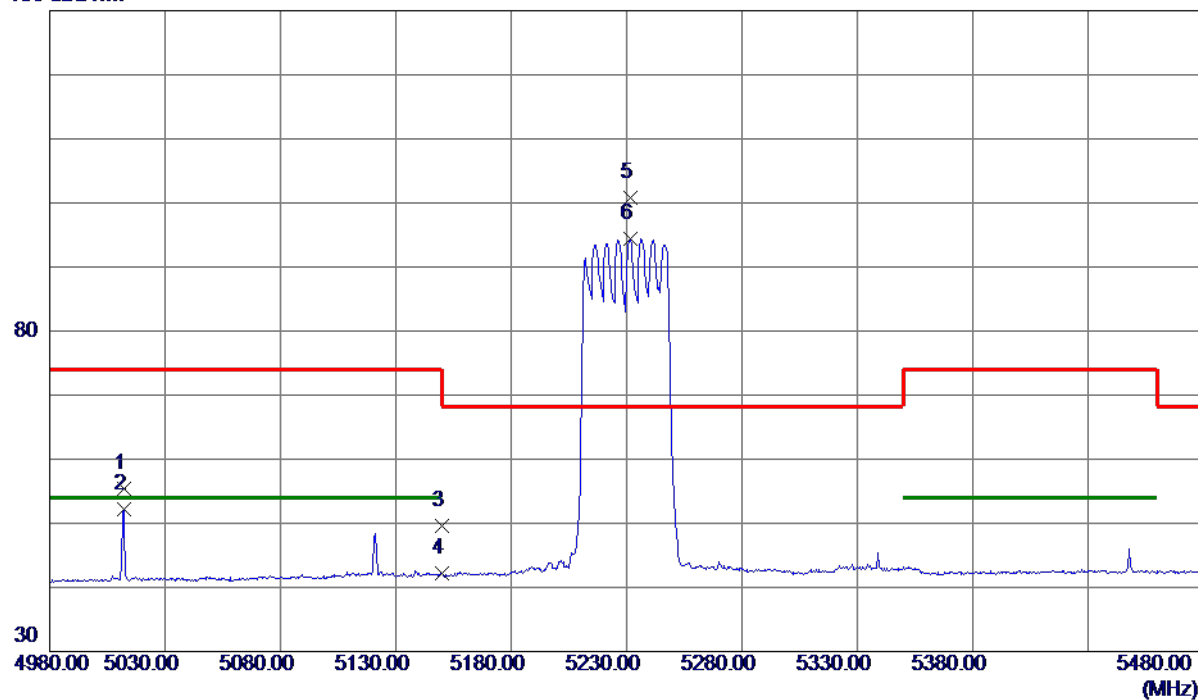

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5012.0000    | 41.34                      | 13.99                   | 55.33                     | 74.00           | -18.67       | Peak     |          |
| 2   | 5012.0000    | 38.30                      | 13.99                   | 52.29                     | 54.00           | -1.71        | AVG      |          |
| 3   | 5150.0000    | 35.33                      | 14.32                   | 49.65                     | 74.00           | -24.35       | Peak     |          |
| 4   | 5150.0000    | 27.80                      | 14.32                   | 42.12                     | 54.00           | -11.88       | AVG      |          |
| 5 * | 5231.5000    | 86.23                      | 14.51                   | 100.74                    | 68.30           | 32.44        | Peak     | No Limit |
| 6   | 5231.5000    | 79.91                      | 14.51                   | 94.42                     | 999.00          | -904.58      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT40) Mode 5230 MHz |

## Horizontal

80 dBuV/m

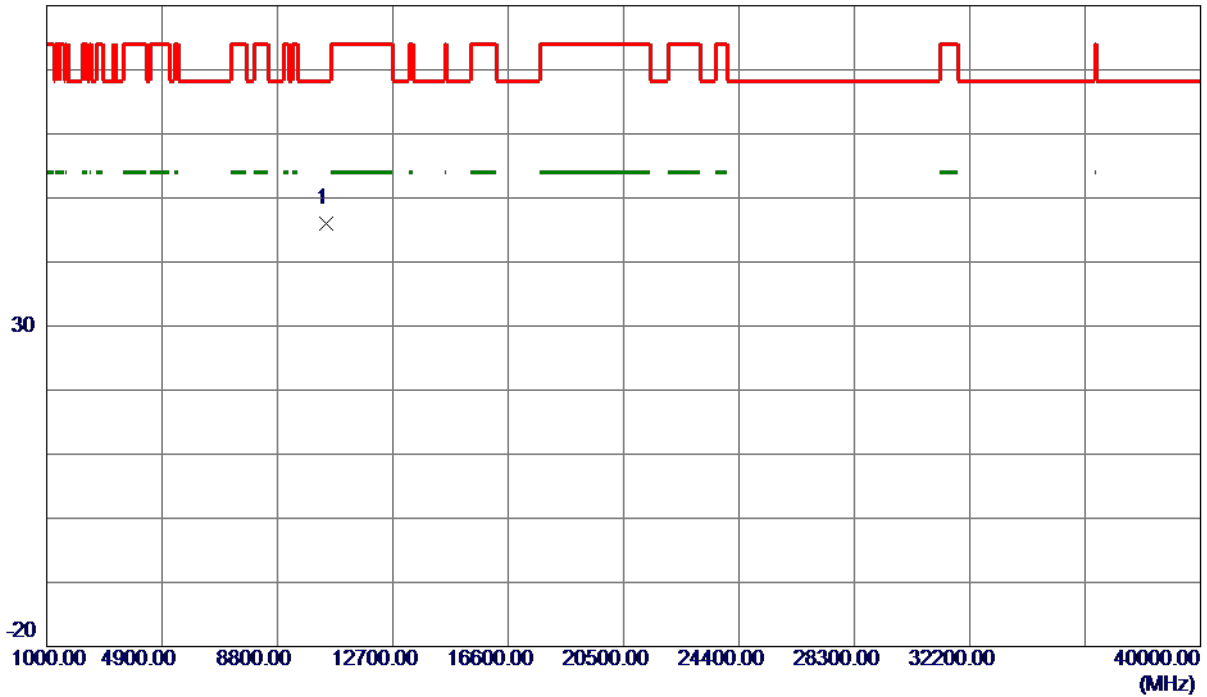

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10461.8900   | 34.51                      | 11.47                   | 45.98                     | 68.30           | -22.32       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT80) Mode 5210 MHz |

## Vertical

130 dBuV/m

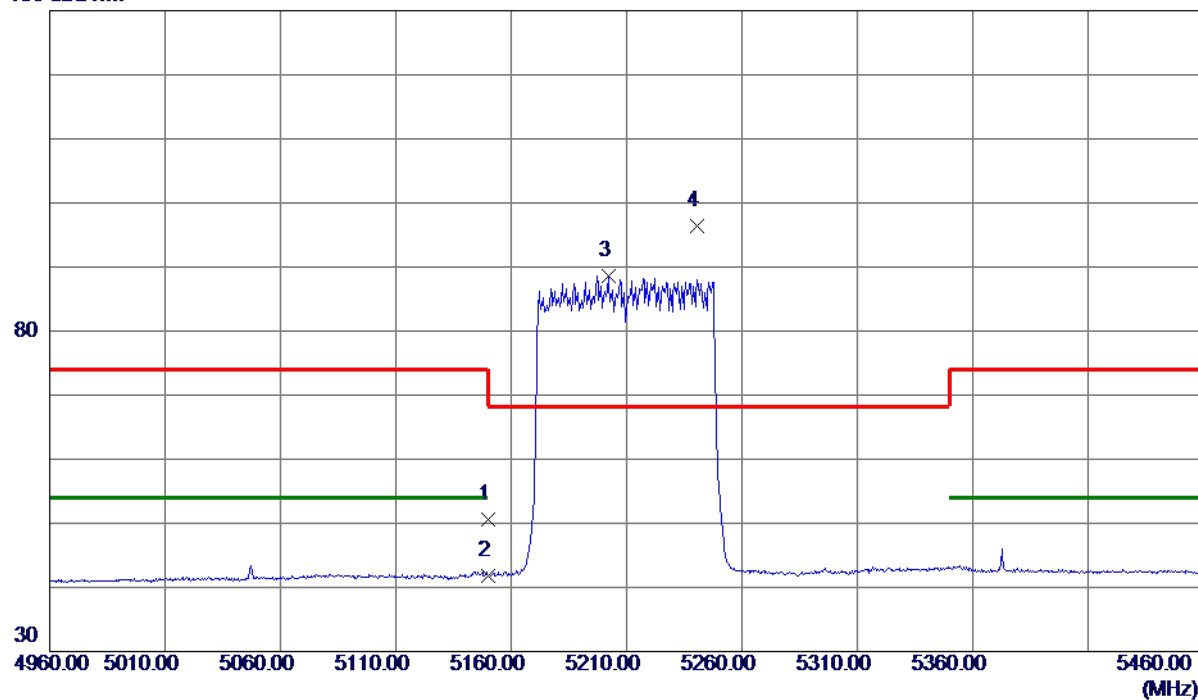

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 36.29                      | 14.32                   | 50.61                     | 74.00           | -23.39       | Peak     |          |
| 2   | 5150.0000    | 27.49                      | 14.32                   | 41.81                     | 54.00           | -12.19       | AVG      |          |
| 3   | 5202.2500    | 74.24                      | 14.44                   | 88.68                     | 999.00          | -910.32      | AVG      | No Limit |
| 4 * | 5240.7500    | 81.93                      | 14.53                   | 96.46                     | 68.30           | 28.16        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT80) Mode 5210 MHz |

## Vertical

80 dBuV/m

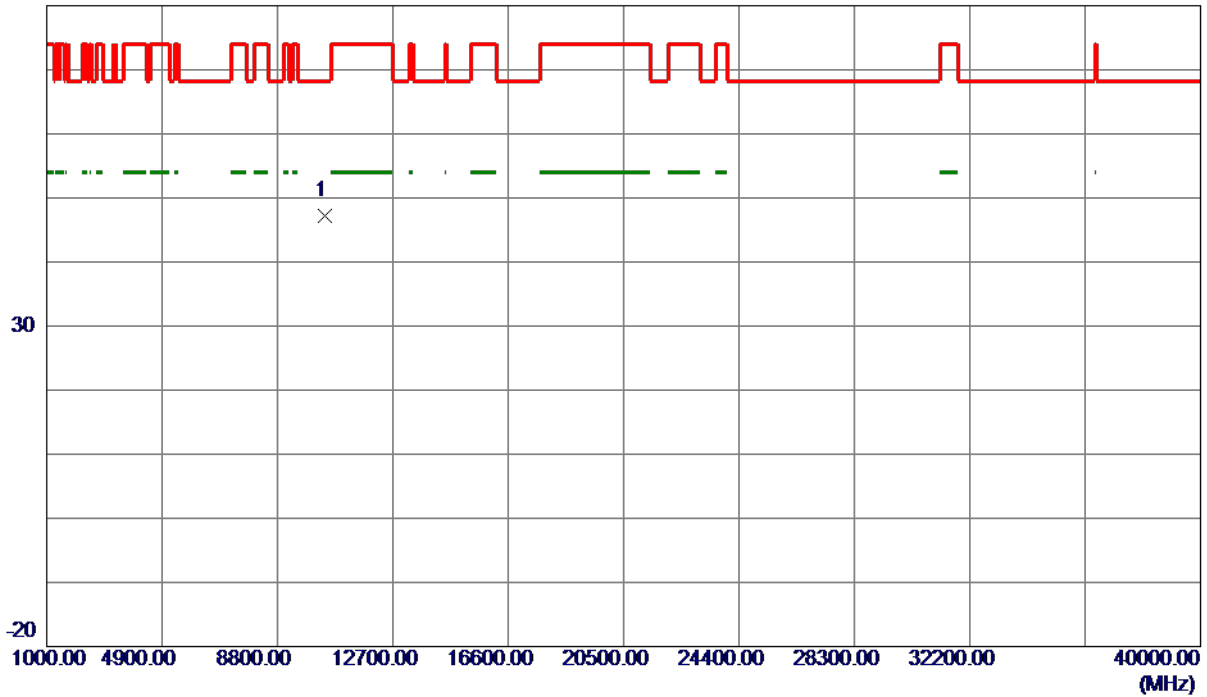

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10419.7600   | 35.83                      | 11.40                   | 47.23                     | 68.30           | -21.07       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT80) Mode 5210 MHz |

## Horizontal

130 dBuV/m

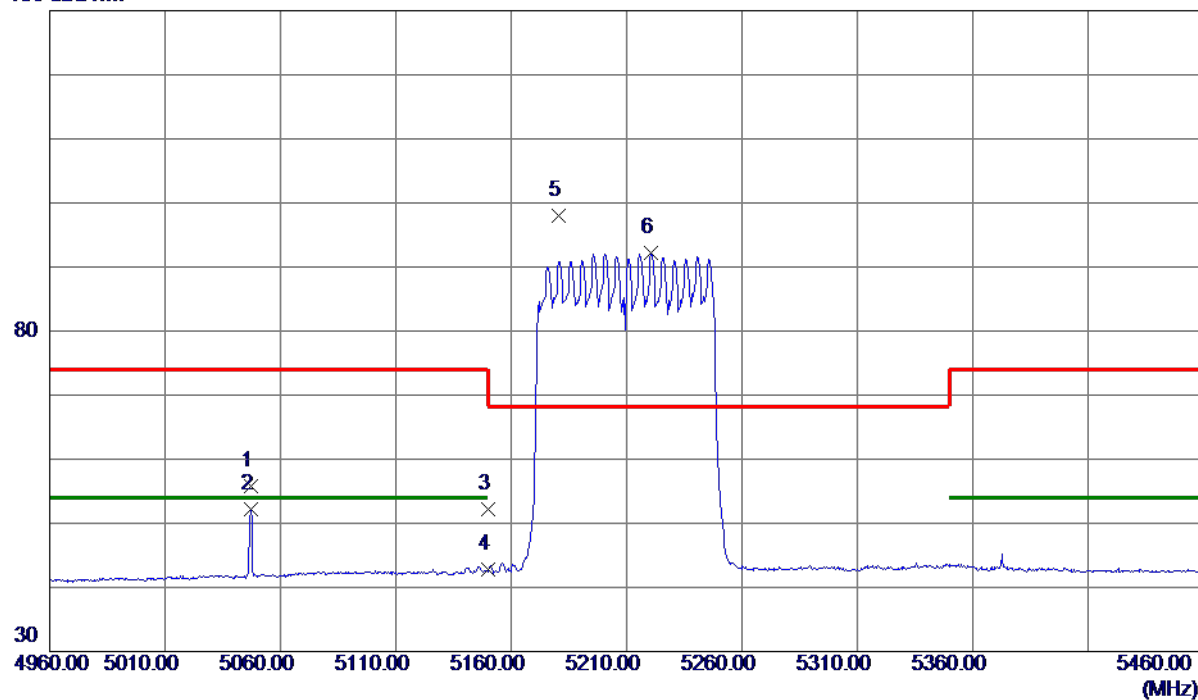

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5047.2500    | 41.65                      | 14.07                   | 55.72                     | 74.00           | -18.28       | Peak     |          |
| 2   | 5047.2500    | 38.20                      | 14.07                   | 52.27                     | 54.00           | -1.73        | AVG      |          |
| 3   | 5150.0000    | 37.93                      | 14.32                   | 52.25                     | 74.00           | -21.75       | Peak     |          |
| 4   | 5150.0000    | 28.49                      | 14.32                   | 42.81                     | 54.00           | -11.19       | AVG      |          |
| 5 * | 5180.7500    | 83.53                      | 14.39                   | 97.92                     | 68.30           | 29.62        | Peak     | No Limit |
| 6   | 5220.7500    | 77.69                      | 14.48                   | 92.17                     | 999.00          | -906.83      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-1_TX AC (VHT80) Mode 5210 MHz |

## Horizontal

80 dBuV/m

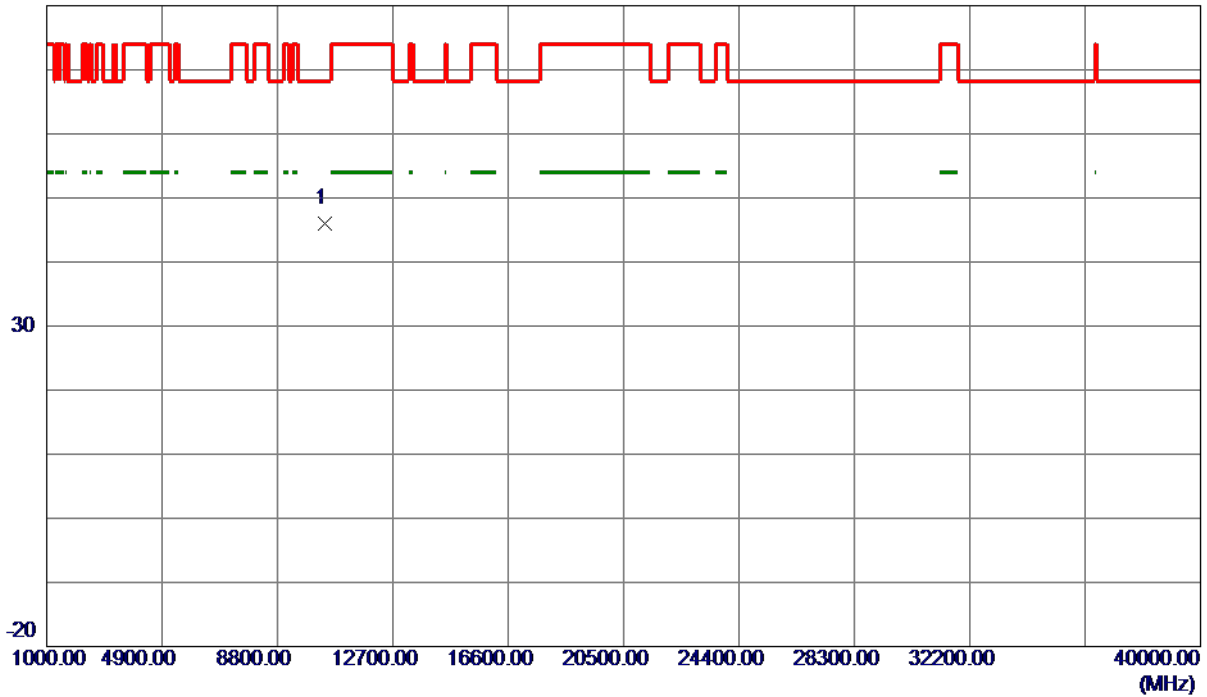

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10421.6900   | 34.69                      | 11.40                   | 46.09                     | 68.30           | -22.21       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5260 MHz |

## Vertical

130 dBuV/m

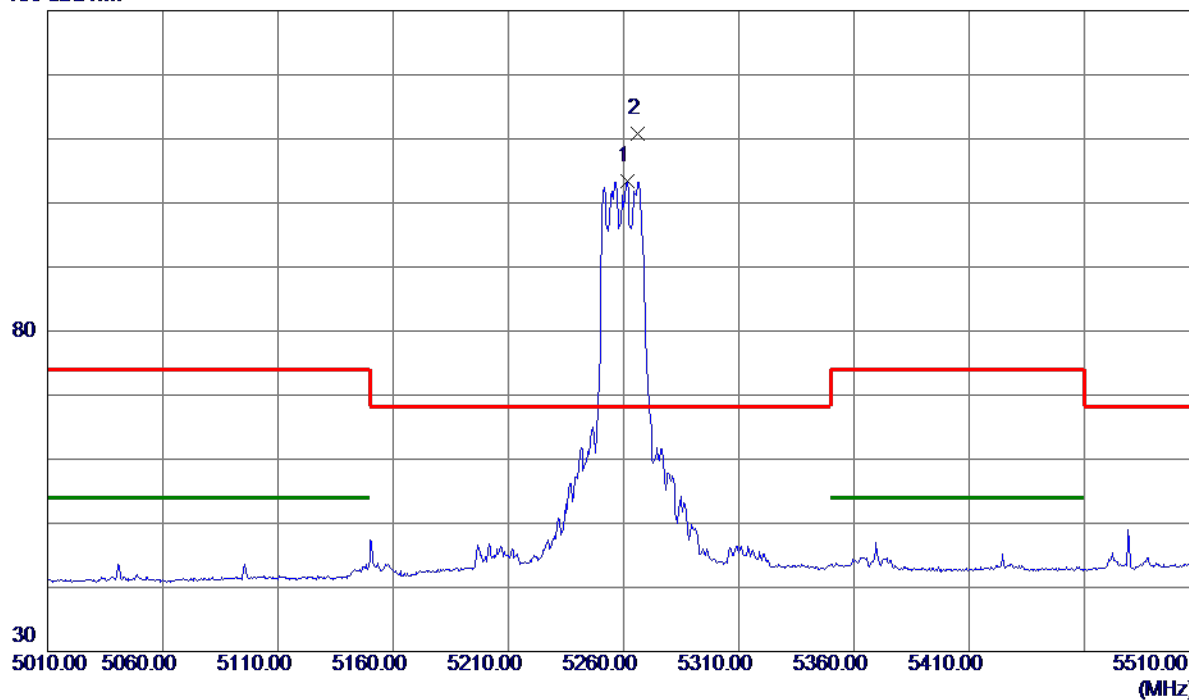

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5261.5000    | 88.75                      | 14.58                   | 103.33                    | 999.00          | -895.67      | AVG      | No Limit |
| 2 * | 5266.2500    | 96.17                      | 14.59                   | 110.76                    | 68.30           | 42.46        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5260 MHz |

## Vertical

80 dBuV/m

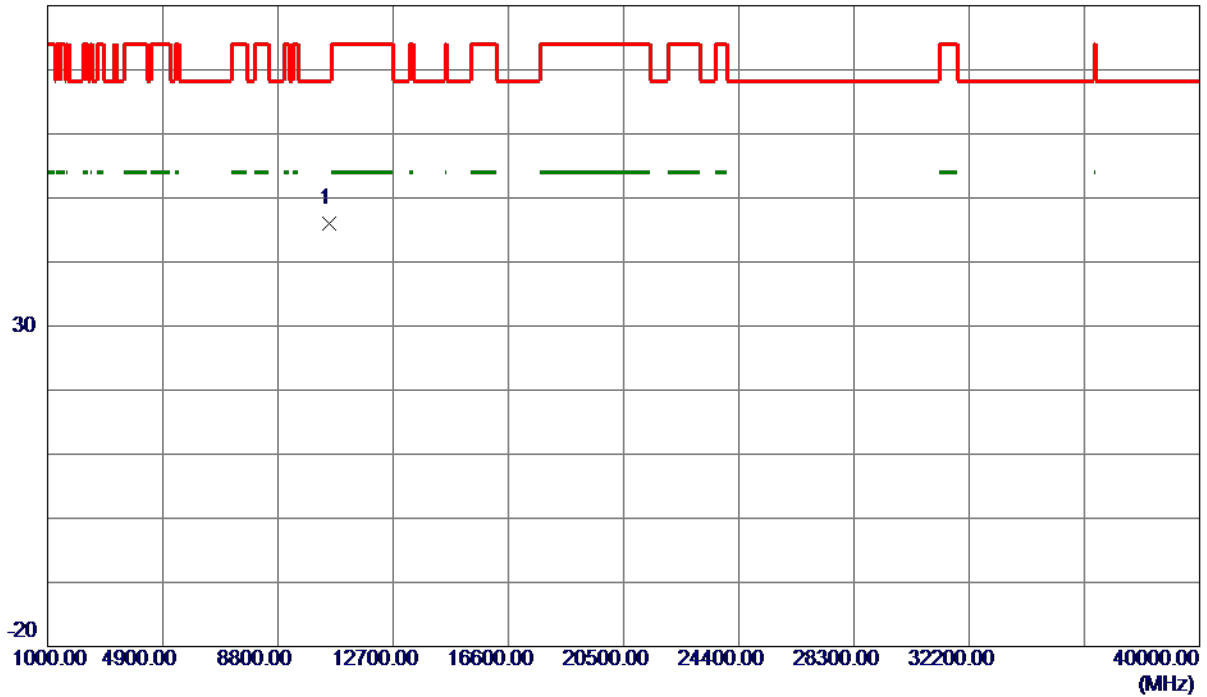

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10517.2200   | 34.54                      | 11.54                   | 46.08                     | 68.30           | -22.22       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5260 MHz |

## Horizontal

130 dBuV/m

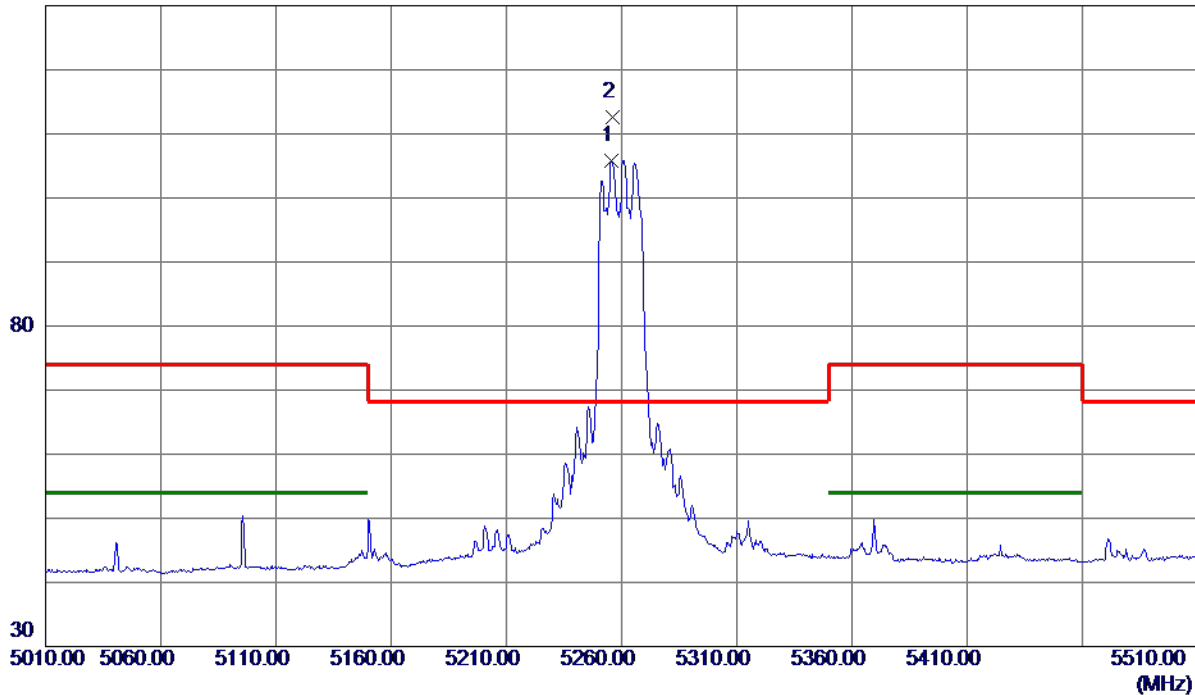

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5255.7500    | 91.31                      | 14.57                   | 105.88                    | 999.00          | -893.12      | AVG      | No Limit |
| 2 * | 5256.0000    | 98.07                      | 14.57                   | 112.64                    | 68.30           | 44.34        | Peak     | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5260 MHz |

## Horizontal

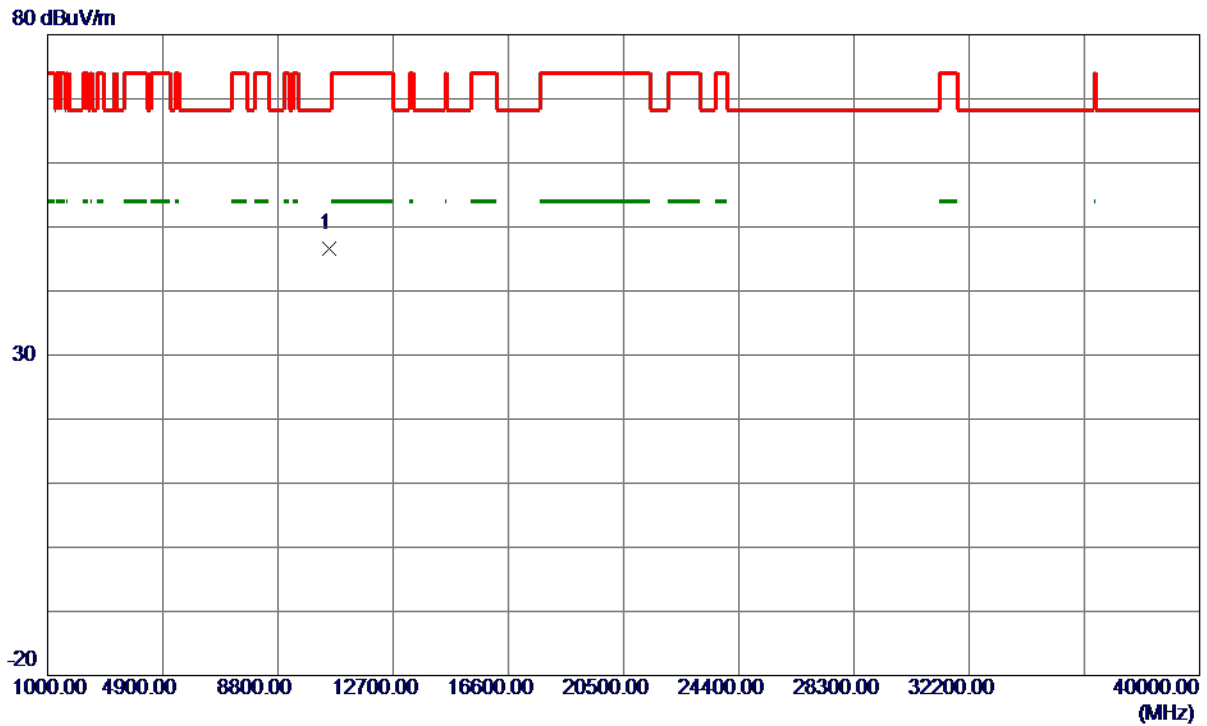

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10519.1300   | 35.04                      | 11.54                   | 46.58                     | 68.30           | -21.72       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5300 MHz |

## Vertical

130 dBuV/m

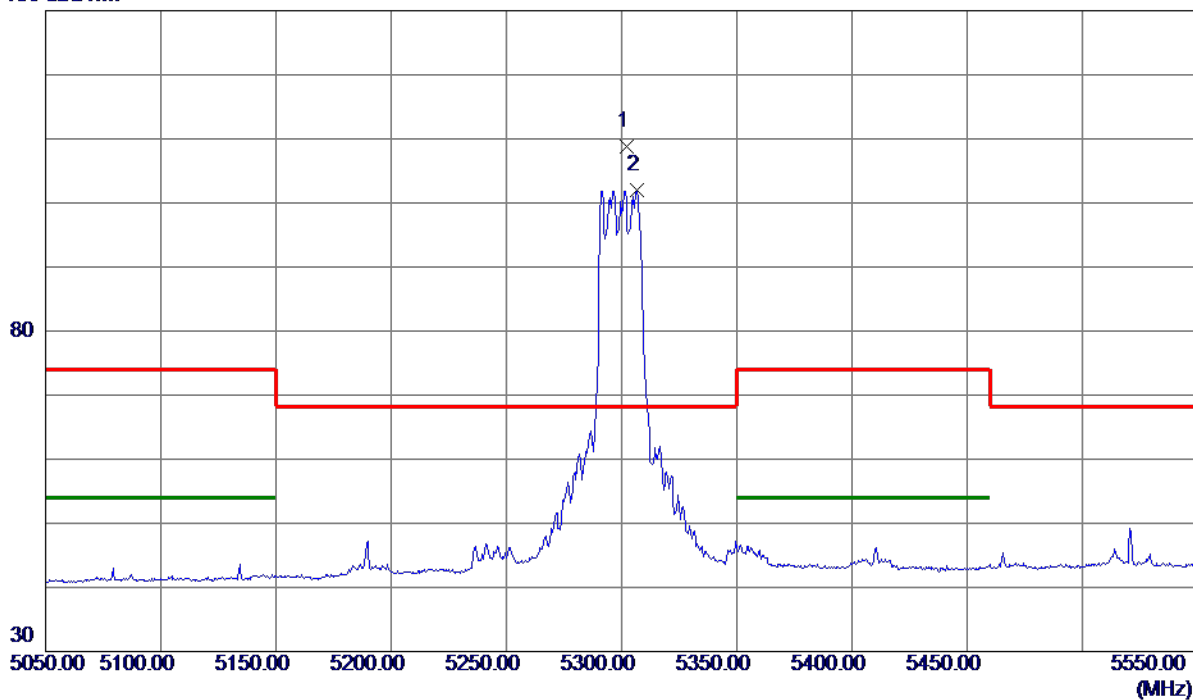

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5302.0000    | 94.17                      | 14.68                   | 108.85                    | 68.30           | 40.55        | Peak     | No Limit |
| 2   | 5306.5000    | 87.39                      | 14.69                   | 102.08                    | 999.00          | -896.92      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5300 MHz |

## Vertical

80 dBuV/m

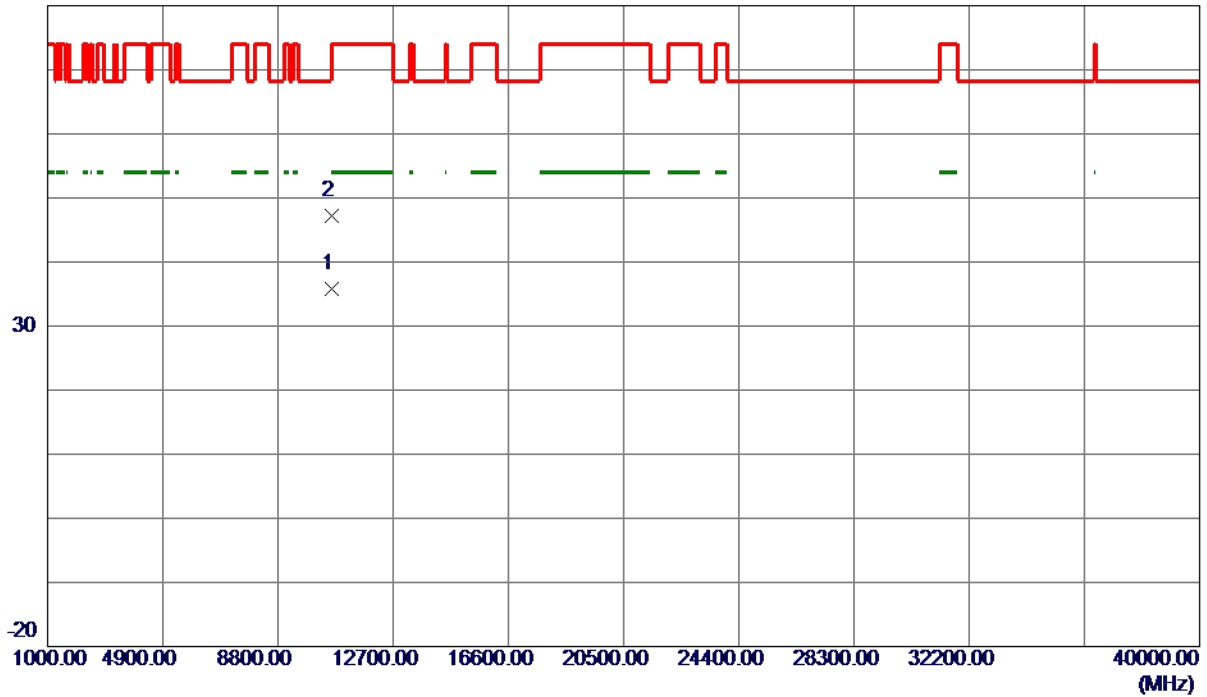

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10600.3750   | 24.17                      | 11.55                   | 35.72                     | 54.00           | -18.28       | AVG      |         |
| 2   | 10601.8600   | 35.70                      | 11.55                   | 47.25                     | 74.00           | -26.75       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5300 MHz |

## Horizontal

130 dBuV/m

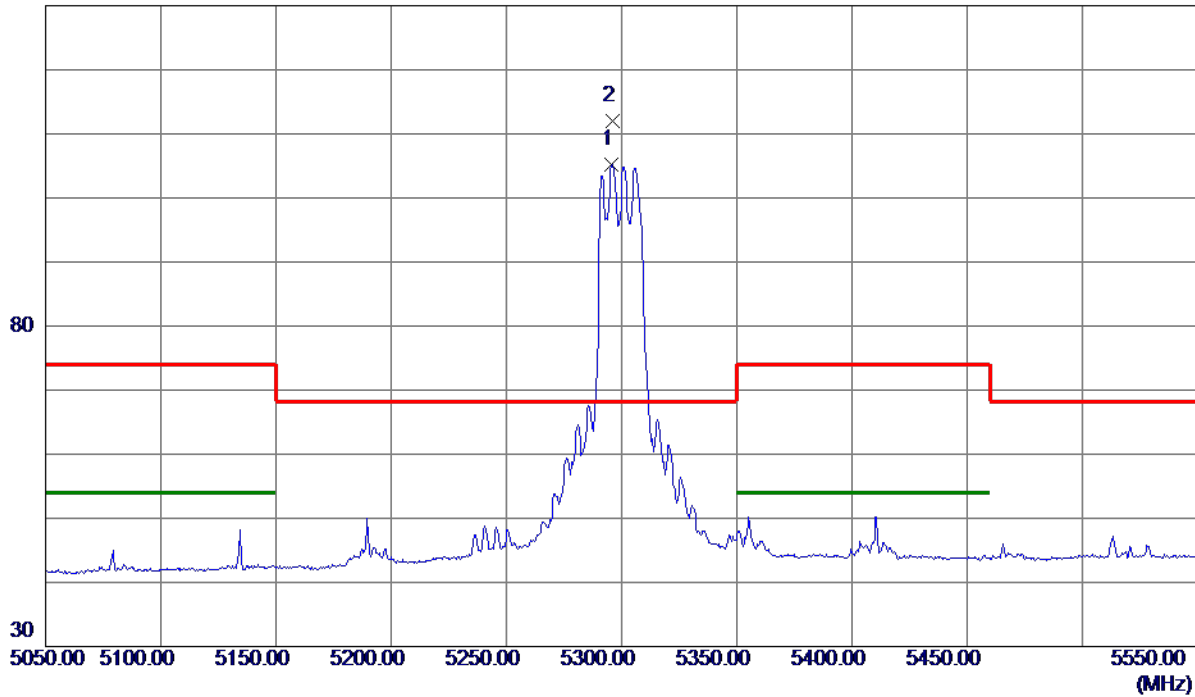

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5295.7500    | 90.59                      | 14.66                   | 105.25                    | 999.00          | -893.75      | AVG      | No Limit |
| 2 * | 5296.0000    | 97.36                      | 14.66                   | 112.02                    | 68.30           | 43.72        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5300 MHz |

## Horizontal

80 dBuV/m

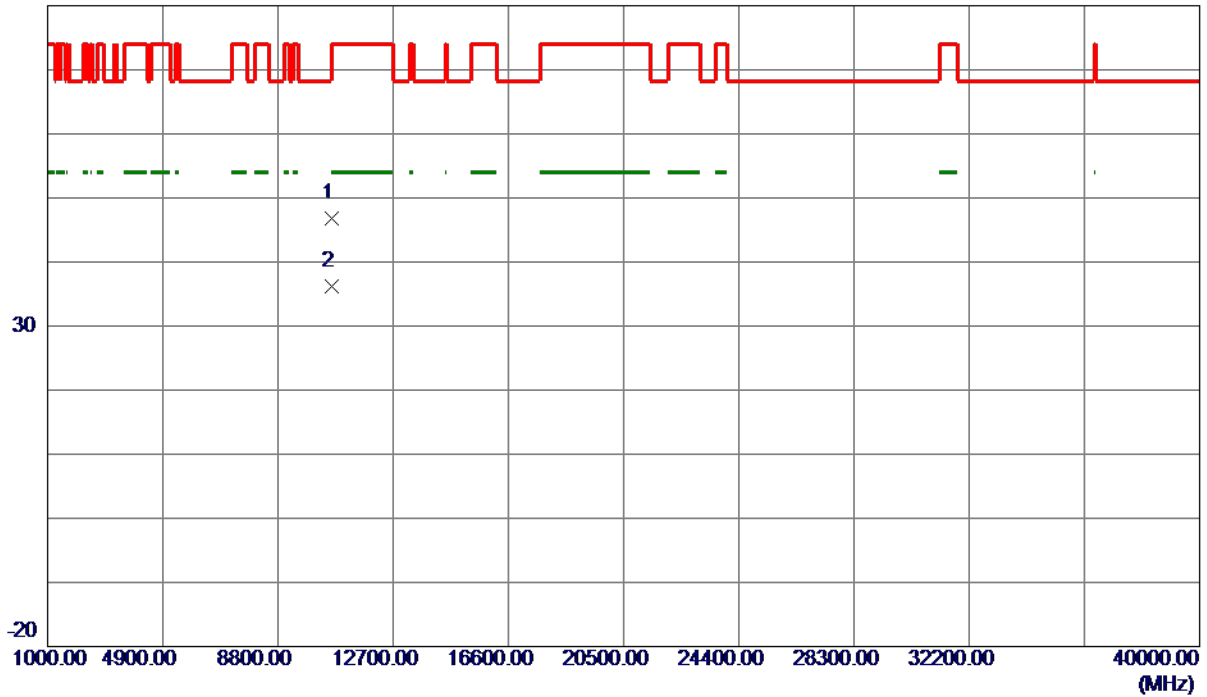

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10600.4500   | 35.28                      | 11.55                   | 46.83                     | 74.00           | -27.17       | Peak     |         |
| 2 * | 10604.8250   | 24.58                      | 11.55                   | 36.13                     | 54.00           | -17.87       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5320 MHz |

## Vertical

130 dBuV/m

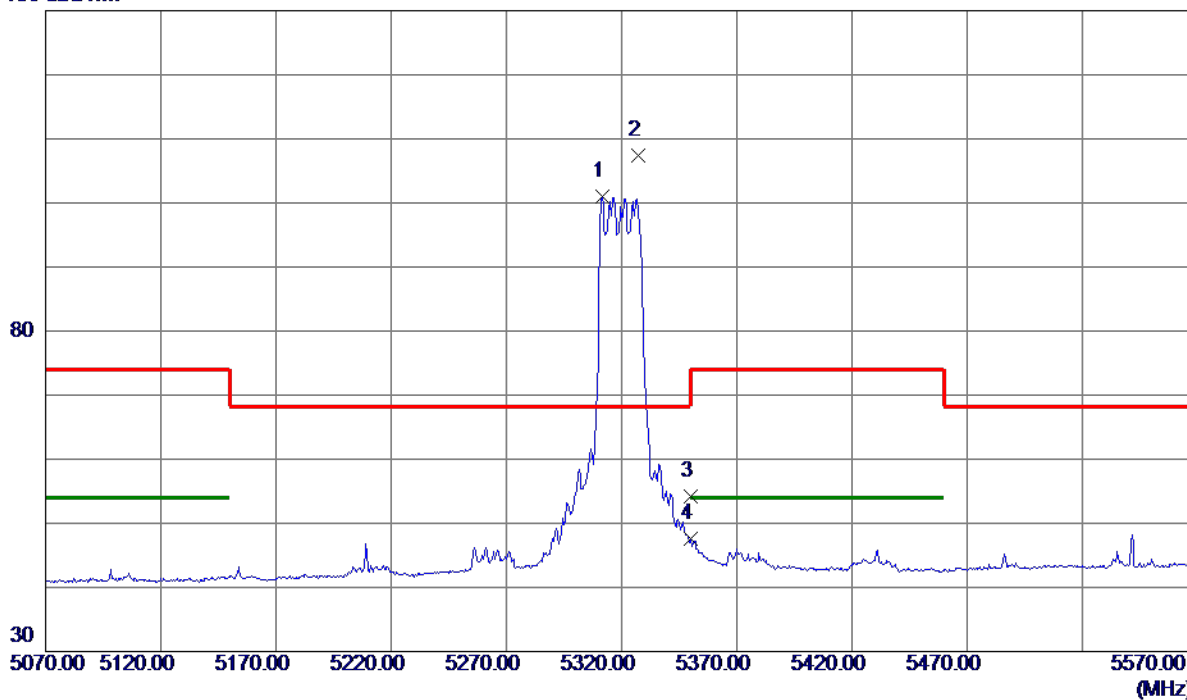

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5311.5000    | 86.21                      | 14.70                   | 100.91                    | 999.00          | -898.09      | AVG      | No Limit |
| 2 * | 5327.2500    | 92.71                      | 14.74                   | 107.45                    | 68.30           | 39.15        | Peak     | No Limit |
| 3   | 5350.0000    | 39.38                      | 14.79                   | 54.17                     | 74.00           | -19.83       | Peak     |          |
| 4   | 5350.0000    | 32.79                      | 14.79                   | 47.58                     | 54.00           | -6.42        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5320 MHz |

## Vertical

80 dBuV/m

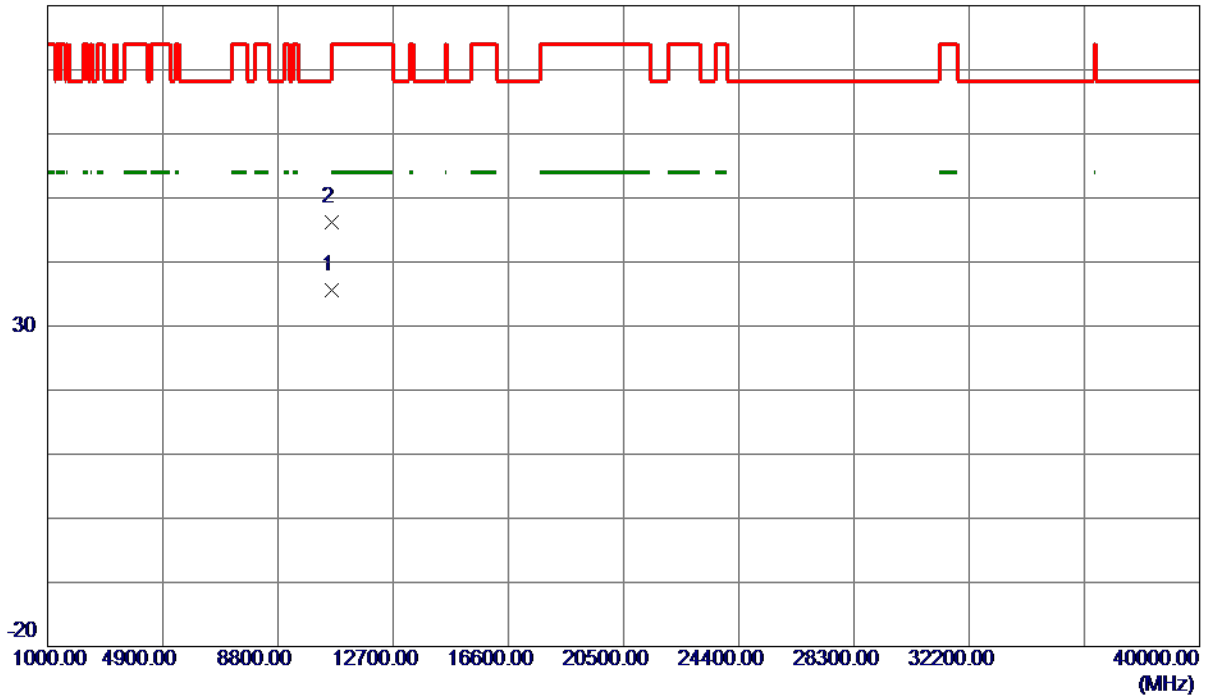

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10635.8150   | 24.09                      | 11.56                   | 35.65                     | 54.00           | -18.35       | AVG      |         |
| 2   | 10636.1300   | 34.59                      | 11.56                   | 46.15                     | 74.00           | -27.85       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5320 MHz |

## Horizontal

130 dBuV/m

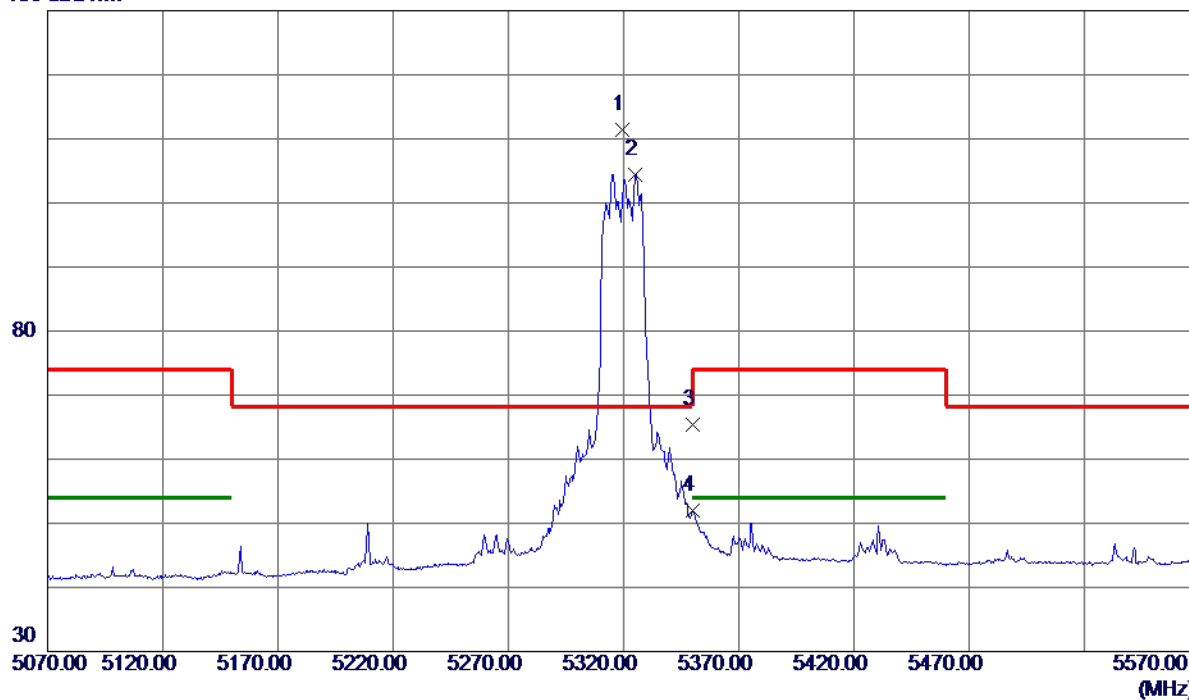

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5319.5000    | 96.70                      | 14.72                   | 111.42                    | 68.30           | 43.12        | Peak     | No Limit |
| 2   | 5325.2500    | 89.72                      | 14.73                   | 104.45                    | 999.00          | -894.55      | AVG      | No Limit |
| 3   | 5350.0000    | 50.56                      | 14.79                   | 65.35                     | 74.00           | -8.65        | Peak     |          |
| 4   | 5350.0000    | 37.26                      | 14.79                   | 52.05                     | 54.00           | -1.95        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT20) Mode 5320 MHz |

## Horizontal

80 dBuV/m

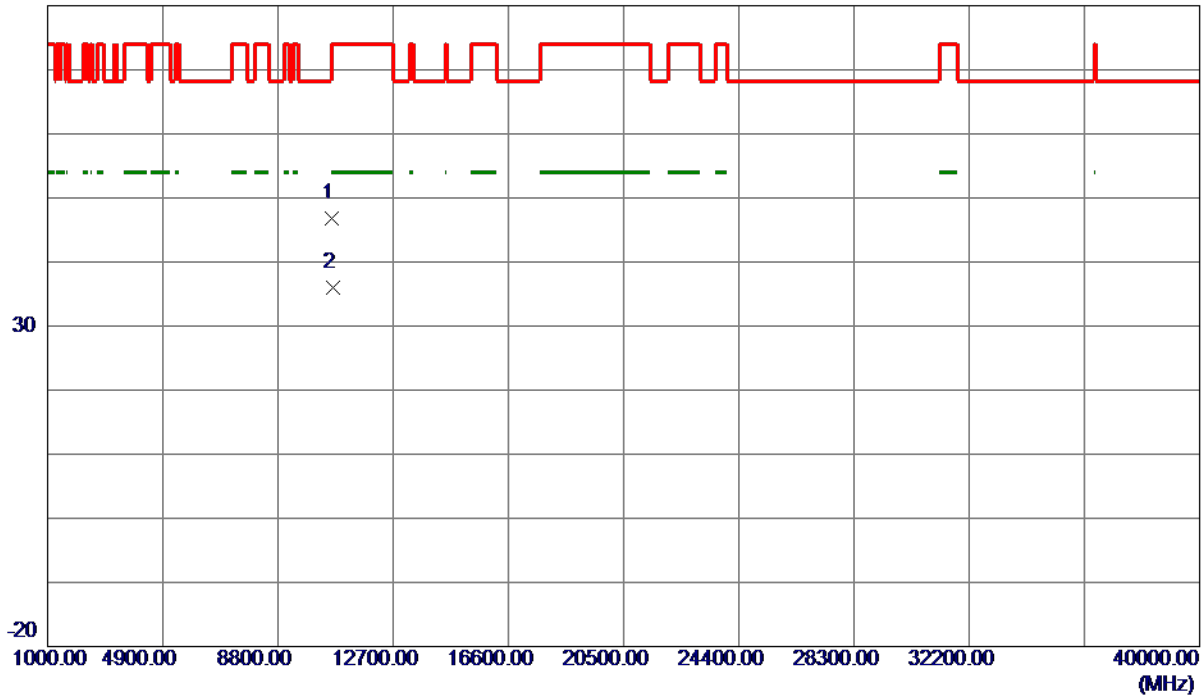

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10640.1150   | 35.24                      | 11.56                   | 46.80                     | 74.00           | -27.20       | Peak     |         |
| 2 * | 10644.8300   | 24.49                      | 11.56                   | 36.05                     | 54.00           | -17.95       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5270 MHz |

## Vertical

130 dBuV/m

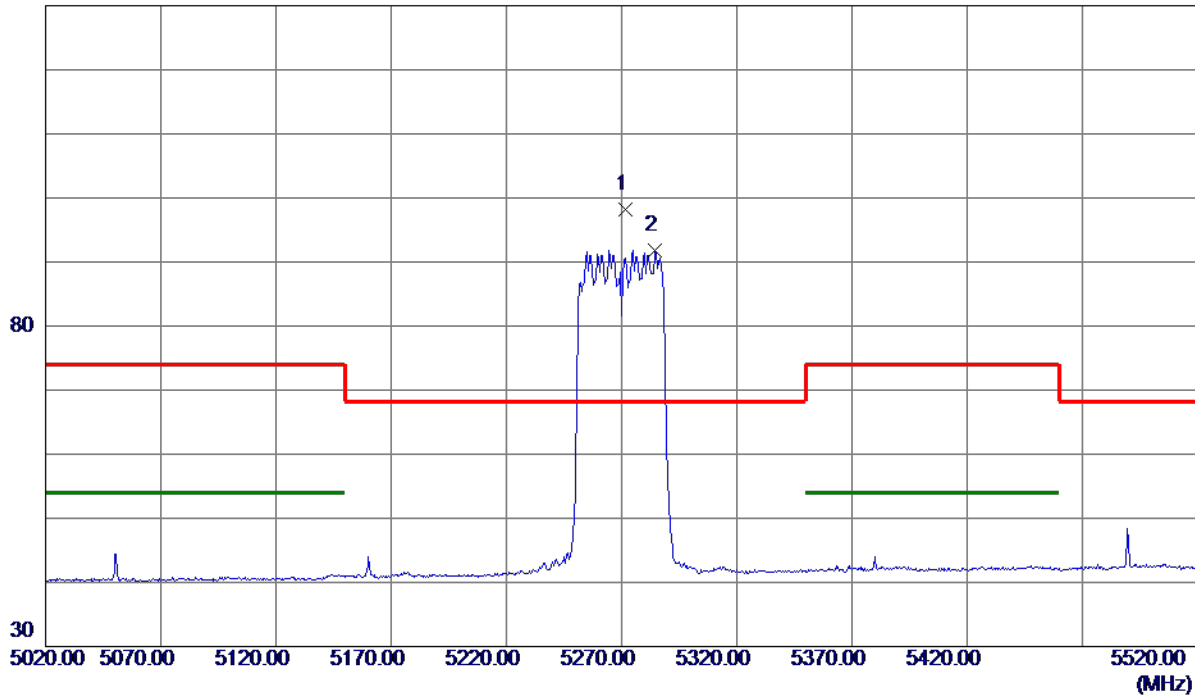

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5271.5000    | 83.53                      | 14.60                   | 98.13                     | 68.30           | 29.83        | Peak     | No Limit |
| 2   | 5284.5000    | 77.21                      | 14.63                   | 91.84                     | 999.00          | -907.16      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5270 MHz |

## Vertical

80 dBuV/m

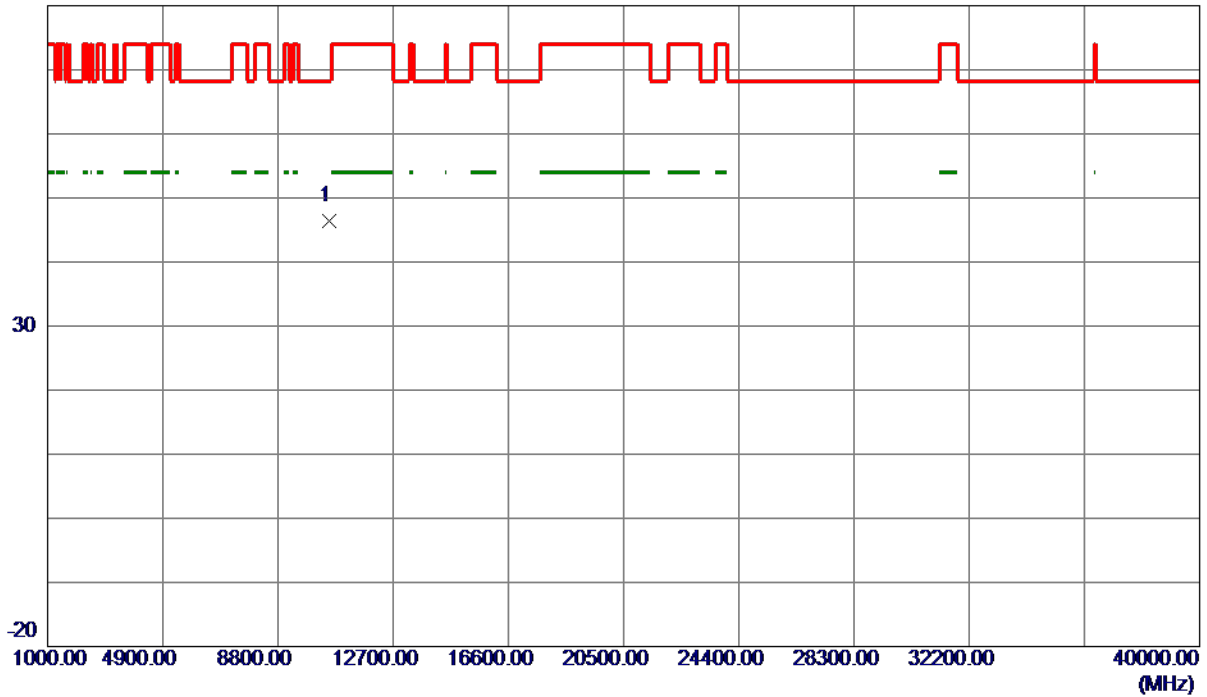

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10537.5450   | 34.79                      | 11.54                   | 46.33                     | 68.30           | -21.97       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5270 MHz |

## Horizontal

130 dBuV/m

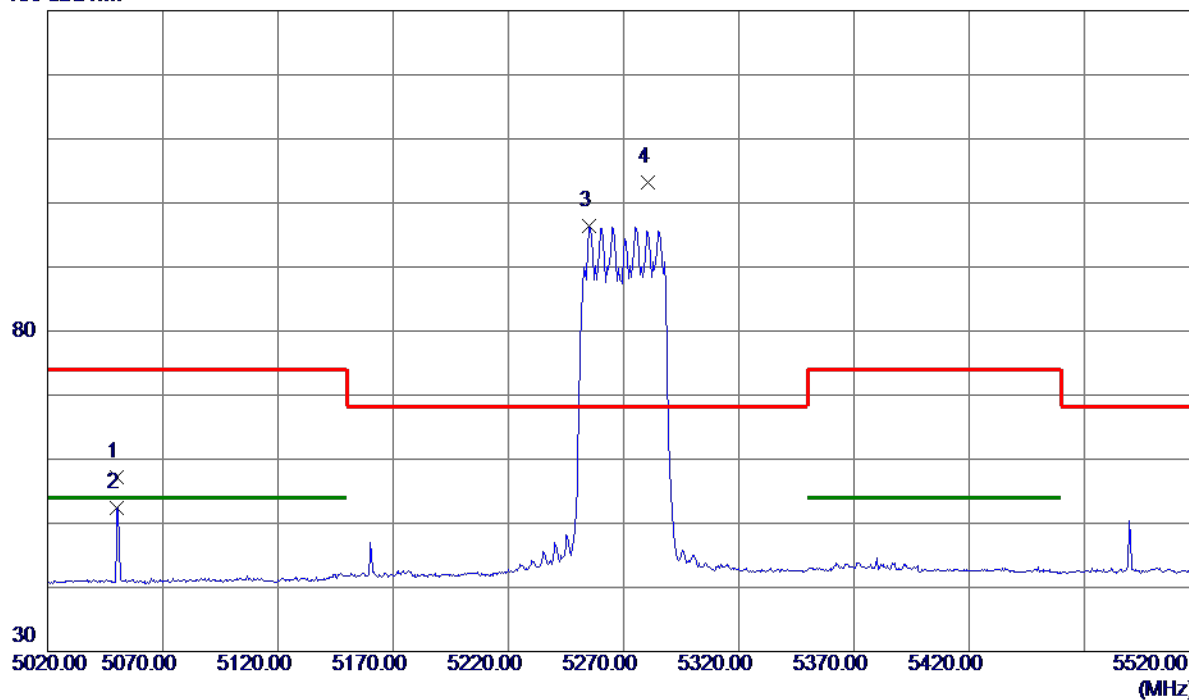

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5050.2500    | 43.03                      | 14.08                   | 57.11                     | 74.00           | -16.89       | Peak     |          |
| 2   | 5050.2500    | 38.39                      | 14.08                   | 52.47                     | 54.00           | -1.53        | AVG      |          |
| 3   | 5255.2500    | 81.78                      | 14.56                   | 96.34                     | 999.00          | -902.66      | AVG      | No Limit |
| 4 * | 5280.5000    | 88.53                      | 14.62                   | 103.15                    | 68.30           | 34.85        | Peak     | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5270 MHz |

## Horizontal

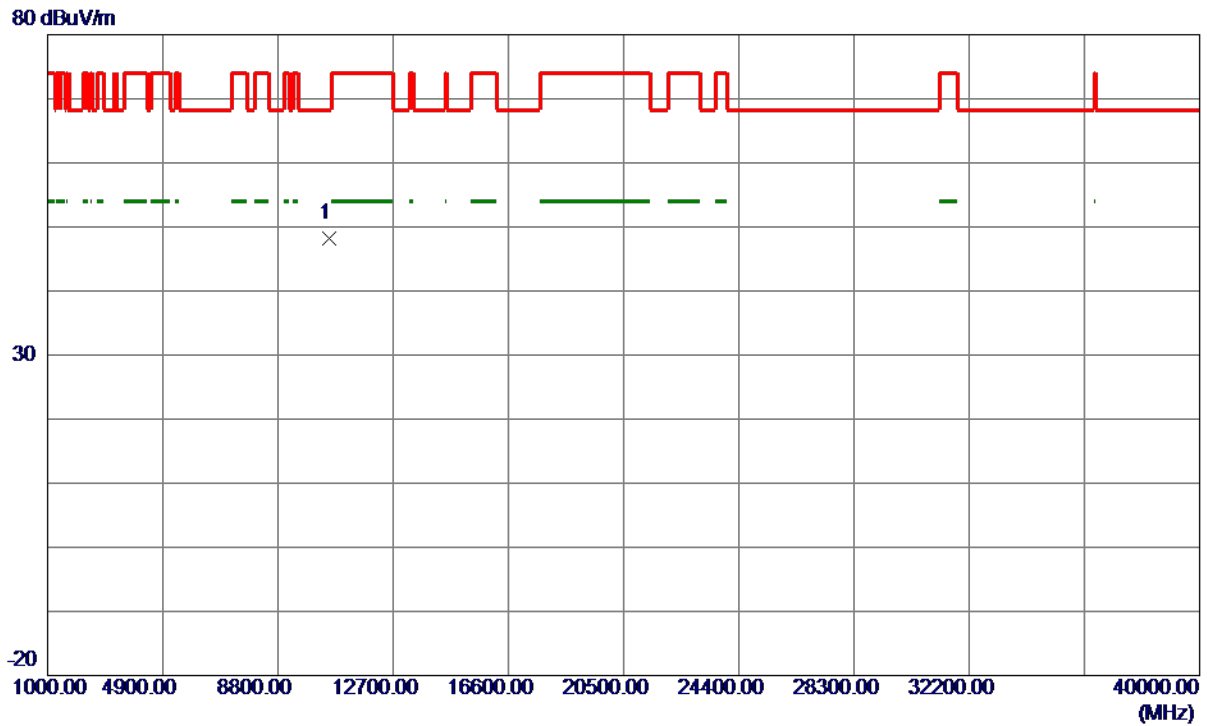

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10539.0599   | 36.66                      | 11.54                   | 48.20                     | 68.30           | -20.10       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5310 MHz |

## Vertical

130 dBuV/m

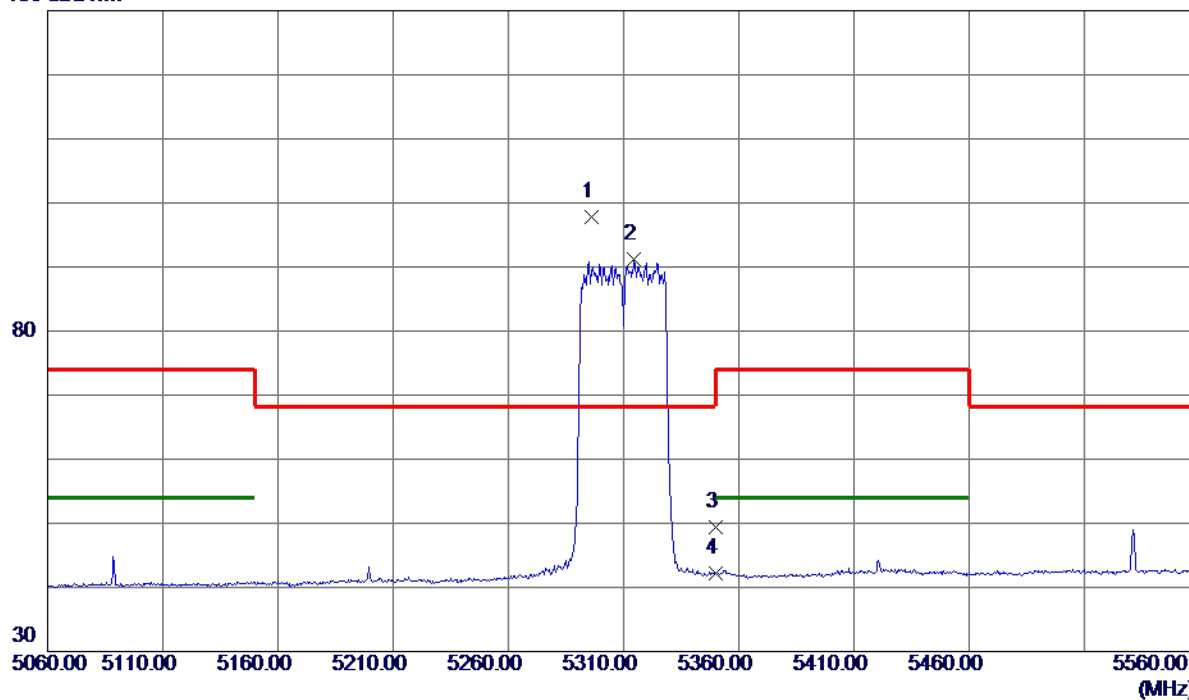

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5296.2500    | 83.17                      | 14.66                   | 97.83                     | 68.30           | 29.53        | Peak     | No Limit |
| 2   | 5314.5000    | 76.44                      | 14.71                   | 91.15                     | 999.00          | -907.85      | AVG      | No Limit |
| 3   | 5350.0000    | 34.69                      | 14.79                   | 49.48                     | 74.00           | -24.52       | Peak     |          |
| 4   | 5350.0000    | 27.41                      | 14.79                   | 42.20                     | 54.00           | -11.80       | AVG      |          |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5310 MHz |

## Vertical

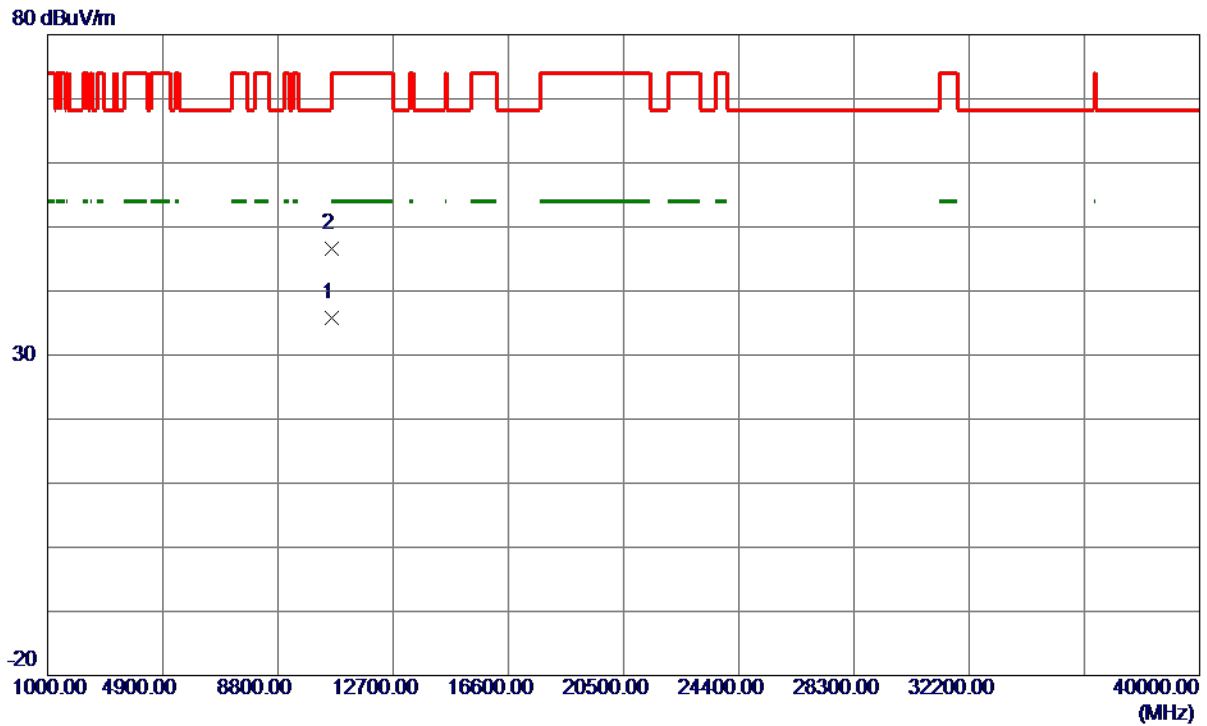

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10620.0300   | 24.15                      | 11.56                   | 35.71                     | 54.00           | -18.29       | AVG      |         |
| 2   | 10620.7200   | 35.00                      | 11.56                   | 46.56                     | 74.00           | -27.44       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5310 MHz |

## Horizontal

130 dBuV/m

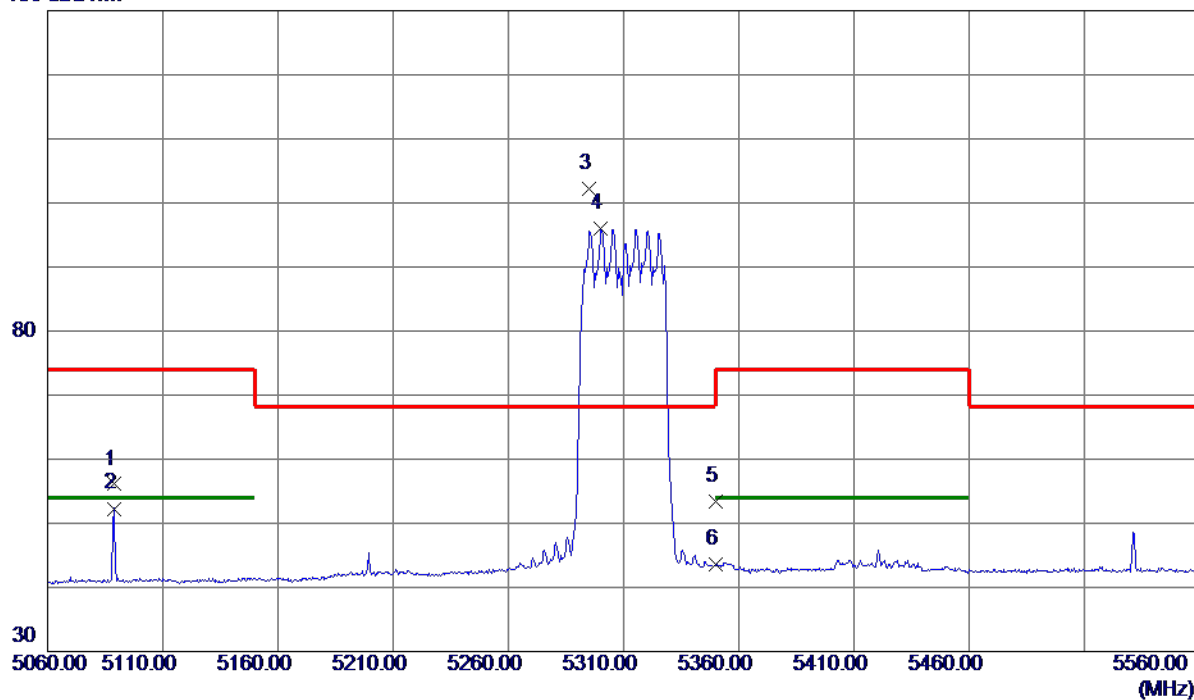

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5088.7500    | 41.93                      | 14.17                   | 56.10                     | 74.00           | -17.90       | Peak     |          |
| 2   | 5088.7500    | 38.13                      | 14.17                   | 52.30                     | 54.00           | -1.70        | AVG      |          |
| 3 * | 5295.2500    | 87.51                      | 14.66                   | 102.17                    | 68.30           | 33.87        | Peak     | No Limit |
| 4   | 5300.2500    | 81.32                      | 14.67                   | 95.99                     | 999.00          | -903.01      | AVG      | No Limit |
| 5   | 5350.0000    | 38.59                      | 14.79                   | 53.38                     | 74.00           | -20.62       | Peak     |          |
| 6   | 5350.0000    | 28.88                      | 14.79                   | 43.67                     | 54.00           | -10.33       | AVG      |          |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT40) Mode 5310 MHz |

## Horizontal

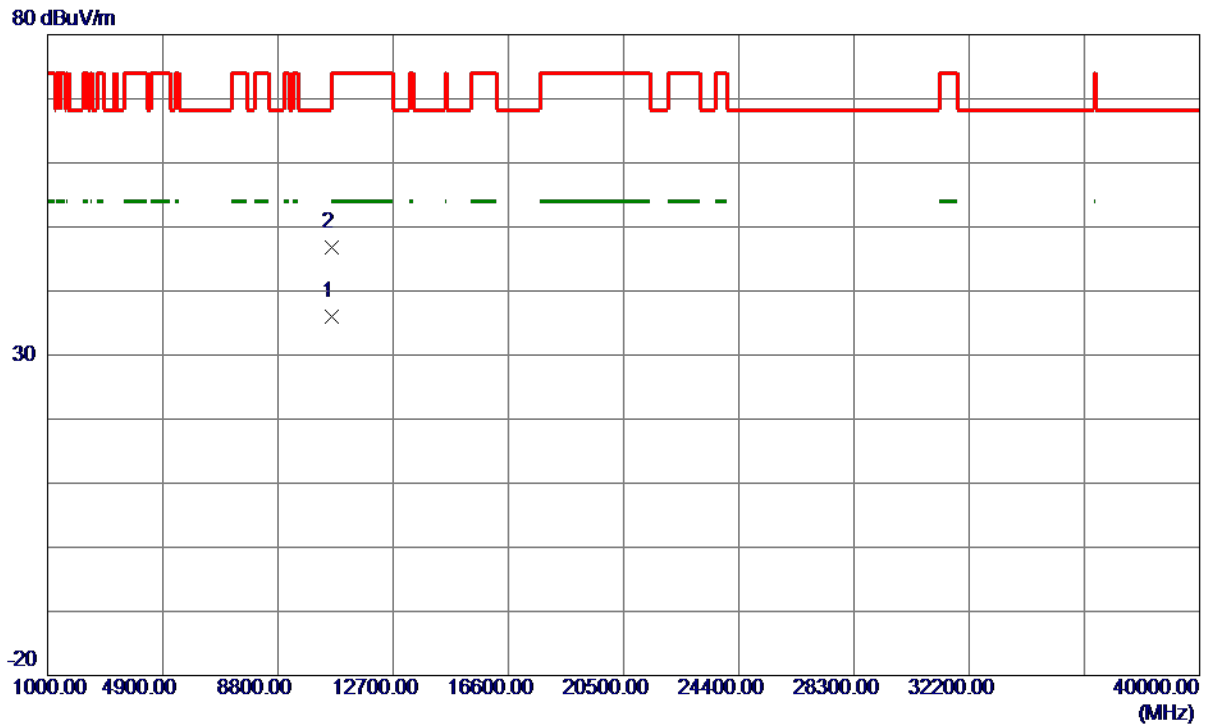

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10616.9000   | 24.41                      | 11.55                   | 35.96                     | 54.00           | -18.04       | AVG      |         |
| 2   | 10619.0650   | 35.21                      | 11.56                   | 46.77                     | 74.00           | -27.23       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT80) Mode 5290 MHz |

## Vertical

130 dBuV/m

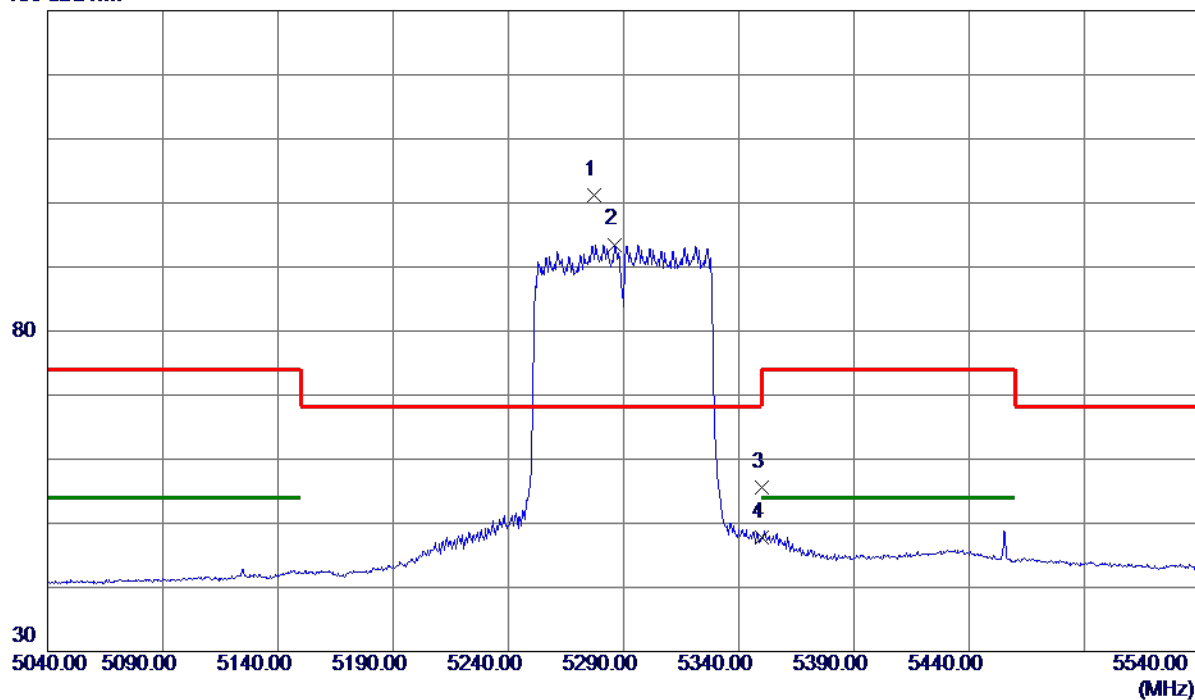

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5277.0000    | 86.61                      | 14.62                   | 101.23                    | 68.30           | 32.93        | Peak     | No Limit |
| 2   | 5286.2500    | 78.86                      | 14.64                   | 93.50                     | 999.00          | -905.50      | AVG      | No Limit |
| 3   | 5350.0000    | 40.85                      | 14.79                   | 55.64                     | 74.00           | -18.36       | Peak     |          |
| 4   | 5350.0000    | 32.93                      | 14.79                   | 47.72                     | 54.00           | -6.28        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT80) Mode 5290 MHz |

## Vertical

80 dBuV/m

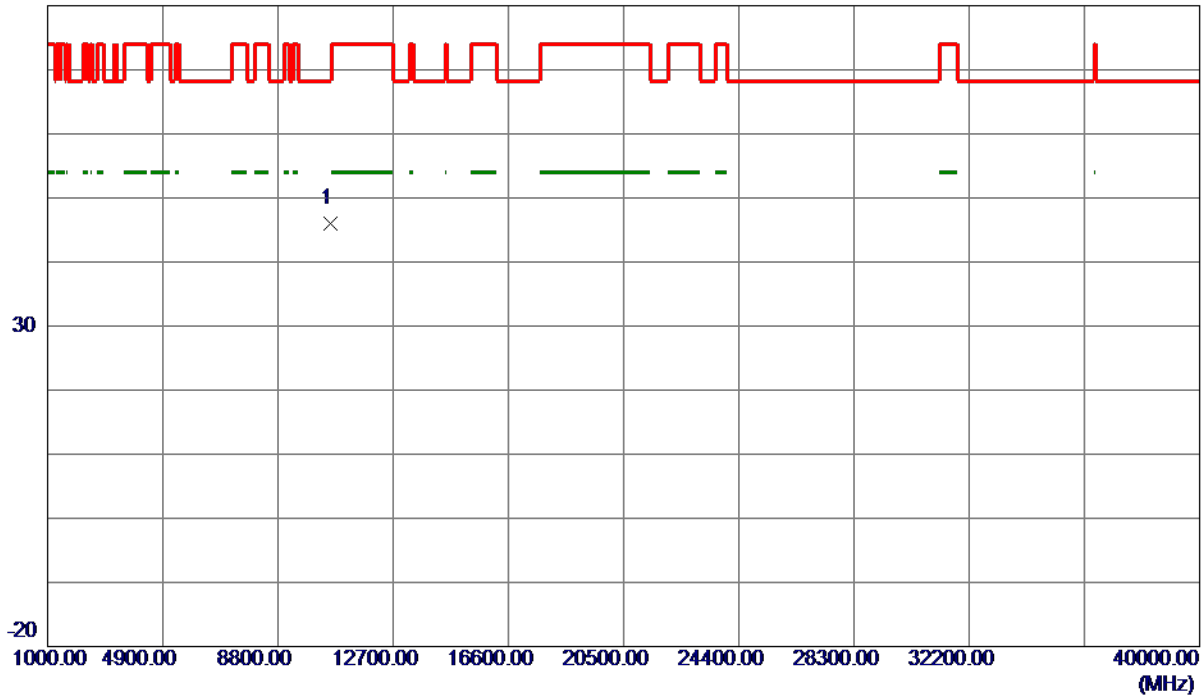

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10584.2150   | 34.38                      | 11.55                   | 45.93                     | 68.30           | -22.37       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT80) Mode 5290 MHz |

## Horizontal

130 dBuV/m

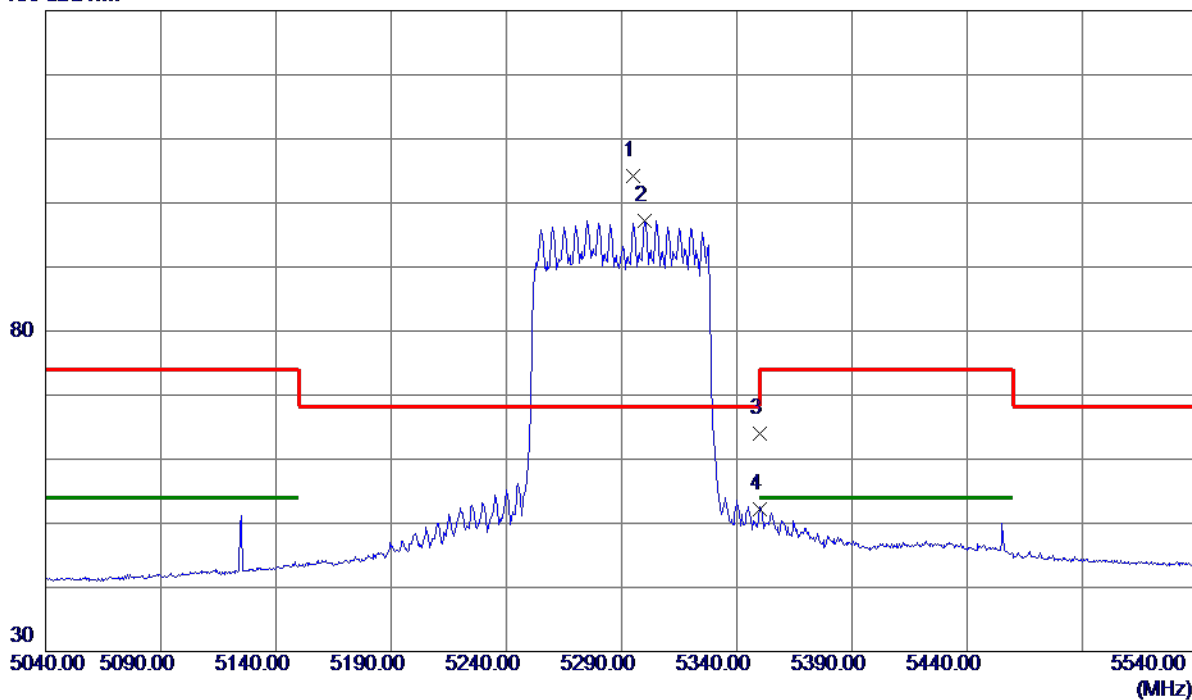


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5294.7500    | 89.50                      | 14.66                   | 104.16                    | 68.30           | 35.86        | Peak     | No Limit |
| 2   | 5299.7500    | 82.62                      | 14.67                   | 97.29                     | 999.00          | -901.71      | AVG      | No Limit |
| 3   | 5350.0000    | 49.23                      | 14.79                   | 64.02                     | 74.00           | -9.98        | Peak     |          |
| 4   | 5350.0000    | 37.43                      | 14.79                   | 52.22                     | 54.00           | -1.78        | AVG      |          |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2A_TX AC (VHT80) Mode 5290 MHz |

## Horizontal

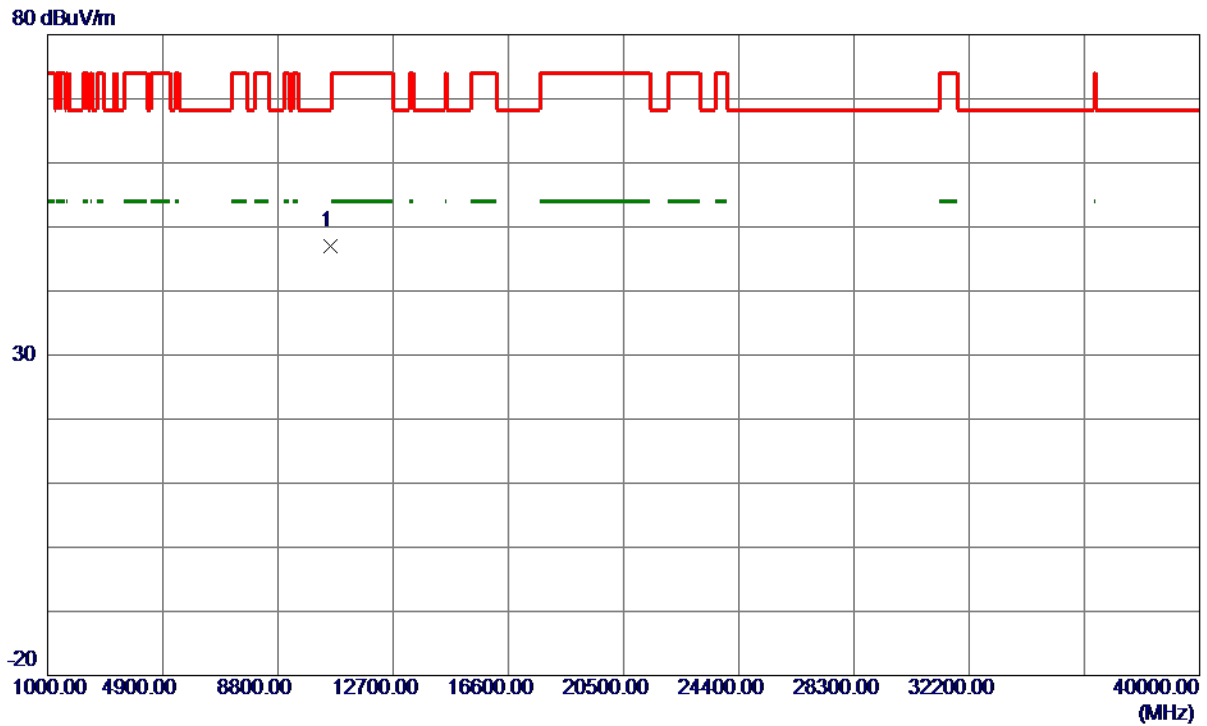

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10578.6849   | 35.47                      | 11.55                   | 47.02                     | 68.30           | -21.28       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5500 MHz |

## Vertical

130 dBuV/m

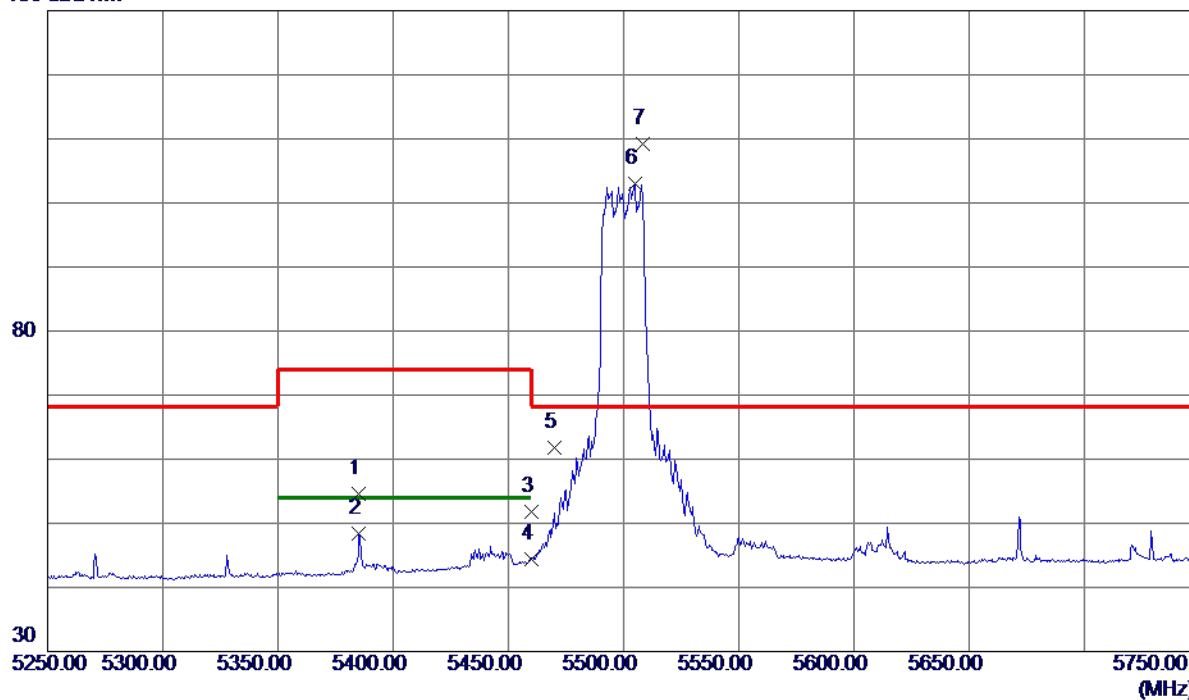

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5385.2500    | 39.77                      | 14.87                   | 54.64                     | 74.00           | -19.36       | Peak     |          |
| 2   | 5385.2500    | 33.45                      | 14.87                   | 48.32                     | 54.00           | -5.68        | AVG      |          |
| 3   | 5460.0000    | 36.74                      | 15.05                   | 51.79                     | 74.00           | -22.21       | Peak     |          |
| 4   | 5460.0000    | 29.32                      | 15.05                   | 44.37                     | 54.00           | -9.63        | AVG      |          |
| 5   | 5470.0000    | 46.78                      | 15.07                   | 61.85                     | 68.30           | -6.45        | Peak     |          |
| 6   | 5504.7500    | 87.76                      | 15.16                   | 102.92                    | 999.00          | -896.08      | AVG      | No Limit |
| 7 * | 5508.2500    | 94.07                      | 15.16                   | 109.23                    | 68.30           | 40.93        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5500 MHz |

## Vertical

80 dBuV/m

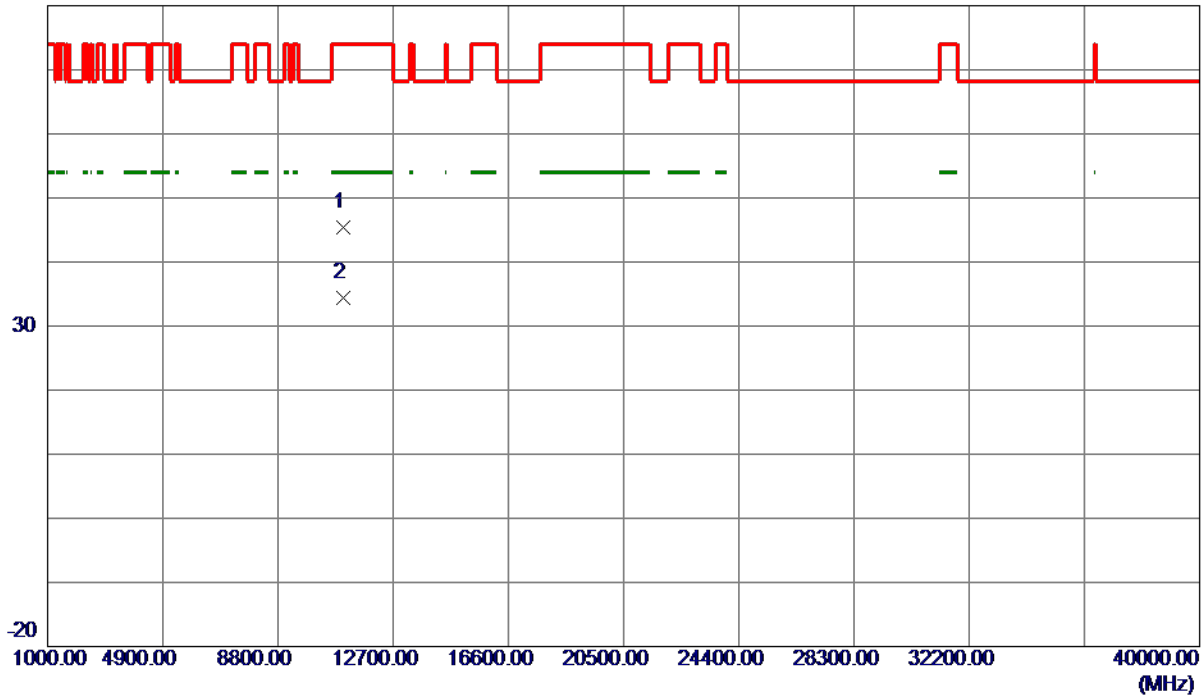

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10996.6700   | 33.72                      | 11.62                   | 45.34                     | 74.00           | -28.66       | Peak     |         |
| 2 * | 11004.0700   | 22.80                      | 11.62                   | 34.42                     | 54.00           | -19.58       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5500 MHz |

## Horizontal

130 dBuV/m

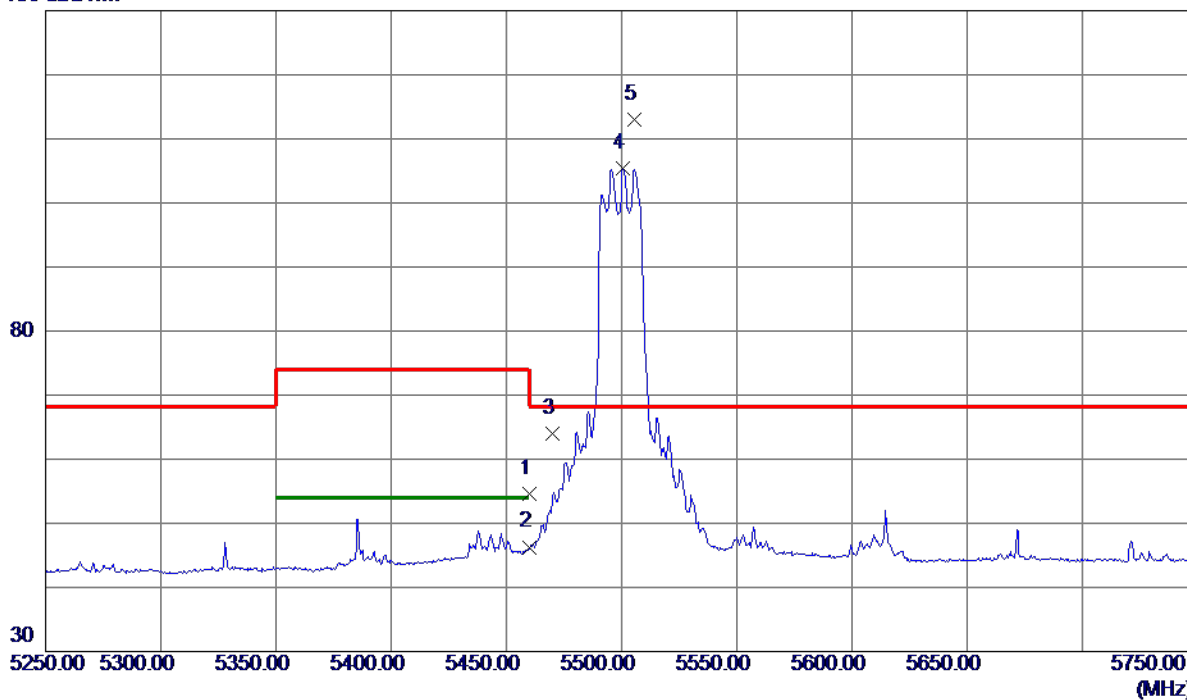

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 39.54                      | 15.05                   | 54.59                     | 74.00           | -19.41       | Peak     |          |
| 2   | 5460.0000    | 31.25                      | 15.05                   | 46.30                     | 54.00           | -7.70        | AVG      |          |
| 3   | 5470.0000    | 48.98                      | 15.07                   | 64.05                     | 68.30           | -4.25        | Peak     |          |
| 4   | 5500.5000    | 90.26                      | 15.15                   | 105.41                    | 999.00          | -893.59      | AVG      | No Limit |
| 5 * | 5505.7500    | 97.79                      | 15.16                   | 112.95                    | 68.30           | 44.65        | Peak     | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5500 MHz |

## Horizontal

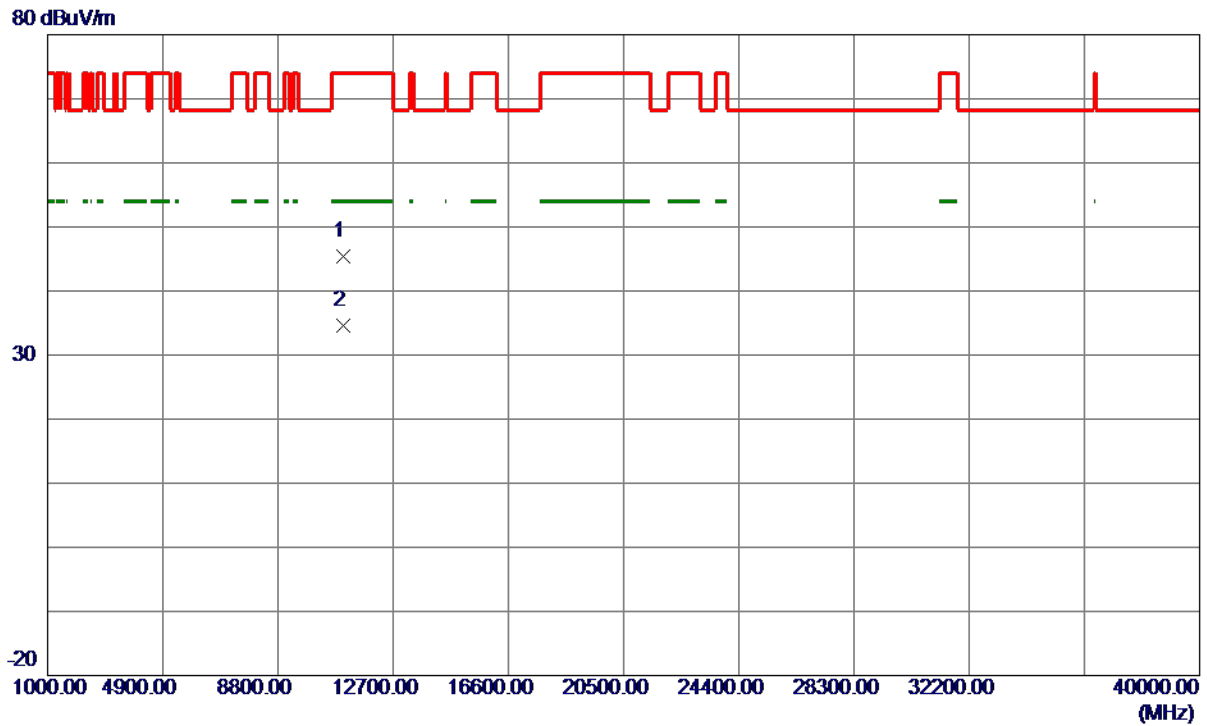

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10998.3850   | 33.71                      | 11.62                   | 45.33                     | 74.00           | -28.67       | Peak     |         |
| 2 * | 11002.8250   | 23.07                      | 11.62                   | 34.69                     | 54.00           | -19.31       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5580 MHz |

## Vertical

130 dBuV/m

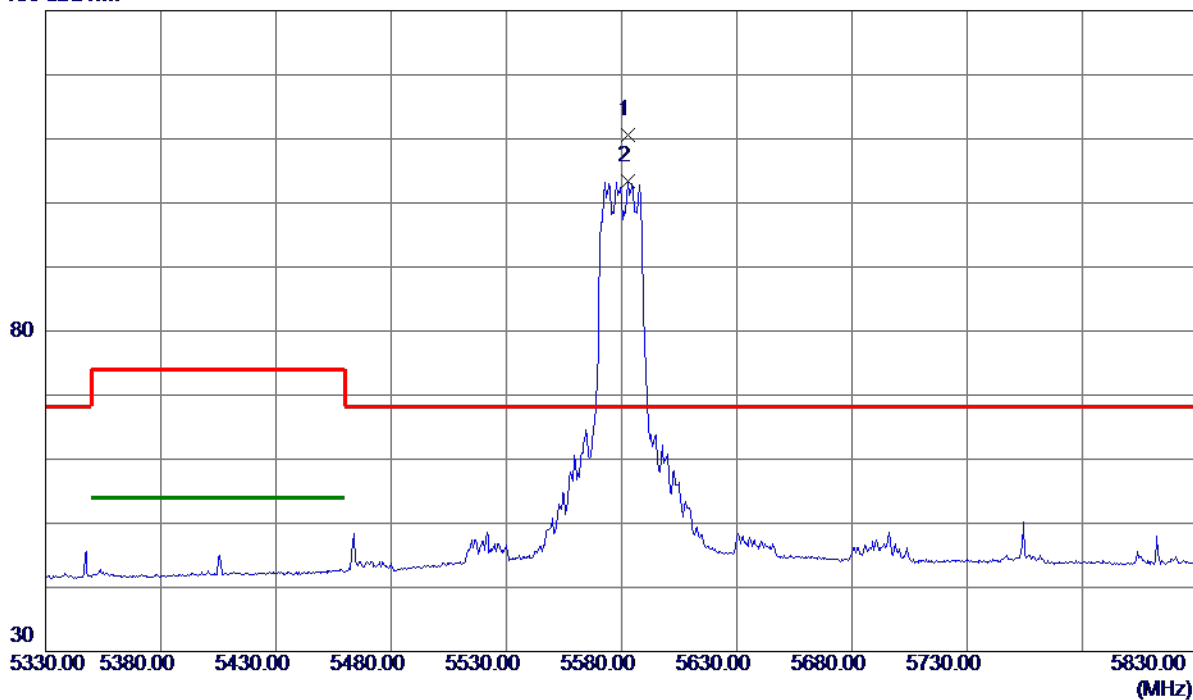

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5582.7500    | 95.30                      | 15.34                   | 110.64                    | 68.30           | 42.34        | Peak     | No Limit |
| 2   | 5583.0000    | 88.05                      | 15.34                   | 103.39                    | 999.00          | -895.61      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5580 MHz |

## Vertical

80 dBuV/m

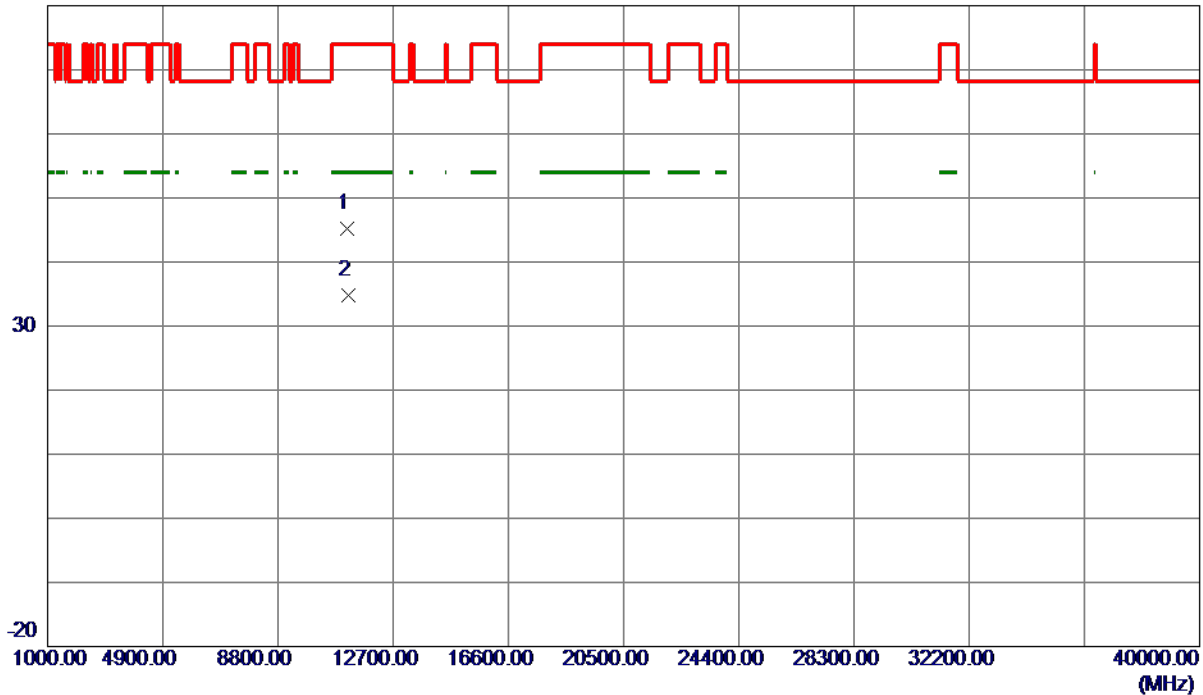

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11160.2699   | 33.52                      | 11.77                   | 45.29                     | 74.00           | -28.71       | Peak     |         |
| 2 * | 11164.7350   | 23.05                      | 11.77                   | 34.82                     | 54.00           | -19.18       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5580 MHz |

## Horizontal

130 dBuV/m

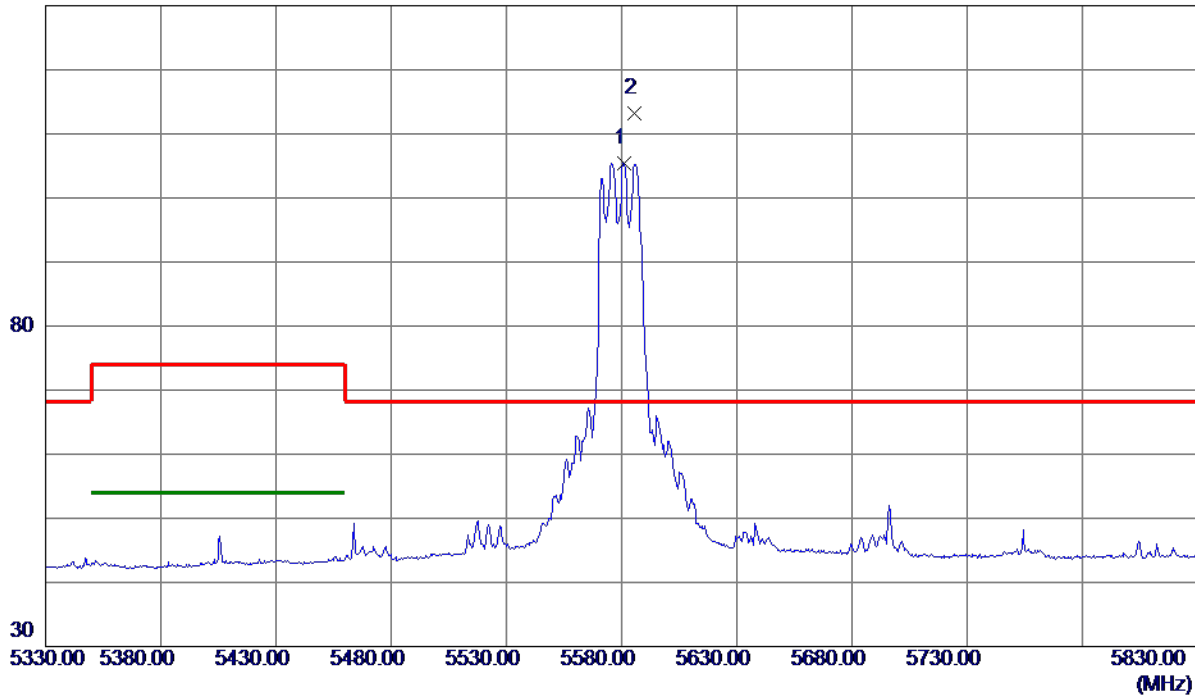

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5581.0000    | 90.07                      | 15.34                   | 105.41                    | 999.00          | -893.59      | AVG      | No Limit |
| 2 * | 5585.7500    | 97.85                      | 15.35                   | 113.20                    | 68.30           | 44.90        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5580 MHz |

## Horizontal

80 dBuV/m

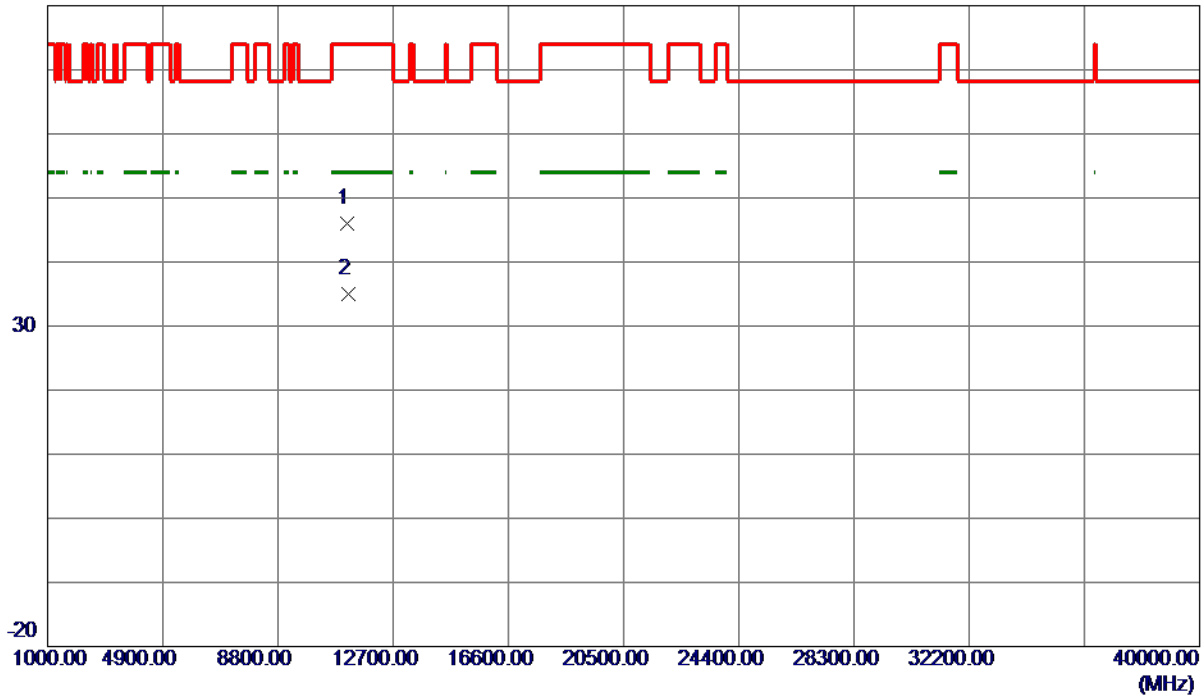

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11155.2550   | 34.25                      | 11.76                   | 46.01                     | 74.00           | -27.99       | Peak     |         |
| 2 * | 11163.6150   | 23.14                      | 11.77                   | 34.91                     | 54.00           | -19.09       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5700 MHz |

## Vertical

130 dBuV/m

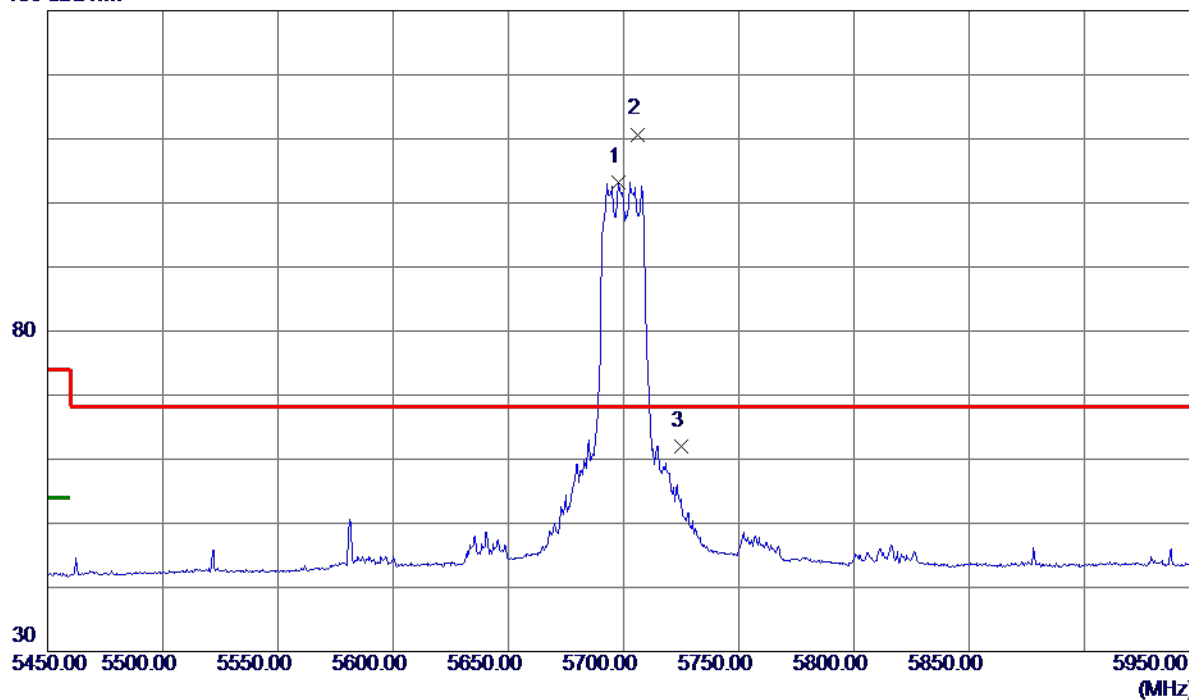

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5698.0000    | 87.61                      | 15.61                   | 103.22                    | 999.00          | -895.78      | AVG      | No Limit |
| 2 * | 5706.0000    | 95.07                      | 15.63                   | 110.70                    | 68.30           | 42.40        | Peak     | No Limit |
| 3   | 5725.0000    | 46.23                      | 15.68                   | 61.91                     | 68.30           | -6.39        | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5700 MHz |

## Vertical

80 dBuV/m

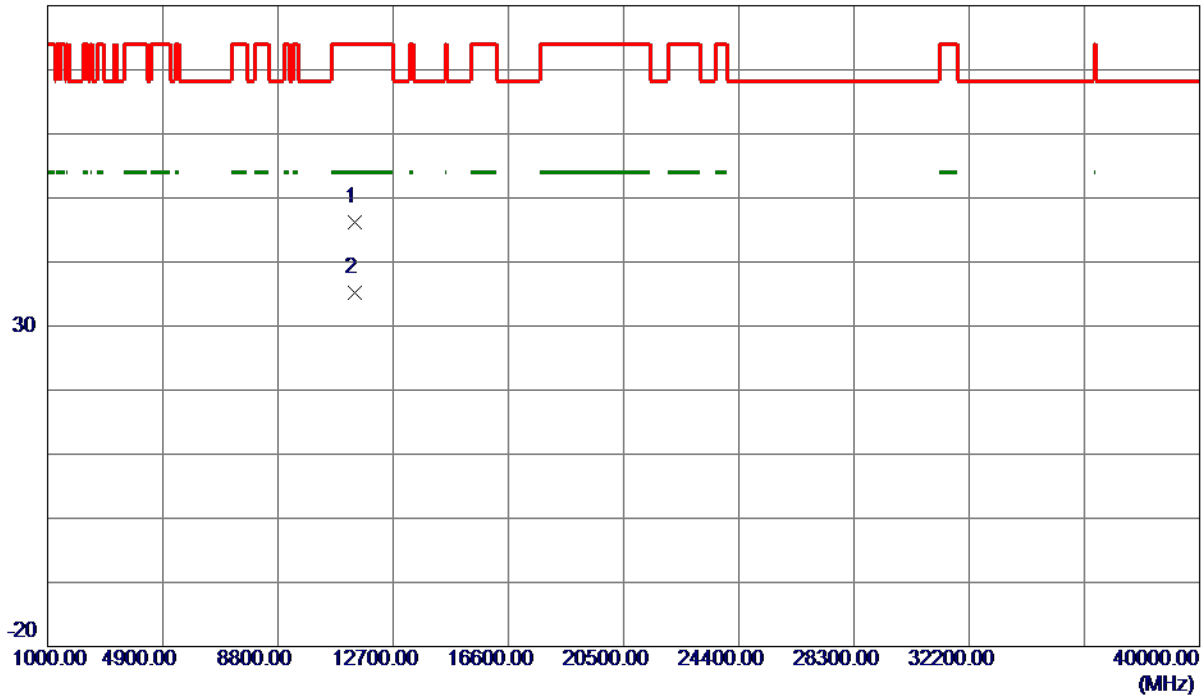

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11402.0150   | 34.26                      | 11.99                   | 46.25                     | 74.00           | -27.75       | Peak     |         |
| 2 * | 11402.5650   | 23.14                      | 11.99                   | 35.13                     | 54.00           | -18.87       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5700 MHz |

## Horizontal

130 dBuV/m

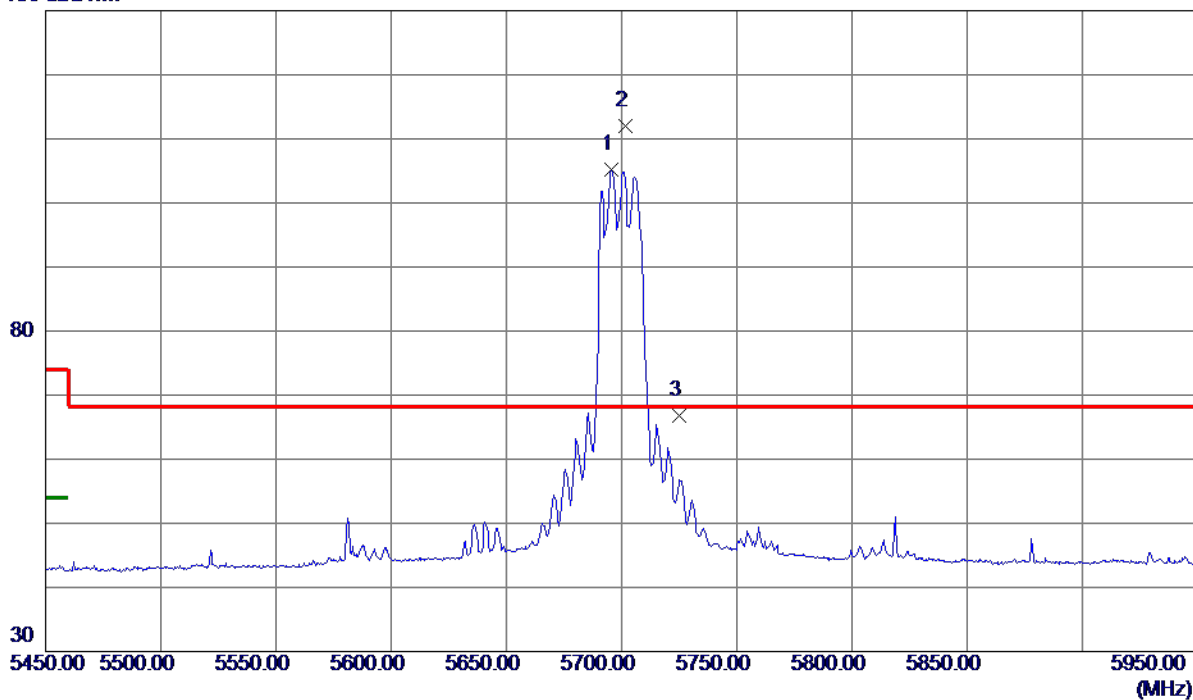

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5695.5000    | 89.58                      | 15.61                   | 105.19                    | 999.00          | -893.81      | AVG      | No Limit |
| 2 * | 5701.5000    | 96.45                      | 15.62                   | 112.07                    | 68.30           | 43.77        | Peak     | No Limit |
| 3   | 5725.0000    | 51.04                      | 15.68                   | 66.72                     | 68.30           | -1.58        | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT20) Mode 5700 MHz |

## Horizontal

80 dBuV/m

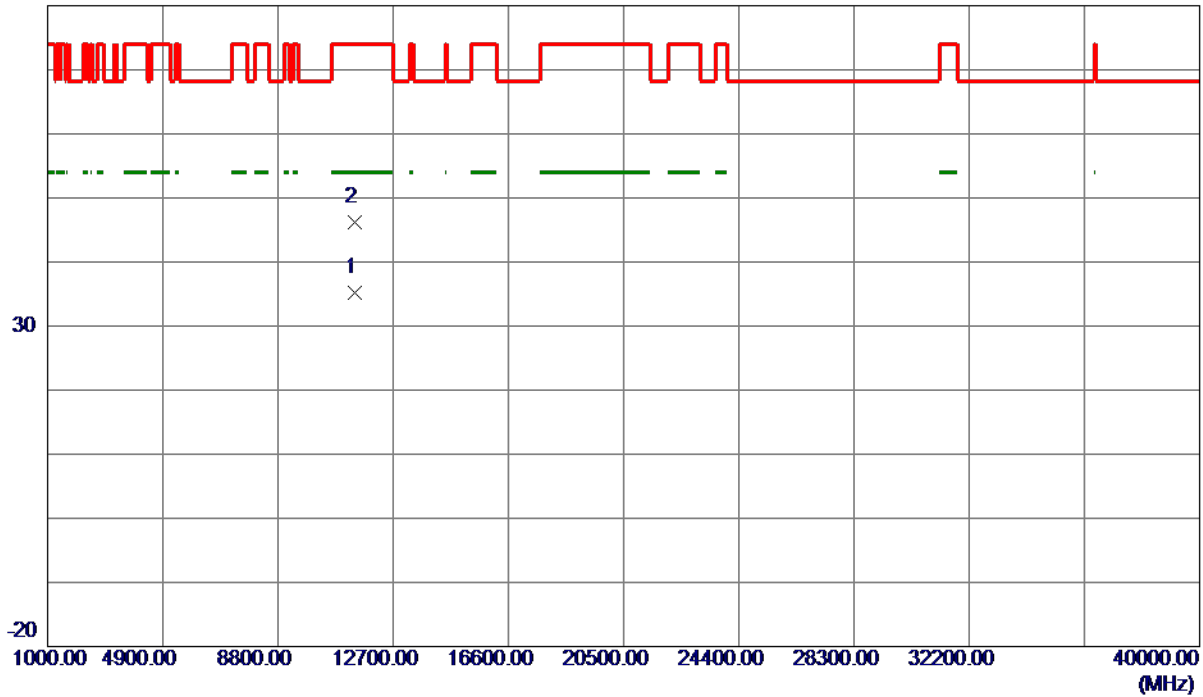

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11395.0599   | 23.29                      | 11.98                   | 35.27                     | 54.00           | -18.73       | AVG      |         |
| 2   | 11399.9050   | 34.19                      | 11.98                   | 46.17                     | 74.00           | -27.83       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5510 MHz |

## Vertical

130 dBuV/m

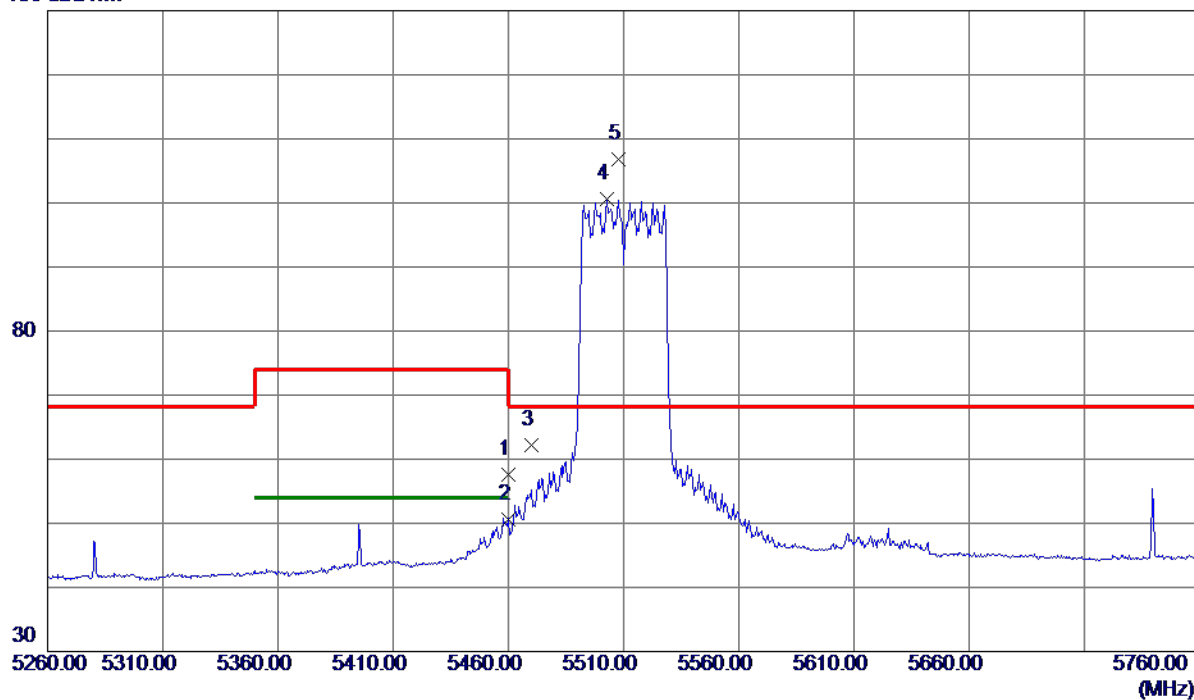

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 42.59                      | 15.05                   | 57.64                     | 74.00           | -16.36       | Peak     |          |
| 2   | 5460.0000    | 35.50                      | 15.05                   | 50.55                     | 54.00           | -3.45        | AVG      |          |
| 3   | 5470.0000    | 47.18                      | 15.07                   | 62.25                     | 68.30           | -6.05        | Peak     |          |
| 4   | 5502.7500    | 85.39                      | 15.15                   | 100.54                    | 999.00          | -898.46      | AVG      | No Limit |
| 5 * | 5508.0000    | 91.67                      | 15.16                   | 106.83                    | 68.30           | 38.53        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5510 MHz |

## Vertical

80 dBuV/m

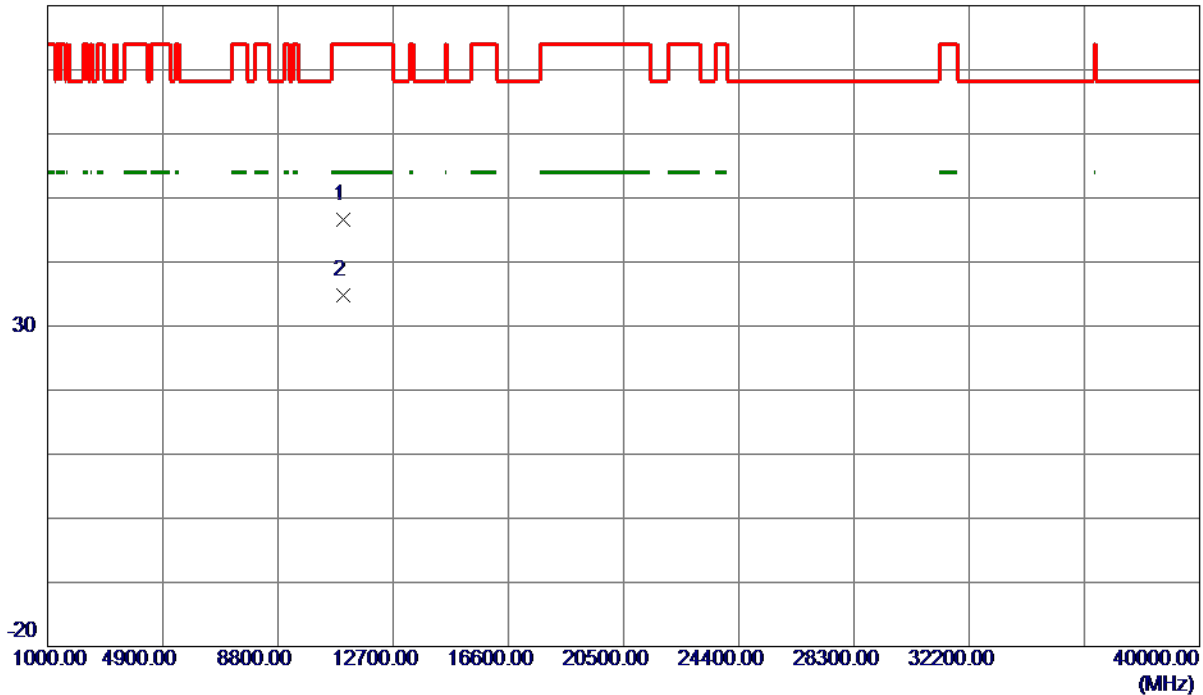

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11018.6700   | 34.87                      | 11.64                   | 46.51                     | 74.00           | -27.49       | Peak     |         |
| 2 * | 11021.6700   | 23.24                      | 11.64                   | 34.88                     | 54.00           | -19.12       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5510 MHz |

## Horizontal

130 dBuV/m

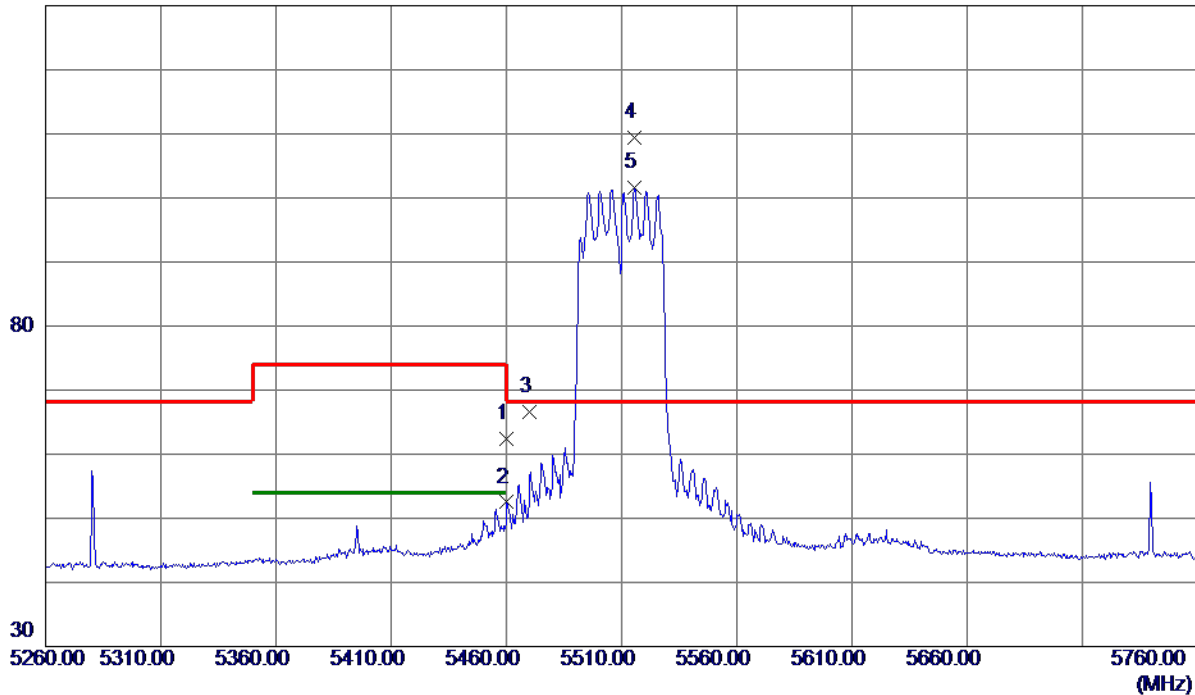

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 47.38                      | 15.05                   | 62.43                     | 74.00           | -11.57       | Peak     |          |
| 2   | 5460.0000    | 37.45                      | 15.05                   | 52.50                     | 54.00           | -1.50        | AVG      |          |
| 3   | 5470.0000    | 51.46                      | 15.07                   | 66.53                     | 68.30           | -1.77        | Peak     |          |
| 4 * | 5515.7500    | 94.13                      | 15.18                   | 109.31                    | 68.30           | 41.01        | Peak     | No Limit |
| 5   | 5515.7500    | 86.41                      | 15.18                   | 101.59                    | 999.00          | -897.41      | AVG      | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5510 MHz |

## Horizontal

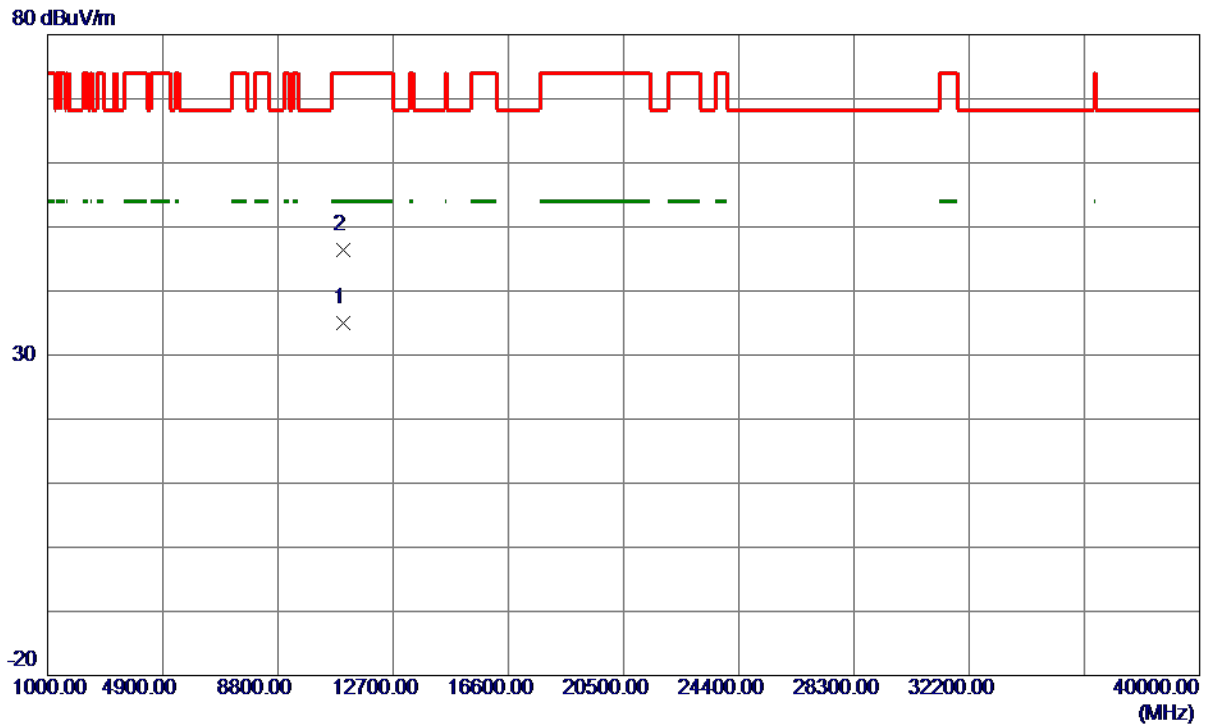

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11019.1280   | 23.41                      | 11.64                   | 35.05                     | 54.00           | -18.95       | AVG      |         |
| 2   | 11019.4830   | 34.72                      | 11.64                   | 46.36                     | 74.00           | -27.64       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5550 MHz |

## Vertical

130 dBuV/m

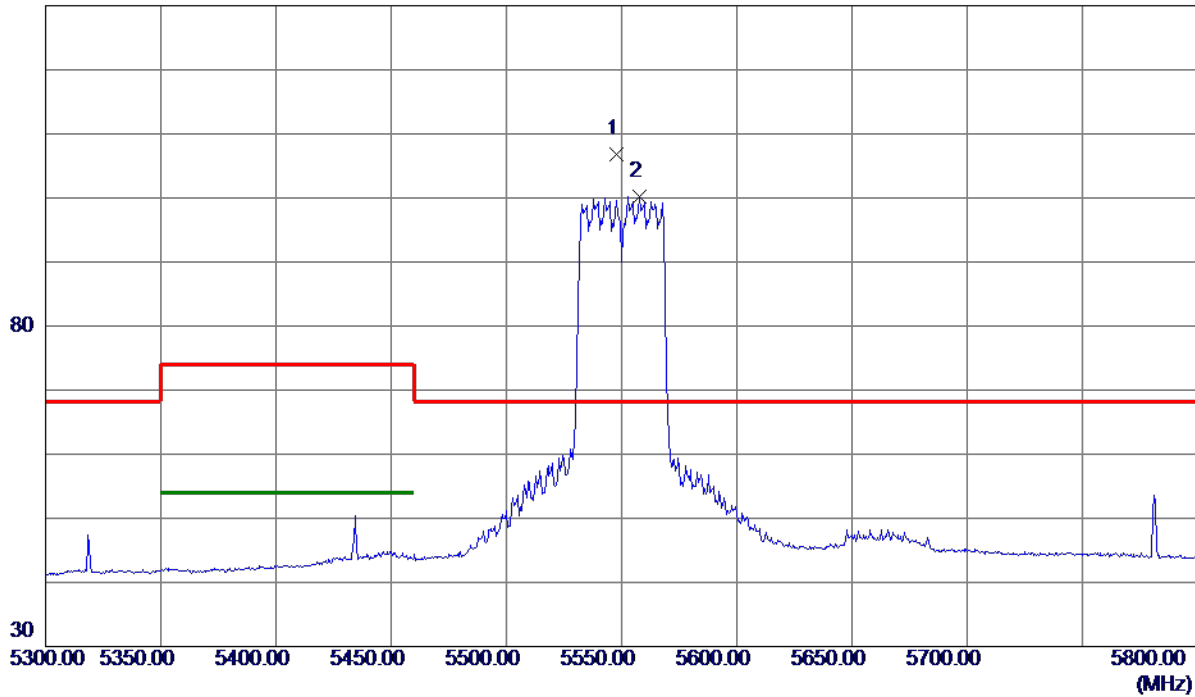

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5547.7500    | 91.48                      | 15.26                   | 106.74                    | 68.30           | 38.44        | Peak     | No Limit |
| 2   | 5558.0000    | 85.01                      | 15.28                   | 100.29                    | 999.00          | -898.71      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5550 MHz |

## Vertical

80 dBuV/m

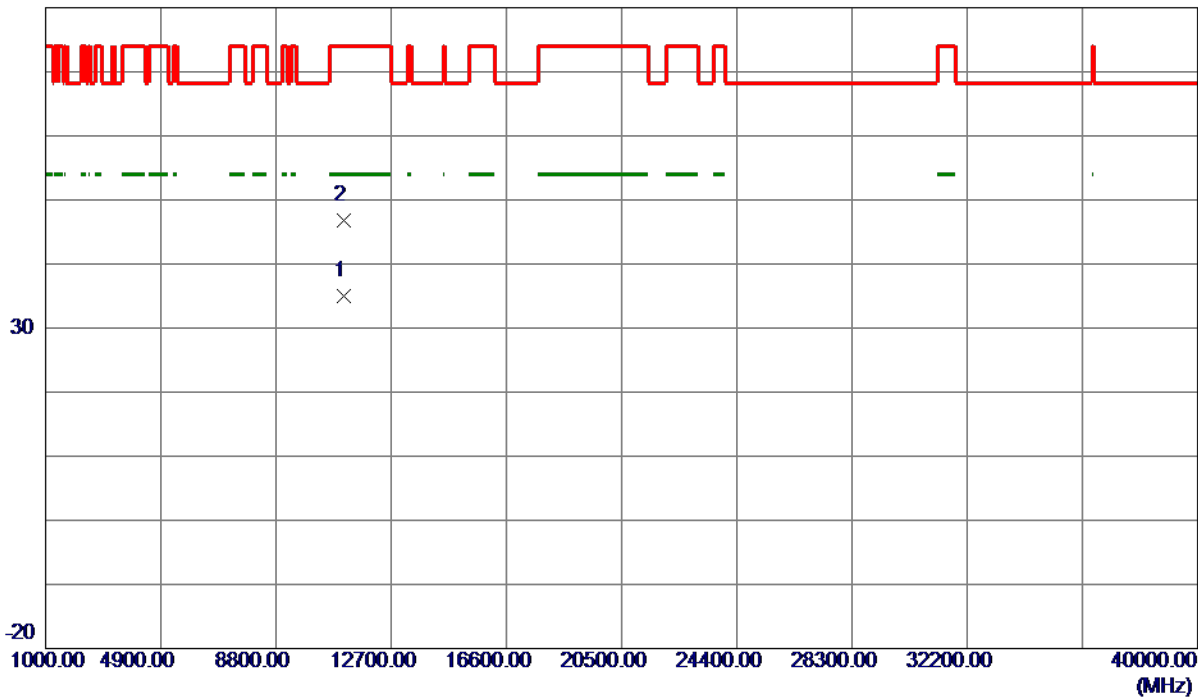

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11100.0950   | 23.34                      | 11.71                   | 35.05                     | 54.00           | -18.95       | AVG      |         |
| 2   | 11102.0930   | 35.06                      | 11.71                   | 46.77                     | 74.00           | -27.23       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5550 MHz |

## Horizontal

130 dBuV/m

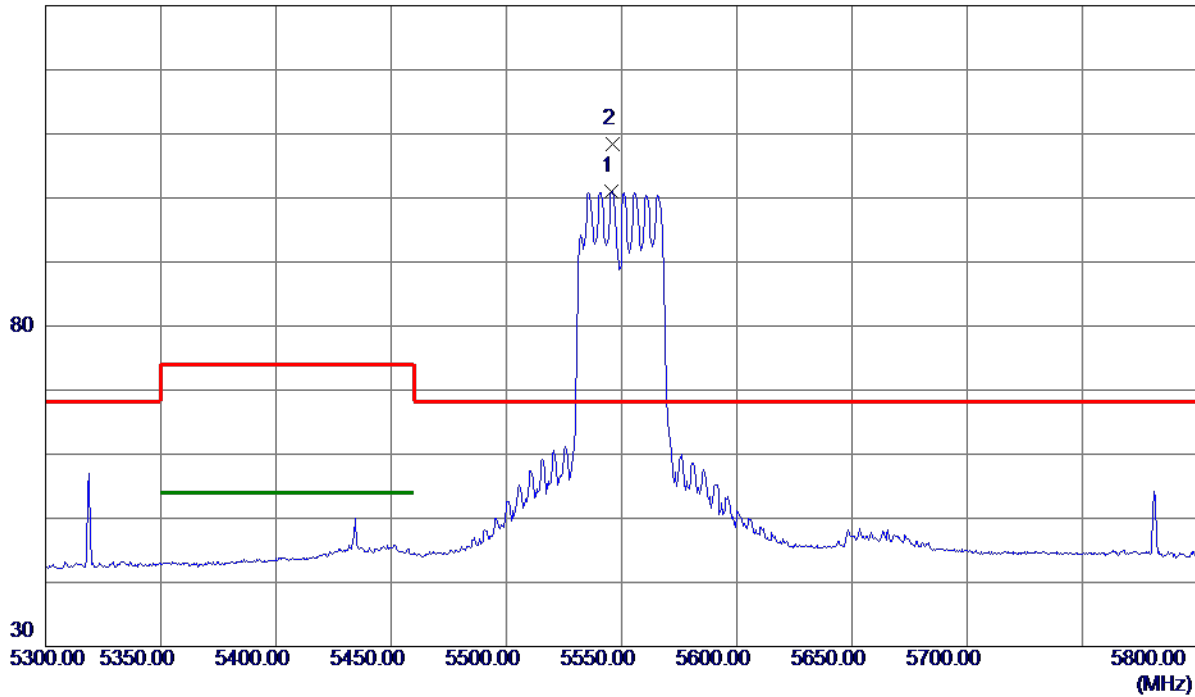

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5545.7500    | 85.76                      | 15.25                   | 101.01                    | 999.00          | -897.99      | AVG      | No Limit |
| 2 * | 5546.0000    | 93.20                      | 15.25                   | 108.45                    | 68.30           | 40.15        | Peak     | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5550 MHz |

## Horizontal

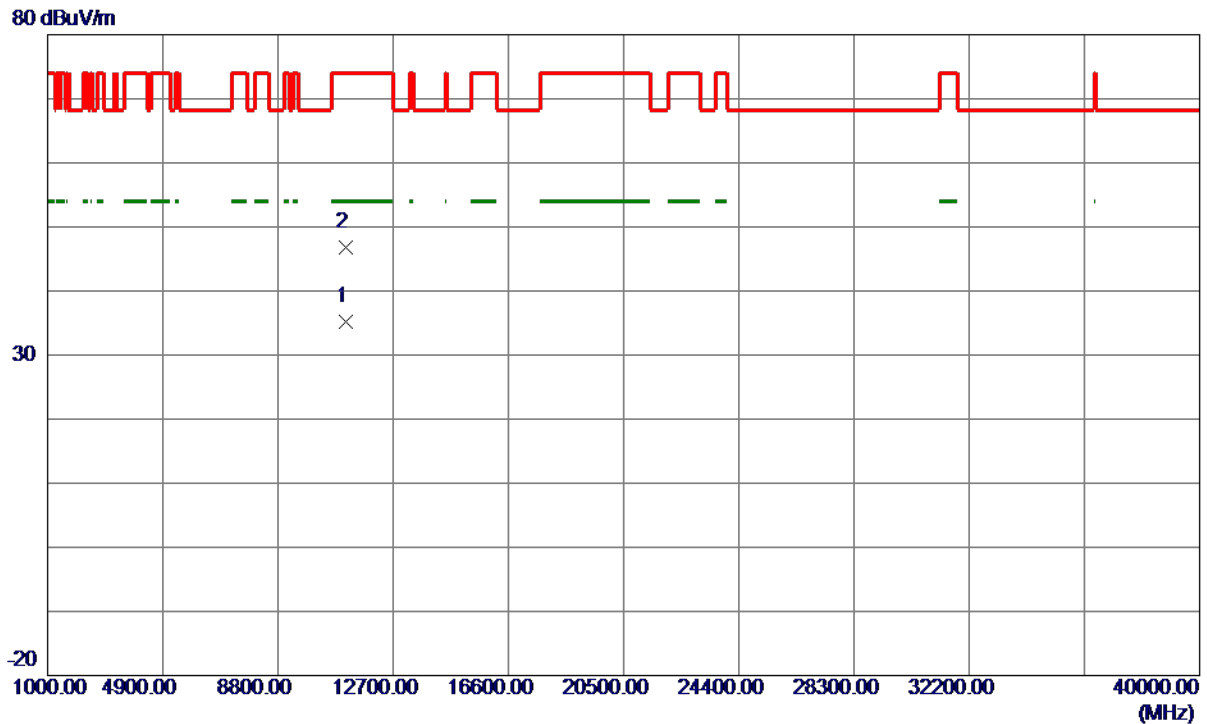

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11097.8970   | 23.52                      | 11.71                   | 35.23                     | 54.00           | -18.77       | AVG      |         |
| 2   | 11100.5850   | 35.07                      | 11.71                   | 46.78                     | 74.00           | -27.22       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5670 MHz |

## Vertical

130 dBuV/m

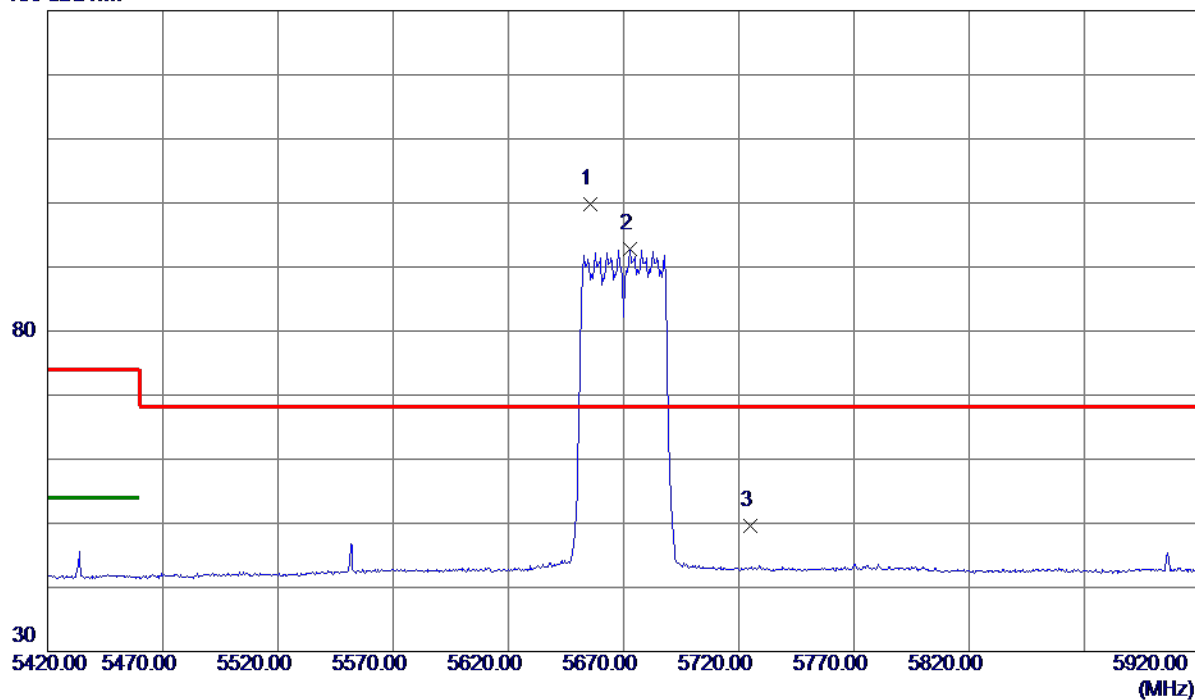

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5655.7500    | 84.38                      | 15.51                   | 99.89                     | 68.30           | 31.59        | Peak     | No Limit |
| 2   | 5672.7500    | 77.27                      | 15.55                   | 92.82                     | 999.00          | -906.18      | AVG      | No Limit |
| 3   | 5725.0000    | 34.01                      | 15.68                   | 49.69                     | 68.30           | -18.61       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5670 MHz |

## Vertical

80 dBuV/m

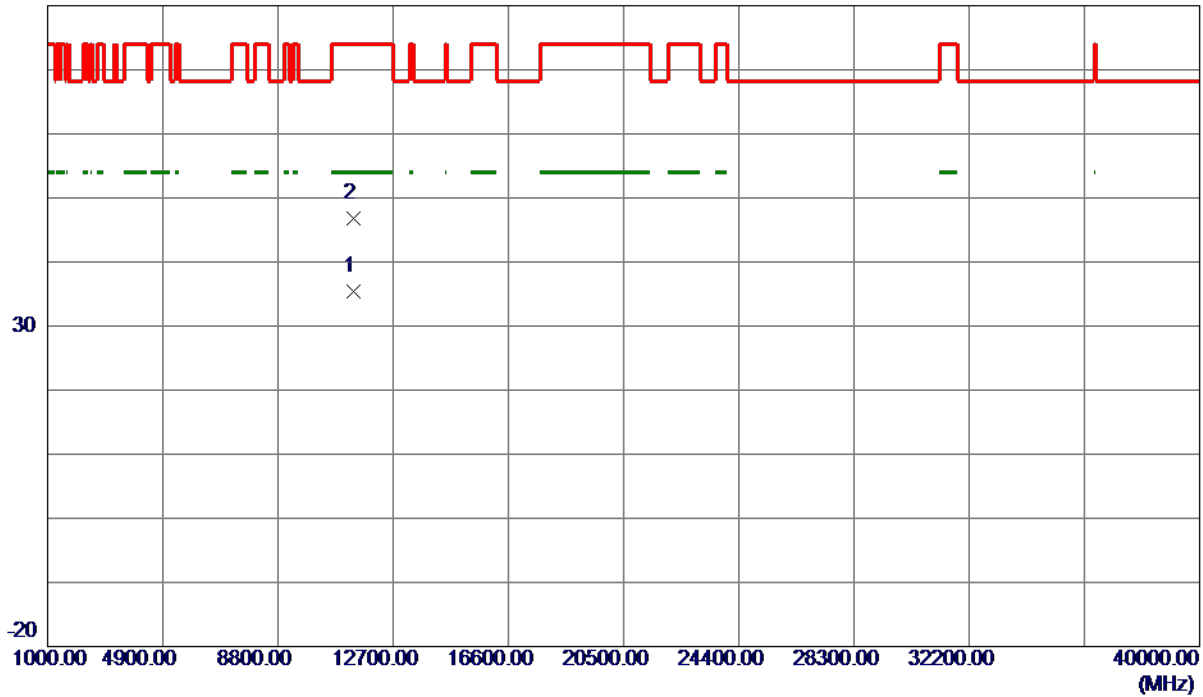

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11341.6380   | 23.40                      | 11.93                   | 35.33                     | 54.00           | -18.67       | AVG      |         |
| 2   | 11341.8680   | 34.91                      | 11.93                   | 46.84                     | 74.00           | -27.16       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5670 MHz |

## Horizontal

130 dBuV/m

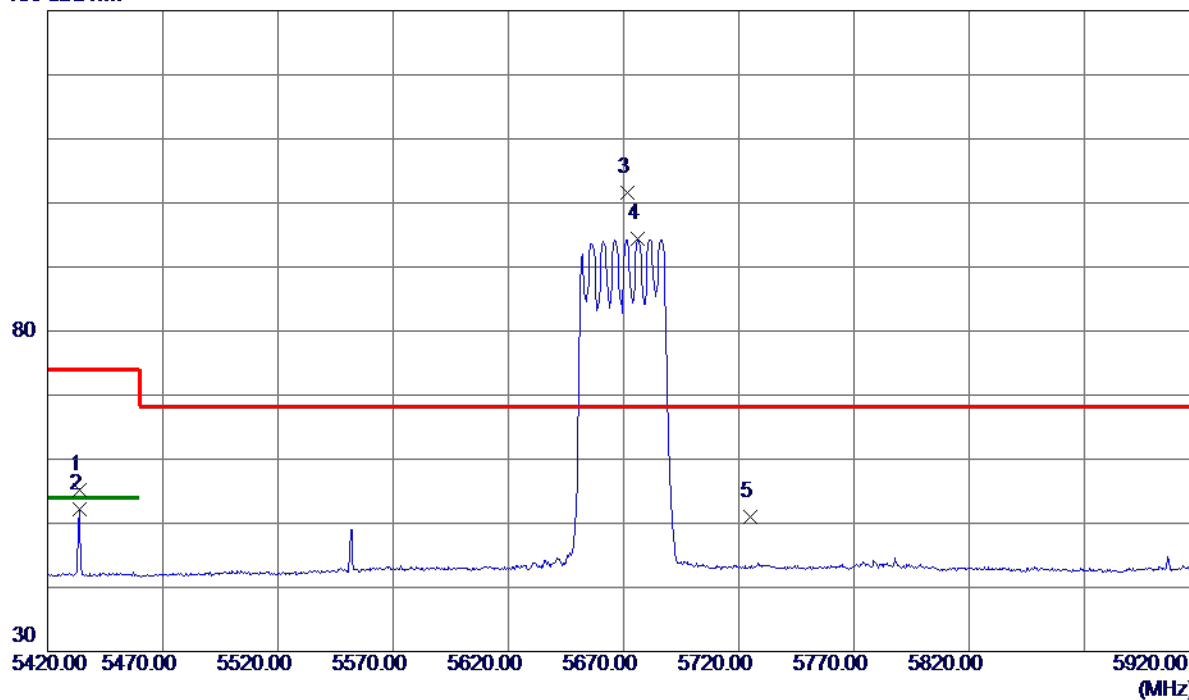

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5433.7500    | 40.30                      | 14.99                   | 55.29                     | 74.00           | -18.71       | Peak     |          |
| 2   | 5433.7500    | 37.26                      | 14.99                   | 52.25                     | 54.00           | -1.75        | AVG      |          |
| 3 * | 5671.7500    | 85.99                      | 15.55                   | 101.54                    | 68.30           | 33.24        | Peak     | No Limit |
| 4   | 5676.2500    | 78.79                      | 15.56                   | 94.35                     | 999.00          | -904.65      | AVG      | No Limit |
| 5   | 5725.0000    | 35.26                      | 15.68                   | 50.94                     | 68.30           | -17.36       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT40) Mode 5670 MHz |

## Horizontal

80 dBuV/m

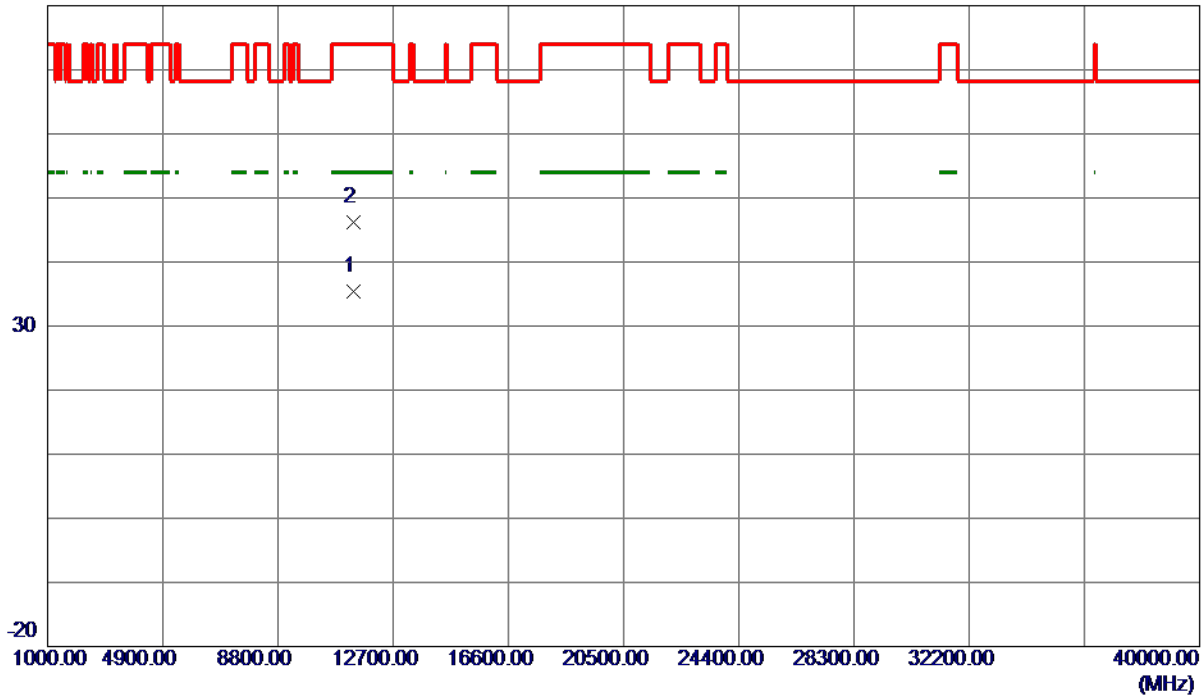

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11342.5100   | 23.48                      | 11.93                   | 35.41                     | 54.00           | -18.59       | AVG      |         |
| 2   | 11342.7400   | 34.19                      | 11.93                   | 46.12                     | 74.00           | -27.88       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

## Vertical

130 dBuV/m

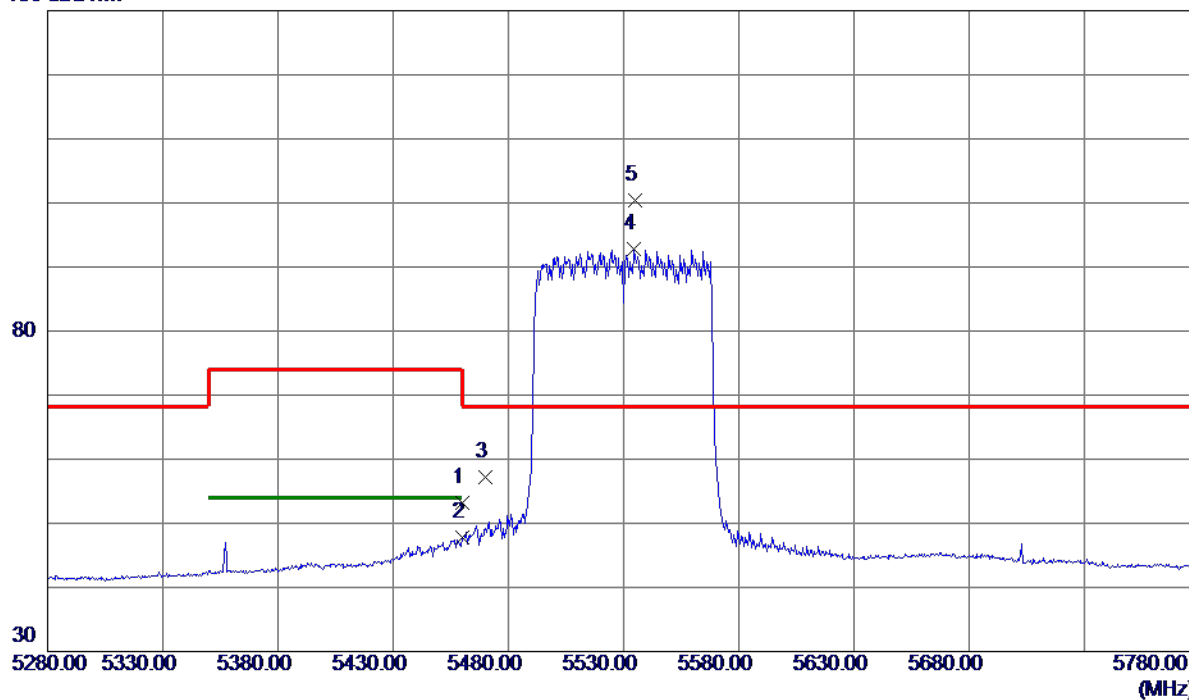

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 38.15                      | 15.05                   | 53.20                     | 74.00           | -20.80       | Peak     |          |
| 2   | 5460.0000    | 32.79                      | 15.05                   | 47.84                     | 54.00           | -6.16        | AVG      |          |
| 3   | 5470.0000    | 42.22                      | 15.07                   | 57.29                     | 68.30           | -11.01       | Peak     |          |
| 4   | 5534.5000    | 77.59                      | 15.23                   | 92.82                     | 999.00          | -906.18      | AVG      | No Limit |
| 5 * | 5535.0000    | 85.20                      | 15.23                   | 100.43                    | 68.30           | 32.13        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

## Vertical

80 dBuV/m

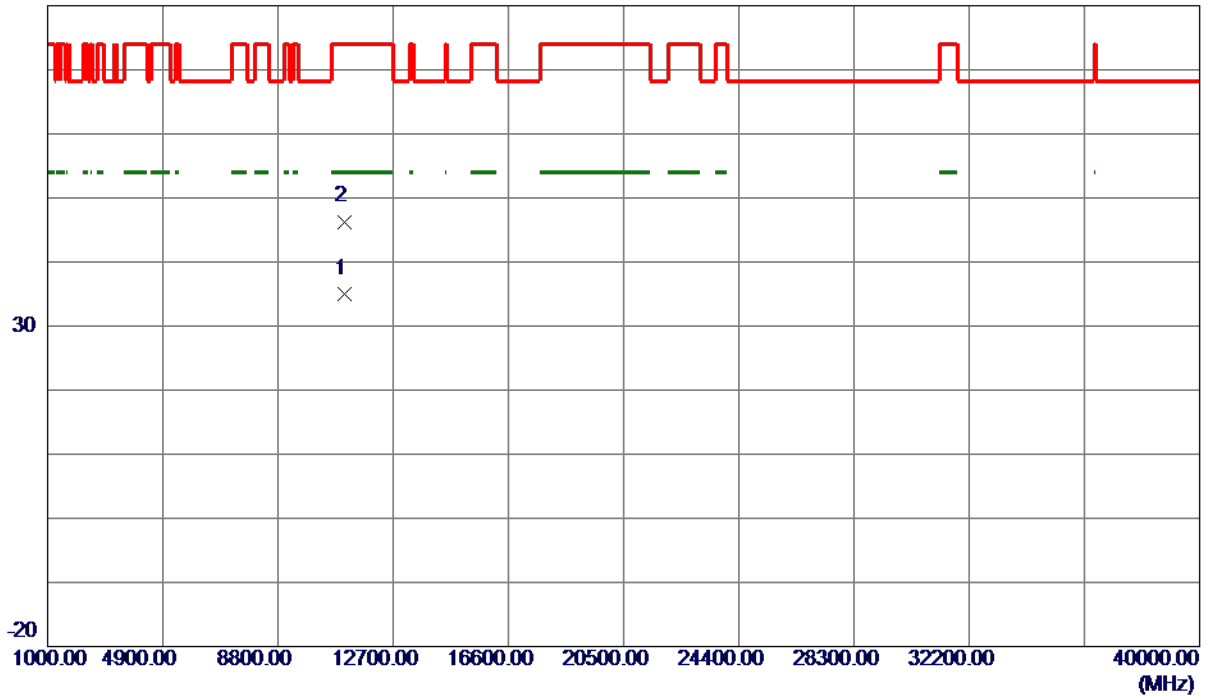

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11059.4620   | 23.28                      | 11.67                   | 34.95                     | 54.00           | -19.05       | AVG      |         |
| 2   | 11060.6180   | 34.62                      | 11.68                   | 46.30                     | 74.00           | -27.70       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

## Horizontal

130 dBuV/m

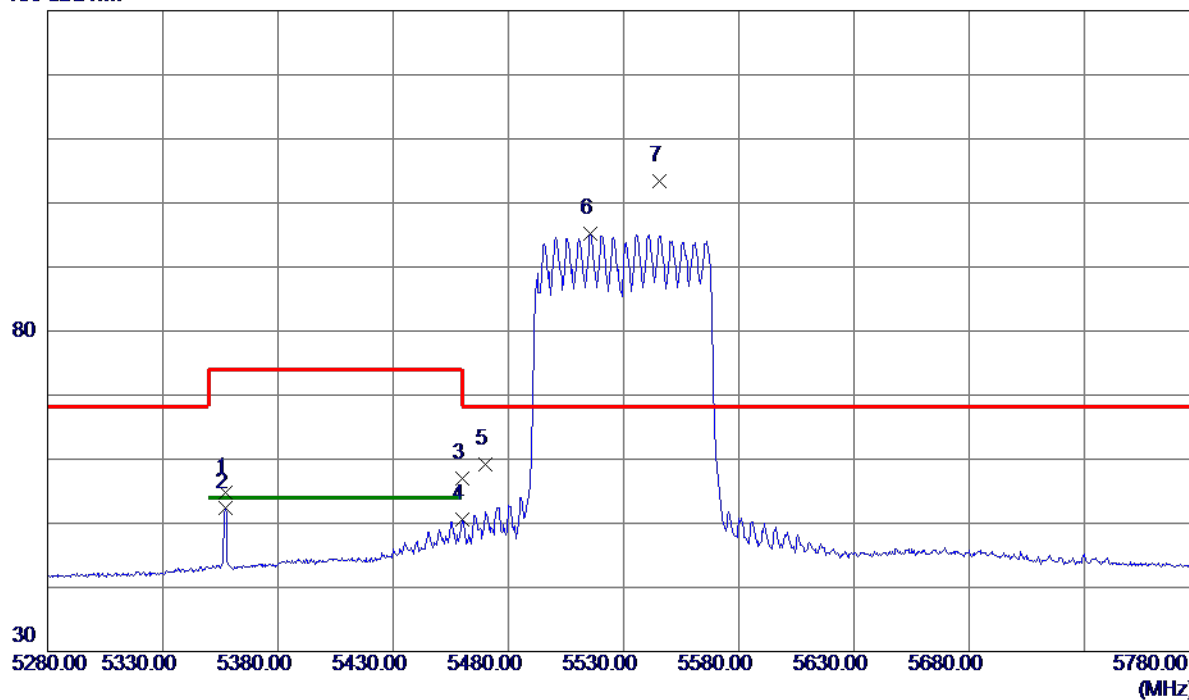

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5357.0000    | 40.08                      | 14.81                   | 54.89                     | 74.00           | -19.11       | Peak     |          |
| 2   | 5357.0000    | 37.58                      | 14.81                   | 52.39                     | 54.00           | -1.61        | AVG      |          |
| 3   | 5460.0000    | 41.89                      | 15.05                   | 56.94                     | 74.00           | -17.06       | Peak     |          |
| 4   | 5460.0000    | 35.55                      | 15.05                   | 50.60                     | 54.00           | -3.40        | AVG      |          |
| 5   | 5470.0000    | 44.10                      | 15.07                   | 59.17                     | 68.30           | -9.13        | Peak     |          |
| 6   | 5515.5000    | 79.98                      | 15.18                   | 95.16                     | 999.00          | -903.84      | AVG      | No Limit |
| 7 * | 5545.7500    | 88.20                      | 15.25                   | 103.45                    | 68.30           | 35.15        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

## Horizontal

80 dBuV/m

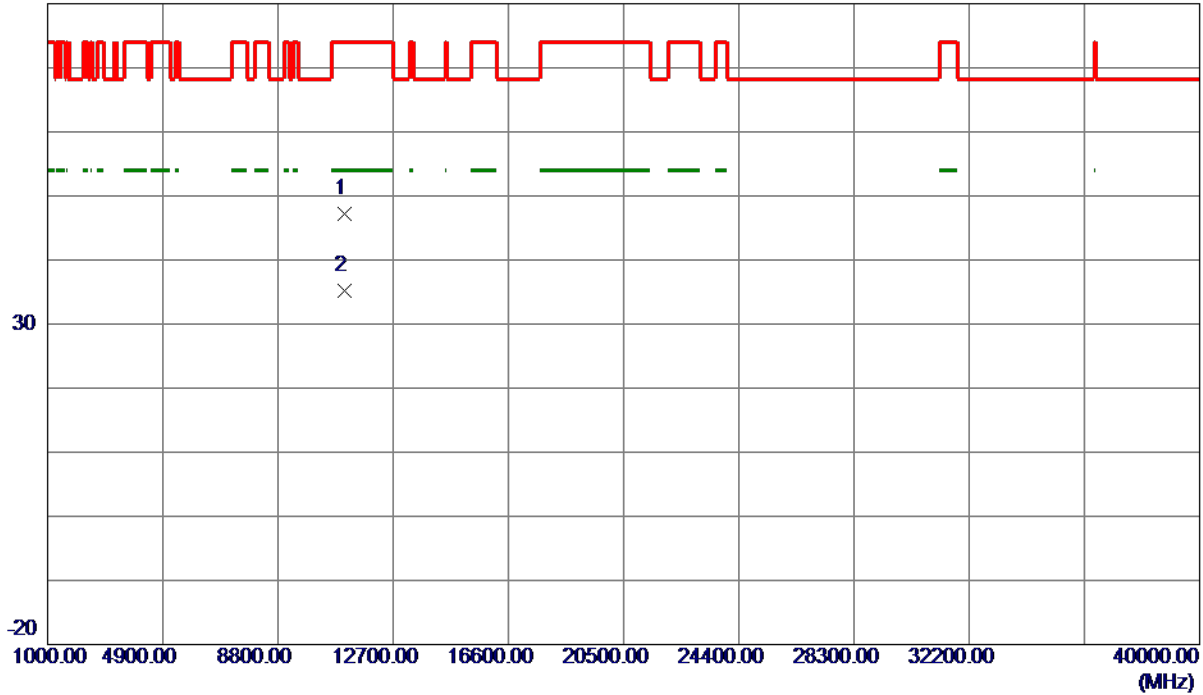

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11059.4200   | 35.61                      | 11.67                   | 47.28                     | 74.00           | -26.72       | Peak     |         |
| 2 * | 11059.4680   | 23.55                      | 11.67                   | 35.22                     | 54.00           | -18.78       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

## Vertical

130 dBuV/m

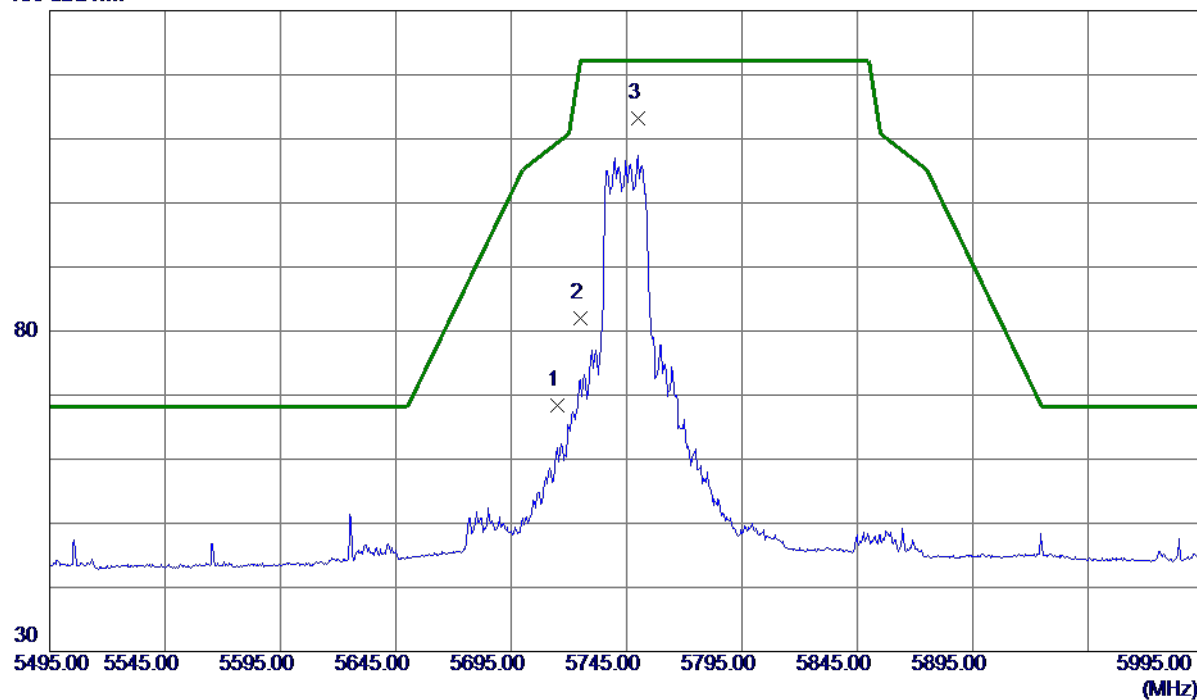

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 52.71                      | 15.65                   | 68.36                     | 109.40          | -41.04       | Peak     |          |
| 2   | 5725.0000    | 66.32                      | 15.68                   | 82.00                     | 122.20          | -40.20       | Peak     |          |
| 3 * | 5750.0000    | 97.51                      | 15.74                   | 113.25                    | 122.20          | -8.95        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

## Vertical

80 dBuV/m

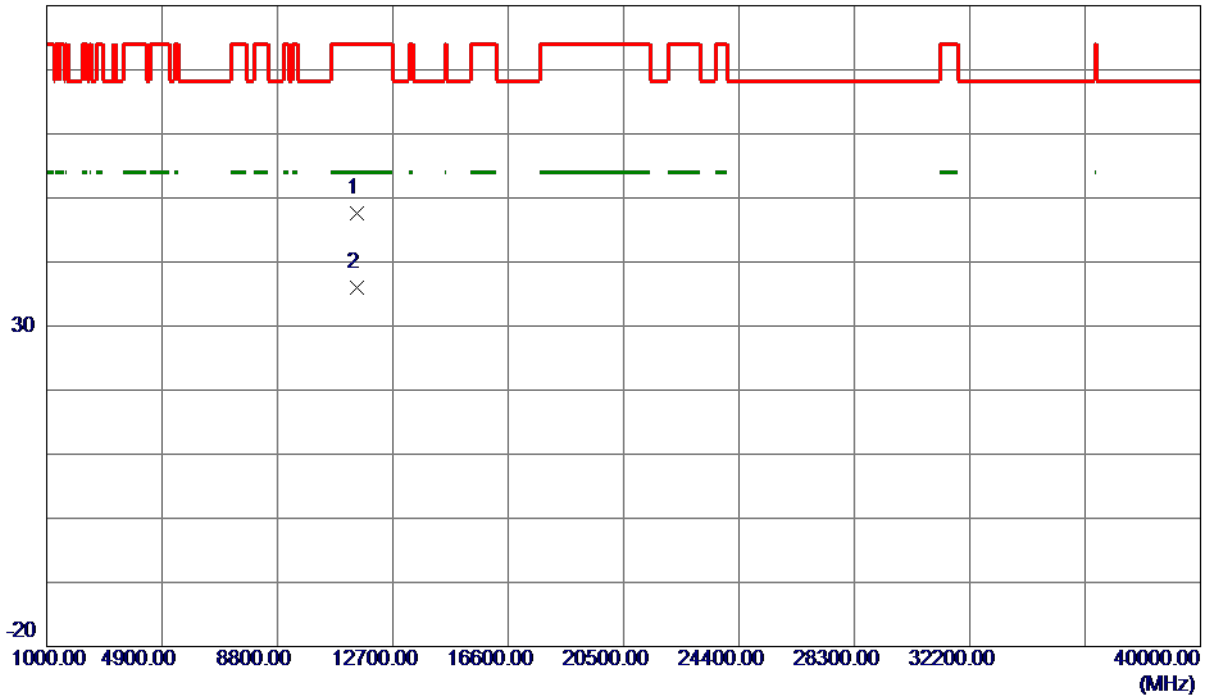

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11487.8580   | 35.50                      | 12.06                   | 47.56                     | 74.00           | -26.44       | Peak     |         |
| 2 * | 11490.8580   | 23.84                      | 12.07                   | 35.91                     | 54.00           | -18.09       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

## Horizontal

130 dBuV/m

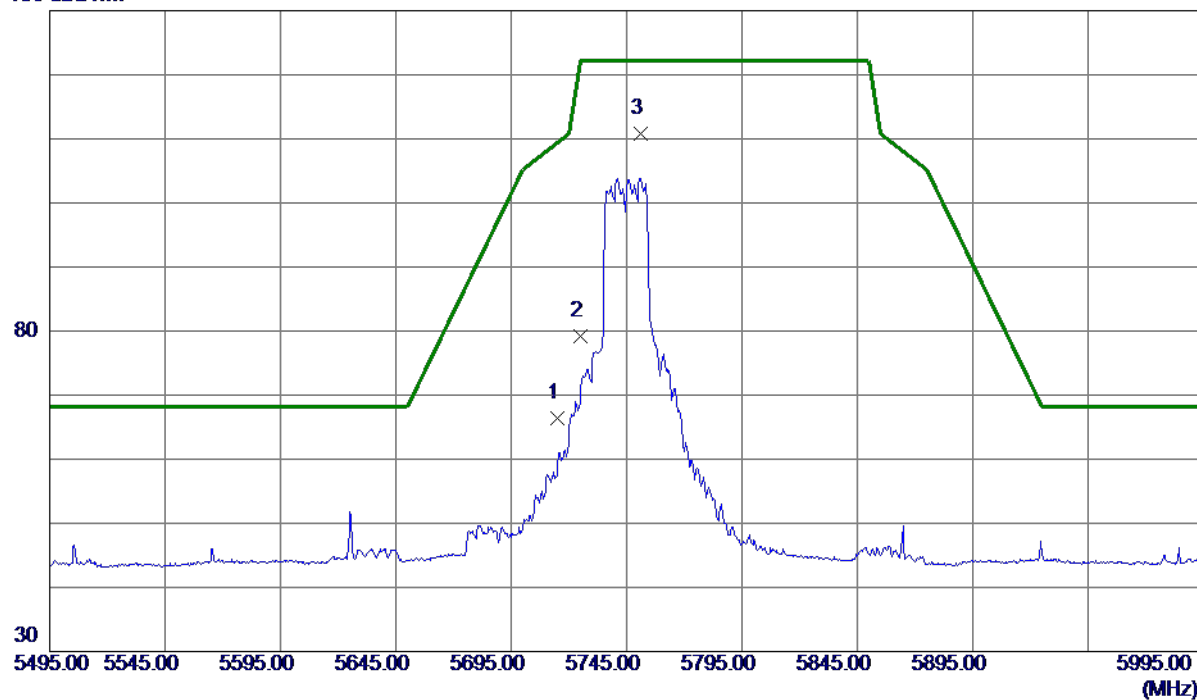

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 50.77                      | 15.65                   | 66.42                     | 109.40          | -42.98       | Peak     |          |
| 2   | 5725.0000    | 63.50                      | 15.68                   | 79.18                     | 122.20          | -43.02       | Peak     |          |
| 3 * | 5751.2500    | 95.11                      | 15.74                   | 110.85                    | 122.20          | -11.35       | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

## Horizontal

80 dBuV/m

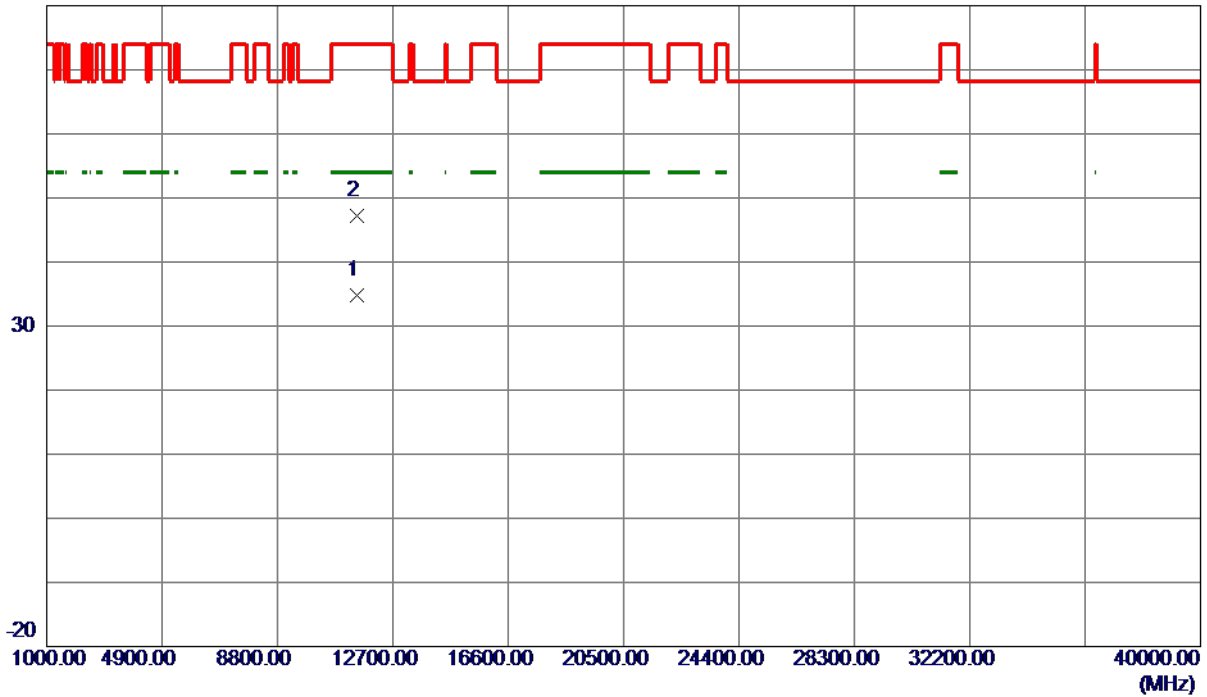

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11489.7980   | 22.67                      | 12.07                   | 34.74                     | 54.00           | -19.26       | AVG      |         |
| 2   | 11489.9300   | 35.16                      | 12.07                   | 47.23                     | 74.00           | -26.77       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

## Vertical

130 dBuV/m

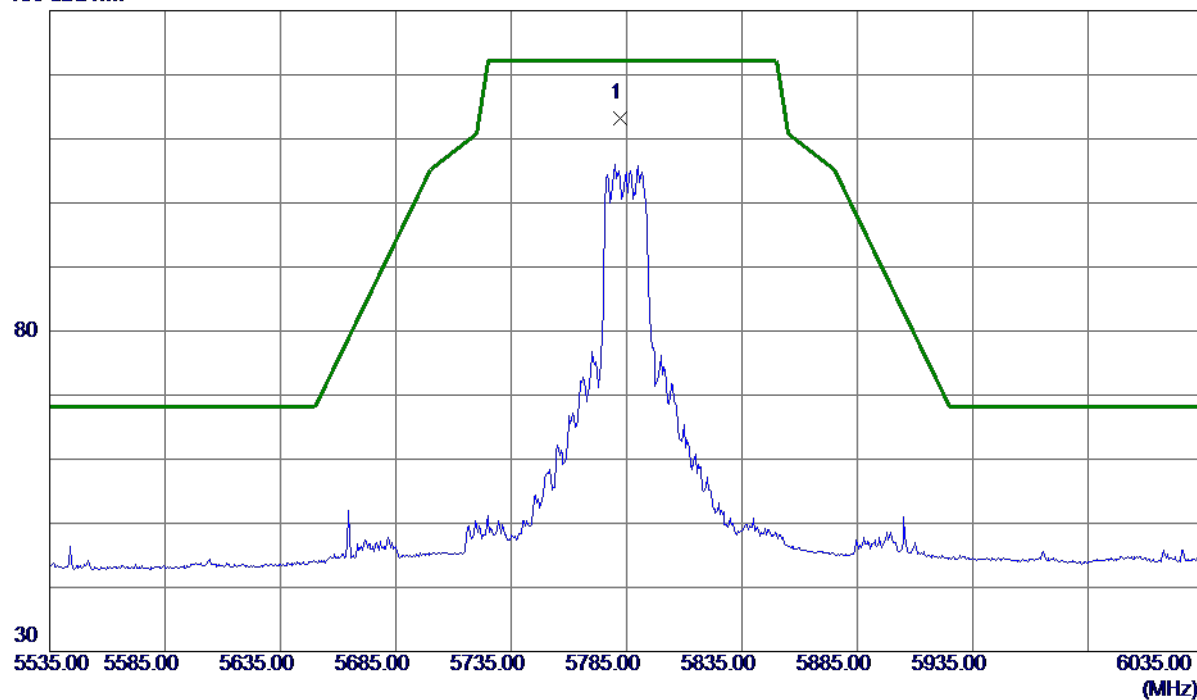

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5782.0000    | 97.42                      | 15.81                   | 113.23                    | 122.20          | -8.97        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

## Vertical

80 dBuV/m

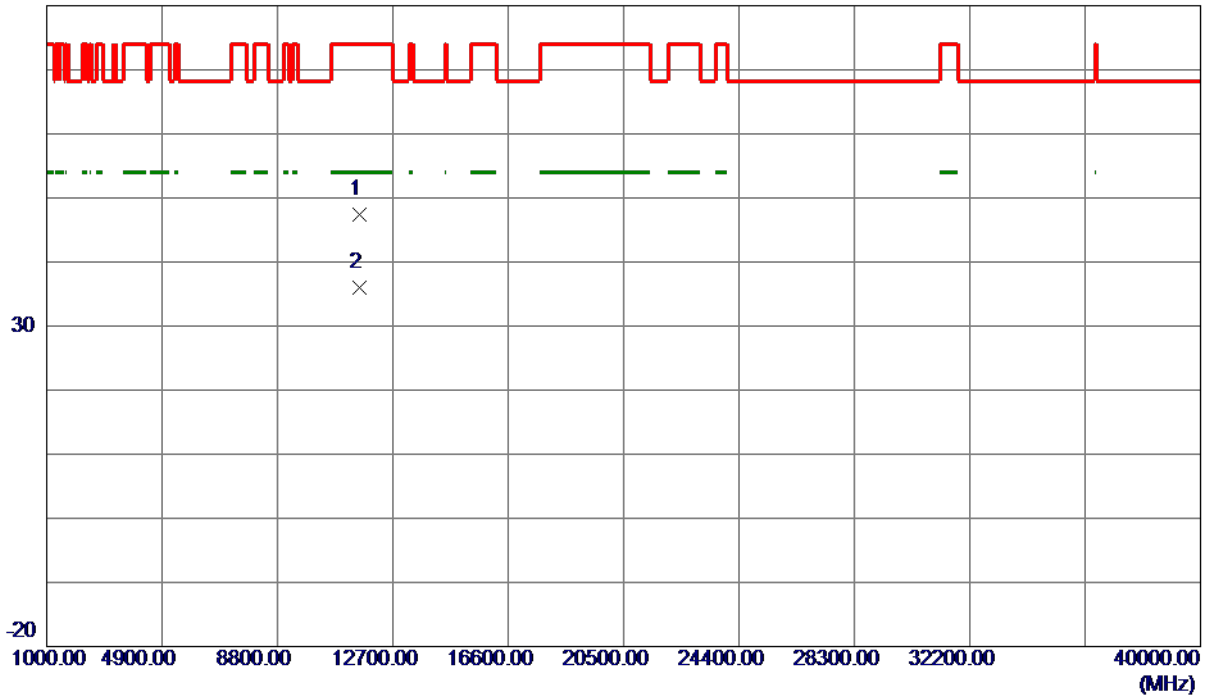

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11568.7220   | 35.27                      | 12.14                   | 47.41                     | 74.00           | -26.59       | Peak     |         |
| 2 * | 11571.4520   | 23.84                      | 12.15                   | 35.99                     | 54.00           | -18.01       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

## Horizontal

130 dBuV/m

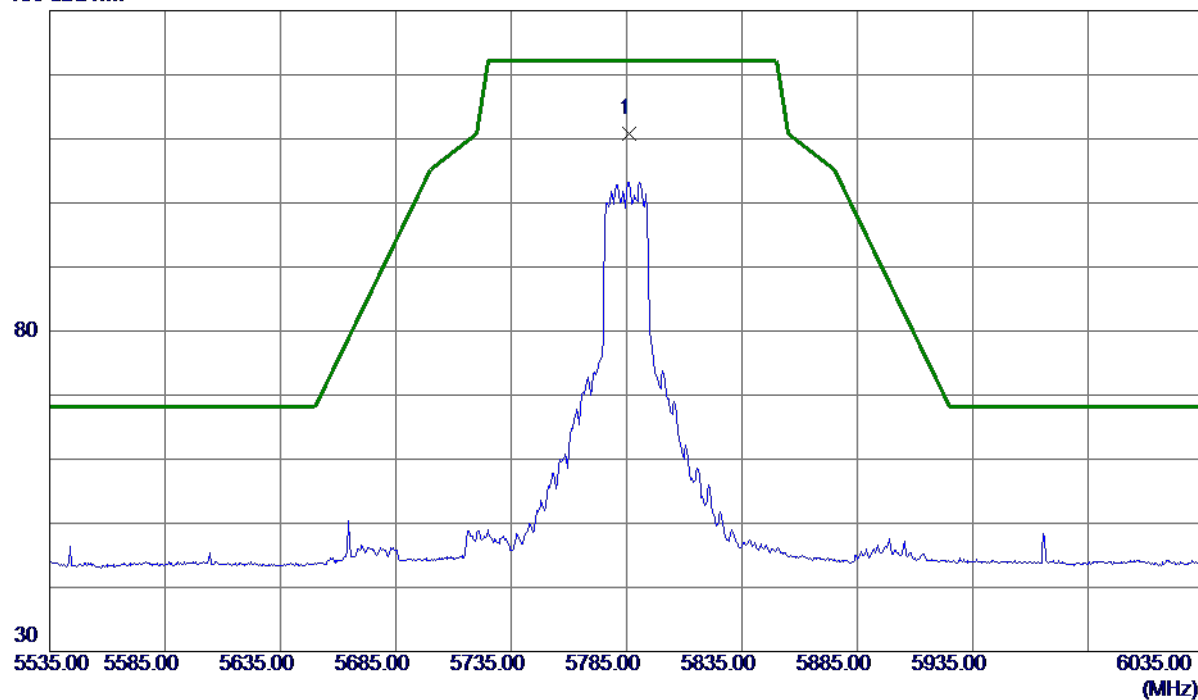

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5786.0000    | 94.93                      | 15.82                   | 110.75                    | 122.20          | -11.45       | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

## Horizontal

80 dBuV/m

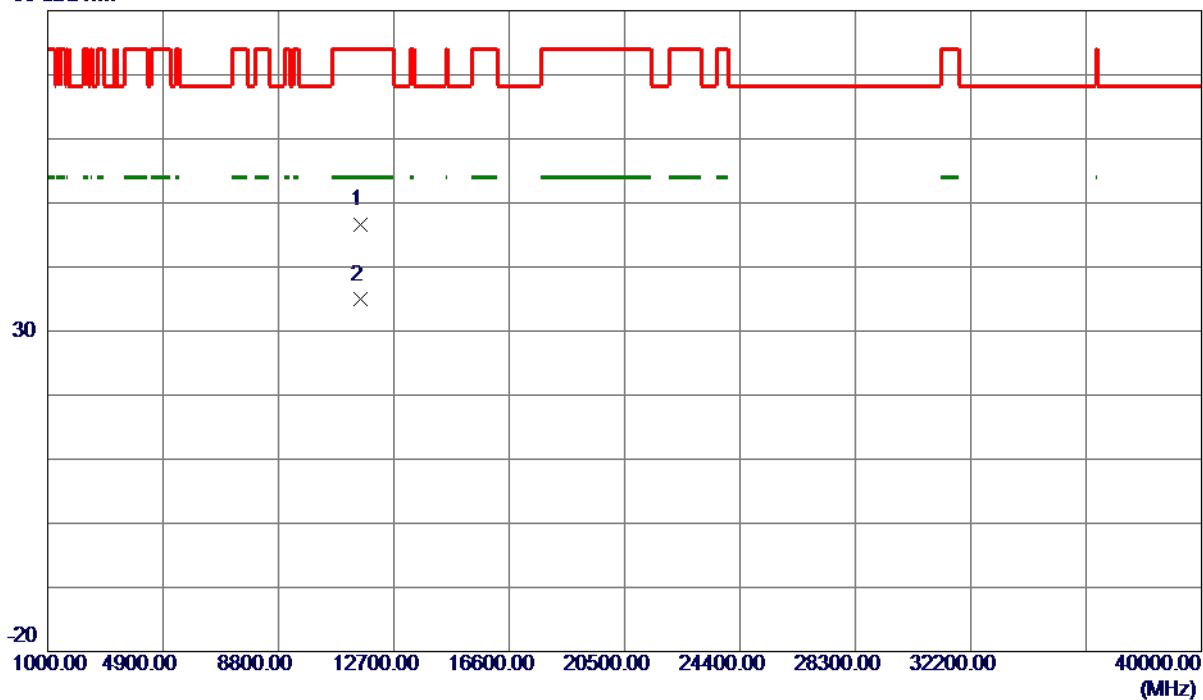

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11567.9100   | 34.54                      | 12.14                   | 46.68                     | 74.00           | -27.32       | Peak     |         |
| 2 * | 11569.8750   | 22.75                      | 12.15                   | 34.90                     | 54.00           | -19.10       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

## Vertical

130 dBuV/m

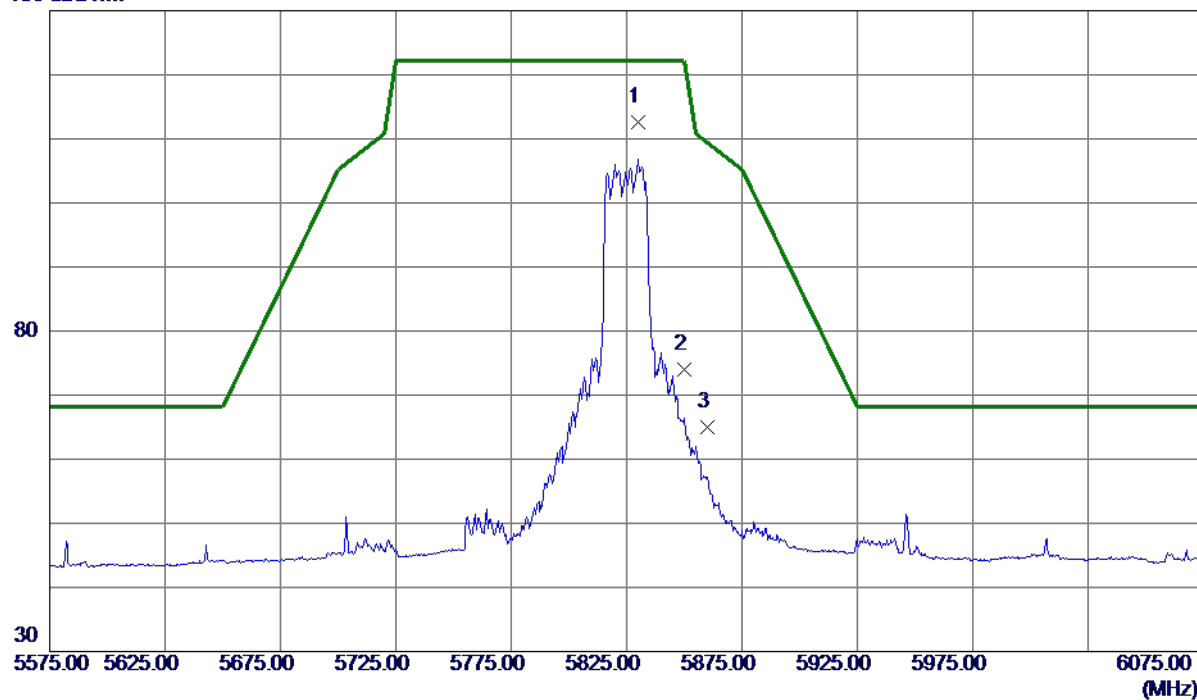

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5829.7500    | 96.61                      | 15.93                   | 112.54                    | 122.20          | -9.66        | Peak     | No Limit |
| 2   | 5850.0000    | 58.04                      | 15.97                   | 74.01                     | 122.20          | -48.19       | Peak     |          |
| 3   | 5860.0000    | 48.97                      | 16.00                   | 64.97                     | 109.40          | -44.43       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

## Vertical

80 dBuV/m

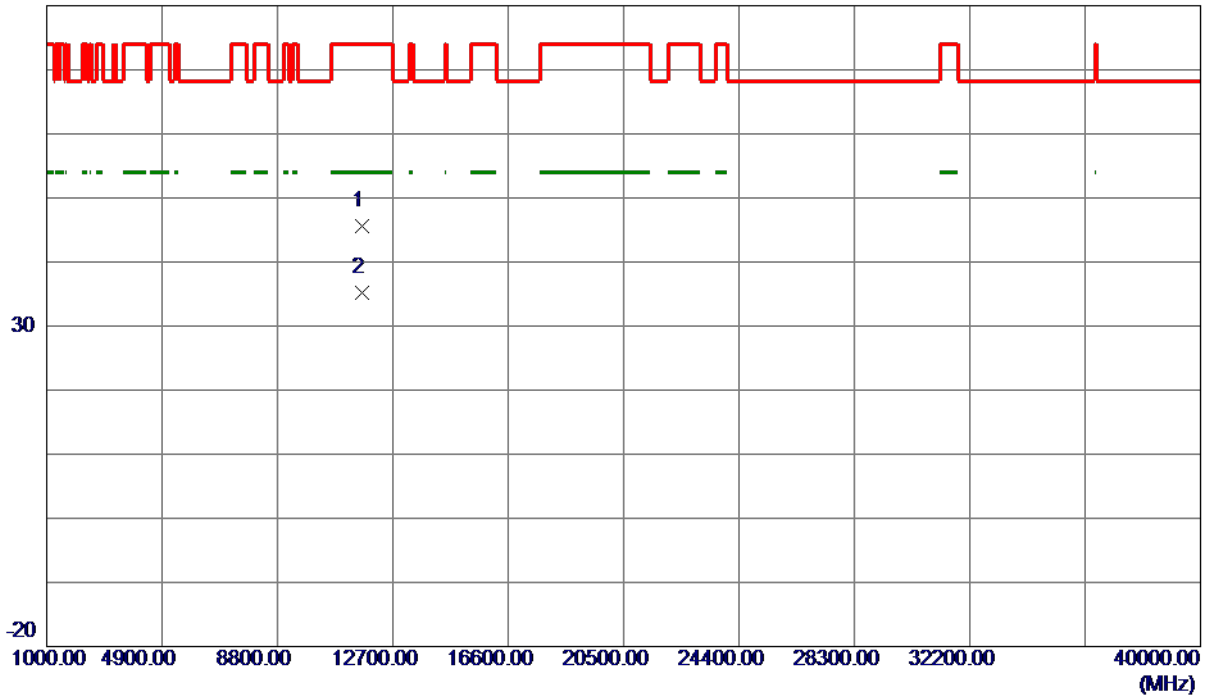

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11652.6250   | 33.39                      | 12.23                   | 45.62                     | 74.00           | -28.38       | Peak     |         |
| 2 * | 11654.7750   | 23.00                      | 12.23                   | 35.23                     | 54.00           | -18.77       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

## Horizontal

130 dBuV/m

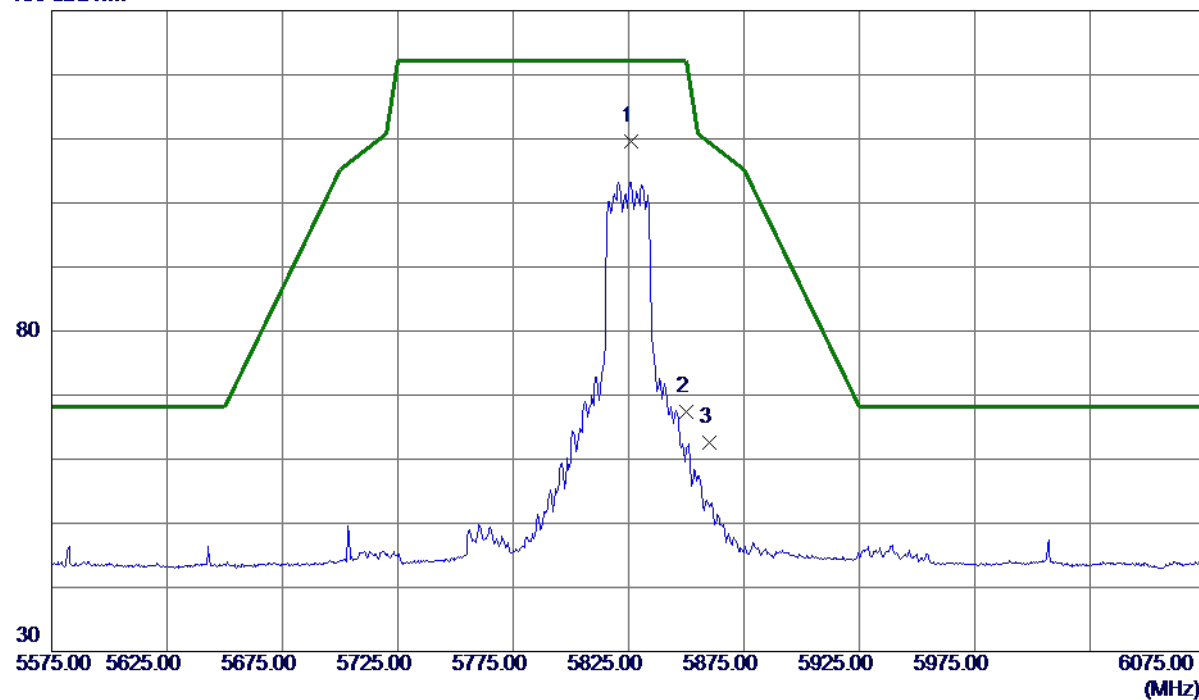

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5826.0000    | 93.74                      | 15.92                   | 109.66                    | 122.20          | -12.54       | Peak     | No Limit |
| 2   | 5850.0000    | 51.39                      | 15.97                   | 67.36                     | 122.20          | -54.84       | Peak     |          |
| 3   | 5860.0000    | 46.64                      | 16.00                   | 62.64                     | 109.40          | -46.76       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

## Horizontal

80 dBuV/m

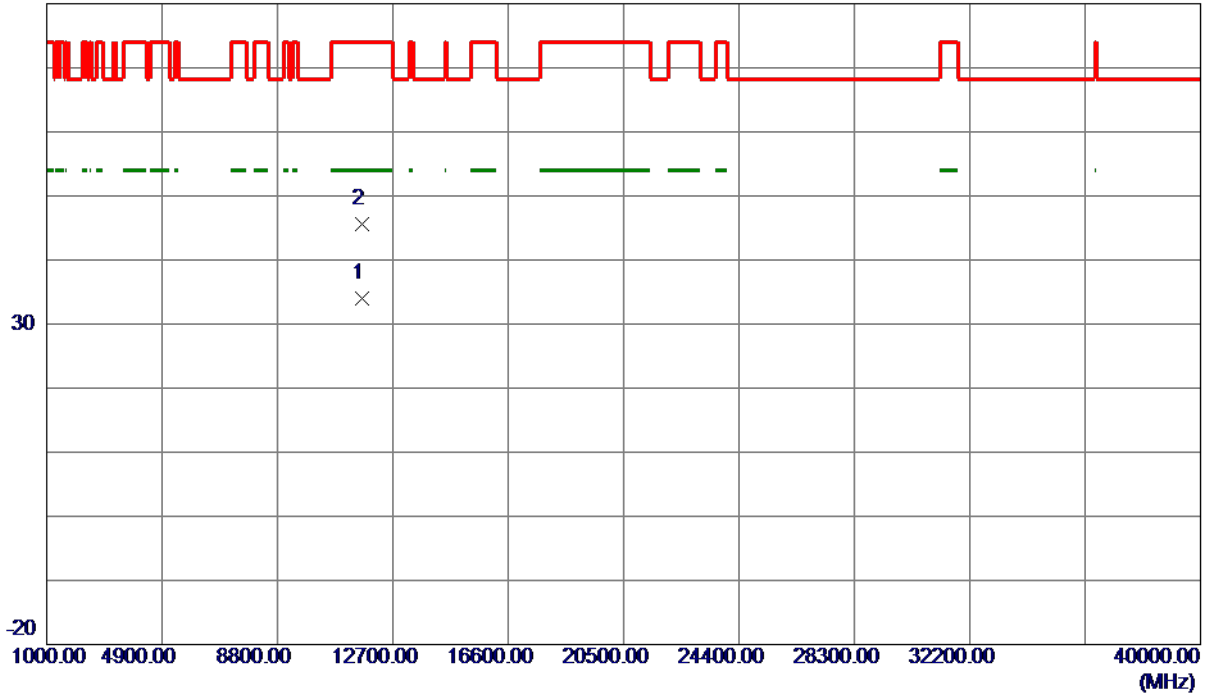

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11647.6220   | 21.83                      | 12.22                   | 34.05                     | 54.00           | -19.95       | AVG      |         |
| 2   | 11648.8580   | 33.35                      | 12.23                   | 45.58                     | 74.00           | -28.42       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

## Vertical

130 dBuV/m

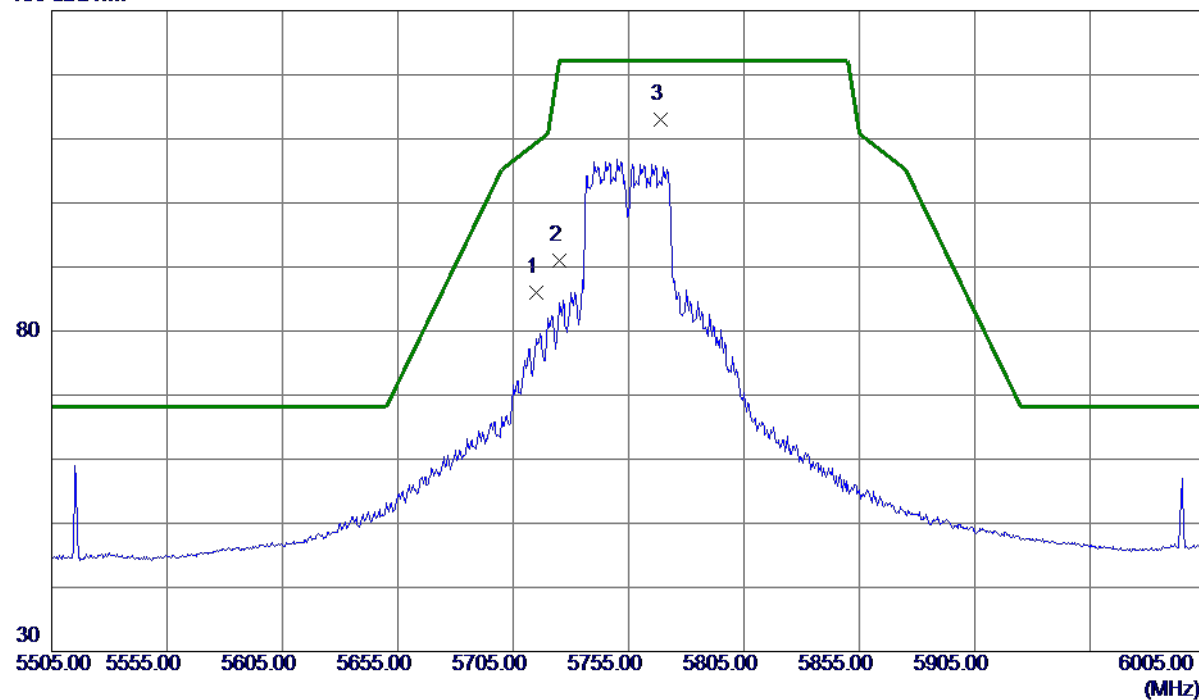

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 70.28                      | 15.65                   | 85.93                     | 109.40          | -23.47       | Peak     |          |
| 2   | 5725.0000    | 75.38                      | 15.68                   | 91.06                     | 122.20          | -31.14       | Peak     |          |
| 3 * | 5769.0000    | 97.22                      | 15.78                   | 113.00                    | 122.20          | -9.20        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

## Vertical

80 dBuV/m

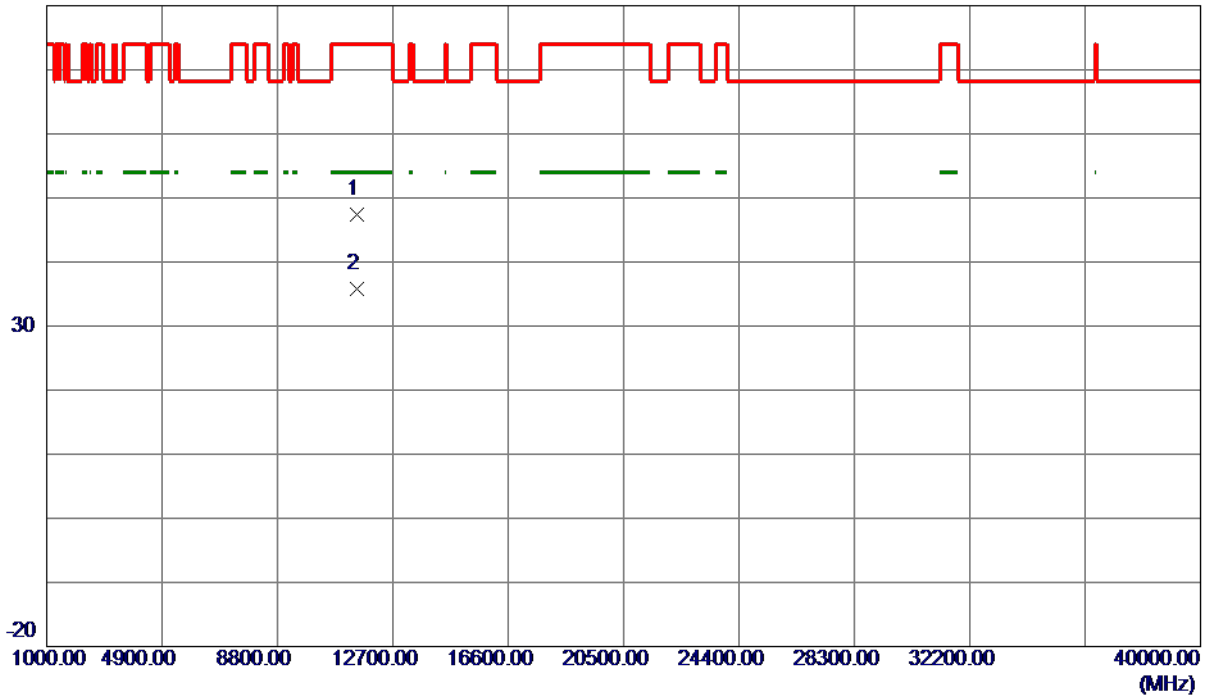

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11507.8330   | 35.27                      | 12.08                   | 47.35                     | 74.00           | -26.65       | Peak     |         |
| 2 * | 11508.1050   | 23.69                      | 12.08                   | 35.77                     | 54.00           | -18.23       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

## Horizontal

130 dBuV/m

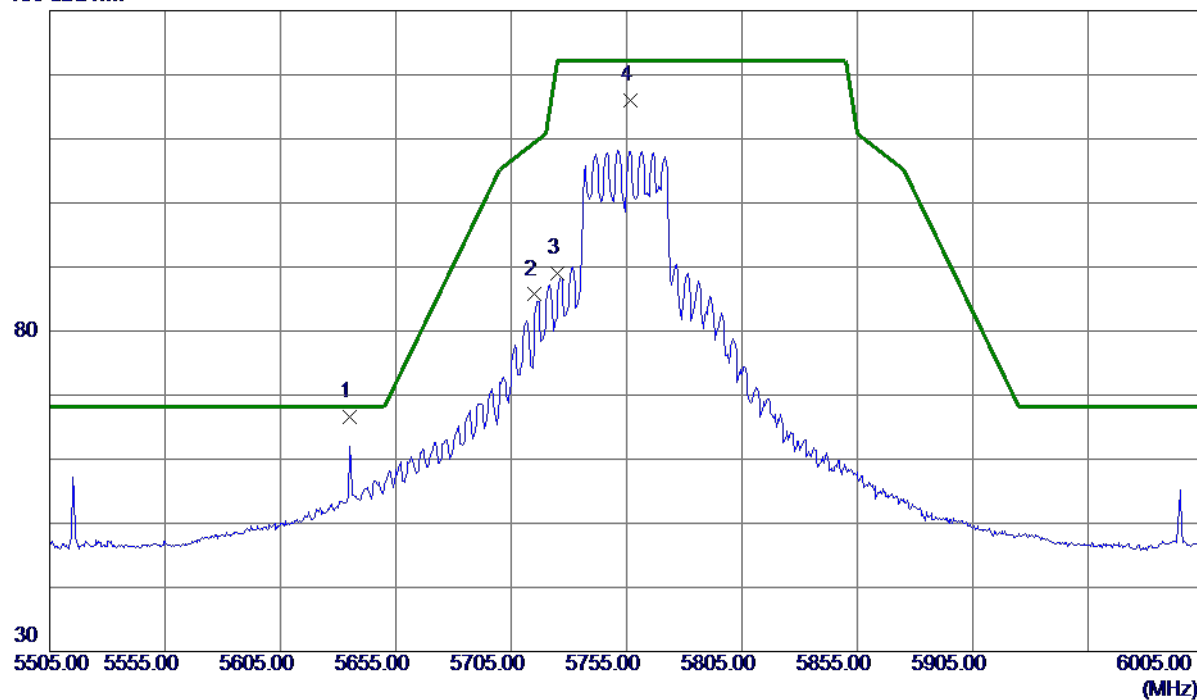

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5635.0000    | 51.14                      | 15.47                   | 66.61                     | 68.20           | -1.59        | Peak     |          |
| 2   | 5715.0000    | 70.05                      | 15.65                   | 85.70                     | 109.40          | -23.70       | Peak     |          |
| 3   | 5725.0000    | 73.23                      | 15.68                   | 88.91                     | 122.20          | -33.29       | Peak     |          |
| 4   | 5756.5000    | 100.34                     | 15.75                   | 116.09                    | 122.20          | -6.11        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

## Horizontal

80 dBuV/m

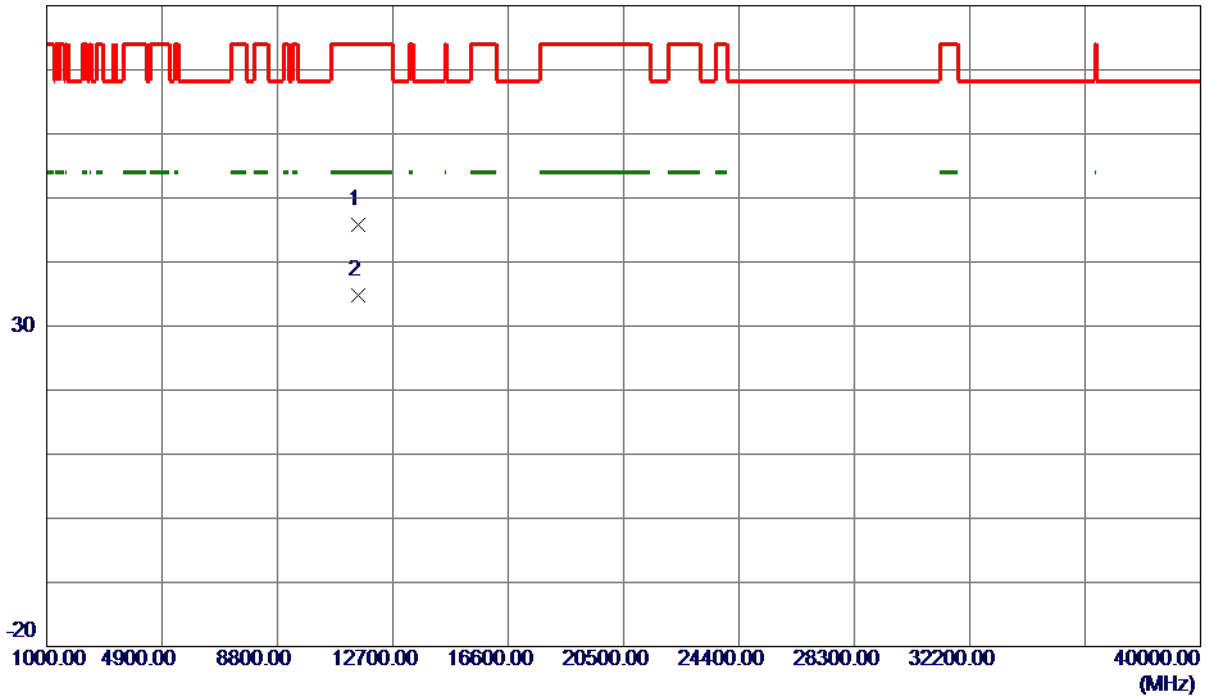

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11510.0420   | 33.74                      | 12.09                   | 45.83                     | 74.00           | -28.17       | Peak     |         |
| 2 * | 11511.1350   | 22.63                      | 12.09                   | 34.72                     | 54.00           | -19.28       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

## Vertical

130 dBuV/m

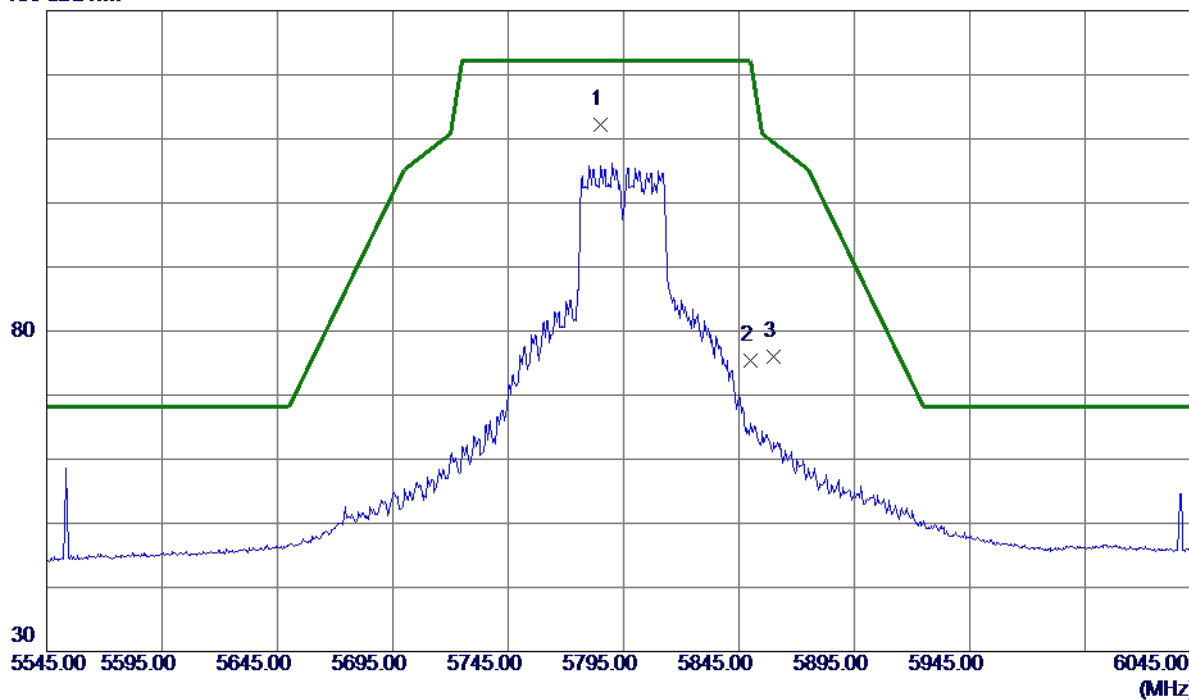

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5785.2500    | 96.39                      | 15.82                   | 112.21                    | 122.20          | -9.99        | Peak     | No Limit |
| 2   | 5850.0000    | 59.38                      | 15.97                   | 75.35                     | 122.20          | -46.85       | Peak     |          |
| 3   | 5860.0000    | 60.00                      | 16.00                   | 76.00                     | 109.40          | -33.40       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

## Vertical

80 dBuV/m

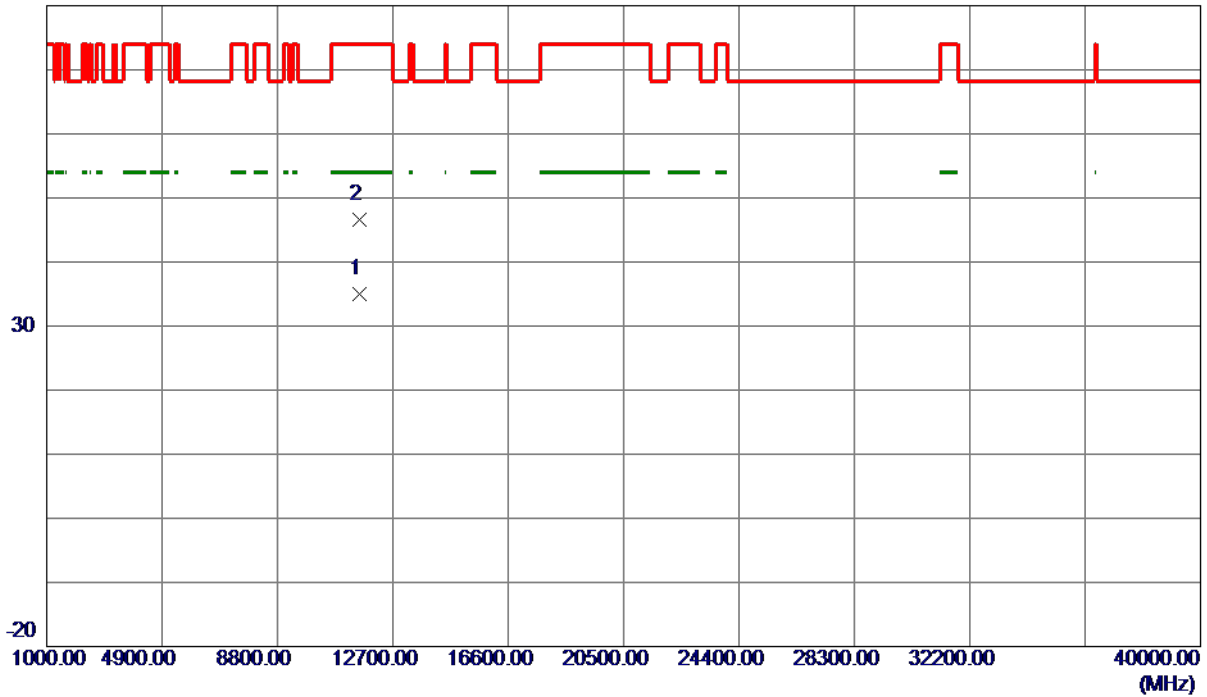

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11590.3820   | 22.86                      | 12.17                   | 35.03                     | 54.00           | -18.97       | AVG      |         |
| 2   | 11592.1800   | 34.38                      | 12.17                   | 46.55                     | 74.00           | -27.45       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

## Horizontal

130 dBuV/m

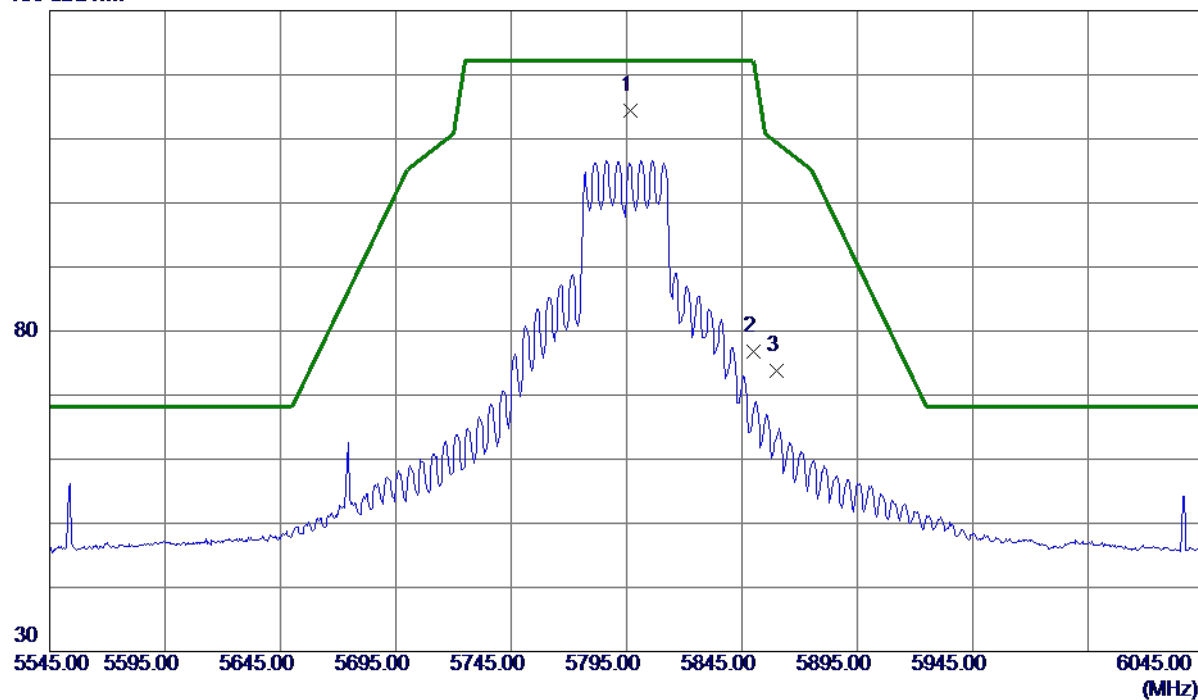

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5796.7500    | 98.62                      | 15.85                   | 114.47                    | 122.20          | -7.73        | Peak     | No Limit |
| 2   | 5850.0000    | 60.82                      | 15.97                   | 76.79                     | 122.20          | -45.41       | Peak     |          |
| 3   | 5860.0000    | 57.89                      | 16.00                   | 73.89                     | 109.40          | -35.51       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

## Horizontal

80 dBuV/m

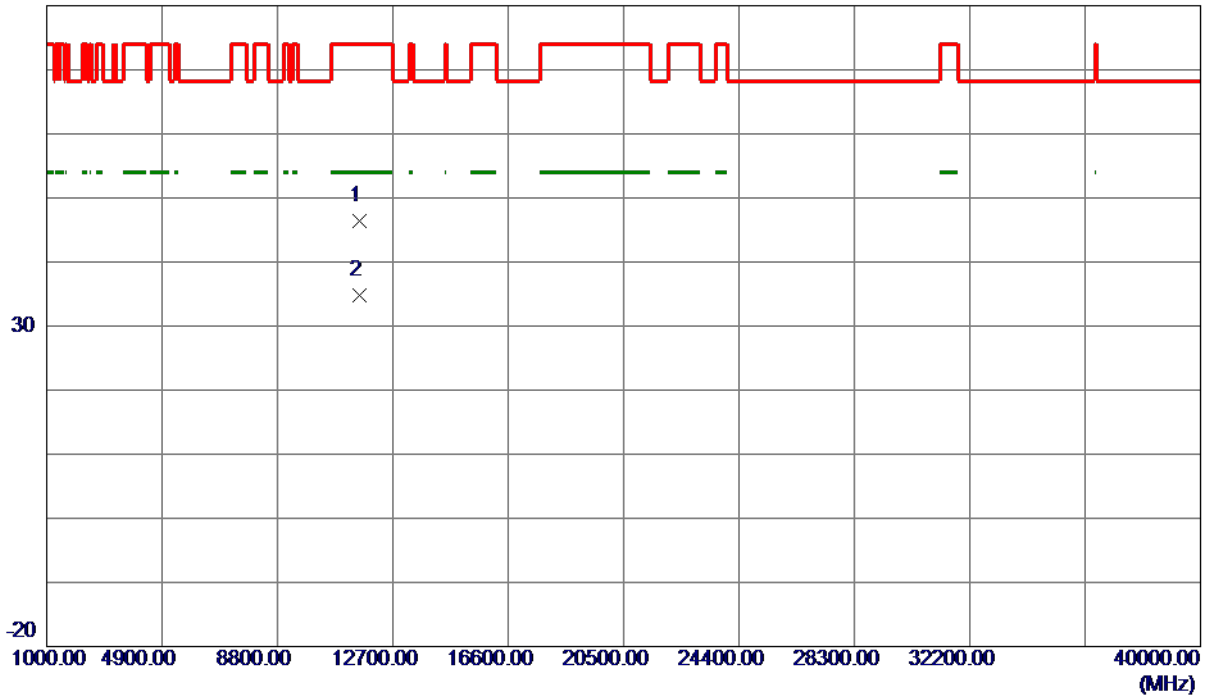

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11591.1449   | 34.23                      | 12.17                   | 46.40                     | 74.00           | -27.60       | Peak     |         |
| 2 * | 11591.7670   | 22.58                      | 12.17                   | 34.75                     | 54.00           | -19.25       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

## Vertical

130 dBuV/m

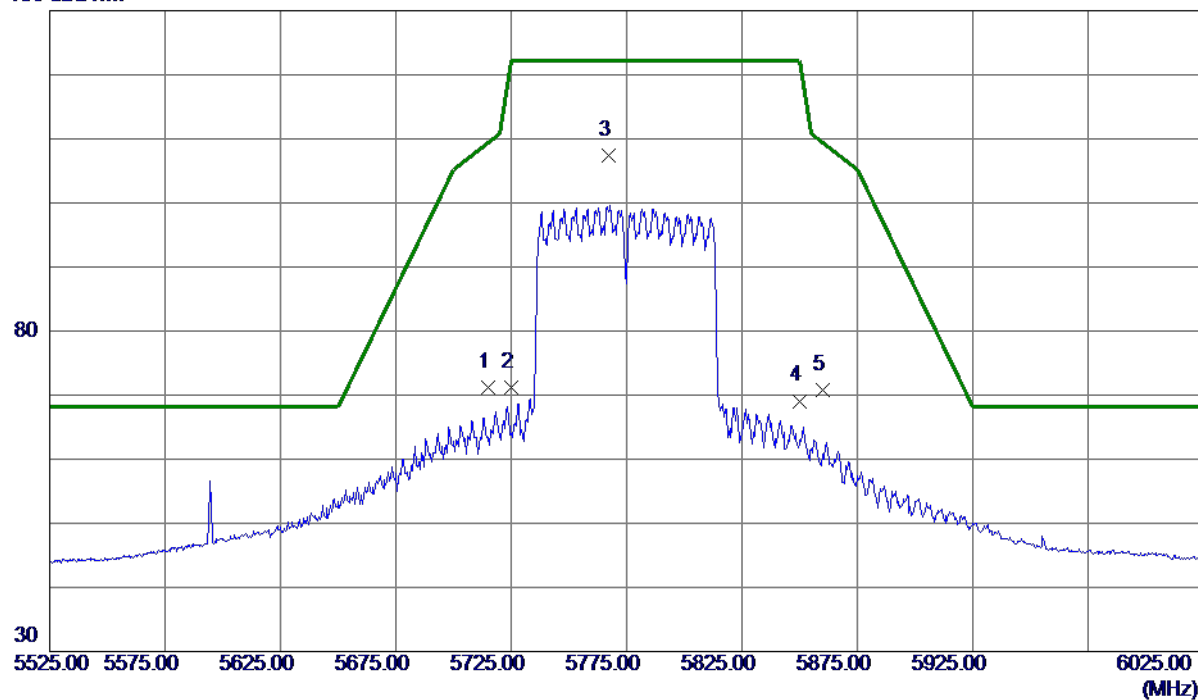

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 55.60                      | 15.65                   | 71.25                     | 109.40          | -38.15       | Peak     |          |
| 2   | 5725.0000    | 55.61                      | 15.68                   | 71.29                     | 122.20          | -50.91       | Peak     |          |
| 3 * | 5767.2500    | 91.60                      | 15.78                   | 107.38                    | 122.20          | -14.82       | Peak     | No Limit |
| 4   | 5850.0000    | 53.13                      | 15.97                   | 69.10                     | 122.20          | -53.10       | Peak     |          |
| 5   | 5860.0000    | 54.80                      | 16.00                   | 70.80                     | 109.40          | -38.60       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

## Vertical

80 dBuV/m

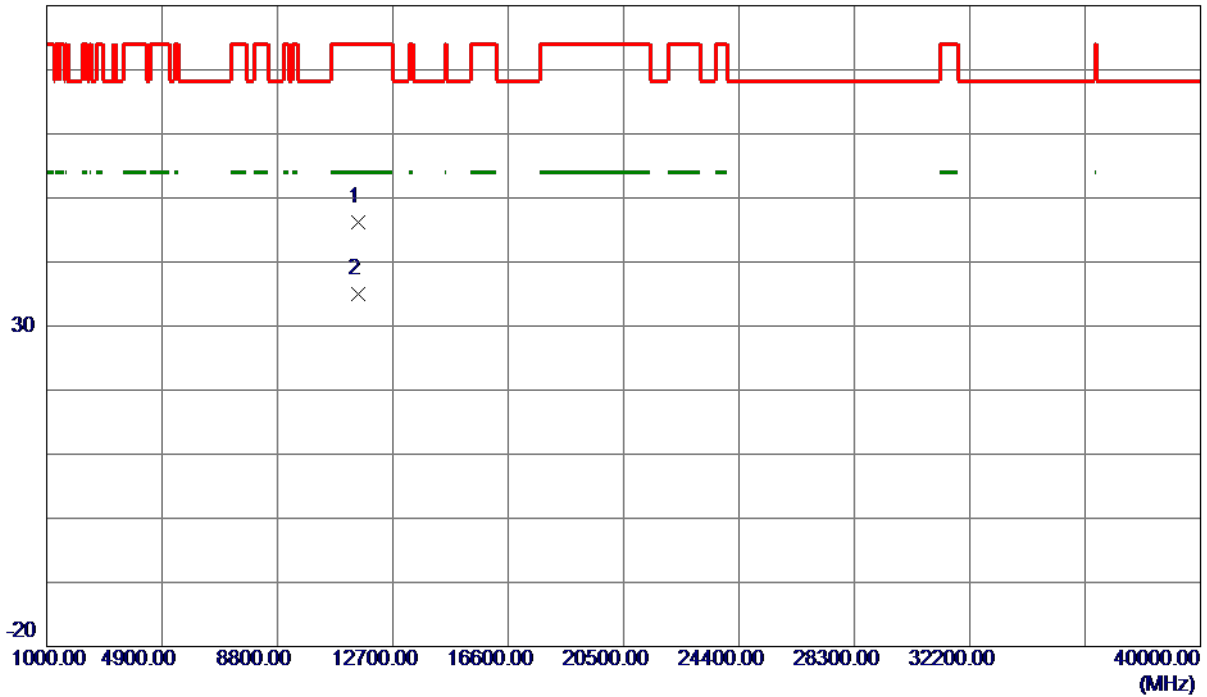

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11550.7720   | 34.10                      | 12.13                   | 46.23                     | 74.00           | -27.77       | Peak     |         |
| 2 * | 11551.1280   | 22.94                      | 12.13                   | 35.07                     | 54.00           | -18.93       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

## Horizontal

130 dBuV/m

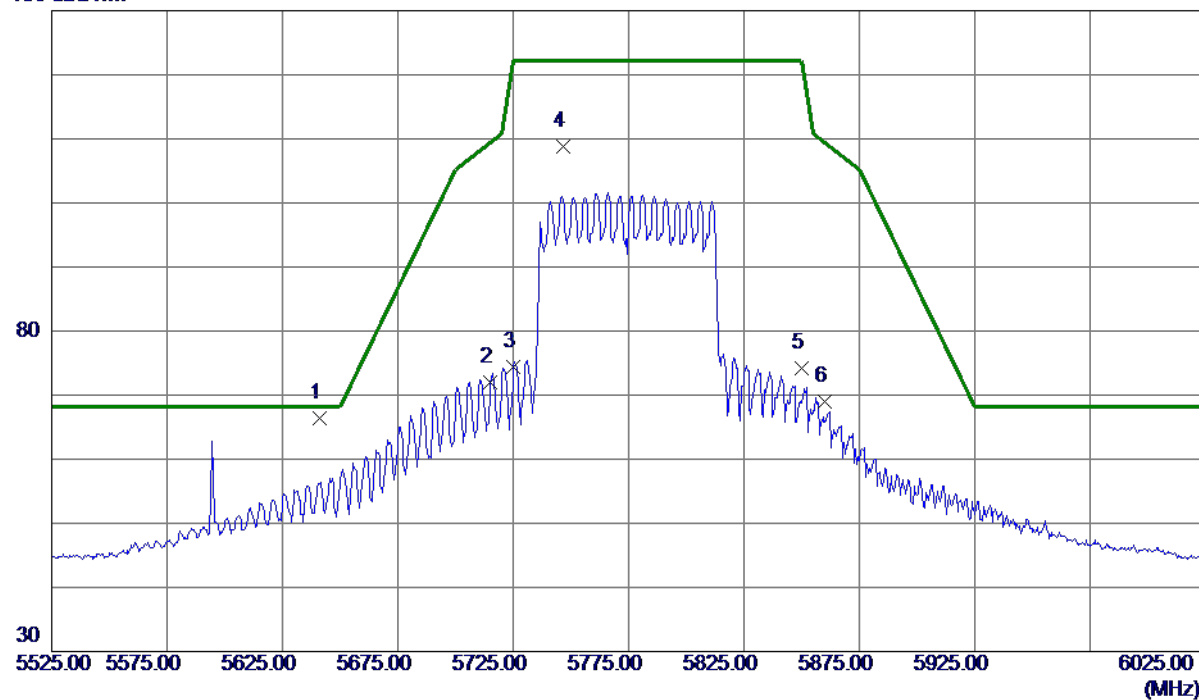

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5641.2500    | 50.92                      | 15.48                   | 66.40                     | 68.20           | -1.80        | Peak     |          |
| 2   | 5715.0000    | 56.37                      | 15.65                   | 72.02                     | 109.40          | -37.38       | Peak     |          |
| 3   | 5725.0000    | 58.68                      | 15.68                   | 74.36                     | 122.20          | -47.84       | Peak     |          |
| 4   | 5746.5000    | 93.11                      | 15.73                   | 108.84                    | 122.20          | -13.36       | Peak     | No Limit |
| 5   | 5850.0000    | 58.30                      | 15.97                   | 74.27                     | 122.20          | -47.93       | Peak     |          |
| 6   | 5860.0000    | 53.01                      | 16.00                   | 69.01                     | 109.40          | -40.39       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

## Horizontal

80 dBuV/m

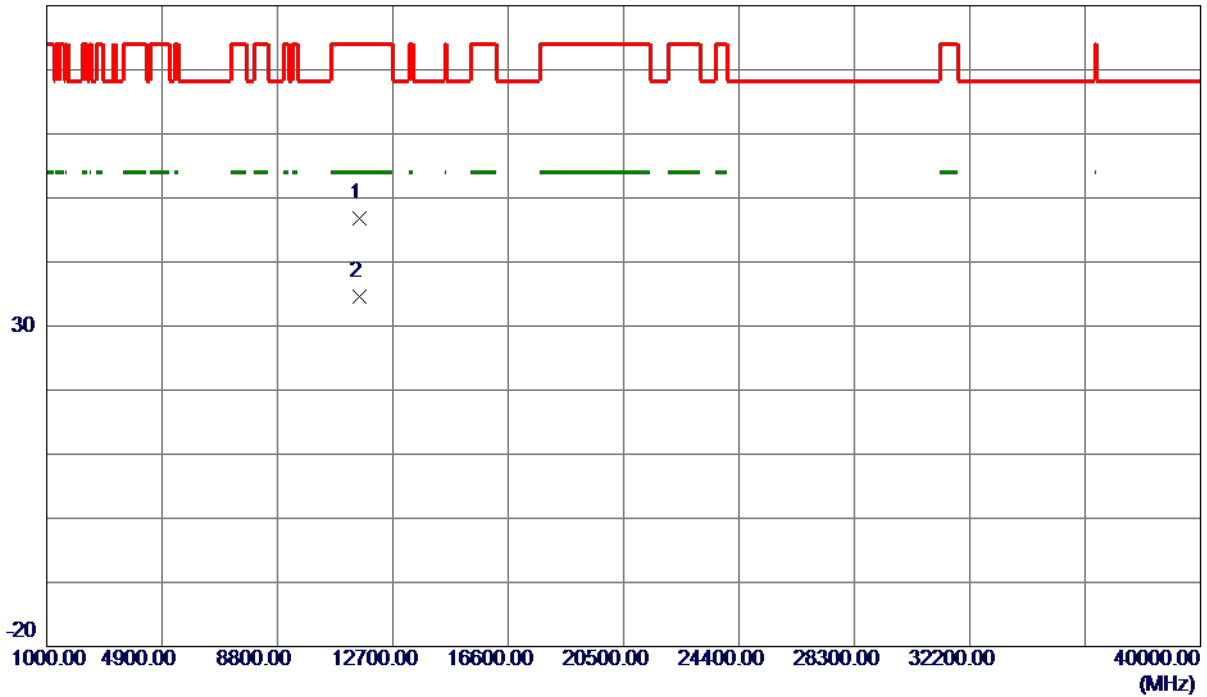

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11551.7280   | 34.75                      | 12.13                   | 46.88                     | 74.00           | -27.12       | Peak     |         |
| 2 * | 11552.4800   | 22.55                      | 12.13                   | 34.68                     | 54.00           | -19.32       | AVG      |         |

### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

## With Beamforming

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5180 MHz |

## Vertical

130 dBuV/m

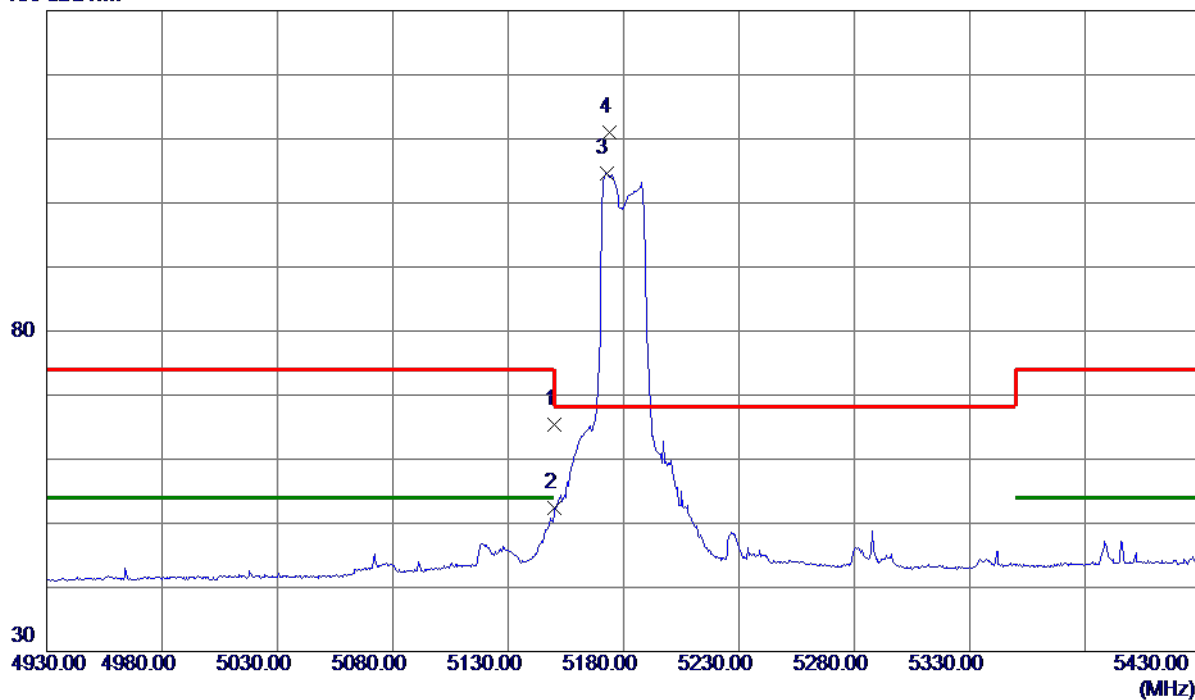

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 51.00                      | 14.32                   | 65.32                     | 74.00           | -8.68        | Peak     |          |
| 2   | 5150.0000    | 38.05                      | 14.32                   | 52.37                     | 54.00           | -1.63        | AVG      |          |
| 3   | 5172.5000    | 90.21                      | 14.37                   | 104.58                    | 999.00          | -894.42      | AVG      | No Limit |
| 4 * | 5173.7500    | 96.71                      | 14.37                   | 111.08                    | 68.30           | 42.78        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5180 MHz |

## Vertical

80 dBuV/m

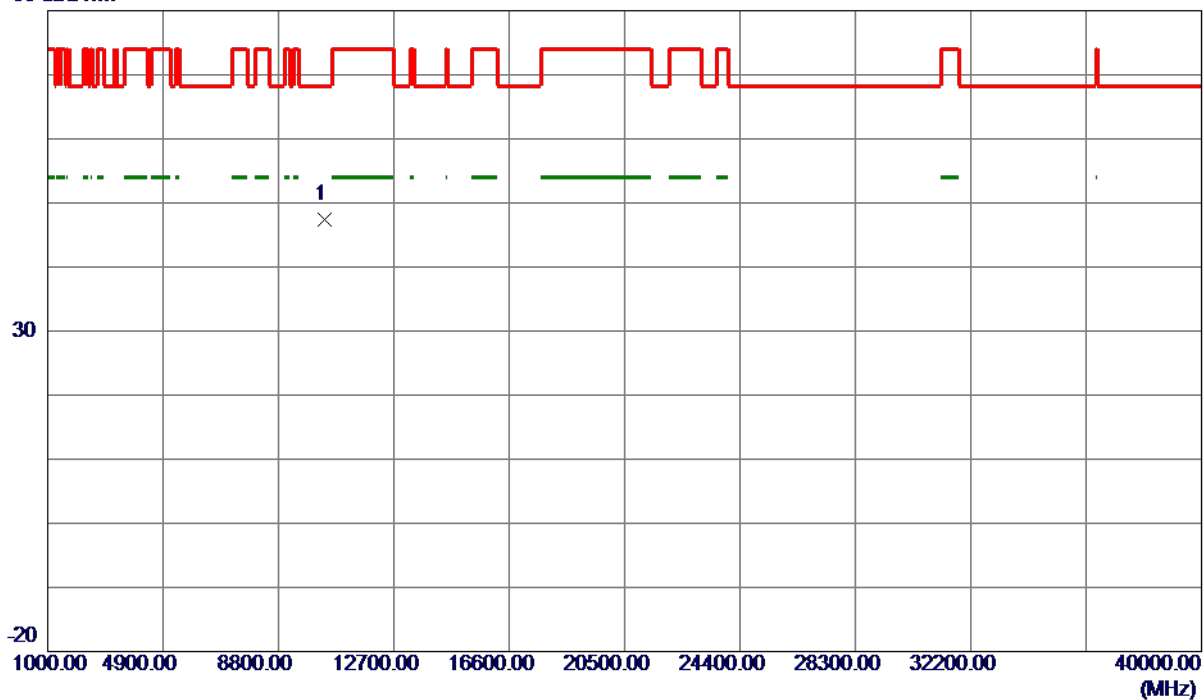

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10371.6000   | 36.10                      | 11.32                   | 47.42                     | 68.30           | -20.88       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5180 MHz |

## Horizontal

130 dBuV/m

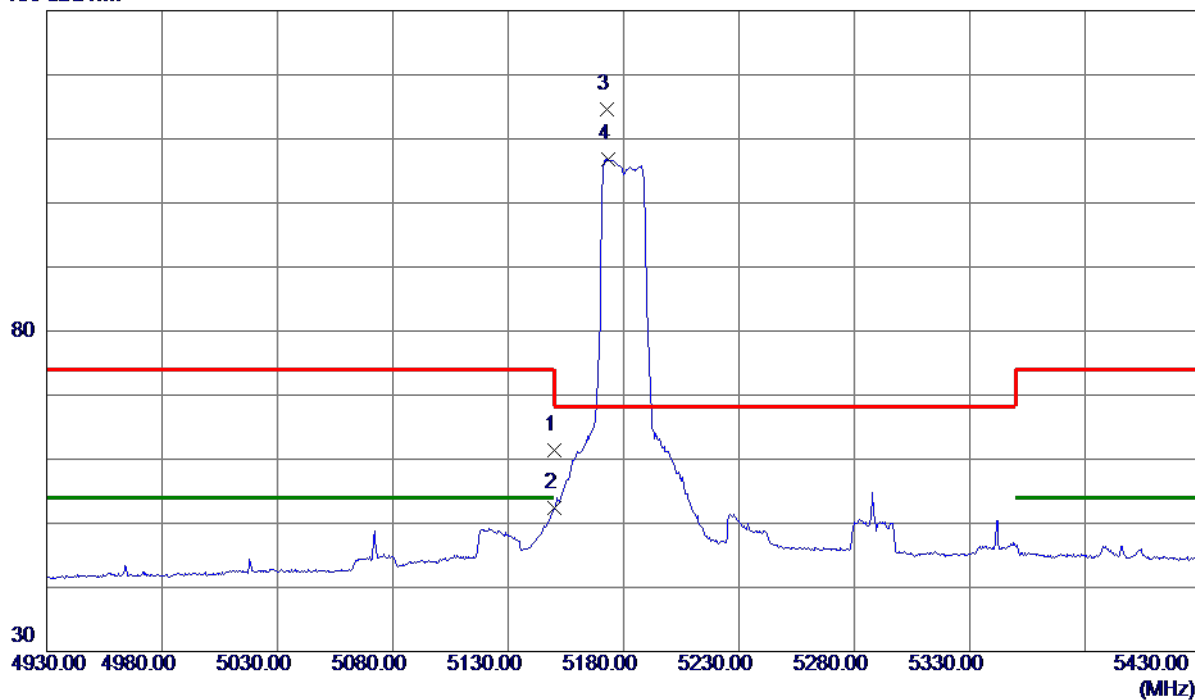

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 47.05                      | 14.32                   | 61.37                     | 74.00           | -12.63       | Peak     |          |
| 2   | 5150.0000    | 38.12                      | 14.32                   | 52.44                     | 54.00           | -1.56        | AVG      |          |
| 3 * | 5173.0000    | 100.20                     | 14.37                   | 114.57                    | 68.30           | 46.27        | Peak     | No Limit |
| 4   | 5173.5000    | 92.48                      | 14.37                   | 106.85                    | 999.00          | -892.15      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5180 MHz |

## Horizontal

80 dBuV/m

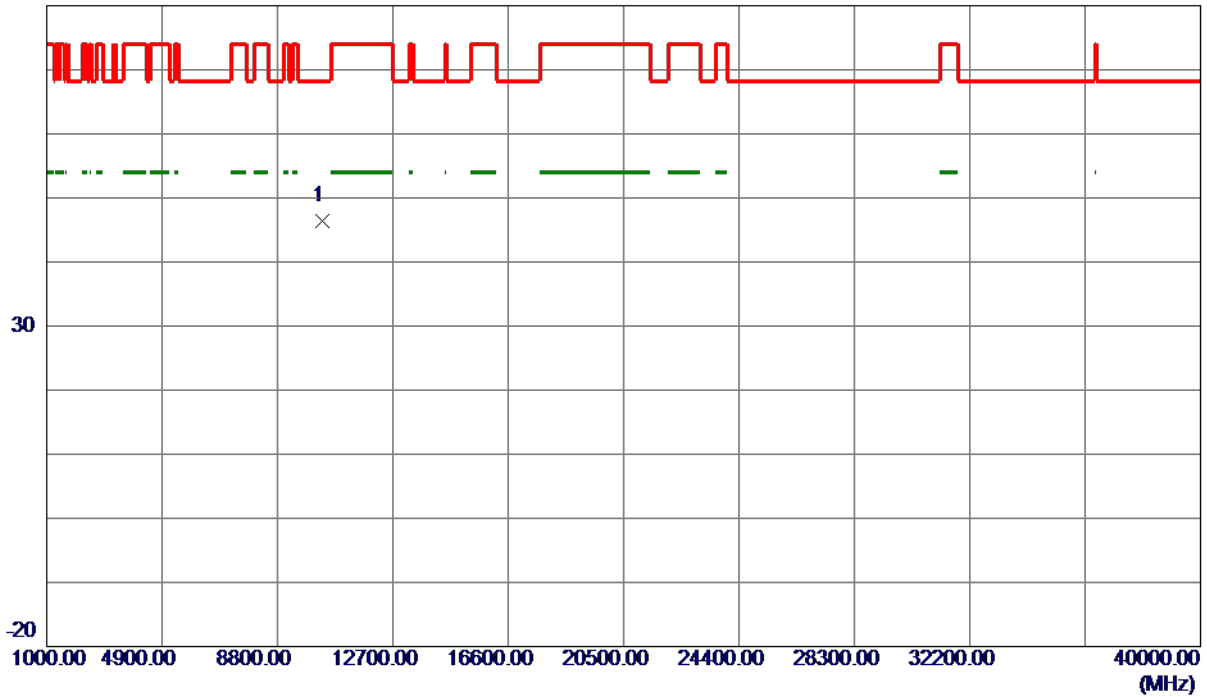

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10338.0250   | 35.15                      | 11.26                   | 46.41                     | 68.30           | -21.89       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5200 MHz |

## Vertical

130 dBuV/m

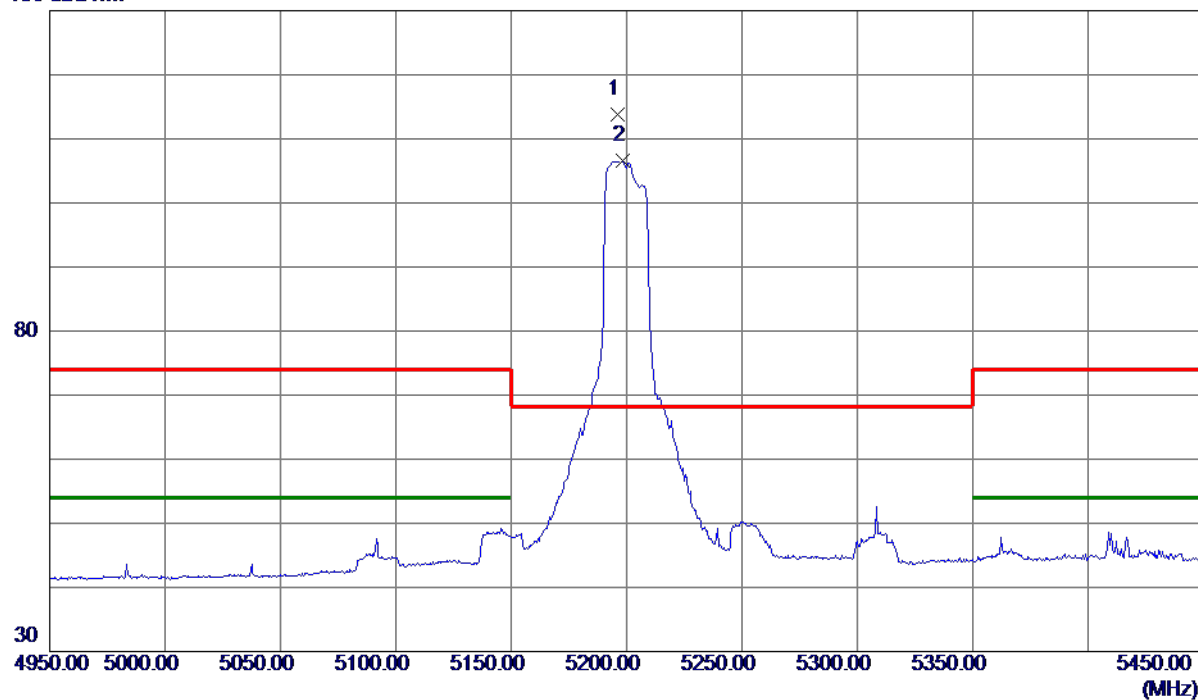

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5196.0000    | 99.45                      | 14.42                   | 113.87                    | 68.30           | 45.57        | Peak     | No Limit |
| 2   | 5198.2500    | 92.21                      | 14.43                   | 106.64                    | 999.00          | -892.36      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5200 MHz |

## Vertical

80 dBuV/m

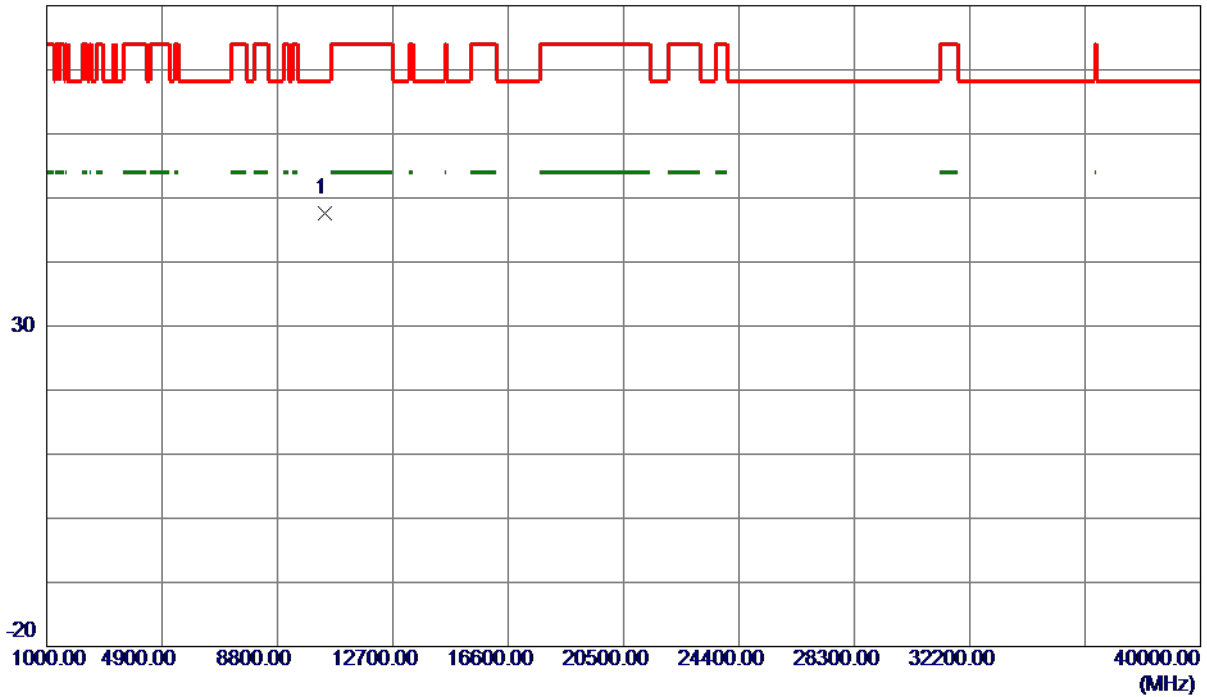

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.7000   | 36.28                      | 11.37                   | 47.65                     | 68.30           | -20.65       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5200 MHz |

## Horizontal

130 dBuV/m

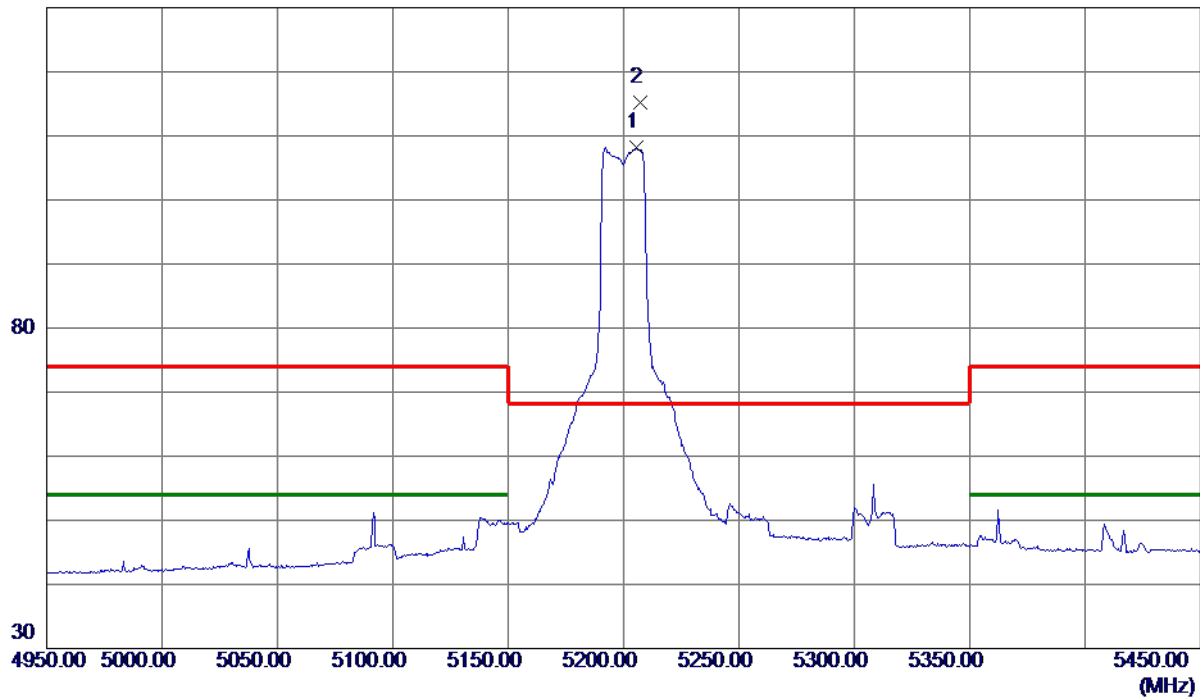

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5205.7500    | 93.70                      | 14.45                   | 108.15                    | 999.00          | -890.85      | AVG      | No Limit |
| 2 * | 5207.0000    | 100.68                     | 14.45                   | 115.13                    | 68.30           | 46.83        | Peak     | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5200 MHz |

## Horizontal

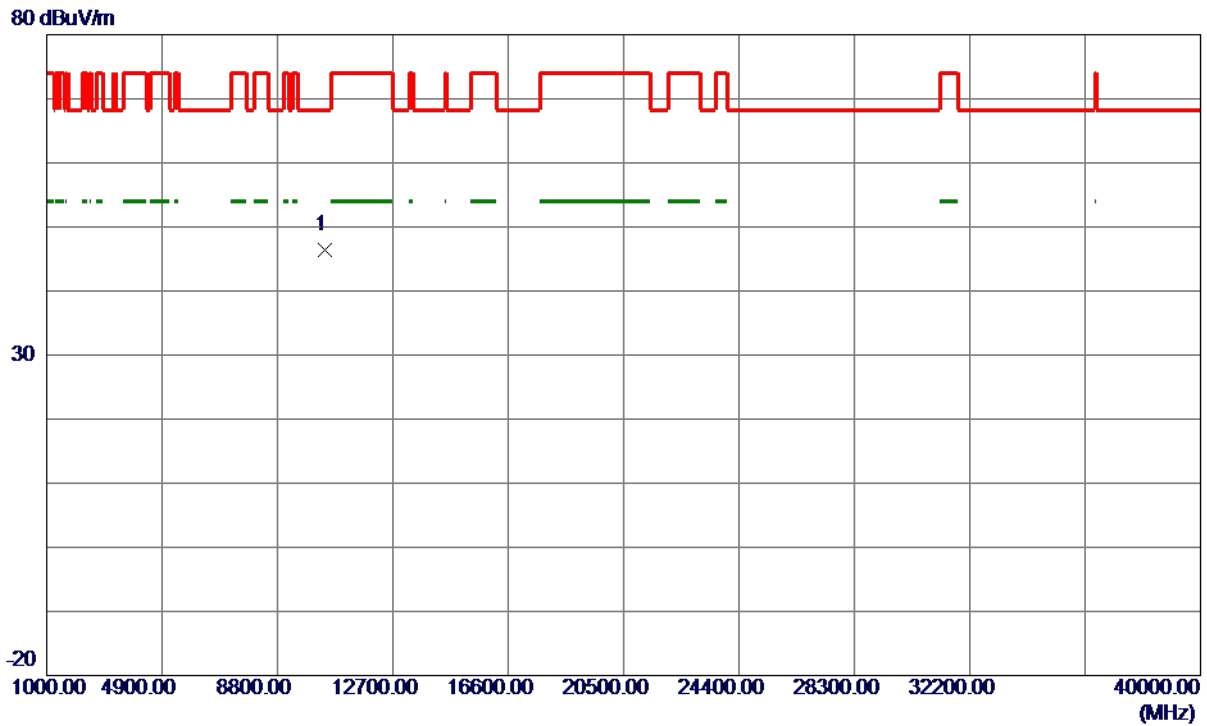

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10395.5800   | 35.10                      | 11.36                   | 46.46                     | 68.30           | -21.84       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5240 MHz |

## Vertical

130 dBuV/m

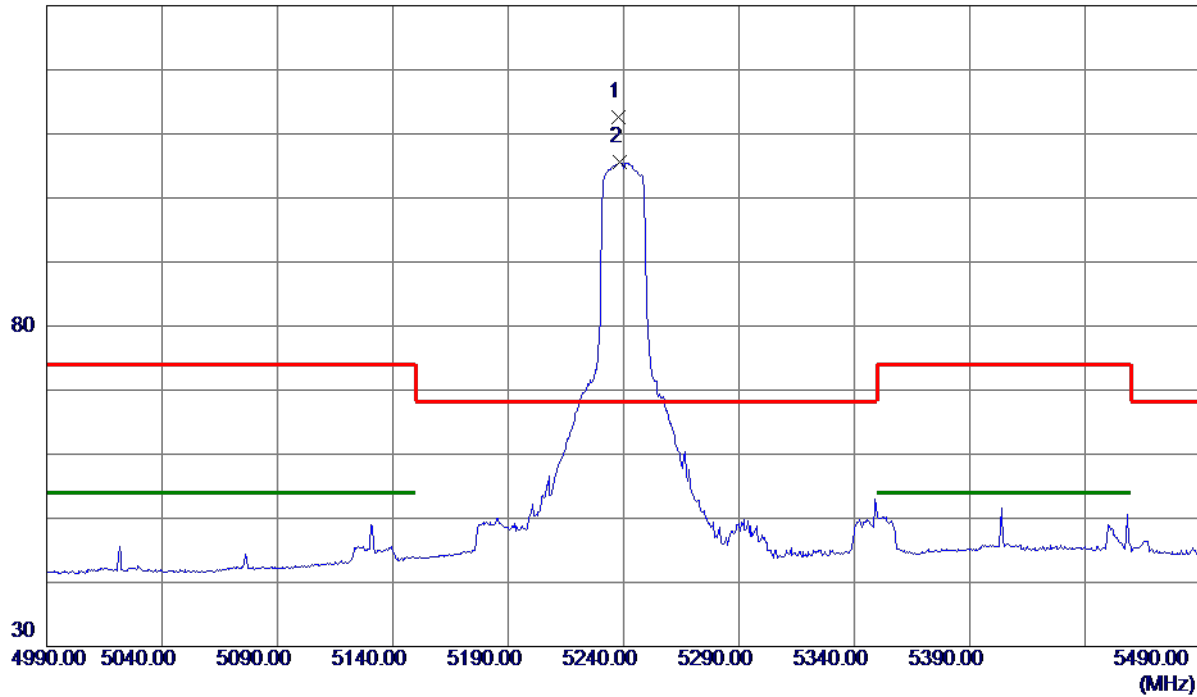

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5237.7500    | 98.13                      | 14.52                   | 112.65                    | 68.30           | 44.35        | Peak     | No Limit |
| 2   | 5238.2500    | 91.07                      | 14.52                   | 105.59                    | 999.00          | -893.41      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5240 MHz |

## Vertical

80 dBuV/m

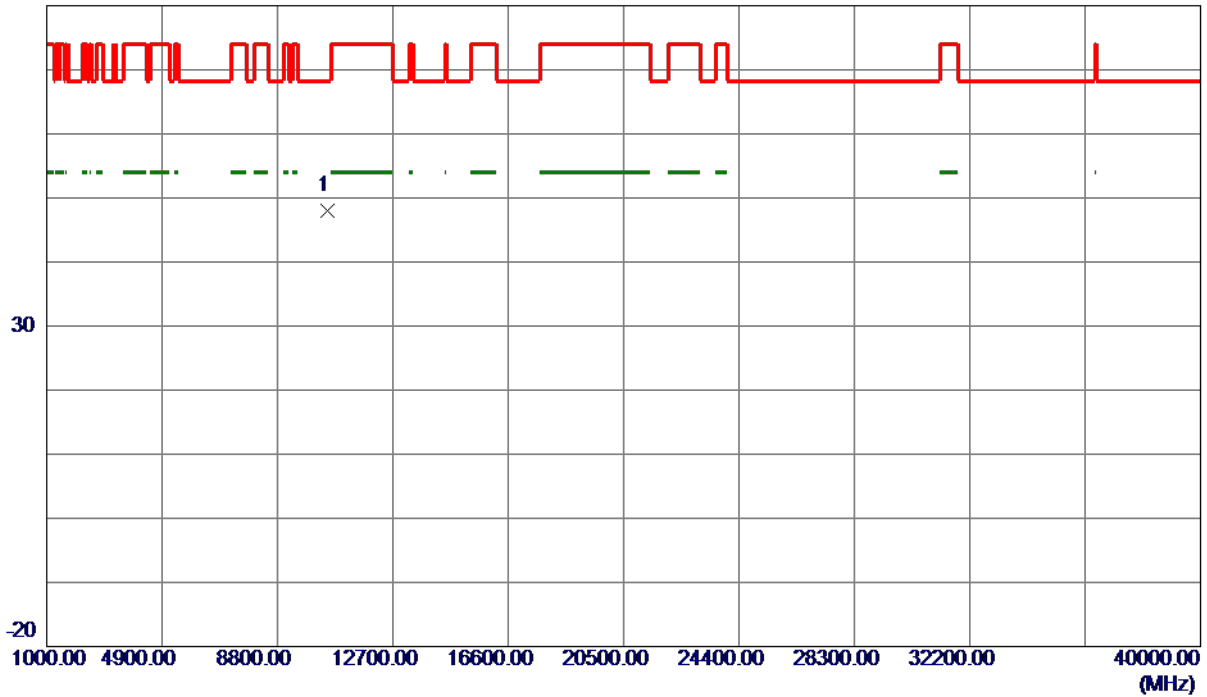

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10478.6250   | 36.46                      | 11.50                   | 47.96                     | 68.30           | -20.34       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5240 MHz |

## Horizontal

130 dBuV/m

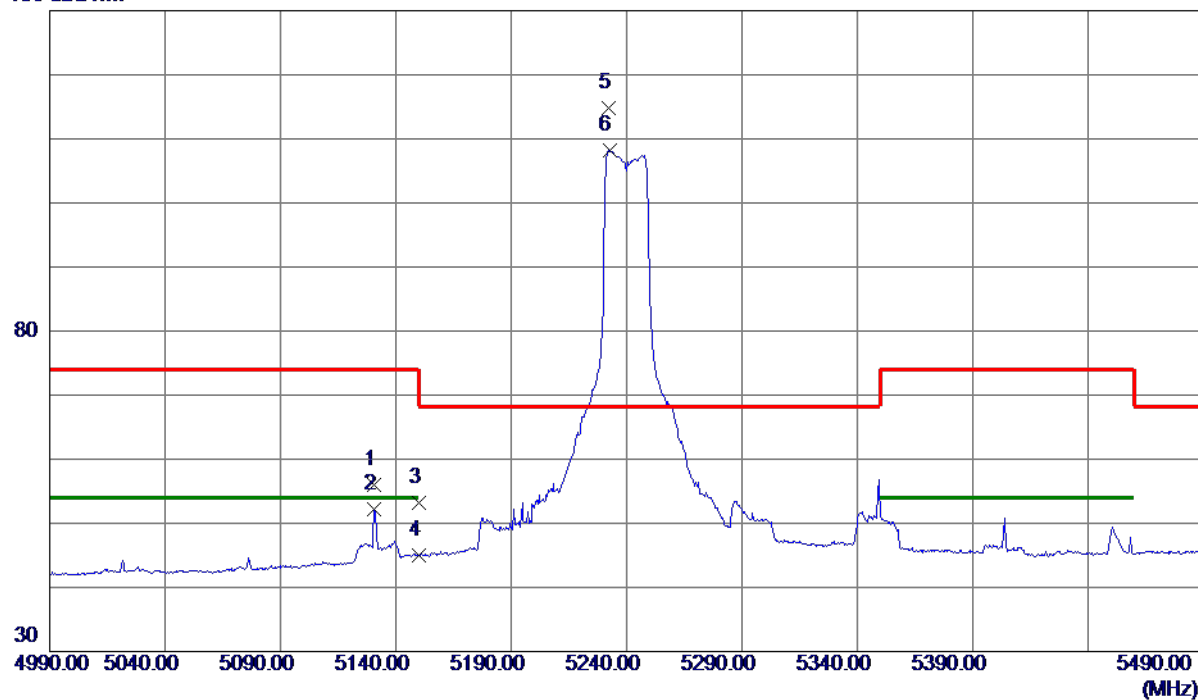

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5130.7500    | 41.74                      | 14.27                   | 56.01                     | 74.00           | -17.99       | Peak     |          |
| 2   | 5130.7500    | 37.94                      | 14.27                   | 52.21                     | 54.00           | -1.79        | AVG      |          |
| 3   | 5150.0000    | 38.79                      | 14.32                   | 53.11                     | 74.00           | -20.89       | Peak     |          |
| 4   | 5150.0000    | 30.61                      | 14.32                   | 44.93                     | 54.00           | -9.07        | AVG      |          |
| 5 * | 5232.0000    | 100.22                     | 14.51                   | 114.73                    | 68.30           | 46.43        | Peak     | No Limit |
| 6   | 5232.5000    | 93.64                      | 14.51                   | 108.15                    | 999.00          | -890.85      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5240 MHz |

## Horizontal

80 dBuV/m

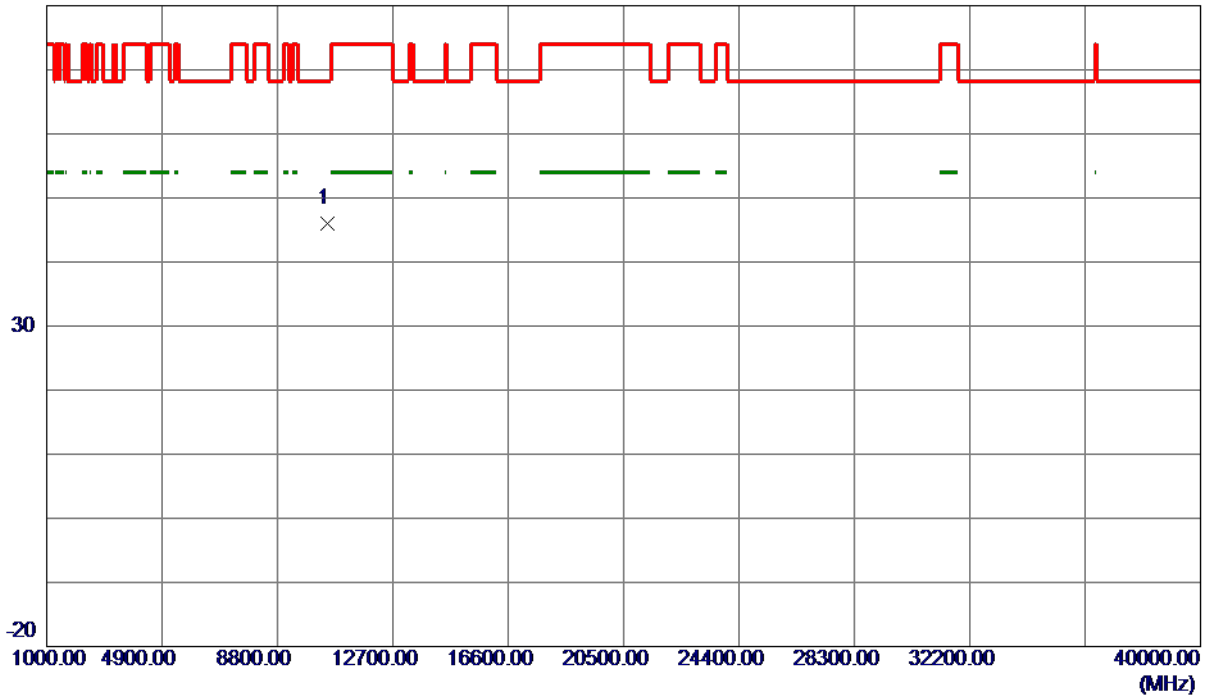

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10485.4700   | 34.52                      | 11.51                   | 46.03                     | 68.30           | -22.27       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5190 MHz |

## Vertical

130 dBuV/m

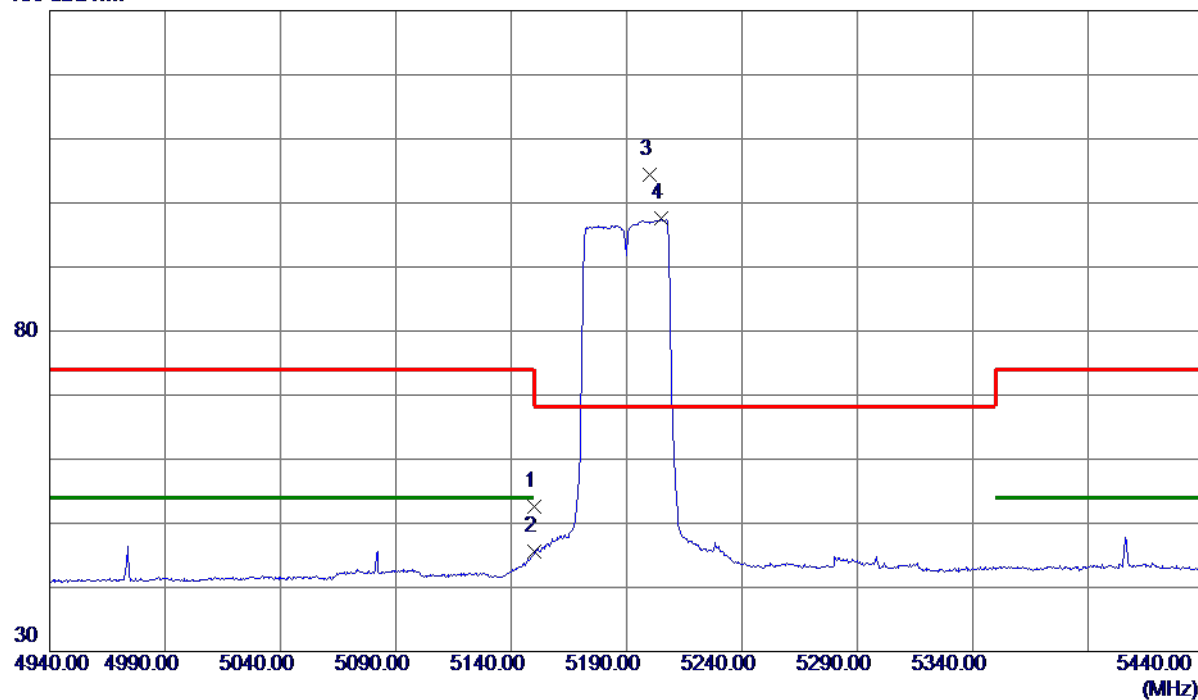

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 38.22                      | 14.32                   | 52.54                     | 74.00           | -21.46       | Peak     |          |
| 2   | 5150.0000    | 31.19                      | 14.32                   | 45.51                     | 54.00           | -8.49        | AVG      |          |
| 3 * | 5200.0000    | 89.88                      | 14.43                   | 104.31                    | 68.30           | 36.01        | Peak     | No Limit |
| 4   | 5205.0000    | 83.07                      | 14.45                   | 97.52                     | 999.00          | -901.48      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5190 MHz |

## Vertical

80 dBuV/m

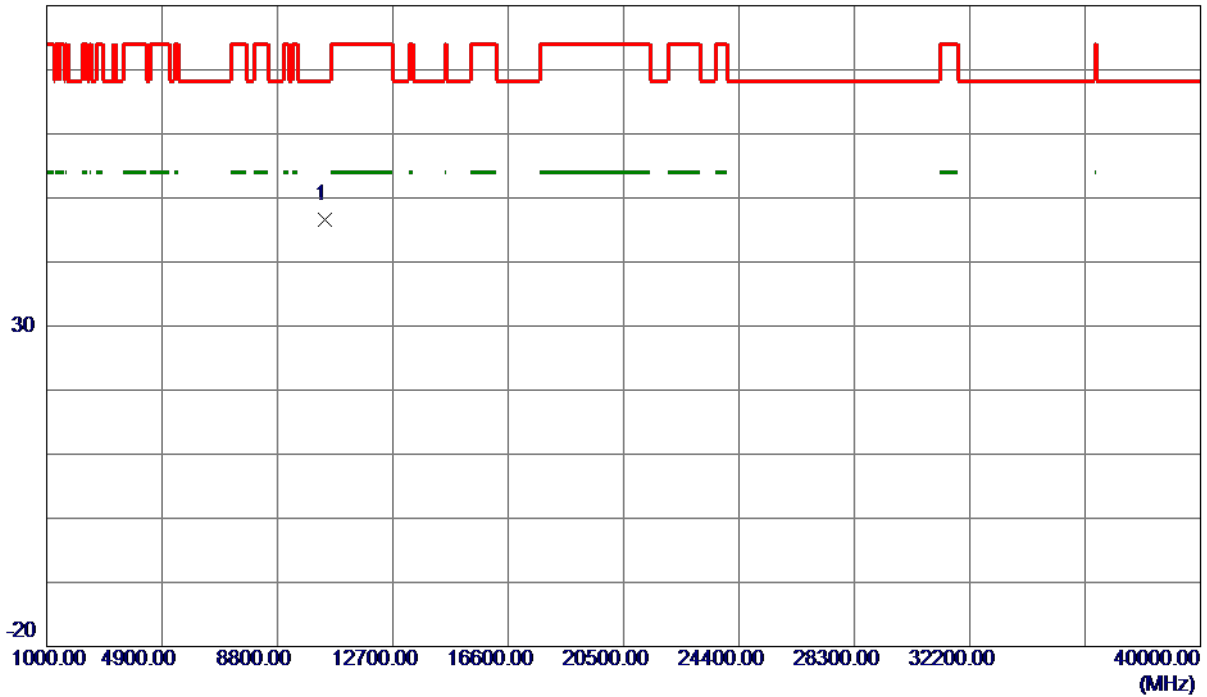

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10396.8750   | 35.23                      | 11.36                   | 46.59                     | 68.30           | -21.71       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5190 MHz |

## Horizontal

130 dBuV/m

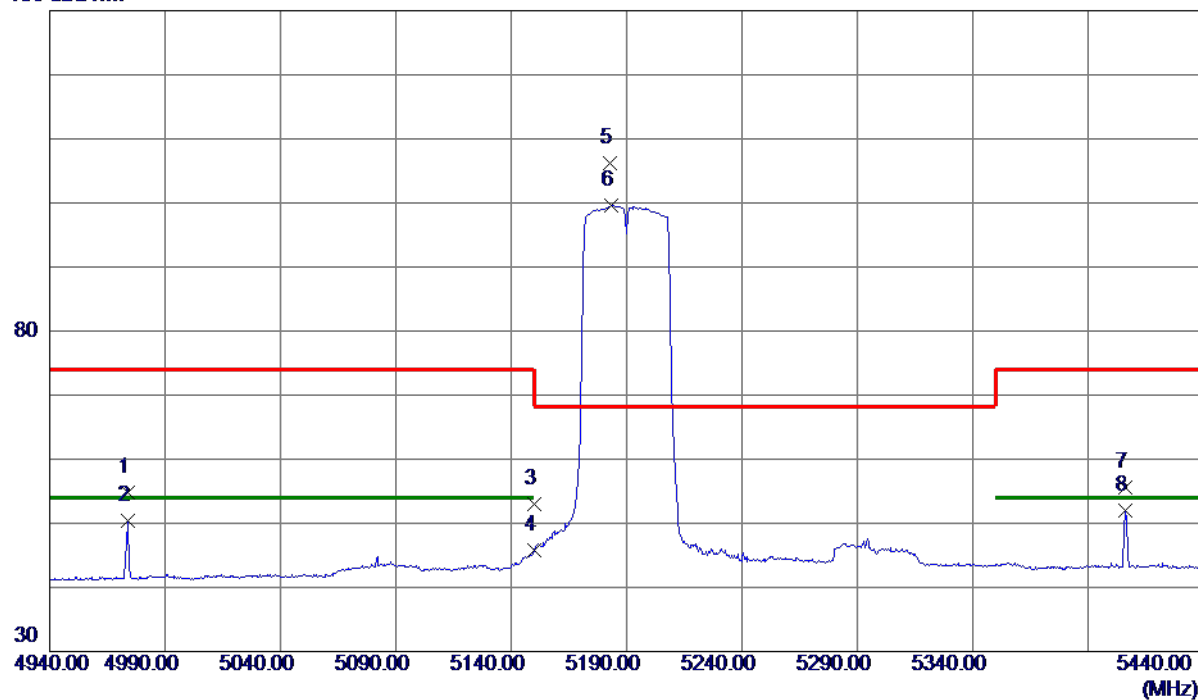

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 4973.7500    | 40.85                      | 13.88                   | 54.73                     | 74.00           | -19.27       | Peak     |          |
| 2   | 4973.7500    | 36.51                      | 13.88                   | 50.39                     | 54.00           | -3.61        | AVG      |          |
| 3   | 5150.0000    | 38.62                      | 14.32                   | 52.94                     | 74.00           | -21.06       | Peak     |          |
| 4   | 5150.0000    | 31.48                      | 14.32                   | 45.80                     | 54.00           | -8.20        | AVG      |          |
| 5 * | 5183.0000    | 91.89                      | 14.39                   | 106.28                    | 68.30           | 37.98        | Peak     | No Limit |
| 6   | 5183.5000    | 85.18                      | 14.39                   | 99.57                     | 999.00          | -899.43      | AVG      | No Limit |
| 7   | 5406.2500    | 40.72                      | 14.92                   | 55.64                     | 74.00           | -18.36       | Peak     |          |
| 8   | 5406.2500    | 37.16                      | 14.92                   | 52.08                     | 54.00           | -1.92        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5190 MHz |

## Horizontal

80 dBuV/m

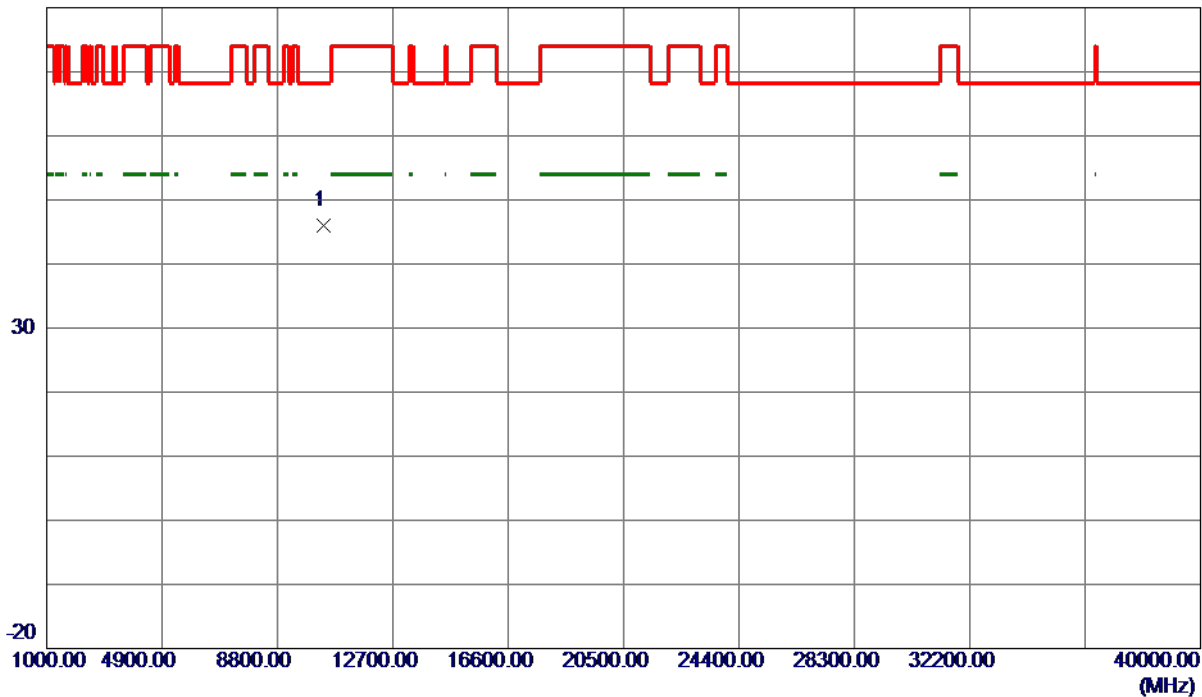

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10379.3000   | 34.68                      | 11.33                   | 46.01                     | 68.30           | -22.29       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5230 MHz |

## Vertical

130 dBuV/m

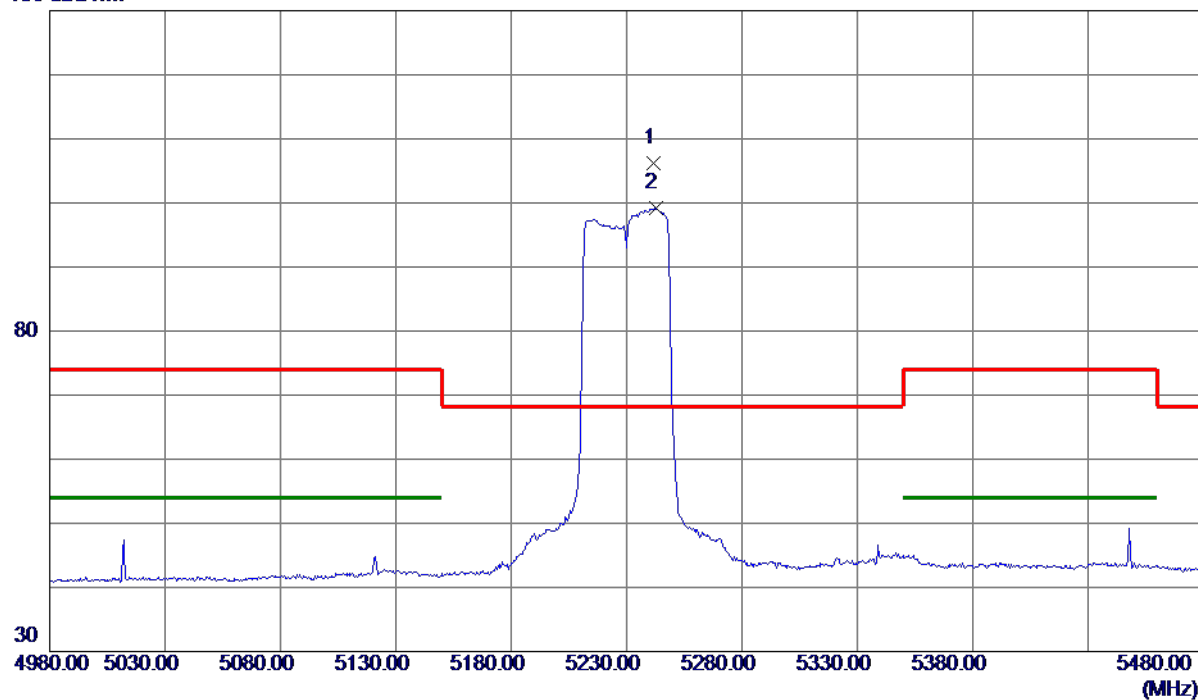

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5241.5000    | 91.70                      | 14.53                   | 106.23                    | 68.30           | 37.93        | Peak     | No Limit |
| 2   | 5242.5000    | 84.61                      | 14.53                   | 99.14                     | 999.00          | -899.86      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5230 MHz |

## Vertical

80 dBuV/m

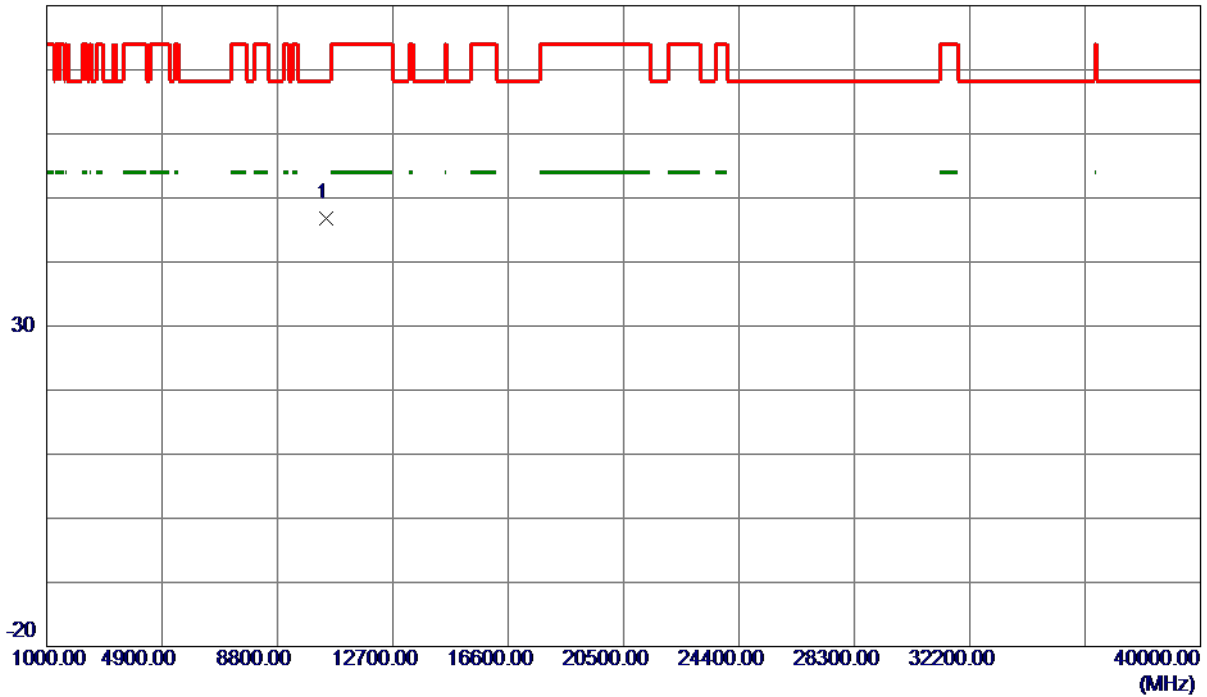

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10464.0900   | 35.35                      | 11.47                   | 46.82                     | 68.30           | -21.48       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5230 MHz |

## Horizontal

130 dBuV/m

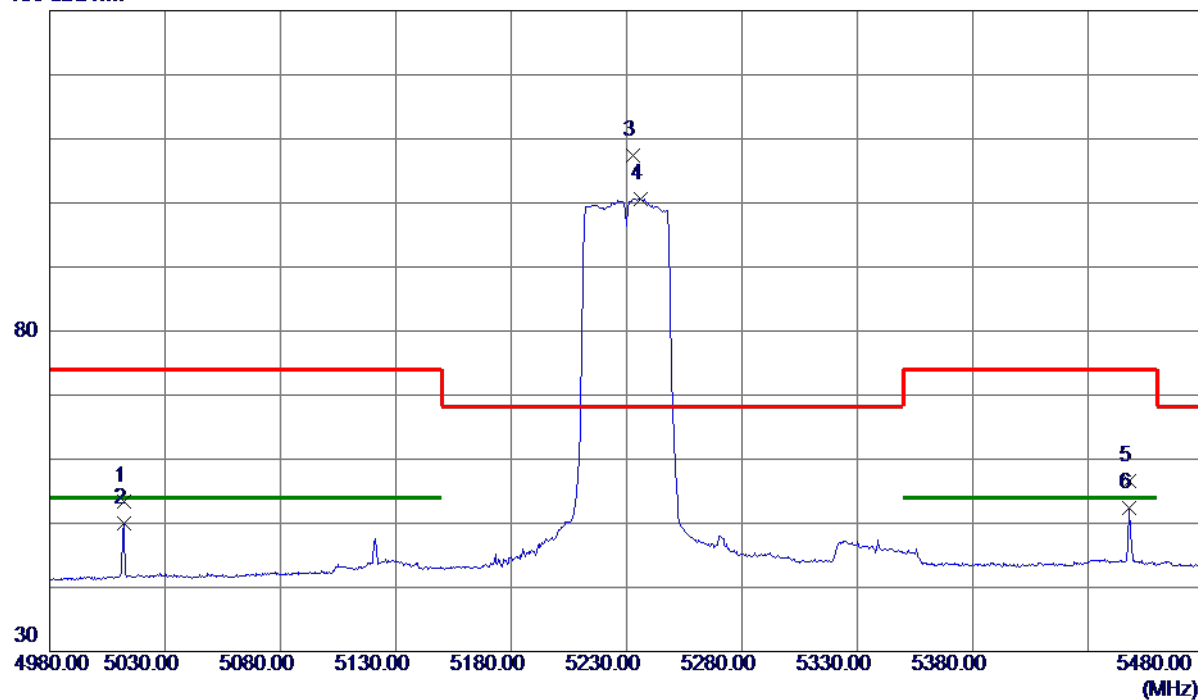

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5012.2500    | 39.37                      | 13.99                   | 53.36                     | 74.00           | -20.64       | Peak     |          |
| 2   | 5012.2500    | 36.09                      | 13.99                   | 50.08                     | 54.00           | -3.92        | AVG      |          |
| 3 * | 5232.7500    | 92.90                      | 14.51                   | 107.41                    | 68.30           | 39.11        | Peak     | No Limit |
| 4   | 5236.2500    | 86.09                      | 14.52                   | 100.61                    | 999.00          | -898.39      | AVG      | No Limit |
| 5   | 5448.0000    | 41.59                      | 15.02                   | 56.61                     | 74.00           | -17.39       | Peak     |          |
| 6   | 5448.0000    | 37.39                      | 15.02                   | 52.41                     | 54.00           | -1.59        | AVG      |          |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5230 MHz |

### Horizontal

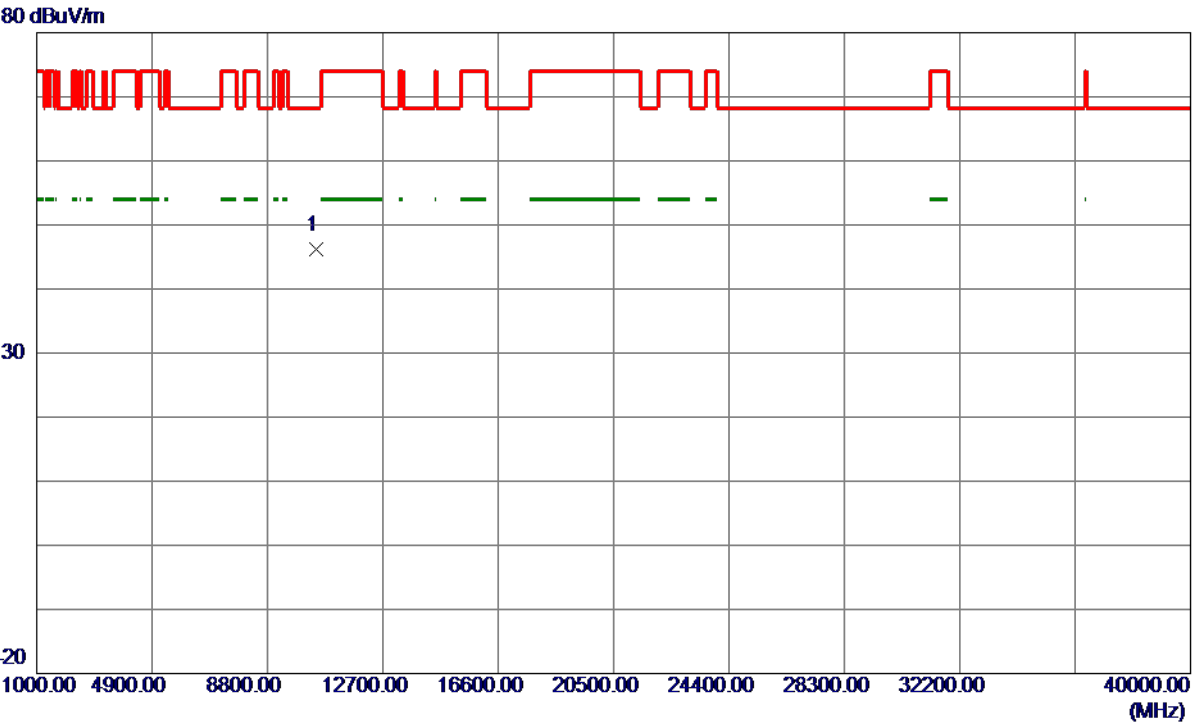


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10465.6000   | 34.62                      | 11.48                   | 46.10                     | 68.30           | -22.20       | Peak     |         |

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5260 MHz |

## Vertical

130 dBuV/m

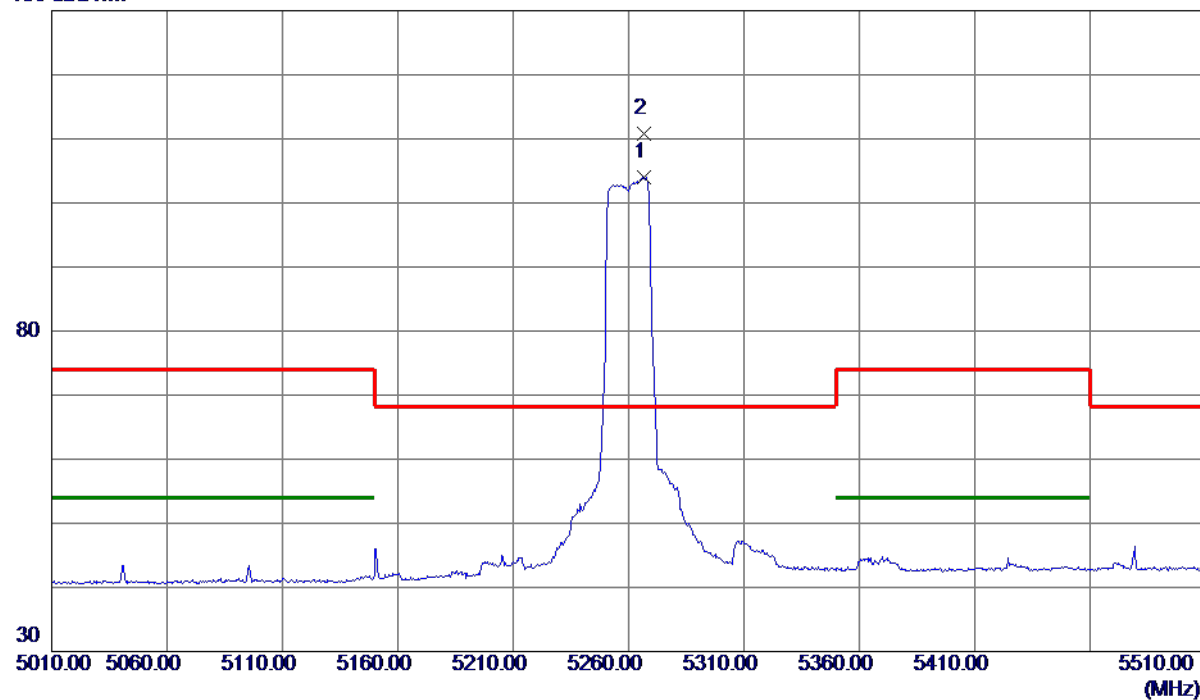

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5266.5000    | 89.42                      | 14.59                   | 104.01                    | 999.00          | -894.99      | AVG      | No Limit |
| 2 * | 5266.7500    | 96.27                      | 14.59                   | 110.86                    | 68.30           | 42.56        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5260 MHz |

## Vertical

80 dBuV/m

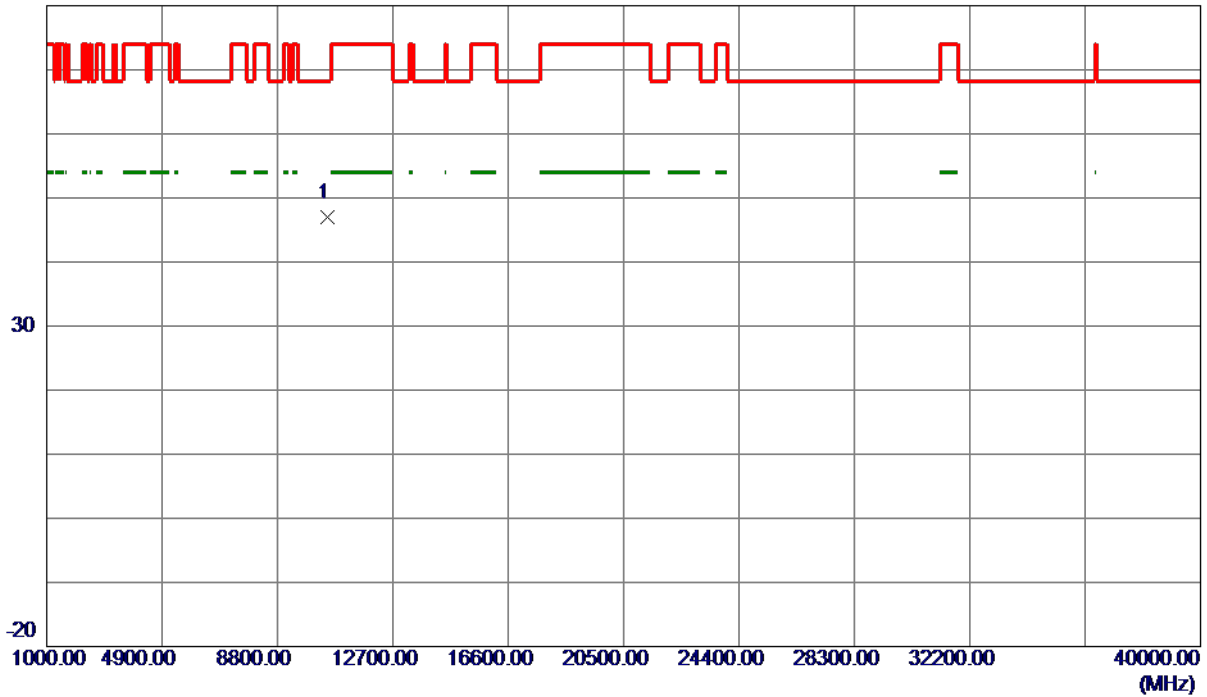

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10511.6100   | 35.36                      | 11.54                   | 46.90                     | 68.30           | -21.40       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5260 MHz |

## Horizontal

130 dBuV/m

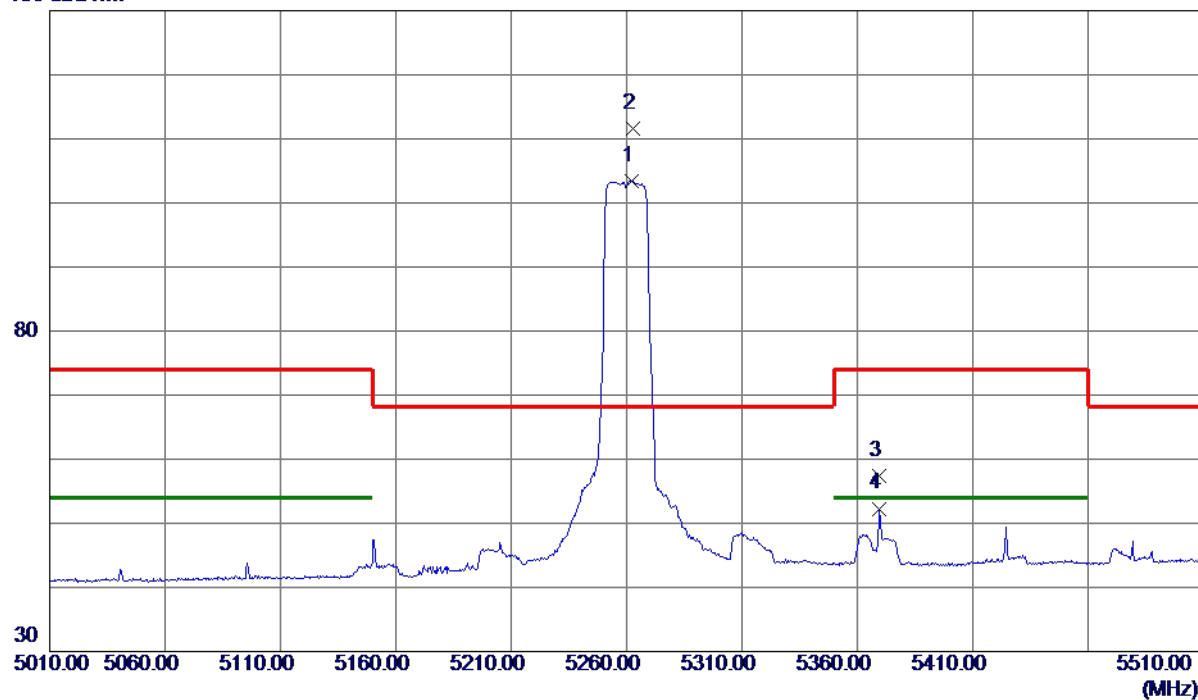

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5262.2500    | 88.81                      | 14.58                   | 103.39                    | 999.00          | -895.61      | AVG      | No Limit |
| 2 * | 5263.0000    | 96.93                      | 14.58                   | 111.51                    | 68.30           | 43.21        | Peak     | No Limit |
| 3   | 5369.5000    | 42.64                      | 14.84                   | 57.48                     | 74.00           | -16.52       | Peak     |          |
| 4   | 5369.5000    | 37.46                      | 14.84                   | 52.30                     | 54.00           | -1.70        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5260 MHz |

## Horizontal

80 dBuV/m

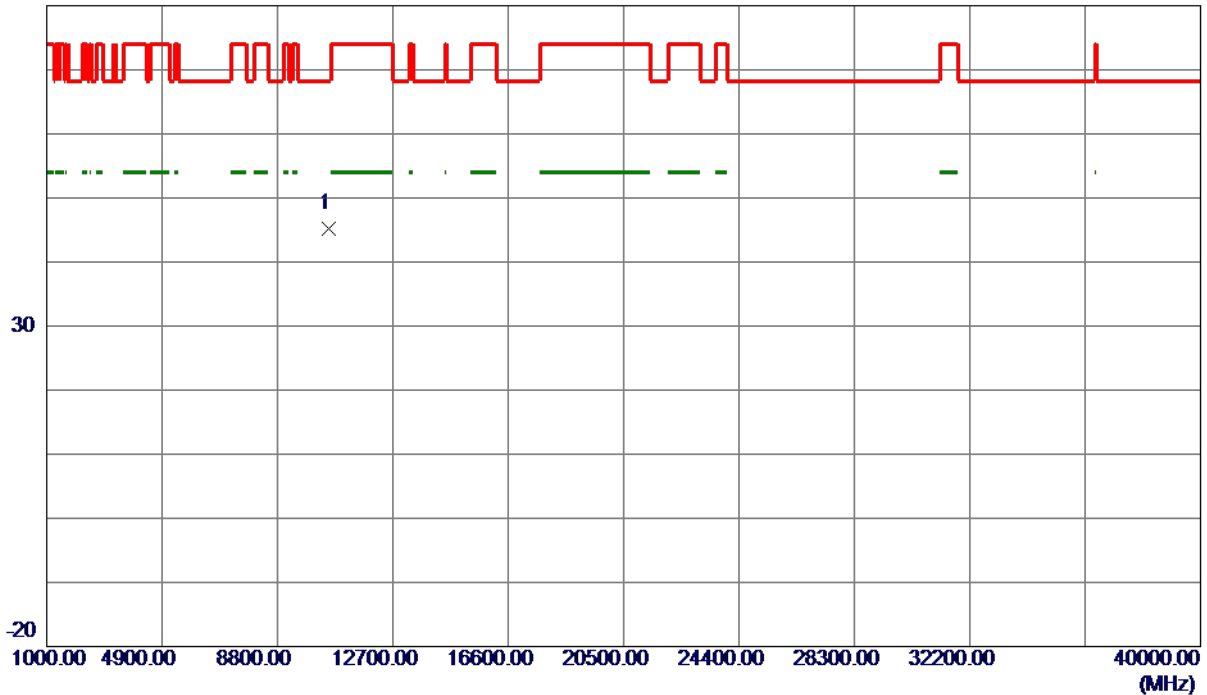

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10515.2100   | 33.57                      | 11.54                   | 45.11                     | 68.30           | -23.19       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5300 MHz |

## Vertical

130 dBuV/m

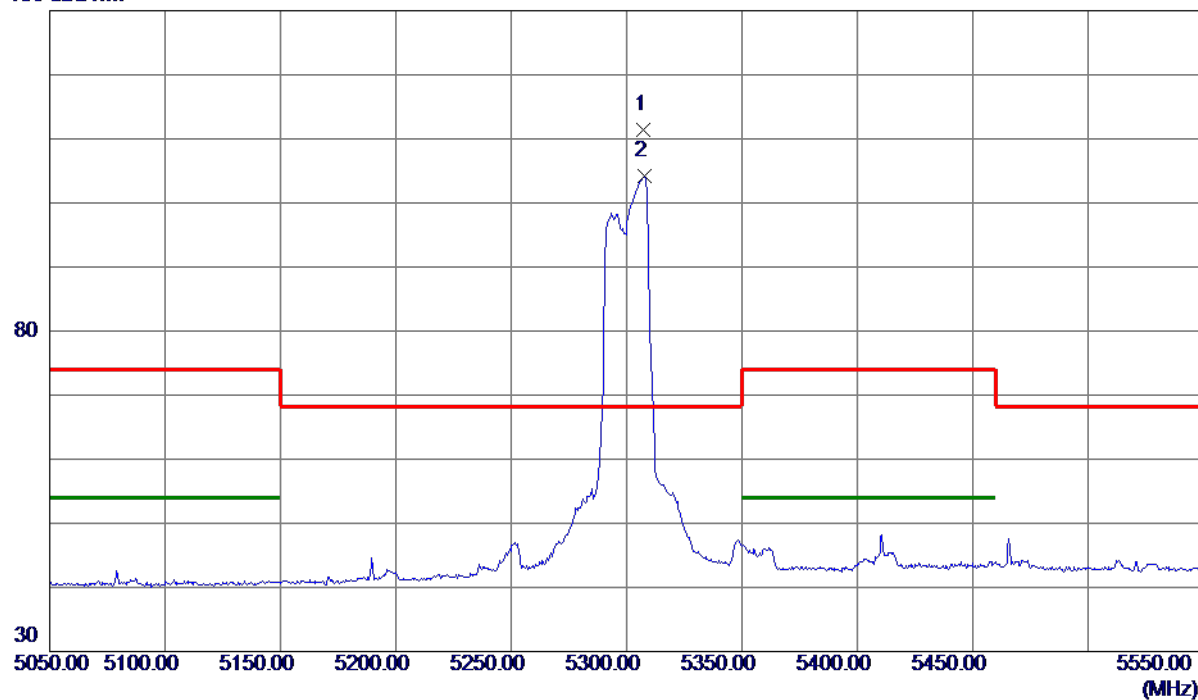

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5307.5000    | 96.73                      | 14.69                   | 111.42                    | 68.30           | 43.12        | Peak     | No Limit |
| 2   | 5307.7500    | 89.47                      | 14.69                   | 104.16                    | 999.00          | -894.84      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5300 MHz |

## Vertical

80 dBuV/m

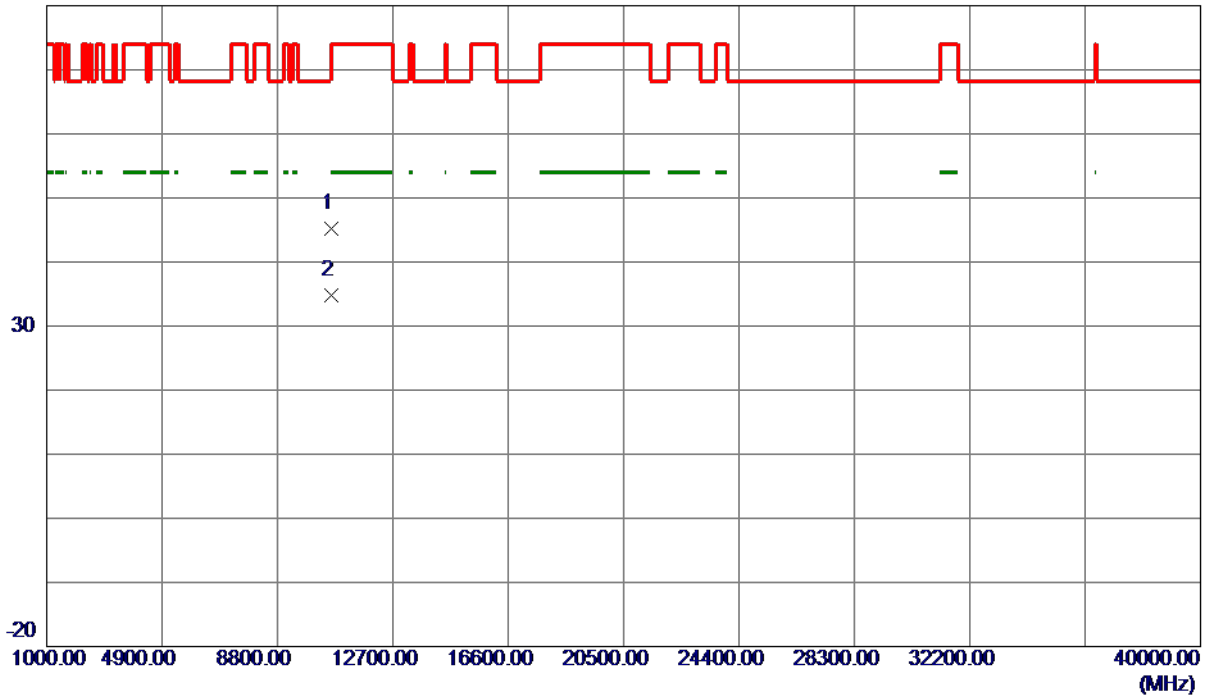

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10600.5750   | 33.68                      | 11.55                   | 45.23                     | 74.00           | -28.77       | Peak     |         |
| 2 * | 10604.3650   | 23.32                      | 11.55                   | 34.87                     | 54.00           | -19.13       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5300 MHz |

## Horizontal

130 dBuV/m

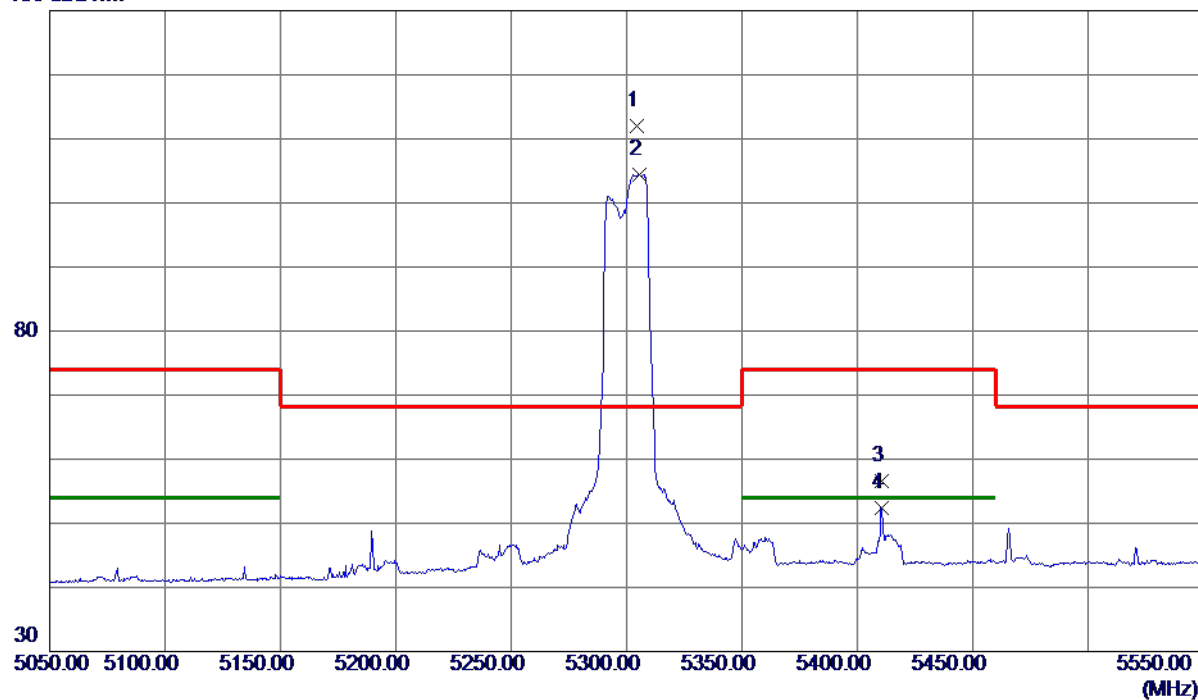

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5304.2500    | 97.27                      | 14.68                   | 111.95                    | 68.30           | 43.65        | Peak     | No Limit |
| 2   | 5305.5000    | 89.79                      | 14.68                   | 104.47                    | 999.00          | -894.53      | AVG      | No Limit |
| 3   | 5410.5000    | 41.75                      | 14.93                   | 56.68                     | 74.00           | -17.32       | Peak     |          |
| 4   | 5410.5000    | 37.56                      | 14.93                   | 52.49                     | 54.00           | -1.51        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5300 MHz |

## Horizontal

80 dBuV/m

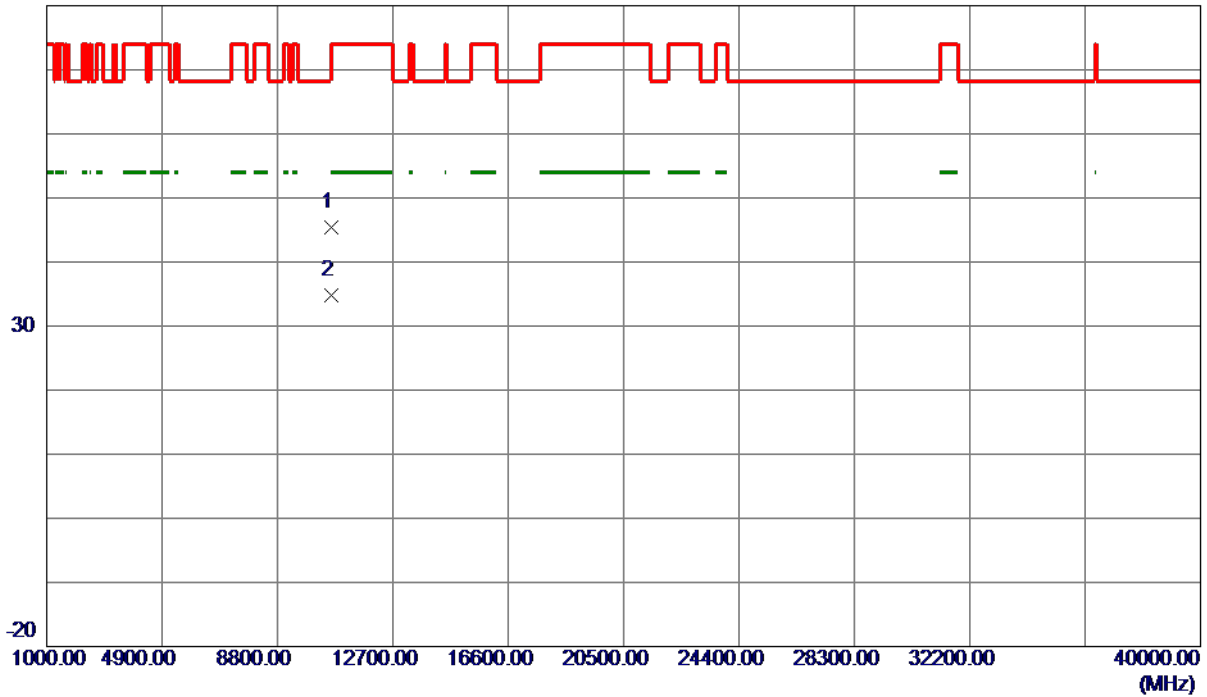

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10600.7950   | 33.83                      | 11.55                   | 45.38                     | 74.00           | -28.62       | Peak     |         |
| 2 * | 10603.7900   | 23.31                      | 11.55                   | 34.86                     | 54.00           | -19.14       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5320 MHz |

## Vertical

130 dBuV/m

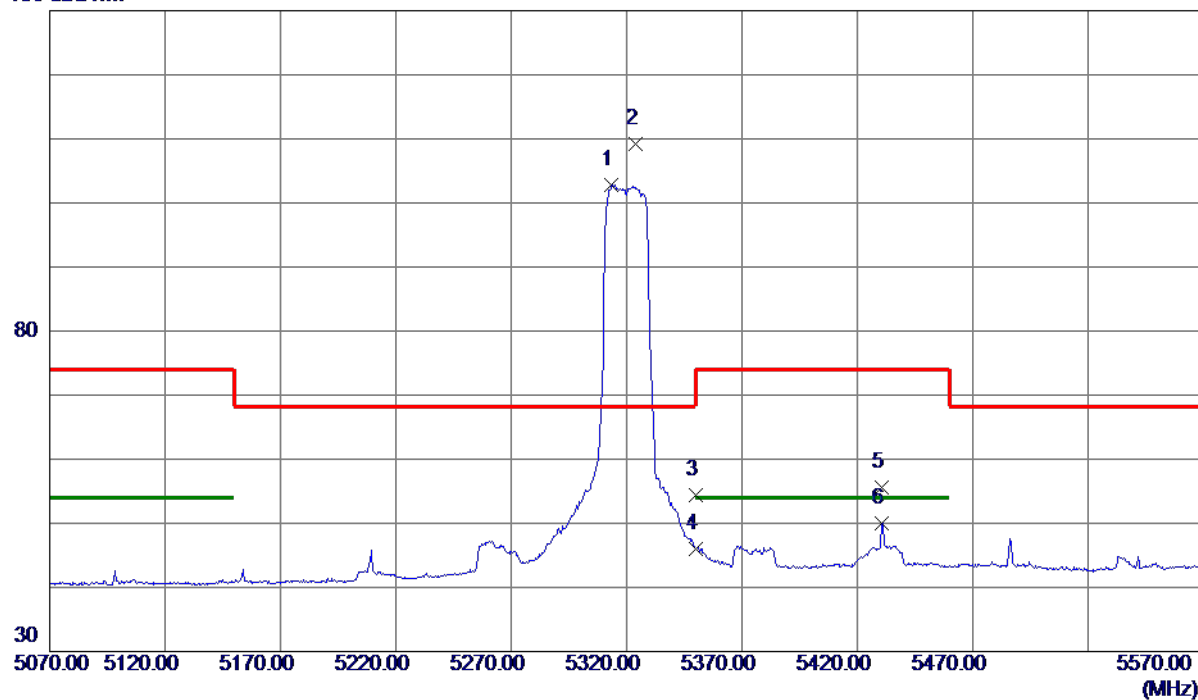

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5313.5000    | 88.11                      | 14.70                   | 102.81                    | 999.00          | -896.19      | AVG      | No Limit |
| 2 * | 5323.7500    | 94.46                      | 14.73                   | 109.19                    | 68.30           | 40.89        | Peak     | No Limit |
| 3   | 5350.0000    | 39.60                      | 14.79                   | 54.39                     | 74.00           | -19.61       | Peak     |          |
| 4   | 5350.0000    | 31.30                      | 14.79                   | 46.09                     | 54.00           | -7.91        | AVG      |          |
| 5   | 5430.7500    | 40.70                      | 14.98                   | 55.68                     | 74.00           | -18.32       | Peak     |          |
| 6   | 5430.7500    | 35.10                      | 14.98                   | 50.08                     | 54.00           | -3.92        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5320 MHz |

## Vertical

80 dBuV/m

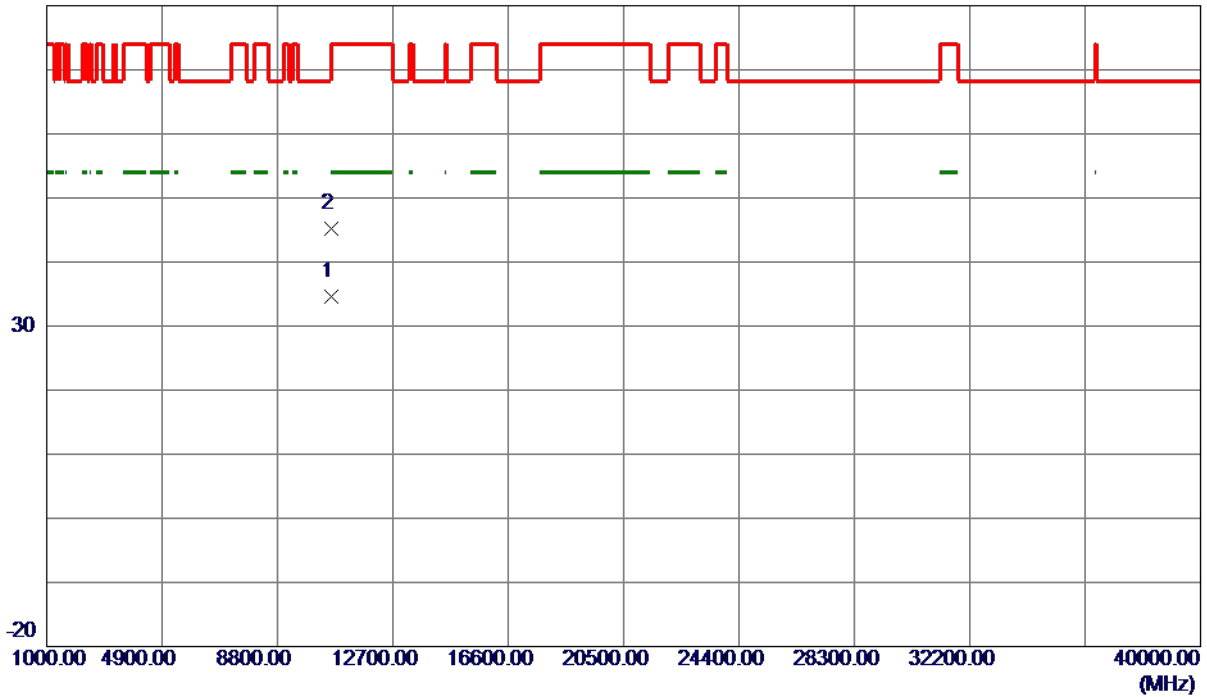

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10636.1650   | 23.03                      | 11.56                   | 34.59                     | 54.00           | -19.41       | AVG      |         |
| 2   | 10636.3200   | 33.69                      | 11.56                   | 45.25                     | 74.00           | -28.75       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5320 MHz |

## Horizontal

130 dBuV/m

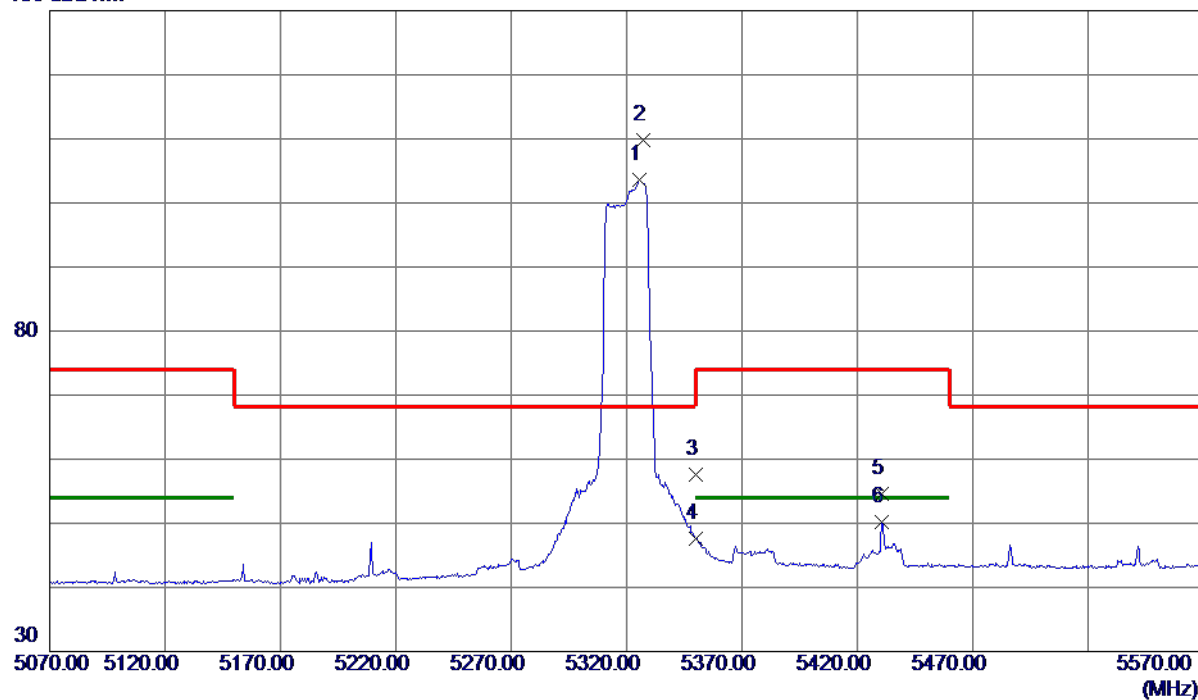

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5325.7500    | 88.93                      | 14.73                   | 103.66                    | 999.00          | -895.34      | AVG      | No Limit |
| 2 * | 5327.0000    | 95.10                      | 14.74                   | 109.84                    | 68.30           | 41.54        | Peak     | No Limit |
| 3   | 5350.0000    | 42.87                      | 14.79                   | 57.66                     | 74.00           | -16.34       | Peak     |          |
| 4   | 5350.0000    | 32.86                      | 14.79                   | 47.65                     | 54.00           | -6.35        | AVG      |          |
| 5   | 5430.7500    | 39.56                      | 14.98                   | 54.54                     | 74.00           | -19.46       | Peak     |          |
| 6   | 5430.7500    | 35.30                      | 14.98                   | 50.28                     | 54.00           | -3.72        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT20) Mode 5320 MHz |

## Horizontal

80 dBuV/m

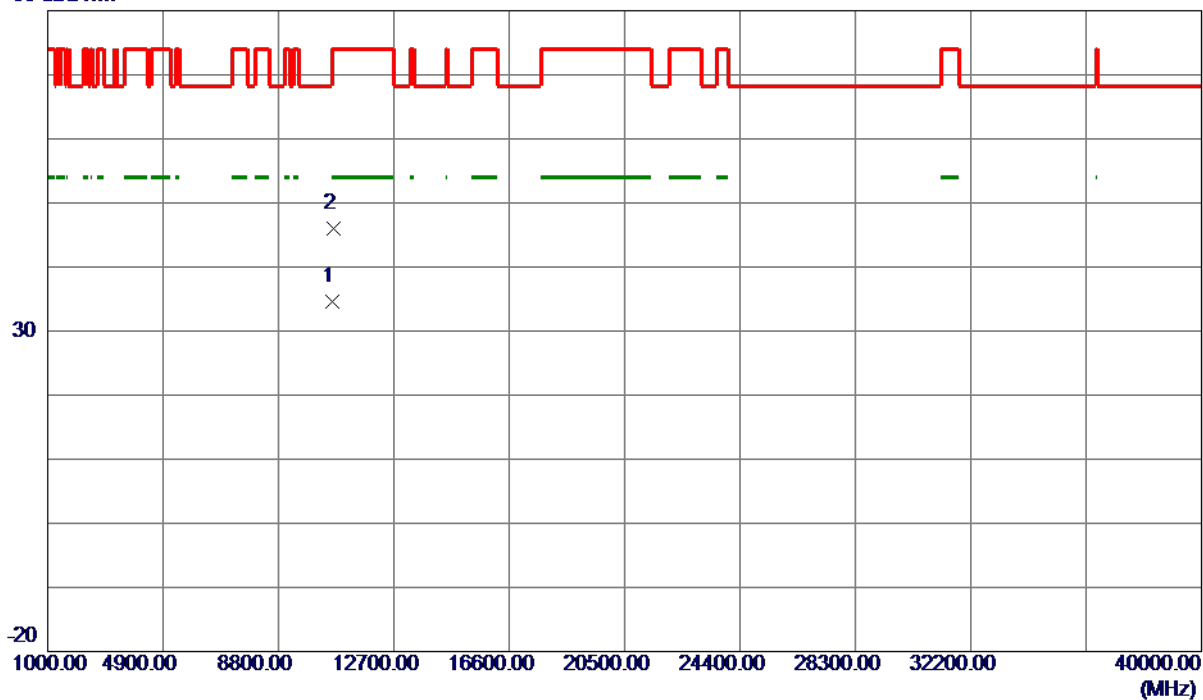

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10637.0599   | 23.13                      | 11.56                   | 34.69                     | 54.00           | -19.31       | AVG      |         |
| 2   | 10642.8800   | 34.39                      | 11.56                   | 45.95                     | 74.00           | -28.05       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT40) Mode 5270 MHz |

## Vertical

130 dBuV/m

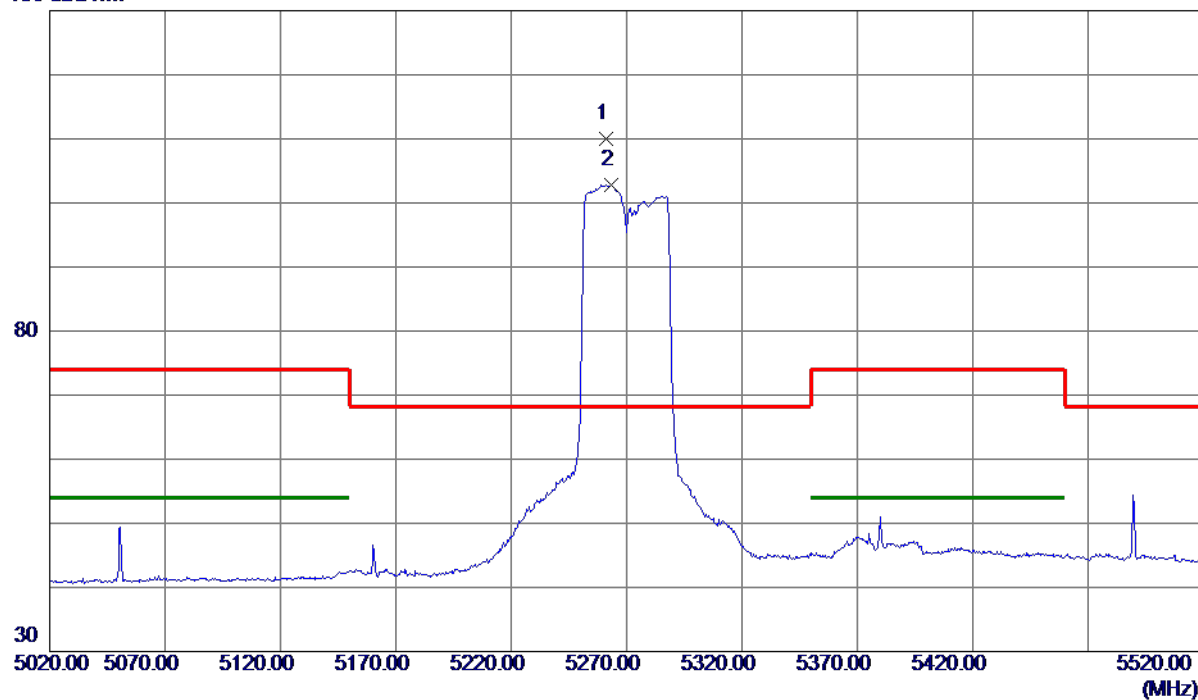

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5261.2500    | 95.33                      | 14.58                   | 109.91                    | 68.30           | 41.61        | Peak     | No Limit |
| 2   | 5263.2500    | 88.23                      | 14.58                   | 102.81                    | 999.00          | -896.19      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT40) Mode 5270 MHz |

## Vertical

80 dBuV/m

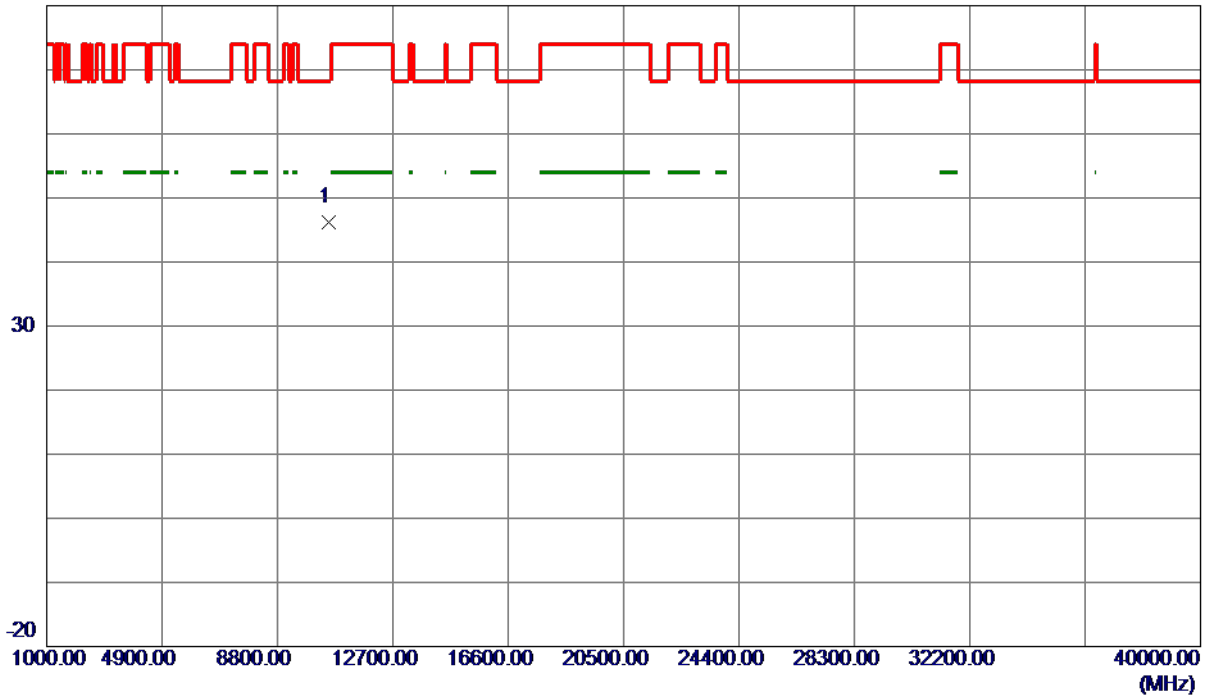

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10540.5500   | 34.73                      | 11.54                   | 46.27                     | 68.30           | -22.03       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT40) Mode 5270 MHz |

## Horizontal

130 dBuV/m

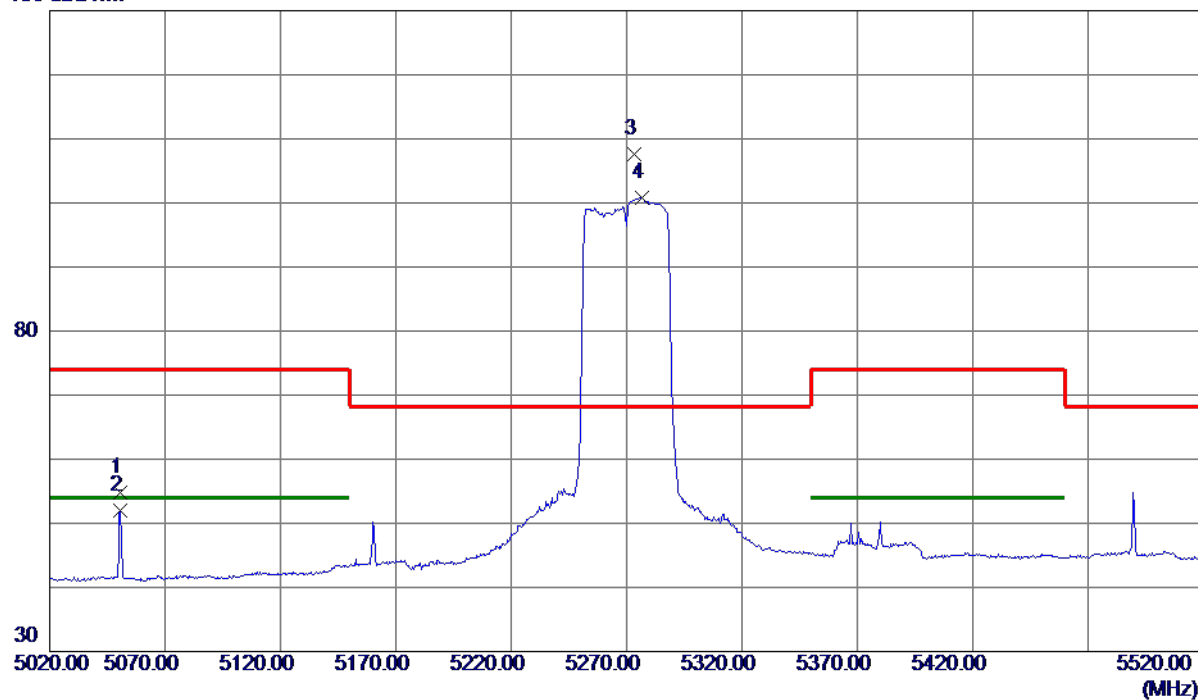

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5050.5000    | 40.75                      | 14.08                   | 54.83                     | 74.00           | -19.17       | Peak     |          |
| 2   | 5050.5000    | 37.88                      | 14.08                   | 51.96                     | 54.00           | -2.04        | AVG      |          |
| 3 * | 5273.2500    | 93.08                      | 14.61                   | 107.69                    | 68.30           | 39.39        | Peak     | No Limit |
| 4   | 5276.5000    | 86.10                      | 14.62                   | 100.72                    | 999.00          | -898.28      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT40) Mode 5270 MHz |

## Horizontal

80 dBuV/m

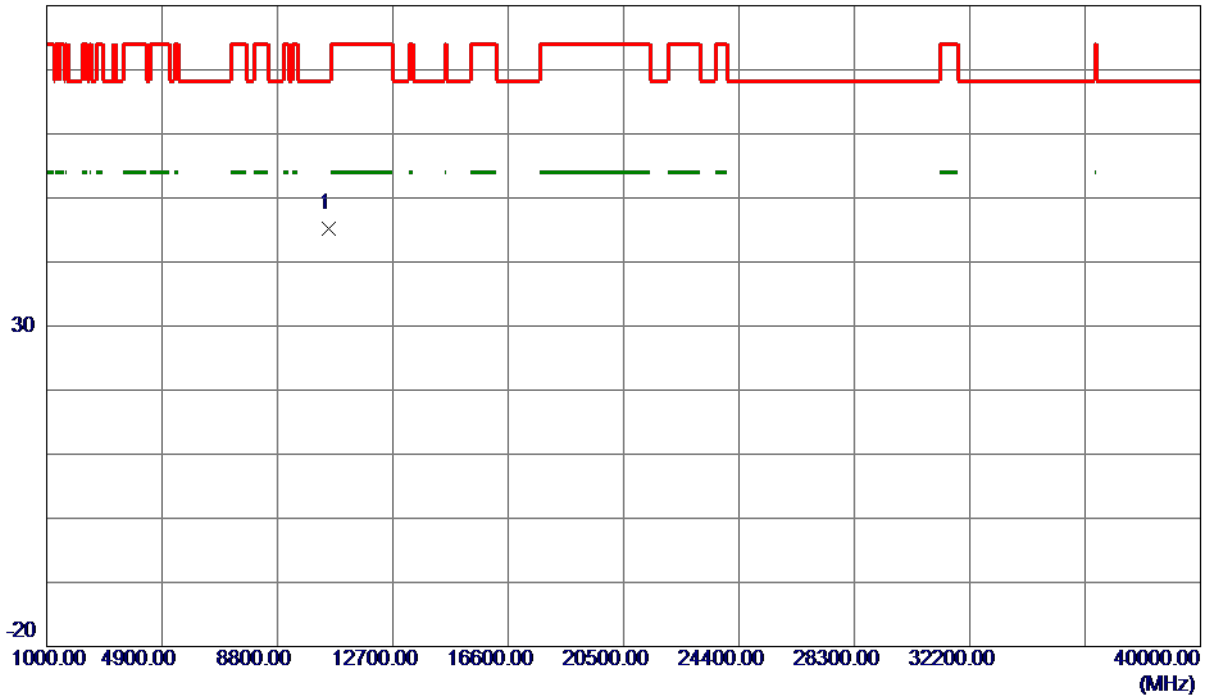

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10537.7950   | 33.73                      | 11.54                   | 45.27                     | 68.30           | -23.03       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT40) Mode 5310 MHz |

## Vertical

130 dBuV/m

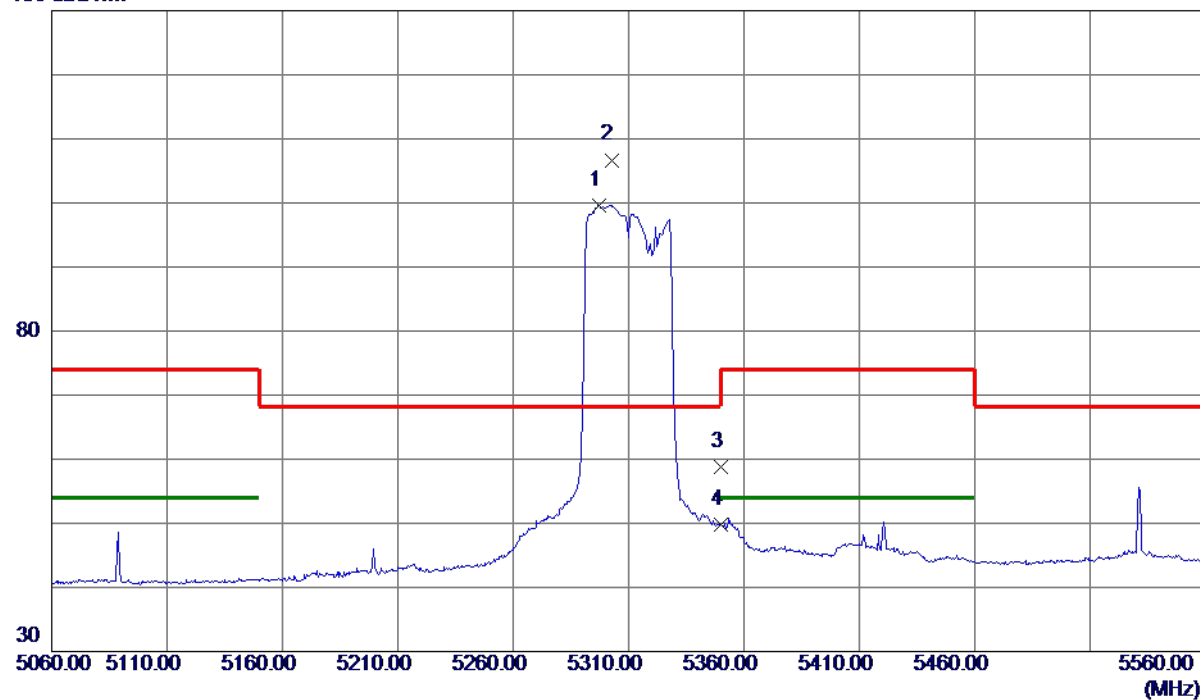

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5297.0000    | 84.97                      | 14.66                   | 99.63                     | 999.00          | -899.37      | AVG      | No Limit |
| 2 * | 5302.5000    | 92.02                      | 14.68                   | 106.70                    | 68.30           | 38.40        | Peak     | No Limit |
| 3   | 5350.0000    | 44.10                      | 14.79                   | 58.89                     | 74.00           | -15.11       | Peak     |          |
| 4   | 5350.0000    | 34.95                      | 14.79                   | 49.74                     | 54.00           | -4.26        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT40) Mode 5310 MHz |

## Vertical

80 dBuV/m

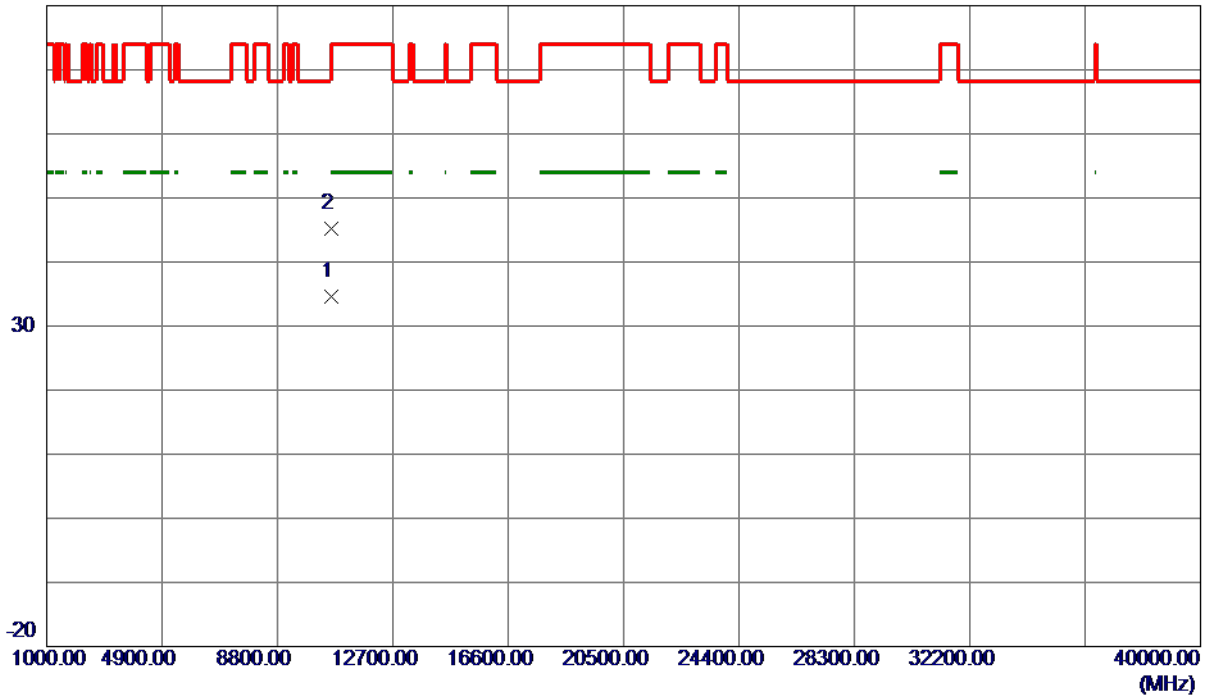

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10617.9150   | 22.97                      | 11.55                   | 34.52                     | 54.00           | -19.48       | AVG      |         |
| 2   | 10618.5800   | 33.59                      | 11.56                   | 45.15                     | 74.00           | -28.85       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT40) Mode 5310 MHz |

## Horizontal

130 dBuV/m

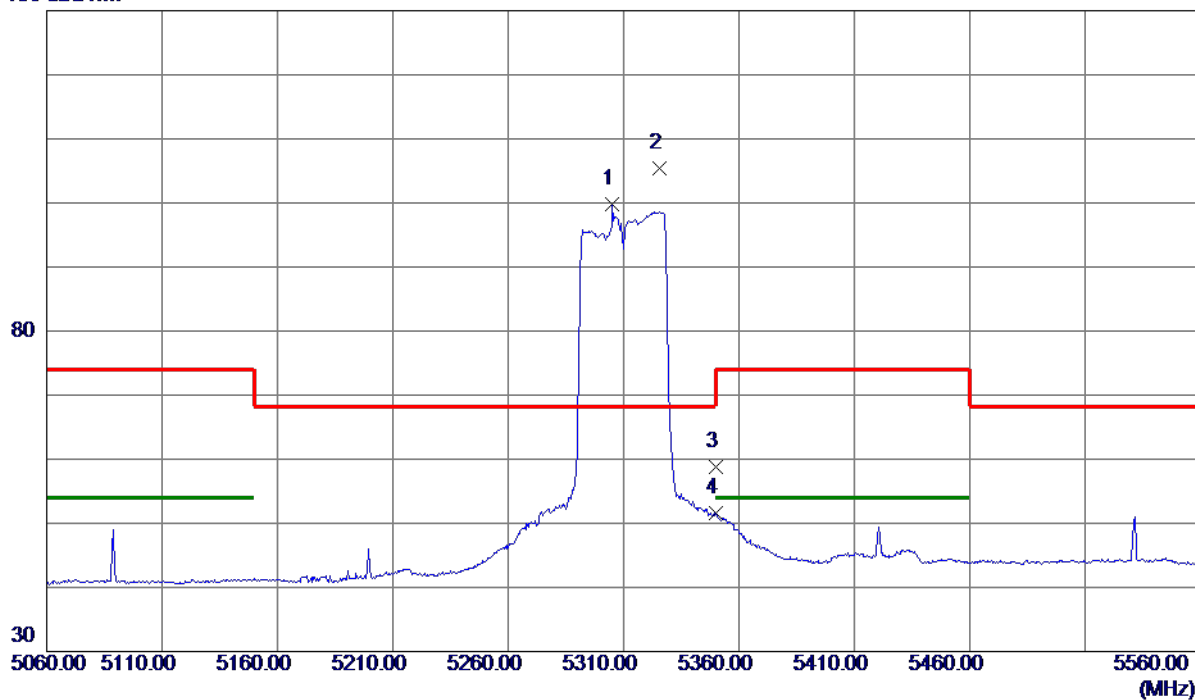

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5305.2500    | 85.08                      | 14.68                   | 99.76                     | 999.00          | -899.24      | AVG      | No Limit |
| 2 * | 5325.7500    | 90.75                      | 14.73                   | 105.48                    | 68.30           | 37.18        | Peak     | No Limit |
| 3   | 5350.0000    | 43.94                      | 14.79                   | 58.73                     | 74.00           | -15.27       | Peak     |          |
| 4   | 5350.0000    | 36.87                      | 14.79                   | 51.66                     | 54.00           | -2.34        | AVG      |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2A_TX N (HT40) Mode 5310 MHz |

## Horizontal

80 dBuV/m

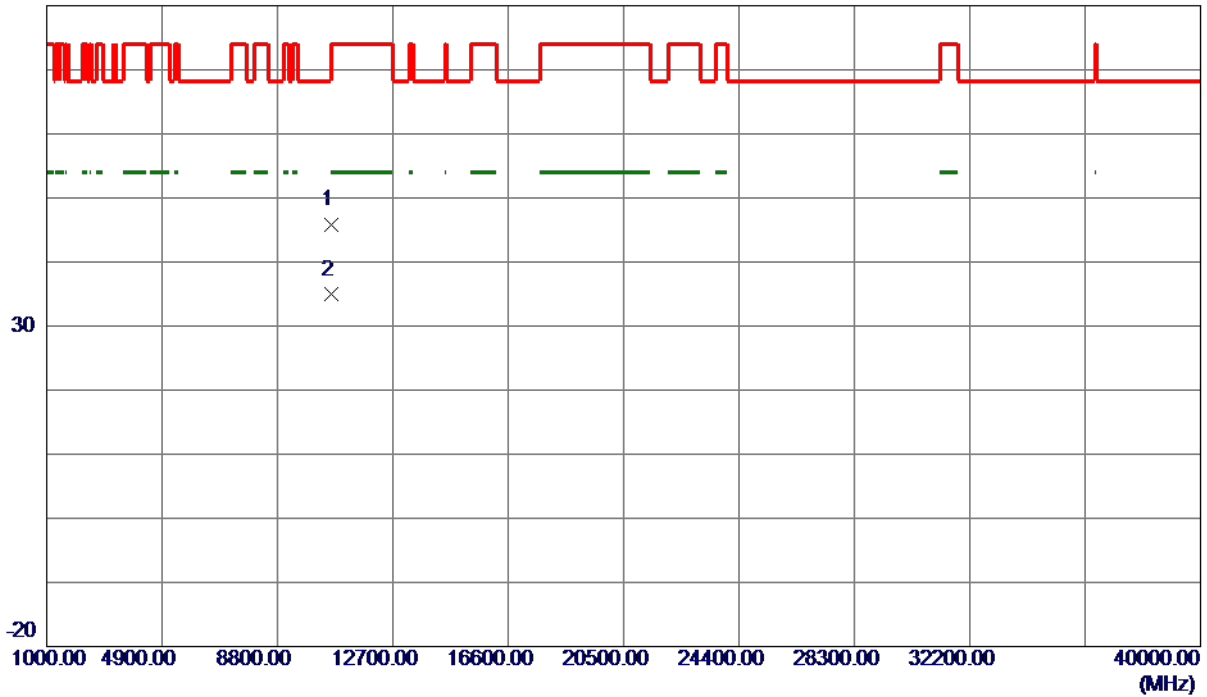

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10622.7050   | 34.21                      | 11.56                   | 45.77                     | 74.00           | -28.23       | Peak     |         |
| 2 * | 10624.5350   | 23.34                      | 11.56                   | 34.90                     | 54.00           | -19.10       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5500 MHz |

## Vertical

130 dBuV/m

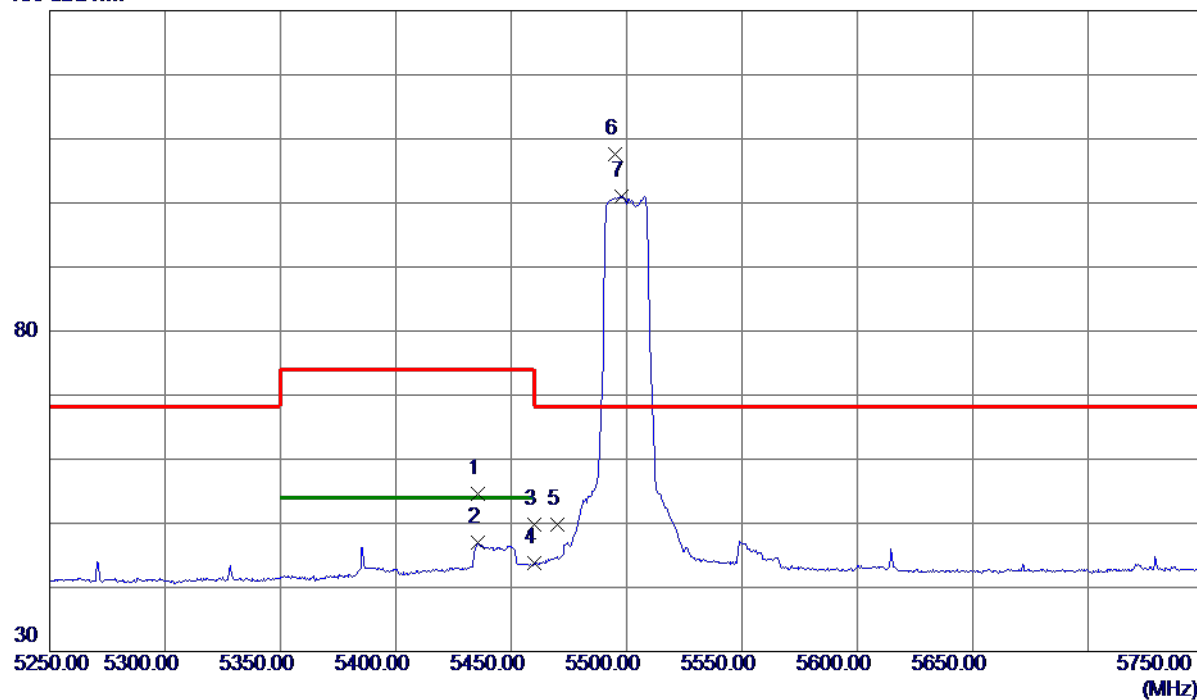

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5435.7500    | 39.55                      | 14.99                   | 54.54                     | 74.00           | -19.46       | Peak     |          |
| 2   | 5435.7500    | 32.05                      | 14.99                   | 47.04                     | 54.00           | -6.96        | AVG      |          |
| 3   | 5460.0000    | 34.70                      | 15.05                   | 49.75                     | 74.00           | -24.25       | Peak     |          |
| 4   | 5460.0000    | 28.66                      | 15.05                   | 43.71                     | 54.00           | -10.29       | AVG      |          |
| 5   | 5470.0000    | 34.66                      | 15.07                   | 49.73                     | 68.30           | -18.57       | Peak     |          |
| 6 * | 5494.7500    | 92.47                      | 15.13                   | 107.60                    | 68.30           | 39.30        | Peak     | No Limit |
| 7   | 5498.0000    | 85.95                      | 15.14                   | 101.09                    | 999.00          | -897.91      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5500 MHz |

## Vertical

80 dBuV/m

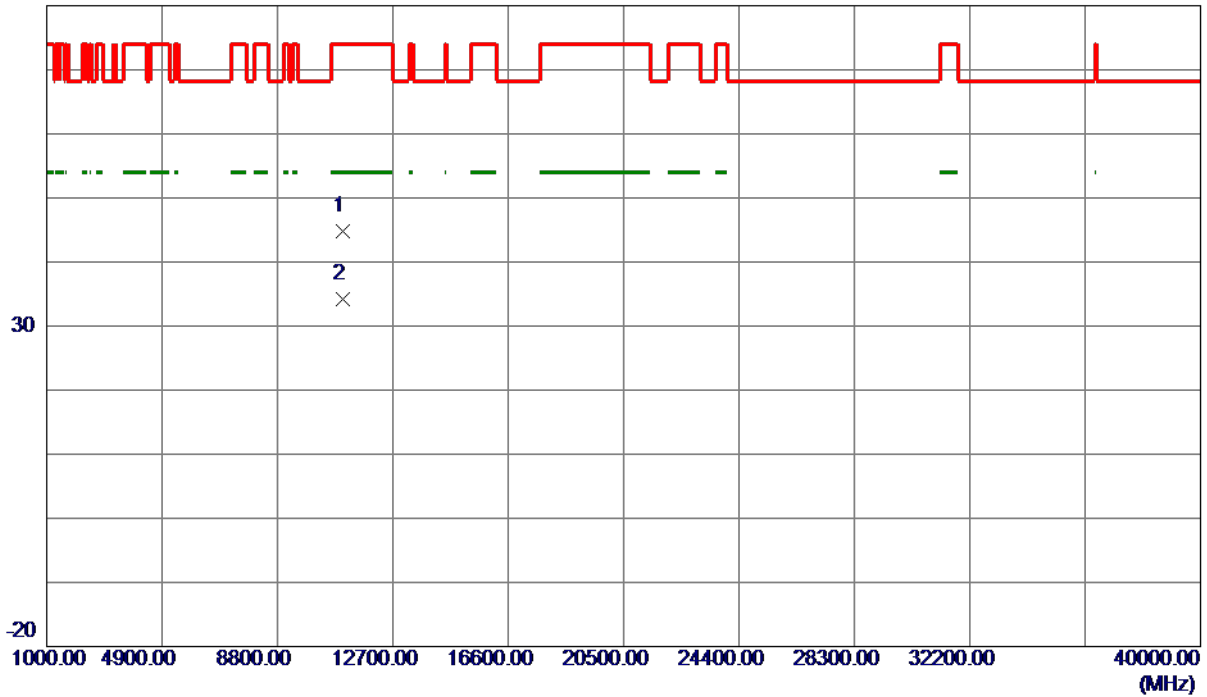

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10996.8350   | 33.24                      | 11.62                   | 44.86                     | 74.00           | -29.14       | Peak     |         |
| 2 * | 10998.7150   | 22.50                      | 11.62                   | 34.12                     | 54.00           | -19.88       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5500 MHz |

## Horizontal

130 dBuV/m

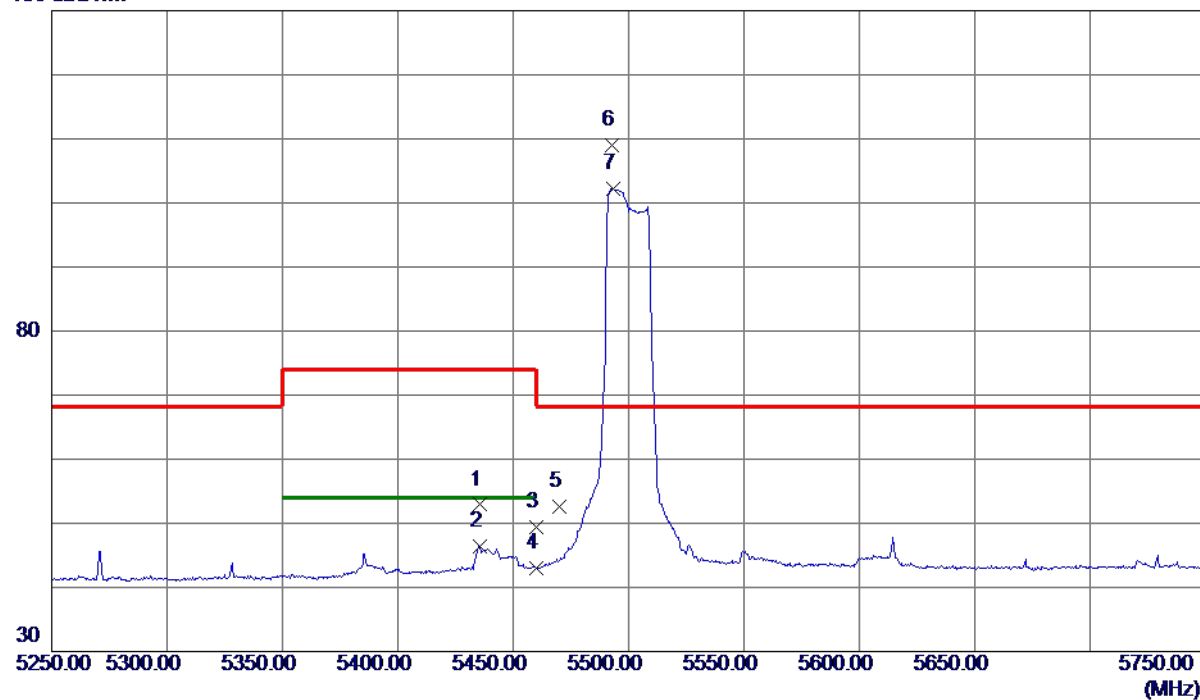

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5435.7500    | 37.91                      | 14.99                   | 52.90                     | 74.00           | -21.10       | Peak     |          |
| 2   | 5435.7500    | 31.45                      | 14.99                   | 46.44                     | 54.00           | -7.56        | AVG      |          |
| 3   | 5460.0000    | 34.32                      | 15.05                   | 49.37                     | 74.00           | -24.63       | Peak     |          |
| 4   | 5460.0000    | 27.94                      | 15.05                   | 42.99                     | 54.00           | -11.01       | AVG      |          |
| 5   | 5470.0000    | 37.45                      | 15.07                   | 52.52                     | 68.30           | -15.78       | Peak     |          |
| 6 * | 5492.7500    | 93.82                      | 15.13                   | 108.95                    | 68.30           | 40.65        | Peak     | No Limit |
| 7   | 5493.5000    | 87.13                      | 15.13                   | 102.26                    | 999.00          | -896.74      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5500 MHz |

## Horizontal

80 dBuV/m

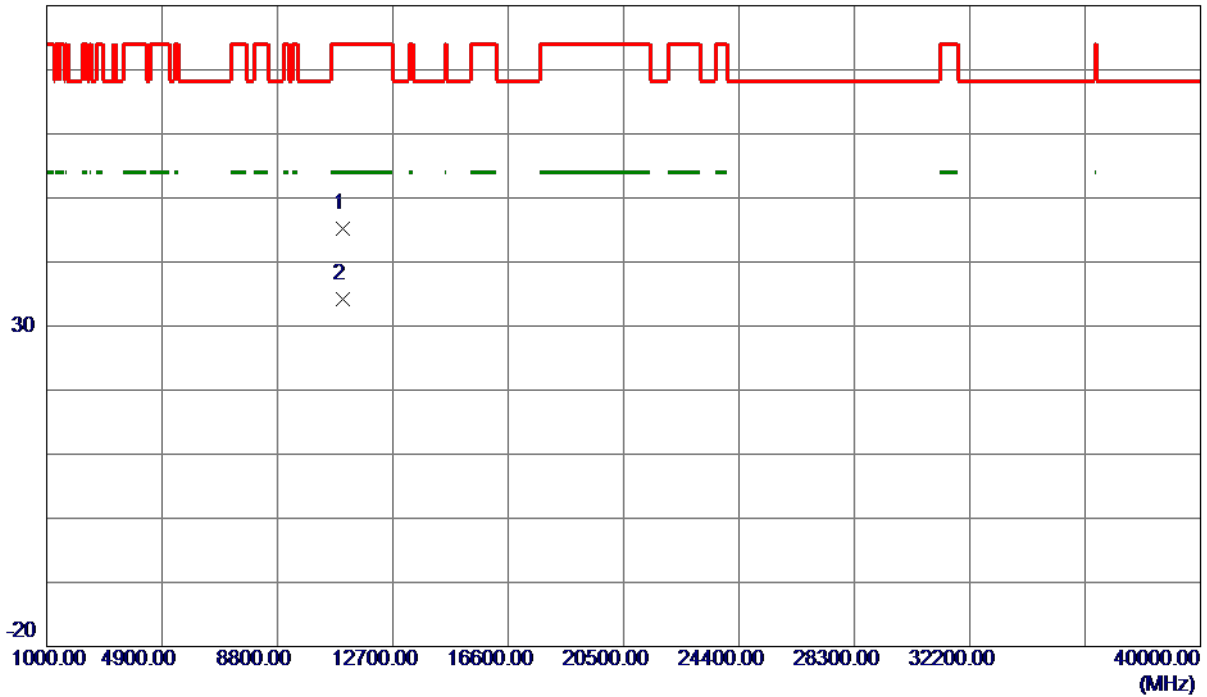

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10999.3900   | 33.55                      | 11.62                   | 45.17                     | 74.00           | -28.83       | Peak     |         |
| 2 * | 11004.7150   | 22.58                      | 11.62                   | 34.20                     | 54.00           | -19.80       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5580 MHz |

## Vertical

130 dBuV/m

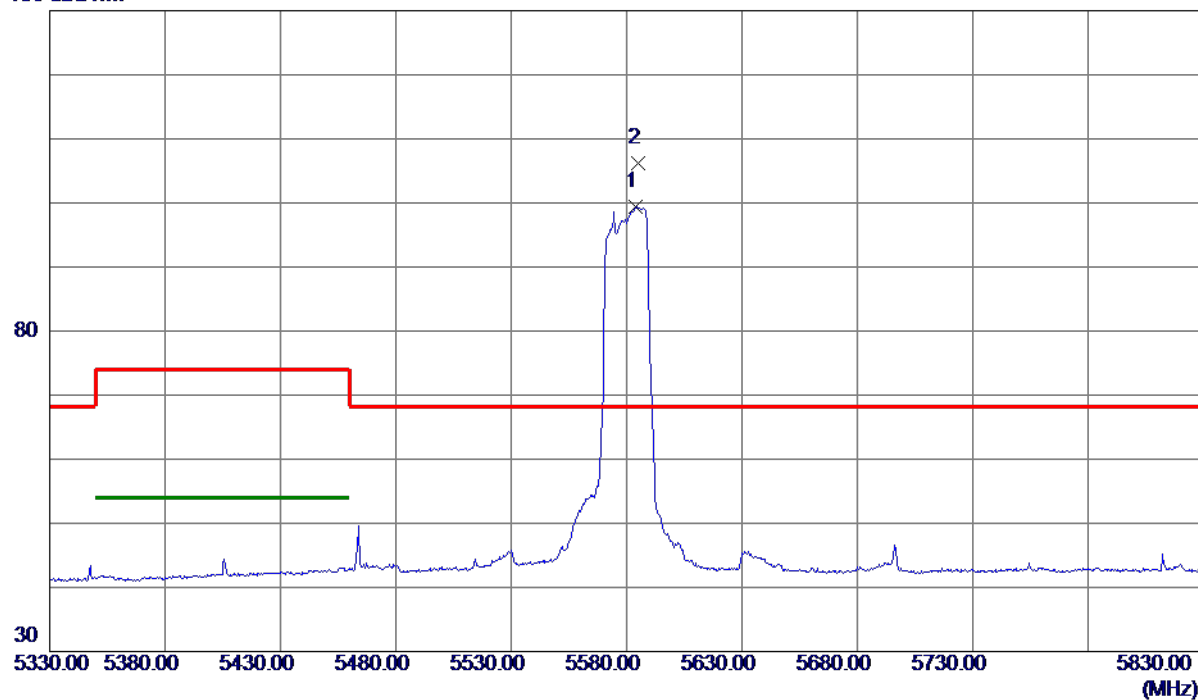

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5584.0000    | 84.06                      | 15.34                   | 99.40                     | 999.00          | -899.60      | AVG      | No Limit |
| 2 * | 5585.2500    | 90.86                      | 15.35                   | 106.21                    | 68.30           | 37.91        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5580 MHz |

## Vertical

80 dBuV/m

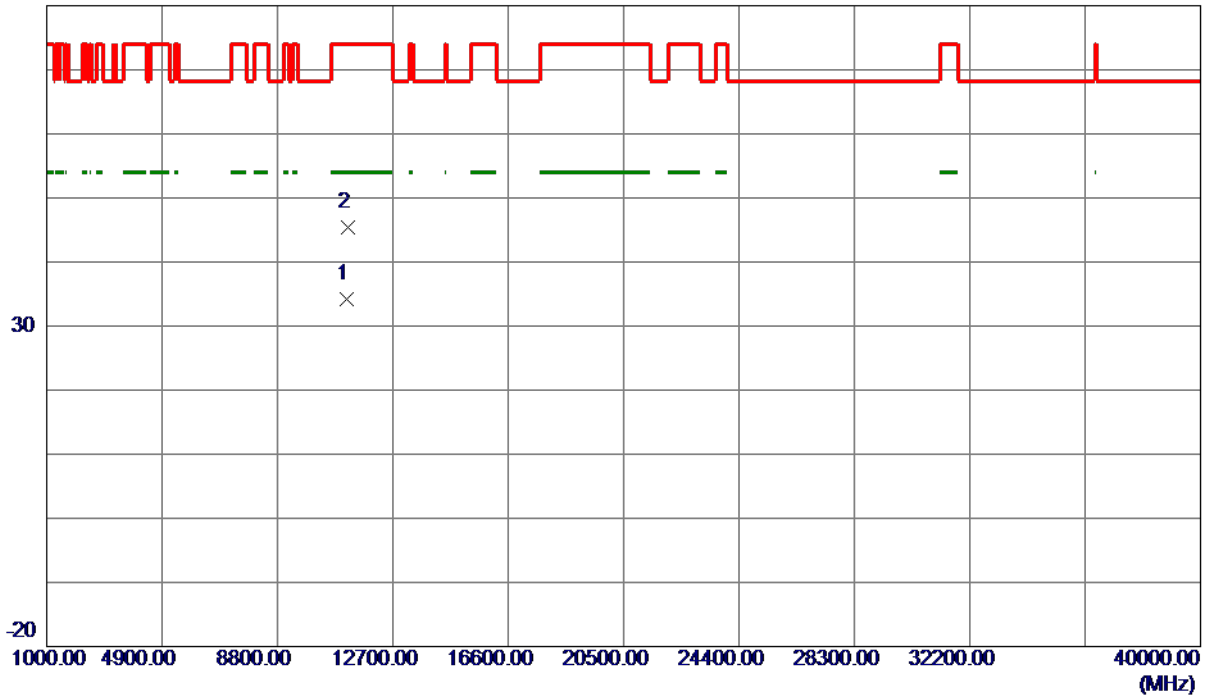

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11156.6250   | 22.44                      | 11.76                   | 34.20                     | 54.00           | -19.80       | AVG      |         |
| 2   | 11164.7350   | 33.54                      | 11.77                   | 45.31                     | 74.00           | -28.69       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5580 MHz |

## Horizontal

130 dBuV/m

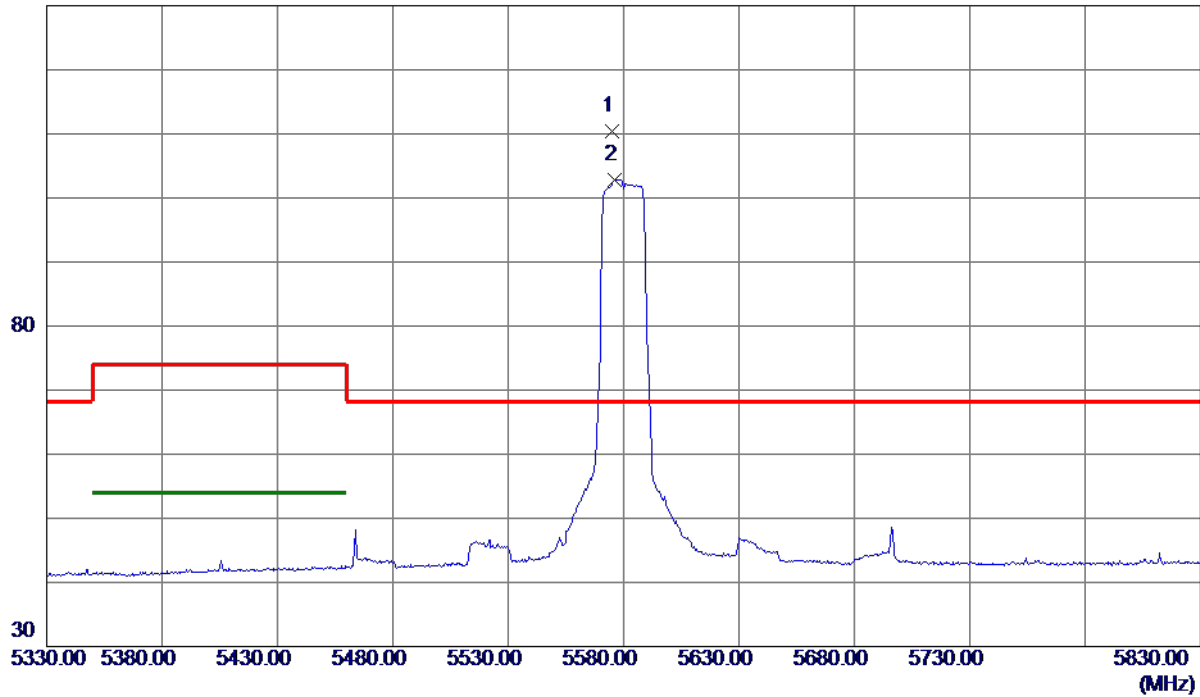

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5574.7500    | 95.12                      | 15.32                   | 110.44                    | 68.30           | 42.14        | Peak     | No Limit |
| 2   | 5576.0000    | 87.44                      | 15.33                   | 102.77                    | 999.00          | -896.23      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5580 MHz |

## Horizontal

80 dBuV/m

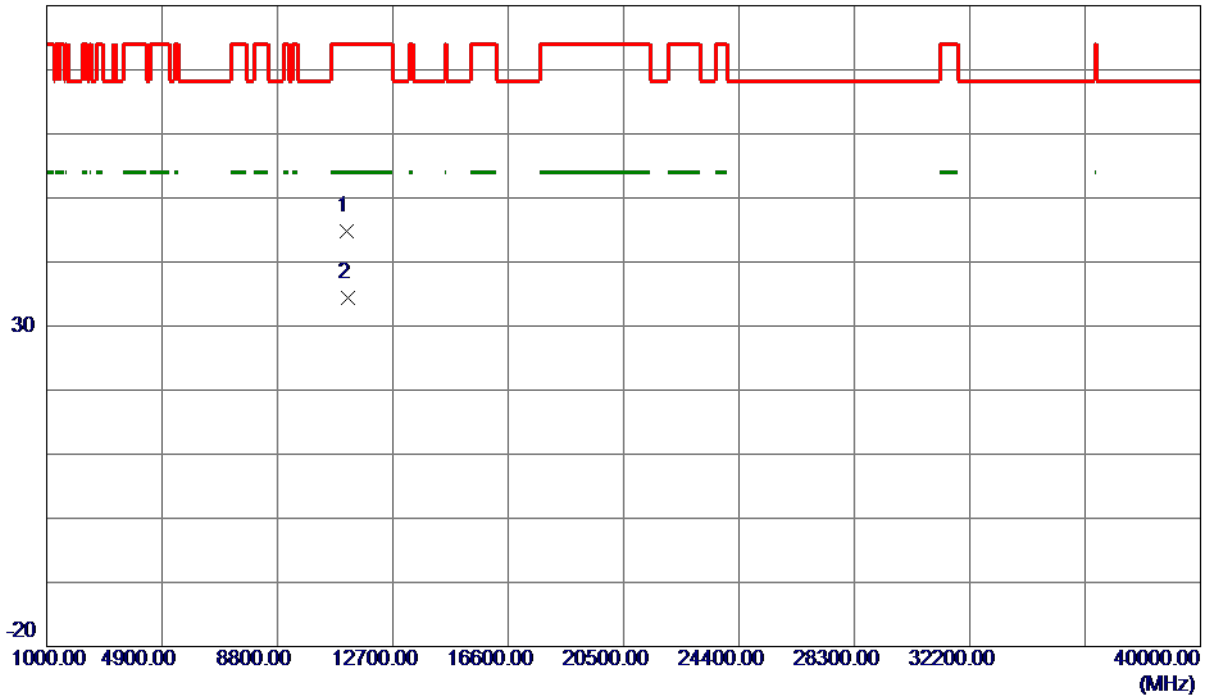

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11155.5650   | 33.13                      | 11.76                   | 44.89                     | 74.00           | -29.11       | Peak     |         |
| 2 * | 11161.9650   | 22.55                      | 11.77                   | 34.32                     | 54.00           | -19.68       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5700 MHz |

## Vertical

130 dBuV/m

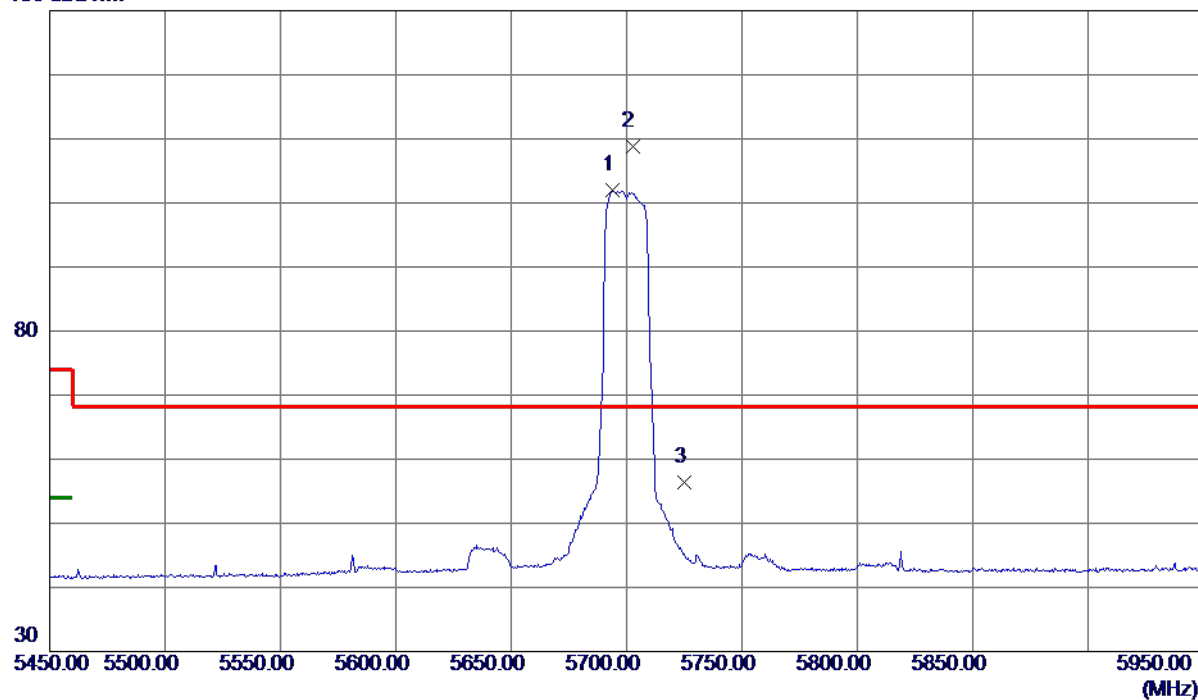

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5693.7500    | 86.37                      | 15.60                   | 101.97                    | 999.00          | -897.03      | AVG      | No Limit |
| 2 * | 5702.5000    | 93.26                      | 15.63                   | 108.89                    | 68.30           | 40.59        | Peak     | No Limit |
| 3   | 5725.0000    | 40.74                      | 15.68                   | 56.42                     | 68.30           | -11.88       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5700 MHz |

## Vertical

80 dBuV/m

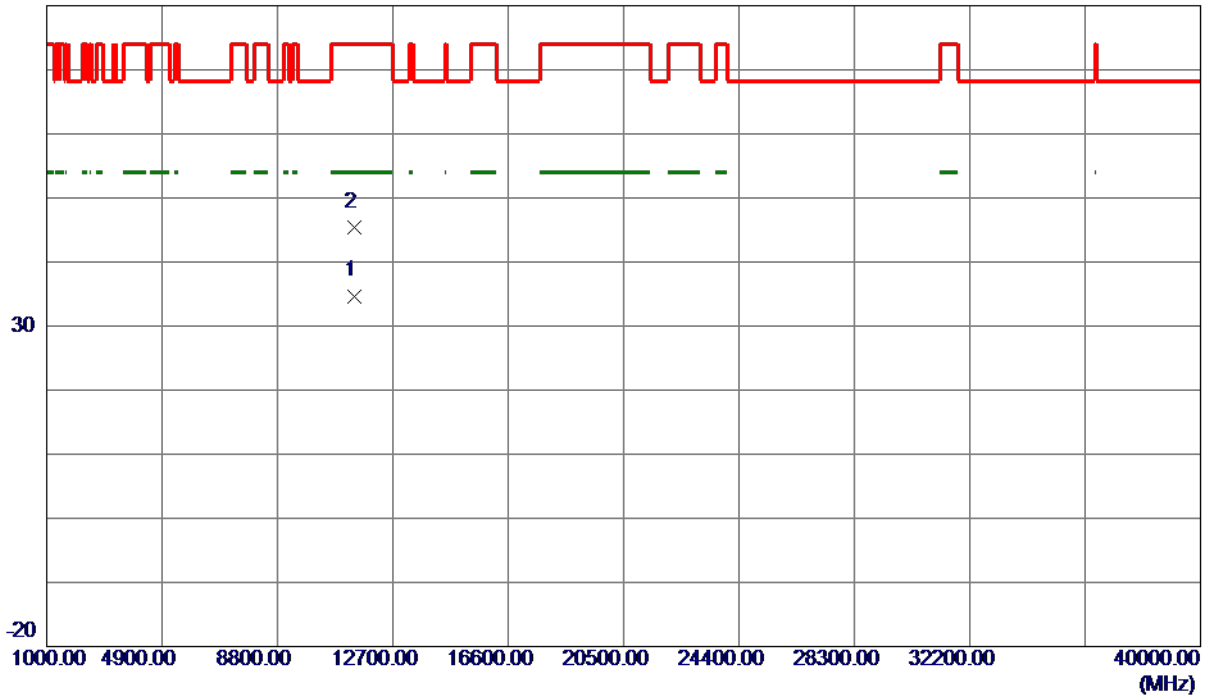

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11400.9500   | 22.72                      | 11.98                   | 34.70                     | 54.00           | -19.30       | AVG      |         |
| 2   | 11402.8500   | 33.34                      | 11.99                   | 45.33                     | 74.00           | -28.67       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5700 MHz |

## Horizontal

130 dBuV/m

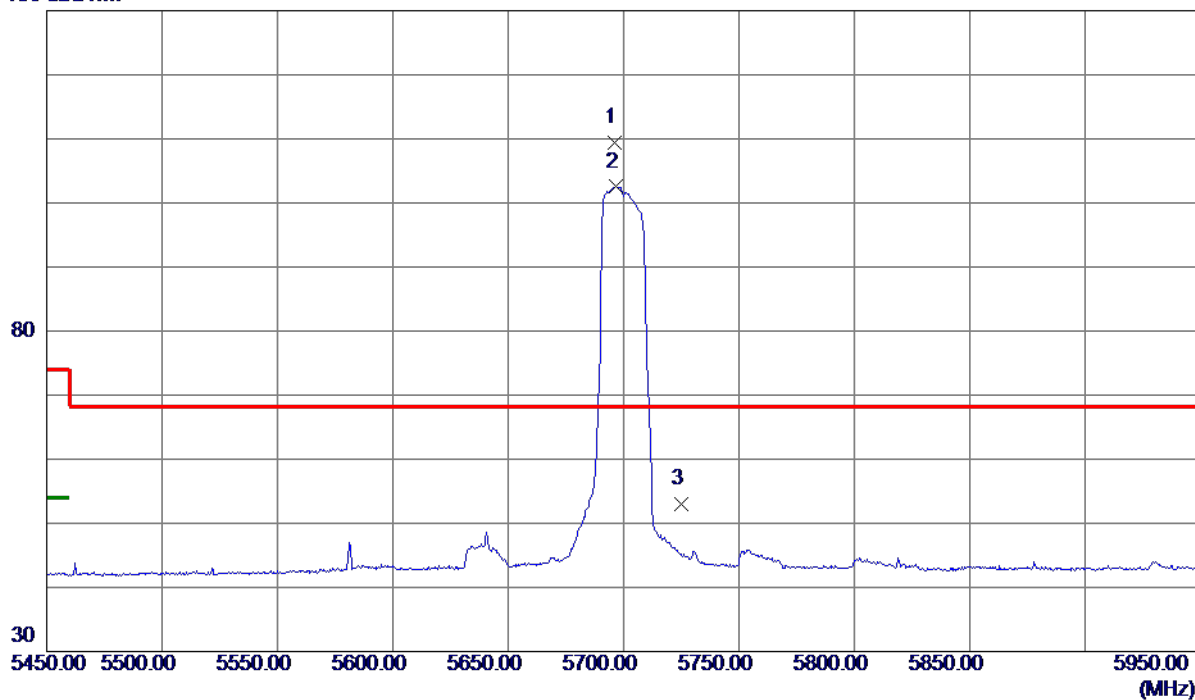

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5696.2500    | 93.76                      | 15.61                   | 109.37                    | 68.30           | 41.07        | Peak     | No Limit |
| 2   | 5696.5000    | 86.89                      | 15.61                   | 102.50                    | 999.00          | -896.50      | AVG      | No Limit |
| 3   | 5725.0000    | 37.41                      | 15.68                   | 53.09                     | 68.30           | -15.21       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT20) Mode 5700 MHz |

## Horizontal

80 dBuV/m

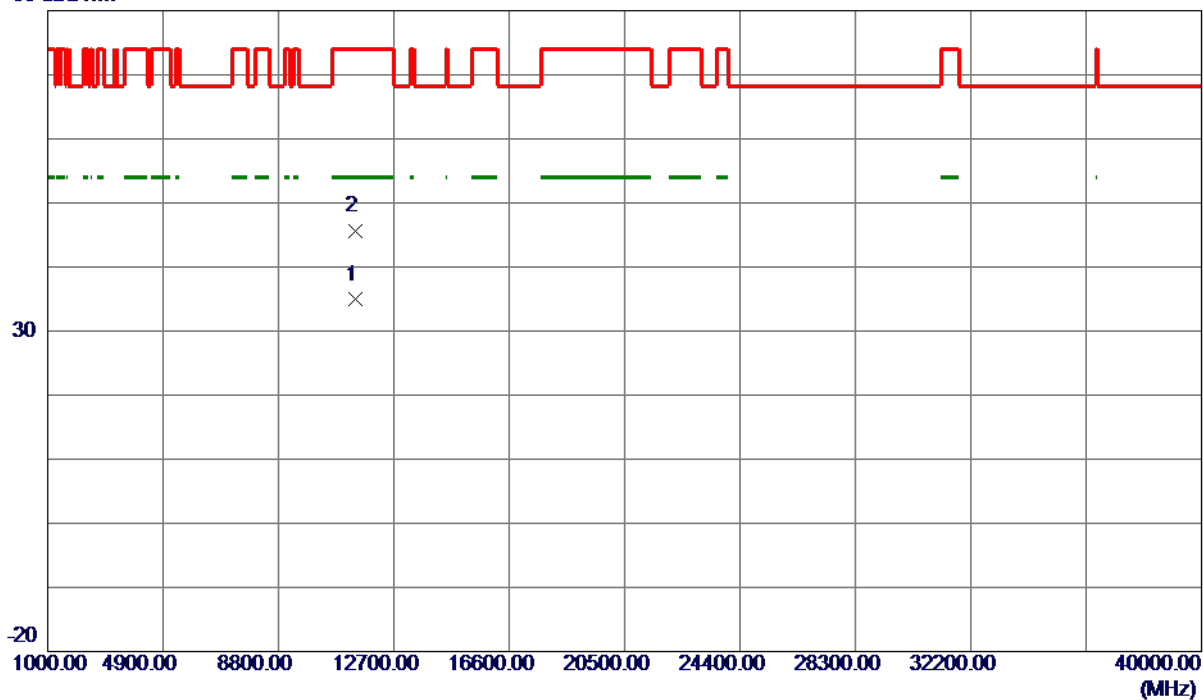

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11397.3200   | 22.92                      | 11.98                   | 34.90                     | 54.00           | -19.10       | AVG      |         |
| 2   | 11398.2500   | 33.55                      | 11.98                   | 45.53                     | 74.00           | -28.47       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5510 MHz |

## Vertical

130 dBuV/m

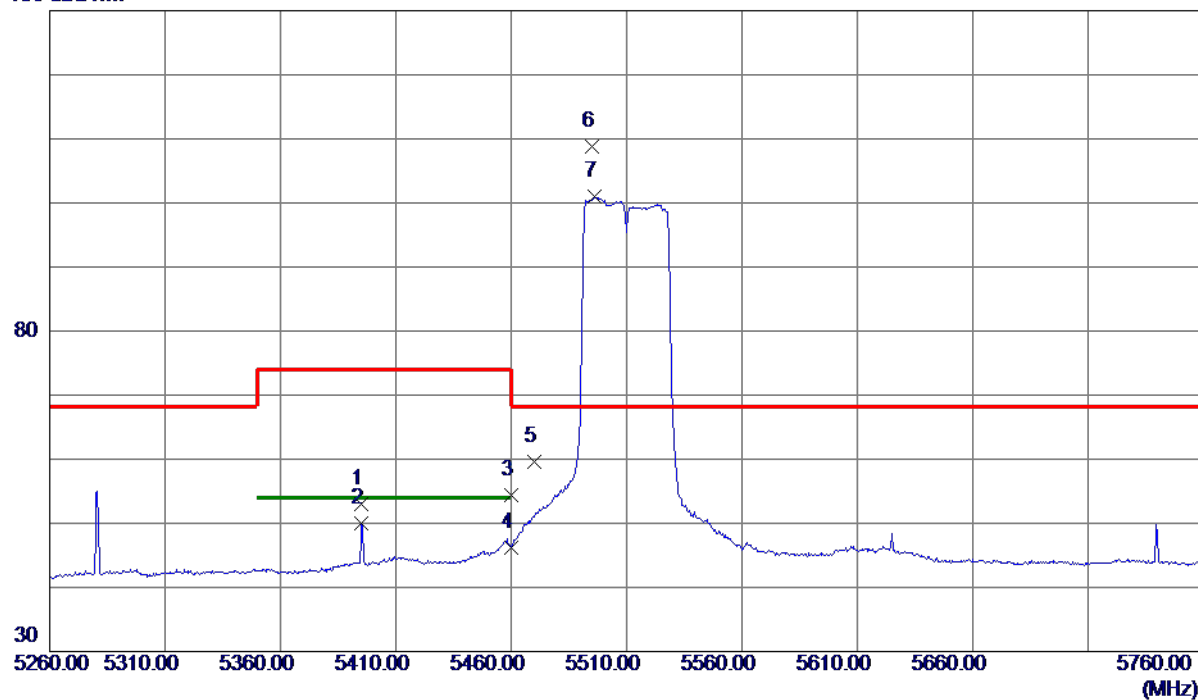

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5395.2500    | 38.16                      | 14.90                   | 53.06                     | 74.00           | -20.94       | Peak     |          |
| 2   | 5395.2500    | 35.08                      | 14.90                   | 49.98                     | 54.00           | -4.02        | AVG      |          |
| 3   | 5460.0000    | 39.43                      | 15.05                   | 54.48                     | 74.00           | -19.52       | Peak     |          |
| 4   | 5460.0000    | 31.24                      | 15.05                   | 46.29                     | 54.00           | -7.71        | AVG      |          |
| 5   | 5470.0000    | 44.54                      | 15.07                   | 59.61                     | 68.30           | -8.69        | Peak     |          |
| 6 * | 5495.0000    | 93.67                      | 15.13                   | 108.80                    | 68.30           | 40.50        | Peak     | No Limit |
| 7   | 5496.2500    | 85.78                      | 15.14                   | 100.92                    | 999.00          | -898.08      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5510 MHz |

## Vertical

80 dBuV/m

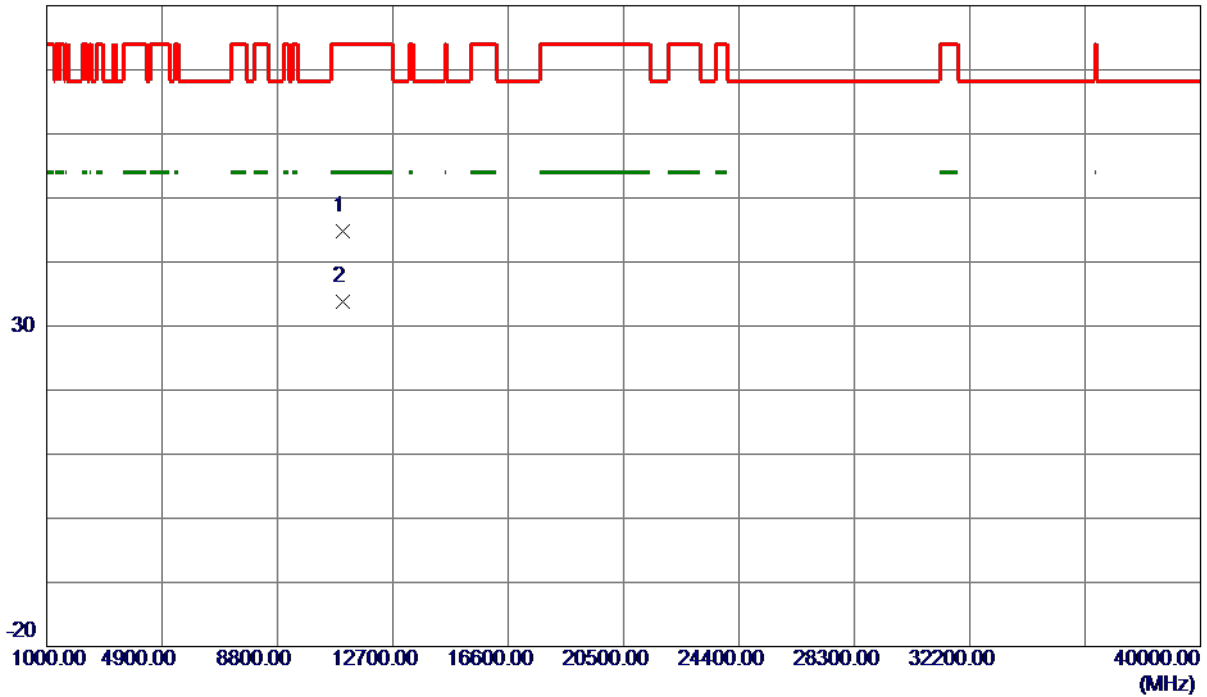

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11023.4550   | 33.12                      | 11.64                   | 44.76                     | 74.00           | -29.24       | Peak     |         |
| 2 * | 11024.3200   | 22.13                      | 11.64                   | 33.77                     | 54.00           | -20.23       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5510 MHz |

## Horizontal

130 dBuV/m

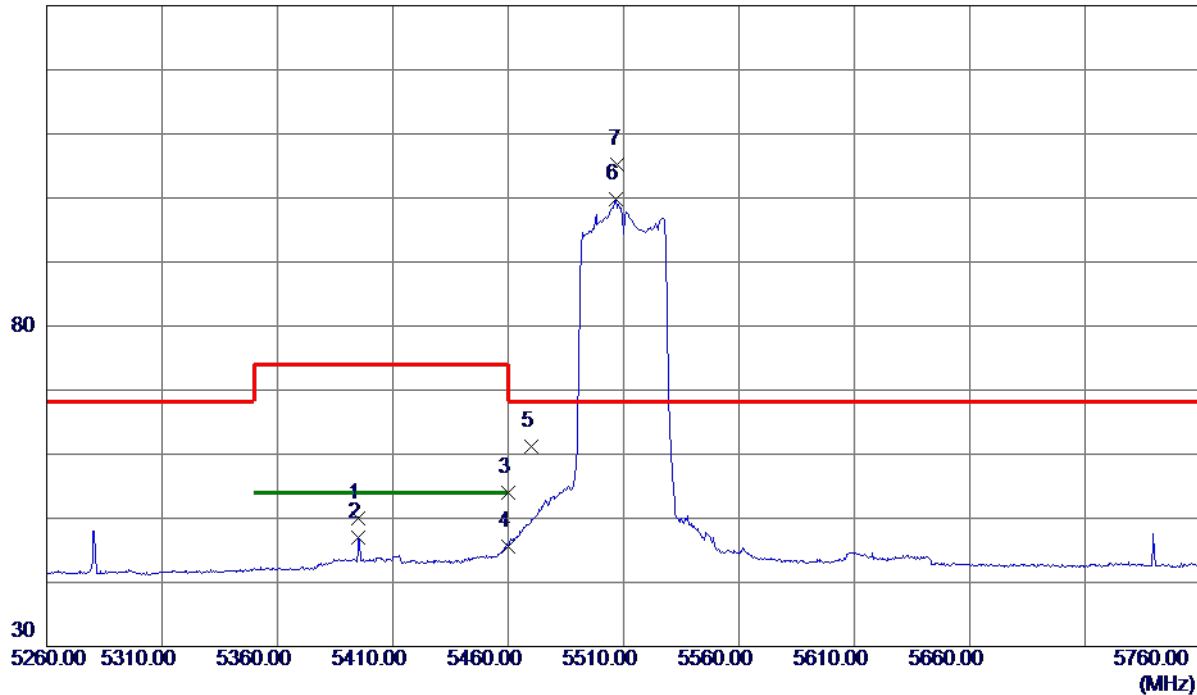

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5395.2500    | 35.10                      | 14.90                   | 50.00                     | 74.00           | -24.00       | Peak     |          |
| 2   | 5395.2500    | 32.08                      | 14.90                   | 46.98                     | 54.00           | -7.02        | AVG      |          |
| 3   | 5460.0000    | 39.03                      | 15.05                   | 54.08                     | 74.00           | -19.92       | Peak     |          |
| 4   | 5460.0000    | 30.51                      | 15.05                   | 45.56                     | 54.00           | -8.44        | AVG      |          |
| 5   | 5470.0000    | 46.09                      | 15.07                   | 61.16                     | 68.30           | -7.14        | Peak     |          |
| 6   | 5506.5000    | 84.58                      | 15.16                   | 99.74                     | 999.00          | -899.26      | AVG      | No Limit |
| 7 * | 5507.5000    | 89.96                      | 15.16                   | 105.12                    | 68.30           | 36.82        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5510 MHz |

## Horizontal

80 dBuV/m

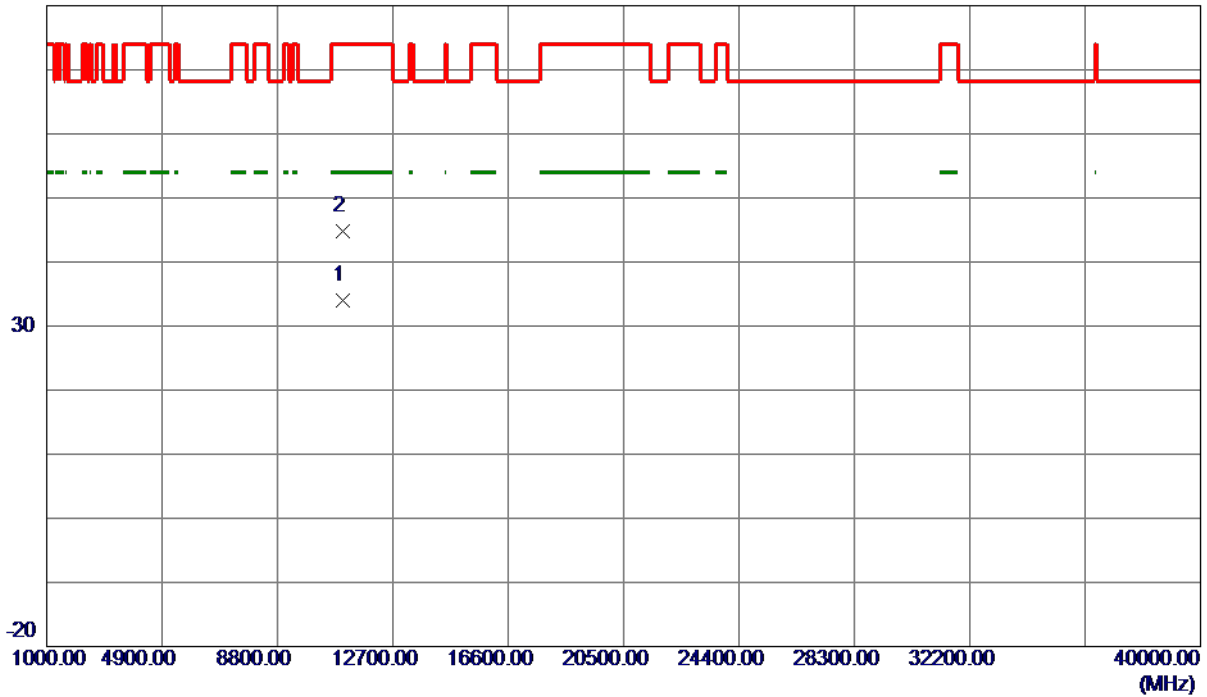

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11015.1400   | 22.37                      | 11.63                   | 34.00                     | 54.00           | -20.00       | AVG      |         |
| 2   | 11016.3250   | 33.17                      | 11.63                   | 44.80                     | 74.00           | -29.20       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5550 MHz |

## Vertical

130 dBuV/m

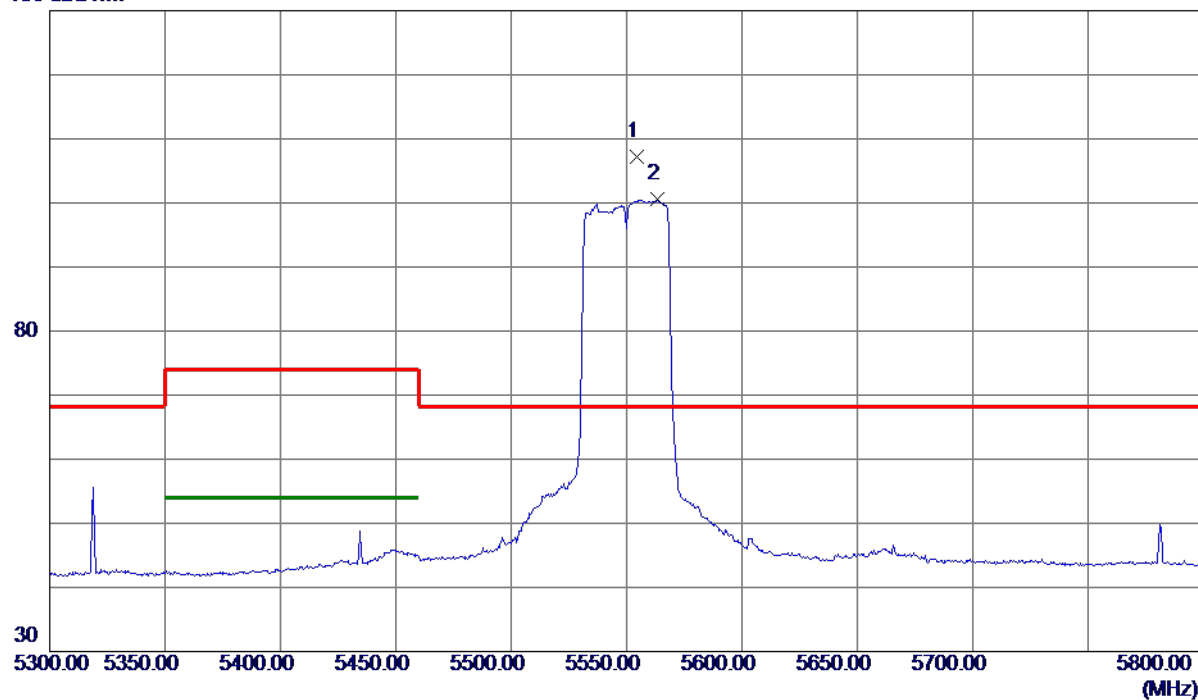

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5554.2500    | 91.88                      | 15.27                   | 107.15                    | 68.30           | 38.85        | Peak     | No Limit |
| 2   | 5563.2500    | 85.22                      | 15.30                   | 100.52                    | 999.00          | -898.48      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5550 MHz |

## Vertical

80 dBuV/m

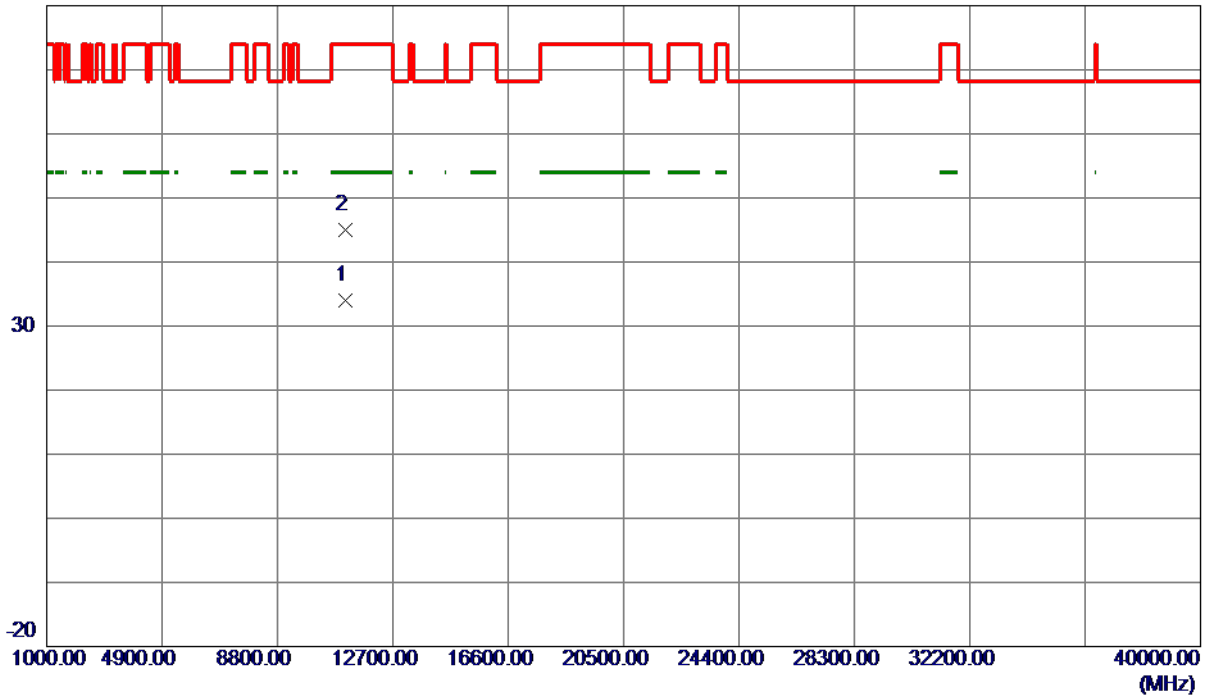

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11099.6150   | 22.36                      | 11.71                   | 34.07                     | 54.00           | -19.93       | AVG      |         |
| 2   | 11101.8850   | 33.28                      | 11.71                   | 44.99                     | 74.00           | -29.01       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5550 MHz |

## Horizontal

130 dBuV/m

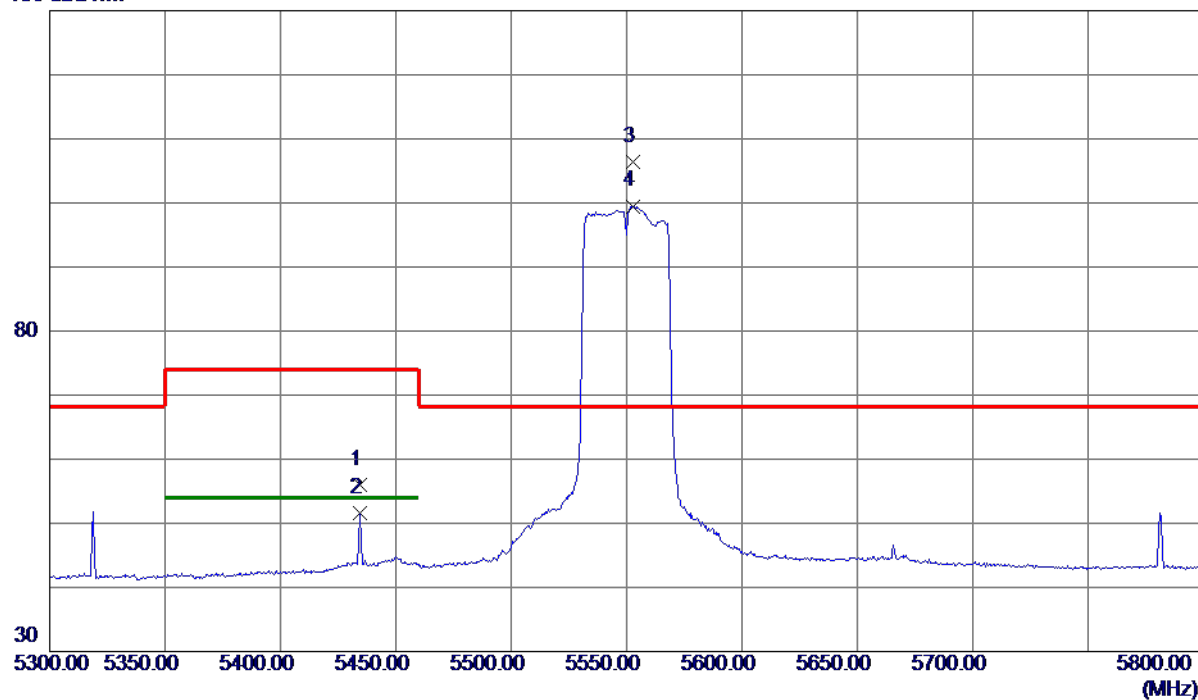

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5434.2500    | 40.92                      | 14.99                   | 55.91                     | 74.00           | -18.09       | Peak     |          |
| 2   | 5434.2500    | 36.67                      | 14.99                   | 51.66                     | 54.00           | -2.34        | AVG      |          |
| 3 * | 5552.7500    | 91.07                      | 15.27                   | 106.34                    | 68.30           | 38.04        | Peak     | No Limit |
| 4   | 5552.7500    | 84.23                      | 15.27                   | 99.50                     | 999.00          | -899.50      | AVG      | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5550 MHz |

## Horizontal

80 dBuV/m

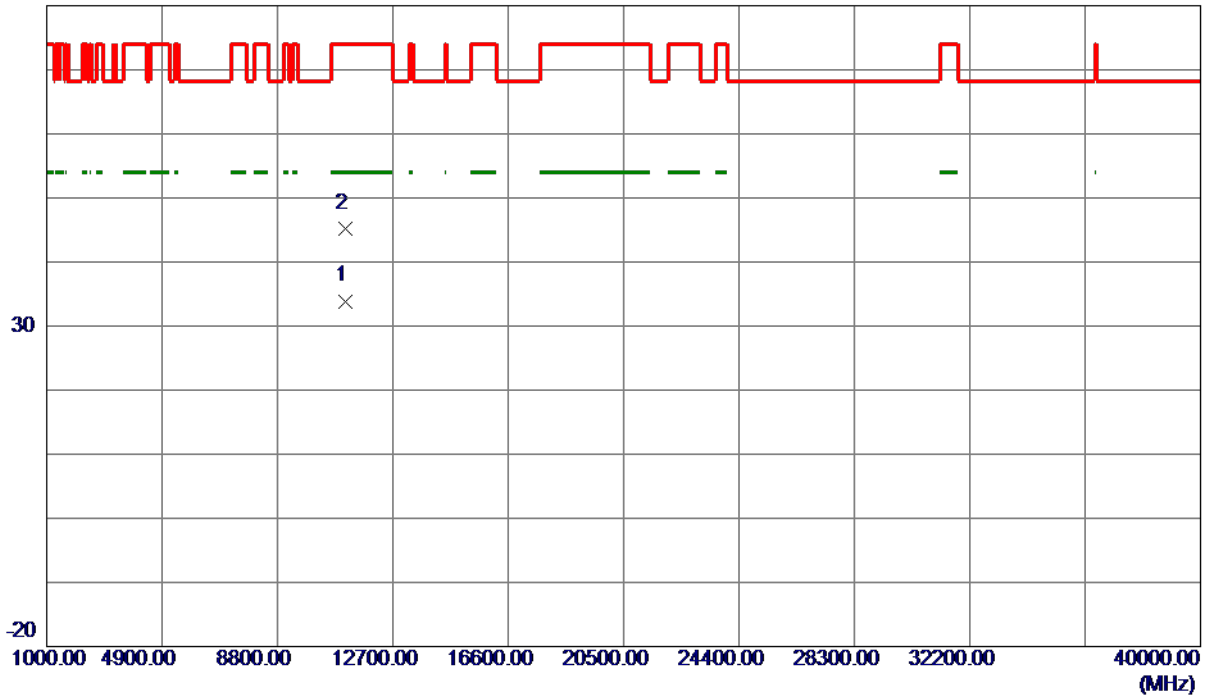

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11095.6350   | 22.19                      | 11.71                   | 33.90                     | 54.00           | -20.10       | AVG      |         |
| 2   | 11099.9800   | 33.43                      | 11.71                   | 45.14                     | 74.00           | -28.86       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5670 MHz |

## Vertical

130 dBuV/m

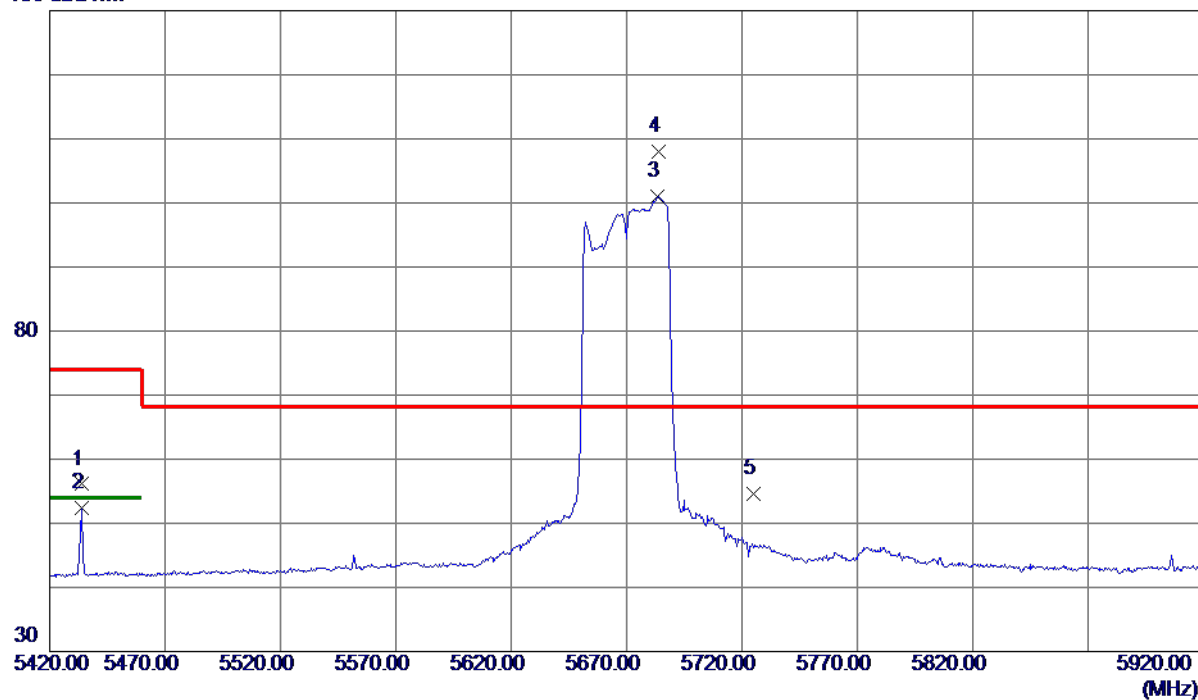

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5433.7500    | 41.11                      | 14.99                   | 56.10                     | 74.00           | -17.90       | Peak     |          |
| 2   | 5433.7500    | 37.40                      | 14.99                   | 52.39                     | 54.00           | -1.61        | AVG      |          |
| 3   | 5683.5000    | 85.33                      | 15.58                   | 100.91                    | 999.00          | -898.09      | AVG      | No Limit |
| 4 * | 5683.7500    | 92.48                      | 15.58                   | 108.06                    | 68.30           | 39.76        | Peak     | No Limit |
| 5   | 5725.0000    | 38.85                      | 15.68                   | 54.53                     | 68.30           | -13.77       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5670 MHz |

## Vertical

80 dBuV/m

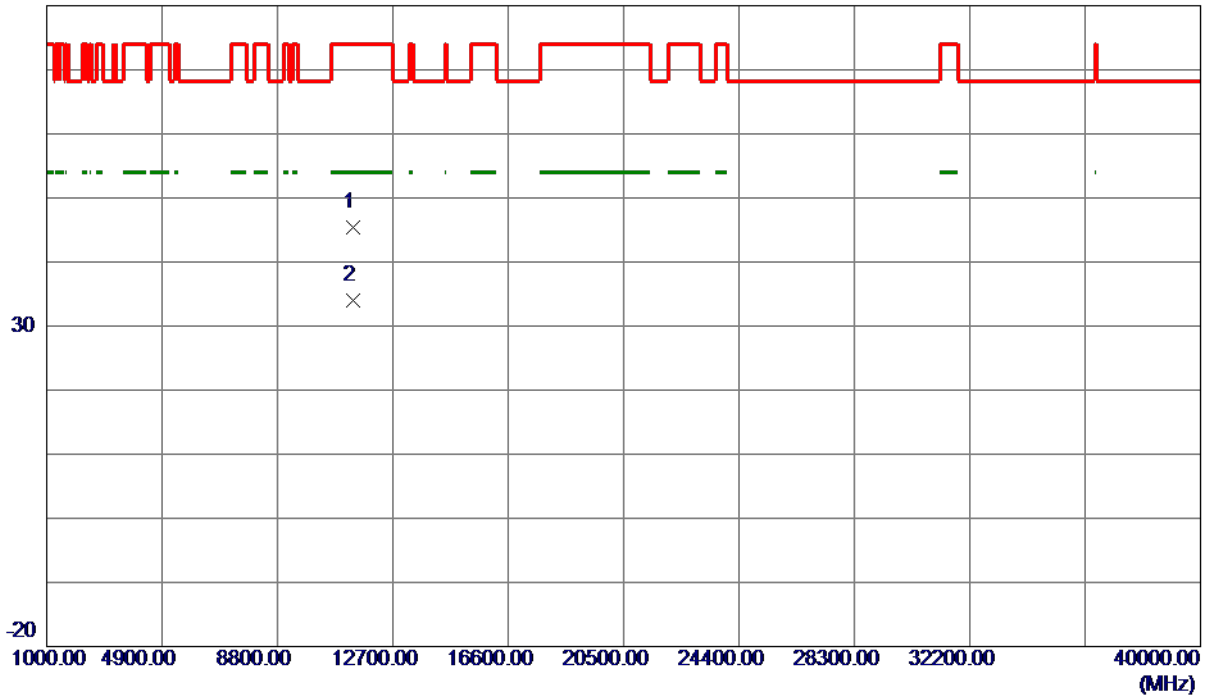

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11342.2450   | 33.48                      | 11.93                   | 45.41                     | 74.00           | -28.59       | Peak     |         |
| 2 * | 11343.6250   | 22.03                      | 11.93                   | 33.96                     | 54.00           | -20.04       | AVG      |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5670 MHz |

## Horizontal

130 dBuV/m

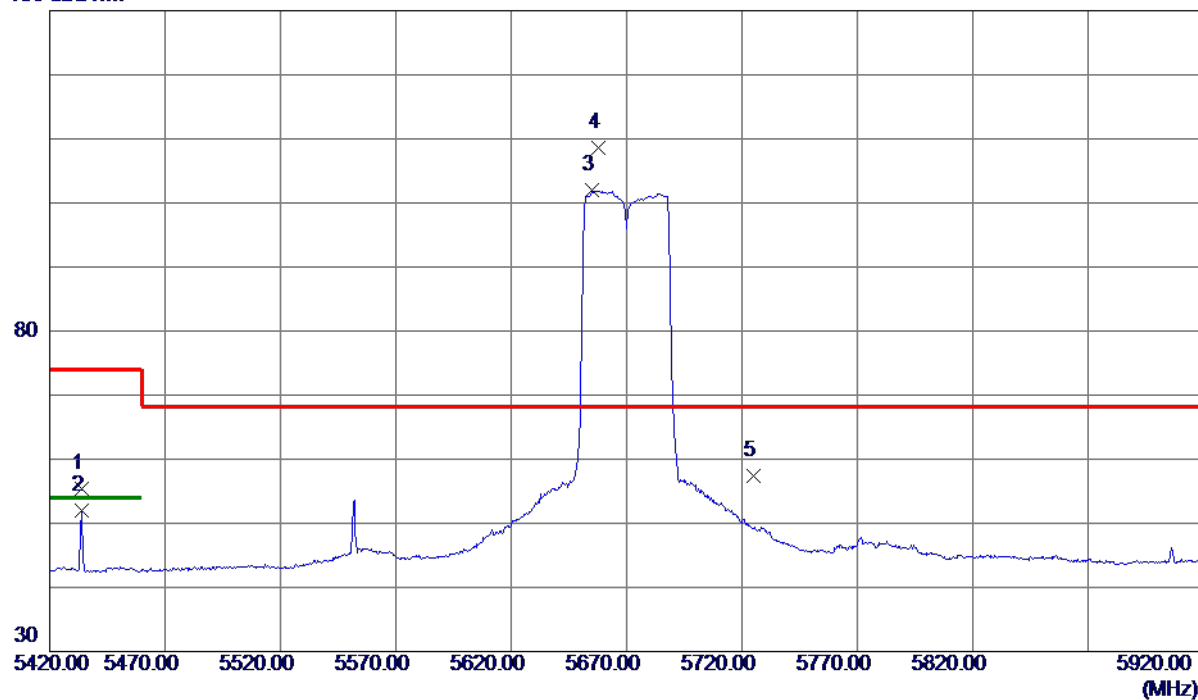

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5433.7500    | 40.45                      | 14.99                   | 55.44                     | 74.00           | -18.56       | Peak     |          |
| 2   | 5433.7500    | 36.99                      | 14.99                   | 51.98                     | 54.00           | -2.02        | AVG      |          |
| 3   | 5654.7500    | 86.48                      | 15.51                   | 101.99                    | 999.00          | -897.01      | AVG      | No Limit |
| 4 * | 5658.0000    | 93.13                      | 15.52                   | 108.65                    | 68.30           | 40.35        | Peak     | No Limit |
| 5   | 5725.0000    | 41.80                      | 15.68                   | 57.48                     | 68.30           | -10.82       | Peak     |          |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-2C_TX N (HT40) Mode 5670 MHz |

## Horizontal

80 dBuV/m

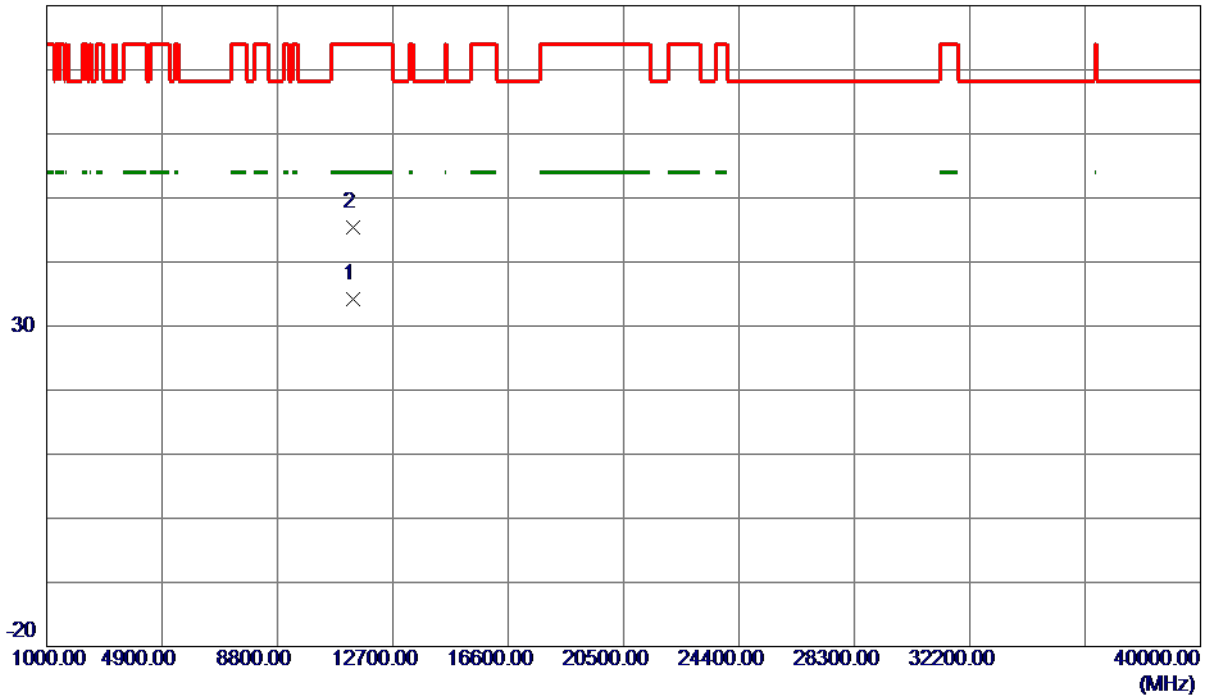

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11340.3050   | 22.28                      | 11.93                   | 34.21                     | 54.00           | -19.79       | AVG      |         |
| 2   | 11342.3350   | 33.47                      | 11.93                   | 45.40                     | 74.00           | -28.60       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Vertical

130 dBuV/m

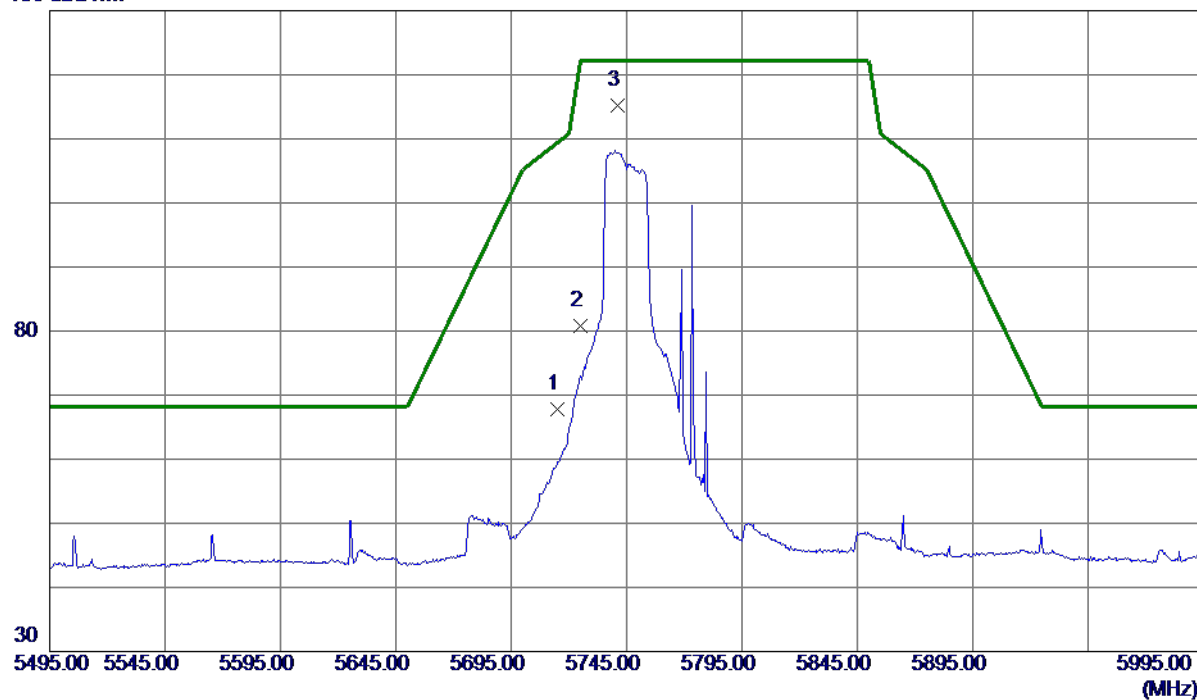

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 52.21                      | 15.65                   | 67.86                     | 109.40          | -41.54       | Peak     |          |
| 2   | 5725.0000    | 65.12                      | 15.68                   | 80.80                     | 122.20          | -41.40       | Peak     |          |
| 3 * | 5741.2500    | 99.55                      | 15.72                   | 115.27                    | 122.20          | -6.93        | Peak     | No Limit |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Vertical

80 dBuV/m

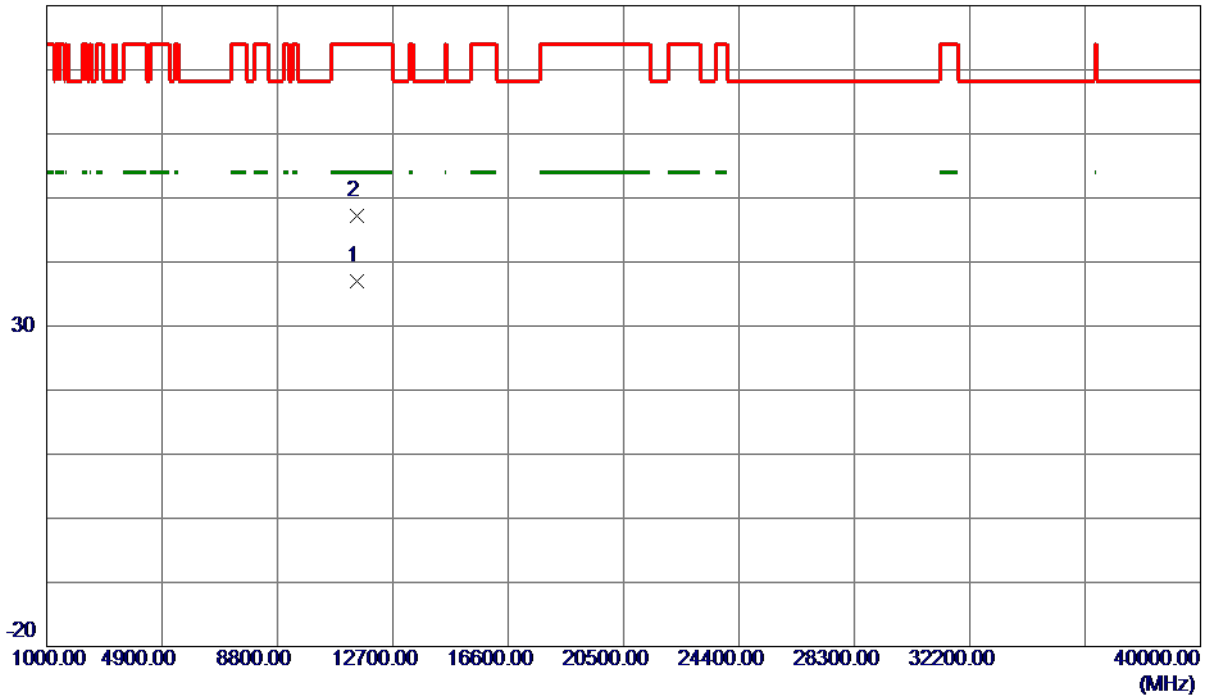

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11499.6250   | 24.91                      | 12.07                   | 36.98                     | 54.00           | -17.02       | AVG      |         |
| 2   | 11501.6500   | 35.12                      | 12.08                   | 47.20                     | 74.00           | -26.80       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.