

NOTES:


1) Print with permanent, smudge proof, black ink to be approved by Technicolor Engineering.

2) Serial Numbers. For definition of the Numeric Instrument Serial Number see Specification # 15692080.

Code 128 Barcode for Serial Number (14 digit).

The Pseudo Code (first 5 Characters of the serial number) is for tracking any instrument changes after the initial production configuration.

3) All labels which include the UL listing marking shall comply with UL requirements. Note UL logos with less than 0.375" Dia., must have the "R-ball" symbol (Registration Mark) removed.

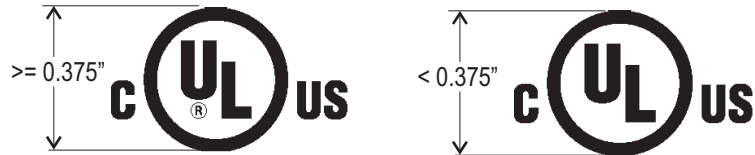

4) For Factory FGR and Pilot runs where it is determined that the build will be unsalable. Replace Regulatory Marks and UPC codes with:

FGR SAMPLE
NOT FOR SALE.

or

PILOT SAMPLE
NOT FOR SALE.

When required, this will be communicated with a Factory Notice.

5) Unit Identifier - The Unit Identifier is a 10 digit decimal number that resides in the SoC of the unit. Each SoC will be programmed with a unique number. This number is used to identify the device by the system head end.



The man readable Unit Identifier will have 5 digits, a blank space, and 5 digits. The barcode will not contain the blank space.

S Safety Critical

This Label may require review by Product Certification and Compliance. See Specification, "Component Safety Requirements" 15092970 paragraph 5.

6) Carton ID Logic: AMMPYWWDCXXXX

A = OEM Designator. A = Technicolor. (Always "A")
MM = Model Number 01-99
01 = DCI401MCS

P = Location where palletized
6 = Foxconn (Shanghai Songjiang)
A = Indianapolis
Y = Reserved for warehouse re-palletization

Y = Year (0 = 2010, 1 = 2011, etc.)

WW = Week (01-52)

D = Day carton completed (Sunday = 1, Monday = 2, etc.)

C = Identifies the barcode as a Carton ID. (Always "C")

XXXX = counter 0001 - 9999 resets back to 0001 each day.

REVISIONS

Create, & Release
dwg 17021420. New
Print Spec.

RKM 05/04/12

1

Add Carton ID barcode
to master pack. Roll to
1700935A

RKM 07/12/12

2

LABEL SPECIFICATION, DCI401MCS

Technicolor

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TECHNICOLOR AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION.

17021420


SHT. : 1 of 5
R.K. McNeely

Pseudo Code	Plant 161 DCI401MCS			Description
CONFIG A	60001			Initial Startup Configuration
CONFIG B				

Note: All graphics Arial Narrow Bold 6pt.

Numeric Serial Number
Code 128

Unit Identifier
Interleaved 1 2 of 5

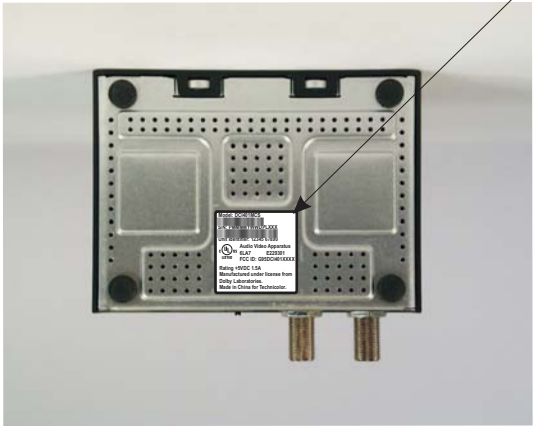

LABEL SPECIFICATION, DCI401MCS IRD

Technicolor

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TECHNICALOR AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION.

Specification Number: 17008050

Gift carton label

S Safety Critical
This Label may require review by
Product Certification and Compliance.
See Specification, "Component Safety
Requirements" 15092970 paragraph 5.

REVISIONS

Numeric Serial Number
Code 128

Unit Identifier
Interleaved I 2 of 5

Model: DCI401MCS



S/N: PMMMMYWWDPLXXX




Unit Identifier: 12345 67890

Technicolor USA, Inc.
101 West 103rd Street
Indianapolis, IN 46290-1024

Part: 17010680

Place on gift carton
within target area.

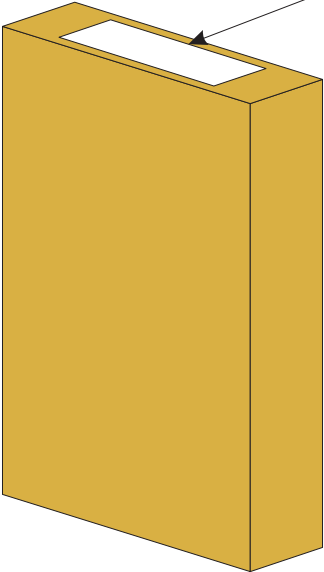

LABEL SPECIFICATION, DCI401MCS Carton

Technicolor

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TECHNICALOR
AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION.

SHT. : 3 of 5
R.K. McNeely

17021420

Carton ID Code 128
See Note 6.

Numeric Serial Number
Code 128

Technicolor USA, Inc.
101 West 103rd Street
Indianapolis, IN 46290-1024
Model: DCI401MCS
Contains ten (10) DCI401MCS

Carton ID: AMMPYWWDCXXXX

S/N: PMMMMYWWDP LXXX

S/N: PMMMMYWWDP LXXX

S/N: PMMMMYWWDP LXXX

S/N: PMMMMYWWDP LXXX

S/N: PMMMMYWWDP LXXX


S/N: PMMMMYWWDP LXXX

S/N: PMMMMYWWDP LXXX

S/N: PMMMMYWWDP LXXX

S/N: PMMMMYWWDP LXXX

S/N: PMMMMYWWDP LXXX

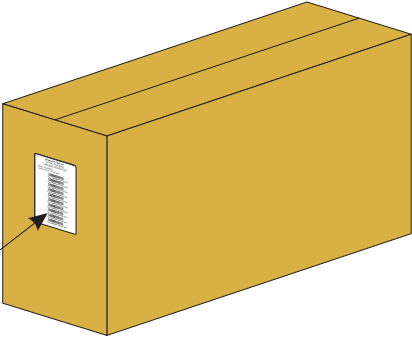

Place on Master Pack Carton
within target area.

Pseudo Code	Plant 161			Description
CONFIG A	M001A			Initial Startup Configuration
CONFIG B				

Note: For the Serial Number Specification see 16865560.
Place on PCB board in label target area.

PCB Serial Number
Code 128



LABEL SPECIFICATION, DCI401MCS PCB

Technicolor