

FCC Test Report

Report No.: RF180903E04-1

FCC ID: G95TCHT2AA0

Test Model: TCHT2AA0

Received Date: Sep. 03, 2018

Test Date: Sep. 27 to Oct. 15, 2018

Issued Date: Dec. 18, 2018

Applicant: Technicolor Connected Home USA LLC

Address: 5030 Sugarloaf Parkway, Building 6, Lawrenceville, GA 30044

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT (WLAN)	7
3.2 Description of Test Modes	11
3.2.1 Test Mode Applicability and Tested Channel Detail	13
3.3 Duty Cycle of Test Signal	17
3.4 Description of Support Units	18
3.4.1 Configuration of System under Test	18
3.5 General Description of Applied Standard	19
4 Test Types and Results	20
4.1 Radiated Emission and Bandedge Measurement	20
4.1.1 Limits of Radiated Emission and Bandedge Measurement	20
4.1.2 Test Instruments	21
4.1.3 Test Procedure	22
4.1.4 Deviation from Test Standard	22
4.1.5 Test Setup	23
4.1.6 EUT Operating Condition	24
4.1.7 Test Results (Bandedge)	25
4.1.8 Test Results (Spurious emission)	109
4.2 Conducted Emission Measurement	153
4.2.1 Limits of Conducted Emission Measurement	153
4.2.2 Test Instruments	153
4.2.3 Test Procedure	154
4.2.4 Deviation from Test Standard	154
4.2.5 Test Setup	154
4.2.6 EUT Operating Condition	154
4.2.7 Test Results	155
4.3 Transmit Power Measurement	157
4.3.1 Limits of Transmit Power Measurement	157
4.3.2 Test Setup	157
4.3.3 Test Instruments	157
4.3.4 Test Procedure	158
4.3.5 Deviation from Test Standard	158
4.3.6 EUT Operating Condition	158
4.3.7 Test Result	159
4.4 Occupied Bandwidth Measurement	167
4.4.1 Test Setup	167
4.4.2 Test Instruments	167
4.4.3 Test Procedure	167
4.4.4 Test Results	168
4.5 Peak Power Spectral Density Measurement	173
4.5.1 Limits of Peak Power Spectral Density Measurement	173
4.5.2 Test Setup	173
4.5.3 Test Instruments	173
4.5.4 Test Procedure	174
4.5.5 Deviation from Test Standard	174
4.5.6 EUT Operating Condition	174
4.5.7 Test Results	175
4.6 Frequency Stability Measurement	182

4.6.1	Limits of Frequency Stability Measurement	182
4.6.2	Test Setup.....	182
4.6.3	Test Instruments	182
4.6.4	Test Procedure	182
4.6.5	Deviation from Test Standard	182
4.6.6	EUT Operating Condition	182
4.6.7	Test Results	183
4.7	6dB Bandwidth Measurement	184
4.7.1	Limits of 6dB Bandwidth Measurement.....	184
4.7.2	Test Setup.....	184
4.7.3	Test Instruments	184
4.7.4	Test Procedure	184
4.7.5	Deviation from Test Standard	184
4.7.6	EUT Operating Condition	184
4.7.7	Test Results	185
5	Pictures of Test Arrangements.....	187
	Appendix – Information of the Testing Laboratories	188

Release Control Record

Issue No.	Description	Date Issued
RF180903E04-1	Original release.	Dec. 18, 2018

1 Certificate of Conformity

Product: Integrated Device

Brand: Technicolor

Test Model: TCHT2AA0

Sample Status: ENGINEERING SAMPLE

Applicant: Technicolor Connected Home USA LLC

Test Date: Sep. 27 to Oct. 15, 2018

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Dec. 18, 2018
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Dec. 18, 2018
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -15.47dB at 0.28672MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.6dB at 5150.00MHz, 5350.00MHz, 5470.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.33 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.10 dB
	6GHz ~ 18GHz	4.85 dB
	18GHz ~ 40GHz	5.24 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	Integrated Device
Brand	Technicolor
Test Model	TCHT2AA0
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from adapter or 4V from battery
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.72GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (20MHz): 11 802.11n (40MHz): 7 5GHz: 802.11a, 802.11n (20MHz), 802.11ac (20MHz): 25 802.11n (40MHz), 802.11ac (40MHz): 12 802.11ac (80MHz): 6
Output Power	2.4GHz: 303.119mW 5GHz: 5.18 ~ 5.24GHz: 249.626mW 5.26 ~ 5.32GHz: 250.195mW 5.50 ~ 5.72GHz: 250.201mW 5.745 ~ 5.825GHz: 313.358mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1, Battery x 1
Data Cable Supplied	NA

Note:

1. There are WLAN, Bluetooth, Zigbee and LTE technology used for the EUT.
2. The EUT contains certified 3G/LTE modular which FCC ID: QIPEMS31-X.
3. Simultaneously transmission condition.

Condition	Technology		
	1	WLAN (2.4GHz)	Zigbee
2	WLAN (5GHz)	Zigbee	LTE
3	Bluetooth	Zigbee	LTE

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT power needs to be supplied from one power adapter or battery, the information is as below table:

Adapter		
Brand	Model	Spec.
XHPSU-TC	37469780	Input: 100-120Vac, 50/60Hz, 0.7A Output: 12V, 1.5A DC output cable (Unshielded, 3m)
Battery		
Brand	Model	Spec.
GETAC	U46P313.00	4V, 2520mAh, 10.08Wh

5. For radiated emissions, the EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	Power from adapter
Mode B	Power from Battery

From the above modes, the worst case was found in **Mode A**. Therefore only the test data of the mode was recorded in this report.

6. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (20MHz)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (40MHz)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (20MHz)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (40MHz)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (20MHz)	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
802.11ac (40MHz)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
802.11ac (80MHz)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX

Note:

- The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

7. The antennas provided to the EUT, please refer to the following table:

WLAN & BT Antenna Spec.					
Antenna No.	Gain(dBi) Including cable loss	Frequency range (MHz)	Antenna Type	Antenna Connector	Cable Length (mm)
WiFi 1 & BT (Ant 2)	3.79 (BT)	2400~2500	PCB	i-pex(MHF)	130 +/-2
	Refer to below table	2400~2500 5150~5250 5250~5350 5470~5725 5725~5850			
WiFi 2 (Ant 1)	Refer to below able	2400~2500 5150~5250 5250~5350 5470~5725 5725~5850	PCB	i-pex(MHF)	115 +/-2
Zigbee Antenna Spec.					
Antenna No.	Gain(dBi) Including cable loss	Frequency range (MHz)	Antenna Type	Antenna Connector	Cable Length (mm)
Zigbee	4.50	2400~2500	PCB	i-pex(MHF)	60 +/-2
LTE Antenna Spec.					
Antenna No.	Gain(dBi) Including cable loss	Frequency range (MHz)	Antenna Type	Antenna Connector	Cable Length (mm)
LTE	1.10	700~900	PCB	i-pex(MHF)	85 +/-2
	2.4	1700~2150			

8. The detail information of antenna gain as below table:

2.4GHz				
Channel (MHz)	SISO 1S1T Ant 1 (dBi)	SISO 1S1T Ant 2 (dBi)	CDD mode for power gain 1S2T (1&2) (dBi)	CDD mode for PSD gain 1S2T (1&2) (dBi)
2412	2.37	3.79	3.79	5.75
2422	2.48	3.63	3.63	5.64
2437	2.44	3.56	3.56	5.62
2452	2.49	3.42	3.42	5.52
2462	2.50	3.33	3.33	5.35
5GHz				
Channel (MHz)	SISO 1S1T Ant 1 (dBi)	SISO 1S1T Ant 2 (dBi)	CDD mode for power gain 1S2T (1&2) (dBi)	CDD mode for PSD gain 1S2T (1&2) (dBi)
5180	3.21	4.23	4.23	5.82
5190	3.20	4.07	4.07	5.80
5200	3.10	4.00	4.00	5.74
5210	3.15	3.72	3.72	5.62
5230	2.98	3.72	3.72	5.55
5240	3.01	3.74	3.74	5.56
5250	3.00	3.57	3.57	5.48
5260	2.85	3.54	3.54	5.45
5270	2.98	3.45	3.45	5.45
5290	2.89	3.24	3.24	5.31
5300	2.95	3.20	3.20	5.24
5310	2.97	3.09	3.09	5.32
5320	3.17	3.20	3.20	5.54
5500	2.75	2.55	2.75	5.06
5510	2.80	2.53	2.80	4.99
5530	2.70	2.73	2.73	5.17
5550	2.66	2.87	2.87	5.10
5570	2.23	2.38	2.38	4.71
5580	2.16	2.45	2.45	4.73
5590	2.16	2.54	2.54	4.68
5600	2.38	2.49	2.49	4.58
5610	2.46	2.40	2.46	4.60
5620	2.44	2.42	2.44	4.71
5630	2.36	2.46	2.46	4.77
5670	2.52	2.49	2.52	5.12
5690	2.55	2.60	2.60	5.28
5700	2.54	2.57	2.57	5.24
5710	2.67	2.59	2.67	5.26
5720	2.71	2.70	2.71	5.28
5745	2.79	2.78	2.79	5.27
5755	2.95	2.87	2.95	5.28
5775	3.00	3.08	3.08	5.33
5785	2.86	2.96	2.96	5.10
5795	2.89	2.94	2.94	5.10
5825	3.13	3.22	3.22	5.24

9. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (20MHz), 802.11ac (20MHz):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz), 802.11ac (40MHz):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (80MHz):

Channel	Frequency
42	5210 MHz

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (20MHz), 802.11ac (20MHz):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (40MHz), 802.11ac (40MHz):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (80MHz):

Channel	Frequency
58	5290 MHz

FOR 5500 ~ 5720MHz

12 channels are provided for 802.11a, 802.11n (20MHz), 802.11ac (20MHz):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (40MHz), 802.11ac (40MHz):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (80MHz):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (20MHz), 802.11ac (20MHz):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (40MHz), 802.11ac (40MHz):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (80MHz):

Channel	Frequency
155	5775 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

- The EUT had been pre-tested on the positioned of stand and wall-mount. The worst case was found when positioned on stand.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (40MHz)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (80MHz)		42	42	OFDM	BPSK	29.3
802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6
802.11ac (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	6.5
802.11ac (40MHz)		54 to 62	54, 62	OFDM	BPSK	13.5
802.11ac (80MHz)		58	58	OFDM	BPSK	29.3
802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	BPSK	6
802.11ac (20MHz)		100 to 144	100, 116, 140, 144	OFDM	BPSK	6.5
802.11ac (40MHz)		102 to 142	102, 110, 134, 142	OFDM	BPSK	13.5
802.11ac (80MHz)		106 to 138	106, 122, 138	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (40MHz)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (80MHz)		155	155	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (40MHz)	5180-5240	38 to 46	151	OFDM	BPSK	13.5
	5260-5320	54 to 62				
	5500-5720	102 to 142				
	5745-5825	151 to 159				

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (40MHz)	5180-5240	38 to 46	151	OFDM	BPSK	13.5
	5260-5320	54 to 62				
	5500-5720	102 to 142				
	5745-5825	151 to 159				

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (40MHz)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (80MHz)		42	42	OFDM	BPSK	29.3
802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6
802.11ac (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	6.5
802.11ac (40MHz)		54 to 62	54, 62	OFDM	BPSK	13.5
802.11ac (80MHz)		58	58	OFDM	BPSK	29.3
802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	BPSK	6
802.11ac (20MHz)		100 to 144	100, 116, 140, 144	OFDM	BPSK	6.5
802.11ac (40MHz)		102 to 142	102, 110, 134, 142	OFDM	BPSK	13.5
802.11ac (80MHz)		106 to 138	106, 122, 138	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (40MHz)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (80MHz)		155	155	OFDM	BPSK	29.3

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	22deg. C, 65%RH	120Vac, 60Hz	Frank Chuang
RE<1G	23deg. C, 67%RH	120Vac, 60Hz	Rey Chen
PLC	25deg. C, 75%RH	120Vac, 60Hz	Frank Chuang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11a: Duty cycle = $20.003 \text{ ms} / 20.183 \text{ ms} = 0.991$

802.11ac (20MHz): Duty cycle = $18.481 \text{ ms} / 18.663 \text{ ms} = 0.99$

802.11ac (40MHz): Duty cycle = $8.933 \text{ ms} / 9.06 \text{ ms} = 0.986$

802.11ac (80MHz): Duty cycle = $4.143 \text{ ms} / 4.275 \text{ ms} = 0.969$, Duty factor = $10 * \log(1/0.969) = 0.14$

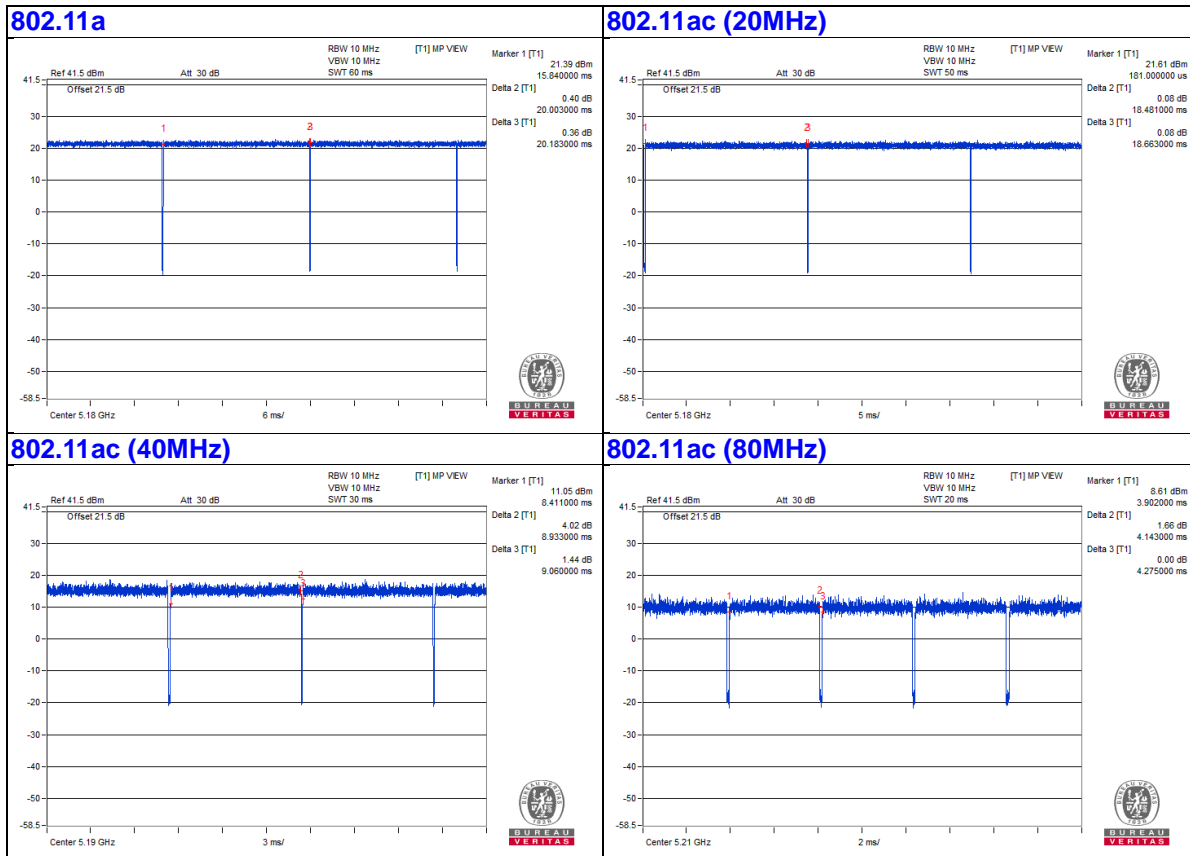

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Sim Card	R&S	CRT-Z3	NA	NA	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	3	No	0	Supplied by client

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

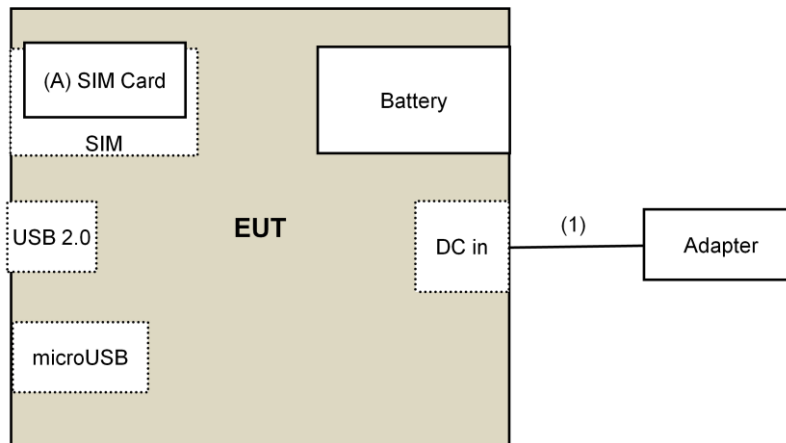

Note: For USB / MicroUSB port are only provide engineering debug used.

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)
KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBuV/m)	AV:54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 12, 2018	July 11, 2019
Pre-Amplifier EMCI	EMC001340	980142	Feb. 09, 2018	Feb. 08, 2019
Loop Antenna(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001	Jan. 15, 2018	Jan. 14, 2019
RF Cable	NA	LOOPCAB-002	Jan. 15, 2018	Jan. 14, 2019
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	May 05, 2018	May 04, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 29, 2017	Nov. 28, 2018
RF Cable	8D	966-3-1	Mar. 20, 2018	Mar. 19, 2019
RF Cable	8D	966-3-2	Mar. 20, 2018	Mar. 19, 2019
RF Cable	8D	966-3-3	Mar. 20, 2018	Mar. 19, 2019
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 27, 2018	Sep. 26, 2019
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Dec. 12, 2017	Dec. 11, 2018
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-1200	160922	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-2000	150317	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-5000	150322	Jan. 29, 2018	Jan. 28, 2019
Spectrum Analyzer Keysight	N9030A	MY54490679	July 23, 2018	July 22, 2019
Pre-Amplifier EMCI	EMC184045SE	980386	Jan. 29, 2018	Jan. 28, 2019
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 14, 2017	Dec. 13, 2018
RF Cable	EMC102-KM-KM-1200	160924	Jan. 29, 2018	Jan. 28, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
AC Power Source Extech Electronics	6205	1440452	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 10, 2018	Jan. 09, 2019
True RMS Clamp Meter FLUKE	325	31130711WS	May 22, 2018	May 21, 2019

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The CANADA Site Registration No. is 20331-1
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Sep. 27 to Oct. 15, 2018

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

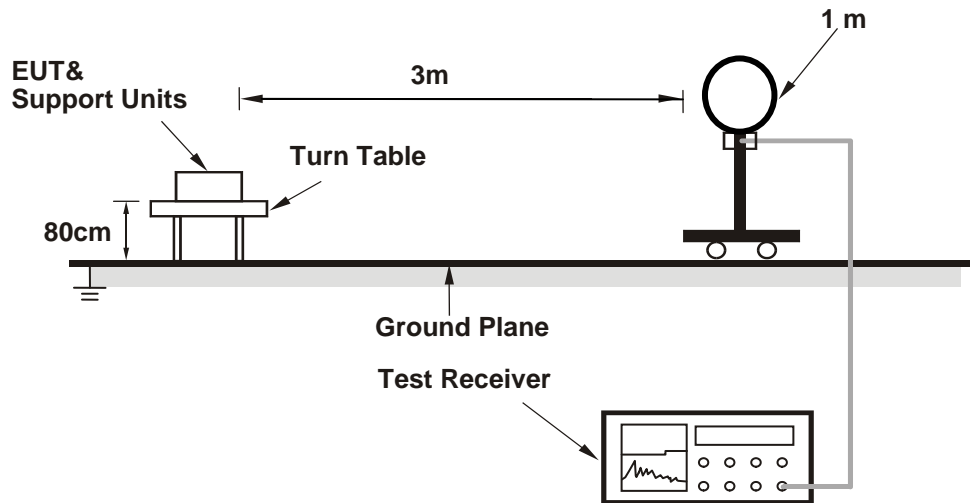

For Radiated emission 30MHz to 1GHz

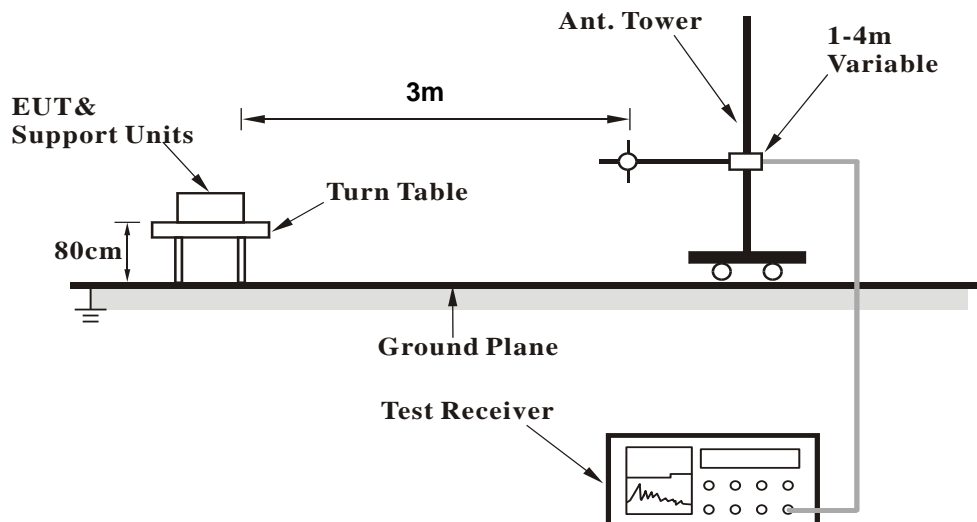

For Radiated emission above 1GHz

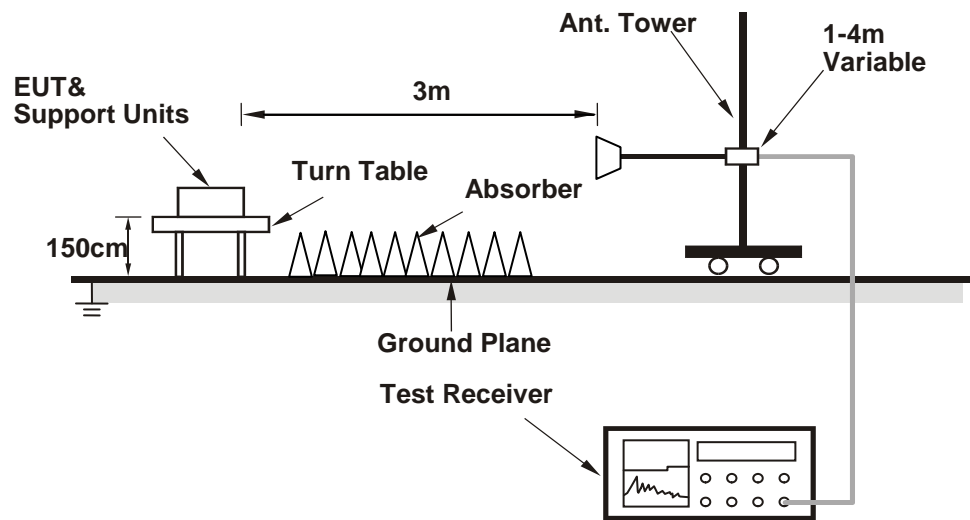

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- a. Placed the EUT on the testing table.
- b. Controlling software (QDART Version:3.0.297.0) has been activated to set the EUT on specific status.

4.1.7 Test Results (Bandedge)

Above 1GHz Data:


802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.6 PK	74.0	-7.4	2.40 H	183	64.0	2.6
2	5150.00	52.4 AV	54.0	-1.6	2.40 H	183	49.8	2.6
3	*5180.00	116.5 PK			2.40 H	183	114.0	2.5
4	*5180.00	105.8 AV			2.40 H	183	103.3	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

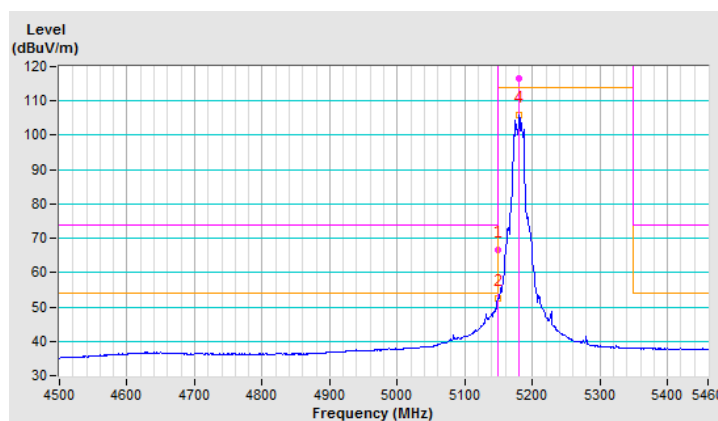


CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.2 PK	74.0	-10.8	2.12 V	93	60.6	2.6
2	5150.00	50.3 AV	54.0	-3.7	2.12 V	93	47.7	2.6
3	*5180.00	113.7 PK			2.12 V	93	111.2	2.5
4	*5180.00	103.8 AV			2.12 V	93	101.3	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

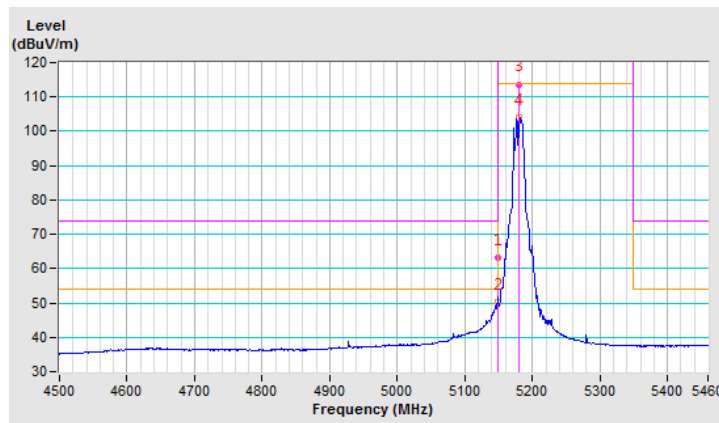


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	2.01 H	167	57.0	2.6
2	5150.00	47.0 AV	54.0	-7.0	2.01 H	167	44.4	2.6
3	*5200.00	117.3 PK			2.01 H	167	114.9	2.4
4	*5200.00	106.7 AV			2.01 H	167	104.3	2.4
5	5350.00	49.9 PK	74.0	-24.1	2.01 H	167	47.6	2.3
6	5350.00	37.2 AV	54.0	-16.8	2.01 H	167	34.9	2.3
7	5392.10	50.2 PK	74.0	-23.8	2.01 H	167	47.7	2.5
8	5392.10	37.5 AV	54.0	-16.5	2.01 H	167	35.0	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

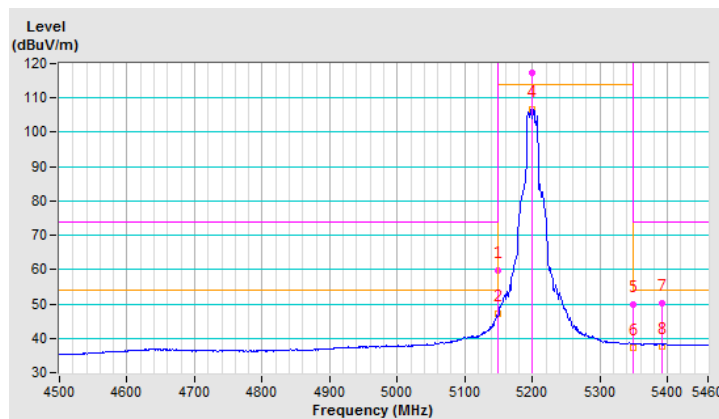


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.6 PK	74.0	-12.4	1.99 V	95	59.0	2.6
2	5150.00	46.7 AV	54.0	-7.3	1.99 V	95	44.1	2.6
3	*5200.00	116.5 PK			1.99 V	95	114.1	2.4
4	*5200.00	106.4 AV			1.99 V	95	104.0	2.4
5	5350.00	47.4 PK	74.0	-26.6	1.99 V	95	45.1	2.3
6	5350.00	36.7 AV	54.0	-17.3	1.99 V	95	34.4	2.3
7	5392.10	50.4 PK	74.0	-23.6	1.99 V	95	47.9	2.5
8	5392.10	36.9 AV	54.0	-17.1	1.99 V	95	34.4	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

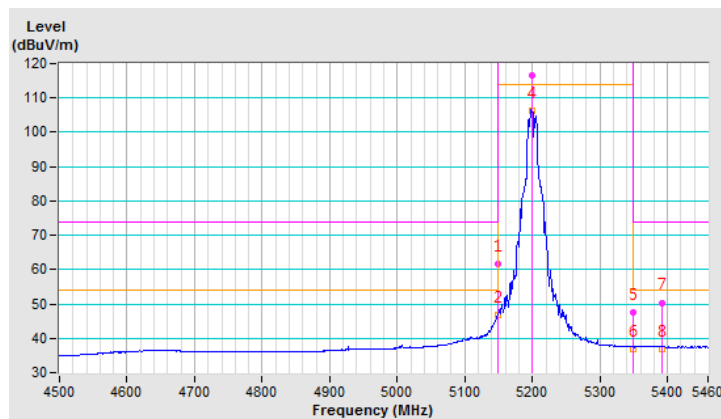


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.9 PK			1.95 H	172	115.7	2.2
2	*5240.00	107.7 AV			1.95 H	172	105.5	2.2
3	5350.00	50.0 PK	74.0	-24.0	1.95 H	172	47.7	2.3
4	5350.00	38.9 AV	54.0	-15.1	1.95 H	172	36.6	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

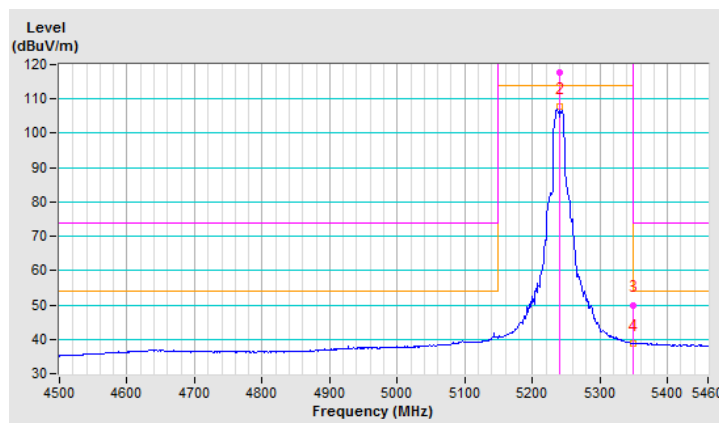


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	116.7 PK			2.12 V	87	114.5	2.2
2	*5240.00	106.9 AV			2.12 V	87	104.7	2.2
3	5350.00	50.9 PK	74.0	-23.1	2.12 V	87	48.6	2.3
4	5350.00	37.9 AV	54.0	-16.1	2.12 V	87	35.6	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

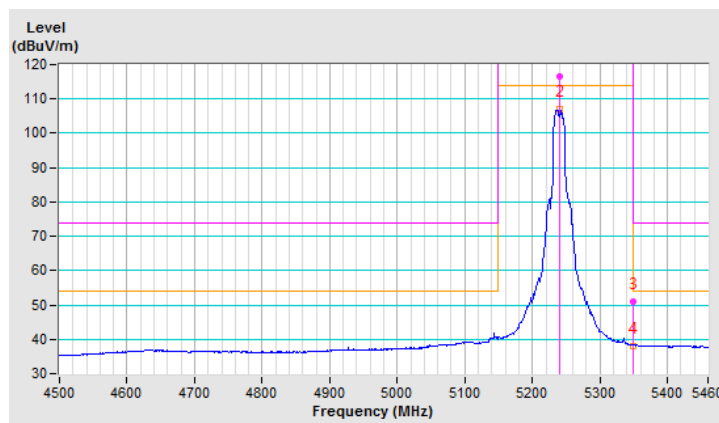


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.0 PK	74.0	-24.0	2.09 H	166	47.4	2.6
2	5150.00	39.3 AV	54.0	-14.7	2.09 H	166	36.7	2.6
3	*5260.00	117.2 PK			2.09 H	166	115.1	2.1
4	*5260.00	107.5 AV			2.09 H	166	105.4	2.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

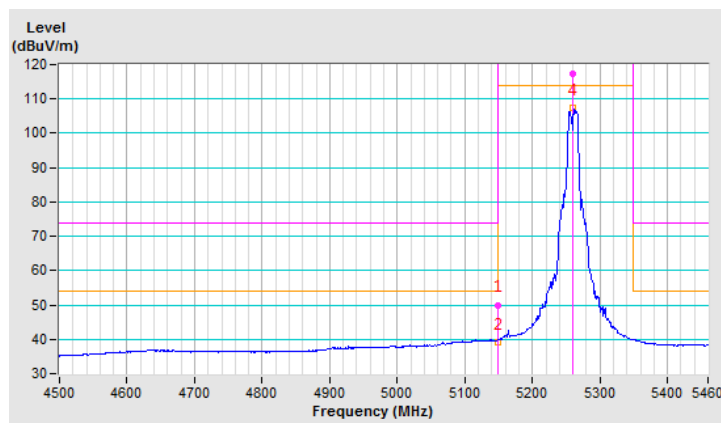


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	49.4 PK	74.0	-24.6	2.08 V	91	46.8	2.6
2	5150.00	37.5 AV	54.0	-16.5	2.08 V	91	34.9	2.6
3	*5260.00	115.8 PK			2.08 V	91	113.7	2.1
4	*5260.00	106.3 AV			2.08 V	91	104.2	2.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

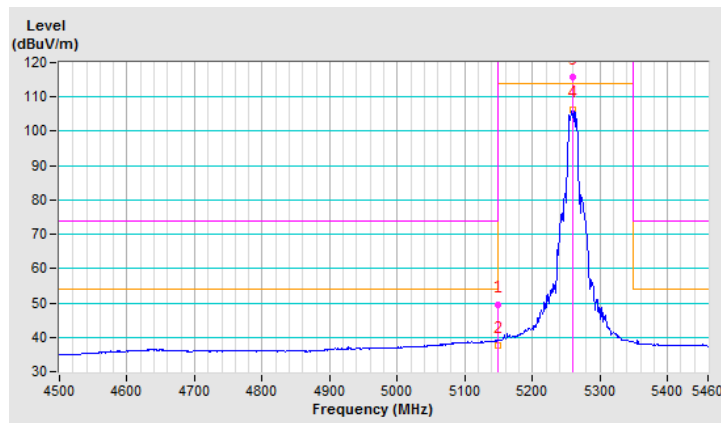


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.3 PK	74.0	-23.7	2.25 H	158	47.7	2.6
2	5150.00	38.6 AV	54.0	-15.4	2.25 H	158	36.0	2.6
3	*5300.00	117.1 PK			2.25 H	158	114.9	2.2
4	*5300.00	107.3 AV			2.25 H	158	105.1	2.2
5	5350.00	57.9 PK	74.0	-16.1	2.25 H	158	55.6	2.3
6	5350.00	45.6 AV	54.0	-8.4	2.25 H	158	43.3	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

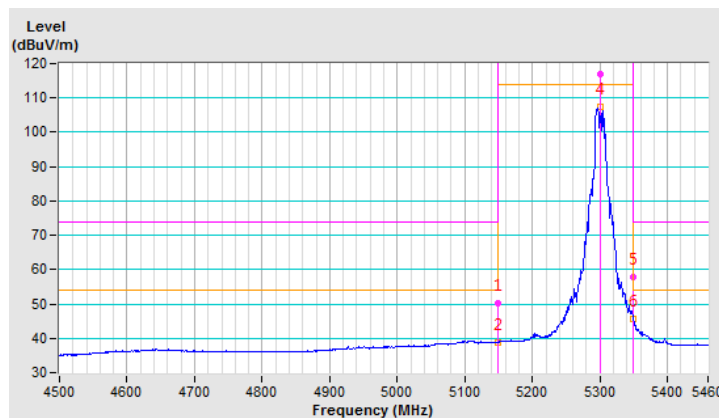


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	49.1 PK	74.0	-24.9	2.12 V	72	46.5	2.6
2	5150.00	38.3 AV	54.0	-15.7	2.12 V	72	35.7	2.6
3	*5300.00	116.9 PK			2.12 V	72	114.7	2.2
4	*5300.00	106.5 AV			2.12 V	72	104.3	2.2
5	5350.00	58.7 PK	74.0	-15.3	2.12 V	72	56.4	2.3
6	5350.00	45.8 AV	54.0	-8.2	2.12 V	72	43.5	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

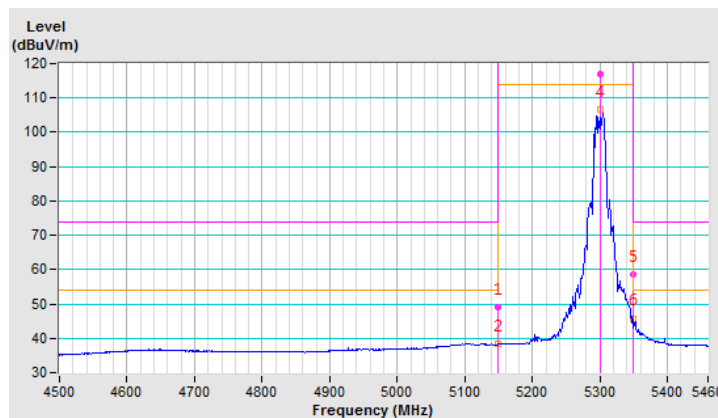


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	114.9 PK			1.86 H	162	112.6	2.3
2	*5320.00	104.8 AV			1.86 H	162	102.5	2.3
3	5350.00	68.8 PK	74.0	-5.2	1.86 H	162	66.5	2.3
4	5350.00	52.4 AV	54.0	-1.6	1.86 H	162	50.1	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

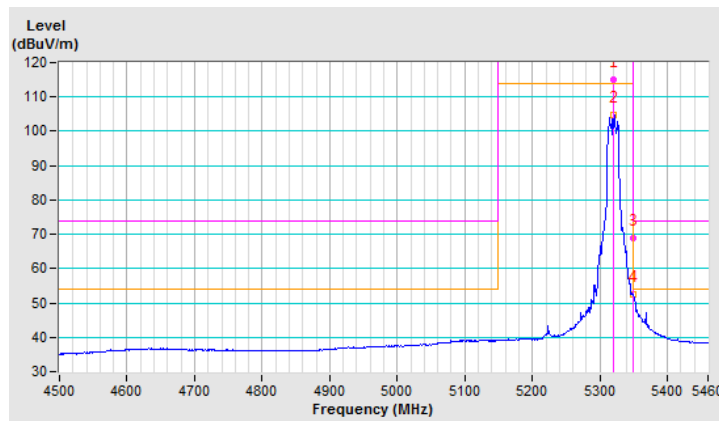


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	113.9 PK			2.11 V	79	111.6	2.3
2	*5320.00	103.3 AV			2.11 V	79	101.0	2.3
3	5350.00	65.1 PK	74.0	-8.9	2.11 V	79	62.8	2.3
4	5350.00	50.5 AV	54.0	-3.5	2.11 V	79	48.2	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

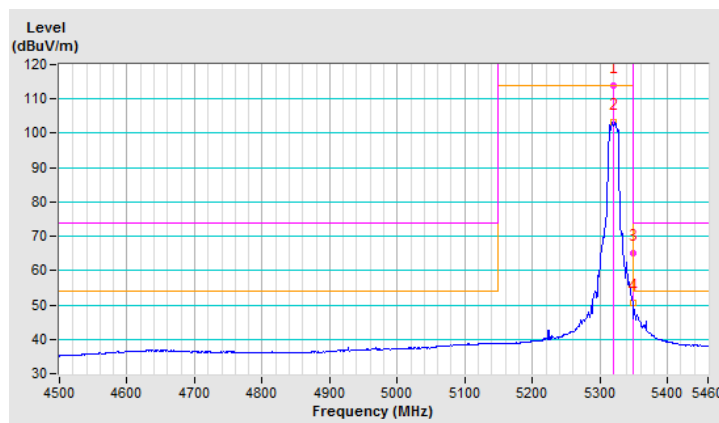


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5451.00	56.4 PK	74.0	-17.6	1.75 H	149	53.7	2.7
2	5451.00	46.0 AV	54.0	-8.0	1.75 H	149	43.3	2.7
3	#5470.00	66.6 PK	68.2	-1.6	1.76 H	149	64.0	2.6
4	*5500.00	112.8 PK			1.76 H	149	110.3	2.5
5	*5500.00	103.2 AV			1.76 H	149	100.7	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

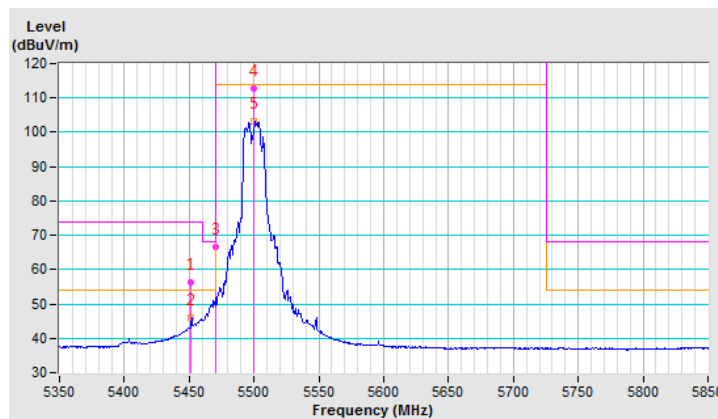


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5459.20	54.5 PK	74.0	-19.5	2.35 V	170	51.8	2.7
2	5459.20	42.6 AV	54.0	-11.4	2.35 V	170	39.9	2.7
3	#5470.00	64.3 PK	68.2	-3.9	2.35 V	170	61.7	2.6
4	*5500.00	111.2 PK			2.35 V	170	108.7	2.5
5	*5500.00	101.4 AV			2.35 V	170	98.9	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

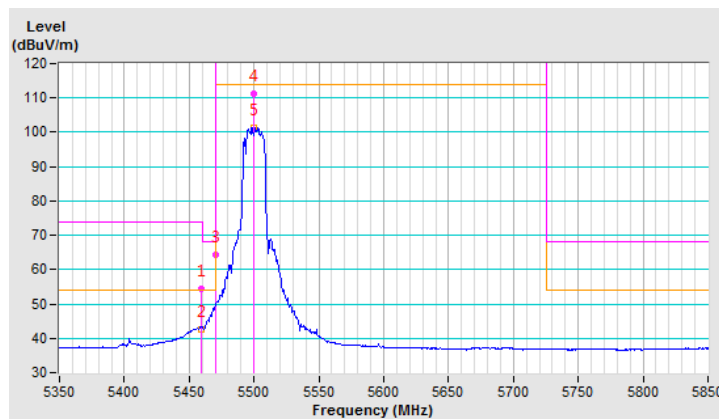


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5404.00	48.5 PK	74.0	-25.5	2.00 H	167	46.0	2.5
2	5404.00	36.9 AV	54.0	-17.1	2.00 H	167	34.4	2.5
3	#5470.00	49.1 PK	68.2	-19.1	2.00 H	167	46.5	2.6
4	*5580.00	117.2 PK			2.00 H	167	114.4	2.8
5	*5580.00	106.2 AV			2.00 H	167	103.4	2.8
6	#5725.00	50.0 PK	68.2	-18.2	2.00 H	167	47.1	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

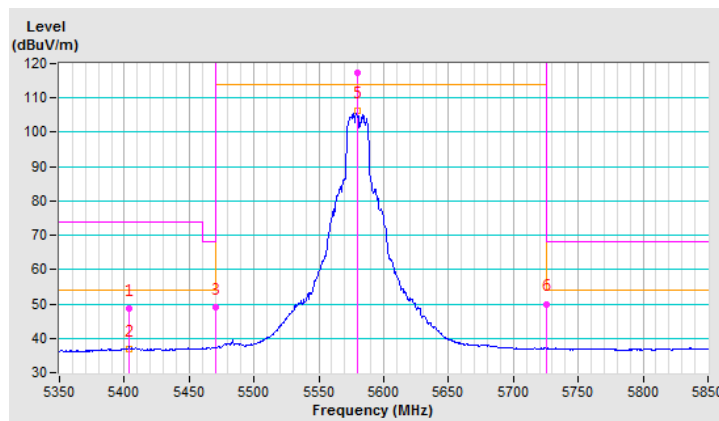


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5402.40	49.3 PK	74.0	-24.7	2.28 V	169	46.8	2.5
2	5402.40	37.6 AV	54.0	-16.4	2.28 V	169	35.1	2.5
3	#5470.00	48.8 PK	68.2	-19.4	2.28 V	169	46.2	2.6
4	*5580.00	114.9 PK			2.28 V	169	112.1	2.8
5	*5580.00	104.5 AV			2.28 V	169	101.7	2.8
6	#5725.00	49.0 PK	68.2	-19.2	2.28 V	169	46.1	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

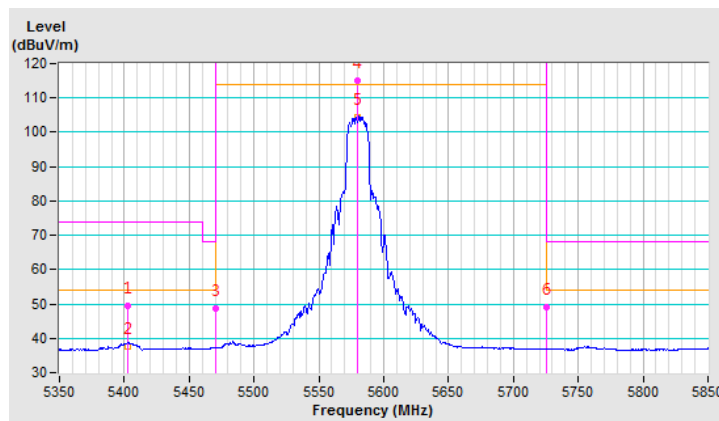


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	113.6 PK			3.35 H	169	110.7	2.9
2	*5700.00	103.1 AV			3.35 H	169	100.2	2.9
3	#5725.00	66.5 PK	68.2	-1.7	3.35 H	169	63.6	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

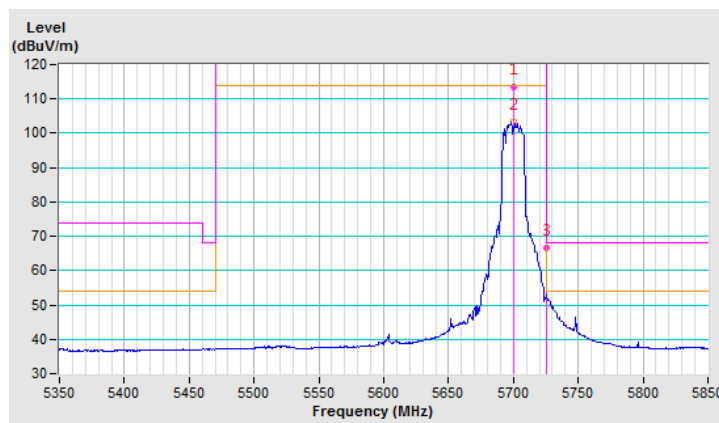


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	110.7 PK			2.12 V	169	107.8	2.9
2	*5700.00	100.0 AV			2.12 V	169	97.1	2.9
3	#5725.00	61.3 PK	68.2	-6.9	2.12 V	169	58.4	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

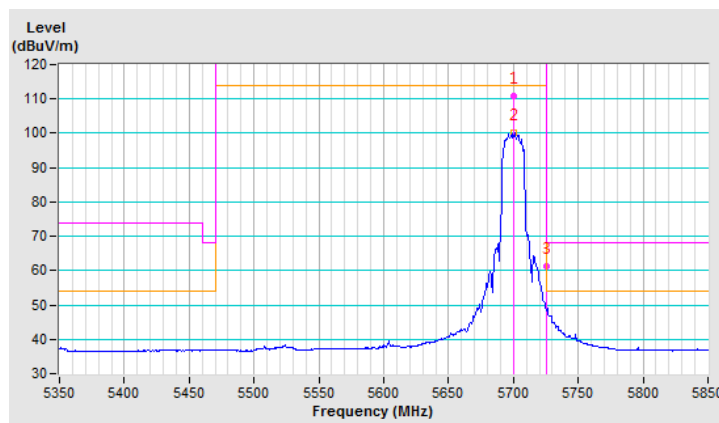


CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5365.90	48.2 PK	74.0	-25.8	2.95 H	172	45.8	2.4
2	5365.90	35.1 AV	54.0	-18.9	2.95 H	172	32.7	2.4
3	#5470.00	47.7 PK	68.2	-20.5	2.95 H	172	45.1	2.6
4	*5720.00	116.0 PK			2.95 H	172	113.1	2.9
5	*5720.00	105.6 AV			2.95 H	172	102.7	2.9
6	#5850.00	49.2 PK	68.2	-19.0	2.95 H	172	45.9	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

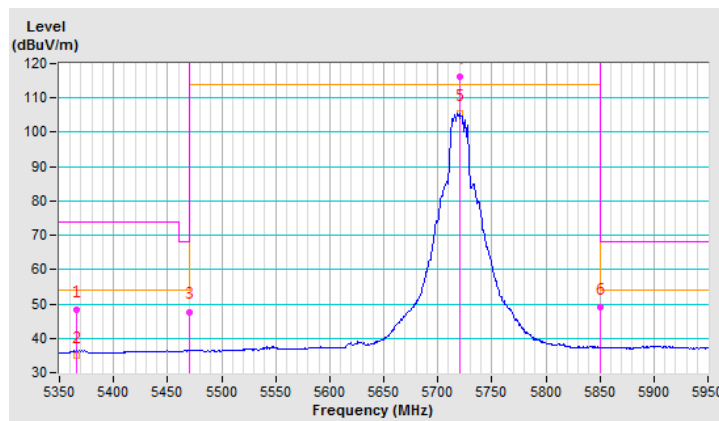


CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5370.00	48.0 PK	74.0	-26.0	2.10 V	172	45.6	2.4
2	5370.00	36.3 AV	54.0	-17.7	2.10 V	172	33.9	2.4
3	#5470.00	47.4 PK	68.2	-20.8	2.10 V	172	44.8	2.6
4	*5720.00	112.4 PK			2.10 V	172	109.5	2.9
5	*5720.00	102.8 AV			2.10 V	172	99.9	2.9
6	#5850.00	47.9 PK	68.2	-20.3	2.10 V	172	44.6	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

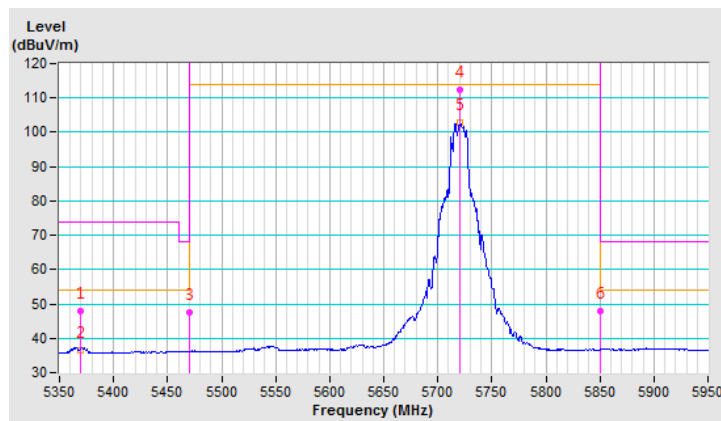


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5596.57	50.9 PK	68.2	-17.3	1.56 H	192	48.1	2.8
2	*5745.00	114.9 PK			1.56 H	192	112.0	2.9
3	*5745.00	105.2 AV			1.56 H	192	102.3	2.9
4	#6005.67	50.0 PK	68.2	-18.2	1.56 H	192	46.8	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

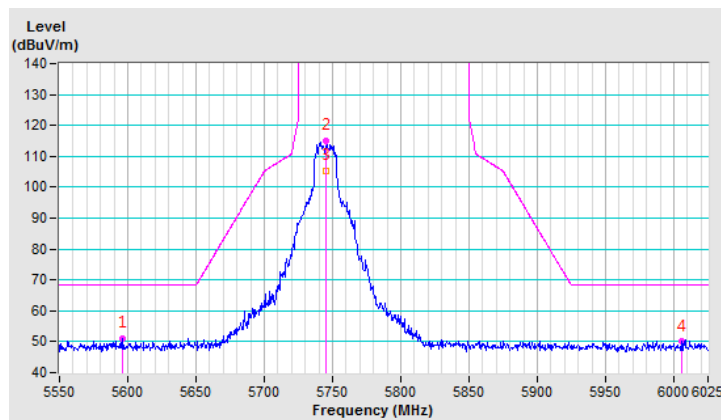


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.34	50.8 PK	68.2	-17.4	1.98 V	63	48.1	2.7
2	*5745.00	115.2 PK			1.98 V	63	112.3	2.9
3	*5745.00	105.6 AV			1.98 V	63	102.7	2.9
4	#5936.52	50.1 PK	68.2	-18.1	1.98 V	63	46.7	3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

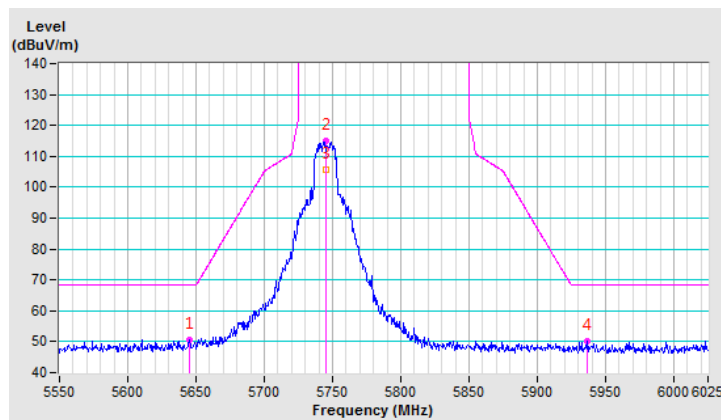


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5633.60	50.8 PK	68.2	-17.4	1.55 H	193	48.0	2.8
2	*5785.00	114.2 PK			1.55 H	193	111.1	3.1
3	*5785.00	104.5 AV			1.55 H	193	101.4	3.1
4	#5944.57	50.1 PK	68.2	-18.1	1.55 H	193	46.8	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

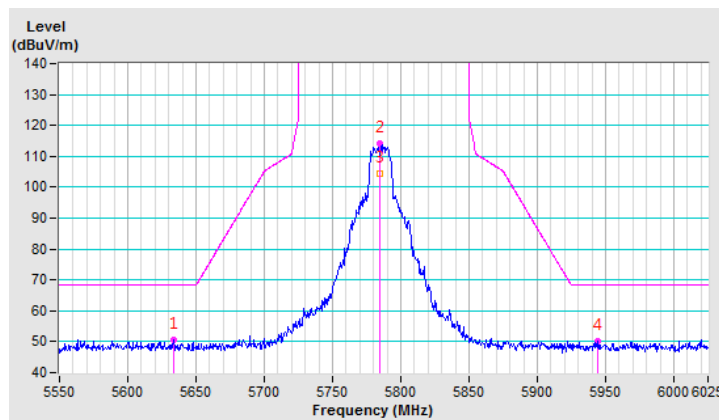


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5588.63	51.4 PK	68.2	-16.8	1.99 V	61	48.6	2.8
2	*5785.00	115.3 PK			1.99 V	61	112.2	3.1
3	*5785.00	105.4 AV			1.99 V	61	102.3	3.1
4	#6003.30	50.4 PK	68.2	-17.8	1.99 V	61	47.2	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

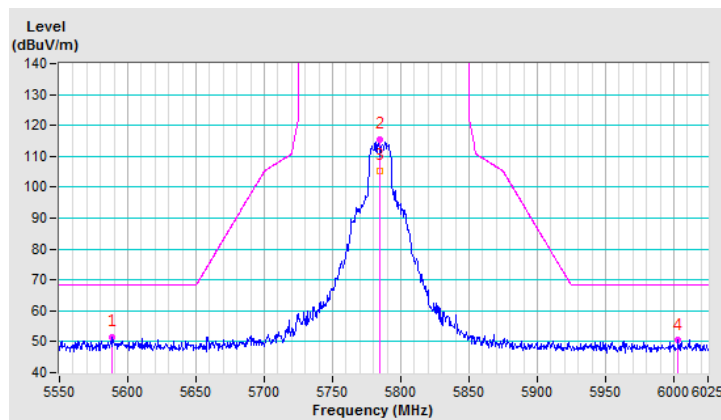


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5590.72	50.1 PK	68.2	-18.1	1.51 H	191	47.3	2.8
2	*5825.00	114.6 PK			1.51 H	191	111.4	3.2
3	*5825.00	104.8 AV			1.51 H	191	101.6	3.2
4	#5993.61	50.2 PK	68.2	-18.0	1.51 H	191	47.0	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

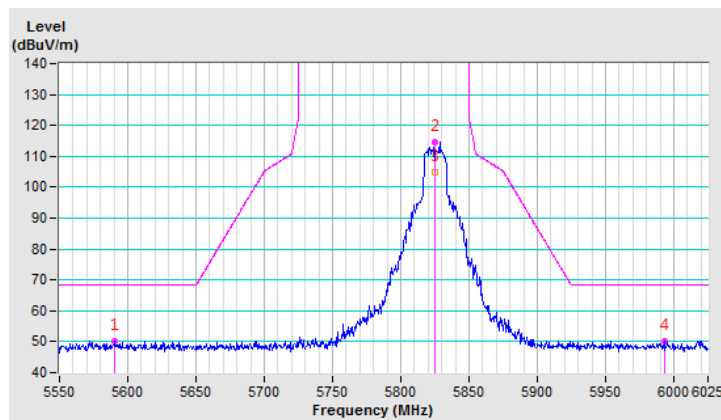


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5633.03	51.8 PK	68.2	-16.4	1.97 V	59	49.0	2.8
2	*5825.00	114.8 PK			1.97 V	59	111.6	3.2
3	*5825.00	105.2 AV			1.97 V	59	102.0	3.2
4	#5956.62	51.2 PK	68.2	-17.0	1.97 V	59	48.0	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

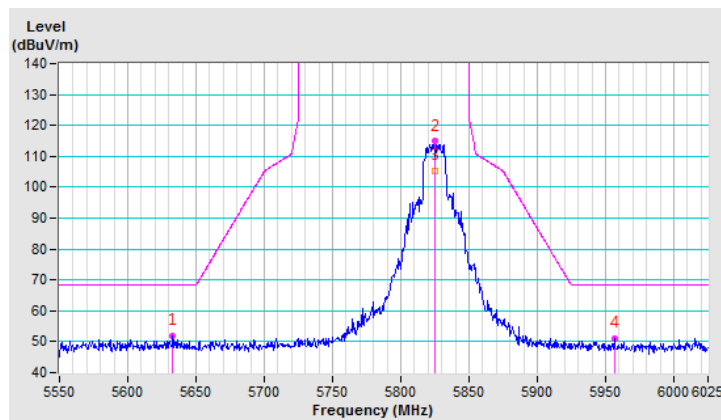


802.11ac (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	2.13 H	158	62.5	2.6
2	5150.00	52.4 AV	54.0	-1.6	2.13 H	158	49.8	2.6
3	*5180.00	114.5 PK			2.13 H	158	112.0	2.5
4	*5180.00	104.3 AV			2.13 H	158	101.8	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

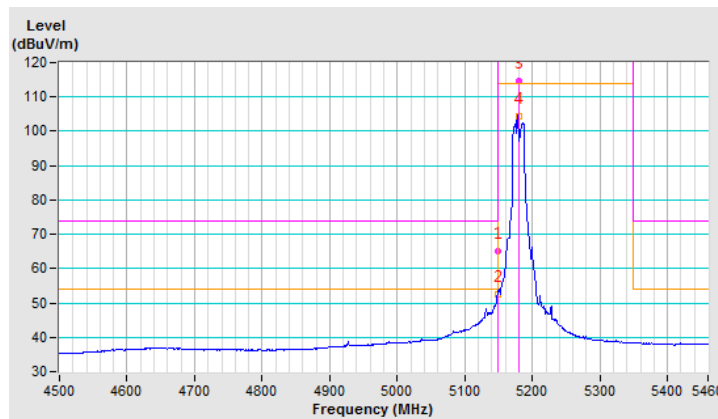


CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.5 PK	74.0	-10.5	1.02 V	172	60.9	2.6
2	5150.00	50.3 AV	54.0	-3.7	1.02 V	172	47.7	2.6
3	*5180.00	112.2 PK			1.02 V	172	109.7	2.5
4	*5180.00	102.7 AV			1.02 V	172	100.2	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

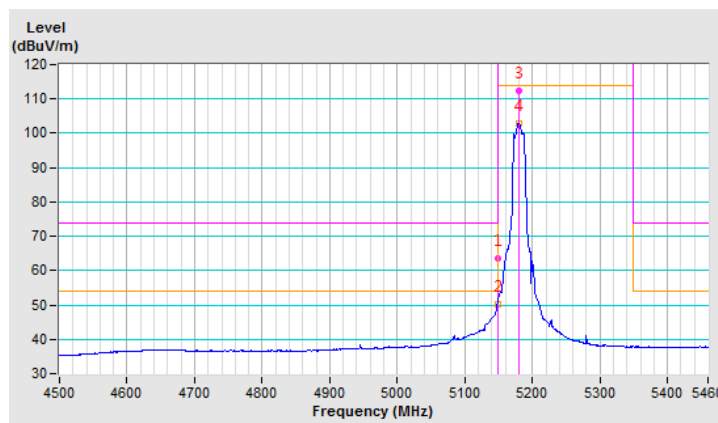


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	2.18 H	157	56.2	2.6
2	5150.00	48.8 AV	54.0	-5.2	2.18 H	157	46.2	2.6
3	*5200.00	117.8 PK			2.18 H	157	115.4	2.4
4	*5200.00	107.6 AV			2.18 H	157	105.2	2.4
5	5350.00	51.4 PK	74.0	-22.6	2.18 H	157	49.1	2.3
6	5350.00	37.6 AV	54.0	-16.4	2.18 H	157	35.3	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

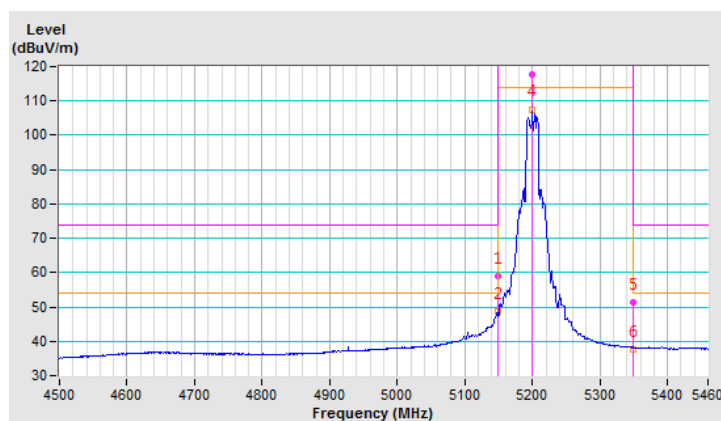


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.6 PK	74.0	-12.4	1.02 V	173	59.0	2.6
2	5150.00	47.0 AV	54.0	-7.0	1.02 V	173	44.4	2.6
3	*5200.00	115.7 PK			1.02 V	173	113.3	2.4
4	*5200.00	105.8 AV			1.02 V	173	103.4	2.4
5	5350.00	50.2 PK	74.0	-23.8	1.02 V	173	47.9	2.3
6	5350.00	37.3 AV	54.0	-16.7	1.02 V	173	35.0	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

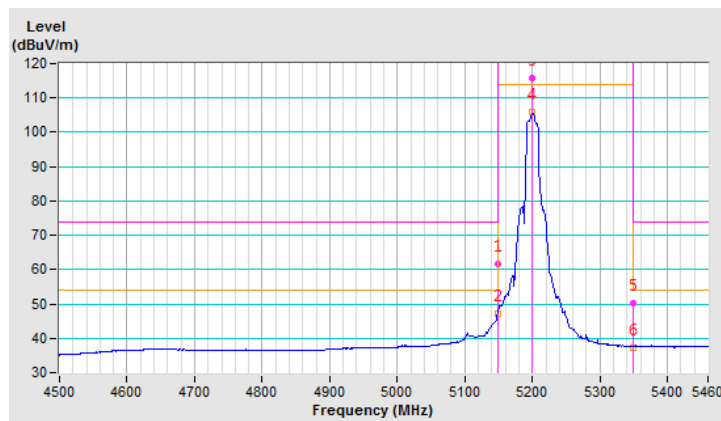


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.7 PK			2.04 H	157	115.5	2.2
2	*5240.00	107.9 AV			2.04 H	157	105.7	2.2
3	5350.00	50.2 PK	74.0	-23.8	2.04 H	157	47.9	2.3
4	5350.00	38.2 AV	54.0	-15.8	2.04 H	157	35.9	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

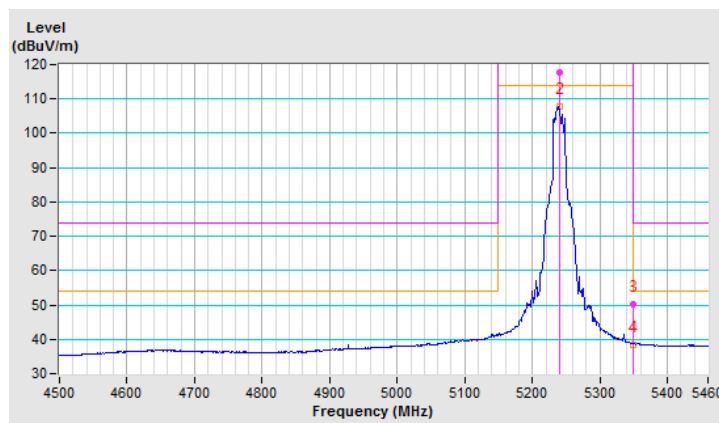


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.3 PK			1.02 V	173	113.1	2.2
2	*5240.00	105.4 AV			1.02 V	173	103.2	2.2
3	5350.00	50.1 PK	74.0	-23.9	1.02 V	173	47.8	2.3
4	5350.00	37.5 AV	54.0	-16.5	1.02 V	173	35.2	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

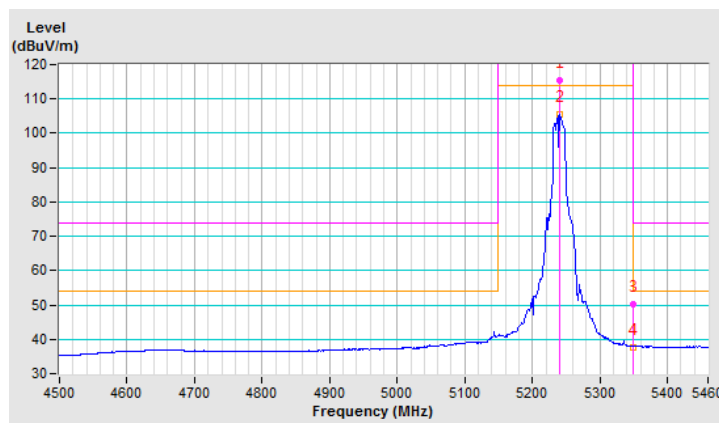


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	52.1 PK	74.0	-21.9	2.10 H	158	49.5	2.6
2	5150.00	39.3 AV	54.0	-14.7	2.10 H	158	36.7	2.6
3	*5260.00	117.7 PK			2.10 H	158	115.6	2.1
4	*5260.00	108.0 AV			2.10 H	158	105.9	2.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

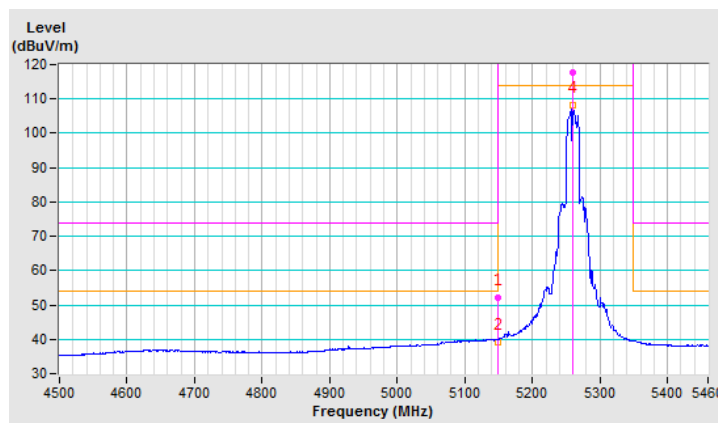


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.7 PK	74.0	-23.3	1.03 V	172	48.1	2.6
2	5150.00	39.0 AV	54.0	-15.0	1.03 V	172	36.4	2.6
3	*5260.00	114.9 PK			1.03 V	172	112.8	2.1
4	*5260.00	105.1 AV			1.03 V	172	103.0	2.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

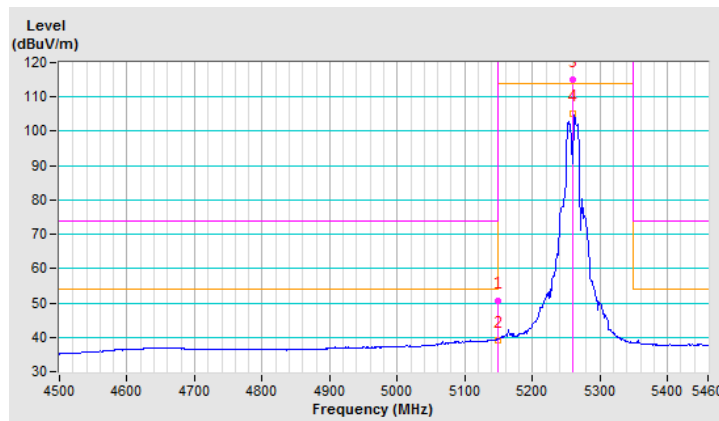


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.9 PK	74.0	-23.1	2.09 H	159	48.3	2.6
2	5150.00	39.6 AV	54.0	-14.4	2.09 H	159	37.0	2.6
3	*5300.00	117.8 PK			2.09 H	159	115.6	2.2
4	*5300.00	107.6 AV			2.09 H	159	105.4	2.2
5	5350.00	59.2 PK	74.0	-14.8	2.09 H	159	56.9	2.3
6	5350.00	46.8 AV	54.0	-7.2	2.09 H	159	44.5	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

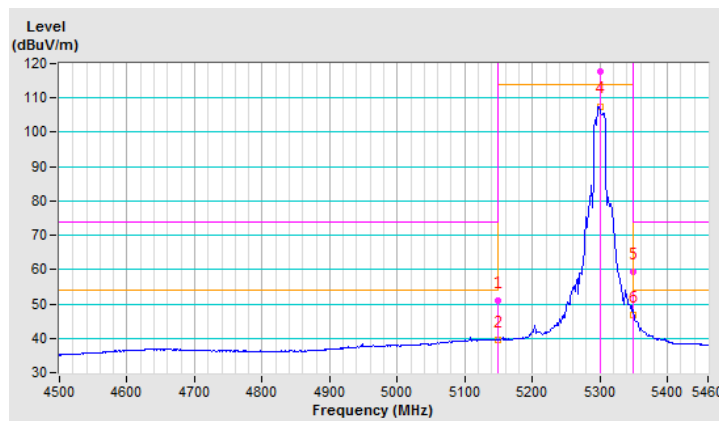


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.2 PK	74.0	-23.8	2.00 V	178	47.6	2.6
2	5150.00	38.2 AV	54.0	-15.8	2.00 V	178	35.6	2.6
3	*5300.00	115.6 PK			2.00 V	178	113.4	2.2
4	*5300.00	105.4 AV			2.00 V	178	103.2	2.2
5	5350.00	56.8 PK	74.0	-17.2	2.00 V	178	54.5	2.3
6	5350.00	45.0 AV	54.0	-9.0	2.00 V	178	42.7	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

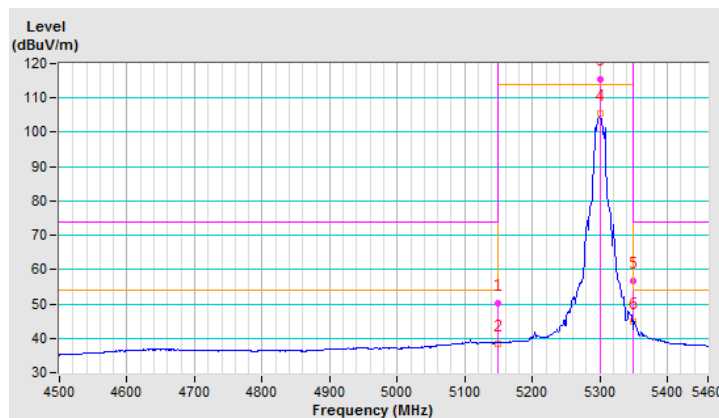


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	115.0 PK			2.04 H	158	112.7	2.3
2	*5320.00	104.8 AV			2.04 H	158	102.5	2.3
3	5350.00	66.8 PK	74.0	-7.2	2.04 H	158	64.5	2.3
4	5350.00	52.4 AV	54.0	-1.6	2.04 H	158	50.1	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

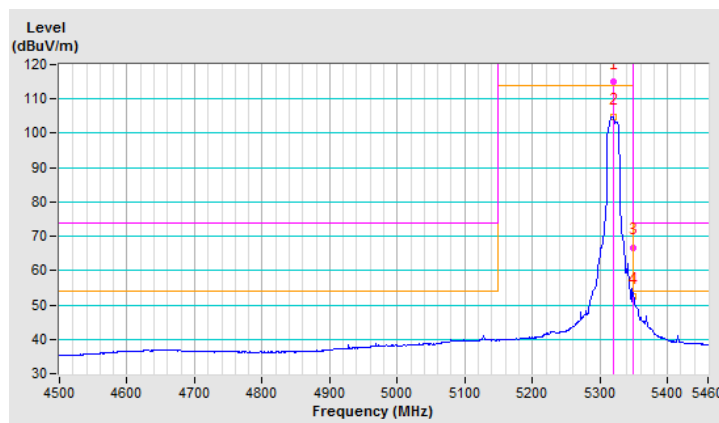


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	112.8 PK			1.92 V	181	110.5	2.3
2	*5320.00	102.3 AV			1.92 V	181	100.0	2.3
3	5350.00	61.5 PK	74.0	-12.5	1.92 V	181	59.2	2.3
4	5350.00	50.3 AV	54.0	-3.7	1.92 V	181	48.0	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

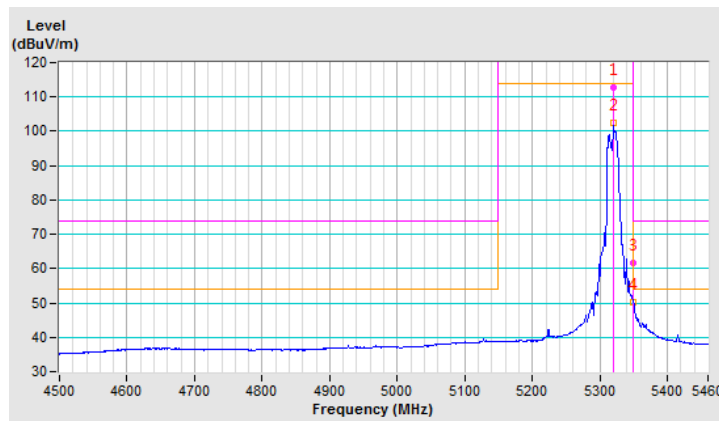


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5452.00	57.4 PK	74.0	-16.6	2.04 H	167	54.7	2.7
2	5452.00	45.3 AV	54.0	-8.7	2.04 H	167	42.6	2.7
3	#5470.00	66.5 PK	68.2	-1.7	2.04 H	167	63.9	2.6
4	*5500.00	112.8 PK			2.04 H	167	110.3	2.5
5	*5500.00	102.5 AV			2.04 H	167	100.0	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

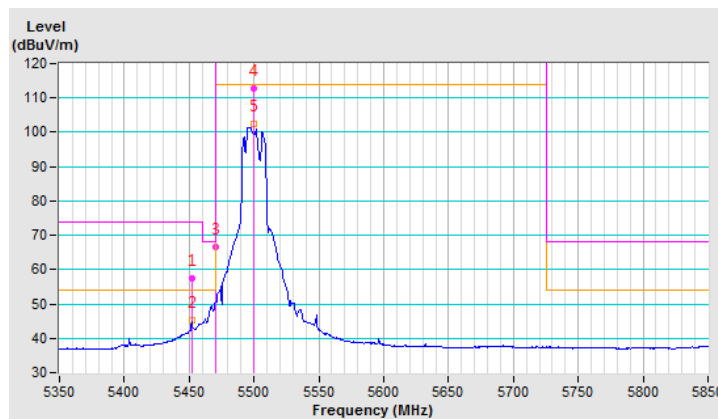


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5459.00	53.4 PK	74.0	-20.6	2.10 V	181	50.7	2.7
2	5459.00	41.4 AV	54.0	-12.6	2.10 V	181	38.7	2.7
3	#5470.00	62.8 PK	68.2	-5.4	2.10 V	181	60.2	2.6
4	*5500.00	110.7 PK			2.10 V	181	108.2	2.5
5	*5500.00	100.5 AV			2.10 V	181	98.0	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

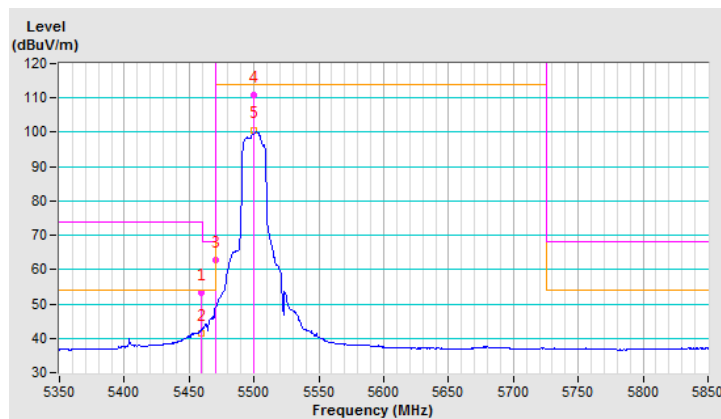


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5404.00	48.5 PK	74.0	-25.5	2.87 H	166	46.0	2.5
2	5404.00	37.0 AV	54.0	-17.0	2.87 H	166	34.5	2.5
3	#5470.00	49.2 PK	68.2	-19.0	2.87 H	166	46.6	2.6
4	*5580.00	116.6 PK			2.87 H	166	113.8	2.8
5	*5580.00	106.2 AV			2.87 H	166	103.4	2.8
6	#5758.60	50.1 PK	68.2	-18.1	2.87 H	166	47.1	3.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

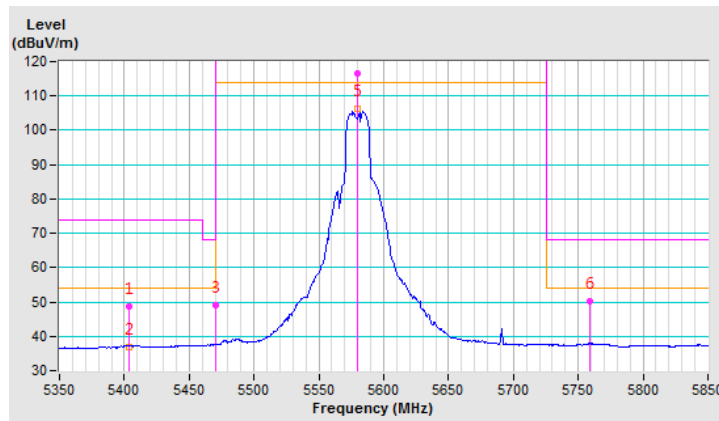


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5403.80	49.3 PK	74.0	-24.7	2.17 V	178	46.8	2.5
2	5403.80	37.0 AV	54.0	-17.0	2.17 V	178	34.5	2.5
3	#5470.00	49.1 PK	68.2	-19.1	2.17 V	178	46.5	2.6
4	*5580.00	113.6 PK			2.17 V	178	110.8	2.8
5	*5580.00	104.0 AV			2.17 V	178	101.2	2.8
6	#5725.00	49.0 PK	68.2	-19.2	2.17 V	178	46.1	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

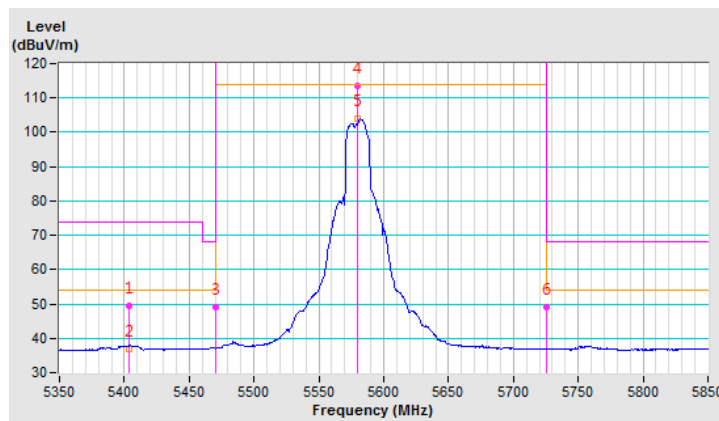


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	112.3 PK			2.95 H	167	109.4	2.9
2	*5700.00	101.9 AV			2.95 H	167	99.0	2.9
3	#5725.00	66.5 PK	68.2	-1.7	2.95 H	167	63.6	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

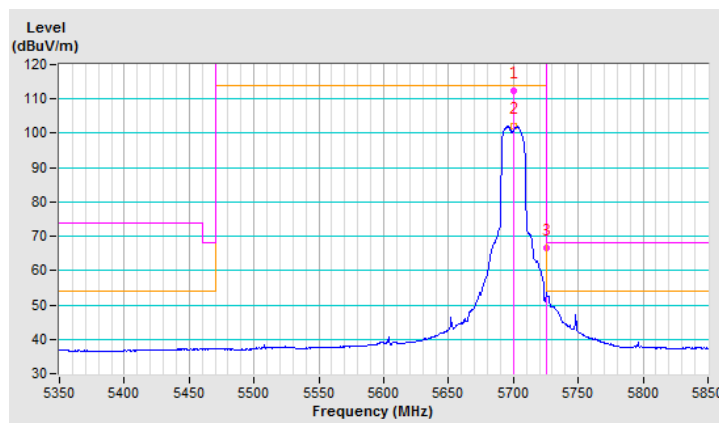


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	110.2 PK			2.09 V	167	107.3	2.9
2	*5700.00	100.0 AV			2.09 V	167	97.1	2.9
3	#5725.00	61.7 PK	68.2	-6.5	2.09 V	167	58.8	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

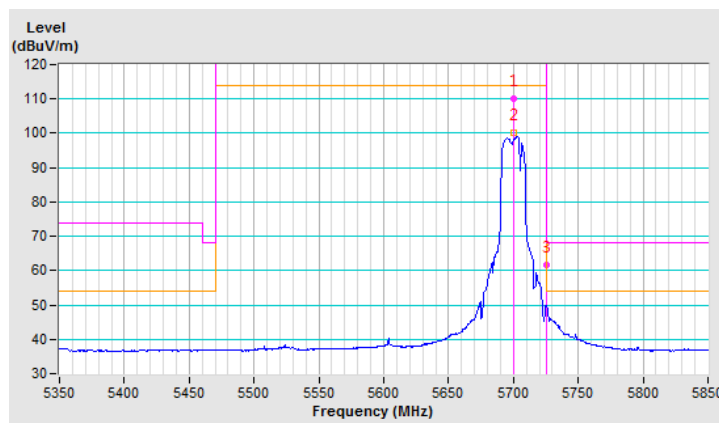


CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5369.30	48.1 PK	74.0	-25.9	2.95 H	168	45.7	2.4
2	5369.30	37.0 AV	54.0	-17.0	2.95 H	168	34.6	2.4
3	#5470.00	48.3 PK	68.2	-19.9	2.95 H	168	45.7	2.6
4	*5720.00	115.9 PK			2.95 H	168	113.0	2.9
5	*5720.00	105.4 AV			2.95 H	168	102.5	2.9
6	#5850.00	49.3 PK	68.2	-18.9	2.95 H	168	46.0	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

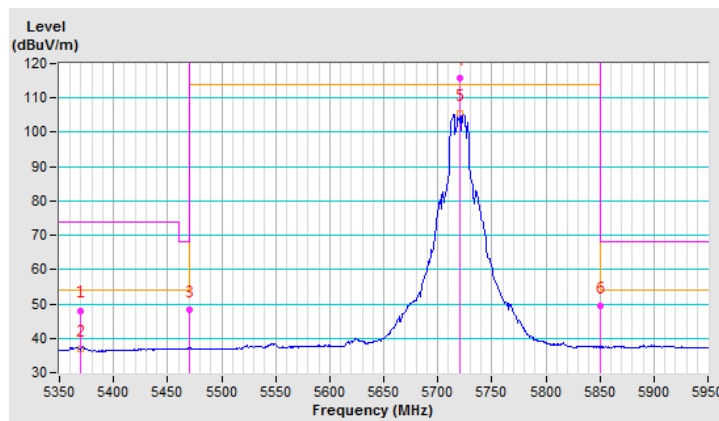


CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5366.00	48.6 PK	74.0	-25.4	2.02 V	172	46.2	2.4
2	5366.00	36.7 AV	54.0	-17.3	2.02 V	172	34.3	2.4
3	#5470.00	48.2 PK	68.2	-20.0	2.02 V	172	45.6	2.6
4	*5720.00	113.0 PK			2.02 V	172	110.1	2.9
5	*5720.00	103.2 AV			2.02 V	172	100.3	2.9
6	#5850.00	48.7 PK	68.2	-19.5	2.02 V	172	45.4	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

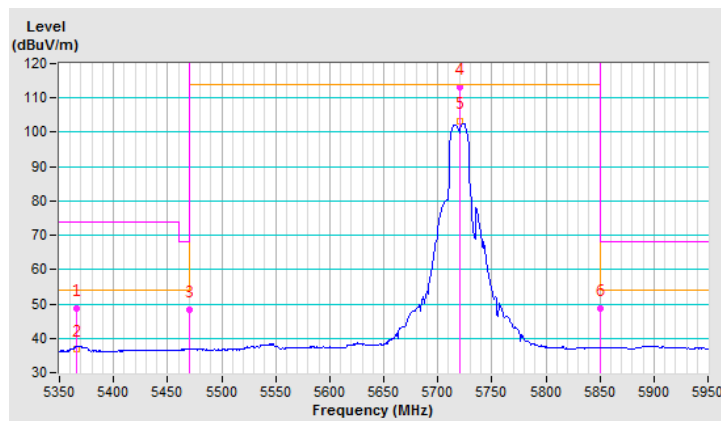


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5639.54	50.1 PK	68.2	-18.1	1.51 H	193	47.4	2.7
2	*5745.00	114.0 PK			1.51 H	193	111.1	2.9
3	*5745.00	103.9 AV			1.51 H	193	101.0	2.9
4	#5938.84	49.7 PK	68.2	-18.5	1.51 H	193	46.3	3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

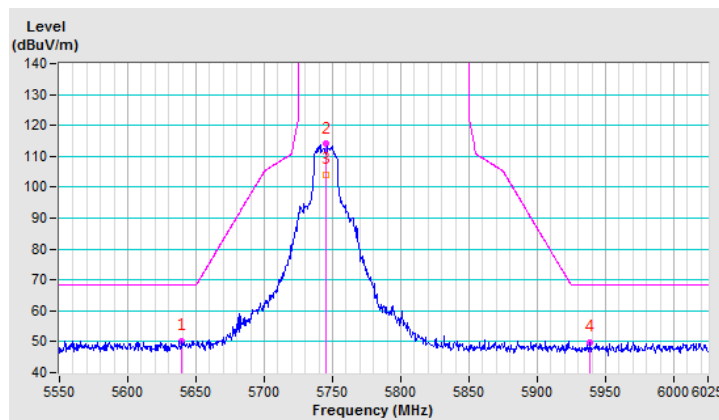


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.26	51.1 PK	68.2	-17.1	1.99 V	60	48.3	2.8
2	*5745.00	115.3 PK			1.99 V	60	112.4	2.9
3	*5745.00	105.4 AV			1.99 V	60	102.5	2.9
4	#5941.76	49.4 PK	68.2	-18.8	1.99 V	60	46.1	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

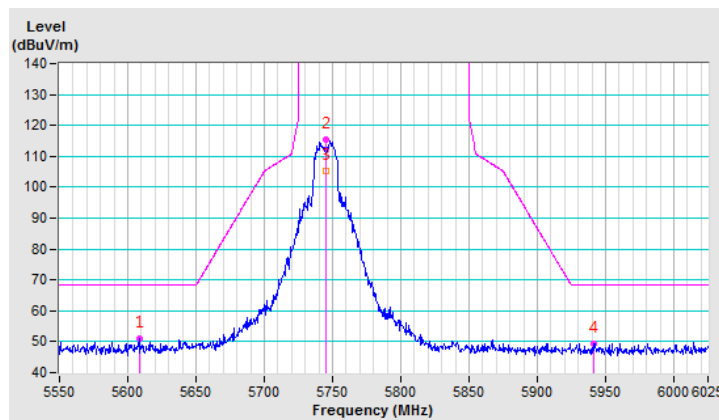


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5578.65	50.4 PK	68.2	-17.8	1.48 H	191	47.6	2.8
2	*5785.00	113.6 PK			1.48 H	191	110.5	3.1
3	*5785.00	103.2 AV			1.48 H	191	100.1	3.1
4	#5935.80	50.5 PK	68.2	-17.7	1.48 H	191	47.1	3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

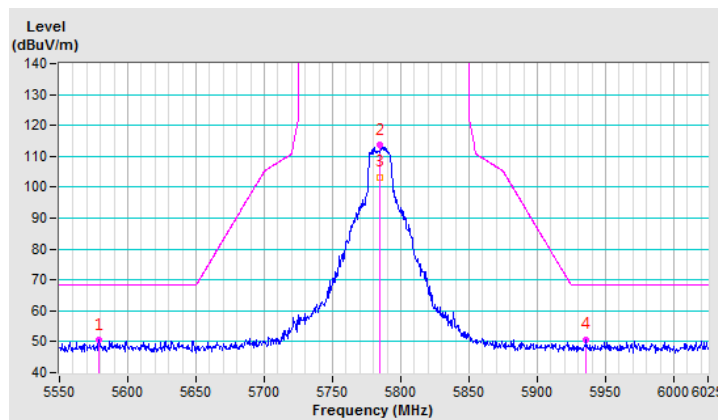


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.14	50.5 PK	68.2	-17.7	1.97 V	62	47.7	2.8
2	*5785.00	115.1 PK			1.97 V	62	112.0	3.1
3	*5785.00	105.2 AV			1.97 V	62	102.1	3.1
4	#5942.33	50.3 PK	68.2	-17.9	1.97 V	62	47.0	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

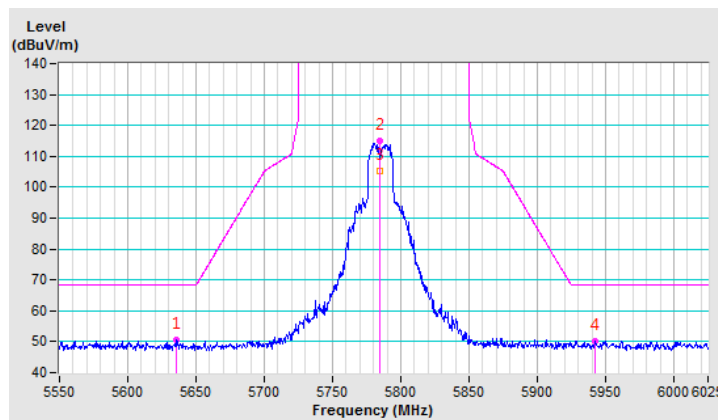


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5576.99	50.4 PK	68.2	-17.8	1.49 H	193	47.6	2.8
2	*5825.00	113.5 PK			1.49 H	193	110.3	3.2
3	*5825.00	103.3 AV			1.49 H	193	100.1	3.2
4	#5945.73	49.9 PK	68.2	-18.3	1.49 H	193	46.7	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

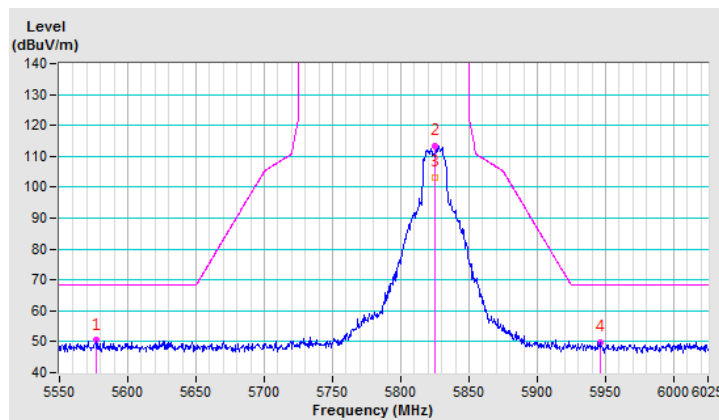


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5609.23	51.0 PK	68.2	-17.2	2.00 V	61	48.2	2.8
2	*5825.00	114.8 PK			2.00 V	61	111.6	3.2
3	*5825.00	105.1 AV			2.00 V	61	101.9	3.2
4	#6001.53	50.0 PK	68.2	-18.2	2.00 V	61	46.8	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

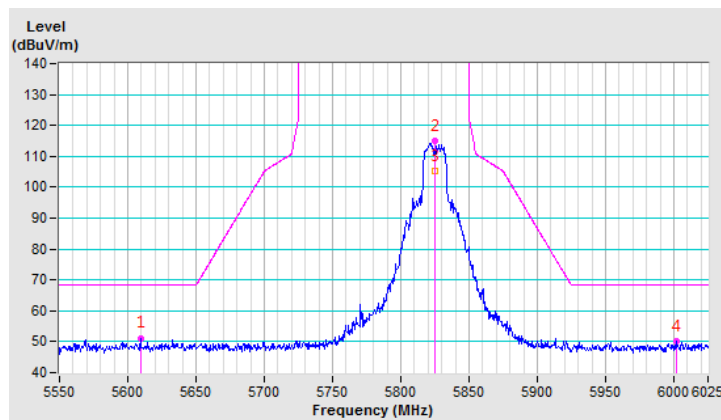


802.11ac (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.8 PK	74.0	-10.2	2.16 H	183	61.2	2.6
2	5150.00	52.4 AV	54.0	-1.6	2.16 H	183	49.8	2.6
3	*5190.00	108.2 PK			2.16 H	183	105.7	2.5
4	*5190.00	98.6 AV			2.16 H	183	96.1	2.5
5	5350.00	51.8 PK	74.0	-22.2	2.16 H	183	49.5	2.3
6	5350.00	38.8 AV	54.0	-15.2	2.16 H	183	36.5	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

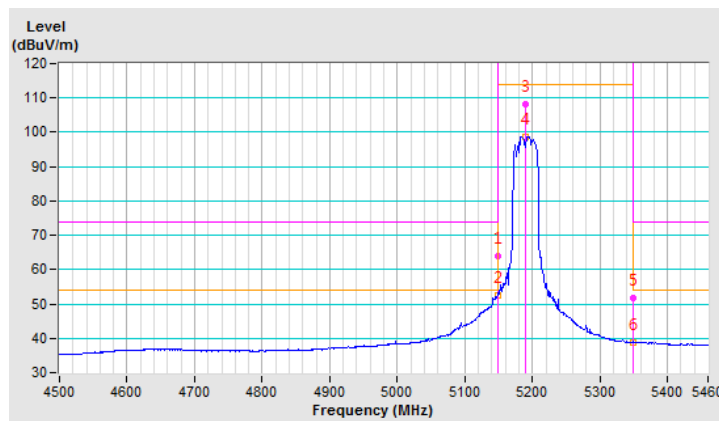


CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.2 PK	74.0	-14.8	1.49 V	176	56.6	2.6
2	5150.00	48.6 AV	54.0	-5.4	1.49 V	176	46.0	2.6
3	*5190.00	104.3 PK			1.49 V	176	101.8	2.5
4	*5190.00	94.7 AV			1.49 V	176	92.2	2.5
5	5350.00	50.7 PK	74.0	-23.3	1.49 V	176	48.4	2.3
6	5350.00	36.8 AV	54.0	-17.2	1.49 V	176	34.5	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

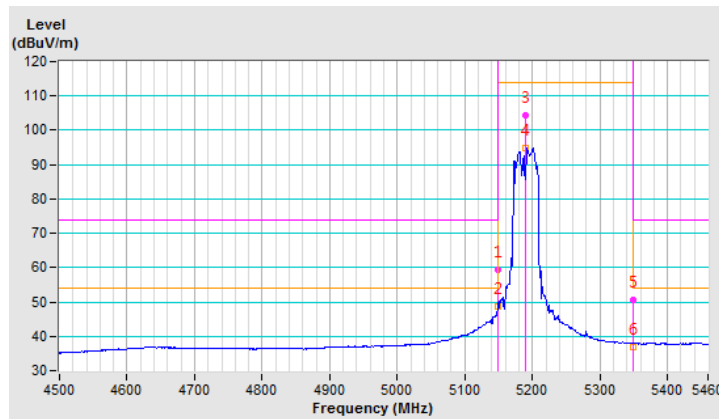


CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.8 PK	74.0	-11.2	2.16 H	181	60.2	2.6
2	5150.00	52.4 AV	54.0	-1.6	2.16 H	181	49.8	2.6
3	*5230.00	114.6 PK			2.16 H	181	112.4	2.2
4	*5230.00	104.2 AV			2.16 H	181	102.0	2.2
5	5350.00	60.1 PK	74.0	-13.9	2.16 H	181	57.8	2.3
6	5350.00	41.0 AV	54.0	-13.0	2.16 H	181	38.7	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

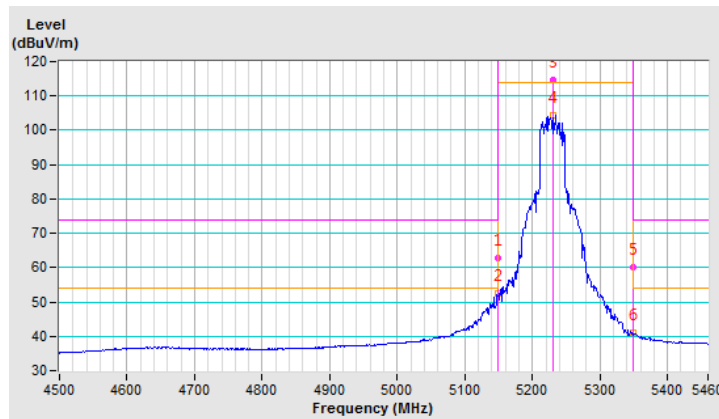


CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	2.11 V	161	57.6	2.6
2	5150.00	47.6 AV	54.0	-6.4	2.11 V	161	45.0	2.6
3	*5230.00	111.3 PK			2.11 V	161	109.1	2.2
4	*5230.00	101.7 AV			2.11 V	161	99.5	2.2
5	5350.00	57.3 PK	74.0	-16.7	2.11 V	161	55.0	2.3
6	5350.00	38.9 AV	54.0	-15.1	2.11 V	161	36.6	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

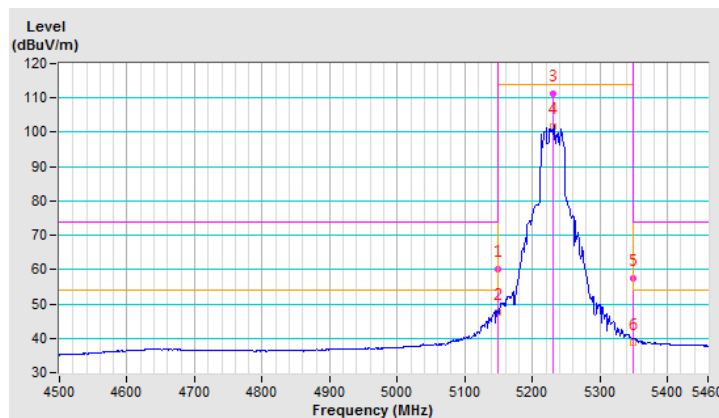


CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.7 PK	74.0	-16.3	1.99 H	181	55.1	2.6
2	5150.00	44.2 AV	54.0	-9.8	1.99 H	181	41.6	2.6
3	*5270.00	114.5 PK			1.99 H	181	112.4	2.1
4	*5270.00	104.8 AV			1.99 H	181	102.7	2.1
5	5350.00	61.1 PK	74.0	-12.9	1.99 H	181	58.8	2.3
6	5350.00	51.0 AV	54.0	-3.0	1.99 H	181	48.7	2.3
7	5352.40	65.7 PK	74.0	-8.3	1.99 H	181	63.4	2.3
8	5352.40	52.3 AV	54.0	-1.7	1.99 H	181 <td 50.0	2.3	

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

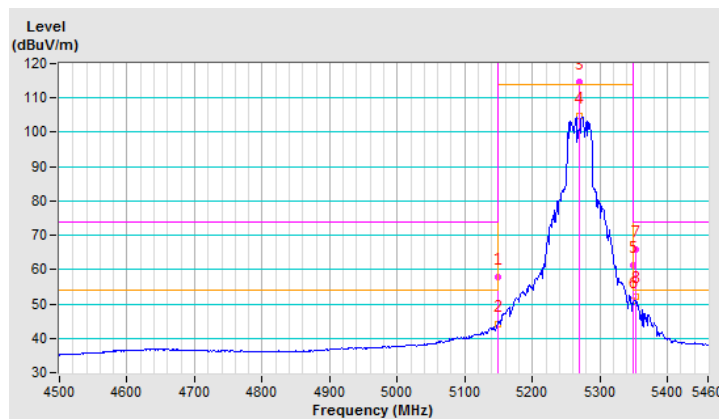


CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.7 PK	74.0	-17.3	2.02 V	167	54.1	2.6
2	5150.00	41.8 AV	54.0	-12.2	2.02 V	167	39.2	2.6
3	*5270.00	112.1 PK			2.02 V	167	110.0	2.1
4	*5270.00	102.0 AV			2.02 V	167	99.9	2.1
5	5350.00	65.4 PK	74.0	-8.6	2.02 V	167	63.1	2.3
6	5350.00	49.6 AV	54.0	-4.4	2.02 V	167	47.3	2.3
7	5352.40	57.0 PK	74.0	-17.0	2.02 V	167	54.7	2.3
8	5352.40	48.8 AV	54.0	-5.2	2.02 V	167	46.5	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

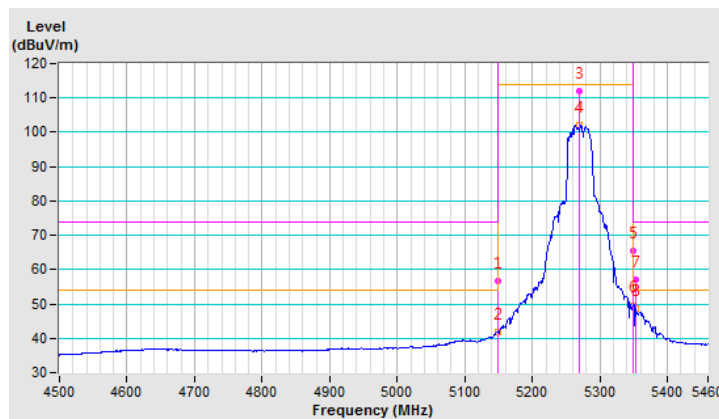


CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	109.4 PK			2.02 H	161	107.2	2.2
2	*5310.00	99.9 AV			2.02 H	161	97.7	2.2
3	5350.00	63.5 PK	74.0	-10.5	2.02 H	161	61.2	2.3
4	5350.00	52.4 AV	54.0	-1.6	2.02 H	161	50.1	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

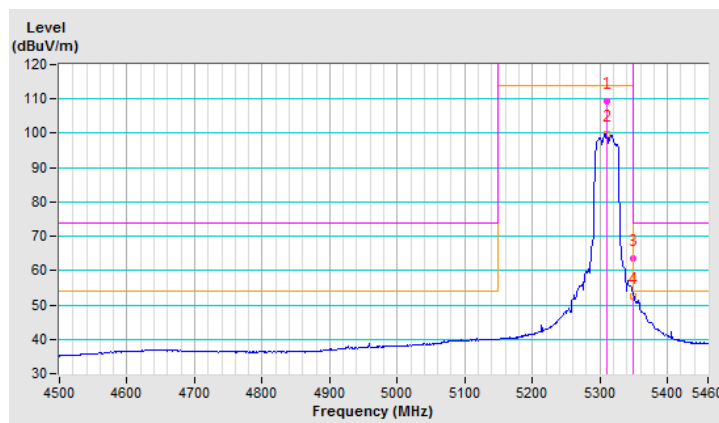


CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	107.0 PK			2.07 V	171	104.8	2.2
2	*5310.00	96.8 AV			2.07 V	171	94.6	2.2
3	5350.00	60.4 PK	74.0	-13.6	2.07 V	171	58.1	2.3
4	5350.00	49.2 AV	54.0	-4.8	2.07 V	171	46.9	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

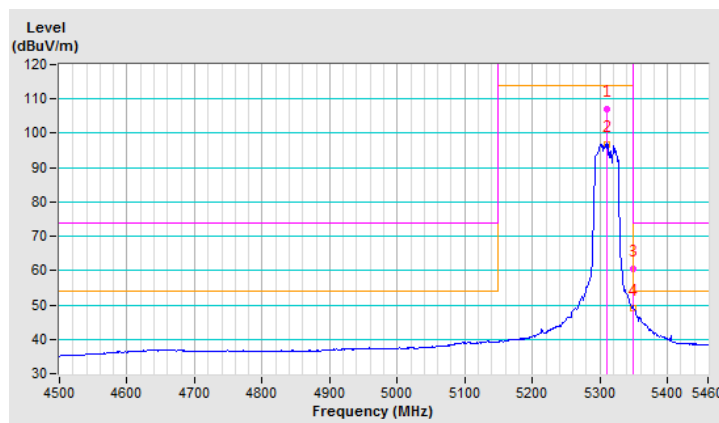


CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	60.8 PK	68.2	-7.4	1.64 H	152	58.2	2.6
2	5460.00	47.4 AV	54.0	-6.6	1.64 H	152	44.8	2.6
3	#5470.00	66.4 PK	68.2	-1.8	1.64 H	152	63.8	2.6
4	*5510.00	106.3 PK			1.64 H	152	103.8	2.5
5	*5510.00	97.0 AV			1.64 H	152	94.5	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

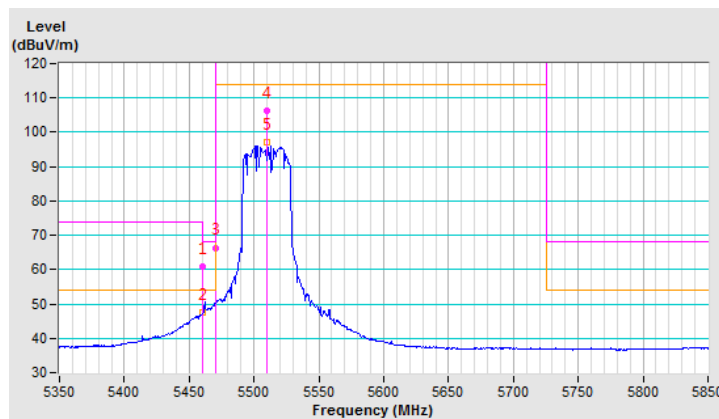


CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	59.5 PK	68.2	-8.7	2.33 V	128	56.9	2.6
2	5460.00	44.2 AV	54.0	-9.8	2.33 V	128	41.6	2.6
3	#5470.00	64.1 PK	68.2	-4.1	2.33 V	128	61.5	2.6
4	*5510.00	105.9 PK			2.33 V	128	103.4	2.5
5	*5510.00	95.7 AV			2.33 V	128	93.2	2.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

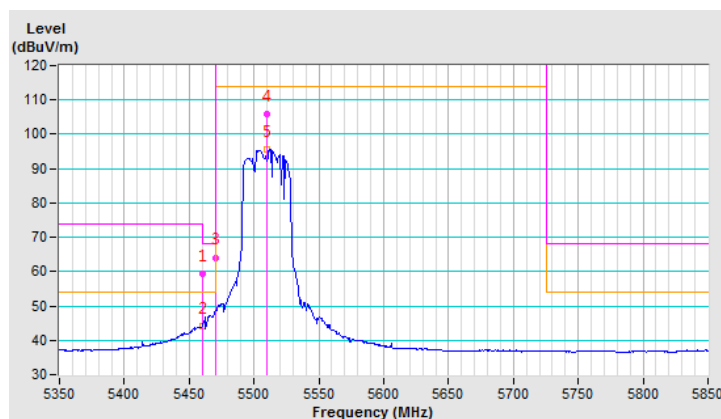


CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5459.80	63.0 PK	74.0	-11.0	2.06 H	149	60.3	2.7
2	5459.80	48.8 AV	54.0	-5.2	2.06 H	149	46.1	2.7
3	#5470.00	66.3 PK	68.2	-1.9	2.06 H	149	63.7	2.6
4	*5550.00	112.9 PK			2.06 H	149	110.2	2.7
5	*5550.00	102.3 AV			2.06 H	149	99.6	2.7
6	#5725.00	48.8 PK	68.2	-19.4	2.06 H	149	45.9	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

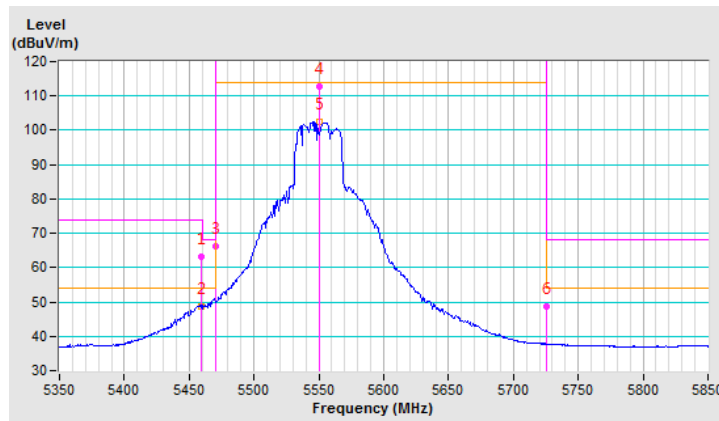


CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5456.80	61.3 PK	74.0	-12.7	2.31 V	139	58.6	2.7
2	5456.80	45.7 AV	54.0	-8.3	2.31 V	139	43.0	2.7
3	#5470.00	65.5 PK	68.2	-2.7	2.31 V	139	62.9	2.6
4	*5550.00	110.4 PK			2.31 V	139	107.7	2.7
5	*5550.00	100.4 AV			2.31 V	139	97.7	2.7
6	#5725.00	54.4 PK	68.2	-13.8	2.31 V	139	51.5	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

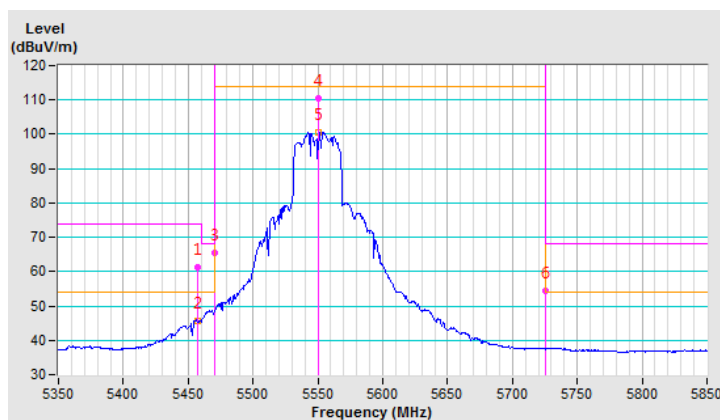


CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	109.4 PK			1.77 H	170	106.5	2.9
2	*5670.00	99.6 AV			1.77 H	170	96.7	2.9
3	#5725.00	66.3 PK	68.2	-1.9	1.77 H	170	63.4	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

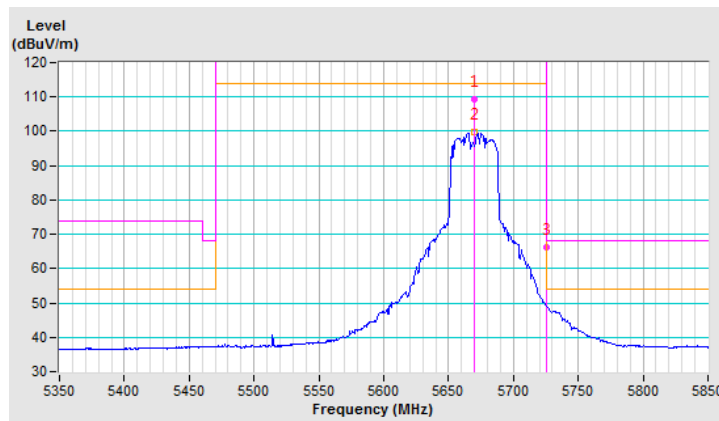


CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	108.2 PK			2.17 V	143	105.3	2.9
2	*5670.00	98.7 AV			2.17 V	143	95.8	2.9
3	#5725.00	60.9 PK	68.2	-7.3	2.17 V	143	58.0	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

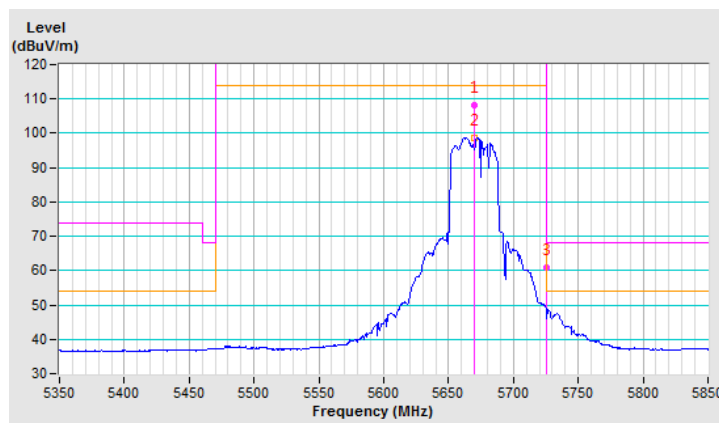


CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5359.70	52.1 PK	74.0	-21.9	2.97 H	170	49.7	2.4
2	5359.70	35.9 AV	54.0	-18.1	2.97 H	170	33.5	2.4
3	#5470.00	51.7 PK	68.2	-16.5	2.97 H	170	49.1	2.6
4	*5710.00	113.1 PK			2.97 H	170	110.1	3.0
5	*5710.00	103.0 AV			2.97 H	170	100.0	3.0
6	#5850.00	58.3 PK	68.2	-9.9	2.97 H	170	55.0	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

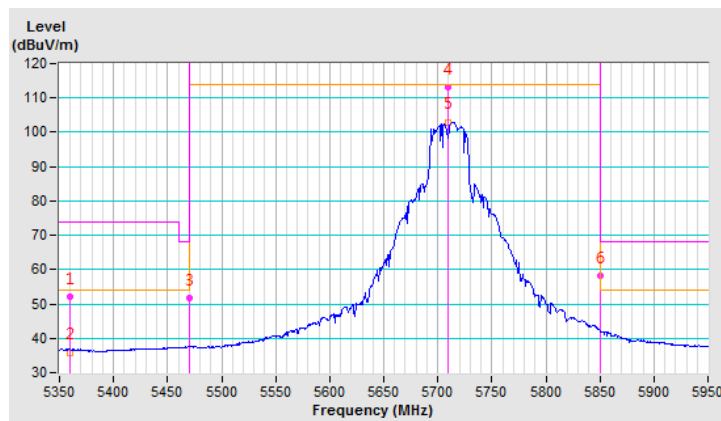


CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5350.00	52.9 PK	74.0	-21.1	2.33 V	127	50.6	2.3
2	5350.00	36.5 AV	54.0	-17.5	2.33 V	127	34.2	2.3
3	#5470.00	54.0 PK	68.2	-14.2	2.33 V	127	51.4	2.6
4	*5710.00	110.7 PK			2.33 V	127	107.7	3.0
5	*5710.00	101.1 AV			2.33 V	127	98.1	3.0
6	#5850.00	54.9 PK	68.2	-13.3	2.33 V	127	51.6	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

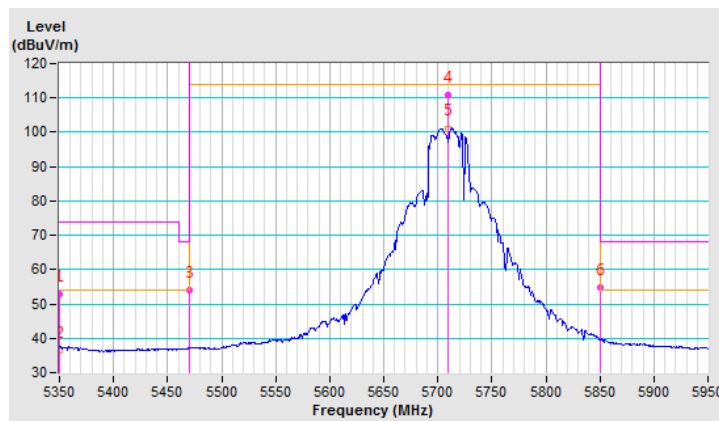


CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5638.55	59.9 PK	68.2	-8.3	2.00 H	190	57.2	2.7
2	*5755.00	111.9 PK			2.00 H	190	108.9	3.0
3	*5755.00	101.5 AV			2.00 H	190	98.5	3.0
4	#5973.14	53.5 PK	68.2	-14.7	2.00 H	190	50.3	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

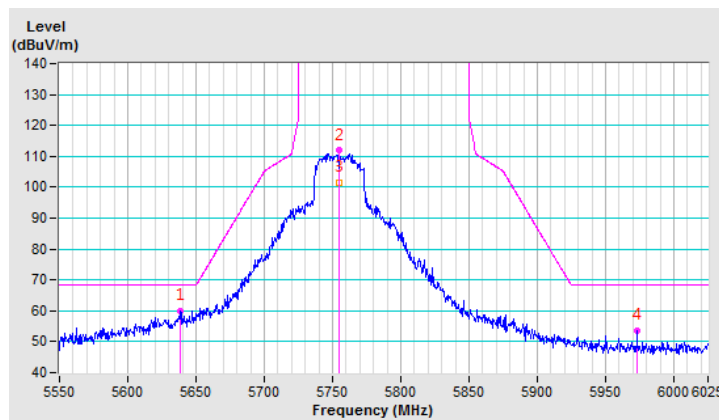


CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.46	59.8 PK	68.2	-8.4	1.78 V	143	57.1	2.7
2	*5755.00	111.6 PK			1.78 V	143	108.6	3.0
3	*5755.00	101.3 AV			1.78 V	143	98.3	3.0
4	#5932.26	50.8 PK	68.2	-17.4	1.78 V	143	47.4	3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

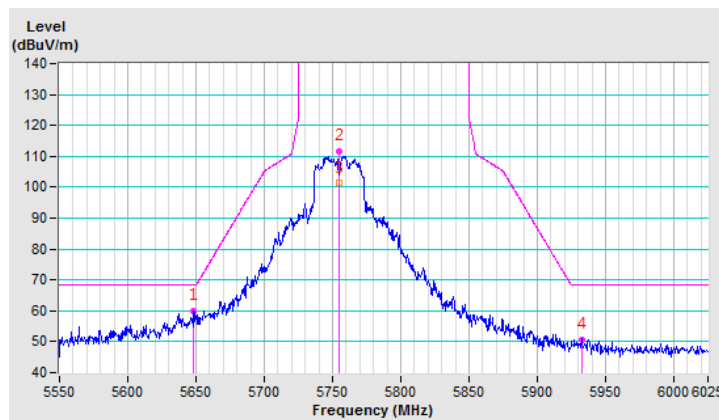


CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5561.01	55.8 PK	68.2	-12.4	2.01 H	194	53.0	2.8
2	*5795.00	111.5 PK			2.01 H	194	108.5	3.0
3	*5795.00	101.2 AV			2.01 H	194	98.2	3.0
4	#5932.03	58.0 PK	68.2	-10.2	2.01 H	194	54.6	3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

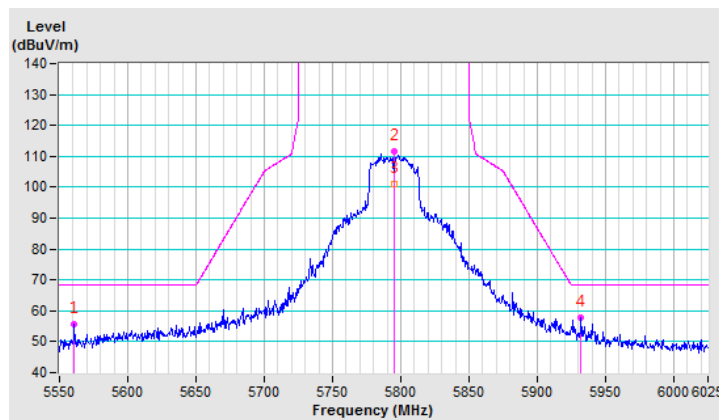


CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5642.21	56.8 PK	68.2	-11.4	2.15 V	132	54.1	2.7
2	*5795.00	112.4 PK			2.15 V	132	109.4	3.0
3	*5795.00	102.1 AV			2.15 V	132	99.1	3.0
4	#5926.70	55.1 PK	68.2	-13.1	2.15 V	132	51.7	3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

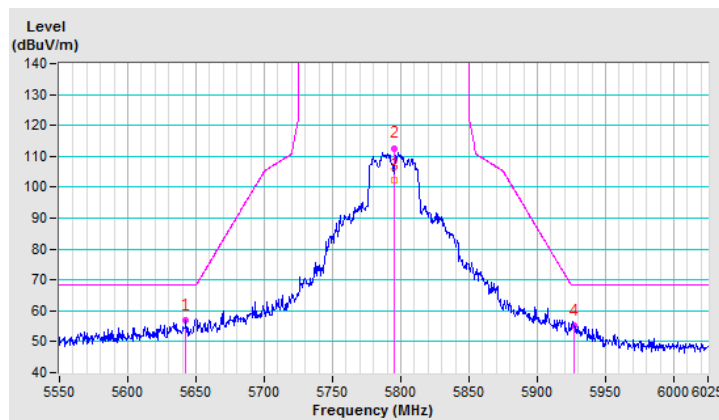


802.11ac (80MHz)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	2.17 H	183	62.8	2.6
2	5150.00	52.4 AV	54.0	-1.6	2.17 H	183	49.8	2.6
3	*5210.00	104.0 PK			2.17 H	183	101.6	2.4
4	*5210.00	93.7 AV			2.17 H	183	91.3	2.4
5	5350.00	55.8 PK	74.0	-18.2	2.17 H	183	53.5	2.3
6	5350.00	43.6 AV	54.0	-10.4	2.17 H	183	41.3	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

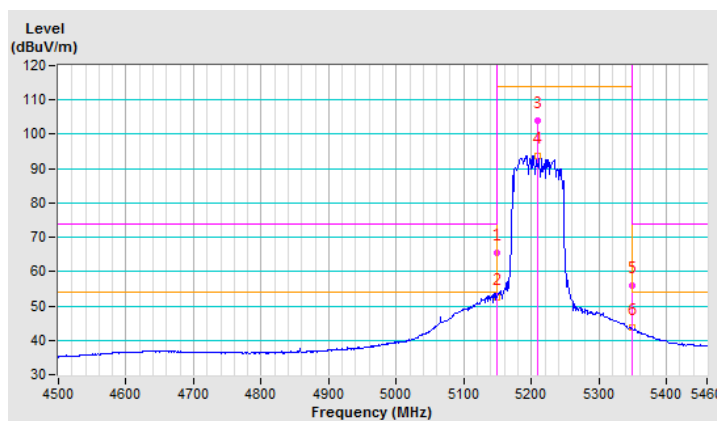


CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.3 PK	74.0	-12.7	1.06 V	174	58.7	2.6
2	5150.00	50.0 AV	54.0	-4.0	1.06 V	174	47.4	2.6
3	*5210.00	101.0 PK			1.06 V	174	98.6	2.4
4	*5210.00	91.0 AV			1.06 V	174	88.6	2.4
5	5350.00	52.0 PK	74.0	-22.0	1.06 V	174	49.7	2.3
6	5350.00	40.3 AV	54.0	-13.7	1.06 V	174	38.0	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

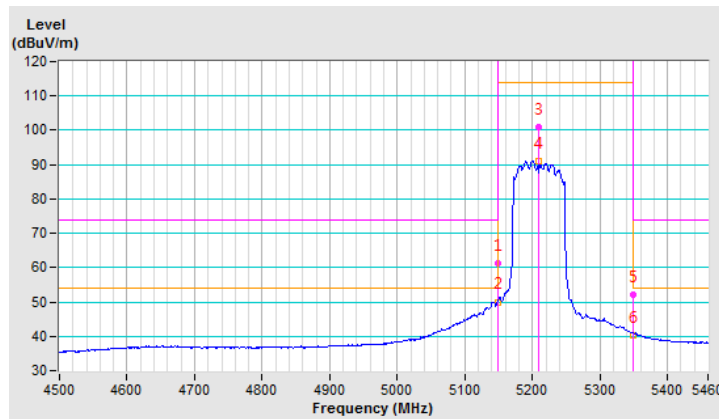


CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	2.17 H	183	55.9	2.6
2	5150.00	48.1 AV	54.0	-5.9	2.17 H	183	45.5	2.6
3	*5290.00	105.3 PK			2.14 H	181	103.2	2.1
4	*5290.00	95.9 AV			2.14 H	181	93.8	2.1
5	5350.00	63.9 PK	74.0	-10.1	2.14 H	181	61.6	2.3
6	5350.00	52.4 AV	54.0	-1.6	2.14 H	181	50.1	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

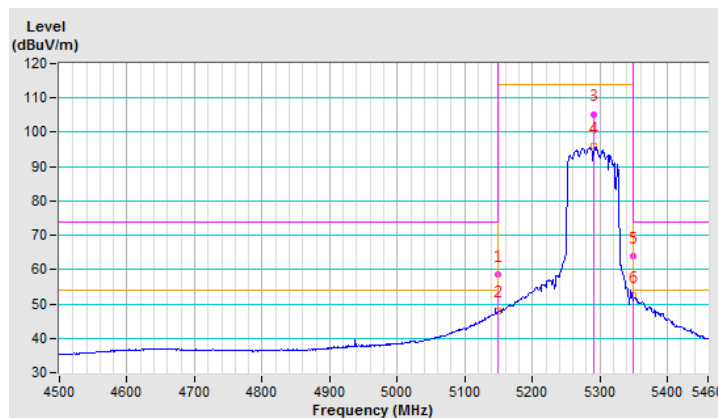


CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	54.5 PK	74.0	-19.5	2.16 V	175	51.9	2.6
2	5150.00	43.3 AV	54.0	-10.7	2.16 V	175	40.7	2.6
3	*5290.00	103.1 PK			2.16 V	175	101.0	2.1
4	*5290.00	93.1 AV			2.16 V	175	91.0	2.1
5	5350.00	62.1 PK	74.0	-11.9	2.16 V	175	59.8	2.3
6	5350.00	51.0 AV	54.0	-3.0	2.16 V	175	48.7	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

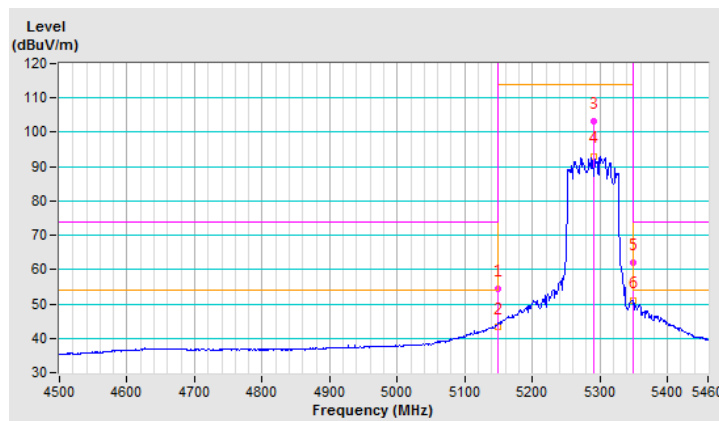


CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5457.60	62.4 PK	74.0	-11.6	1.85 H	168	59.7	2.7
2	5457.60	50.2 AV	54.0	-3.8	1.85 H	168	47.5	2.7
3	#5470.00	66.4 PK	68.2	-1.8	1.85 H	168	63.8	2.6
4	*5530.00	103.0 PK			1.85 H	168	100.4	2.6
5	*5530.00	92.9 AV			1.85 H	168	90.3	2.6
6	#5725.00	49.5 PK	68.2	-18.7	1.85 H	168	46.6	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

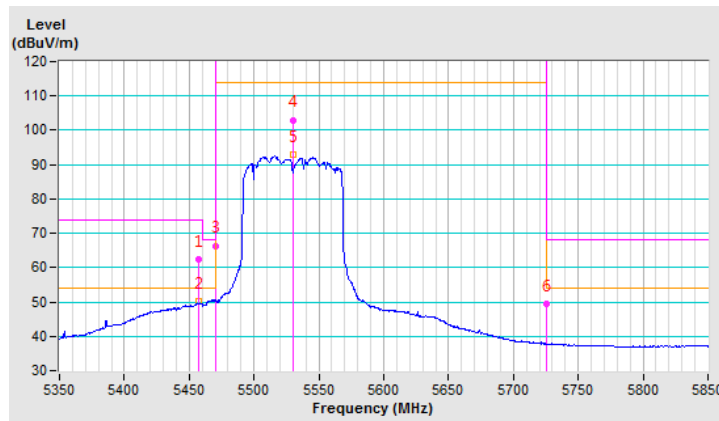


CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5450.00	59.6 PK	74.0	-14.4	2.11 V	184	56.9	2.7
2	5450.00	46.3 AV	54.0	-7.7	2.11 V	184	43.6	2.7
3	#5470.00	61.6 PK	68.2	-6.6	2.11 V	184	59.0	2.6
4	*5530.00	100.6 PK			2.11 V	184	98.0	2.6
5	*5530.00	90.2 AV			2.11 V	184	87.6	2.6
6	#5725.00	49.1 PK	68.2	-19.1	2.11 V	184	46.2	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

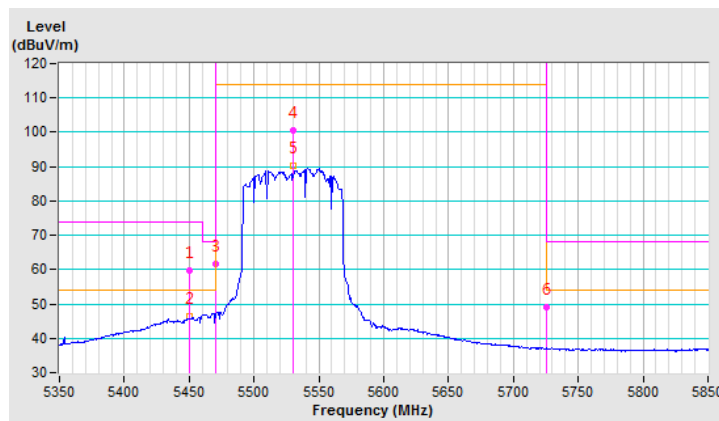


CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	66.4 PK	68.2	-1.8	1.85 H	167	63.8	2.6
2	*5610.00	108.5 PK			1.85 H	167	105.7	2.8
3	*5610.00	98.5 AV			1.85 H	167	95.7	2.8
4	#5725.00	65.2 PK	68.2	-3.0	1.85 H	167	62.3	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

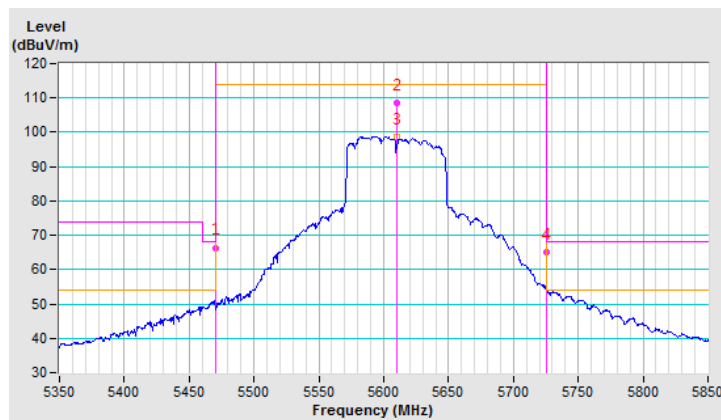


CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5459.80	60.6 PK	74.0	-13.4	2.13 V	164	57.9	2.7
2	5459.80	46.6 AV	54.0	-7.4	2.13 V	164	43.9	2.7
3	#5470.00	61.5 PK	68.2	-6.7	2.13 V	164	58.9	2.6
4	*5610.00	106.8 PK			2.13 V	164	104.0	2.8
5	*5610.00	96.0 AV			2.13 V	164	93.2	2.8
6	#5725.00	62.4 PK	68.2	-5.8	2.13 V	164	59.5	2.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

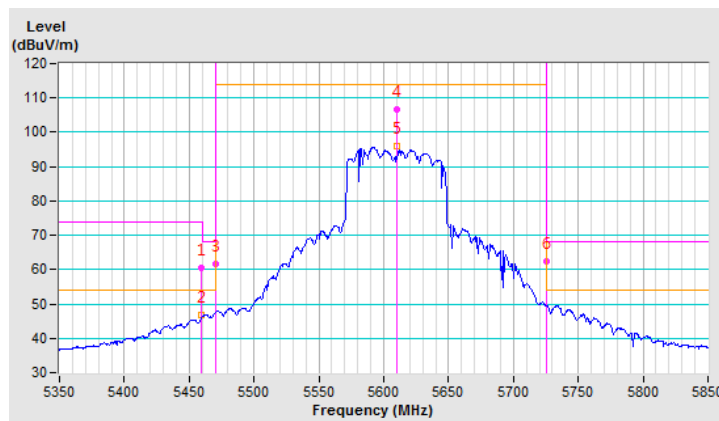


CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5455.00	56.9 PK	74.0	-17.1	3.56 H	169	54.2	2.7
2	5455.00	42.3 AV	54.0	-11.7	3.56 H	169	39.6	2.7
3	#5470.00	57.7 PK	68.2	-10.5	3.56 H	169	55.1	2.6
4	*5690.00	110.6 PK			3.56 H	169	107.7	2.9
5	*5690.00	100.1 AV			3.56 H	169	97.2	2.9
6	#5850.00	66.4 PK	68.2	-1.8	3.56 H	169	63.1	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

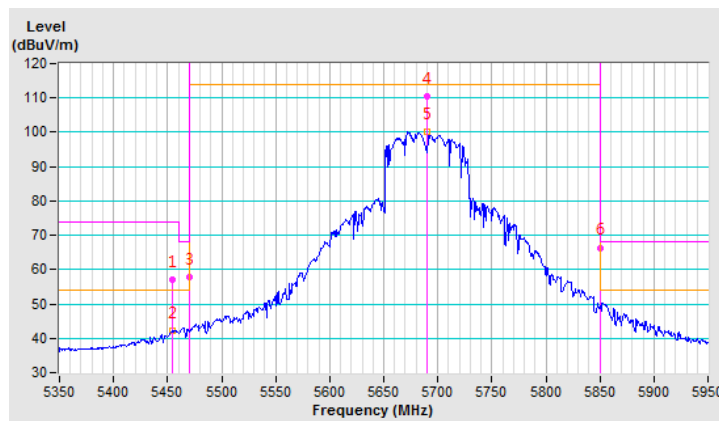


CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5459.00	54.8 PK	74.0	-19.2	2.59 V	121	52.1	2.7
2	5459.00	41.2 AV	54.0	-12.8	2.59 V	121	38.5	2.7
3	#5470.00	58.7 PK	68.2	-9.5	2.59 V	121	56.1	2.6
4	*5690.00	108.3 PK			2.59 V	121	105.4	2.9
5	*5690.00	98.2 AV			2.59 V	121	95.3	2.9
6	#5850.00	58.0 PK	68.2	-10.2	2.59 V	121	54.7	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

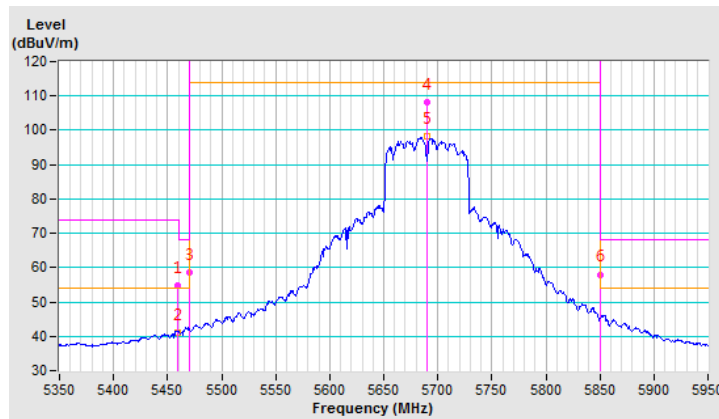


CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.17	65.7 PK	68.2	-2.5	3.92 H	187	63.0	2.7
2	*5775.00	107.5 PK			3.92 H	187	104.5	3.0
3	*5775.00	97.9 AV			3.92 H	187	94.9	3.0
4	#5929.37	61.0 PK	68.2	-7.2	3.92 H	187	57.6	3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

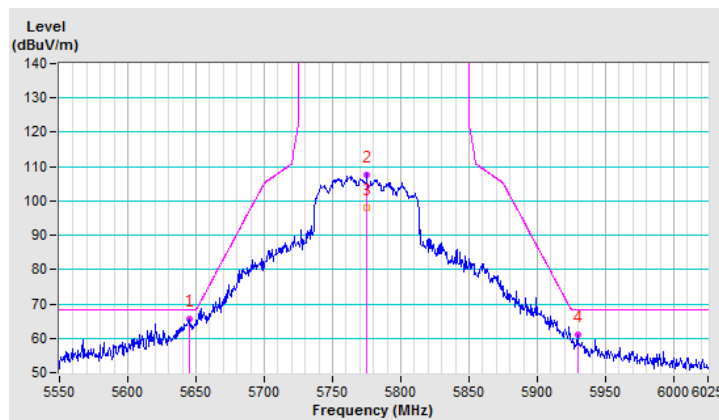


CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.27	63.6 PK	68.2	-4.6	2.04 V	137	60.9	2.7
2	*5775.00	106.9 PK			2.04 V	137	103.9	3.0
3	*5775.00	97.4 AV			2.04 V	137	94.4	3.0
4	#5927.93	59.3 PK	68.2	-8.9	2.04 V	137	55.9	3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

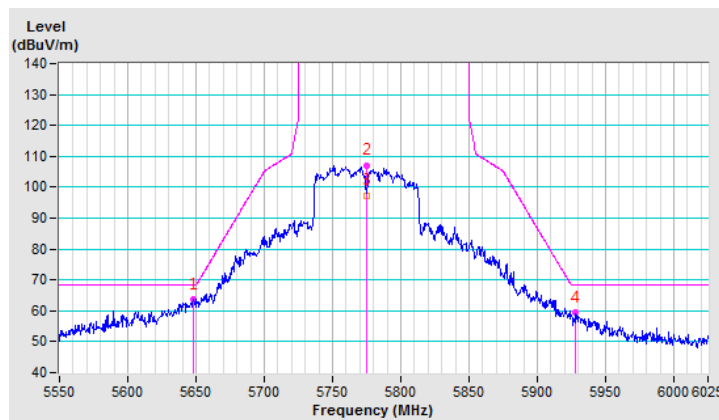

4.1.8 Test Results (Spurious emission)

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	43.6 PK	68.2	-24.6	1.52 H	265	31.7	11.9
2	15540.00	49.2 PK	74.0	-24.8	1.34 H	71	36.8	12.4
3	15540.00	37.0 AV	54.0	-17.0	1.34 H	71	24.6	12.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	42.2 PK	68.2	-26.0	2.20 V	304	30.3	11.9
2	15540.00	47.4 PK	74.0	-26.6	1.52 V	63	35.0	12.4
3	15540.00	35.0 AV	54.0	-19.0	1.52 V	63	22.6	12.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	44.9 PK	68.2	-23.3	1.51 H	274	32.7	12.2
2	15600.00	51.3 PK	74.0	-22.7	1.39 H	85	38.4	12.9
3	15600.00	38.2 AV	54.0	-15.8	1.39 H	85	25.3	12.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	44.7 PK	68.2	-23.5	2.17 V	302	32.5	12.2
2	15600.00	48.9 PK	74.0	-25.1	1.52 V	74	36.0	12.9
3	15600.00	36.3 AV	54.0	-17.7	1.52 V	74	23.4	12.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	44.7 PK	68.2	-23.5	1.45 H	285	32.3	12.4
2	15720.00	51.2 PK	74.0	-22.8	1.44 H	84	39.2	12.0
3	15720.00	38.0 AV	54.0	-16.0	1.44 H	84	26.0	12.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	45.1 PK	68.2	-23.1	2.20 V	313	32.7	12.4
2	15720.00	48.7 PK	74.0	-25.3	1.57 V	82	36.7	12.0
3	15720.00	36.2 AV	54.0	-17.8	1.57 V	82	24.2	12.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	44.6 PK	68.2	-23.6	1.49 H	282	32.2	12.4
2	15780.00	51.2 PK	74.0	-22.8	1.39 H	98	39.7	11.5
3	15780.00	38.3 AV	54.0	-15.7	1.39 H	98	26.8	11.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	45.4 PK	68.2	-22.8	2.23 V	301	33.0	12.4
2	15780.00	48.4 PK	74.0	-25.6	1.61 V	78	36.9	11.5
3	15780.00	35.7 AV	54.0	-18.3	1.61 V	78	24.2	11.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	44.8 PK	74.0	-29.2	1.55 H	275	33.1	11.7
2	10600.00	33.8 AV	54.0	-20.2	1.55 H	275	22.1	11.7
3	15900.00	51.1 PK	74.0	-22.9	1.36 H	92	39.9	11.2
4	15900.00	37.9 AV	54.0	-16.1	1.36 H	92	26.7	11.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	45.5 PK	74.0	-28.5	2.15 V	322	33.8	11.7
2	10600.00	34.0 AV	54.0	-20.0	2.15 V	322	22.3	11.7
3	15900.00	48.0 PK	74.0	-26.0	1.59 V	85	36.8	11.2
4	15900.00	35.8 AV	54.0	-18.2	1.59 V	85	24.6	11.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	44.9 PK	74.0	-29.1	1.56 H	283	33.2	11.7
2	10640.00	33.8 AV	54.0	-20.2	1.56 H	283	22.1	11.7
3	15960.00	51.3 PK	74.0	-22.7	1.40 H	86	39.9	11.4
4	15960.00	38.1 AV	54.0	-15.9	1.40 H	86	26.7	11.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	45.1 PK	74.0	-28.9	2.21 V	311	33.4	11.7
2	10640.00	33.7 AV	54.0	-20.3	2.21 V	311	22.0	11.7
3	15960.00	47.4 PK	74.0	-26.6	1.59 V	75	36.0	11.4
4	15960.00	35.4 AV	54.0	-18.6	1.59 V	75	24.0	11.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	44.3 PK	74.0	-29.7	1.61 H	284	32.1	12.2
2	11000.00	33.1 AV	54.0	-20.9	1.61 H	284	20.9	12.2
3	#16500.00	50.8 PK	68.2	-17.4	1.39 H	90	37.1	13.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	45.2 PK	74.0	-28.8	2.15 V	325	33.0	12.2
2	11000.00	32.9 AV	54.0	-21.1	2.15 V	325	20.7	12.2
3	#16500.00	47.4 PK	68.2	-20.8	1.64 V	76	33.7	13.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11160.00	44.8 PK	74.0	-29.2	1.58 H	264	32.8	12.0
2	11160.00	33.5 AV	54.0	-20.5	1.58 H	264	21.5	12.0
3	#16740.00	50.5 PK	68.2	-17.7	1.41 H	79	36.3	14.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11160.00	45.3 PK	74.0	-28.7	2.20 V	316	33.3	12.0
2	11160.00	34.0 AV	54.0	-20.0	2.20 V	316	22.0	12.0
3	#16740.00	48.1 PK	68.2	-20.1	1.54 V	78	33.9	14.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	44.4 PK	74.0	-29.6	1.67 H	272	31.4	13.0
2	11400.00	33.1 AV	54.0	-20.9	1.67 H	272	20.1	13.0
3	#17100.00	50.5 PK	68.2	-17.7	1.39 H	86	34.4	16.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	45.3 PK	74.0	-28.7	2.14 V	314	32.3	13.0
2	11400.00	33.3 AV	54.0	-20.7	2.14 V	314	20.3	13.0
3	#17100.00	47.3 PK	68.2	-20.9	1.66 V	72	31.2	16.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	44.9 PK	74.0	-29.1	1.61 H	262	32.2	12.7
2	11440.00	33.8 AV	54.0	-20.2	1.61 H	262	21.1	12.7
3	#17160.00	50.0 PK	68.2	-18.2	1.35 H	87	34.4	15.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	45.5 PK	74.0	-28.5	2.23 V	324	32.8	12.7
2	11440.00	34.1 AV	54.0	-19.9	2.23 V	324	21.4	12.7
3	#17160.00	48.8 PK	68.2	-19.4	1.54 V	83	33.2	15.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	49.7 PK	74.0	-24.3	1.46 H	230	37.4	12.3
2	11490.00	38.9 AV	54.0	-15.1	1.46 H	230	26.6	12.3
3	#17235.00	49.8 PK	68.2	-18.4	1.56 H	153	34.5	15.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	50.1 PK	74.0	-23.9	1.47 V	206	37.8	12.3
2	11490.00	39.3 AV	54.0	-14.7	1.47 V	206	27.0	12.3
3	#17235.00	49.7 PK	68.2	-18.5	1.38 V	228	34.4	15.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	49.4 PK	74.0	-24.6	1.45 H	222	37.0	12.4
2	11570.00	38.6 AV	54.0	-15.4	1.45 H	222	26.2	12.4
3	#17355.00	49.6 PK	68.2	-18.6	1.51 H	167	33.6	16.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	50.2 PK	74.0	-23.8	1.45 V	205	37.8	12.4
2	11570.00	39.5 AV	54.0	-14.5	1.45 V	205	27.1	12.4
3	#17355.00	49.9 PK	68.2	-18.3	1.42 V	226	33.9	16.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	49.9 PK	74.0	-24.1	1.43 H	222	37.5	12.4
2	11650.00	39.3 AV	54.0	-14.7	1.43 H	222	26.9	12.4
3	#17475.00	49.6 PK	68.2	-18.6	1.53 H	138	32.2	17.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	50.1 PK	74.0	-23.9	1.47 V	216	37.7	12.4
2	11650.00	39.0 AV	54.0	-15.0	1.47 V	216	26.6	12.4
3	#17475.00	50.0 PK	68.2	-18.2	1.41 V	230	32.6	17.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

802.11ac (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	42.1 PK	68.2	-26.1	1.54 H	260	30.2	11.9
2	15540.00	47.9 PK	74.0	-26.1	1.39 H	70	35.5	12.4
3	15540.00	35.5 AV	54.0	-18.5	1.39 H	70	23.1	12.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	41.1 PK	68.2	-27.1	2.23 V	308	29.2	11.9
2	15540.00	46.5 PK	74.0	-27.5	1.58 V	78	34.1	12.4
3	15540.00	33.9 AV	54.0	-20.1	1.58 V	78	21.5	12.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	44.6 PK	68.2	-23.6	1.41 H	293	32.4	12.2
2	15600.00	51.0 PK	74.0	-23.0	1.49 H	98	38.1	12.9
3	15600.00	38.0 AV	54.0	-16.0	1.49 H	98	25.1	12.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	45.2 PK	68.2	-23.0	2.17 V	298	33.0	12.2
2	15600.00	48.2 PK	74.0	-25.8	1.57 V	72	35.3	12.9
3	15600.00	36.0 AV	54.0	-18.0	1.57 V	72	23.1	12.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	44.8 PK	68.2	-23.4	1.39 H	277	32.4	12.4
2	15720.00	51.4 PK	74.0	-22.6	1.42 H	89	39.4	12.0
3	15720.00	38.4 AV	54.0	-15.6	1.42 H	89	26.4	12.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	45.0 PK	68.2	-23.2	2.25 V	306	32.6	12.4
2	15720.00	49.1 PK	74.0	-24.9	1.62 V	89	37.1	12.0
3	15720.00	36.3 AV	54.0	-17.7	1.62 V	89	24.3	12.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	45.0 PK	68.2	-23.2	1.39 H	292	32.6	12.4
2	15780.00	51.5 PK	74.0	-22.5	1.45 H	76	40.0	11.5
3	15780.00	38.2 AV	54.0	-15.8	1.45 H	76	26.7	11.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	45.4 PK	68.2	-22.8	2.25 V	314	33.0	12.4
2	15780.00	48.5 PK	74.0	-25.5	1.58 V	92	37.0	11.5
3	15780.00	35.8 AV	54.0	-18.2	1.58 V	92	24.3	11.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	44.8 PK	74.0	-29.2	1.59 H	282	33.1	11.7
2	10600.00	34.0 AV	54.0	-20.0	1.59 H	282	22.3	11.7
3	15900.00	51.3 PK	74.0	-22.7	1.33 H	92	40.1	11.2
4	15900.00	38.3 AV	54.0	-15.7	1.33 H	92	27.1	11.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	45.2 PK	74.0	-28.8	2.15 V	319	33.5	11.7
2	10600.00	33.6 AV	54.0	-20.4	2.15 V	319	21.9	11.7
3	15900.00	48.0 PK	74.0	-26.0	1.54 V	73	36.8	11.2
4	15900.00	36.0 AV	54.0	-18.0	1.54 V	73	24.8	11.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	44.6 PK	74.0	-29.4	1.51 H	269	32.9	11.7
2	10640.00	33.4 AV	54.0	-20.6	1.51 H	269	21.7	11.7
3	15960.00	51.9 PK	74.0	-22.1	1.41 H	90	40.5	11.4
4	15960.00	38.4 AV	54.0	-15.6	1.41 H	90	27.0	11.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	45.8 PK	74.0	-28.2	2.20 V	324	34.1	11.7
2	10640.00	34.4 AV	54.0	-19.6	2.20 V	324	22.7	11.7
3	15960.00	47.6 PK	74.0	-26.4	1.63 V	92	36.2	11.4
4	15960.00	35.5 AV	54.0	-18.5	1.63 V	92	24.1	11.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	44.6 PK	74.0	-29.4	1.59 H	271	32.4	12.2
2	11000.00	33.2 AV	54.0	-20.8	1.59 H	271	21.0	12.2
3	#16500.00	50.9 PK	68.2	-17.3	1.36 H	100	37.2	13.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	45.4 PK	74.0	-28.6	2.17 V	310	33.2	12.2
2	11000.00	33.1 AV	54.0	-20.9	2.17 V	310	20.9	12.2
3	#16500.00	47.7 PK	68.2	-20.5	1.67 V	78	34.0	13.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11160.00	44.3 PK	74.0	-29.7	1.55 H	276	32.3	12.0
2	11160.00	33.1 AV	54.0	-20.9	1.55 H	276	21.1	12.0
3	#16740.00	50.4 PK	68.2	-17.8	1.39 H	82	36.2	14.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11160.00	45.5 PK	74.0	-28.5	2.14 V	318	33.5	12.0
2	11160.00	34.1 AV	54.0	-19.9	2.14 V	318	22.1	12.0
3	#16740.00	47.4 PK	68.2	-20.8	1.50 V	85	33.2	14.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	44.6 PK	74.0	-29.4	1.71 H	277	31.6	13.0
2	11400.00	33.4 AV	54.0	-20.6	1.71 H	277	20.4	13.0
3	#17100.00	50.6 PK	68.2	-17.6	1.34 H	83	34.5	16.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	45.4 PK	74.0	-28.6	2.13 V	306	32.4	13.0
2	11400.00	33.2 AV	54.0	-20.8	2.13 V	306	20.2	13.0
3	#17100.00	47.4 PK	68.2	-20.8	1.65 V	77	31.3	16.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	44.4 PK	74.0	-29.6	1.62 H	276	31.7	12.7
2	11440.00	33.4 AV	54.0	-20.6	1.62 H	276	20.7	12.7
3	#17160.00	50.6 PK	68.2	-17.6	1.31 H	95	35.0	15.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	45.7 PK	74.0	-28.3	2.24 V	309	33.0	12.7
2	11440.00	34.4 AV	54.0	-19.6	2.24 V	309	21.7	12.7
3	#17160.00	48.4 PK	68.2	-19.8	1.49 V	86	32.8	15.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	49.6 PK	74.0	-24.4	1.51 H	242	37.3	12.3
2	11490.00	38.6 AV	54.0	-15.4	1.51 H	242	26.3	12.3
3	#17235.00	49.6 PK	68.2	-18.6	1.56 H	154	34.3	15.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	49.8 PK	74.0	-24.2	1.45 V	208	37.5	12.3
2	11490.00	39.2 AV	54.0	-14.8	1.45 V	208	26.9	12.3
3	#17235.00	49.7 PK	68.2	-18.5	1.34 V	215	34.4	15.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	49.9 PK	74.0	-24.1	1.46 H	244	37.5	12.4
2	11570.00	39.2 AV	54.0	-14.8	1.46 H	244	26.8	12.4
3	#17355.00	49.6 PK	68.2	-18.6	1.52 H	141	33.6	16.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	50.4 PK	74.0	-23.6	1.50 V	220	38.0	12.4
2	11570.00	39.7 AV	54.0	-14.3	1.50 V	220	27.3	12.4
3	#17355.00	49.7 PK	68.2	-18.5	1.40 V	214	33.7	16.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	49.1 PK	74.0	-24.9	1.51 H	240	36.7	12.4
2	11650.00	38.6 AV	54.0	-15.4	1.51 H	240	26.2	12.4
3	#17475.00	49.7 PK	68.2	-18.5	1.53 H	164	32.3	17.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	50.1 PK	74.0	-23.9	1.44 V	207	37.7	12.4
2	11650.00	39.4 AV	54.0	-14.6	1.44 V	207	27.0	12.4
3	#17475.00	49.2 PK	68.2	-19.0	1.40 V	230	31.8	17.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

802.11ac (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10380.00	38.3 PK	68.2	-29.9	1.58 H	245	26.3	12.0
2	15570.00	43.4 PK	74.0	-30.6	1.42 H	79	30.8	12.6
3	15570.00	33.1 AV	54.0	-20.9	1.42 H	79	20.5	12.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10380.00	37.8 PK	68.2	-30.4	2.22 V	305	25.8	12.0
2	15570.00	42.0 PK	74.0	-32.0	1.62 V	92	29.4	12.6
3	15570.00	32.8 AV	54.0	-21.2	1.62 V	92	20.2	12.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10460.00	43.5 PK	68.2	-24.7	1.40 H	295	31.1	12.4
2	15690.00	50.8 PK	74.0	-23.2	1.53 H	90	38.6	12.2
3	15690.00	37.8 AV	54.0	-16.2	1.53 H	90	25.6	12.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10460.00	45.0 PK	68.2	-23.2	2.28 V	328	32.6	12.4
2	15690.00	47.4 PK	74.0	-26.6	1.64 V	86	35.2	12.2
3	15690.00	34.1 AV	54.0	-19.9	1.64 V	86	21.9	12.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10540.00	43.8 PK	68.2	-24.4	1.40 H	287	31.6	12.2
2	15810.00	50.6 PK	74.0	-23.4	1.47 H	81	39.3	11.3
3	15810.00	37.4 AV	54.0	-16.6	1.47 H	81	26.1	11.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10540.00	44.5 PK	68.2	-23.7	2.22 V	326	32.3	12.2
2	15810.00	47.5 PK	74.0	-26.5	1.59 V	84	36.2	11.3
3	15810.00	34.5 AV	54.0	-19.5	1.59 V	84	23.2	11.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10620.00	44.0 PK	74.0	-30.0	1.64 H	285	32.3	11.7
2	10620.00	33.1 AV	54.0	-20.9	1.64 H	285	21.4	11.7
3	15930.00	49.5 PK	74.0	-24.5	1.34 H	81	38.3	11.2
4	15930.00	37.0 AV	54.0	-17.0	1.34 H	81	25.8	11.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10620.00	44.3 PK	74.0	-29.7	2.14 V	305	32.6	11.7
2	10620.00	32.8 AV	54.0	-21.2	2.14 V	305	21.1	11.7
3	15930.00	47.0 PK	74.0	-27.0	1.49 V	89	35.8	11.2
4	15930.00	35.0 AV	54.0	-19.0	1.49 V	89	23.8	11.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11020.00	43.8 PK	74.0	-30.2	1.60 H	281	31.5	12.3
2	11020.00	33.0 AV	54.0	-21.0	1.60 H	281	20.7	12.3
3	#16530.00	48.5 PK	68.2	-19.7	1.31 H	85	34.6	13.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11020.00	43.8 PK	74.0	-30.2	2.13 V	299	31.5	12.3
2	11020.00	32.6 AV	54.0	-21.4	2.13 V	299	20.3	12.3
3	#16530.00	46.5 PK	68.2	-21.7	1.45 V	95	32.6	13.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11100.00	44.7 PK	74.0	-29.3	1.57 H	268	32.6	12.1
2	11100.00	33.2 AV	54.0	-20.8	1.57 H	268	21.1	12.1
3	#16650.00	50.9 PK	68.2	-17.3	1.42 H	83	36.7	14.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11100.00	45.8 PK	74.0	-28.2	2.19 V	318	33.7	12.1
2	11100.00	34.3 AV	54.0	-19.7	2.19 V	318	22.2	12.1
3	#16650.00	47.2 PK	68.2	-21.0	1.45 V	90	33.0	14.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11340.00	42.5 PK	74.0	-31.5	1.57 H	281	29.6	12.9
2	11340.00	32.2 AV	54.0	-21.8	1.57 H	281	19.3	12.9
3	#17010.00	47.5 PK	68.2	-20.7	1.35 H	101	31.7	15.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11340.00	43.2 PK	74.0	-30.8	2.22 V	309	30.3	12.9
2	11340.00	31.0 AV	54.0	-23.0	2.22 V	309	18.1	12.9
3	#17010.00	45.2 PK	68.2	-23.0	1.52 V	104	29.4	15.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11420.00	44.6 PK	74.0	-29.4	1.62 H	277	31.7	12.9
2	11420.00	33.6 AV	54.0	-20.4	1.62 H	277	20.7	12.9
3	#17130.00	50.8 PK	68.2	-17.4	1.32 H	107	35.0	15.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11420.00	46.1 PK	74.0	-27.9	2.23 V	321	33.2	12.9
2	11420.00	34.6 AV	54.0	-19.4	2.23 V	321	21.7	12.9
3	#17130.00	48.2 PK	68.2	-20.0	1.50 V	91	32.4	15.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11510.00	48.6 PK	74.0	-25.4	1.43 H	228	36.3	12.3
2	11510.00	38.9 AV	54.0	-15.1	1.43 H	228	26.6	12.3
3	#17265.00	49.8 PK	68.2	-18.4	1.55 H	126	34.4	15.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11510.00	49.3 PK	74.0	-24.7	1.46 V	207	37.0	12.3
2	11510.00	38.5 AV	54.0	-15.5	1.46 V	207	26.2	12.3
3	#17265.00	49.6 PK	68.2	-18.6	1.41 V	200	34.2	15.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11590.00	48.7 PK	74.0	-25.3	1.42 H	249	36.3	12.4
2	11590.00	38.4 AV	54.0	-15.6	1.42 H	249	26.0	12.4
3	#17385.00	49.6 PK	68.2	-18.6	1.56 H	156	33.4	16.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11590.00	49.5 PK	74.0	-24.5	1.53 V	210	37.1	12.4
2	11590.00	38.6 AV	54.0	-15.4	1.53 V	210	26.2	12.4
3	#17385.00	50.3 PK	68.2	-17.9	1.37 V	217	34.1	16.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

802.11ac (80MHz)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10420.00	37.5 PK	68.2	-30.7	1.53 H	238	25.3	12.2
2	15630.00	42.0 PK	74.0	-32.0	1.38 H	91	29.3	12.7
3	15630.00	32.5 AV	54.0	-21.5	1.38 H	91	19.8	12.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10420.00	38.9 PK	68.2	-29.3	2.28 V	292	26.7	12.2
2	15630.00	40.0 PK	74.0	-34.0	1.61 V	84	27.3	12.7
3	15630.00	32.0 AV	54.0	-22.0	1.61 V	84	19.3	12.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10580.00	40.7 PK	68.2	-27.5	1.41 H	284	28.9	11.8
2	15870.00	45.3 PK	74.0	-28.7	1.44 H	83	34.1	11.2
3	15870.00	35.4 AV	54.0	-18.6	1.44 H	83	24.2	11.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10580.00	41.6 PK	68.2	-26.6	2.28 V	326	29.8	11.8
2	15870.00	43.3 PK	74.0	-30.7	1.59 V	89	32.1	11.2
3	15870.00	33.1 AV	54.0	-20.9	1.59 V	89	21.9	11.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11060.00	43.0 PK	74.0	-31.0	1.62 H	283	30.9	12.1
2	11060.00	32.0 AV	54.0	-22.0	1.62 H	283	19.9	12.1
3	#16590.00	47.0 PK	68.2	-21.2	1.37 H	87	32.8	14.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11060.00	42.4 PK	74.0	-31.6	2.13 V	290	30.3	12.1
2	11060.00	31.8 AV	54.0	-22.2	2.13 V	290	19.7	12.1
3	#16590.00	45.1 PK	68.2	-23.1	1.43 V	86	30.9	14.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11220.00	43.5 PK	74.0	-30.5	1.55 H	267	31.2	12.3
2	11220.00	32.8 AV	54.0	-21.2	1.55 H	267	20.5	12.3
3	#16830.00	48.2 PK	68.2	-20.0	1.29 H	79	33.6	14.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11220.00	43.2 PK	74.0	-30.8	2.13 V	304	30.9	12.3
2	11220.00	32.2 AV	54.0	-21.8	2.13 V	304	19.9	12.3
3	#16830.00	46.7 PK	68.2	-21.5	1.47 V	83	32.1	14.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11380.00	44.5 PK	74.0	-29.5	1.55 H	268	31.6	12.9
2	11380.00	33.6 AV	54.0	-20.4	1.55 H	268	20.7	12.9
3	#17070.00	49.4 PK	68.2	-18.8	1.28 H	83	33.3	16.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11380.00	44.2 PK	74.0	-29.8	2.12 V	308	31.3	12.9
2	11380.00	33.1 AV	54.0	-20.9	2.12 V	308	20.2	12.9
3	#17070.00	47.7 PK	68.2	-20.5	1.48 V	94	31.6	16.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11550.00	48.4 PK	74.0	-25.6	1.38 H	255	36.0	12.4
2	11550.00	37.8 AV	54.0	-16.2	1.38 H	255	25.4	12.4
3	#17325.00	49.2 PK	68.2	-19.0	1.59 H	147	33.5	15.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11550.00	48.9 PK	74.0	-25.1	1.52 V	224	36.5	12.4
2	11550.00	37.9 AV	54.0	-16.1	1.52 V	224	25.5	12.4
3	#17325.00	49.5 PK	68.2	-18.7	1.34 V	207	33.8	15.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data:


802.11ac (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.98	28.4 QP	40.0	-11.6	1.00 H	207	36.9	-8.5
2	118.29	26.2 QP	43.5	-17.3	2.00 H	268	36.0	-9.8
3	138.62	25.1 QP	43.5	-18.4	1.50 H	294	33.3	-8.2
4	376.77	26.2 QP	46.0	-19.8	1.00 H	220	31.1	-4.9
5	672.99	31.0 QP	46.0	-15.0	3.00 H	195	29.6	1.4
6	839.10	33.7 QP	46.0	-12.3	1.00 H	133	29.5	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

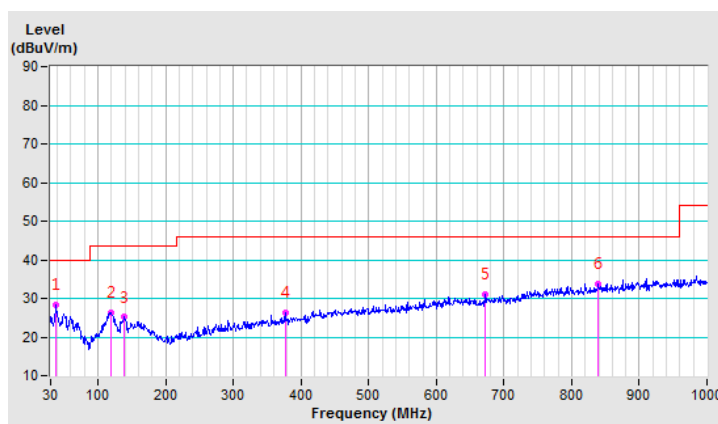


CHANNEL	TX Channel 151	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.76	36.6 QP	40.0	-3.4	1.00 V	154	45.1	-8.5
2	66.81	29.2 QP	40.0	-10.8	2.50 V	163	38.7	-9.5
3	116.84	25.4 QP	43.5	-18.1	1.00 V	360	35.3	-9.9
4	152.51	24.5 QP	43.5	-19.0	1.50 V	204	32.1	-7.6
5	466.06	27.6 QP	46.0	-18.4	3.00 V	221	30.3	-2.7
6	782.84	33.4 QP	46.0	-12.6	1.00 V	340	29.8	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

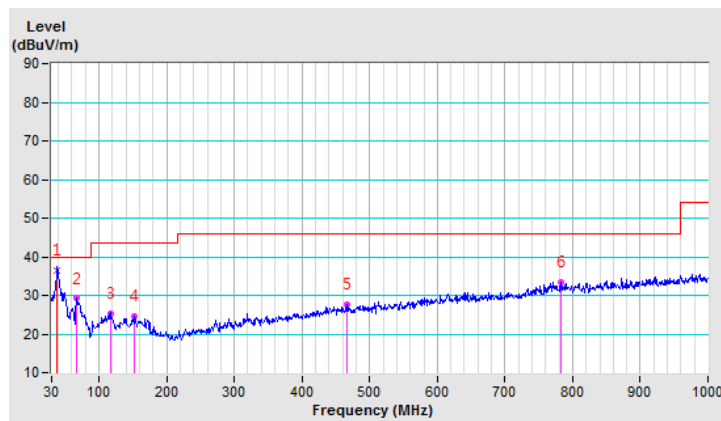

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Nov. 01, 2017	Oct. 31, 2018
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Nov. 15, 2017	Nov. 14, 2018
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 04, 2018	June 03, 2019
50 ohms Terminator	N/A	EMC-04	Nov. 01, 2017	Oct. 31, 2018
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 16, 2018	Mar. 15, 2019
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: Oct. 04, 2018

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

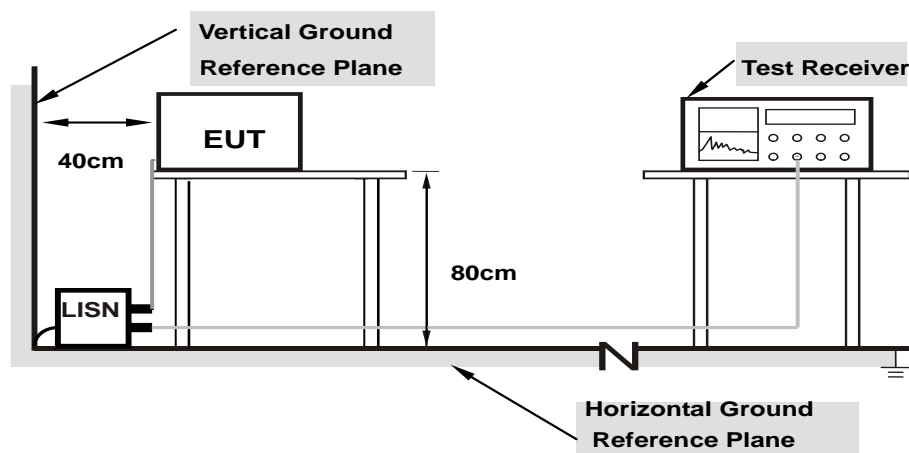

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.16562	10.05	35.28	21.40	45.33	31.45	65.18	55.18	-19.85	-23.73
2	0.28672	10.09	32.45	25.06	42.54	35.15	60.62	50.62	-18.08	-15.47
3	0.93125	10.16	16.86	11.74	27.02	21.90	56.00	46.00	-28.98	-24.10
4	2.59766	10.26	20.30	14.12	30.56	24.38	56.00	46.00	-25.44	-21.62
5	3.76953	10.33	23.63	17.14	33.96	27.47	56.00	46.00	-22.04	-18.53
6	28.56250	11.57	17.35	13.01	28.92	24.58	60.00	50.00	-31.08	-25.42

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

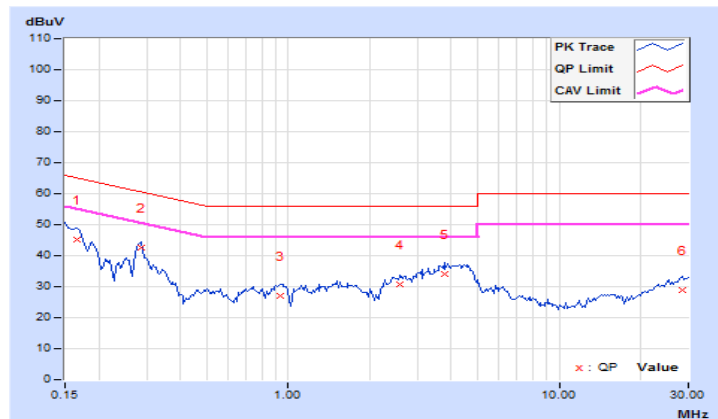


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15000	9.95	36.86	21.99	46.81	31.94	66.00	56.00	-19.19
2	0.28281	9.99	32.02	23.29	42.01	33.28	60.73	50.73	-18.72	-17.45
3	1.39844	10.06	14.50	8.72	24.56	18.78	56.00	46.00	-31.44	-27.22
4	3.83594	10.18	22.11	14.62	32.29	24.80	56.00	46.00	-23.71	-21.20
5	17.92969	11.04	11.44	6.28	22.48	17.32	60.00	50.00	-37.52	-32.68
6	29.12500	11.30	20.68	16.06	31.98	27.36	60.00	50.00	-28.02	-22.64

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

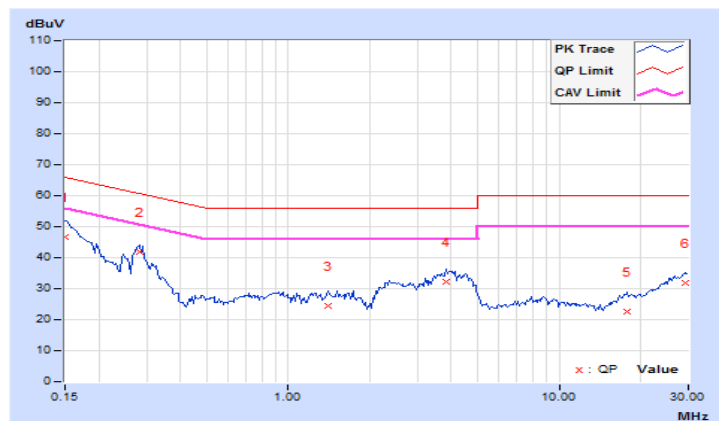

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Client device	250mW (24 dBm)
U-NII-2A		√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C		√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		√	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.


4.3.2 Test Setup

FOR POWER OUTPUT MEASUREMENT


For channel straddling 5725MHz:



For other channels:



FOR 26dB OCCUPIED BANDWIDTH



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For channel straddling 5725MHz:

Follow FCC KDB 789033 UNII test procedure:

802.11ac (80MHz)

Method SA-2

1. Set span to encompass the emission bandwidth (EBW) of the signal.
2. Set RBW =1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Number of points in sweep ≥ 2 Span / RBW.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging mode
8. Compute power by integrating the spectrum across the 26 dB EBW of the signal.
9. Duty factor need added to measured value (duty cycle < 98 percent).

Other Modulation mode

Method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW =1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Number of points in sweep ≥ 2 Span / RBW.
5. Sweep time = auto.
6. Set trigger to free run (duty cycle ≥ 98 percent)
7. Detector = RMS.
8. Trace average at least 100 traces in power averaging mode
9. Compute power by integrating the spectrum across the 26 dB EBW of the signal.

For other channels:

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB OCCUPIED BANDWIDTH

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11a

Power Output:

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	18.86	19.27	161.441	22.08	24.00	Pass
40	5200	20.71	21.07	245.699	23.90	24.00	Pass
48	5240	20.60	21.01	240.998	23.82	24.00	Pass
52	5260	20.71	21.22	250.195	23.98	24.00	Pass
60	5300	20.66	21.23	249.152	23.96	24.00	Pass
64	5320	18.82	19.31	161.518	22.08	24.00	Pass
100	5500	18.55	19.60	162.815	22.12	24.00	Pass
116	5580	20.66	21.21	248.543	23.95	24.00	Pass
140	5700	17.89	19.10	142.801	21.55	24.00	Pass
*144 (UNII-2C Band)	5720	18.66	18.71	147.753	21.70	24.00	Pass
*144 (UNII-3 Band)	5720	11.16	11.87	28.444	14.54	30.00	Pass
149	5745	21.14	21.67	276.91	24.42	30.00	Pass
157	5785	21.12	21.45	269.057	24.30	30.00	Pass
165	5825	21.05	21.12	256.77	24.10	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.

The Average Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
144	5720	176.197	22.46

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	37.29	36.57
60	5300	37.64	36.41
64	5320	23.87	24.29
100	5500	22.45	23.96
116	5580	35.69	39.69
140	5700	22.36	25.23
144 (UNII-2C Band)	5720	23.77	25.77

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
52	5260	36.57	26.63 > 24
60	5300	36.41	26.61 > 24
64	5320	23.87	24.77 > 24
100	5500	22.45	24.51 > 24
116	5580	35.69	26.52 > 24
140	5700	22.36	24.49 > 24
144 (UNII-2C Band)	5720	23.77	24.76 > 24

802.11ac (20MHz)
Power Output:

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	18.25	18.57	138.779	21.42	24.00	Pass
40	5200	20.52	20.90	235.747	23.72	24.00	Pass
48	5240	20.46	20.87	233.353	23.68	24.00	Pass
52	5260	20.62	21.11	244.467	23.88	24.00	Pass
60	5300	20.53	21.12	242.4	23.85	24.00	Pass
64	5320	18.71	19.16	156.716	21.95	24.00	Pass
100	5500	18.52	19.52	160.657	22.06	24.00	Pass
116	5580	20.64	21.21	248.008	23.94	24.00	Pass
140	5700	17.99	19.02	142.75	21.55	24.00	Pass
*144 (UNII-2C Band)	5720	18.70	18.42	143.633	21.57	24.00	Pass
*144 (UNII-3 Band)	5720	11.41	11.68	28.559	14.56	30.00	Pass
149	5745	21.13	21.52	271.624	24.34	30.00	Pass
157	5785	21.03	21.34	262.909	24.20	30.00	Pass
165	5825	21.06	21.04	254.701	24.06	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.

The Average Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
144	5720	172.192	22.36

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	36.47	37.51
60	5300	36.35	36.02
64	5320	24.01	25.51
100	5500	22.56	25.27
116	5580	34.51	40.45
140	5700	22.26	23.77
144 (UNII-2C Band)	5720	23.43	26.40

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
52	5260	36.47	26.61 > 24
60	5300	36.02	26.56 > 24
64	5320	24.01	24.8 > 24
100	5500	22.56	24.53 > 24
116	5580	34.51	26.37 > 24
140	5700	22.26	24.47 > 24
144 (UNII-2C Band)	5720	23.43	24.69 < 24

802.11ac (40MHz)

Power Output:

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	14.62	15.05	60.962	17.85	24.00	Pass
46	5230	20.81	21.11	249.626	23.97	24.00	Pass
54	5270	20.84	21.09	249.868	23.98	24.00	Pass
62	5310	16.28	16.59	88.066	19.45	24.00	Pass
102	5510	15.62	16.01	76.377	18.83	24.00	Pass
110	5550	20.82	21.12	250.201	23.98	24.00	Pass
134	5670	18.64	19.01	152.73	21.84	24.00	Pass
*142 (UNII-2C Band)	5710	19.62	19.35	177.721	22.50	24.00	Pass
*142 (UNII-3 Band)	5710	6.71	7.41	10.196	10.08	30.00	Pass
151	5755	21.92	21.98	313.358	24.96	30.00	Pass
159	5795	21.95	21.88	310.845	24.93	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.

The Average Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
142	5710	187.917	22.74

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
54	5270	79.09	79.66
62	5310	41.87	42.13
102	5510	42.20	41.55
110	5550	73.37	88.83
134	5670	49.42	65.61
142 (UNII-2C Band)	5710	61.41	63.38

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
54	5270	79.09	29.98 > 24
62	5310	41.87	27.21 > 24
102	5510	41.55	27.18 > 24
110	5550	73.37	29.65 > 24
134	5670	49.42	27.93 > 24
142 (UNII-2C Band)	5710	61.41	28.88 > 24

802.11ac (80MHz)

Power Output:

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	13.03	13.22	41.08	16.14	24.00	Pass
58	5290	16.08	16.12	81.477	19.11	24.00	Pass
106	5530	14.58	14.62	57.681	17.61	24.00	Pass
122	5610	20.58	20.62	229.633	23.61	24.00	Pass
*138 (UNII-2C Band)	5690	18.52	18.45	145.601	21.63	24.00	Pass
*138 (UNII-3 Band)	5690	2.69	3.59	4.276	6.31	30.00	Pass
155	5775	20.62	20.76	234.469	23.70	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

The Average Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
138	5690	149.877	21.76

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH


Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
58	5290	84.44	84.05
106	5530	84.31	84.94
122	5610	141.56	164.94
138 (UNII-2C Band)	5690	116.92	125.77

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth


Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
58	5290	84.05	30.24 > 24
106	5530	84.31	30.25 > 24
122	5610	141.56	32.5 > 24
138 (UNII-2C Band)	5690	116.92	31.67 > 24

Spectrum Plot of Worst Value


802.11a / Chain 0 : CH140

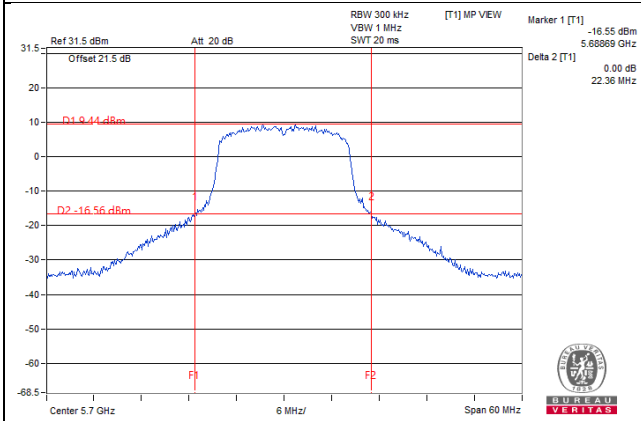


802.11ac (20MHz) / Chain 0 : CH140

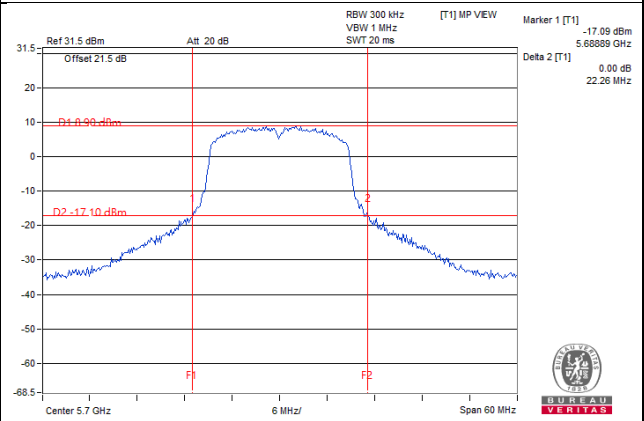

802.11ac (40MHz) / Chain 1 : CH102

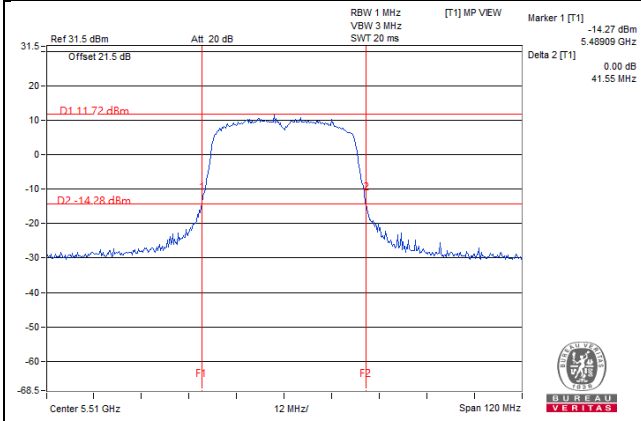


802.11ac (80MHz) / Chain 1 : CH58

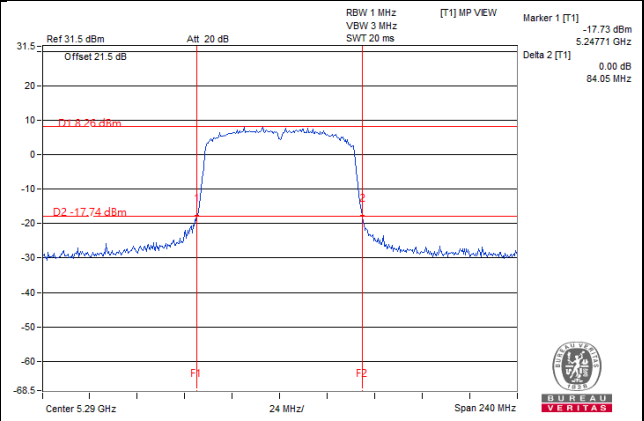

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Results

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.56	16.56
40	5200	18.84	19.20
48	5240	18.60	18.96
52	5260	19.68	19.20
60	5300	19.32	19.20
64	5320	16.56	16.56
100	5500	16.44	16.56
116	5580	18.96	23.40
140	5700	16.56	16.56
144 (UNII-2C Band)	5720	15.80	18.20
144 (UNII-3 Band)	5720	5.80	8.08
149	5745	24.72	28.80
157	5785	25.68	28.80
165	5825	20.76	24.60

802.11ac (20MHz)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.52	17.52
40	5200	18.48	19.08
48	5240	18.48	18.72
52	5260	19.32	19.92
60	5300	19.20	19.92
64	5320	17.52	17.64
100	5500	17.52	17.64
116	5580	18.48	23.04
140	5700	17.52	17.64
144 (UNII-2C Band)	5720	15.80	18.44
144 (UNII-3 Band)	5720	5.56	8.08
149	5745	24.36	26.43
157	5785	25.56	27.48
165	5825	21.00	25.08

802.11ac (40MHz)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.24	36.24
46	5230	37.68	38.40
54	5270	39.36	44.40
62	5310	36.00	35.76
102	5510	36.24	36.00
110	5550	38.64	52.80
134	5670	36.24	36.72
142 (UNII-2C Band)	5710	41.20	45.40
142 (UNII-3 Band)	5710	10.40	16.00
151	5755	54.00	59.48
159	5795	48.96	55.92

802.11ac (80MHz)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	75.36	75.36
58	5290	75.36	75.36
106	5530	75.36	75.36
122	5610	76.80	86.88
138 (UNII-2C Band)	5690	76.76	87.80
138 (UNII-3 Band)	5690	7.24	17.32
155	5775	87.36	94.96

Spectrum Plot of Worst Value


802.11a / Chain 1 : CH149

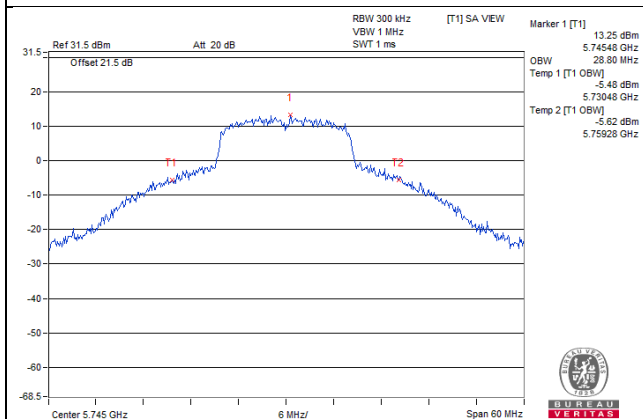


802.11ac (20MHz) / Chain 1 : CH157

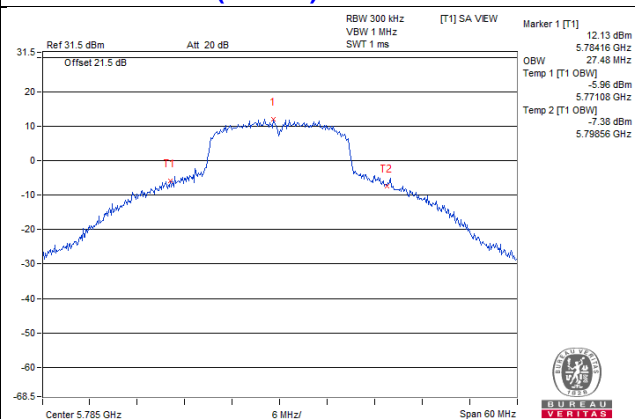

802.11ac (40MHz) / Chain 1 : CH151

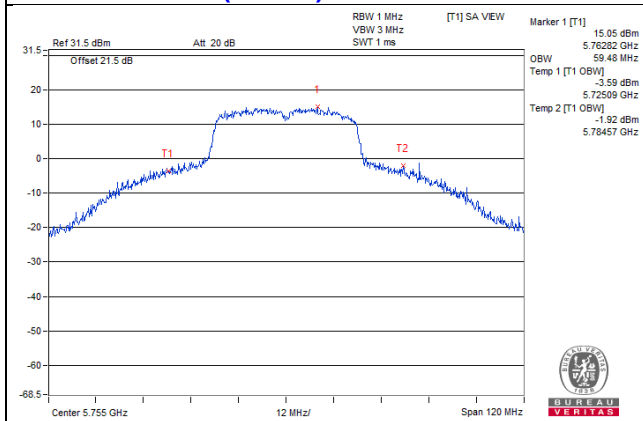


802.11ac (80MHz) / Chain 1 : CH155

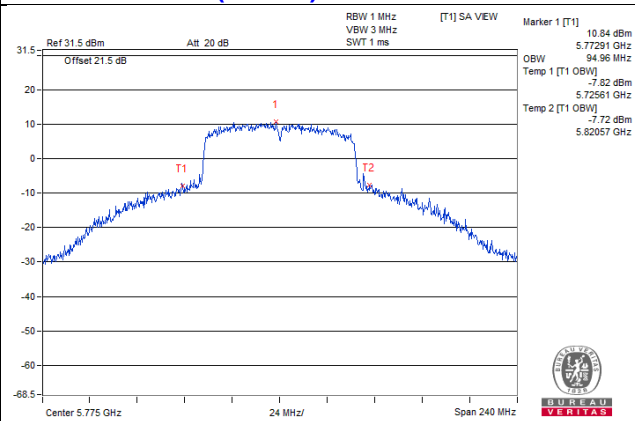


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11a_Chain0 / CH48

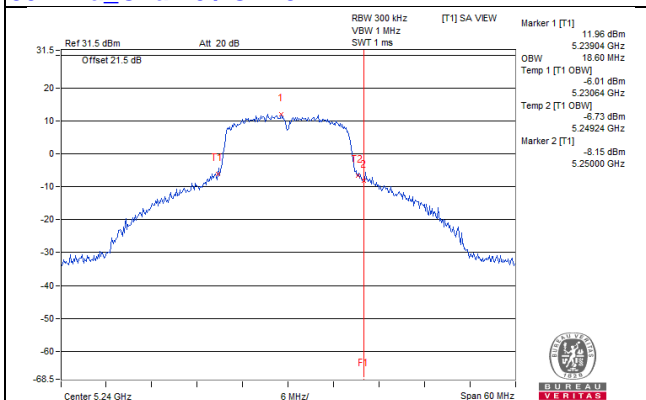


802.11a_Chain1 / CH48

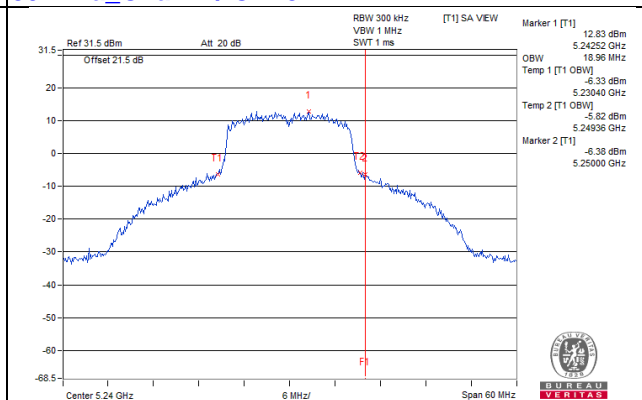


802.11ac(20MHz)_Chain0 / CH48

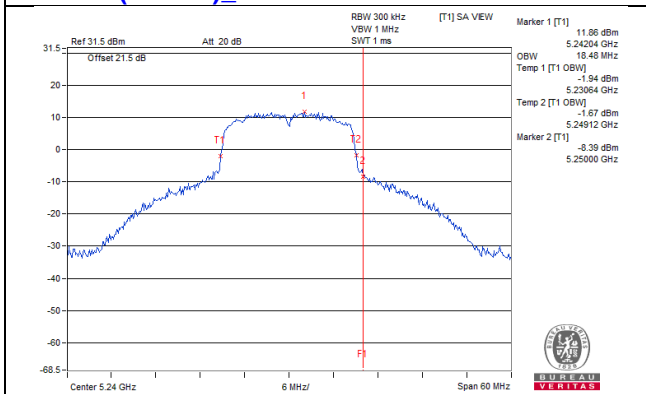


802.11ac(20MHz)_Chain1 / CH48

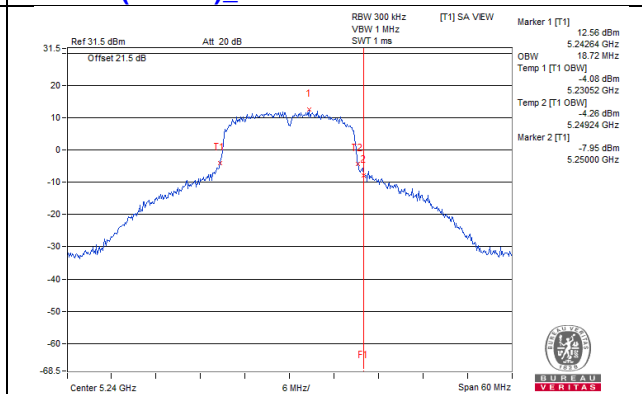


802.11ac(40MHz)_Chain0 / CH46

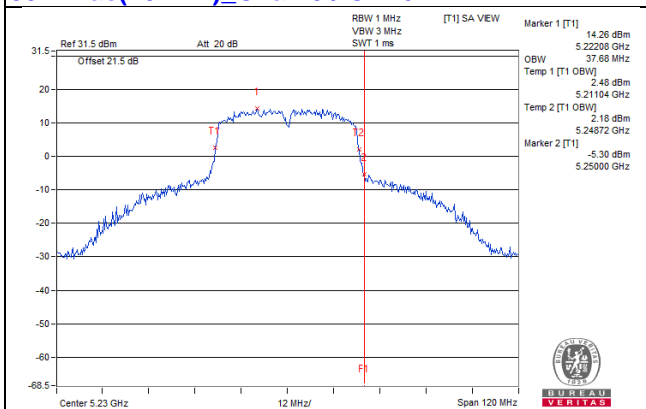


802.11ac(40MHz)_Chain1 / CH46

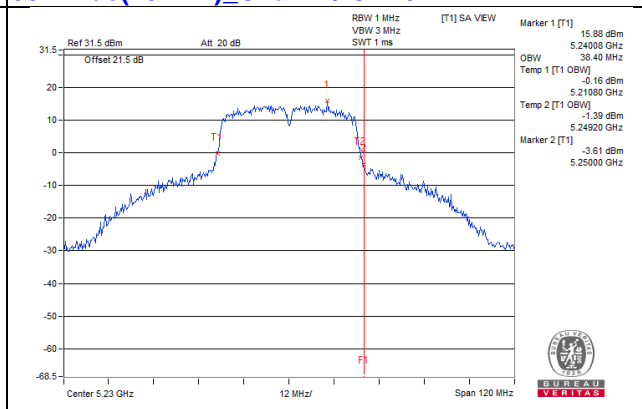

802.11ac(80MHz)_Chain0 / CH42

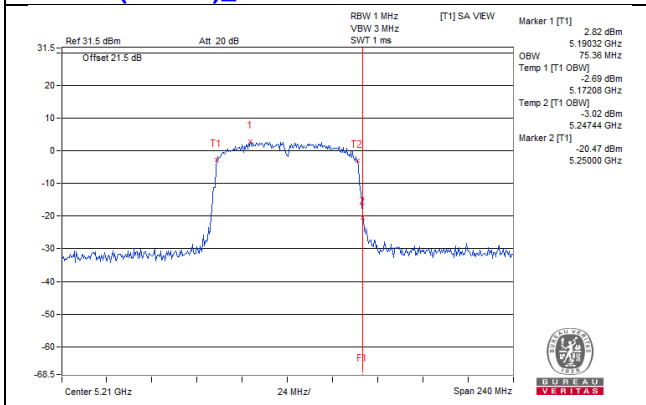


802.11ac(80MHz)_Chain1 / CH42

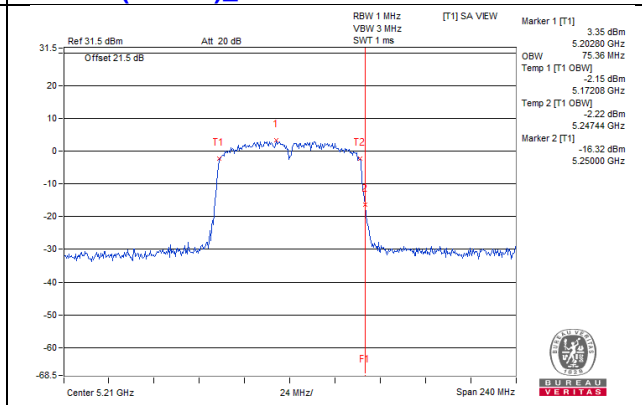


**Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C band)**


802.11a_Chain0 / CH149

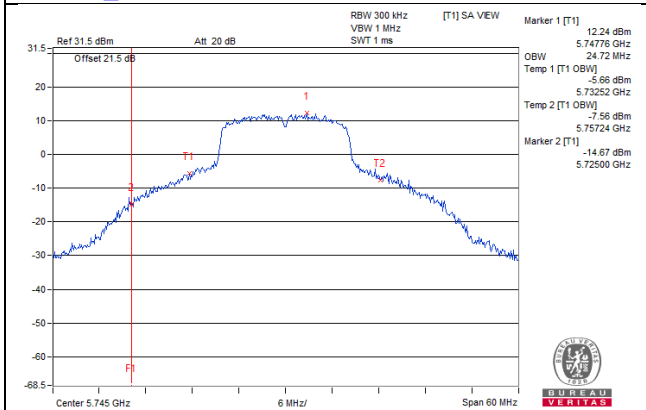


802.11a_Chain1 / CH149

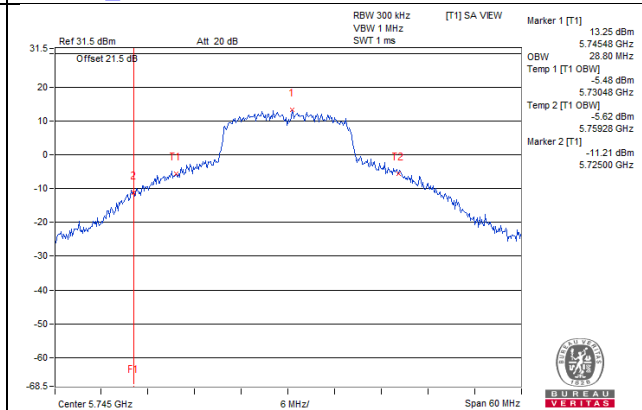


802.11ac(20MHz)_Chain0 / CH149

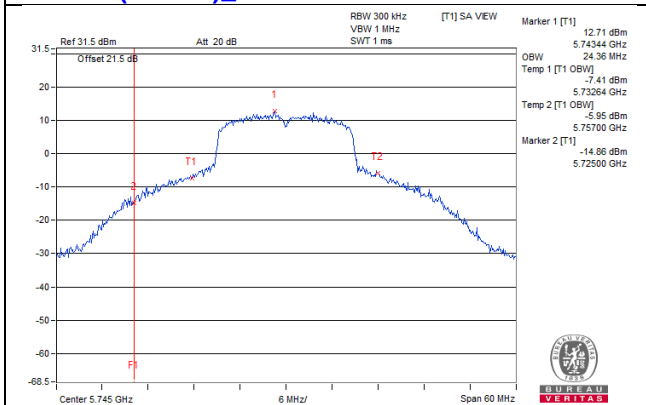


802.11ac(20MHz)_Chain1 / CH149

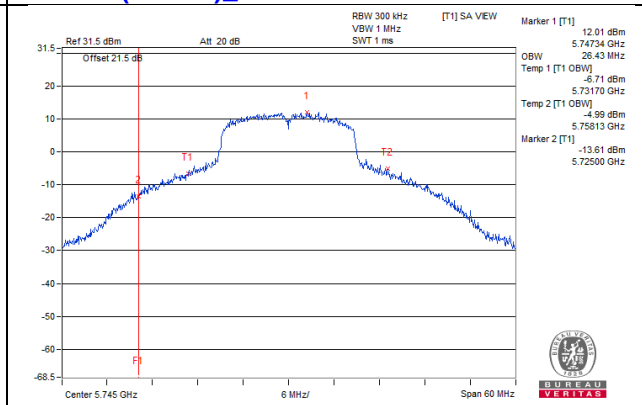


802.11ac(40MHz)_Chain0 / CH151

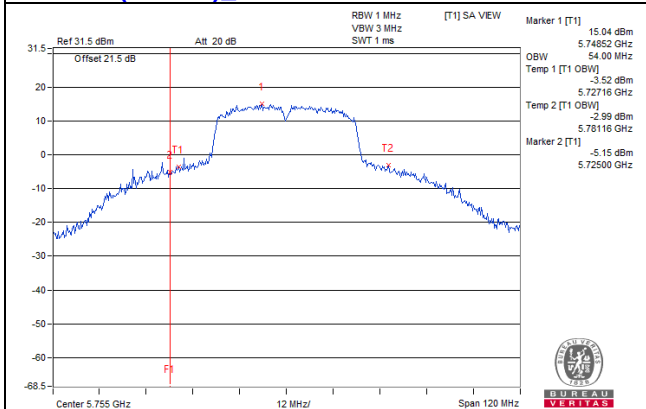


802.11ac(40MHz)_Chain1 / CH151

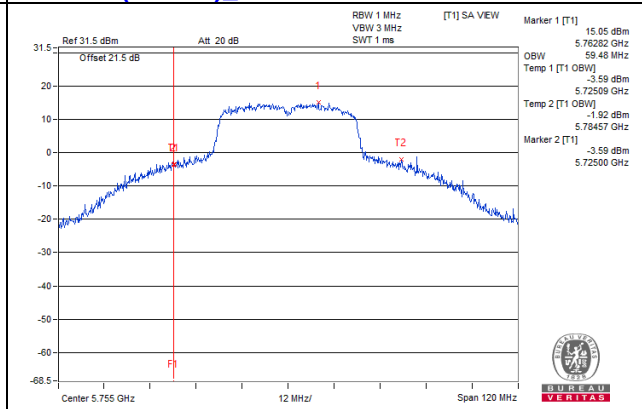

802.11ac(80MHz)_Chain0 / CH155

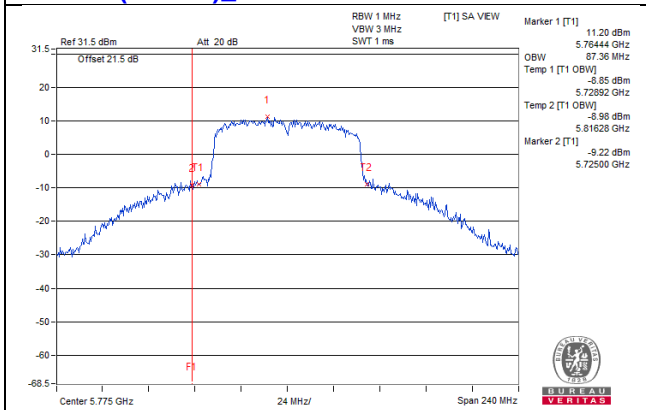

802.11ac(80MHz)_Chain1 / CH155

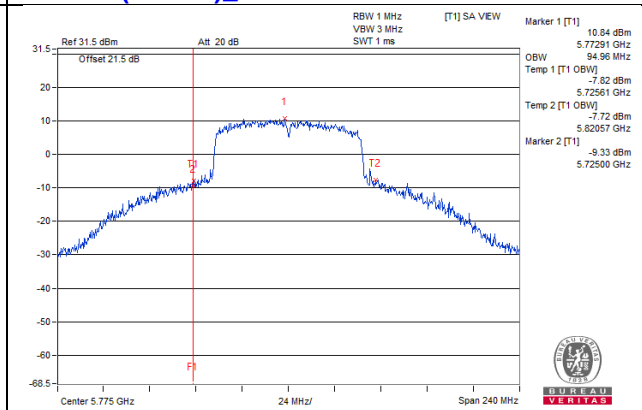


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Client device	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

802.11a, 802.11ac (20MHz), 802.11ac (40MHz)

For U-NII-1, U-NII-2A, U-NII-2C:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

802.11ac (80MHz)

For U-NII-1, U-NII-2A, U-NII-2C:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add $10\log(1/\text{duty cycle})$

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add $10\log(1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

For U-NII-1, U-NII-2A, U-NII-2C:

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
36	5180	5.63	5.91	8.78	11.00	Pass
40	5200	7.40	7.81	10.62	11.00	Pass
48	5240	7.56	7.81	10.70	11.00	Pass
52	5260	7.85	7.91	10.89	11.00	Pass
60	5300	7.83	7.89	10.87	11.00	Pass
64	5320	5.99	6.42	9.22	11.00	Pass
100	5500	5.17	5.57	8.38	11.00	Pass
116	5580	7.06	7.48	10.29	11.00	Pass
140	5700	4.58	4.88	7.74	11.00	Pass
144 (UNII-2C Band)	5720	7.38	7.50	10.45	11.00	Pass

- Note:**
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - For all channels directional gain < 6dBi, so the power density limit no be reduced.

802.11ac (20MHz)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
36	5180	4.92	5.01	7.98	11.00	Pass
40	5200	7.33	7.55	10.45	11.00	Pass
48	5240	7.35	7.55	10.46	11.00	Pass
52	5260	7.66	7.92	10.80	11.00	Pass
60	5300	7.59	8.04	10.83	11.00	Pass
64	5320	5.58	6.14	8.88	11.00	Pass
100	5500	4.89	5.35	8.14	11.00	Pass
116	5580	6.87	7.27	10.08	11.00	Pass
140	5700	4.42	4.60	7.52	11.00	Pass
144 (UNII-2C Band)	5720	7.24	7.36	10.31	11.00	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For all channels directional gain < 6dBi, so the power density limit no be reduced.

802.11ac (40MHz)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
38	5190	-2.13	-1.68	1.11	11.00	Pass
46	5230	3.96	4.82	7.42	11.00	Pass
54	5270	4.78	5.42	8.12	11.00	Pass
62	5310	-0.01	0.30	3.16	11.00	Pass
102	5510	-2.01	-0.43	1.86	11.00	Pass
110	5550	4.16	4.98	7.60	11.00	Pass
134	5670	1.82	2.28	5.07	11.00	Pass
142 (UNII-2C Band)	5710	4.82	4.97	7.91	11.00	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For all channels directional gain < 6dBi, so the power density limit no be reduced.


802.11ac (80MHz)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
42	5210	-9.80	-9.51	0.14	-6.50	11.00	Pass
58	5290	-4.05	-3.36	0.14	-0.54	11.00	Pass
106	5530	-5.62	-4.93	0.14	-2.11	11.00	Pass
122	5610	0.12	0.10	0.14	3.26	11.00	Pass
138 (UNII-2C Band)	5690	0.76	0.47	0.14	3.77	11.00	Pass


- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For all channels directional gain < 6dBi, so the power density limit no be reduced.

Spectrum Plot of Worst Value


802.11a / Chain 1 : CH52

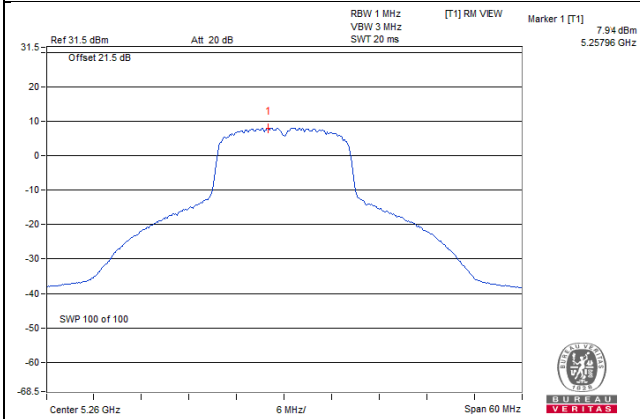


802.11ac (20MHz) / Chain 1 : CH60

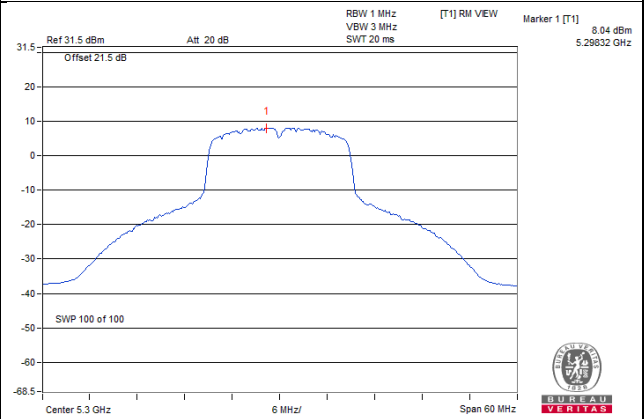

802.11ac (40MHz) / Chain 1 : CH54

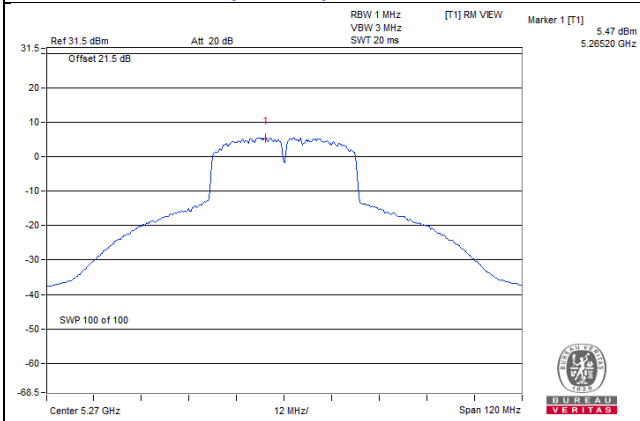

802.11ac (80MHz) / Chain 0 : CH138 (UNII-2C)

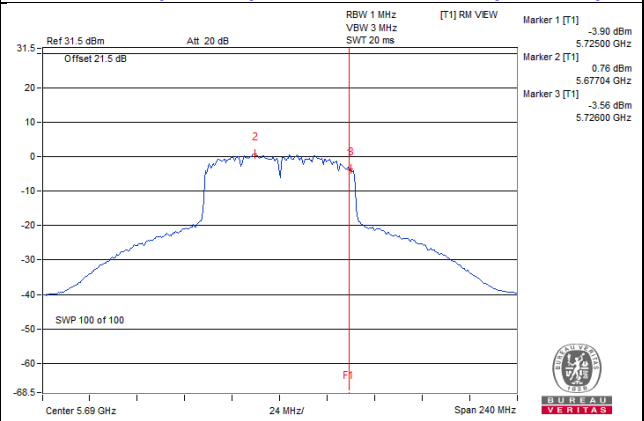

For U-NII-3:
802.11a

Chan.	Freq. (MHz)	PSD (dBm/300kHz)		Total PSD		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	mW/300kHz	dBm/300kHz			
144 (U-NII-3 Band)	5720	-2.15	-2.18	1.2149	0.85	3.07	30.00	Pass
149	5745	-0.70	-0.49	1.7444	2.42	4.64	30.00	Pass
157	5785	-0.67	-0.97	1.6569	2.19	4.41	30.00	Pass
165	5825	-1.90	-1.92	1.2883	1.10	3.32	30.00	Pass

- Note:** 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. For all channels directional gain < 6dBi, so the power density limit no be reduced.

802.11ac (20MHz)

Chan.	Freq. (MHz)	PSD (dBm/300kHz)		Total PSD		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	mW/300kHz	dBm/300kHz			
144 (U-NII-3 Band)	5720	-2.90	-2.32	1.099	0.41	2.63	30.00	Pass
149	5745	-1.40	-1.23	1.4778	1.70	3.92	30.00	Pass
157	5785	-1.08	-1.42	1.5009	1.76	3.98	30.00	Pass
165	5825	-2.20	-2.06	1.2249	0.88	3.10	30.00	Pass

- Note:** 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. For all channels directional gain < 6dBi, so the power density limit no be reduced.

802.11ac (40MHz)

Chan.	Freq. (MHz)	PSD (dBm/300kHz)		Total PSD		Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	mW/300kHz	dBm/300kHz			
142 (U-NII-3 Band)	5710	-6.88	-6.03	0.4546	-3.42	-1.20	30.00	Pass
151	5755	-4.47	-4.54	0.7088	-1.49	0.73	30.00	Pass
159	5795	-5.00	-4.68	0.6566	-1.83	0.39	30.00	Pass

- Note:** 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. For all channels directional gain < 6dBi, so the power density limit no be reduced.


802.11ac (80MHz)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)		Duty Factor (dB)	Total PSD With Duty Factor		Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1		mW/300kHz	dBm/300kHz			
138 (U-NII-3 Band)	5690	-12.27	-12.14	0.14	0.12422	-9.06	-6.84	30.00	Pass
155	5775	-8.43	-8.60	0.14	0.2906	-5.37	-3.15	30.00	Pass


- Note:**
- Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 - For all channels directional gain < 6dBi, so the power density limit no be reduced.

Spectrum Plot of Worst Value


802.11a / Chain 1 : CH149

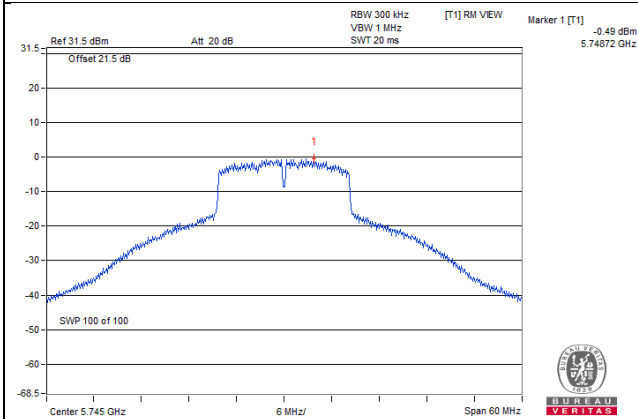


802.11ac (20MHz) / Chain 0 : CH157

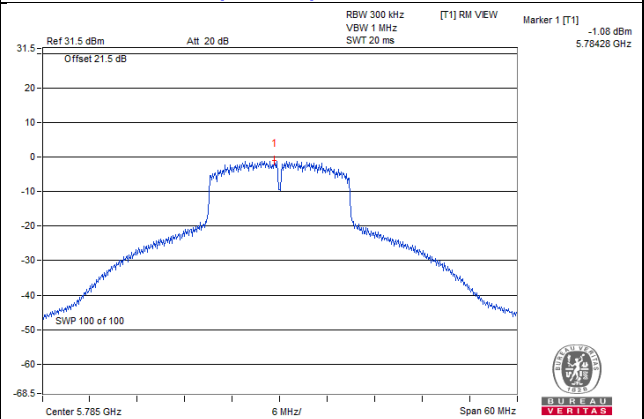

802.11ac (40MHz) / Chain 0 : CH151

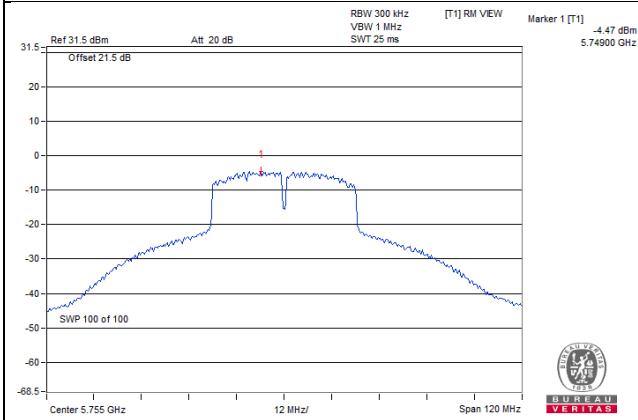

802.11ac (80MHz) / Chain 0 : CH155

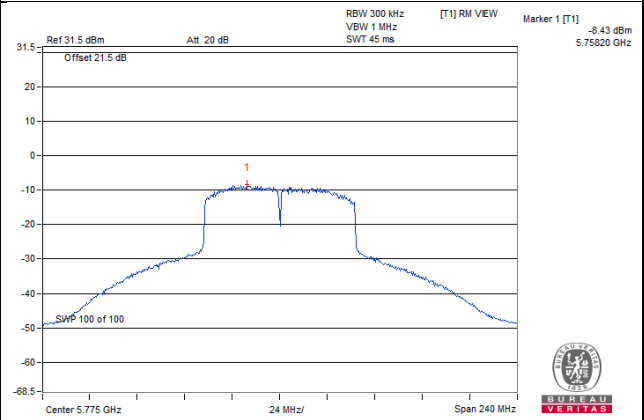


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

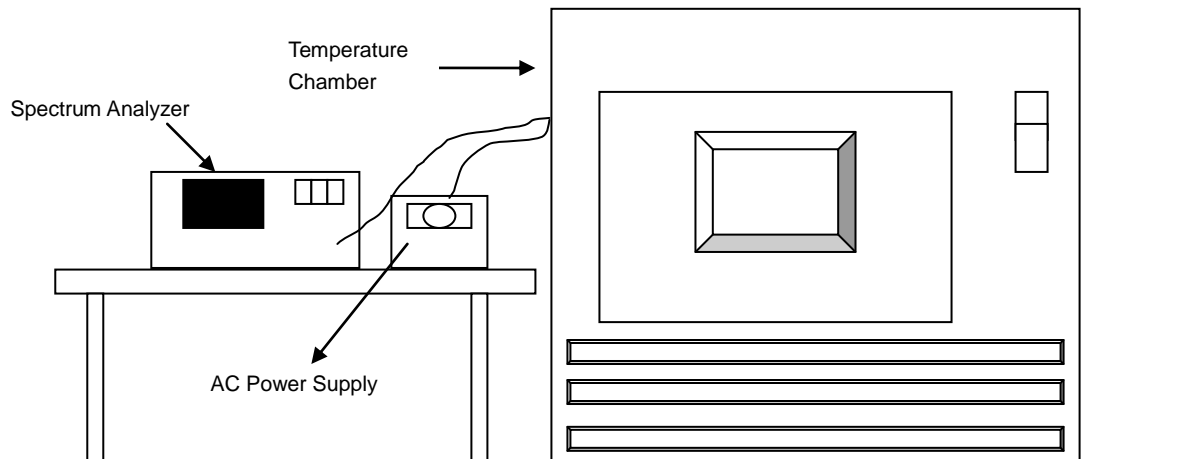

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	120	5179.9838	PASS	5179.9846	PASS	5179.9814	PASS	5179.9813	PASS
40	120	5180.0125	PASS	5180.0106	PASS	5180.0125	PASS	5180.0123	PASS
30	120	5180.0151	PASS	5180.013	PASS	5180.0154	PASS	5180.0153	PASS
20	120	5179.9857	PASS	5179.9841	PASS	5179.9861	PASS	5179.9859	PASS
10	120	5179.9815	PASS	5179.9834	PASS	5179.9798	PASS	5179.9828	PASS
0	120	5179.9957	PASS	5179.9932	PASS	5179.994	PASS	5179.9962	PASS
-10	120	5179.991	PASS	5179.9891	PASS	5179.988	PASS	5179.9868	PASS
-20	120	5180.0199	PASS	5180.0206	PASS	5180.0243	PASS	5180.0239	PASS
-30	120	5180	PASS	5180.0012	PASS	5179.9997	PASS	5180.0021	PASS


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5179.9856	PASS	5179.9848	PASS	5179.9863	PASS	5179.9859	PASS
	120	5179.9857	PASS	5179.9841	PASS	5179.9861	PASS	5179.9859	PASS
	102	5179.9859	PASS	5179.9843	PASS	5179.9853	PASS	5179.9859	PASS

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
144 (UNII-3 Band)	5720	2.70	3.10	0.5	PASS
149	5745	16.36	16.35	0.5	PASS
157	5785	15.72	16.37	0.5	PASS
165	5825	15.43	15.74	0.5	PASS

802.11ac (20MHz)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
144 (UNII-3 Band)	5720	2.82	2.49	0.5	PASS
149	5745	16.30	16.33	0.5	PASS
157	5785	16.32	16.36	0.5	PASS
165	5825	15.78	15.73	0.5	PASS

802.11ac (40MHz)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
142 (UNII-3 Band)	5710	1.51	2.41	0.5	PASS
151	5755	35.57	32.64	0.5	PASS
159	5795	33.84	33.94	0.5	PASS

802.11ac (80MHz)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
138 (UNII-3 Band)	5690	0.54	0.55	0.5	PASS
155	5775	72.65	71.55	0.5	PASS

Spectrum Plot of Worst Value


802.11a / Chain 0 : CH144 (U-NII-3)

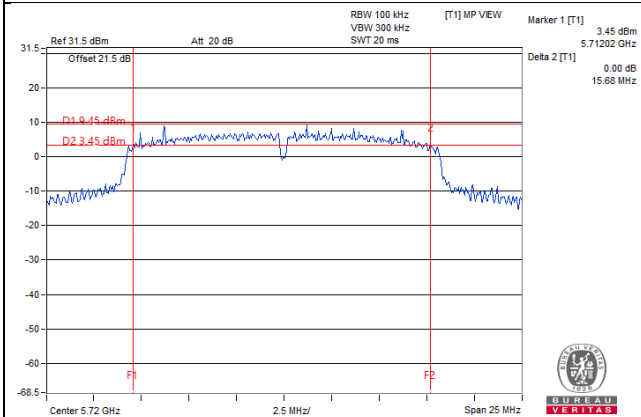


802.11ac (20MHz) / Chain 1 : CH144 (U-NII-3)

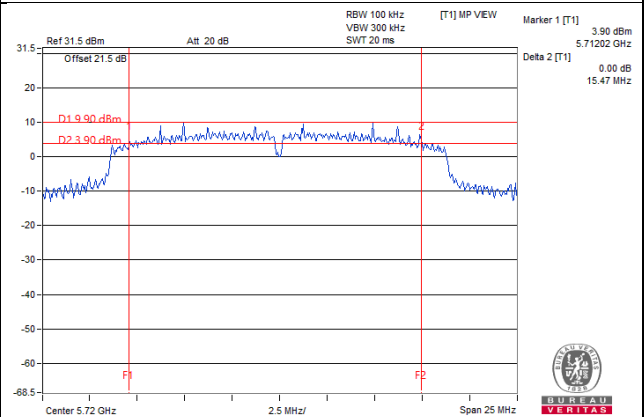

802.11ac (40MHz) / Chain 0 : CH142 (U-NII-3)

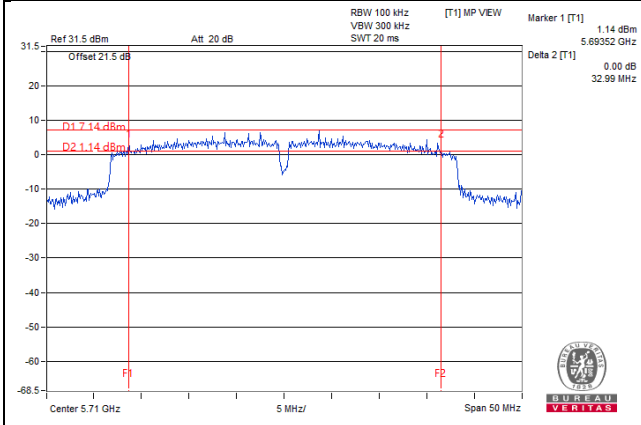

802.11ac (80MHz) / Chain 0 : CH138 (U-NII-3)

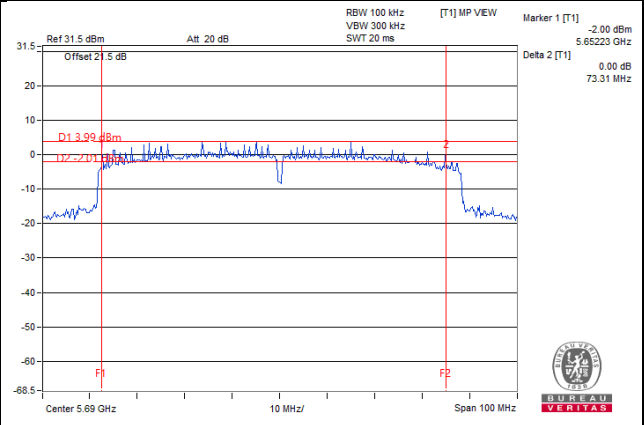

Note: The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---