



NOTE: 1. SAFETY COMPONENT

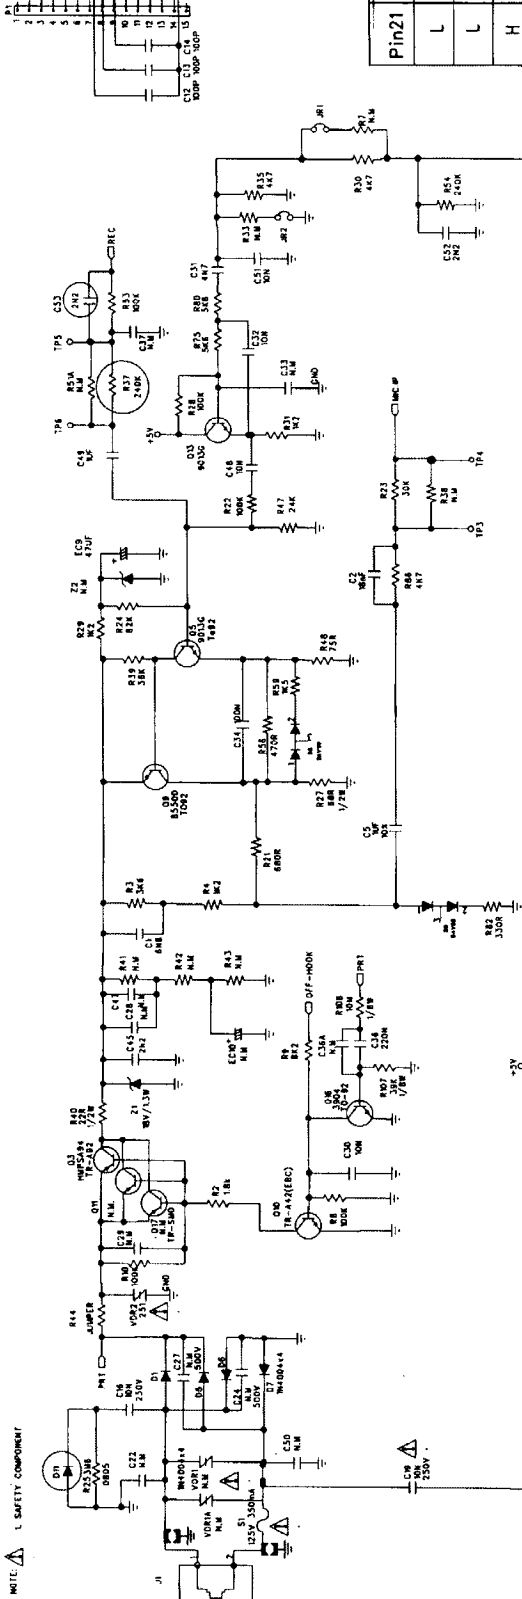

Pin21	Pin22	Flash Time
L	L	100ms
L	H	300ms
H	X	600ms

Remark-->
 JR1/JR2--Prepare for adjust DTMF level
 R38--increase line Dev.
 R51A--increase LINE_O/P level
 R45--Decrease Ringer start level
 Jc1/Jc2/Jc3/Jc4--Adjust Tx frequency

mask for safety component
 ESD PASS TERMINAL

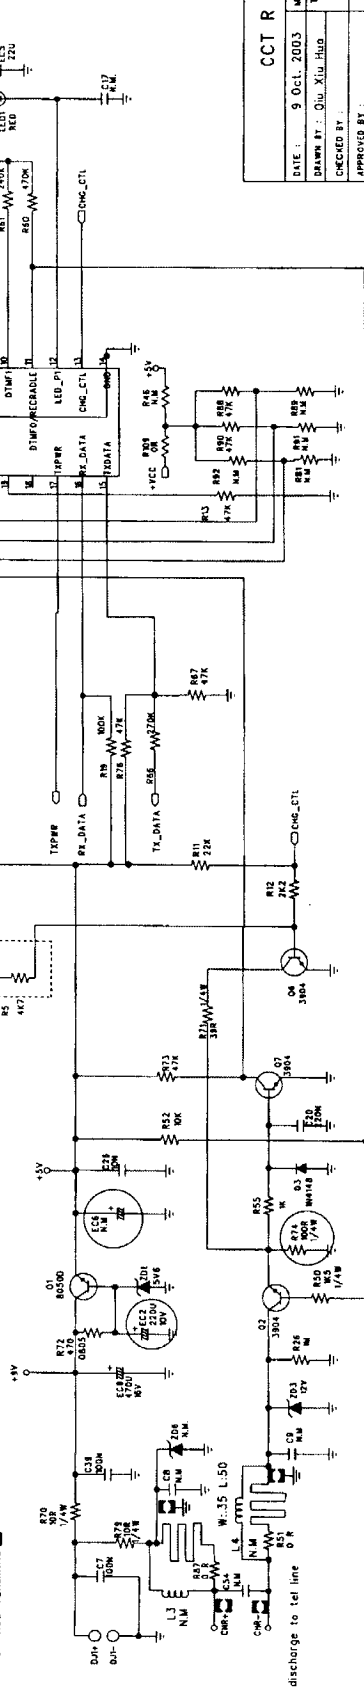

CCT R & D Ltd

DATE: 9 Oct. 2003

MODEL: 24928D

TITLE: BASE MAIN PCB


CHECKED BY: 24928D/ASCH

APPROVED BY: 24928D/ASCH

DRAWING NO: 24928D-0000

REV: 08

SHEET: 1 OF 4

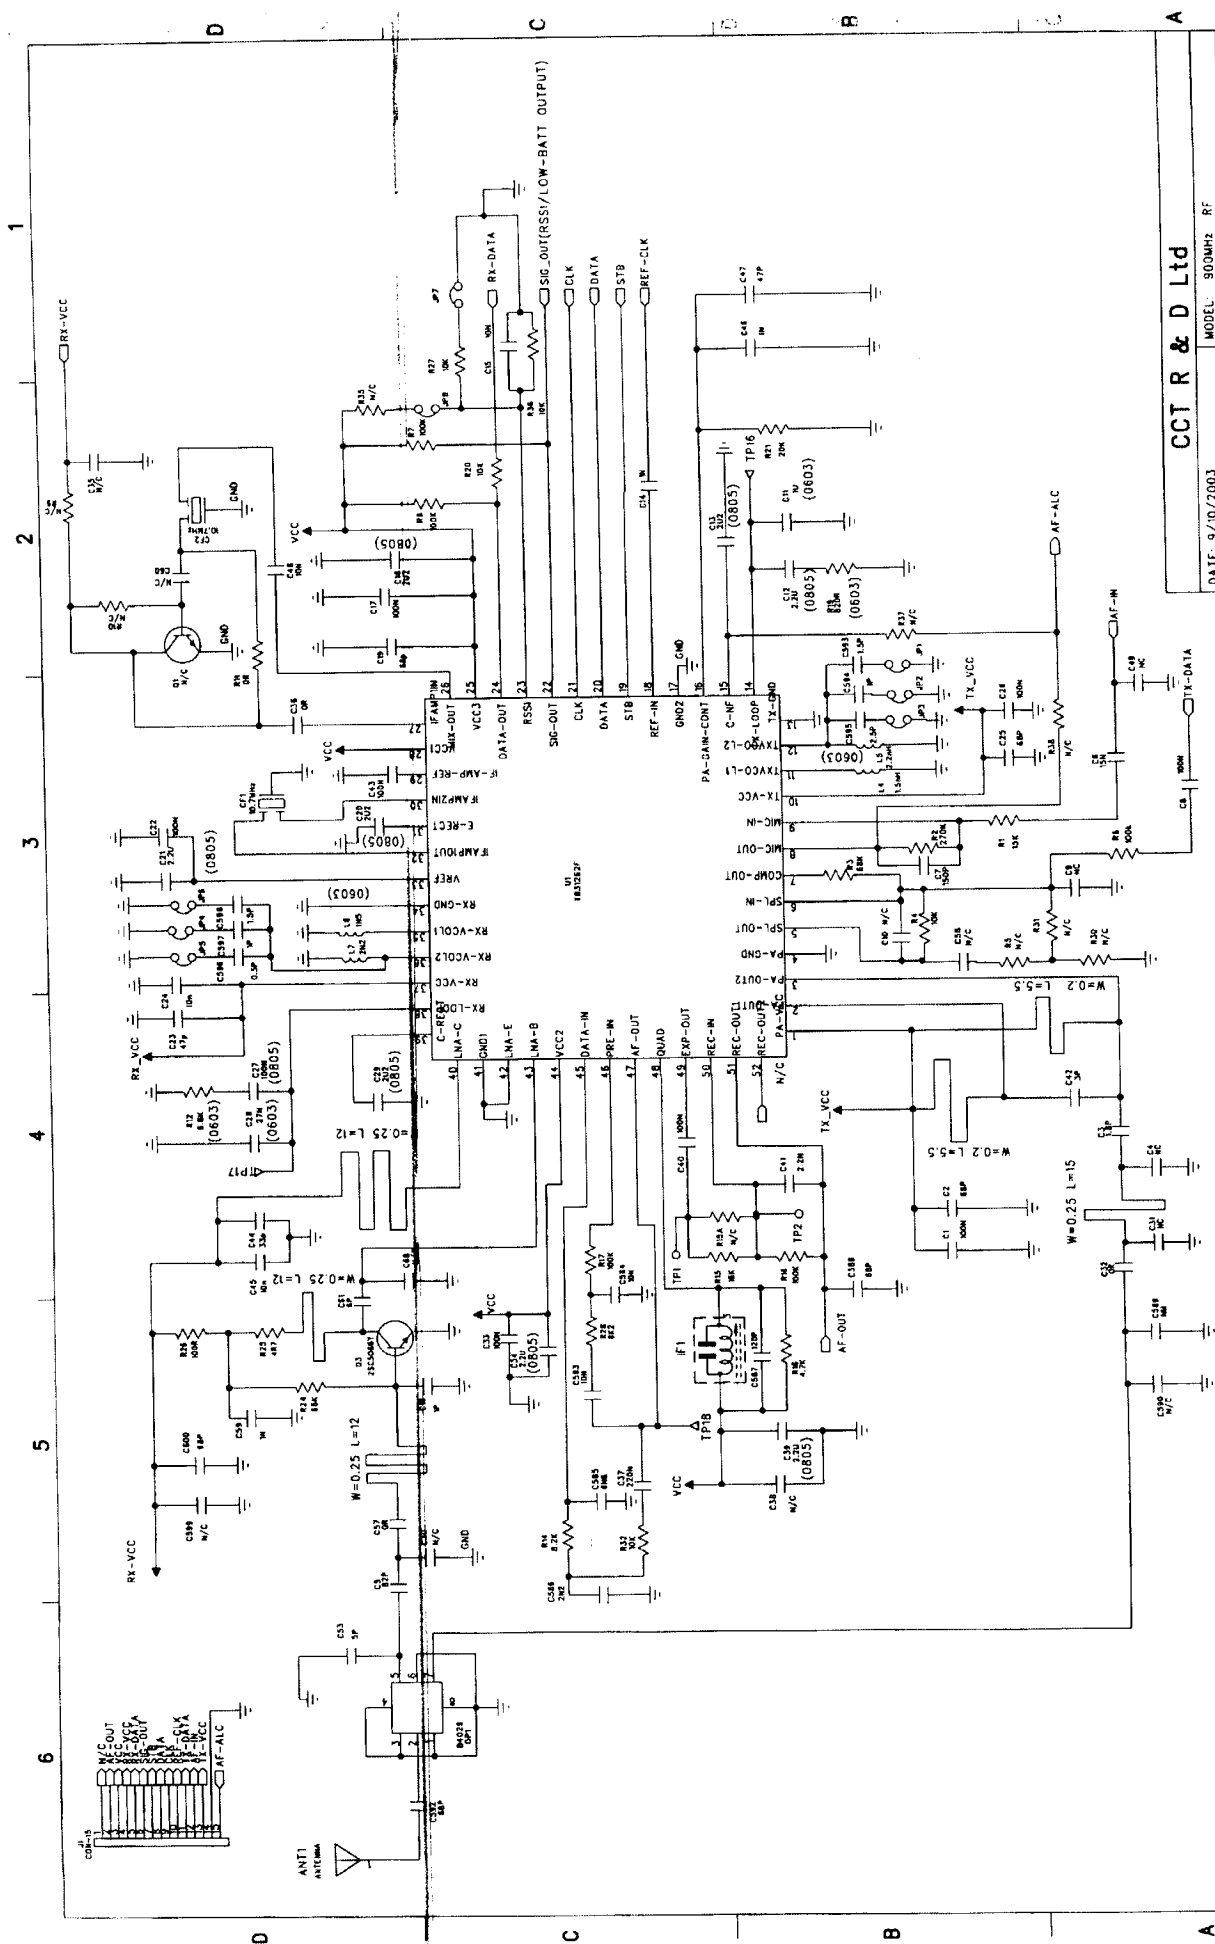

CCT R & D Ltd	
DATE: 9/10/2003	MODEL: 900MHz RF
DRAWN BY: PU HONG PING	TITLE: 900M TB31262F HANDSET RF MODULE
CHECKED BY: J. PINLAC	
APPROVED BY:	
PCB NO: TB31262F RF MODULE	DRAWING NO:
DISK NAME:	REV: 08

FCC ID: G9H2-6928D
 Marstech Report No. 23366D
 EXHIBIT C(2)-4