

Marstech Limited

11 Kelfield Street, Etobicoke, Ontario, Canada, M9W 5A1
Telephone (416) 246-1116, Fax (416) 246-1020

Authorized by:
President, Marstech
Canada

Engineering &
Administrative

CFR 47 FCC
Cert.

Testing For FCC
Submissions/Verifications

Approved Test Facility

Qualified
Technician

TEST REPORT			
REPORT DATE:	20 October 2000		
REPORT NO:	20362D		
CONTENTS:	See Table of Contents		
SUBMITTOR:	ATLINKS USA, Inc. 101 West 103 rd Street Indianapolis, IN 46290-1102 USA		
SUBJECT:	Model No:	26965XXX-A	
	FCC ID:	G9H2-6965	
TEST SPECIFICATION	CFR 47 FCC Part 15 Sections: 15.35, 15.109, 15.209 and 15.249 NOTE: Tests Conducted Are "Type" Tests.		
DATE SAMPLE RECEIVED:	10 October and 22 November 2000	DATE TESTED:	13, 18 October and 22 November 2000
RESULTS:	Equipment tested complies with referenced specification.		
ALTERATIONS	The following alterations are required in compliance with referenced specification: <u>Base RF Module:</u> 1. C314, 4.3pF capacitor was changed to 2.7pF. 2. C309, 12pF capacitor was changed to 2pF.		
Tested by:	Edward Chang	Approved by: R. G. Marshall	Robert G. Marshall, P. Eng. Date: Dec 5/00

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF MARSTECH
LIMITED. This report was prepared by Marstech Limited for the account of the "Submitter". The material in it reflects Marstech's judgement in light of the information available to it at the time of preparation. Any use which a Third Party makes of this report, or any reliance on decisions to be made based on it, are the responsibility of such Third Parties. Marstech accepts no responsibility for damages, if any, suffered by any Third Party as a result of decisions made or actions based on this report.

TECHNICAL REPORT - FCC 2.1033(b)

Applicant

ATLINKS USA, Inc.
101 West 103rd Street
Indianapolis, IN
46290-1102 USA

FCC Identifier

G9H2-6965

Manufacturer

Huiyang CCT Telecommunications Products Co. Ltd.
CCT Technology Park, San He Economic Experimental Zone
Huiyang City, Guangdong Province
P. R. of China

TABLE OF CONTENTS

<u>Exhibit Description</u>	<u>ECC Ref.</u>	<u>Page</u>
A Installation and Operating Instructions Furnished to the User.	2.1033(b)(3)	Exhibit A Exhibit A(1)-1
B Description of Circuit Functions	2.1033(b)(4)	Exhibit B Exhibit B(1)-1 to -12
C Block Diagram Schematic Diagram	2.1033(b)(5)	Exhibit C Exhibit C(1)-1 to -4 Exhibit C(2)-1 to -5
D Report of Measurements	2.1033(b)(6)	Exhibit D
E Photographs Label Equipment	2.1033(b)(7)	Exhibit E Exhibit E(1)-1 to -2 Exhibit E(2)-1 to -8

EXHIBIT D

[FCC Ref. 2.1033(b)(6)]

"Report of Measurements"

TABLE OF CONTENTS

TEST REPORT CONTAINING:

Exhibit D(1)-2	Test Equipment List
Exhibit D(1)-3	Test Procedure
Exhibit D(1)-4	Product Description
Exhibit D(1)-5	Band Edges
Exhibit D(1)-6	Power Line Conducted Interference
Exhibit D(1)-7 to -9	Field Strength of Emissions

EXHIBIT ATTACHMENTS:

Attachments 1 to 4	Power Line Conducted Emissions
Attachment 5	Band Edge Attenuation
Attachments 6 to 7	Test Setup Photos
Attachment 8	Measurement Facility (3 meter site)

TEST EQUIPMENT LIST

- 1 Spectrum Analyzer: HP 8591EM, S/N 3639A00995, Cal. March 2000.
- 2 Spectrum Analyzer: ANRITSU 2601A, S/N MT64544, Cal. May 2000.
- 3 Spectrum Analyzer: IFR AN940, S/N 635001039, Cal. March 2000.
- 4 Spectrum Analyzer: Advantest R3271A, S/N J001279, Cal. due May 2001.
- 5 Preamp: HP 8449B, S/N 3008A00378, Cal. March 2000.
- 6 Bilog Antenna: Chase CBL6121A, S/N 1039, Cal. July 2000.
- 7 Dipole Antenna Kit: Compliance Design A100, S/N 00430, Cal. due Sept. 2004.
- 8 Double-Ridged Horn Antenna: EMCO 3115, S/N 9611-5010, 1-18GHz.
- 9 Horn Antenna: Q-PAR 6878/24, S/N 1721, 1.5-18GHz.
- 10 Line Impedance Stabilization Network: Marstech, Cal. July 2000.

TEST PROCEDURE

GENERAL:

Shielded interface cables were used in all cases except for cables connecting to the telephone line and the power cords. A test program was run which simulated a normal transmission.

POWER LINE CONDUCTED INTERFERENCE:

The procedure used was ANSI STANDARD C63.4 1992 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 9KHz QP with an appropriate sweep speed. The ambient temperature of the UUT was 24°F with a humidity of 60%.

BANDWIDTH 20dB:

The measurements were made with the spectrum analyzer's resolution bandwidth (RBW)=100KHz and the video bandwidth (VBW)=1.0MHz and the span set as shown on plot.

POWER OUTPUT:

The radiated output power was measured with the spectrum analyzer and Dipole Antenna.

RADIATION INTERFERENCE:

The test procedure used was ANSI STANDARD C63.4-1992 using an appropriate spectrum analyzer, as listed in the Test Equipment List. The bandwidth (RBW) of the spectrum analyzer was 100KHz/120KHz up to 1GHz with an appropriate sweep speed. The RBW above 1.0GHz was = 1MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 24°F with a humidity of 60%.

PRODUCT DESCRIPTION

The Model 26965XXX-A is a 900 MHZ analog cordless flip phone with caller ID that operates in the 902 to 928 MHz band. The antenna used for the base and the handset is permanently attached to the UUT. Its actual frequency range is:

Portable: **926.125 to 927.675 MHz**

Base: **902.12 to 903.675 MHz**

15.249 (c) BAND EDGES

Requirements: Emissions outside of the frequency band 902 to 928 MHZ must be attenuated 50dB below the fundamental.

Measurement: The base was attenuated by 50 dB. The headset was attenuated by 50 dB.

Measurement Data: The Bandedge was measured at the Low end of the band for the base, and the High end of the band for the handset. See Plots in Attachment 5.

15.107 (a) POWER LINE CONDUCTED INTERFERENCE

Requirements: 0.45 - 30MHz 250 μ V or 47.96dB μ V

Test Procedure: ANSI STANDARD C63.4-1992.
The spectrum was scanned from 0.45 to 30MHz.

Test Data:

THE HIGHEST EMISSION READ FOR LINE 1 WAS 18.66 dB μ V@ 7.20 MHZ.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 17.49 dB μ V@ 7.14 MHZ

The graphs in Attachments 1 to 4 represent the emissions taken for this device.

Test Results:

Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

15.249 (a) and 15.249 (b)
FIELD STRENGTH OF EMISSIONS

Requirements:

<u>Field Strength of Fundamental</u>	<u>Field Strength of Harmonics</u>	<u>S15.209</u>
902 to 928MHz 94dB μ V	54dB μ V/m@ 3m	30-88MHz 40 dB μ V/m@ 3m
		88-216MHz 43.5
		216-960 MHZ 46
		Above 960 MHZ 46

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

Emissions that fall in the restricted bands (15.205) must be less than 54dB μ V/m

FIELD STRENGTH OF EMISSIONS

Test Data:**PORTABLE**


Emission Frequency MHZ	Meter Reading @3m dB μ V	Antenna	Cable and ACF dB	Field Strength dB μ V/M	FCC Limit dB μ V/M	Margin dB	Detector & BW KHz
<u>Channel 1</u>							
926.12489	55.75	RT.4 V	33.4	89.15	94	-4.85	PK 100
1852.26	8.9	Horn V	33.04	41.94	54	-12.06	PK 1000
2778.39	14	Horn V	34.05	48.05	54	-5.95	PK 1000
3704.52	9.4	Horn V	35.57	44.97	54	-9.03	PK 1000
4630.65	14.8	Horn V	37.46	52.26	54	-1.74	PK 1000
5556.78	7.7	Horn V	39.53	47.23	54	-6.77	PK 1000
6482.91	---						
7409.04	---						
<u>Channel 32</u>							
927.67490	55.4	RT.4 V	33.5	88.90	94	-5.1	PK 100
1855.36	---	Horn V	32.96	---	---	---	---
2783.04	15.1	Horn V	34.07	49.17	54	-4.83	PK 1000
3710.72	12.4	Horn V	35.58	47.98	54	-6.02	PK 1000
4638.40	15.7	Horn V	37.47	53.17	54	-0.83	PK 1000
5566.08	9.7	Horn V	39.55	49.25	54	-4.75	PK 1000
6493.76	4.6	Horn V	41.61	46.21	54	-7.79	PK 1000
7421.44	---						

FIELD STRENGTH OF EMISSIONS


Test Data:**BASE UNIT**

Emission Frequency MHZ	Meter Reading @3m dB μ V	Antenna	Cable and ACF dB	Field Strength dB μ V/M	FCC Limit dB μ V/M	Margin dB	Detector & BW KHz
<u>Channel 1</u>							
902.12524	52.75	RT.4 V	33.2	85.95	94	-8.05	PK 100
1804.26	8.9	Horn V	33.17	42.07	54	-11.93	PK 1000
2706.39	---	Horn V	---	---	54	---	PK 1000
3608.52	10.3	Horn V	35.38	45.68	54	-8.32	PK 1000
4510.65	14.7	Horn V	37.09	51.79	54	-2.21	PK 1000
5412.78	---						
6314.91	---						
7217.04	---						
<u>Channel 32</u>							
903.67515	54	RT.4 V	33.3	87.30	94	-6.7	PK 100
1807.36	10.9	Horn V	33.16	44.06	54	-9.94	PK 1000
2711.04	---	Horn V	---	---	54	---	PK 1000
3614.72	10.36	Horn V	35.39	45.75	54	-8.25	PK 1000
4518.40	11.7	Horn V	37.10	48.80	54	-5.20	PK 1000
5422.08	---						
6325.76	---						
7229.44	---						


POWER LINE CONDUCTED EMISSIONS
MODEL 26965XXX-A (Remote); LINE 1

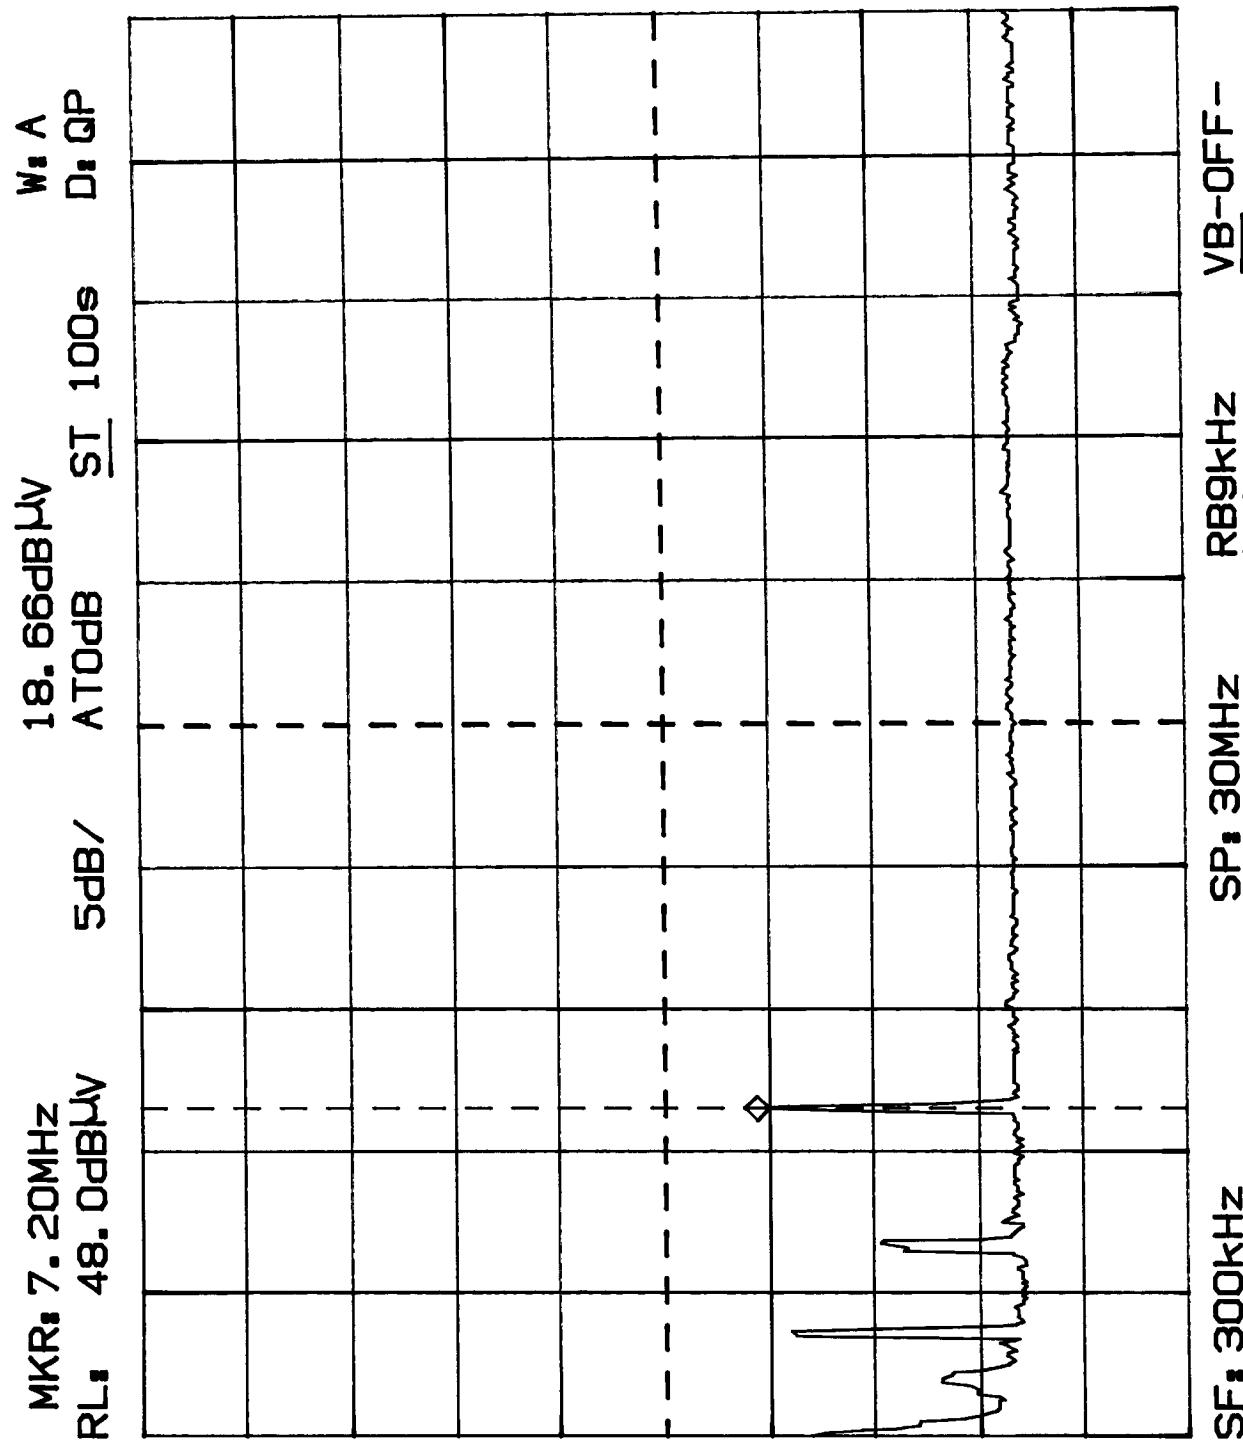


POWER LINE CONDUCTED EMISSIONS
MODEL 26965XXX-A (Remote); LINE 2

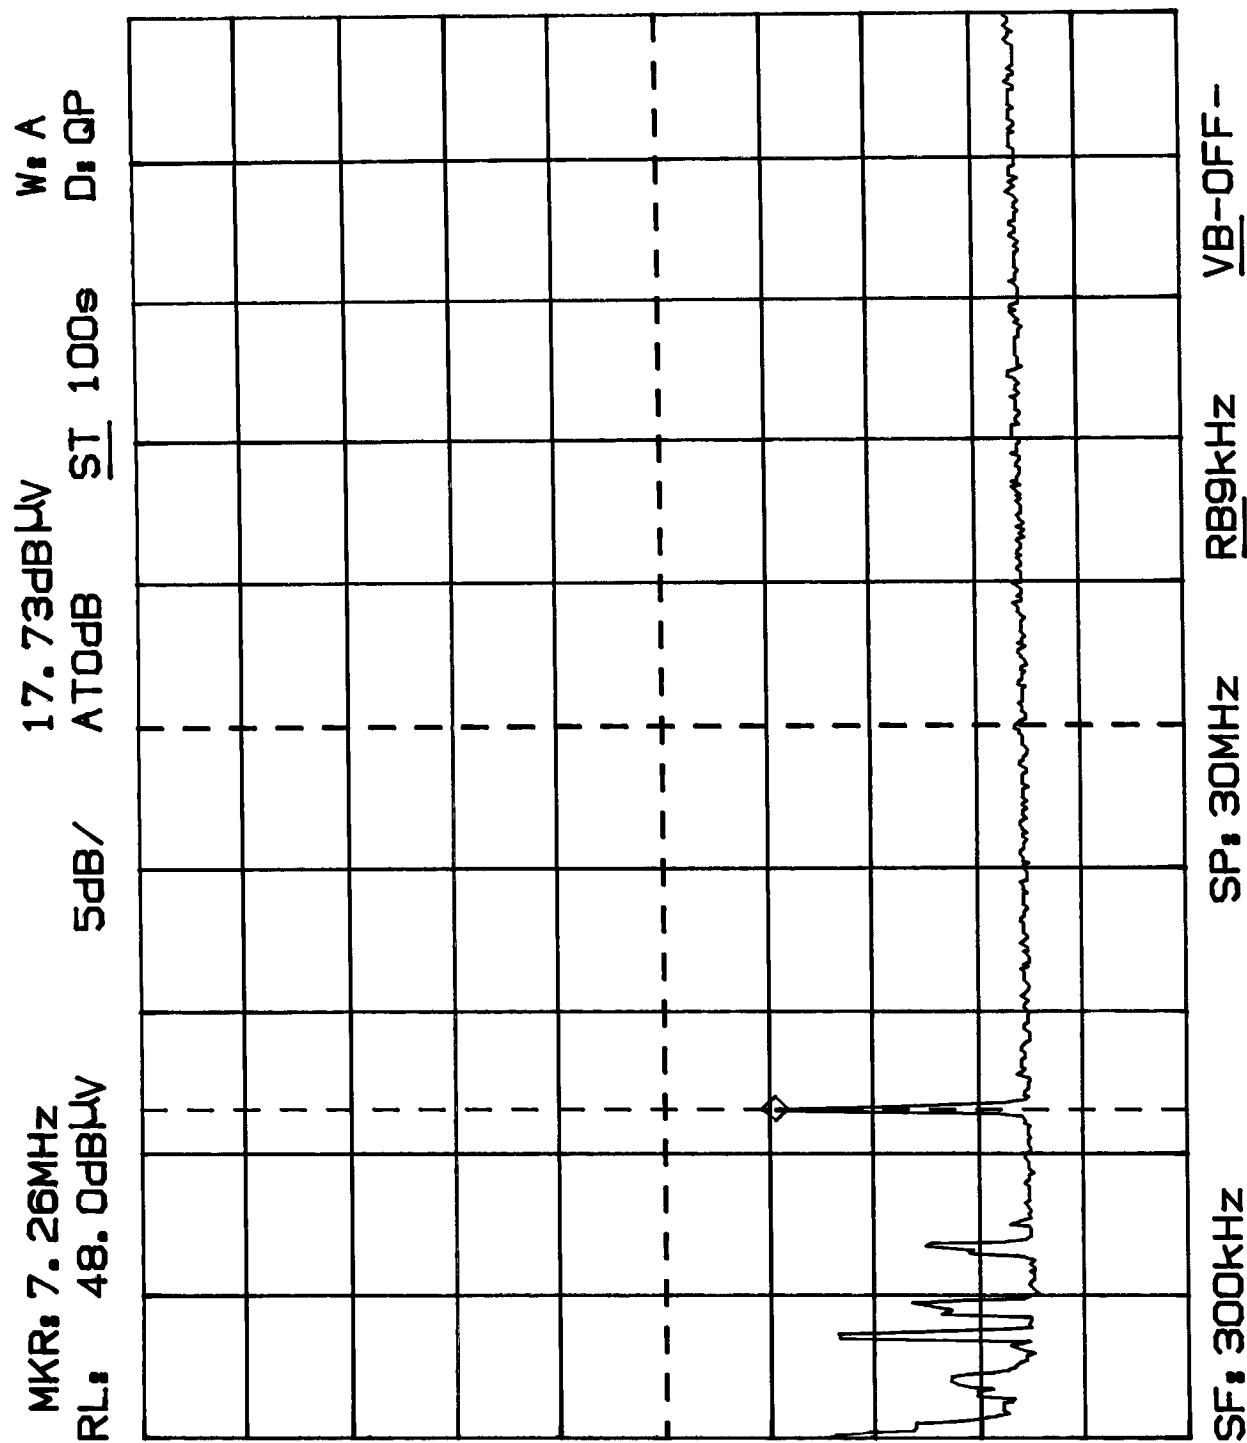

**POWER LINE CONDUCTED EMISSIONS
MODEL 26965XXX-A (Base); LINE 1**

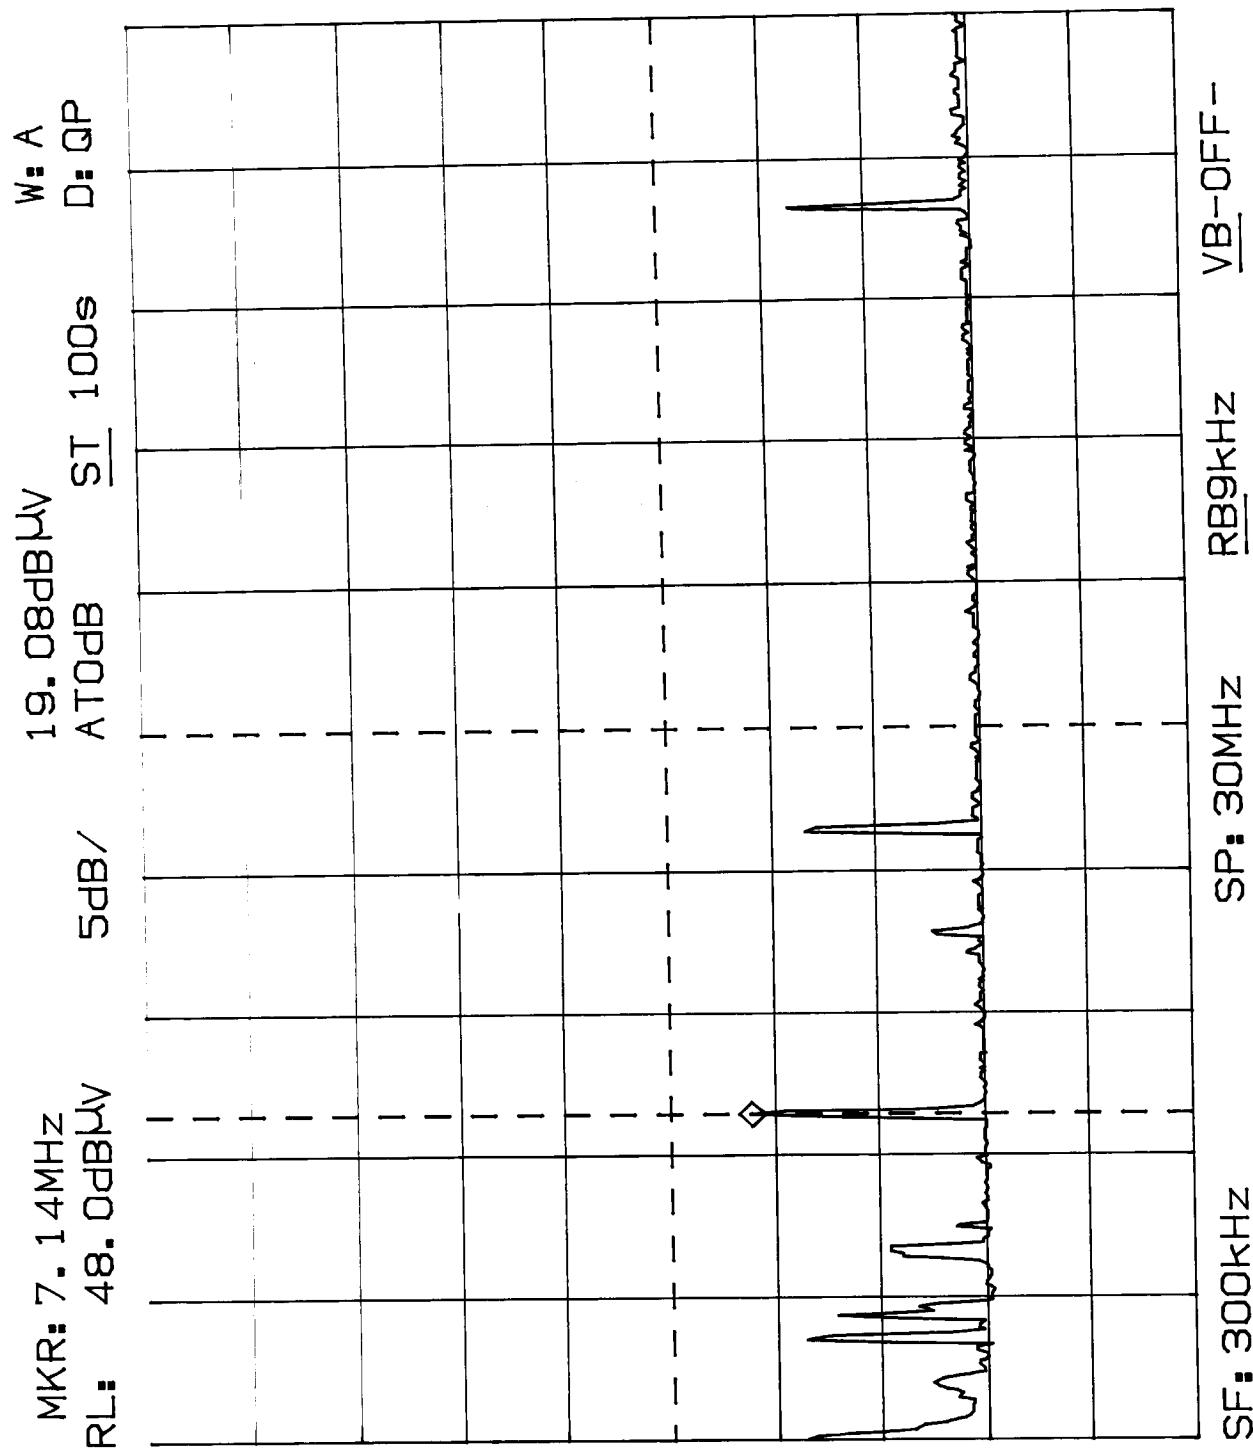

POWER LINE CONDUCTED EMISSIONS
MODEL 26965XXX-A (Base); LINE 2

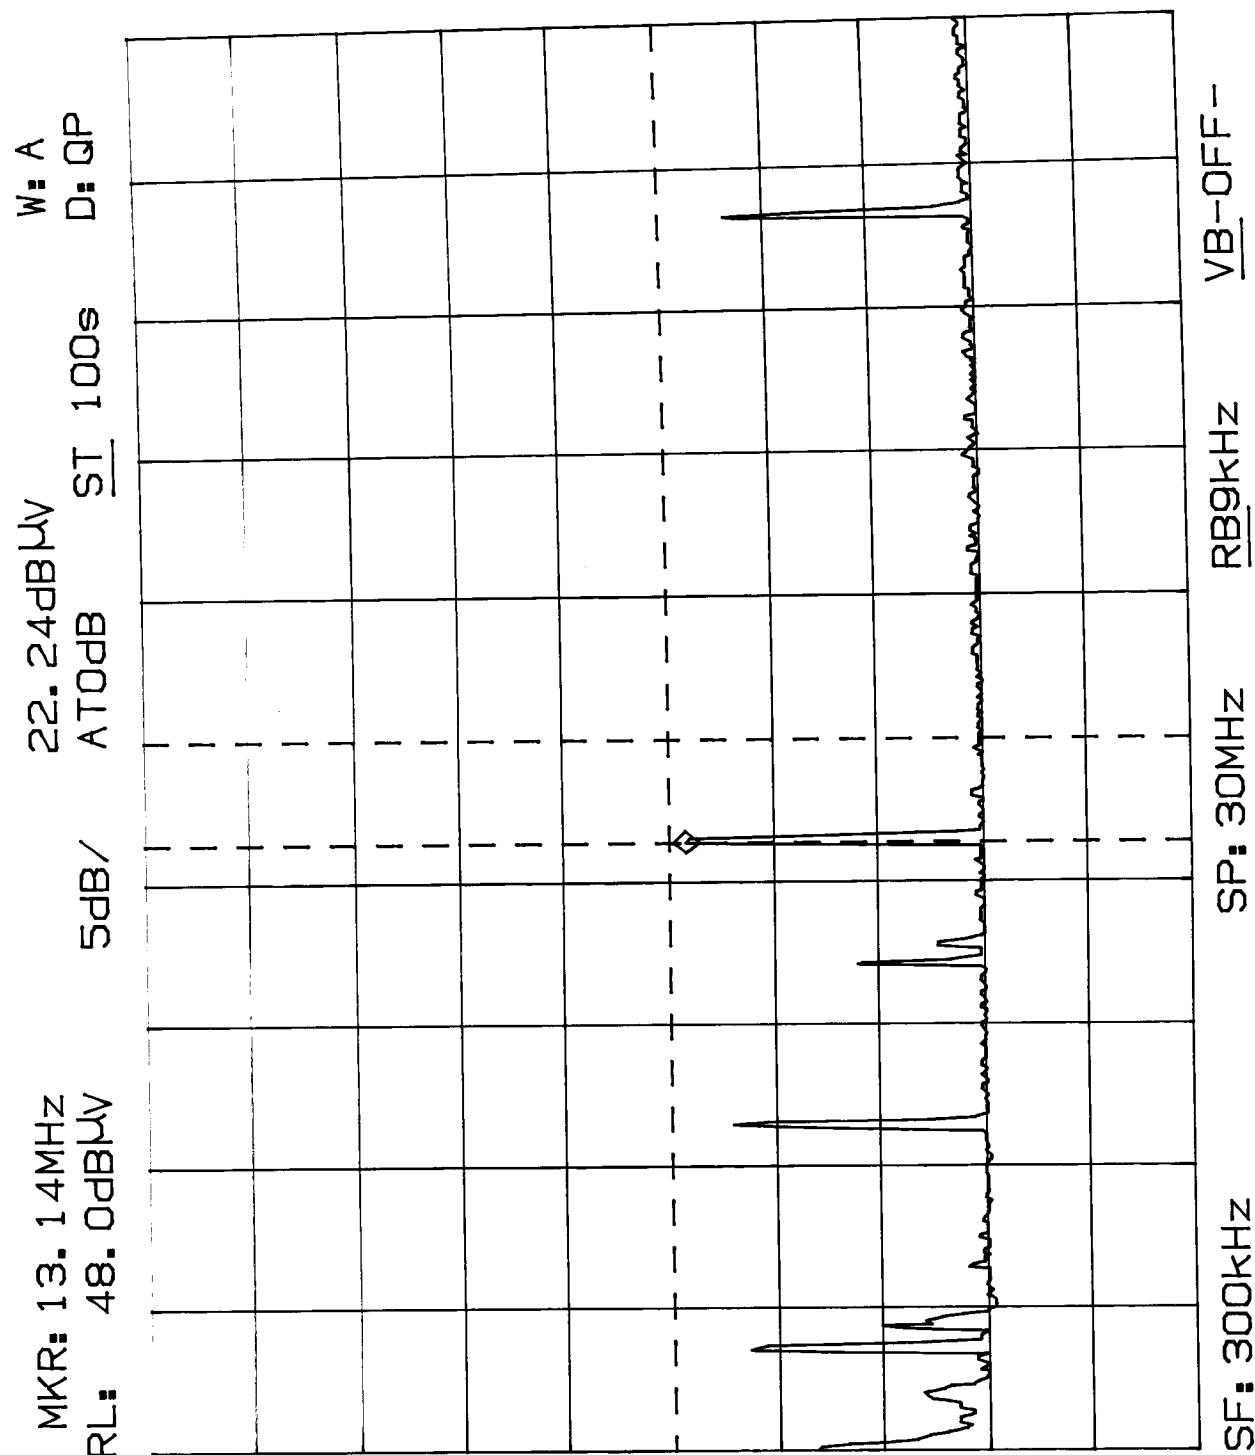


**BAND EDGE ATTENUATION
MODEL 26965XXX-A; (Remote)**

09:50:31 OCT 18, 2000

/P

SPAN
1.000 MHz

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRA -325 kHz
68.12 dB

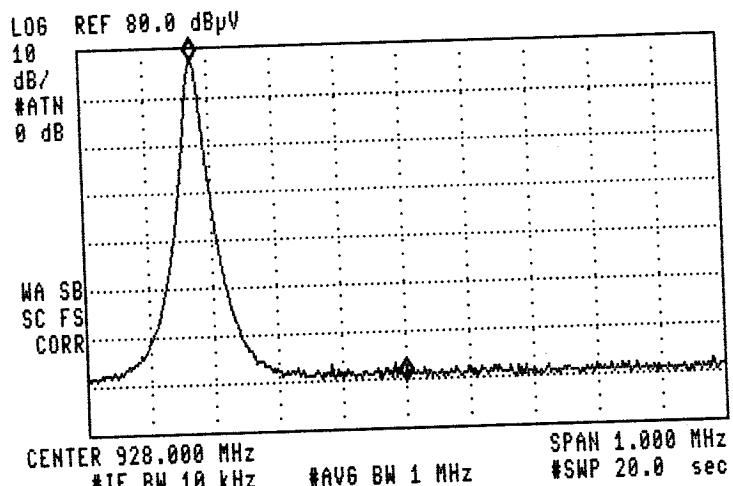


09:53:13 OCT 18, 2000

/P

SWEETIME
20.0 sec


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRA 125 kHz
67.69 dB

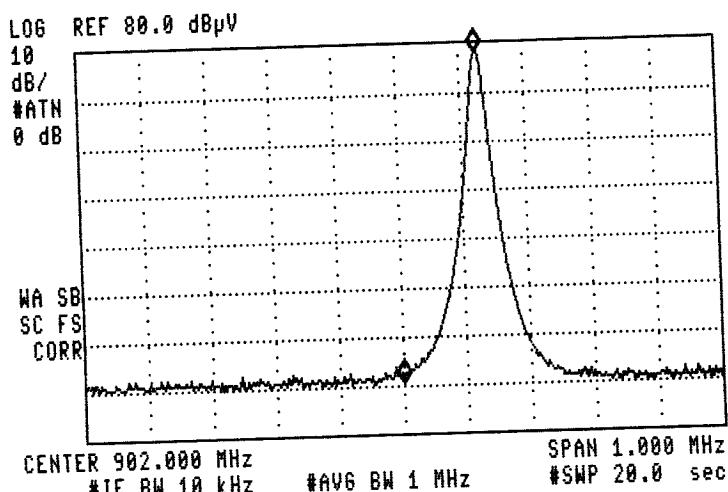

FCC ID: G9H2-6965
Marstech Report No. 20362D
ATTACHMENT NO. 5


**BAND EDGE ATTENUATION
MODEL 26965XXX-A; (Base)**

TEST SET UP (Remote)
MODEL 26965XXX-A

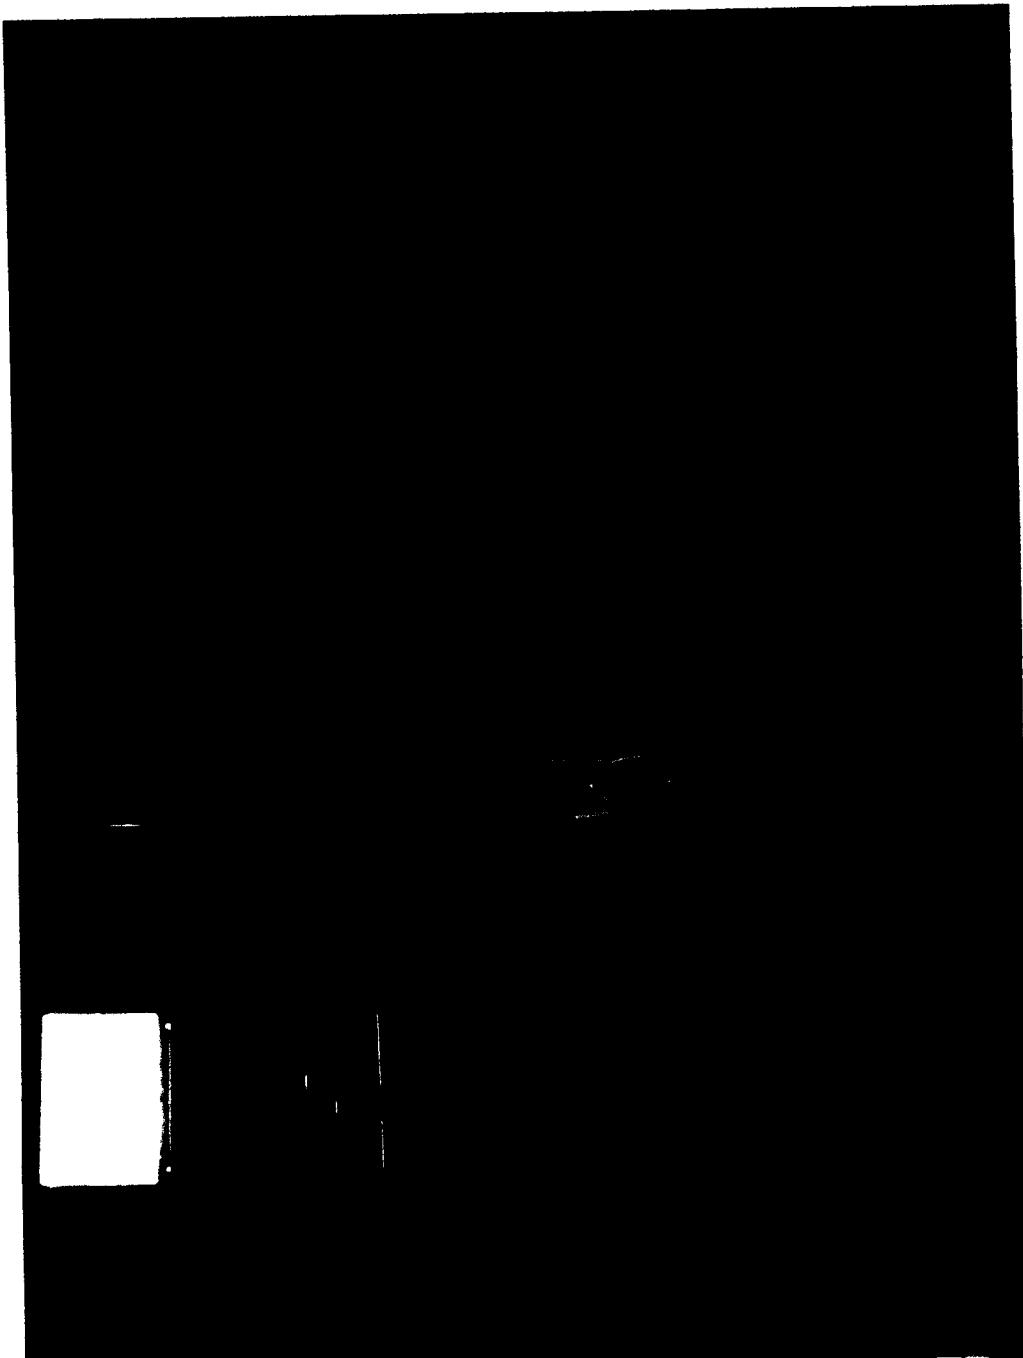

FCC ID: G9H2-6965
Marstech Report No. 20362D
ATTACHMENT NO. 6

TEST SET UP (Base)
MODEL 26965XXX-A

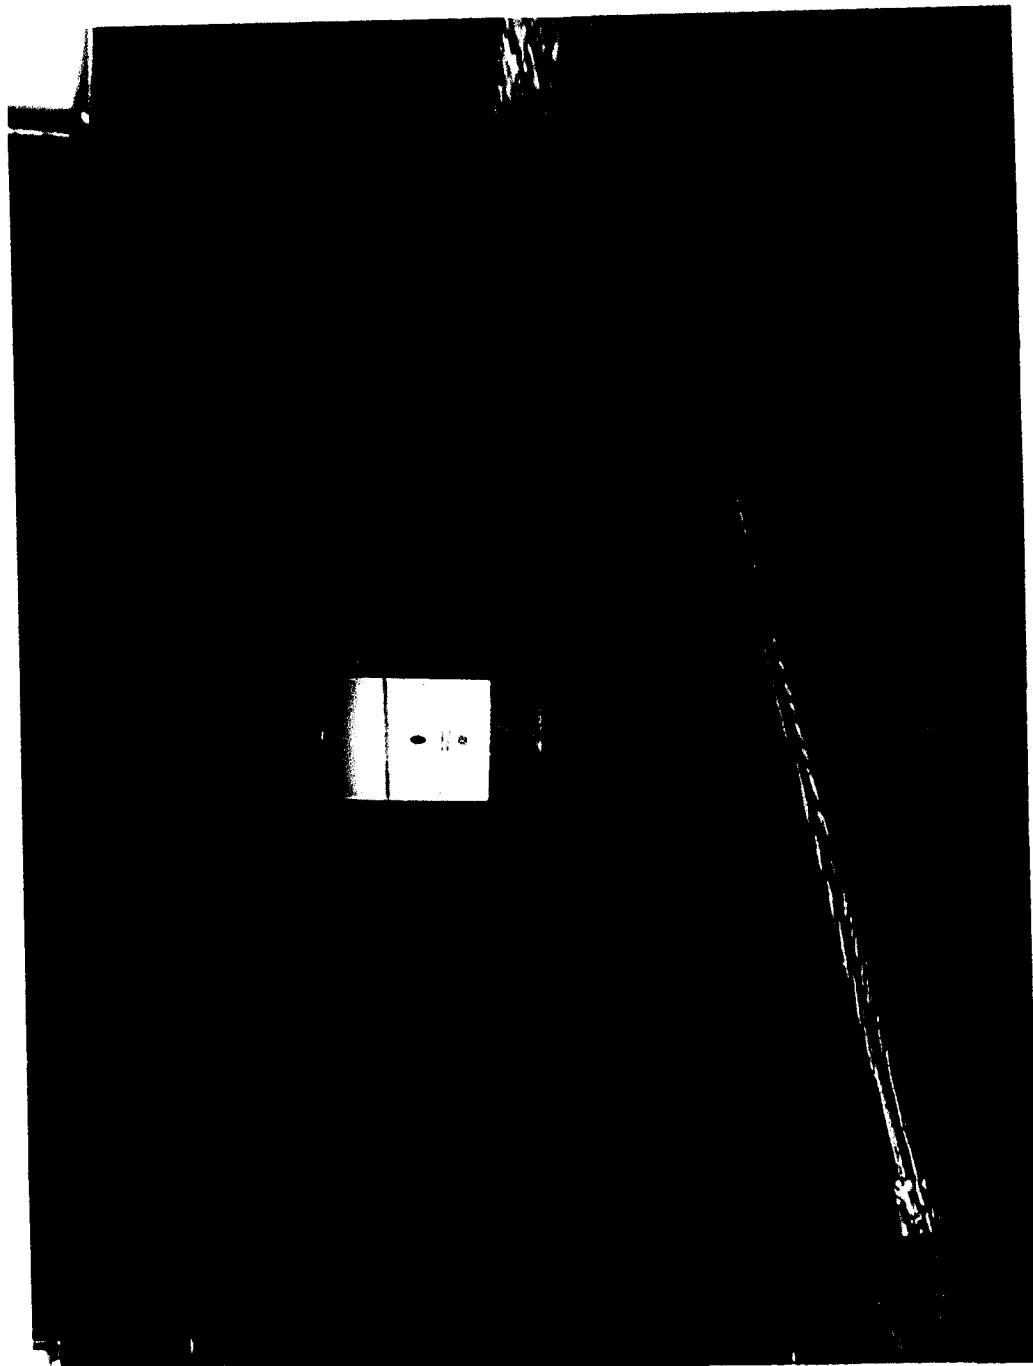

FCC ID: G9H2-6965
Marstech Report No. 20362D
ATTACHMENT NO. 7

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD. 21046

September 20, 2000

Registration Number: 90578

Electrohome Electronics Ltd.

809 Wellington St. N.

Kitchener, Ontario N2G 4J6

Canada

Attention: Gerry Gallagher


Re: Measurement facility located at Roseville
3 meter-site
Date of Listing: September 20, 2000

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, E-Filing, OET Equipment Authorization Electronic Filing.

Sincerely,



Thomas W Phillips
Electronics Engineer

FCC ID: G9H2-6965
Marstech Report No. 20362D
ATTACHMENT NO. 8

TOTAL P.01