

ENGINEERING STATEMENT
For Type Certification of
Atlinks USA Inc.

Model No: FRS 35810
FCC ID: G9H3-5810

I am an Electronics Engineer, a principal in the firm of Hyak Laboratories, Inc., Springfield, Virginia. My education and experience are a matter of record with the Federal Communications Commission.

Hyak Laboratories, Inc. has been authorized by Atlinks USA Inc., to make type certification measurements on the FRS 35810 transceiver. These tests made by me or under my supervision in our Springfield laboratory.

Test data and documentation required by the FCC for Type Certification are included in this report. The data verifies that the above mentioned transceiver meets FCC requirements and Type Certification is requested.

Rowland S. Johnson

Dated: May 16, 2000

A. INTRODUCTION

The following data are submitted in connection with this request for type certification of the FRS 35810 transceiver in

accordance with Part 2, Subpart J of the FCC Rules.

The FRS 35810 is a portable, battery operated, UHF, frequency modulated transceiver intended for 12.5 kHz channel family radio service applications in the 462.5625-467.7125 MHz band. It operates from a nominal 4.5 Vdc battery supply. MFR rated output power is 0.5 watts ERP.

B. GENERAL INFORMATION REQUIRED FOR TYPE CERTIFICATION
(Paragraph 2.983 of the Rules)

1. Name of applicant: Atlinks USA Inc.
2. Identification of equipment: FCC ID: G9H3-5810
 - a. The equipment identification label is submitted as a separate exhibit.
 - b. Photographs of the equipment are submitted as a separate exhibit.
3. Quantity production is planned.
4. Technical description:
 - a. 11k0F3E emission
 - b. Frequency range: 462.5625 - 467.7125 MHz.
 - c. Operating power of transmitter is fixed at the factory at less than 0.5 W ERP.
 - d. Maximum power permitted is 0.5 watts, and the FRS 35810 fully complied with that power limitation.
 - e. The dc voltage and dc currents at final amplifier:

Collector voltage: 4.4 Vdc
Collector current: 0.42 A
 - f. Function of each active semiconductor device:
See Appendix 1.
 - g. Complete schematic diagram is submitted as a separate exhibit.
 - h. A draft instruction manual is submitted as a separate exhibit.
 - i. The transmitter tune-up procedure is submitted as a separate exhibit.

2

B. GENERAL INFORMATION (continued)

- j. A description of circuits for stabilizing frequency is included in Appendix 2.
- k. A description of circuits and devices employed for suppression of spurious radiation and for limiting modulation is included in Appendix 3.
- l. Not applicable.

5. Data for 2.985 through 2.997 follow this section.

C. RF Power Output (Paragraph 2.985(a) of the Rules)

The FRS 35810 has a permanently attached built-in antenna without provisions for a coaxial connector.

Therefore RF power output was calculated, see Table 1.
The transmitter was tuned by the factory.

TABLE 1

Operating Freq., MHz	Power watts into a dipole antenna
462.5625	0.492

D. MODULATION CHARACTERISTICS

1. A curve showing frequency response of the transmitter is shown in Figure 1. Reference level was audio signal output from a Boonton 8220 modulation meter with one kHz deviation. Audio output was measured with an Audio Precision System One integrated test system.
2. Modulation limiting curves are shown in Figure 2, using a Boonton 8220 modulation meter. Signal level was established with a Audio Precision System One integrated test system. The curves show compliance with paragraphs 2.987(b).
3. Figure 3 is a graph of the post-limiter low pass filter which provides a roll-off of $60\text{Log}f/3$ dB where f is audio frequency in kHz. Measurements were made following EIA RS-152B with an Audio Precision System One integrated test system on the Boonton 8220 modulation meter audio output.

3

4. Occupied Bandwidth
(Paragraphs 2.989(c) of the Rules)

Figure 4 is a plot of the sideband envelope of the transmitter output taken with a Tektronix 494P spectrum analyzer. Modulation corresponded to conditions of 2.989(c)(1) and consisted of 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50% modulation at 2190 Hz, the frequency of maximum response. Measured modulation under these conditions was 2.2 kHz.


Emission designator:

$$(2M + 2D) (2 \times 3 \text{ kHz}) + (2 \times 2.5 \text{ kHz}) = 11k0F3E$$

4

FIGURE 1

MODULATION FREQUENCY RESPONSE

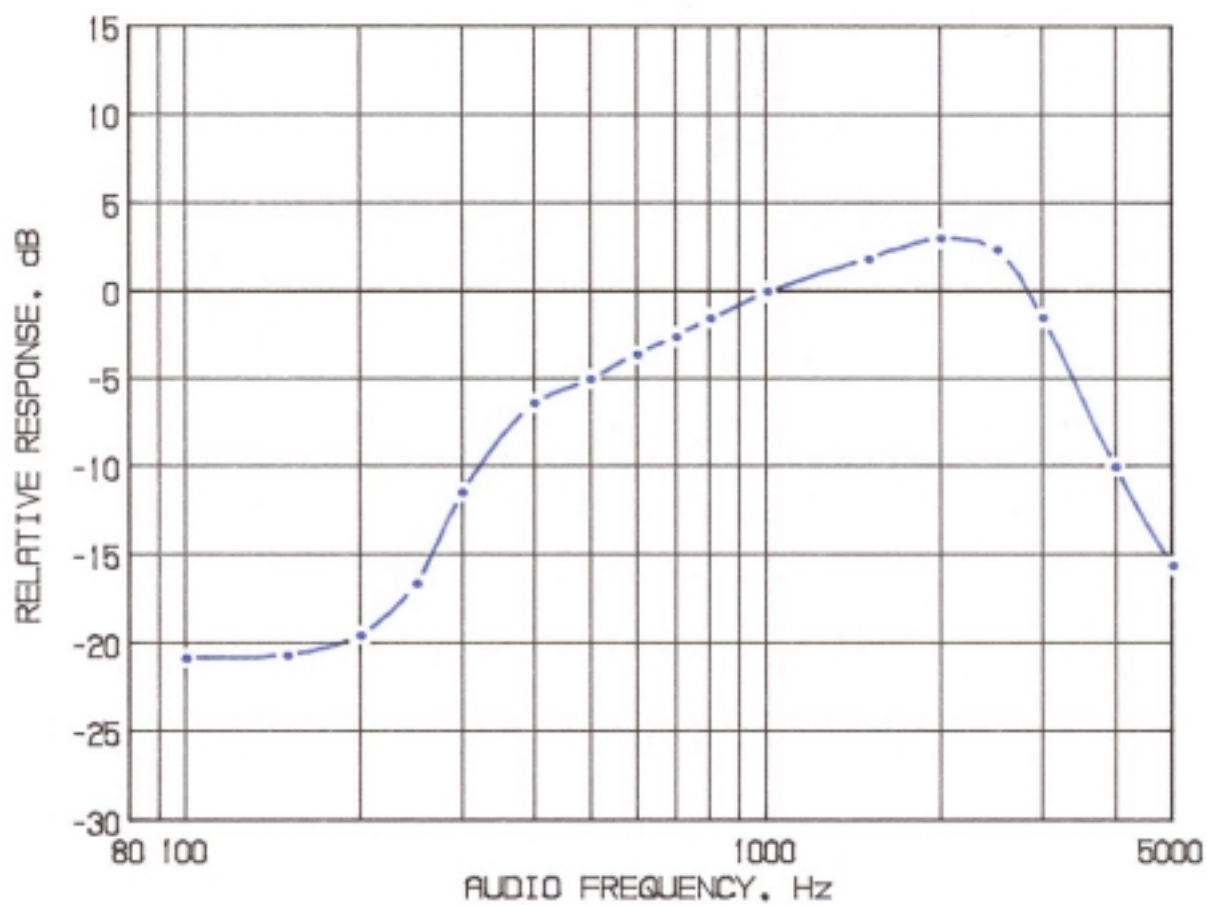


MODULATION FREQUENCY RESPONSE
FCC ID: G9H3-5810

FIGURE 1

5

FIGURE 2

AUDIO LIMITER CHARACTERISTICS

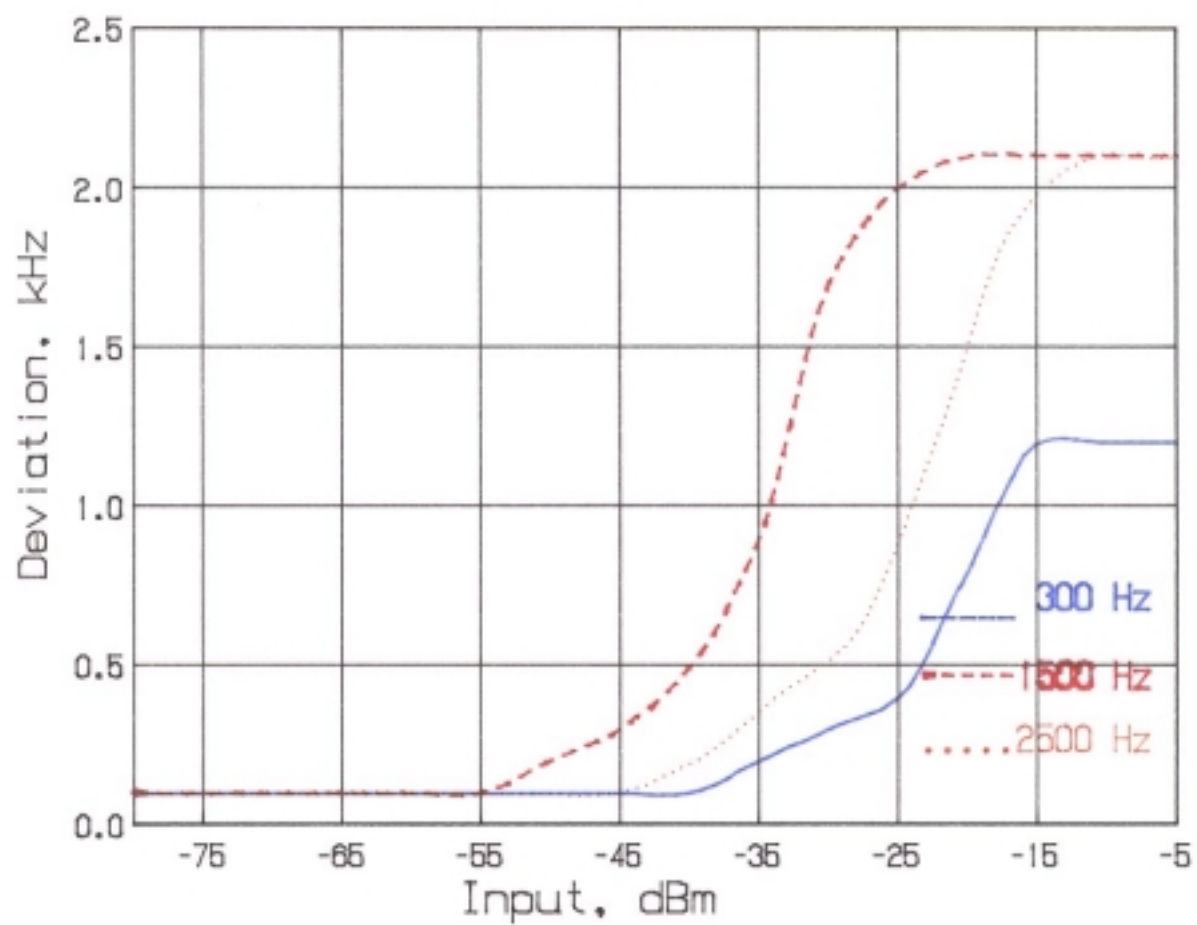


AUDIO LIMITER CHARACTERISTICS
FCC ID: G9H3-5810

FIGURE 2
6

FIGURE 3

AUDIO LOW PASS FILTER RESPONSE

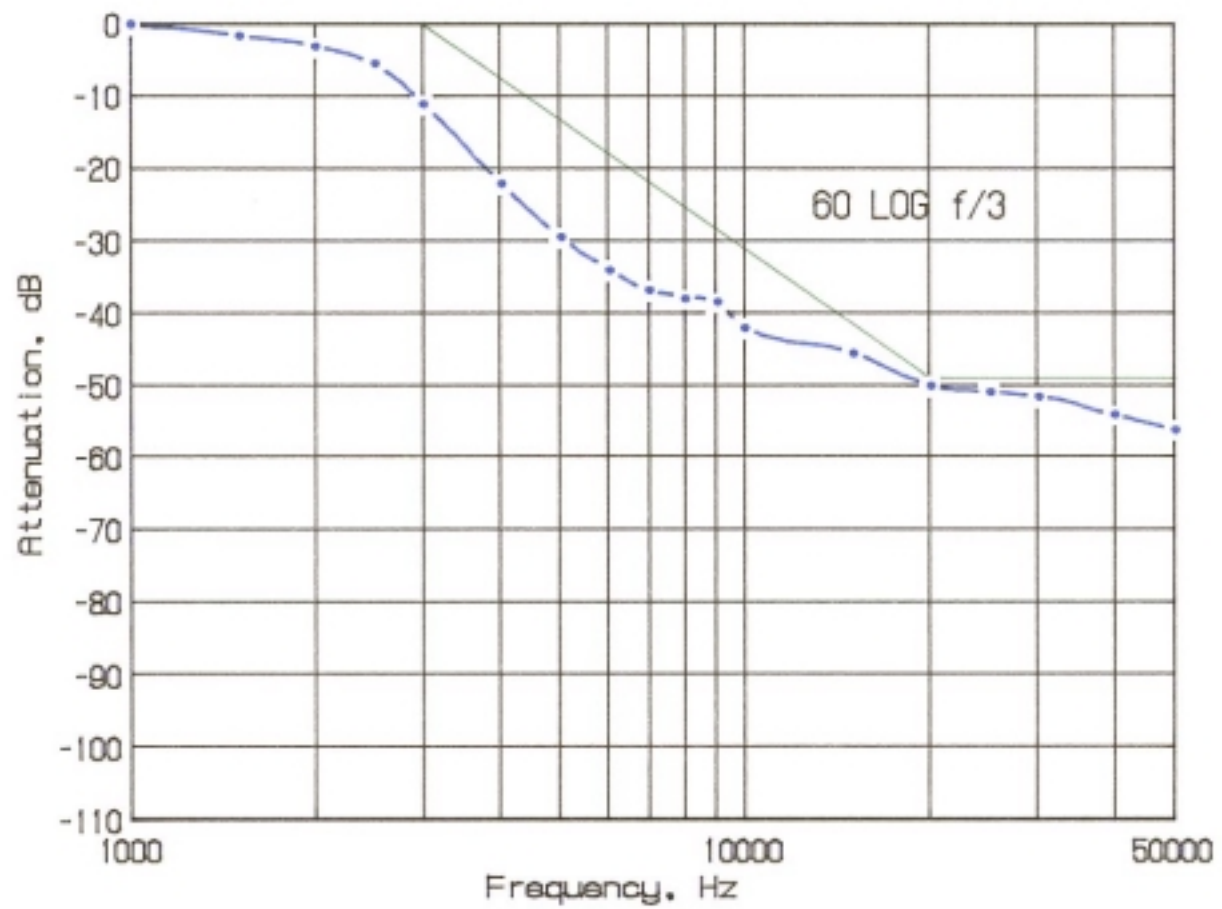


AUDIO LOW PASS FILTER
RESPONSE
FCC ID: G9H3-5810

FIGURE 3

7

FIGURE 4

OCCUPIED BANDWIDTH

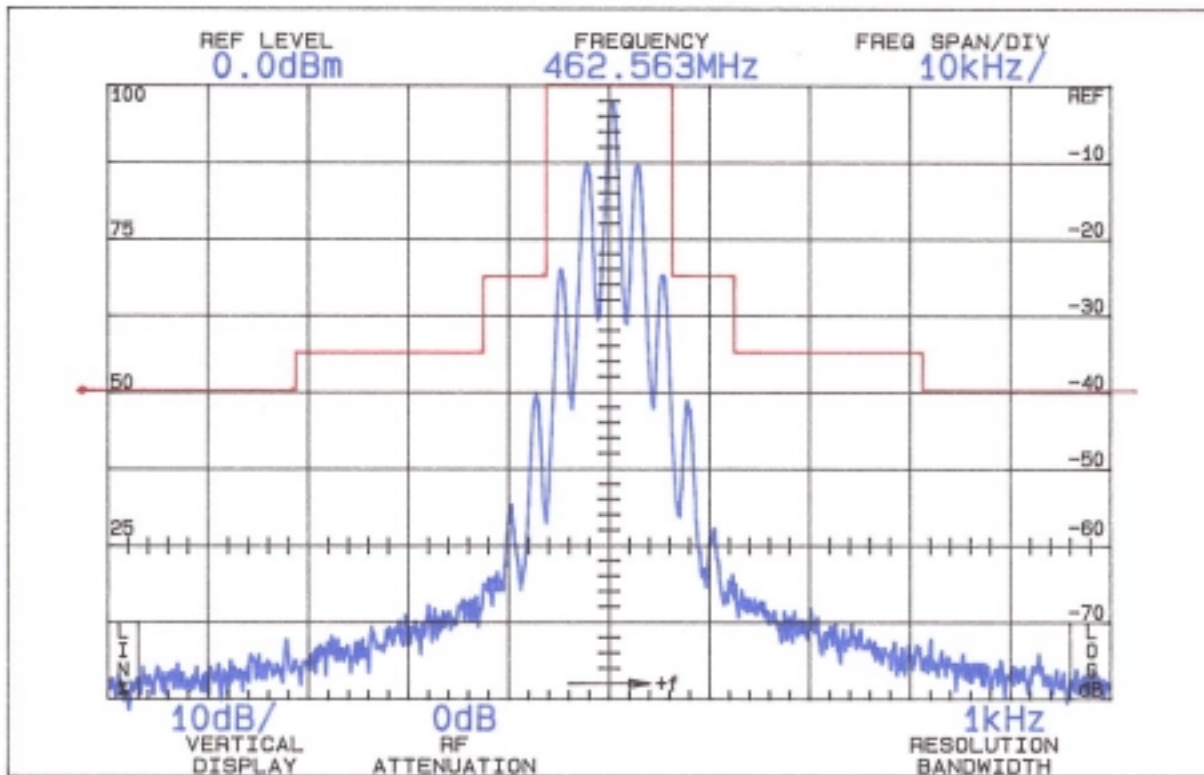

ATTENUATION IN dB BELOW
MEAN OUTPUT POWER
Required

On any frequency more than 50%
up to and including 100% of the
authorized bandwidth, 12.5 kHz
(6.25-12.5 kHz)

25

On any frequency more than 100%,
up to and including 250% of the
authorized bandwidth (12.5-31.25
kHz)

35

On any frequency removed from
the assigned frequency by more
than 250% of the authorized
bandwidth (over 31.25 kHz)

$$43 + 10 \log P = 40$$

$$(P = 0.492)$$

OCCUPIED BANDWIDTH
FCC ID: G9H3-5810

FIGURE 4

8

D. MODULATION CHARACTERISTICS (Continued)

The plots are within FCC limits. The horizontal scale (frequency) is 10 kHz per division and the vertical scale (amplitude) is a logarithmic presentation equal to 10 dB per division.

E. SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS
(Paragraph 2.991 of the Rules)

The FRS 35810 has a permanently attached antenna. There is no connector for an external antenna. Therefore, no antenna terminal conducted measurements were made.

F. DESCRIPTION OF RADIATED SPURIOUS MEASUREMENT FACILITIES

A description of the Hyak Laboratories' radiation test facility is a matter of record with the FCC. The facility was accepted for radiation measurements from 25 to 1000 MHz on October 1, 1976 and is currently listed as an accepted site.

G. FIELD STRENGTH MEASUREMENTS OF SPURIOUS RADIATION

Field intensity measurements of radiated spurious emissions from the FRS 35810 were made with a Tektronix 494P spectrum analyzer using Singer DM-105 for the measurements to 1 GHz, and EMC0 3115 horn to 4.8 GHz.

The transmitter was located in an open field 3 meters from the test antenna. Supply voltage was a power supply with a terminal voltage under load of 4.5 Vdc.

The transmitter and test antennae were arranged to maximize pickup. Both vertical and horizontal test antenna polarization were employed.

The measurement system was capable of detecting signals 100 dB or more below the reference level. Measurements were made from the lowest frequency generated within the unit (12.8 MHz), to 10 times operating frequency. Data after application of antenna factors and line loss corrections are shown in Table 2.

TABLE 2

TRANSMITTER CABINET RADIATED SPURIOUS

462.5625 MHz, 4.5 Vdc, 0.492 watts

Spurious Frequency	Radiated Field	dB Below Carrier
-----------------------	-------------------	---------------------

<u>MHz</u>	<u>uV/m @ 3M</u>	<u>Reference¹</u>
462.563	1640590	0V
925.125	9736	45V
1387.688	5348	50V
1850.250	108	84V*
2312.813	2003	58V
2775.375	1000	64V*
3237.938	8859	45H
3700.500	4970	59V
4163.063	1406	61V*
4625.625	324	74V*

Required: $43+10 \log(P) = 40$

¹Worst-case polarization, H-Horizontal, V-Vertical.

*Reference data only, more than 20 dB below FCC limit.

All other spurious from 10.475 MHz to the tenth harmonic were 20 dB or more below FCC limit.

Power:

$$\begin{aligned}
 P &= (F.I.x3)^2/49.2 \\
 &= (1.640590)^2/49.2 \\
 &= 0.492 \text{ W}
 \end{aligned}$$

10

H. FREQUENCY STABILITY (Paragraph 2.995(a)(2))

Measurement of frequency stability versus temperature was made at temperatures from -20°C to +50°C. At each temperature, the unit was exposed to test chamber ambient a minimum of 60 minutes after indicated chamber temperature ambient had stabilized to within ±2° of the desired test temperature. Following the 1 hour soak at each temperature, the unit was turned on, keyed and frequency measured within 2 minutes. Test temperature was sequenced in the order shown in Table 3, starting with -20°C.

A Thermotron S1.2 temperature chamber was used. Temperature was monitored with a Keithley 871 digital thermometer. The

transmitter output stage was terminated in a dummy load. Primary supply was 4.5 volts. Frequency was measured with a HP 5385A frequency counter connected to the transmitter through a power attenuator. Measurements were made at 462.5625 MHz. No transient keying effects were observed.

TABLE 3

FREQUENCY STABILITY AS A FUNCTION OF TEMPERATURE
462.5625 MHz, 4.5 Vdc, 0.492 W

<u>Temperature, °C</u>	<u>Output_Frequency, _MHz</u>	<u>p.p.m.</u>
-20.2	462.561421	-2.3
- 9.7	462.561445	-2.2
- 0.4	462.561669	-1.8
10.2	462.562188	-0.7
20.4	462.562556	0.1
30.2	462.562785	0.6
40.3	462.563396	1.9
50.5	462.563635	2.5

Maximum frequency error: 462.563635
462.562500
+ .001135 MHz

FCC Rule 95.627(b) specifies .00025% (2.5 p.p.m.) or a maximum of ± 0.001156 MHz, which corresponds to:

High Limit	462.563656 MHz
Low Limit	462.561344 MHz

I. FREQUENCY STABILITY AS A FUNCTION OF SUPPLY VOLTAGE
(Paragraph 2.995(d)(2) of the Rules)

Oscillator frequency as a function of power supply voltage was measured with a HP 5385A frequency counter as supply voltage provided by an HP 6264B variable dc power supply was varied from $\pm 15\%$ above the nominal 4.5 volt rating to below the battery end point. A Fluke 197 digital voltmeter was used to measure supply voltage at transmitter primary input terminals. Measurements were made at 20°C ambient.

TABLE 4

FREQUENCY STABILITY AS A FUNCTION OF SUPPLY VOLTAGE

462.5625 MHz, 4.5 Vdc Nominal; 0.492W

<u>Supply_Voltage</u>		<u>Output_Frequency, _MHz</u>	<u>p.p.m.</u>
5.2	115%	462.562559	0.1
5.0	110%	462.562569	0.1
4.7	105%	462.562550	0.1
4.5	100%	462.562556	0.1
4.3	95%	462.562561	0.1
4.1	90%	462.562555	0.1
3.8	85%	462.562554	0.1
3.6 *	80%	462.562551	0.1
Maximum frequency error:		462.562569	
		<u>462.562500</u>	
		+ .000069 MHz	

FCC Rule 95.627(b) specifies .00025% (2.5 p.p.m. or a maximum of ± 0.001156 MHz, corresponding to:

High Limit	462.563656 MHz
Low Limit	462.561344 MHz

*Battery end point.

APPENDIX 1

FUNCTION OF DEVICES FRS 35810

<u>Designator</u>	<u>Description</u>	<u>Part Number</u>
U2	PLL	KB8825
U204	CPU	KS57C21208
U401A	Mic Amp/Limiter/ LP Filter	KIA324F

Q1	VCO	PBR941LT1
Q2	Driver Amp	2SC5084
Q3	Final RF Amp	2SC5084
Q7	Buffer Amp	2SC5084

APPENDIX 2

CIRCUITS AND DEVICES TO STABILIZE FREQUENCY

SYNTHESIZER

A phase locked loop (PLL) circuit establishes and stabilizes operating frequency.

The data for producing necessary frequencies is established by the microcontroller on the digital board.

The frequency stability of the TX/RX is maintained by the TCXO, which generates a stable frequency of 10.475 MHz.

CIRCUITS AND DEVICES TO
STABILIZE FREQUENCY
FCC ID: G9H3-5810

APPENDIX 2

APPENDIX 3

CIRCUITS TO SUPPRESS SPURIOUS RADIATION
AND LIMIT MODULATION

The transmitter amplifies the 0 dBm signal from the VCO to approximately 27 dBm that is fed to the antenna. The transmitter is a three stage amplifier composed of Q7, Q2, and Q3. The first two stages are operated class A and the final is operated class B in full saturation to help prevent unwanted amplitude modulation. The fundamental transmit signal is fed through an elliptical low pass filter (5-pole, 2 zero) in order to suppress the harmonics to

below -60 dBc.

The desired frequency modulation of the carrier is accomplished by modulating the current in the VCO directly with the microphone audio signal. The microphone audio is conditioned with a three-pole high pass filter at 300 Hz (U401D), a hard clipper circuit (U401A) to limit maximum deviation to ± 2.5 kHz and a three-pole low pass or splatter filter at 2.8 kHz (U5B & U401C). The low pass filter insures that the occupied bandwidth of the FM modulated signal meets FCC requirements under all input conditions.

CIRCUITS TO SUPPRESS SPURIOUS
RADIATION AND LIMIT MODULATION
FCC ID: G9H3-5810

APPENDIX 3