

COLLAGE INVESTMENTS LLC

Mobile phone

Main Model: L1-Forst
Serial Model: N/A

December 07, 2012
Report No.: 12050085-FCC-R3
(This report supersedes none)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

| | | |
|--|--------------------------------------|--|
| | | |
| Eaton Wang Compliance Engineer | Alex Liu Technical Manager | |

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.

RF Test Report

FCC Part 15.247: 2012, ANSI C63.4: 2009

SIEMIC, INC.
Accessing global markets

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
 Main Model: L1-Forst
 Serial Model: N/A
 To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
 Issue Date: December 07, 2012
 Page: 2 of 87
www.siemic.com.cn

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to [testing](#) and [certification](#), SIEMIC provides initial design reviews and [compliance management](#) through out a project. Our extensive experience with [China](#), [Asia Pacific](#), [North America](#), [European](#), and [international](#) compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the [global markets](#).

Accreditations for Conformity Assessment

| Country/Region | Accreditation Body | Scope |
|----------------|------------------------|------------------------------------|
| USA | FCC, A2LA | EMC , RF/Wireless , Telecom |
| Canada | IC, A2LA, NIST | EMC, RF/Wireless , Telecom |
| Taiwan | BSMI , NCC , NIST | EMC, RF, Telecom , Safety |
| Hong Kong | OFTA , NIST | RF/Wireless , Telecom |
| Australia | NATA, NIST | EMC, RF, Telecom , Safety |
| Korea | KCC/RRA, NIST | EMI, EMS, RF , Telecom, Safety |
| Japan | VCCI, JATE, TELEC, RFT | EMI, RF/Wireless, Telecom |
| Mexico | NOM, COFETEL, Caniety | Safety, EMC , RF/Wireless, Telecom |
| Europe | A2LA, NIST | EMC, RF, Telecom , Safety |

Accreditations for Product Certifications

| Country/Region | Accreditation Body | Scope |
|----------------|--------------------|-----------------------|
| USA | FCC TCB, NIST | EMC , RF , Telecom |
| Canada | IC FCB , NIST | EMC , RF , Telecom |
| Singapore | iDA, NIST | EMC , RF , Telecom |
| EU | NB | EMC & R&TTE Directive |
| Japan | MIC, (RCB 208) | RF , Telecom |
| Hong Kong | OFTA (US002) | RF , Telecom |



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 3 of 87
www.siemic.com.cn

This page has been left blank intentionally.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 4 of 87
www.siemic.com.cn

CONTENTS

| | | |
|-----------------|---|-----------|
| 1 | EXECUTIVE SUMMARY & EUT INFORMATION | 5 |
| 2 | TECHNICAL DETAILS | 6 |
| 3 | MODIFICATION | 7 |
| 4 | TEST SUMMARY | 8 |
| 5 | MEASUREMENTS, EXAMINATION AND DERIVED RESULTS | 9 |
| ANNEX A. | TEST INSTRUMENT & METHOD | 66 |
| ANNEX B. | EUT AND TEST SETUP PHOTOGRAPHS | 71 |
| ANNEX C. | TEST SETUP AND SUPPORTING EQUIPMENT | 82 |
| ANNEX D. | USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST | 86 |
| ANNEX E. | DECLARATION OF SIMILARITY | 87 |

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 5 of 87
www.siemic.com.cn

1 EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programme was to demonstrate compliance of the COLLAGE INVESTMENTS LLC, Mobile phone and model: L1-Forst against the current Stipulated Standards. The Mobile phone has demonstrated compliance with the FCC Part 15.247: 2012, ANSI C63.4: 2009.

EUT Information

EUT Description : Mobile phone
Main Model : L1-Forst
Serial Model : N/A
Antenna Gain : GSM850: -1 dBi
PCS1900: 2 dBi
Bluetooth: 1 dBi
WIFI: 1 dBi

Input Power : Li-ion Rechargeable Battery
Model: SP01
Capacity: 1200mAh
Nominal Voltage: 3.7V
Charging Voltage Limit: 4.2V
Adapter
Model: A1502-500550
Input: AC 100-240V 50/60Hz 0.15A
Output: DC 5.0V 550mA

Classification Per Stipulated Test Standard : FCC Part 15.247: 2012, ANSI C63.4: 2009

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 6 of 87
www.siemic.com.cn

2 TECHNICAL DETAILS

| | |
|--|--|
| Purpose | Compliance testing of Mobile phone with stipulated standard |
| Applicant / Client | COLLAGE INVESTMENTS LLC 111437 NW 34 STREET, DORAL, FLORIDA 33178 U.S.A. |
| Manufacturer | NINGBO BIRD CO., LTD No.999 Dacheng East Road, Fenghua City, Zhejiang |
| Laboratory performing the tests | SIEMIC Nanjing (China) Laboratories NO.2-1, Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: info@siemic.com |
| Test report reference number | 12050085-FCC-R3 |
| Date EUT received | November 26, 2012 |
| Standard applied | FCC Part 15.247: 2012, ANSI C63.4: 2009 |
| Dates of test (from – to) | November 28 to December 07, 2012 |
| No of Units : | #1 |
| Equipment Category : | Spread Spectrum System/Device |
| Trade Name : | LIKUID |
| RF Operating Frequency (ies) | GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX : 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz Bluetooth: 2402-2480 MHz 802.11b/g/n: 2412-2462 MHz |
| Number of Channels | 299CH (PCS1900) and 124CH (GSM850) Bluetooth: 79CH 802.11b/g/n: 11 CH |
| Modulation | GSM/GPRS: GMSK Bluetooth: GFSK 802.11b/g/n: DSSS/OFDM |
| GRPS Multi-slot class | 8/10/12 |
| FCC ID | GAO-L1F |



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 7 of 87
www.siemic.com.cn

3 MODIFICATION

NONE

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 8 of 87
www.siemic.com.cn

4 TEST SUMMARY

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

Test Results Summary

| FCC Rules | Description of Test | Result |
|------------------------------|--|------------|
| §15.247 (i), §2.1093 | RF Exposure | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.247 (a)(2) | DTS (6 dB) CHANNEL BANDWIDTH | Compliance |
| §15.247(b)(3) | Conducted Maximum Output Power | Compliance |
| §15.247(e) | Power Spectral Density | Compliance |
| §15.247(d) | Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands | Compliance |
| §15.207 (a), | AC Power Line Conducted Emissions | Compliance |
| §15.205, §15.209, §15.247(d) | Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands | Compliance |

**SIEMIC, INC.**

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 9 of 87
www.siemic.com.cn

5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 §15.247 (i) and §2.1093 – RF Exposure

Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

| | Individual Transmitter | Simultaneous Transmission |
|------------------------------|---|--|
| Licensed Transmitters | <u>Routine evaluation required</u> <u>When there is no simultaneous transmission –</u> <ul style="list-style-type: none">○ output \leq 60/f: SAR not required○ output $>$ 60/f: stand-alone SAR required <u>When there is simultaneous transmission –</u> <u>Stand-alone SAR not required when</u> <ul style="list-style-type: none">○ output \leq 2·P_{Ref} and antenna is \geq 5.0 cm from other antennas○ output \leq P_{Ref} and antenna is \geq 2.5 cm from other antennas○ output \leq P_{Ref} and antenna is $<$ 2.5 cm from other antennas, each with either output power \leq P_{Ref} or 1-g SAR $<$ 1.2 W/kg <u>Otherwise stand-alone SAR is required</u> <u>When stand-alone SAR is required</u> <ul style="list-style-type: none">○ test SAR on highest output channel for each wireless mode and exposure condition○ if SAR for highest output channel is $>$ 50% of SAR limit, evaluate all channels according to normal procedures | <u>SAR not required:</u> <u>Unlicensed only</u> <ul style="list-style-type: none">○ when stand-alone 1-g SAR is not required and antenna is \geq 5 cm from other antennas <u>Licensed & Unlicensed</u> <ul style="list-style-type: none">○ when the sum of the 1-g SAR is $<$ 1.6 W/kg for all simultaneous transmitting antennas○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is $<$ 0.3 <u>SAR required:</u> <u>Licensed & Unlicensed</u> <p>antenna pairs with SAR to peak location separation ratio \geq 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition</p> <p>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</p> |
| Jaw, Mouth and Nose | <u>Flat phantom SAR required</u> <ul style="list-style-type: none">○ when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues○ position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations | When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance. |

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 10 of 87
www.siemic.com.cn

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

Three antennas are available for the EUT, (GSM antenna, Bluetooth antenna and WIFI antenna).

Bluetooth and GSM Antenna separation is 7.8 cm>5 cm, Bluetooth and WIFI Antenna separation is 0 cm<5 cm, GSM and WIFI Antenna separation is 7.8>5 cm and the maximum output power of Bluetooth is 7.18 mW<2 Pref(24 mW), maximum average output power for WiFi is 13.43 mW<2* Pref(24 mW) and maximum 1-g SAR value is 1.142W/kg<1.2W/kg

According to KDB 648474, no stand-alone required for Bluetooth & WiFi antenna, so no simultaneous SAR measurement is required too.

Result:

The SAR measurement is exempt.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 11 of 87
www.siemic.com.cn

5.2 §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 3 antennas, one is a PIFA antenna for GSM, the gain are -1 dBi for GSM and 2 dBi for PCS, one is a PIFA antenna for WIFI, the gain is 1 dBi, other a monopole antenna for Bluetooth, the gain is 1 dBi, which in accordance to section 15.203, please refer to the internal photos.

Result: Compliancance.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 12 of 87
www.siemic.com.cn

5.3 §15.247(a) (2) –DTS (6 dB) CHANNEL BANDWIDTH

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

| | |
|----------------------|----------|
| Temperature | 22°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.

4. Test date : November 30 and December 01, 2012

Tested By : Eaton Wang

Requirement(s): The minimum 6 dB bandwidth of a DTS transmission shall be at least 500 kHz. Within this document, this bandwidth is referred to as the DTS bandwidth. The procedures provided herein for measuring the maximum peak conducted output power assume the use of the DTS bandwidth.

Procedures:

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Result: Pass.

Please refer to the following tables and plots.

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 13 of 87
www.siemic.com.cn

| Channel | Channel Frequency (MHz) | Data Rate (Mbps) | Measured 6dB Bandwidth (MHz) | FCC Part 15.247 Limit (kHz) |
|---------------------|-------------------------|------------------|------------------------------|-----------------------------|
| 802.11b mode | | | | |
| Low | 2412 | 1 | 9.12 | >500 |
| Middle | 2437 | 1 | 9.60 | >500 |
| High | 2462 | 1 | 9.18 | >500 |
| 802.11g mode | | | | |
| Low | 2412 | 6 | 16.50 | >500 |
| Middle | 2437 | 6 | 16.50 | >500 |
| High | 2462 | 6 | 16.56 | >500 |
| 802.11n mode | | | | |
| Low | 2412 | MCS0 | 17.76 | >500 |
| Middle | 2437 | MCS0 | 17.70 | >500 |
| High | 2462 | MCS0 | 17.70 | >500 |

802.11b Low Channel

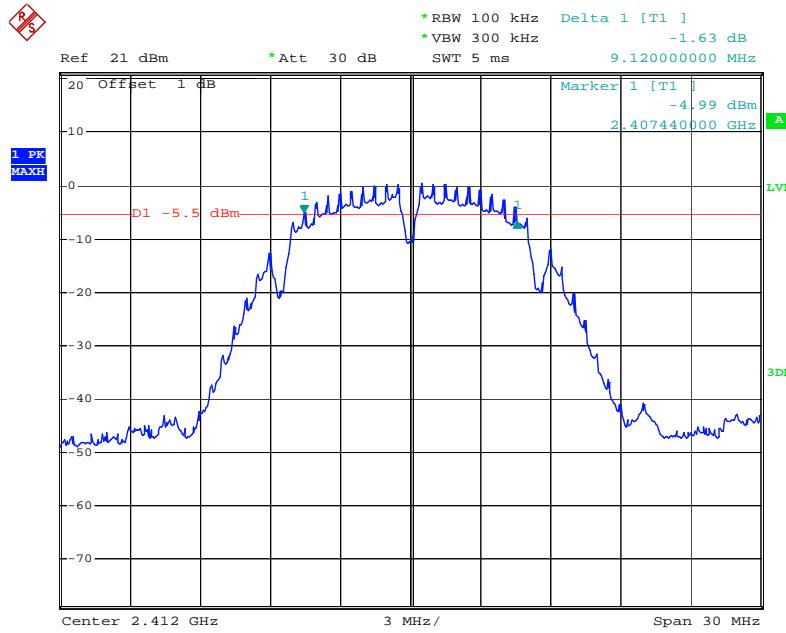

Date: 30.NOV.2012 22:55:56


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009


Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 14 of 87
www.siemic.com.cn

802.11b Middle Channel

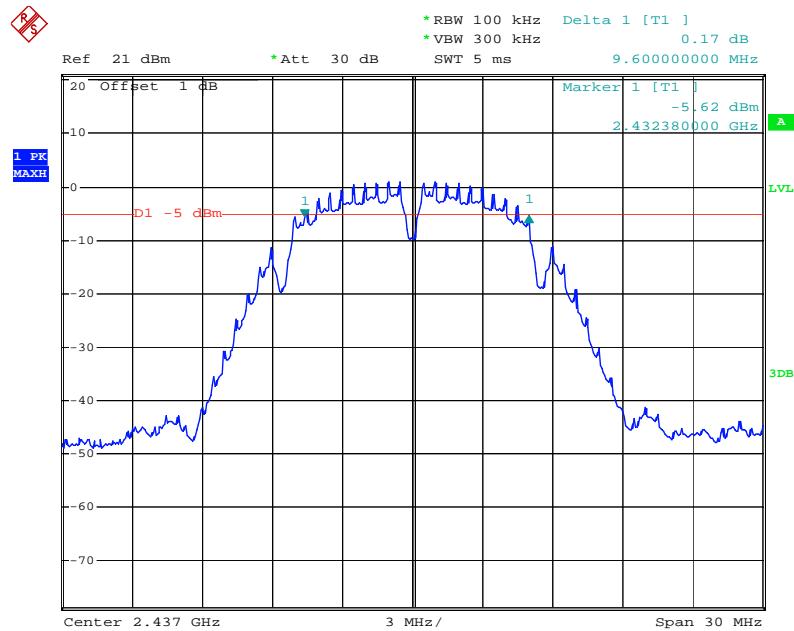


Date: 30.NOV.2012 22:54:03

802.11b High Channel

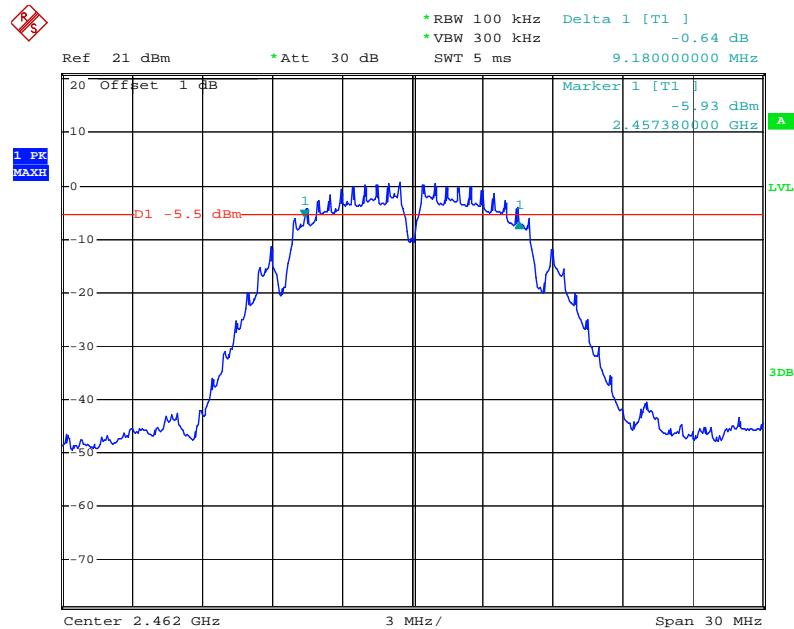


Date: 30.NOV.2012 22:57:43

802.11g Low Channel

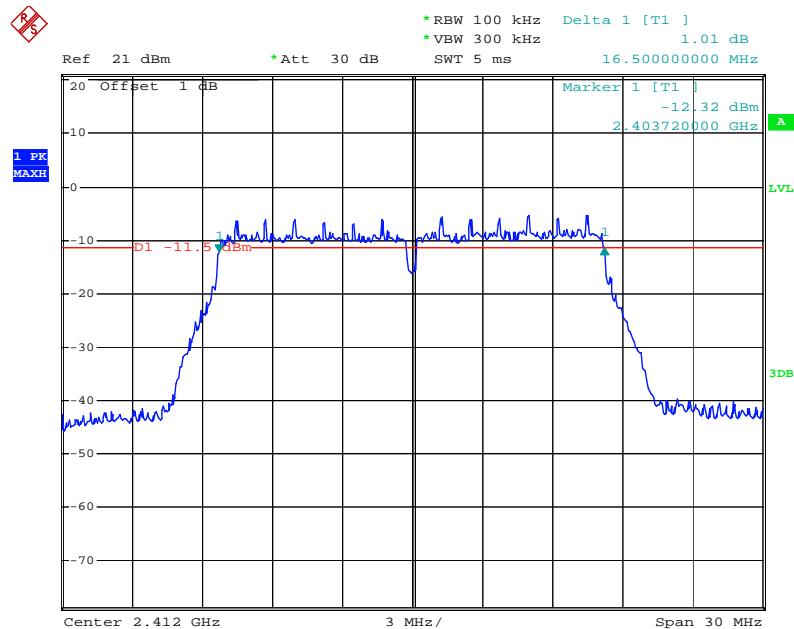


Date: 30.NOV.2012 23:34:36

802.11g Middle Channel

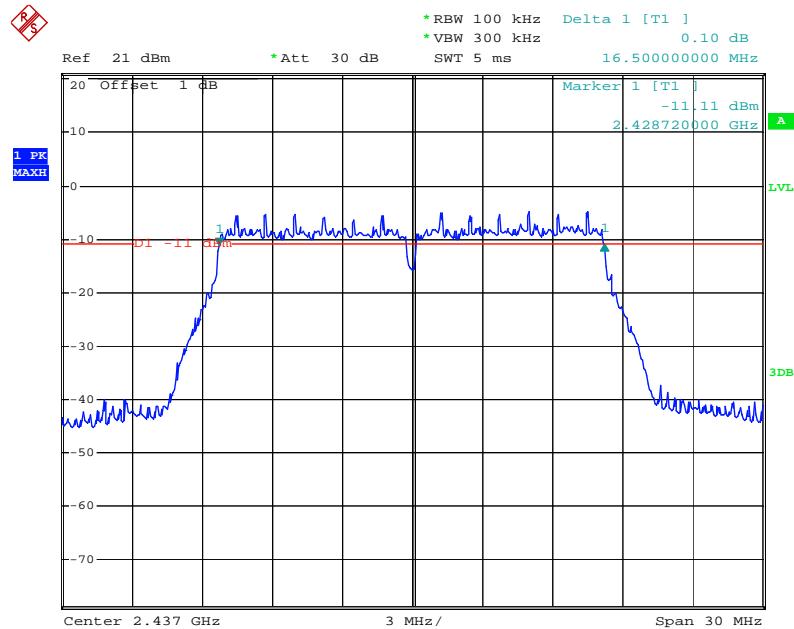


Date: 30.NOV.2012 23:36:56

802.11g High Channel

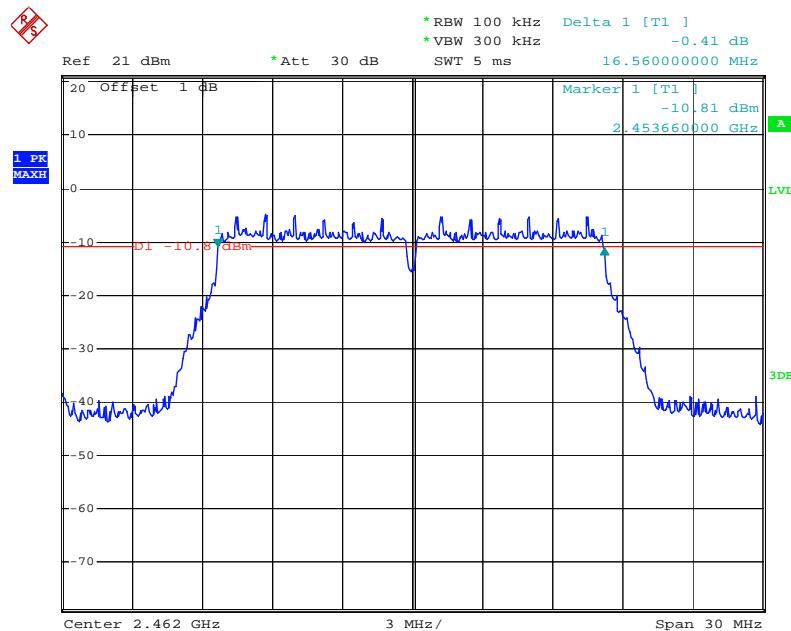

Date: 30.NOV.2012 23:38:13

802.11n Low Channel

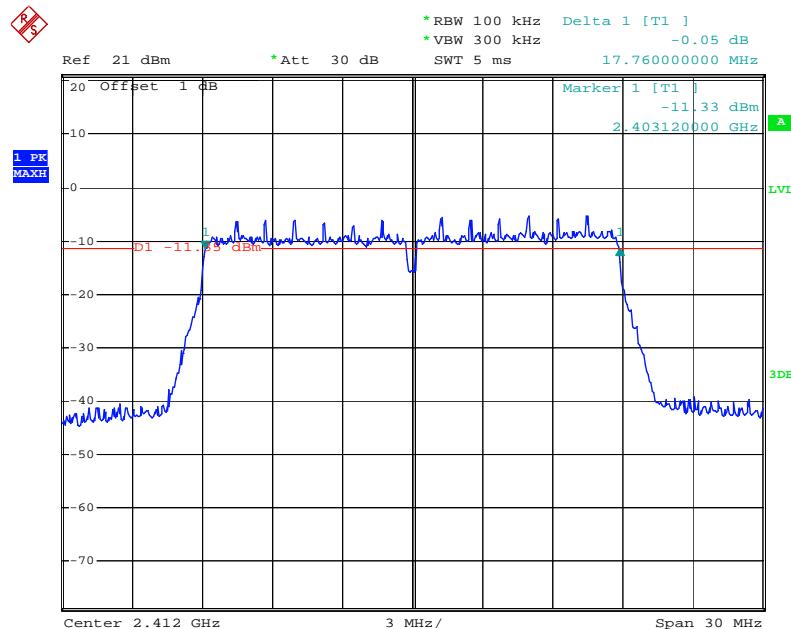

Date: 30.NOV.2012 23:44:26


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009


Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 17 of 87
www.siemic.com.cn

802.11n Middle Channel

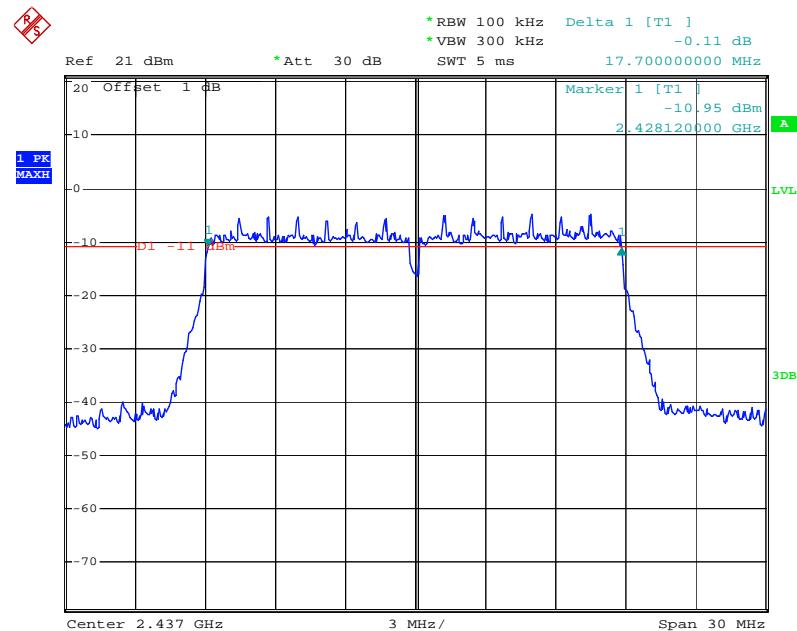

Date: 30.NOV.2012 23:42:11

802.11n High Channel

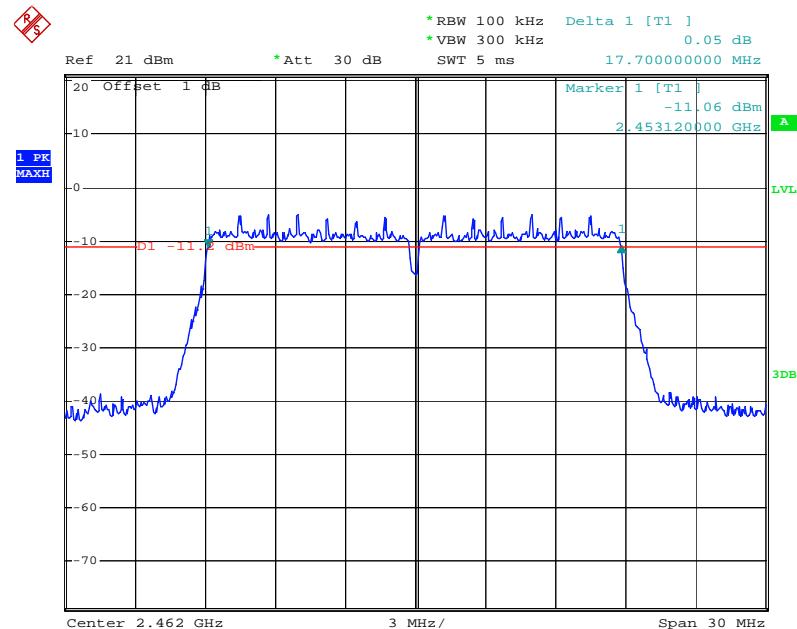

Date: 30.NOV.2012 23:41:20

5.4 §15.247(b) (3) - Conducted Maximum Output Power

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

| | |
|----------------------|----------|
| Temperature | 16°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
4. Test date : November 30 to December 07, 2012
Tested By : Eaton Wang

Standard Requirement:

Maximum Peak Conducted Output Power

The following procedures can be used to determine the maximum peak conducted output power of a DTS EUT.

Maximum Conducted Output Power

§15.247(b)(3) permits the maximum (average) conducted output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When these procedures are utilized, the power is referenced to the emission bandwidth (EBW) rather than the DTS bandwidth (see Section 2.0 for definitions).

When using a spectrum/signal analyzer to perform these measurements, it must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins.

The ideal method for measuring the maximum (average) conducted output power is with the EUT is configured to transmit continuously (duty cycle $\geq 98\%$) at its maximum power control level. However, when this condition cannot be realized, video triggering or signal gating can be used to ensure that the measurements are performed only during periods when the EUT is transmitting at its maximum power control level. An option is also provided that can be used when none of the above requirements can be met with the available measurement instrumentation.

Procedures:

Measurement Procedure PK:

This procedure should only be used when the maximum available RBW of the spectrum/signal analyzer is less than the DTS bandwidth.

1. Set the RBW = maximum available (at least 1 MHz).
2. Set the VBW = $3 \times \text{RBW}$ or maximum available setting (must be $\geq \text{RBW}$).
3. Set the span to fully encompass the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

Measurement Procedure AVG:

This procedure should be used with an RMS power averaging detector; however, a sample detector can be used when an RMS detector is not available. This is the baseline method for measuring the maximum (average) conducted output power.

1. Set the analyzer span to a minimum of 1.5 times the EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW ≥ 3 MHz.
4. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 19 of 87
www.siemic.com.cn

5. Sweep time = auto couple.
6. Detector = power averaging (RMS) or sample detector when RMS not available.
7. Employ trace averaging in power averaging (RMS) mode over a minimum of 100 traces.
8. Use the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges.

Note: If the analyzer does not have a band power function, sum the spectral levels (in linear power units) at 1 MHz intervals extending across the entire EBW.


Test Result: Pass.

Please refer to the following tables and plots.

| Channel | Channel Frequency (MHz) | Data Rate (Mbps) | PK Output Power (dBm) | AVG Output Power (dBm) | Limit (dBm) |
|---------------------|-------------------------|------------------|-----------------------|------------------------|-------------|
| 802.11b mode | | | | | |
| Low | 2412 | 1 | 10.29 | 10.48 | 30 |
| Middle | 2437 | 1 | 10.71 | 11.28 | 30 |
| High | 2462 | 1 | 10.62 | 10.98 | 30 |
| 802.11g mode | | | | | |
| Low | 2412 | 6 | 17.07 | 9.41 | 30 |
| Middle | 2437 | 6 | 17.52 | 9.88 | 30 |
| High | 2462 | 6 | 17.43 | 9.80 | 30 |
| 802.11n mode | | | | | |
| Low | 2412 | MCS0 | 15.71 | 9.31 | 30 |
| Middle | 2437 | MCS0 | 15.93 | 10.11 | 30 |
| High | 2462 | MCS0 | 16.12 | 9.95 | 30 |


26 dB bandwidth (EBW):

802.11b Low Channel

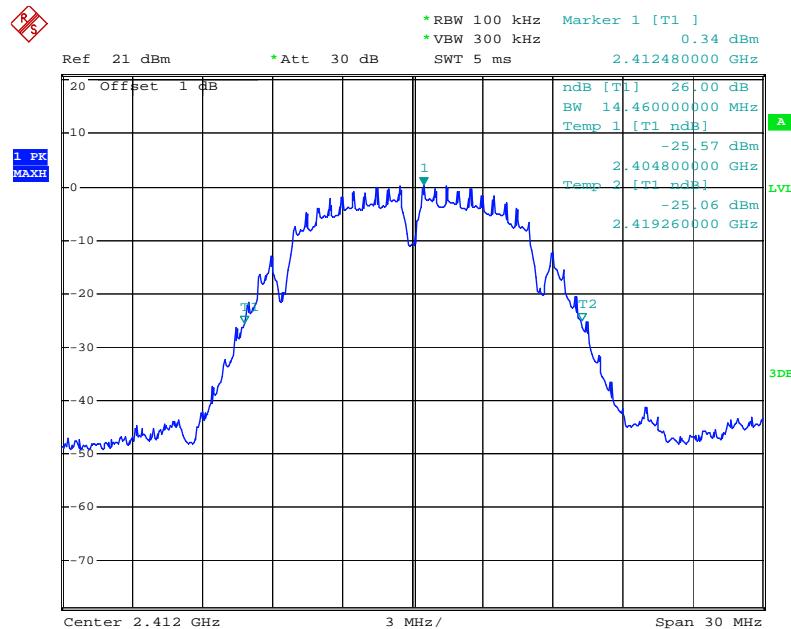


Date: 30.NOV.2012 23:27:48

802.11b Middle Channel

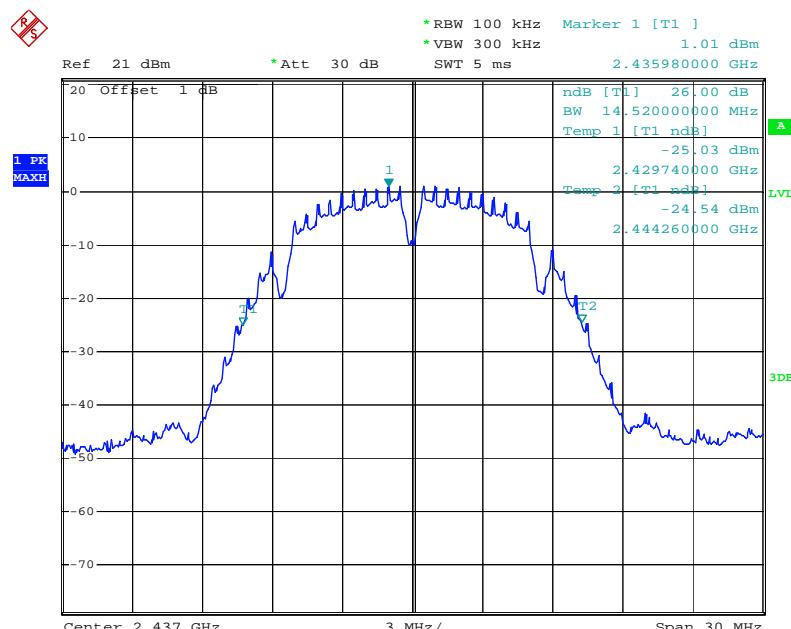


Date: 30.NOV.2012 23:17:51

802.11b High Channel

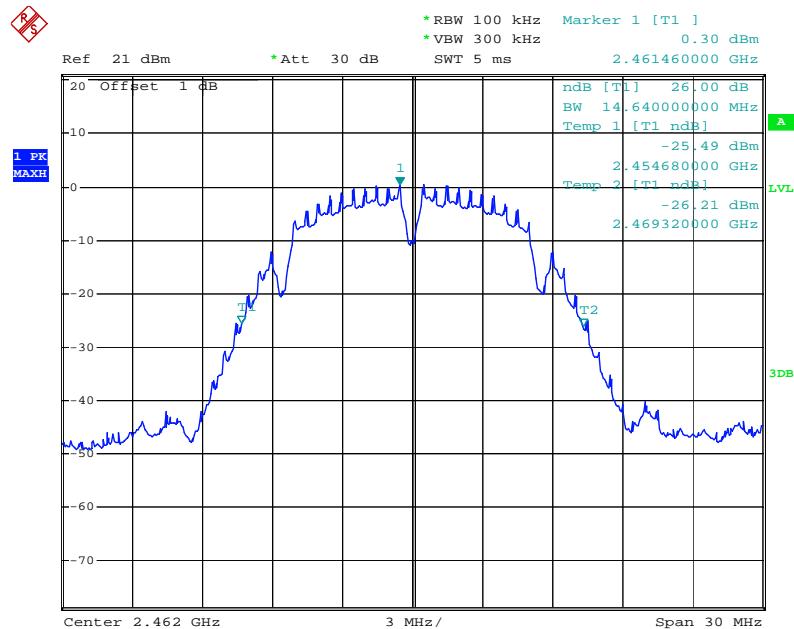


Date: 30.NOV.2012 23:28:52

802.11g Low Channel

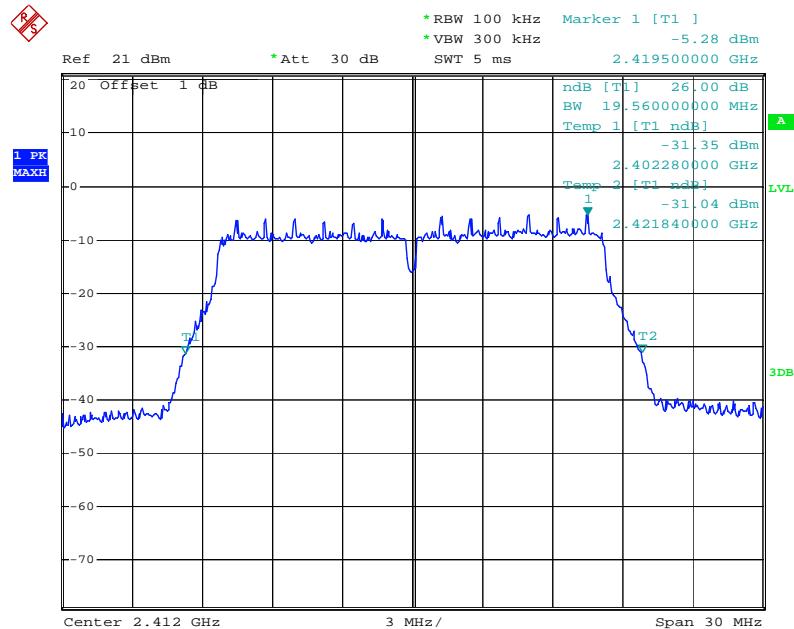


Date: 30.NOV.2012 23:35:26

802.11g Middle Channel

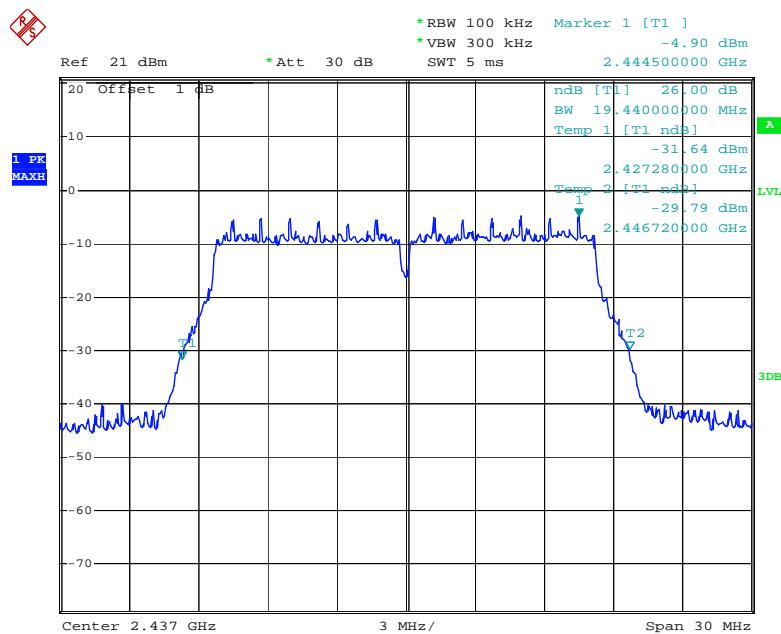


Date: 30.NOV.2012 23:36:21

802.11g High Channel

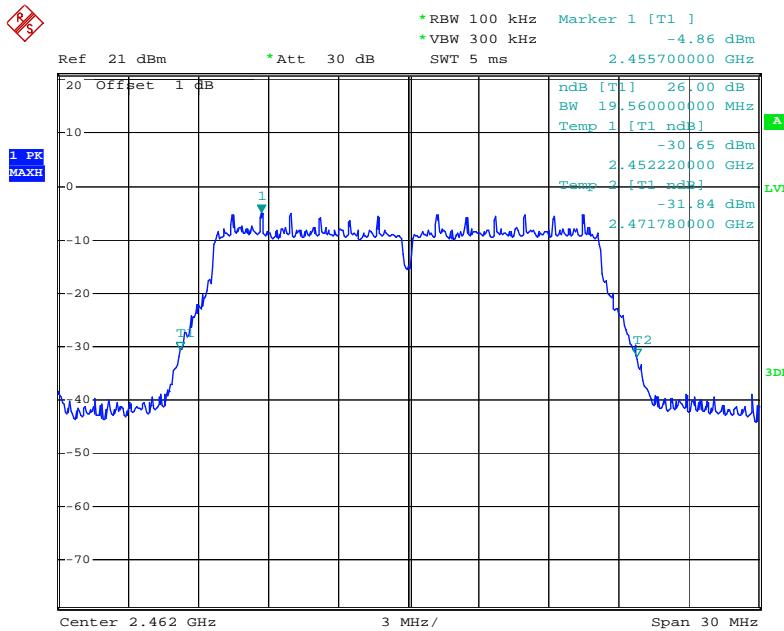


Date: 30.NOV.2012 23:38:28

802.11n Low Channel

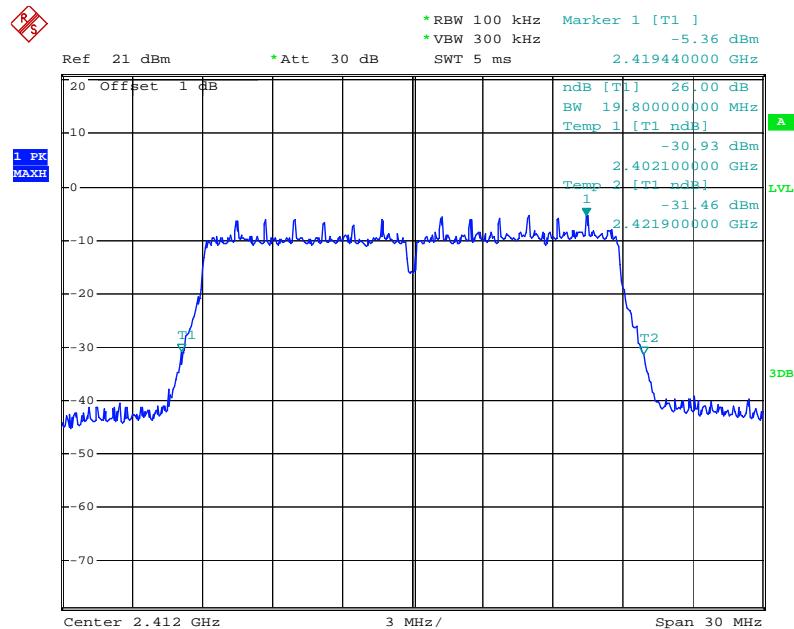

Date: 30.NOV.2012 23:43:57


802.11n Middle Channel

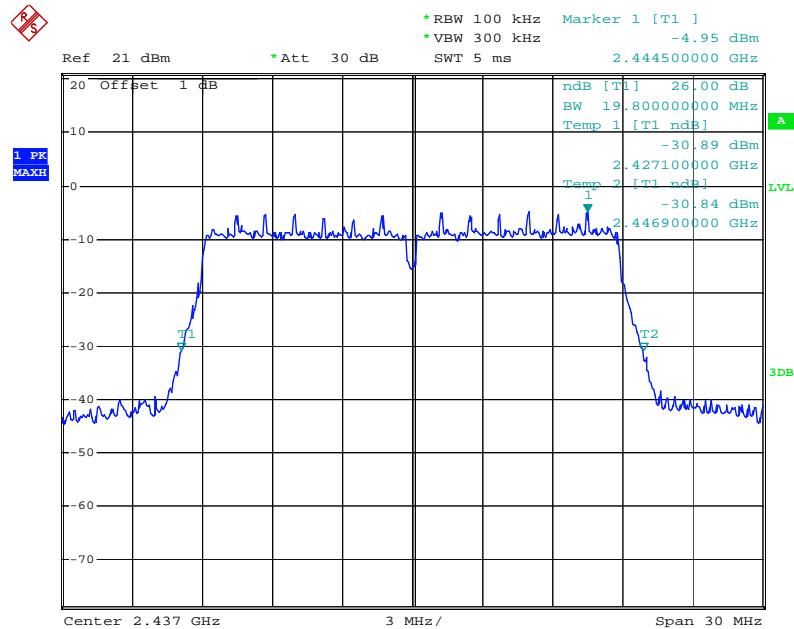

Date: 30.NOV.2012 23:42:55



802.11n High Channel

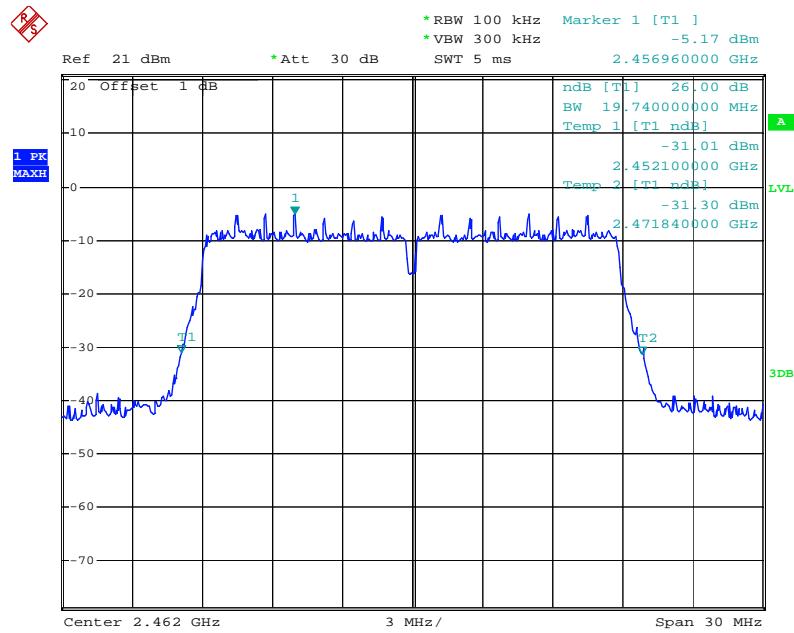


Date: 30.NOV.2012 23:40:38




Maximum Peak Conducted Output Power:

802.11b Low Channel

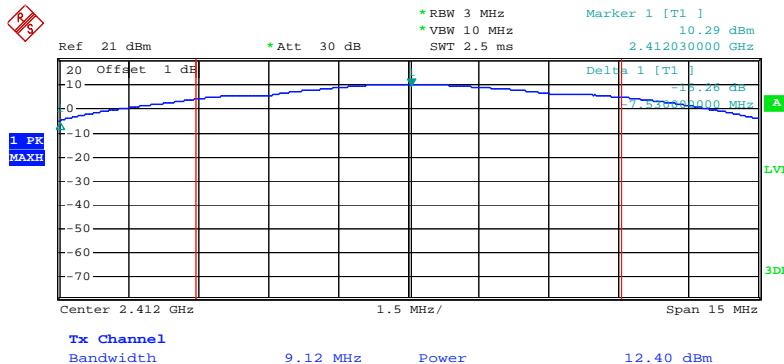

Date: 7.DEC.2012 13:13:50


802.11b Middle Channel

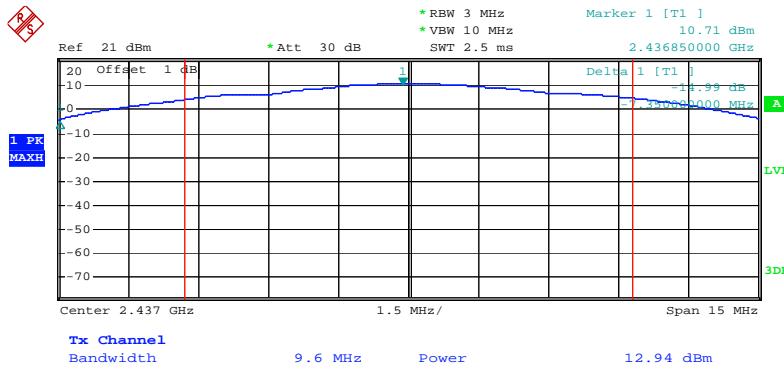

Date: 7.DEC.2012 13:14:33




802.11b High Channel

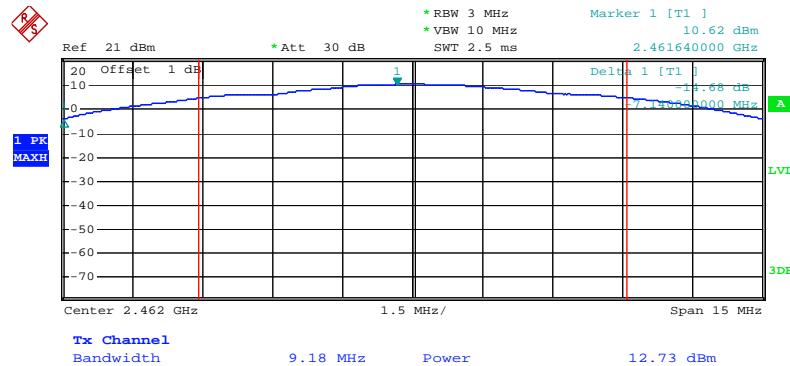

Date: 7.DEC.2012 13:15:07


802.11g Low Channel

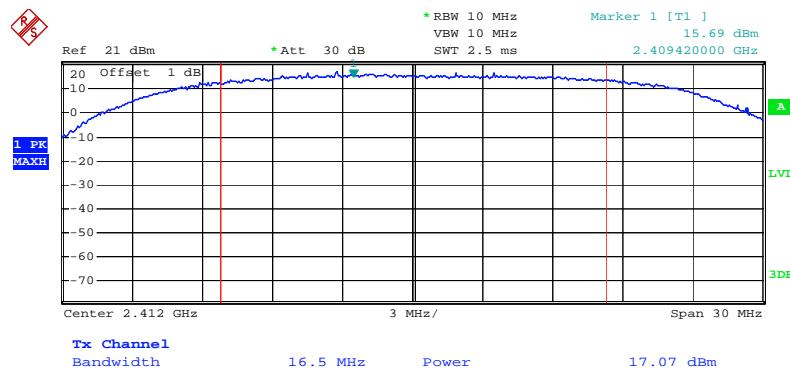

Date: 3.DEC.2012 08:58:02




802.11g Middle Channel

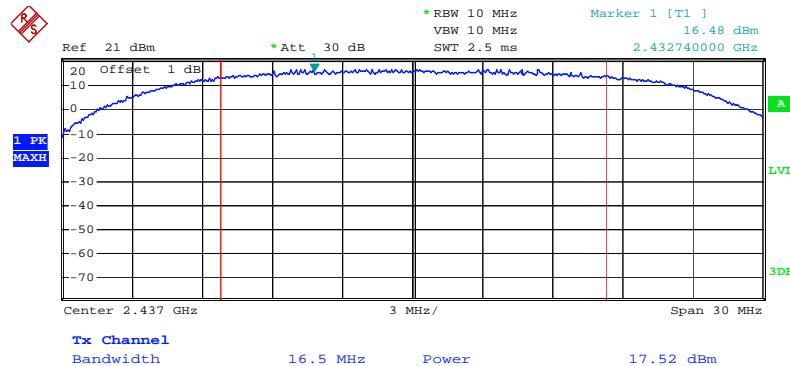

Date: 3.DEC.2012 09:00:54


802.11g High Channel

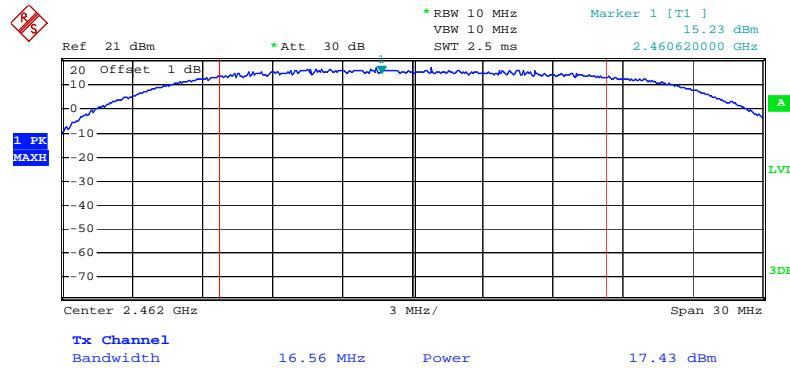

Date: 3.DEC.2012 09:03:43




802.11n Low Channel

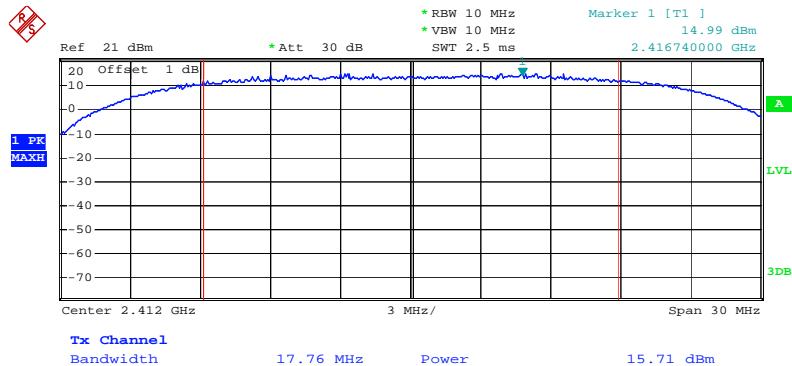

Date: 30.NOV.2012 23:52:53


802.11n Middle Channel

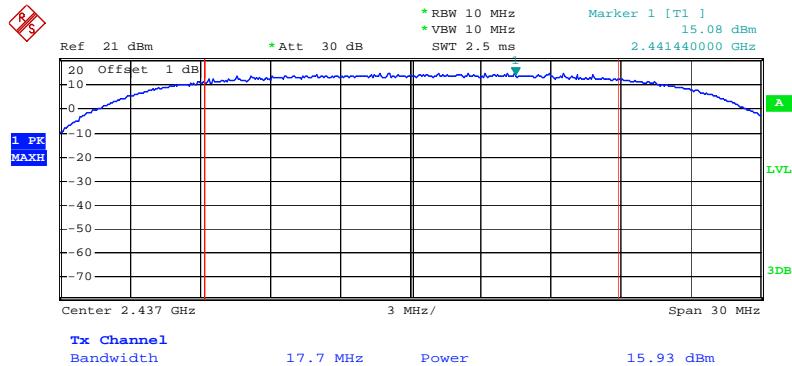

Date: 30.NOV.2012 23:55:57



802.11n High Channel

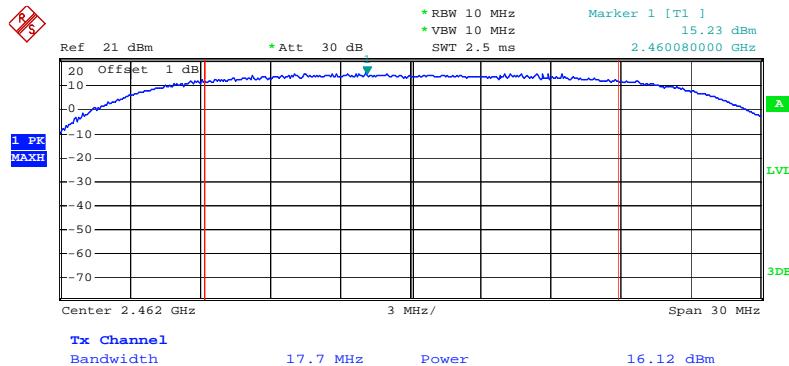


Date: 1.DEC.2012 00:00:15

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 30 of 87
www.siemic.com.cn

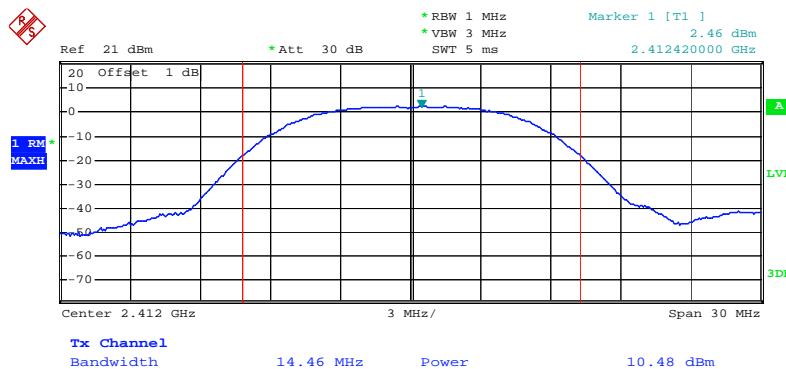Maximum Average Conducted Output Power:**802.11b Low Channel**

Date: 3.DEC.2012 09:37:56

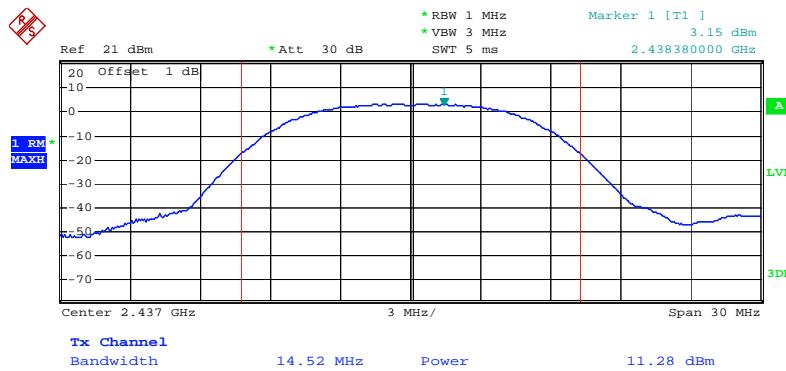802.11b Middle Channel


Date: 3.DEC.2012 09:34:07

802.11b High Channel




Date: 3.DEC.2012 09:39:30

802.11g Low Channel

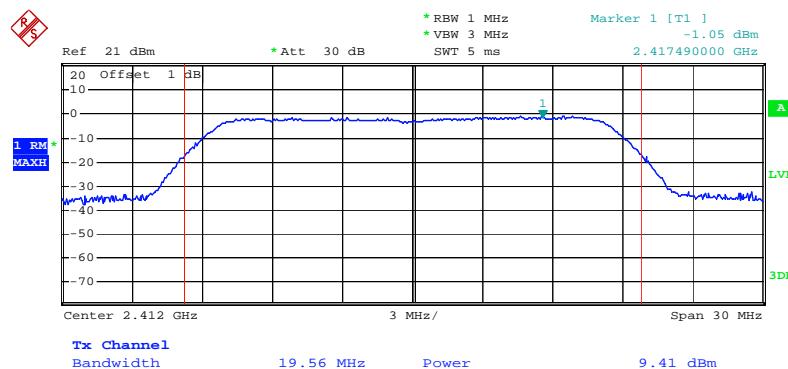


Date: 3.DEC.2012 10:04:47

802.11g Middle Channel

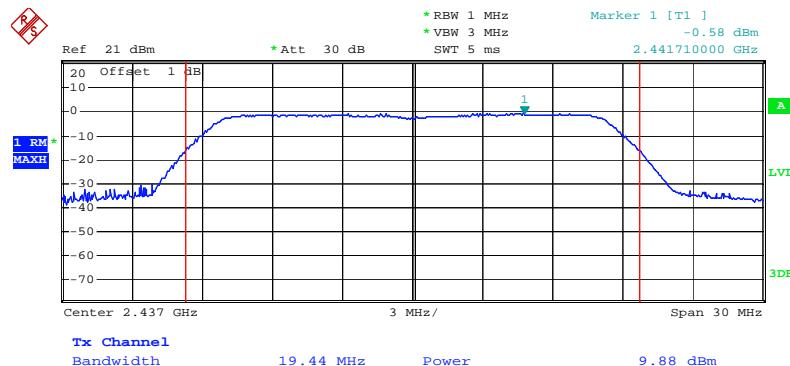


Date: 3.DEC.2012 09:50:46

802.11g High Channel

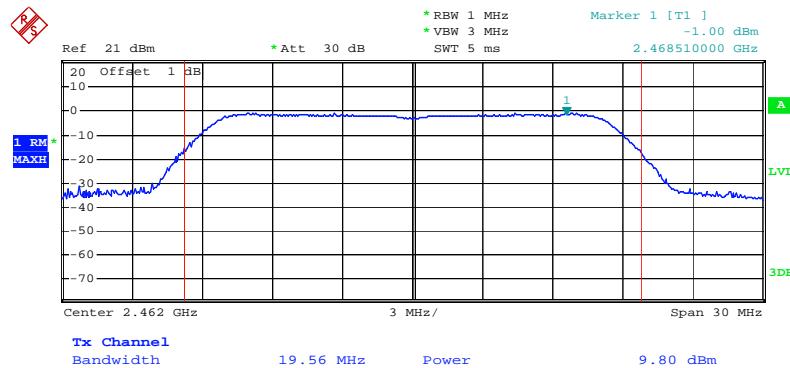


Date: 3.DEC.2012 09:44:27

802.11n Low Channel

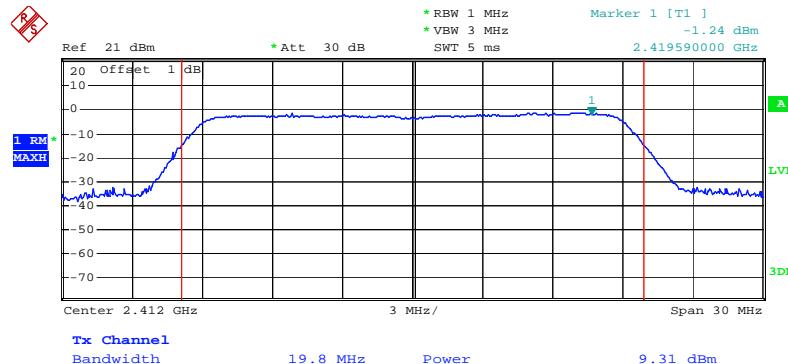

Date: 3.DEC.2012 10:12:42


802.11n Middle Channel

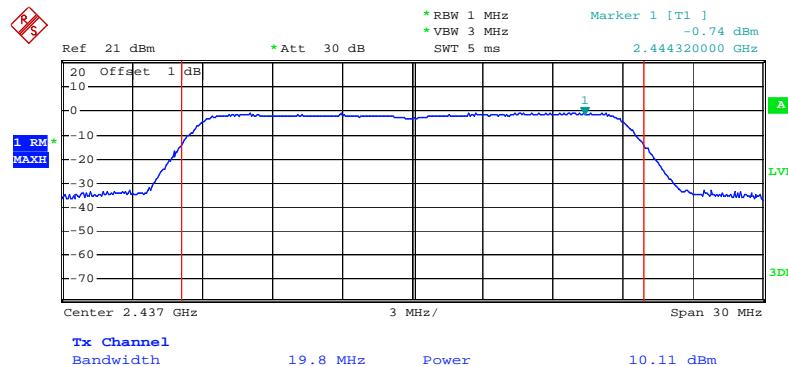

Date: 3.DEC.2012 10:21:14



802.11n High Channel

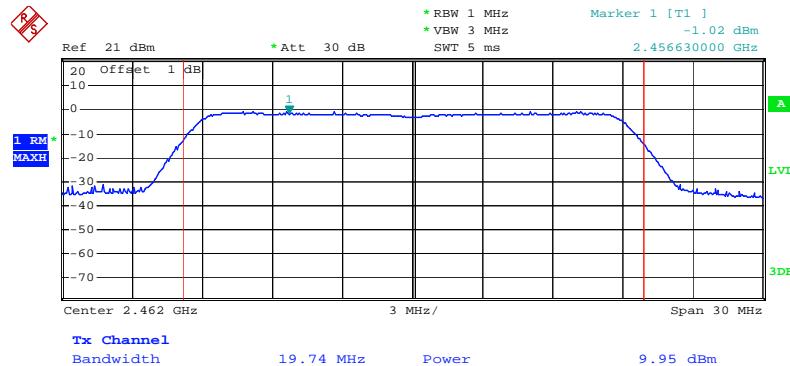

Date: 3.DEC.2012 10:29:45

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 35 of 87
www.siemic.com.cn

5.5 §15.247(e) - Power Spectral Density

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

| | |
|----------------------|----------|
| Temperature | 22°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.

4. Test date :December 03 , 2012

Tested By : Eaton Wang

Requirement(s):

A conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the DTS bandwidth is specified during any time interval of continuous transmission.⁴ By rule, the same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if maximum peak conducted output power was measured then the peak PSD procedure shall be used and if maximum conducted output power was measured then the average PSD procedure shall be used).

If the average PSD is measured with a power averaging (RMS) detector or a sample detector, then the spectrum analyzer must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins.

Procedures:

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Result: Pass.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 36 of 87
www.siemic.com.cn

Please refer to the following tables and plots.

| Channel | Frequency (MHz) | Data Rate | PSD (dBm) | Limit (dBm) |
|--------------|-----------------|-----------|-----------|-------------|
| 802.11b mode | | | | |
| Low | 2412 | 1 | -11.32 | 8 |
| Middle | 2437 | 1 | -11.96 | 8 |
| High | 2462 | 1 | -11.82 | 8 |
| 802.11g mode | | | | |
| Low | 2412 | 6 | -18.38 | 8 |
| Middle | 2437 | 6 | -17.86 | 8 |
| High | 2462 | 6 | -16.21 | 8 |
| 802.11n mode | | | | |
| Low | 2412 | MCS0 | -18.31 | 8 |
| Middle | 2437 | MCS0 | -17.57 | 8 |
| High | 2462 | MCS0 | -17.37 | 8 |




SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009


Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 37 of 87
www.siemic.com.cn

Power Spectral Density, 802.11b Low Channel

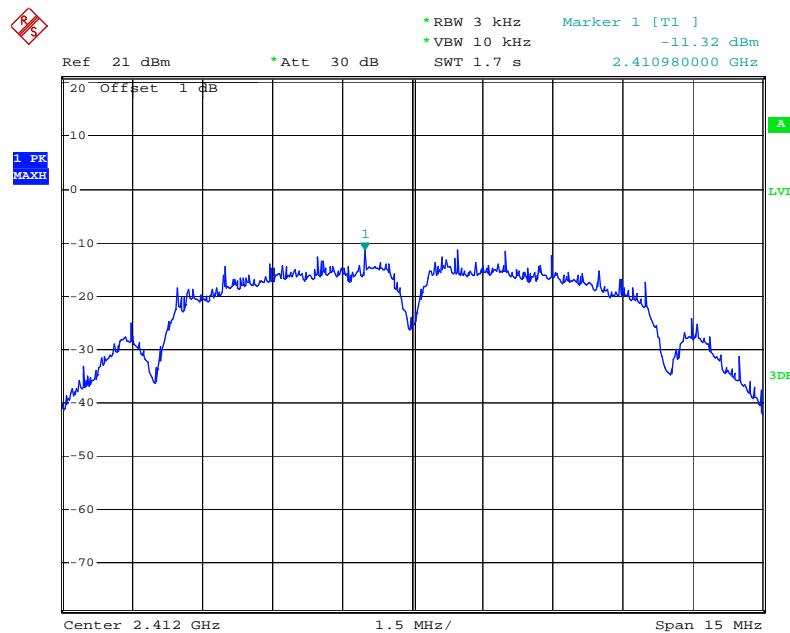

Date: 3.DEC.2012 10:46:50

Power Spectral Density, 802.11b Middle Channel

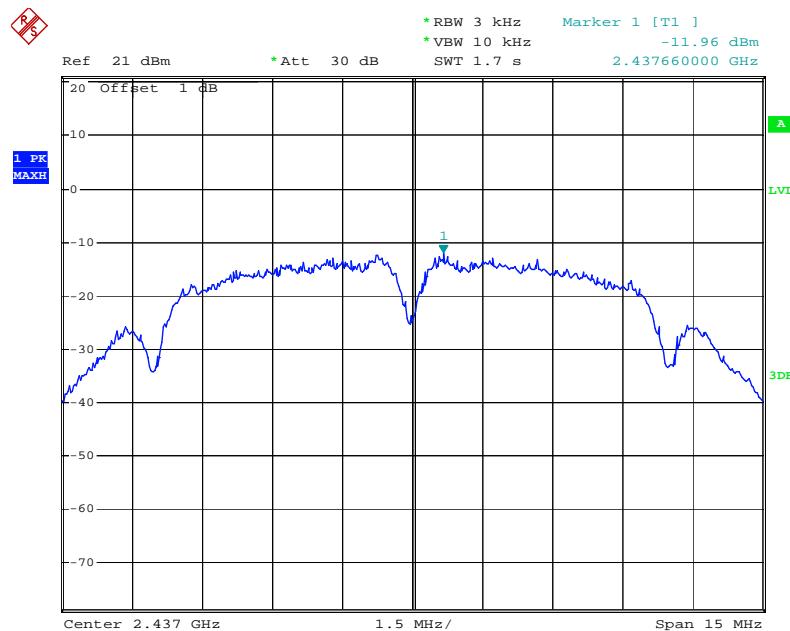

Date: 3.DEC.2012 10:49:20


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009


Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 38 of 87
www.siemic.com.cn

Power Spectral Density, 802.11b High Channel

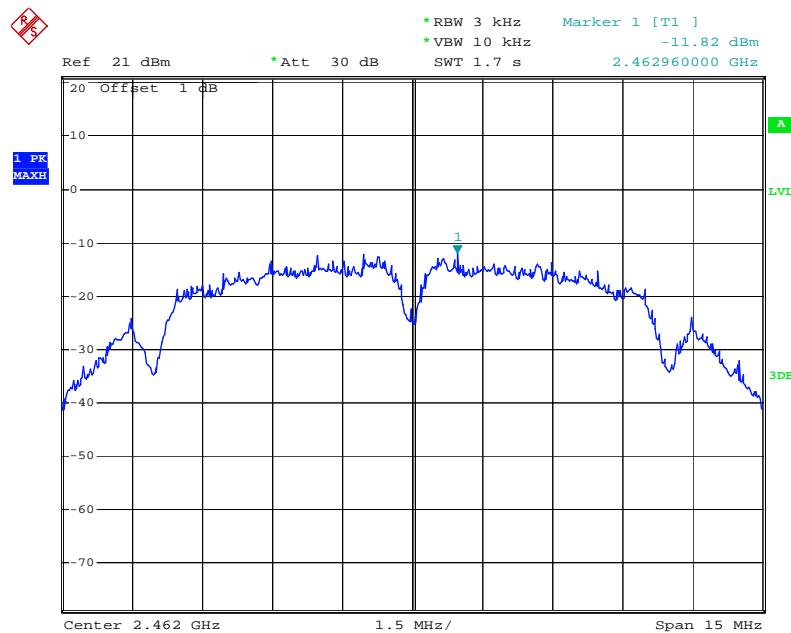

Date: 3.DEC.2012 10:51:13

Power Spectral Density, 802.11g Low Channel

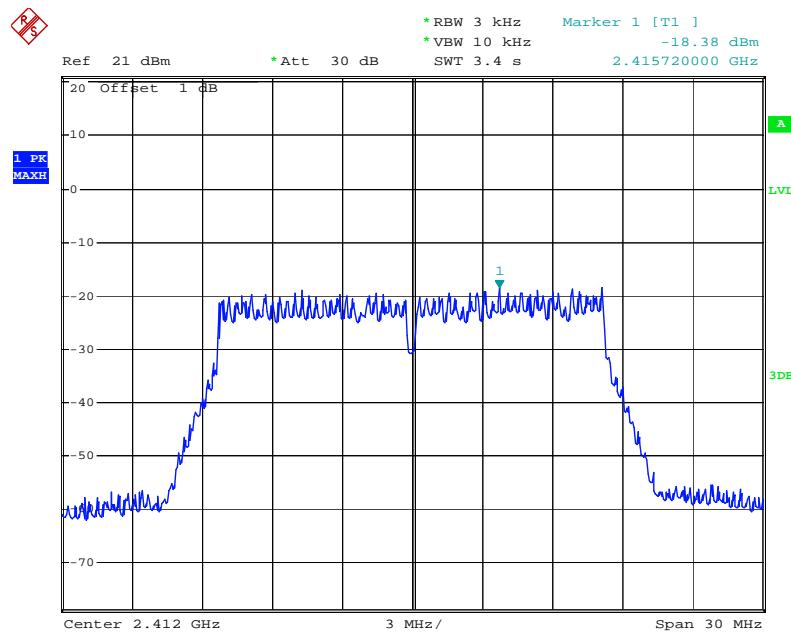

Date: 3.DEC.2012 10:44:33


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009


Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 39 of 87
www.siemic.com.cn

Power Spectral Density, 802.11g Middle Channel

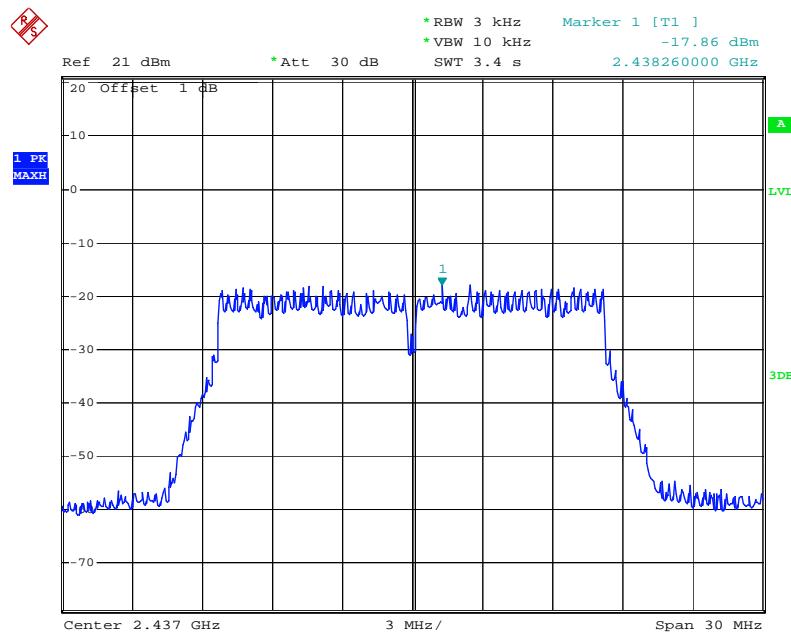

Date: 3.DEC.2012 10:41:41

Power Spectral Density, 802.11g High Channel

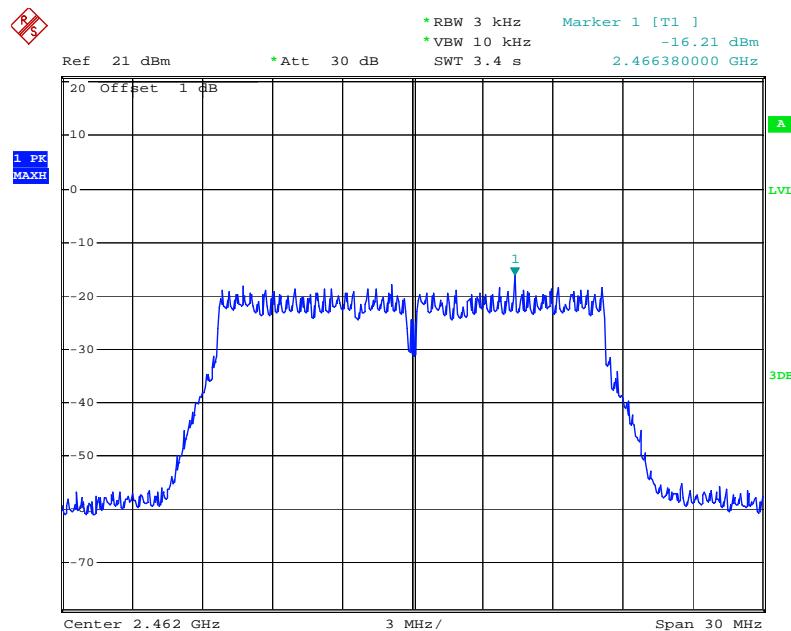

Date: 3.DEC.2012 10:43:20


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009


Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 40 of 87
www.siemic.com.cn

Power Spectral Density, 802.11n Low Channel

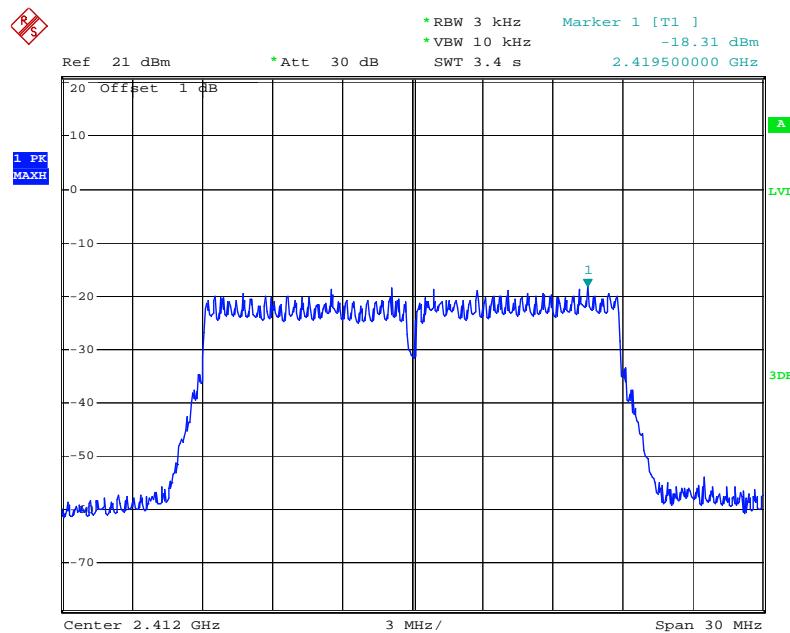

Date: 3.DEC.2012 10:37:51

Power Spectral Density, 802.11n Middle Channel

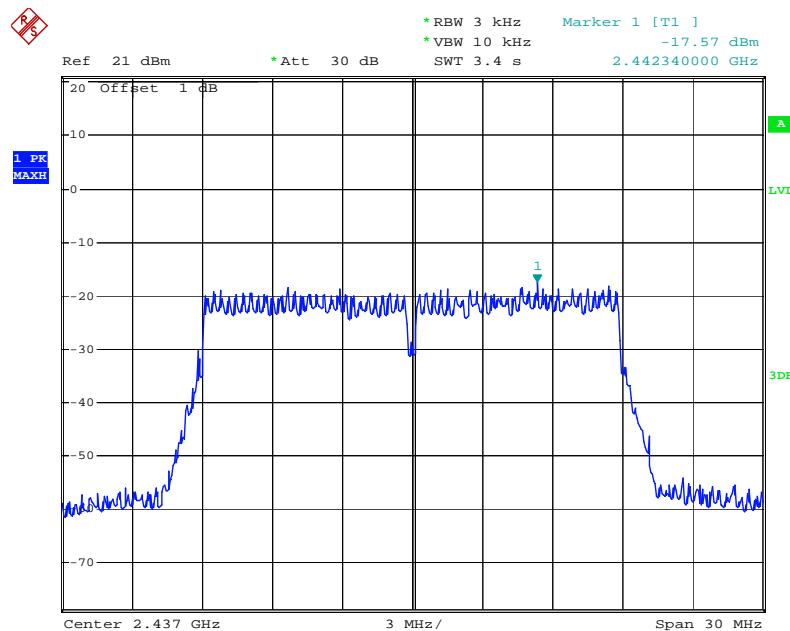

Date: 3.DEC.2012 10:39:40


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 41 of 87
www.siemic.com.cn

Power Spectral Density, 802.11n High Channel

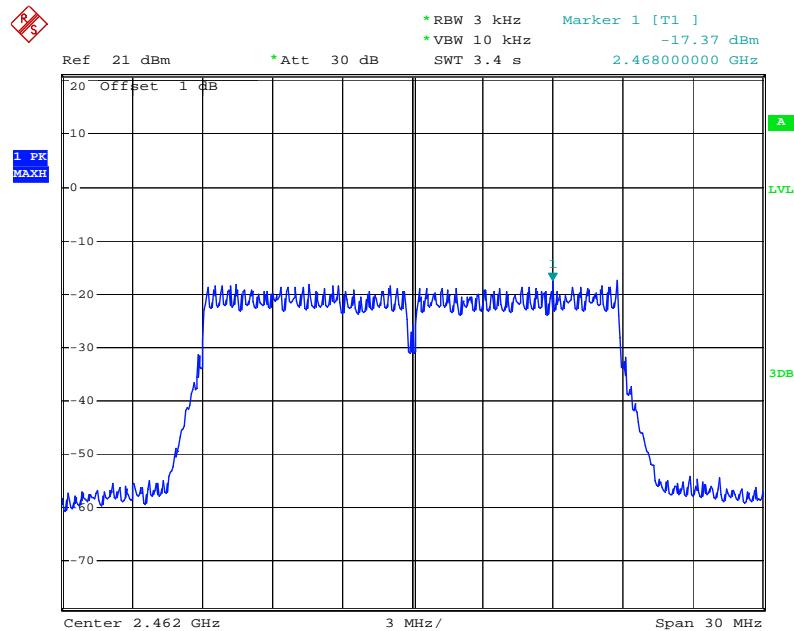

Date: 3.DEC.2012 10:34:10

5.6 §15.247(d) – Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

1. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))
2. Environmental Conditions

| | |
|----------------------|----------|
| Temperature | 160C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
3. Test date : December 07, 2012
Tested By : Peter Wong

Requirement(s):

Requirement(s):

Band-Edge Measurements

The measurement of unwanted emissions at the edge of the authorized frequency bands can be complicated by the capture of RF energy from the fundamental emission within the RBW passband. The following techniques are permitted for use in performing a measurement of the unwanted emission level at the band edges.

Unwanted Emissions into Non-Restricted Frequency Bands

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power, based on either RF conducted or radiated measurements, shall be attenuated according to the following conditions:

1. If the maximum peak conducted output power procedure was used to demonstrate compliance to **15.247(b)(3)** requirements, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
2. If maximum (average) conducted output power was used to demonstrate compliance to **15.247(b)(3)** requirements, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
3. In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

The following procedures should be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined in C63.10.

Procedures:

Band-Edge(Integrated Power Measurement)

A narrower resolution bandwidth can be used at the band edge to improve the measurement accuracy provided that the measurement is subsequently integrated to the relevant bandwidth specification (e.g., 100 kHz within non-restricted bands and 1 MHz within restricted frequency bands).

Unwanted Emissions Level Measurement

Measure the peak power in any 100 kHz bandwidth for all emissions outside of the authorized DTS frequency band as follows. This measurement must be performed over a frequency range that spans from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 43 of 87
www.siemic.com.cn

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 10.1. Report the three highest emissions relative to the limit.

Test Result: Pass.

Please refer to the following tables and plots.

| Band Edge (MHz) | Delta Peak to band emission (dB) | Limit (dB) |
|--------------------|--|---------------|
| 802.11b mode | | |
| 2400.0 | 47.29 | 20 |
| 2483.5 | 48.45 | 20 |
| 802.11g mode | | |
| 2400.0 | 36.65 | 20 |
| 2483.5 | 41.46 | 20 |
| 802.11n mode | | |
| 2400.0 | 36.74 | 20 |
| 2483.5 | 41.50 | 20 |


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009


Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 44 of 87
www.siemic.com.cn

802.11b: Band Edge, Left Side

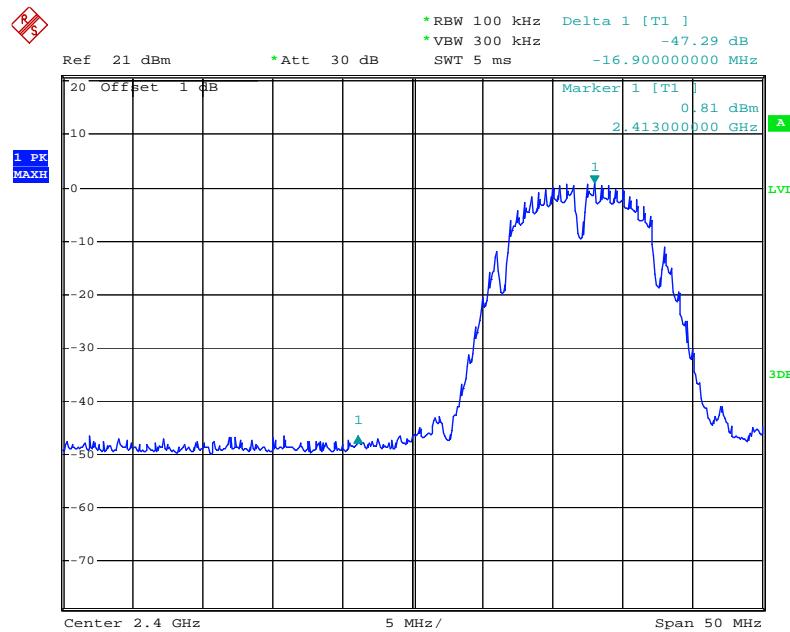

Date: 7.DEC.2012 13:09:40

802.11b: Band Edge, Right Side

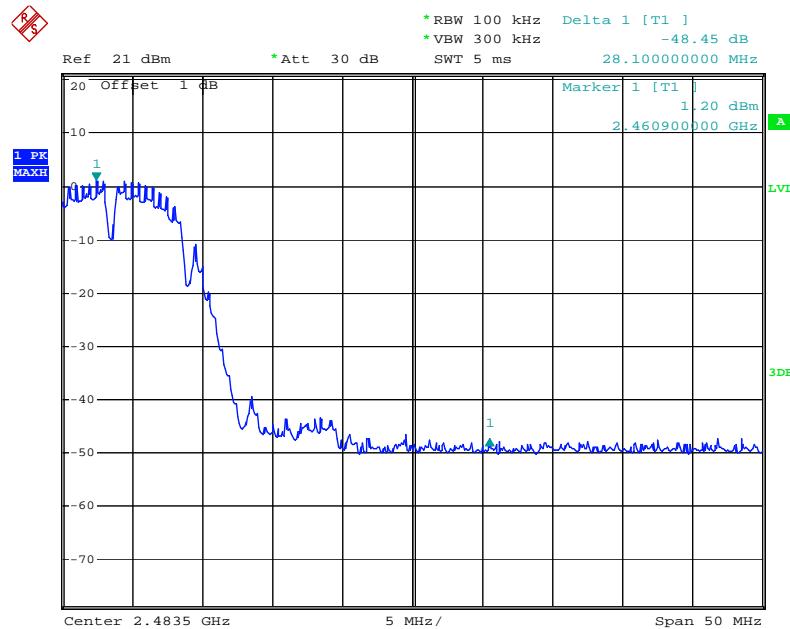

Date: 7.DEC.2012 13:07:58


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009


Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 45 of 87
www.siemic.com.cn

802.11g: Band Edge, Left Side

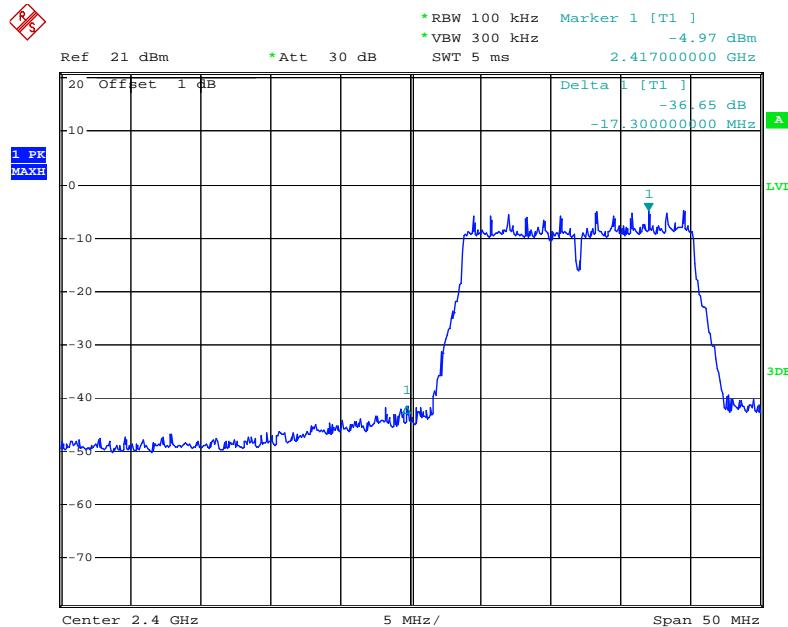

Date: 7.DEC.2012 13:10:22


802.11g: Band Edge, Right Side

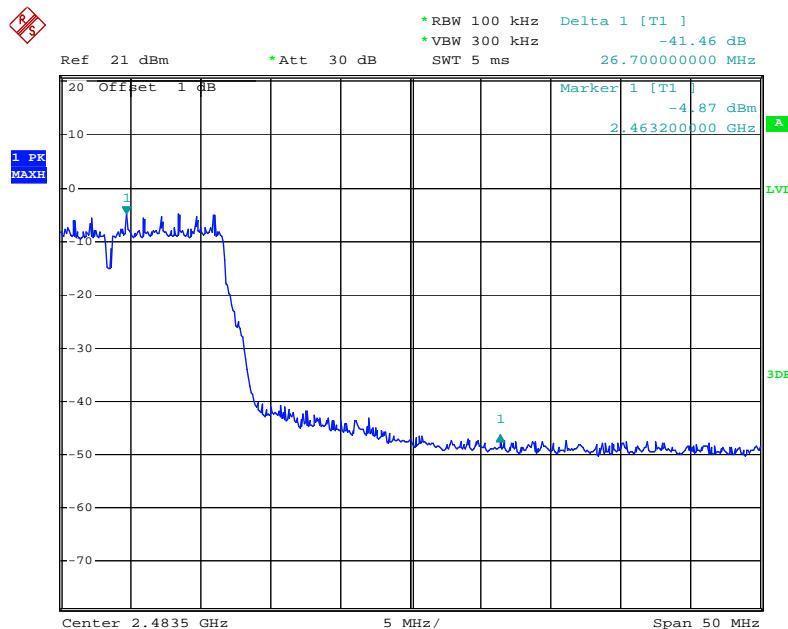

Date: 7.DEC.2012 13:07:04




802.11n: Band Edge, Left Side

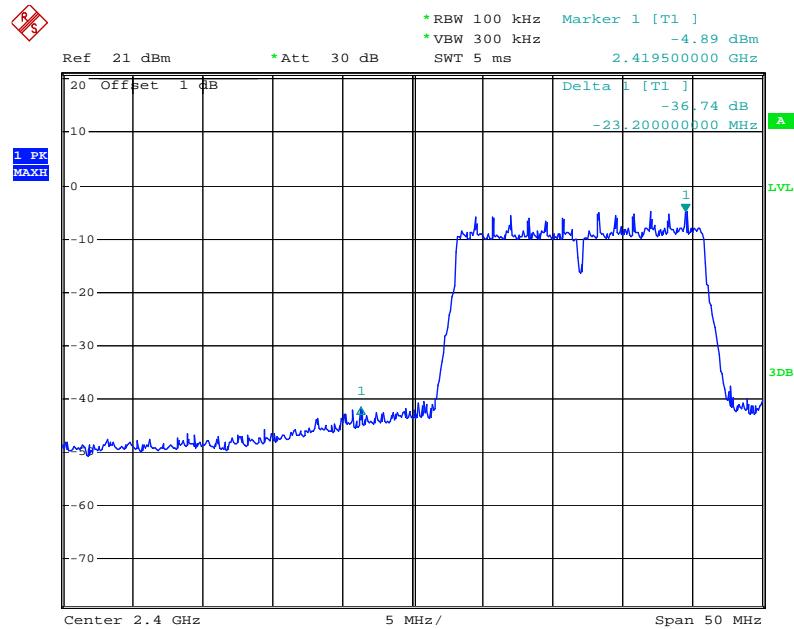

Date: 7.DEC.2012 13:11:05

802.11n: Band Edge, Right Side

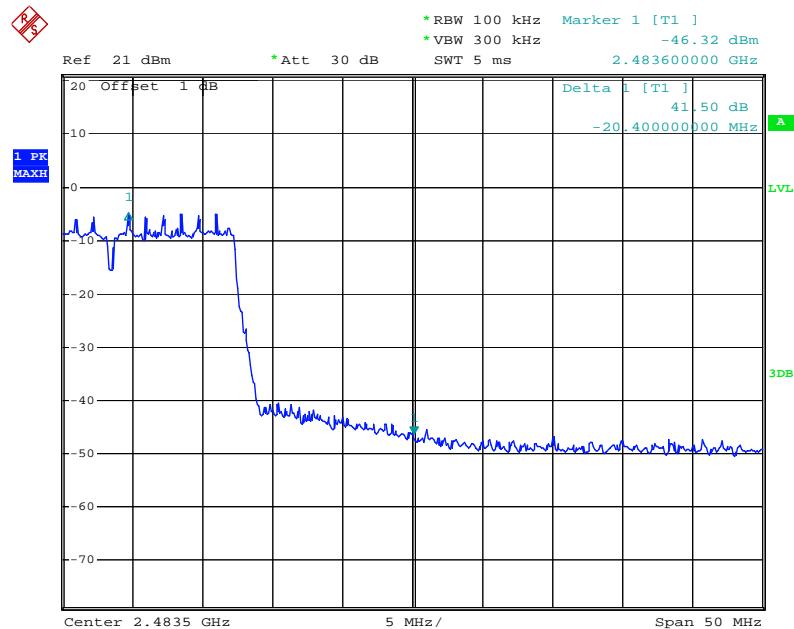

Date: 7.DEC.2012 13:06:14

**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 47 of 87
www.siemic.com.cn


Unwanted Emissions into Non-Restricted Frequency Bands

Please refer to the following plots.

802.11b Low Channel

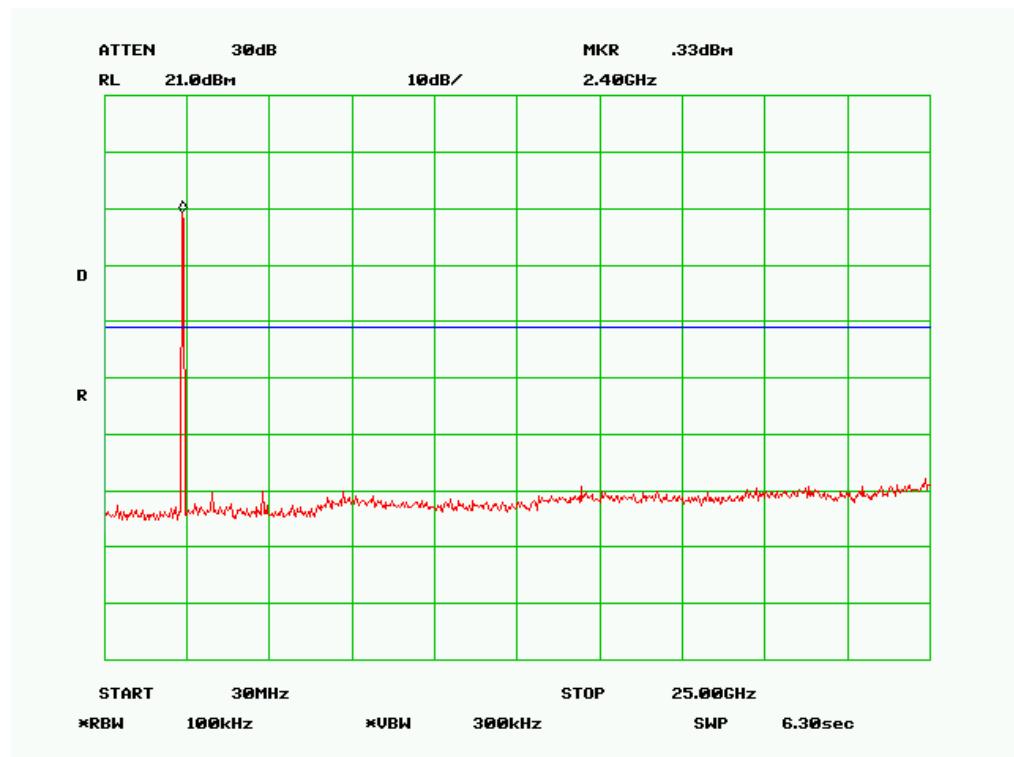

802.11b Middle Channel

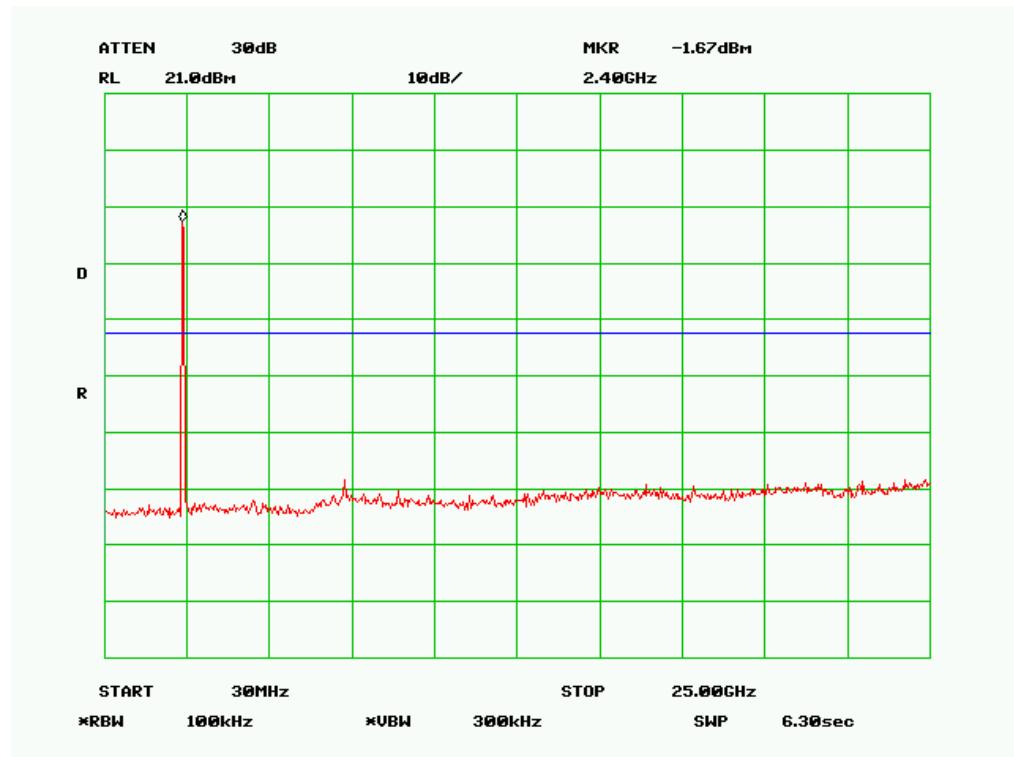


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 48 of 87
www.siemic.com.cn

802.11b High Channel

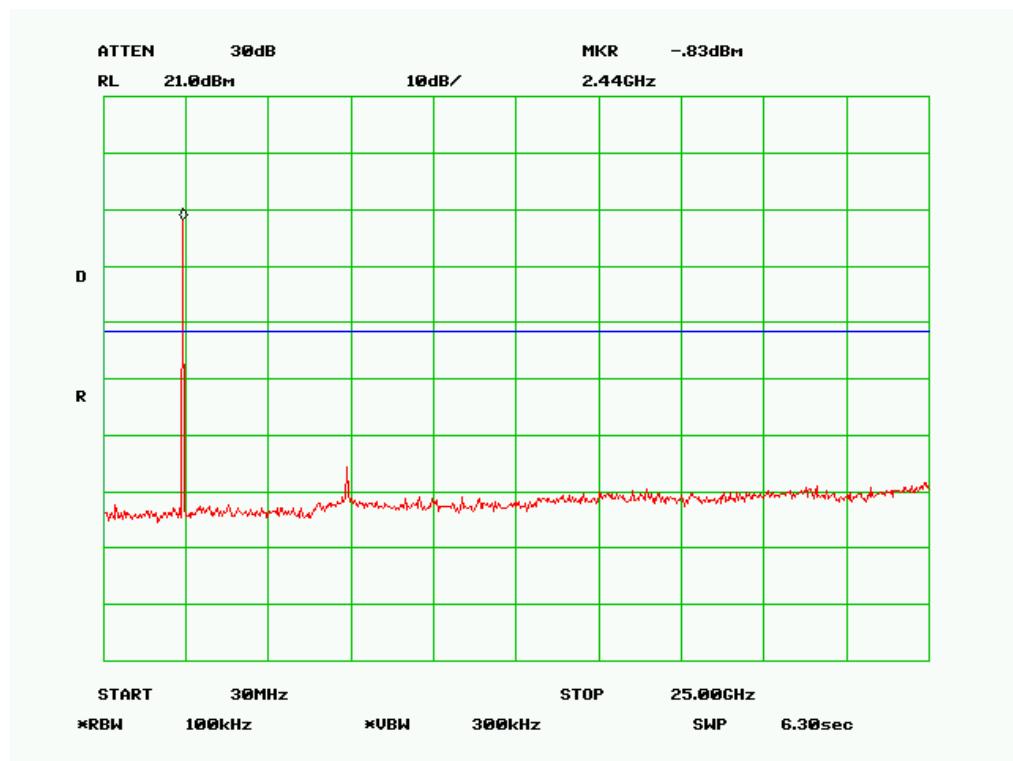

802.11g Low Channel

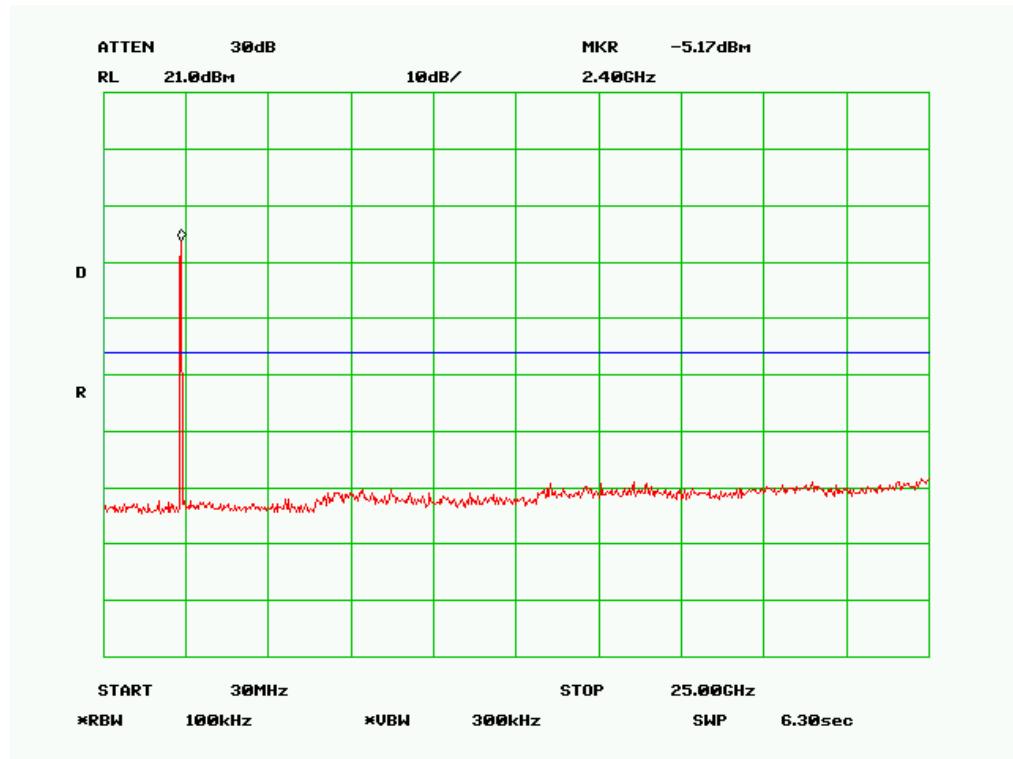


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 49 of 87
www.siemic.com.cn

802.11g Middle Channel

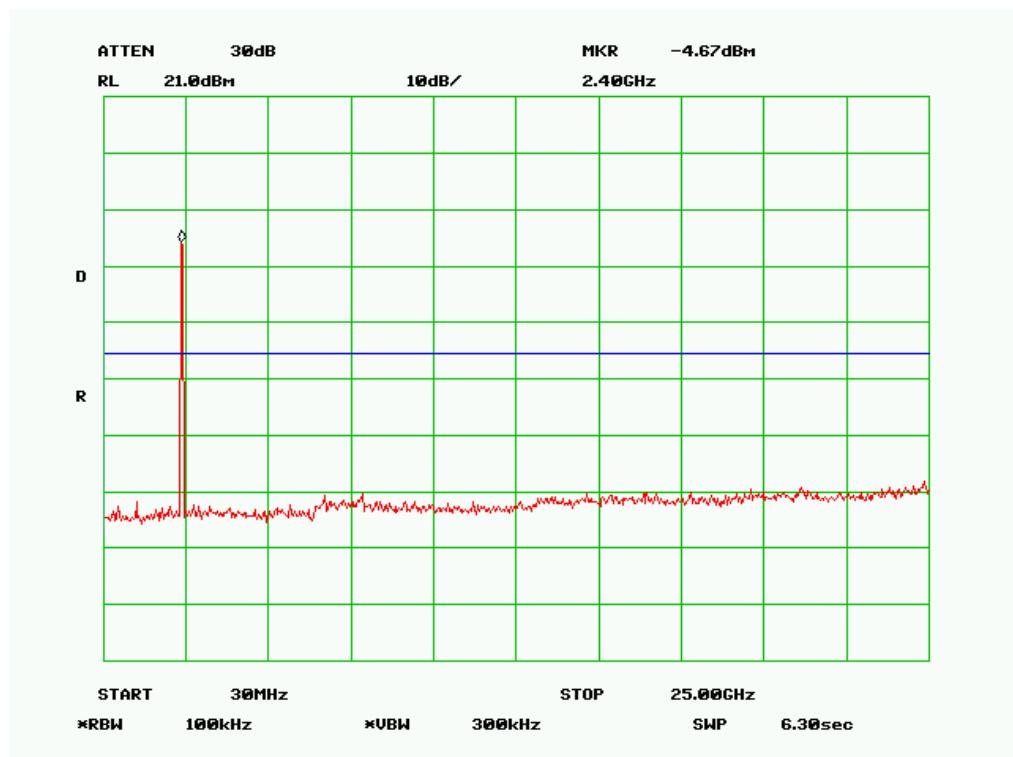

802.11g High Channel

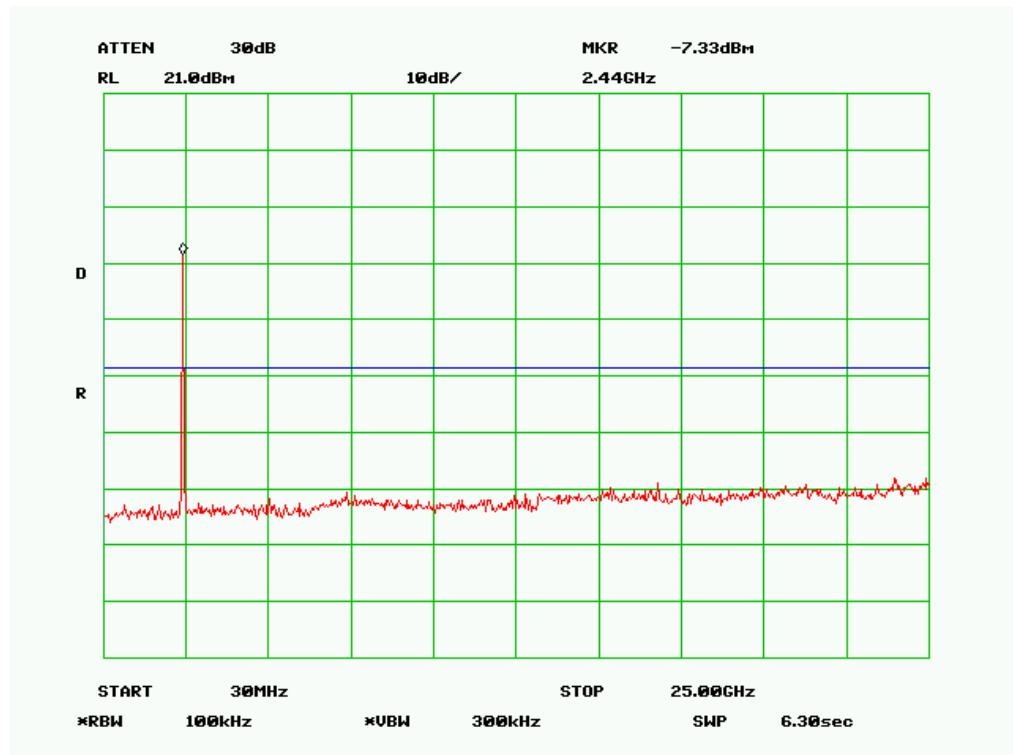


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 50 of 87
www.siemic.com.cn

802.11n Low Channel\

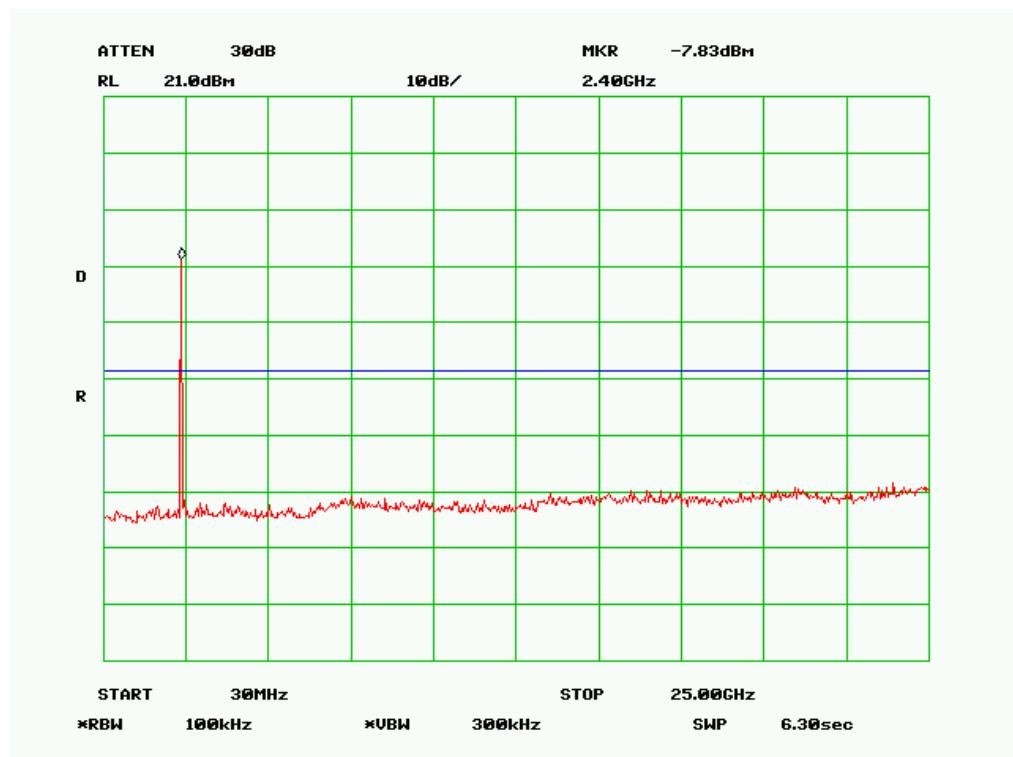

802.11n Middle Channel

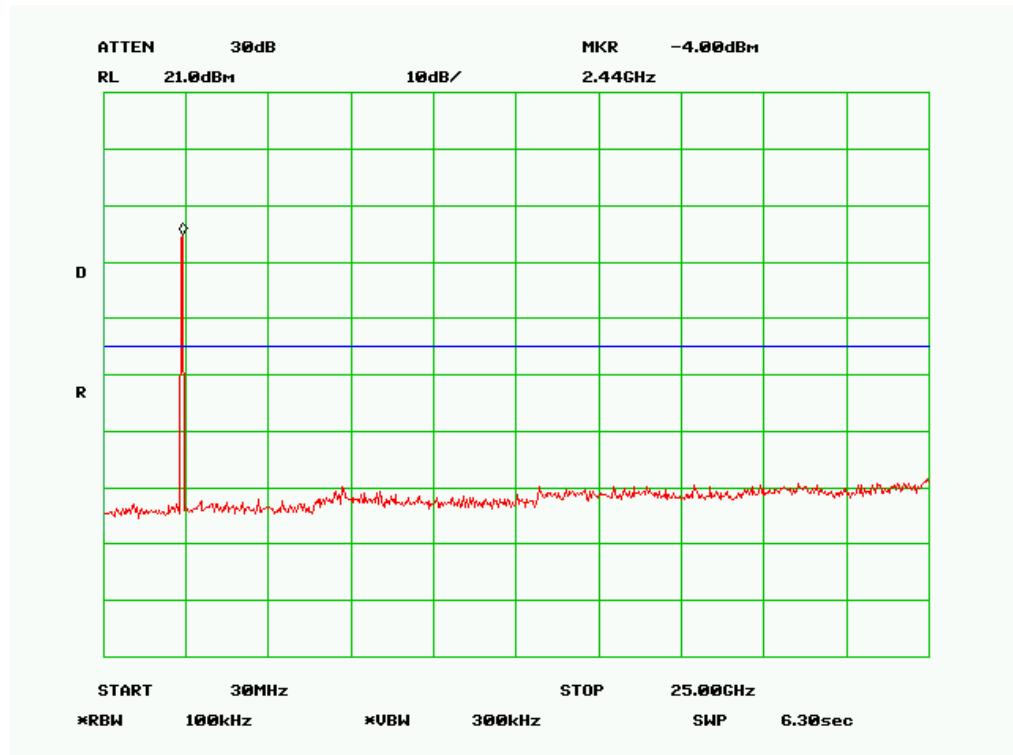


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 51 of 87
www.siemic.com.cn

802.11n High Channel

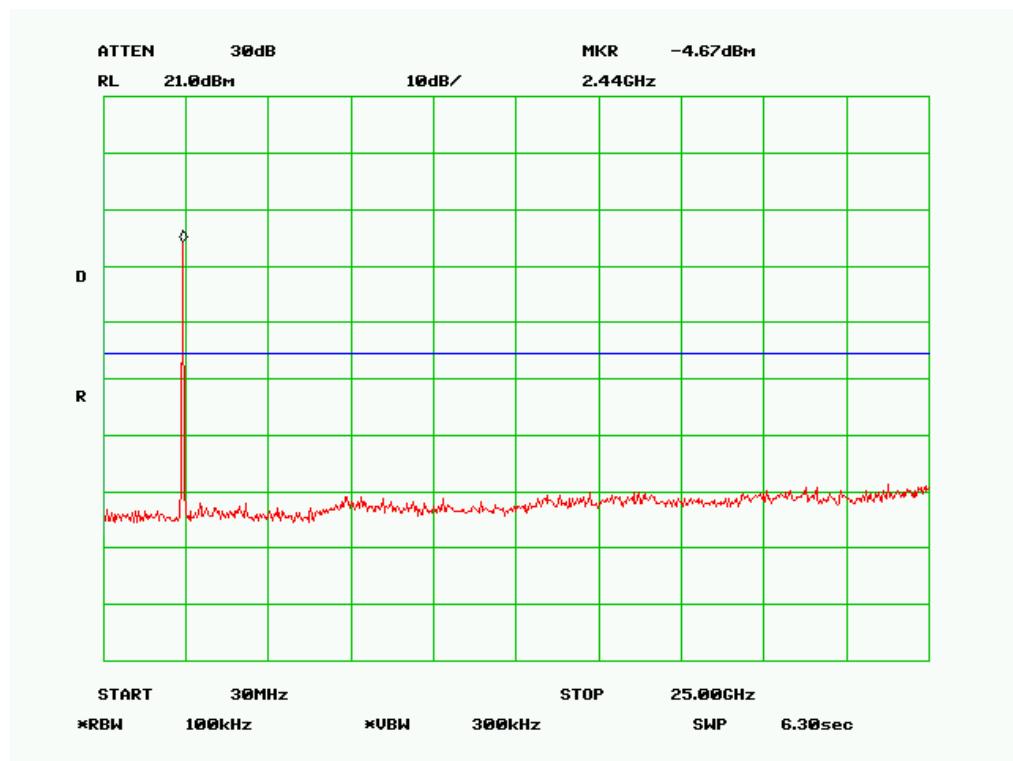

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 52 of 87
www.siemic.com.cn

5.7 §15.207 (a) - AC Power Line Conducted Emissions

Requirement:

| Frequency of emission (MHz) | Conducted limit (dBμV) | |
|------------------------------------|--|----------------|
| | Quasi-peak | Average |
| 0.15–0.5 | 66 to 56* | 56 to 46* |
| 0.5–5 | 56 | 46 |
| 5–30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

Procedures:

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 3.5 dB.
4. Environmental Conditions Temperature 22°C
 Relative Humidity 50%
 Atmospheric Pressure 1019mbar
5. Test date: November 28 to November 30, 2012
Tested By : Eaton Wang

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 53 of 87
www.siemic.com.cn

Test Mode:**Transmitting 802.11b Mode**

Peak Detector
Quasi Peak Limit
Average Detector
Average Limit

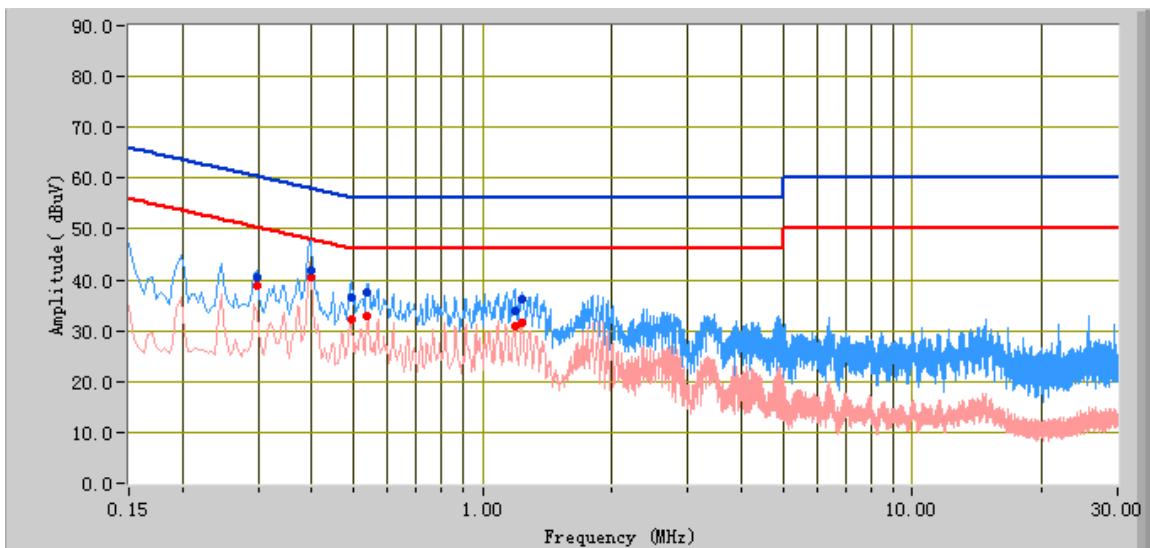**Test Data****Phase Line Plot at 110Vac, 60Hz**

| Frequency (MHz) | Quasi Peak (dB μ V) | Limit (dB μ V) | Margin (dB) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Factors (dB) |
|-----------------|-------------------------|--------------------|-------------|----------------------|--------------------|-------------|--------------|
| 0.40 | 41.97 | 57.90 | -15.92 | 40.61 | 47.90 | -7.29 | 11.24 |
| 0.49 | 36.37 | 56.10 | -19.73 | 32.14 | 46.10 | -13.96 | 11.10 |
| 0.54 | 37.57 | 56.00 | -18.43 | 33.01 | 46.00 | -12.99 | 11.06 |
| 1.19 | 33.76 | 56.00 | -22.24 | 31.02 | 46.00 | -14.98 | 10.72 |
| 0.30 | 40.60 | 60.30 | -19.70 | 38.71 | 50.30 | -11.59 | 11.38 |
| 1.23 | 36.24 | 56.00 | -19.76 | 31.42 | 46.00 | -14.58 | 10.73 |

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 54 of 87
www.siemic.com.cn

Test Mode:**Transmitting 802.11b Mode**

Peak Detector Quasi Peak Limit
Average Detector Average Limit

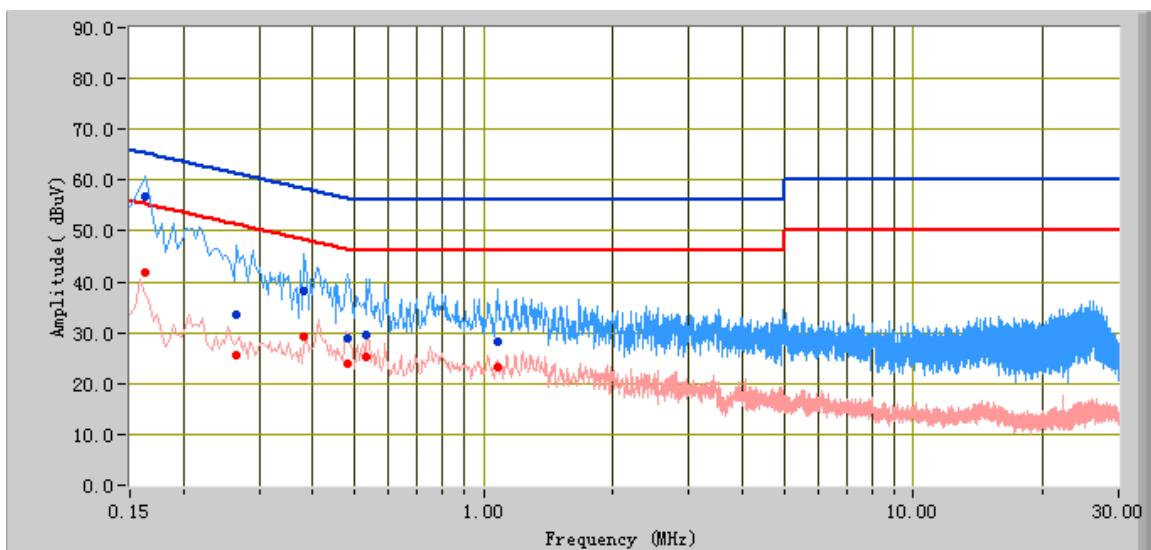

Test Data

Phase Neutral Plot at 110Vac, 60Hz


| Frequency (MHz) | Quasi Peak (dB μ V) | Limit (dB μ V) | Margin (dB) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Factors (dB) |
|-----------------|-------------------------|--------------------|-------------|----------------------|--------------------|-------------|--------------|
| 0.16 | 56.84 | 65.36 | -8.52 | 41.70 | 55.36 | -13.66 | 12.04 |
| 0.38 | 38.07 | 58.24 | -20.16 | 29.17 | 48.24 | -19.06 | 11.25 |
| 0.27 | 33.48 | 61.24 | -27.76 | 25.54 | 51.24 | -25.70 | 11.43 |
| 0.48 | 28.78 | 56.30 | -27.53 | 23.90 | 46.30 | -22.41 | 11.09 |
| 0.53 | 29.59 | 56.00 | -26.41 | 25.27 | 46.00 | -20.73 | 11.03 |
| 1.08 | 28.29 | 56.00 | -27.71 | 23.13 | 46.00 | -22.87 | 10.72 |

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 55 of 87
www.siemic.com.cn

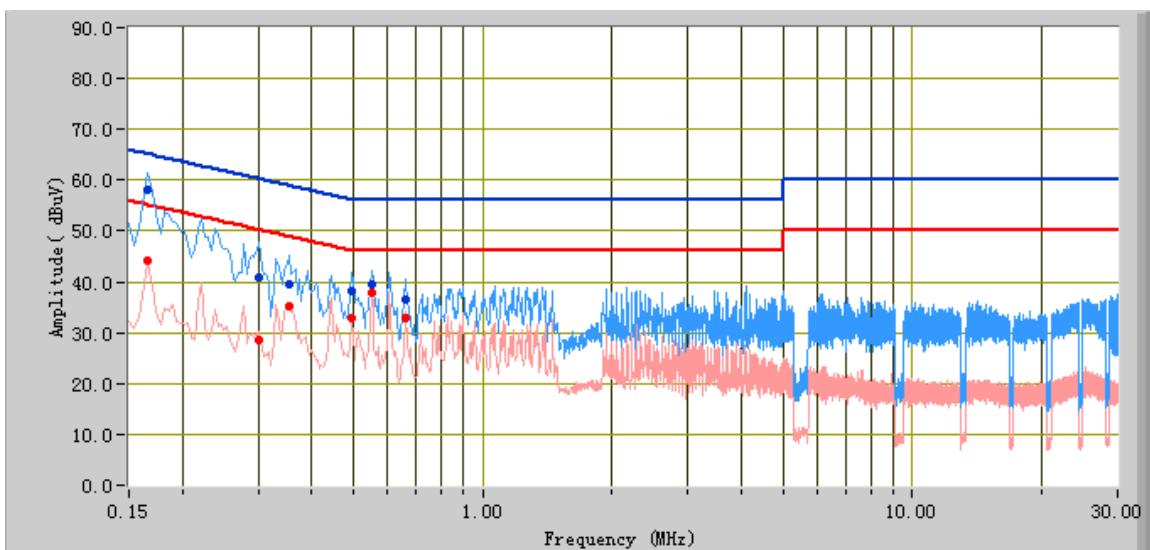Test Mode:**Transmitting 802.11g Mode****Peak Detector** **Quasi Peak Limit****Average Detector** **Average Limit****Test Data****Phase Line Plot at 110Vac, 60Hz**


| Frequency (MHz) | Quasi Peak (dBμV) | Limit (dBμV) | Margin (dB) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Factors (dB) |
|-----------------|-------------------|--------------|-------------|----------------|--------------|-------------|--------------|
| 0.17 | 57.99 | 65.16 | -7.17 | 44.10 | 55.16 | -11.06 | 11.99 |
| 0.30 | 40.89 | 60.19 | -19.30 | 28.57 | 50.19 | -21.62 | 11.38 |
| 0.35 | 39.46 | 58.87 | -19.41 | 35.28 | 48.87 | -13.59 | 11.30 |
| 0.55 | 39.64 | 56.00 | -16.36 | 37.98 | 46.00 | -8.02 | 11.05 |
| 0.49 | 38.08 | 56.10 | -18.02 | 32.80 | 46.10 | -13.30 | 11.10 |
| 0.66 | 36.51 | 56.00 | -19.49 | 33.04 | 46.00 | -12.96 | 10.96 |

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 56 of 87
www.siemic.com.cn

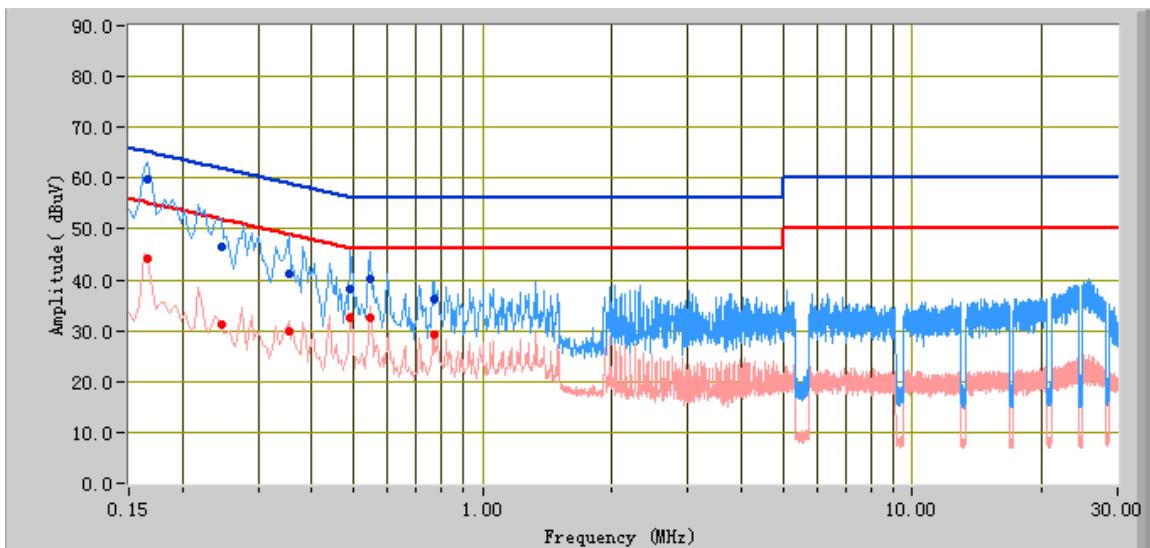Test Mode:**Transmitting 802.11g Mode****Peak Detector****Quasi Peak Limit****Average Detector****Average Limit****Test Data****Phase Neutral Plot at 110Vac, 60Hz**

| Frequency (MHz) | Quasi Peak (dB μ V) | Limit (dB μ V) | Margin (dB) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Factors (dB) |
|-----------------|-------------------------|--------------------|-------------|----------------------|--------------------|-------------|--------------|
| 0.17 | 59.76 | 65.16 | -5.39 | 44.25 | 55.16 | -10.91 | 11.99 |
| 0.25 | 46.58 | 61.89 | -15.32 | 31.26 | 51.89 | -20.63 | 11.46 |
| 0.35 | 41.27 | 58.87 | -17.60 | 30.00 | 48.87 | -18.87 | 11.29 |
| 0.55 | 40.19 | 56.00 | -15.81 | 32.44 | 46.00 | -13.56 | 11.03 |
| 0.49 | 38.10 | 56.17 | -18.06 | 32.51 | 46.17 | -13.66 | 11.07 |
| 0.77 | 36.15 | 56.00 | -19.85 | 29.24 | 46.00 | -16.76 | 10.87 |

**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 57 of 87
www.siemic.com.cn

Test Mode:**Transmitting 802.11n Mode**

Peak Detector
Average Detector

Quasi Peak Limit
Average Limit

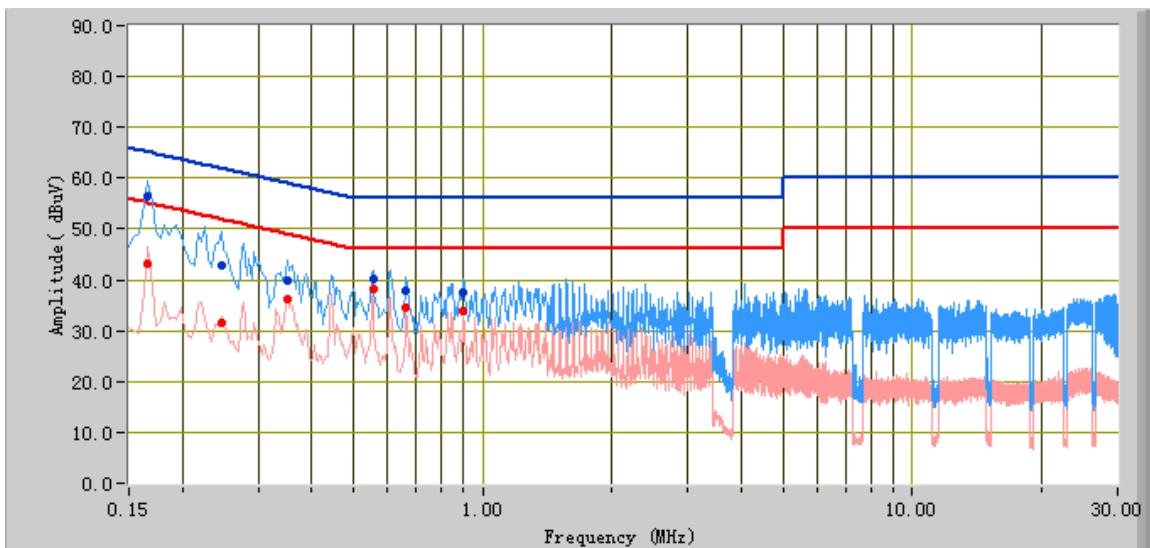**Test Data****Phase Line Plot at 110Vac, 60Hz**


| Frequency (MHz) | Quasi Peak (dB μ V) | Limit (dB μ V) | Margin (dB) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Factors (dB) |
|-----------------|-------------------------|--------------------|-------------|----------------------|--------------------|-------------|--------------|
| 0.17 | 56.54 | 65.16 | -8.61 | 43.08 | 55.16 | -12.08 | 11.99 |
| 0.25 | 42.77 | 61.89 | -19.12 | 31.71 | 51.89 | -20.18 | 11.46 |
| 0.55 | 40.23 | 56.00 | -15.77 | 38.03 | 46.00 | -7.97 | 11.04 |
| 0.35 | 39.90 | 58.96 | -19.06 | 36.31 | 48.96 | -12.65 | 11.31 |
| 0.66 | 37.85 | 56.00 | -18.15 | 34.48 | 46.00 | -11.52 | 10.96 |
| 0.90 | 37.36 | 56.00 | -18.64 | 33.75 | 46.00 | -12.25 | 10.76 |

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 58 of 87
www.siemic.com.cn

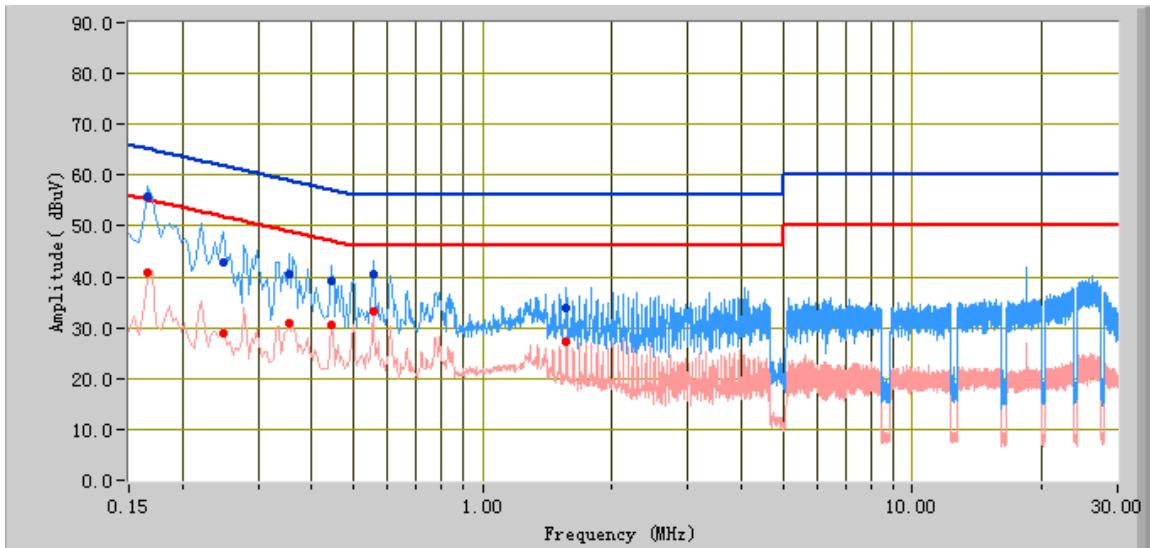Test Mode:**Transmitting 802.11n Mode****Peak Detector****Quasi Peak Limit****Average Detector****Average Limit****Test Data****Phase Neutral Plot at 110Vac, 60Hz**

| Frequency (MHz) | Quasi Peak (dB μ V) | Limit (dB μ V) | Margin (dB) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Factors (dB) |
|-----------------|-------------------------|--------------------|-------------|----------------------|--------------------|-------------|--------------|
| 0.17 | 55.81 | 65.16 | -9.35 | 40.85 | 55.16 | -14.31 | 11.99 |
| 0.55 | 40.68 | 56.00 | -15.32 | 33.26 | 46.00 | -12.74 | 11.02 |
| 0.25 | 42.86 | 61.76 | -18.89 | 29.02 | 51.76 | -22.73 | 11.46 |
| 0.35 | 40.35 | 58.87 | -18.52 | 30.84 | 48.87 | -18.02 | 11.29 |
| 0.44 | 39.10 | 57.02 | -17.92 | 30.68 | 47.02 | -16.34 | 11.15 |
| 1.57 | 33.88 | 56.00 | -22.12 | 27.36 | 46.00 | -18.64 | 10.82 |

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 59 of 87
www.siemic.com.cn

5.8 §15.209, §15.205 & §15.247(d) - Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz & 1GHz above (3m & 10m) is +/-6dB.
4. Environmental Conditions Temperature 22°C
 Relative Humidity 50%
 Atmospheric Pressure 1019mbar
5. Test date : November 30, 2012
Tested By : Eaton Wang

Requirement: §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Procedures:

Radiated Spurious Emissions Measurement

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Established procedures for performing radiated measurements shall be used (see C63.10). All detected emissions must comply with the applicable limits.

Measurement Detectors

§15.35(a) specifies that on frequencies less than and below 1000 MHz, the radiated emissions limits assume the use of a CISPR quasi-peak detector function and related measurement bandwidths. §15.35(b) specifies that on frequencies above 1000 MHz, the radiated emissions limits assume the use of an average detector and a minimum resolution bandwidth of 1 MHz. In addition, §15.35(b) that when average radiated emissions measurements are specified there is also a limit on the peak emissions level which is 20 dB above the applicable maximum permitted average emission limit. These specifications also apply to conducted emissions measurements.

1. CISPR Quasi-Peak Measurement

The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

2. Peak Power Measurement Procedure

Utilize the peak power measurement procedure specified in Section 8.1.1 with the following modifications:

Set analyzer center frequency to the frequency associated with the restricted band emission under examination.

Set RBW = 1 MHz.

Note that if the peak measured value complies with the average limit, it is not necessary to perform a separate average measurement. If this option is exercised, it should be so noted in the test report.

3. Average Power Measurement Procedures

The average restricted band emission levels must be measured with the EUT transmitting continuously ($\geq 98\%$ duty cycle) at its maximum power control level. Optionally, video triggering/signal gating can be used to ensure that measurements are performed only when the EUT is transmitting at its maximum power control level.

The average power measurement procedures described in Section 8.2 shall be used with the following modifications:

Set analyzer center frequency to the frequency associated with the restricted band emission.

Set span to at least 1 MHz.

Use peak marker function to determine the highest amplitude within the RBW (1 MHz).


Test Result: Pass

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 60 of 87
www.siemic.com.cn

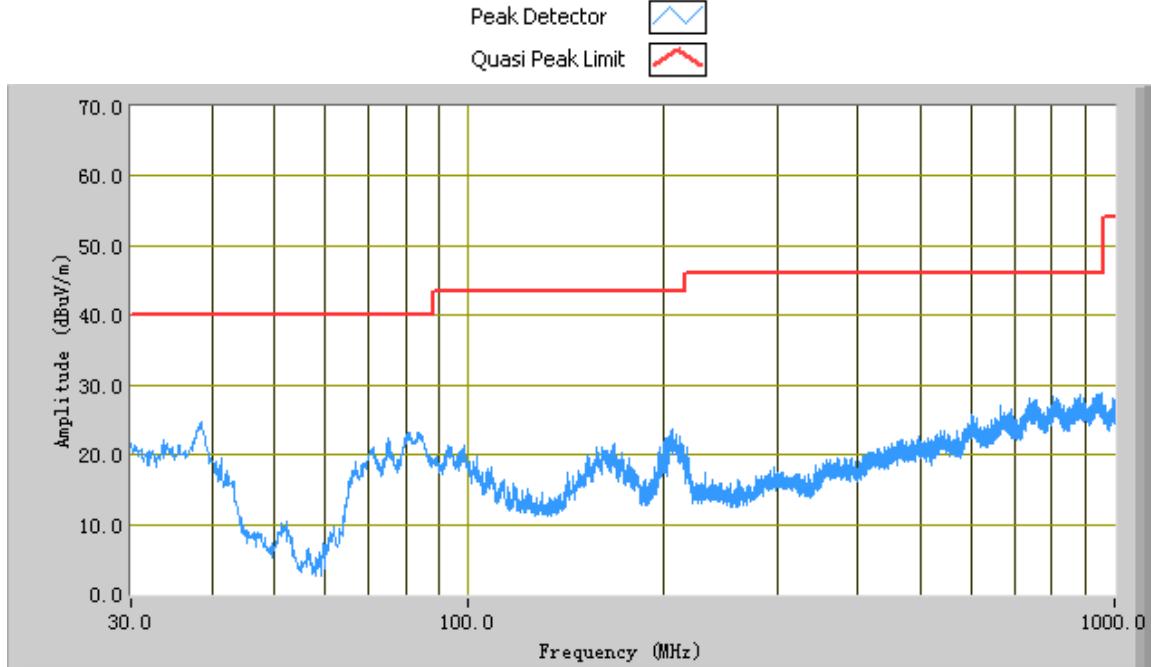Test Mode:**Transmitting 802.11b Mode (Below 1GHz)**

Test Data

Vertical & Horizontal Polarity Plot @3m

| Frequency (MHz) | Quasi Peak (dB μ V/m) | Azimuth | Polarity (H/V) | Height (cm) | Factors (dB) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|---------------------------|---------|----------------|-------------|--------------|----------------------|-------------|
| 38.49 | 24.68 | 7.70 | V | 100.00 | -26.69 | 40.00 | -15.32 |
| 83.96 | 23.27 | 188.20 | V | 100.00 | -36.71 | 40.00 | -16.73 |
| 952.96 | 28.81 | 333.70 | V | 200.00 | -19.75 | 46.00 | -17.19 |
| 936.47 | 28.65 | 61.80 | H | 300.00 | -19.44 | 46.00 | -17.35 |
| 885.05 | 28.57 | 292.20 | H | 200.00 | -20.24 | 46.00 | -17.43 |
| 944.59 | 28.53 | 80.30 | V | 200.00 | -19.45 | 46.00 | -17.47 |


Note: Fast QP measurement performed, more than 20dB below limit so QP test data was not presented.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 61 of 87
www.siemic.com.cn

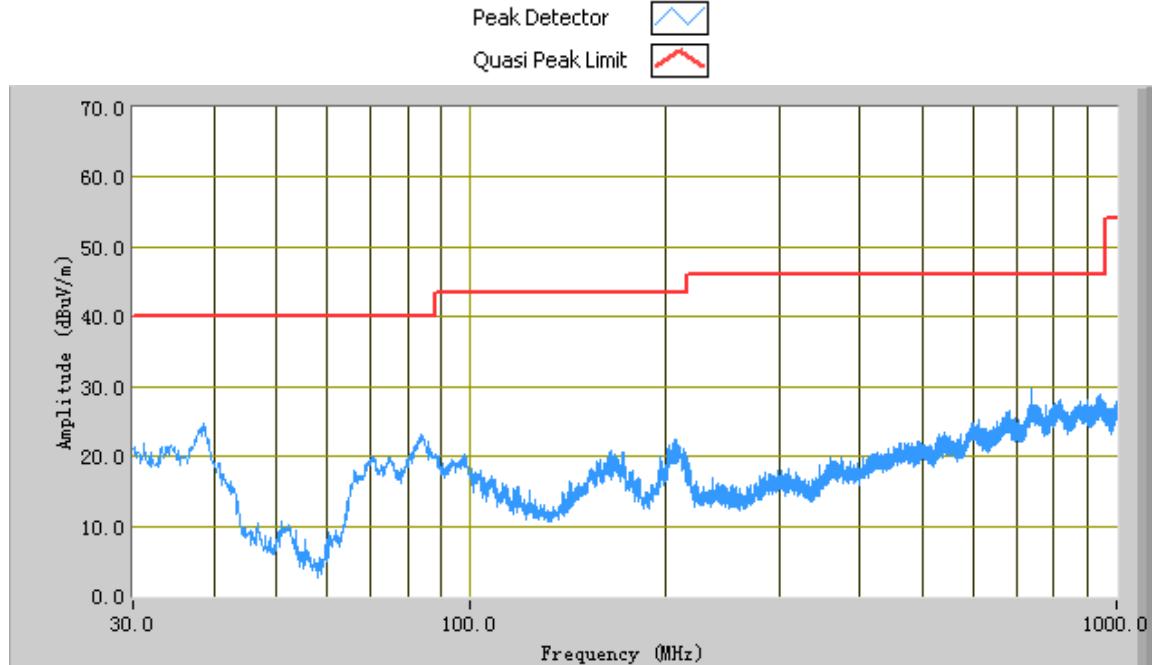Test Mode:**Transmitting 802.11g Mode (Below 1GHz)**

Test Data

Vertical & Horizontal Polarity Plot @3m

| Frequency (MHz) | Quasi Peak (dB μ V/m) | Azimuth | Polarity (H/V) | Height (cm) | Factors (dB) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|---------------------------|---------|----------------|-------------|--------------|----------------------|-------------|
| 38.49 | 24.68 | 7.70 | V | 100.00 | -26.69 | 40.00 | -15.32 |
| 83.96 | 23.27 | 188.20 | V | 100.00 | -36.71 | 40.00 | -16.73 |
| 952.96 | 28.81 | 333.70 | V | 200.00 | -19.75 | 46.00 | -17.19 |
| 936.47 | 28.65 | 61.80 | H | 300.00 | -19.44 | 46.00 | -17.35 |
| 885.05 | 28.57 | 292.20 | H | 200.00 | -20.24 | 46.00 | -17.43 |
| 944.59 | 28.53 | 80.30 | V | 200.00 | -19.45 | 46.00 | -17.47 |


Note: Fast QP measurement performed, more than 20dB below limit so QP test data was not presented.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 62 of 87
www.siemic.com.cn

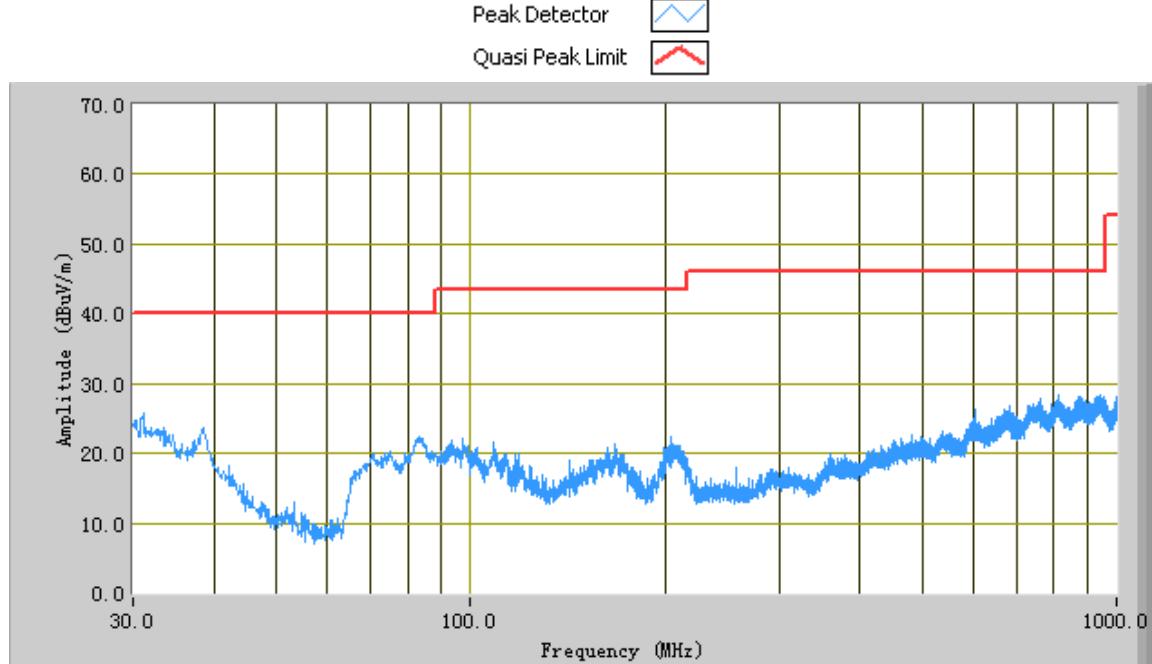Test Mode:**Transmitting 802.11n Mode (Below 1GHz)****Test Data****Vertical & Horizontal Polarity Plot @3m**

| Frequency (MHz) | Quasi Peak (dB μ V/m) | Azimuth | Polarity (H/V) | Height (cm) | Factors (dB) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|---------------------------|---------|----------------|-------------|--------------|----------------------|-------------|
| 31.09 | 25.78 | 195.00 | H | 300.00 | -20.83 | 40.00 | -14.22 |
| 945.20 | 28.33 | 58.10 | V | 200.00 | -19.47 | 46.00 | -17.67 |
| 83.23 | 22.30 | 195.20 | V | 200.00 | -36.80 | 40.00 | -17.70 |
| 815.58 | 28.24 | 339.80 | V | 100.00 | -20.03 | 46.00 | -17.76 |
| 879.24 | 28.08 | 111.50 | V | 100.00 | -20.41 | 46.00 | -17.92 |
| 939.13 | 28.04 | 251.40 | V | 200.00 | -19.32 | 46.00 | -17.96 |

Note: Fast QP measurement performed, more than 20dB below limit so QP test data was not presented.



Above 1 GHz:

Test Mode: Transmitting

Note: Other modes were verified, only the result of worst case basic rate mode was presented.

Mode: 802.11b

Low Channel (2412 MHz)

| Frequency (MHz) | Substituted level (dB μ V/m) | Detector (PK/AV) | Direction (degree) | Height (m) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre- Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------|--|---------------------|-----------------------|---------------|-------------------|--------------------------|-----------------------|------------------------------|---------------------------------|-------------------------|----------------|
| 4824 | 56.53 | AV | 175 | 1.1 | V | 32.7 | 8.3 | 55 | 42.53 | 54 | -11.47 |
| 4824 | 57.66 | AV | 287 | 1.2 | H | 32.7 | 8.3 | 55 | 43.66 | 54 | -10.34 |
| 4824 | 77.38 | PK | 175 | 1.1 | V | 32.7 | 8.3 | 55 | 63.38 | 74 | -10.62 |
| 4824 | 77.77 | PK | 287 | 1.2 | H | 32.7 | 8.3 | 55 | 63.77 | 74 | -10.23 |
| 2389.25 | 54.55 | AV | 110 | 1.1 | V | 27.7 | 3.9 | 55 | 31.15 | 54 | -22.85 |
| 2389.25 | 55.17 | AV | 339 | 1.1 | H | 27.7 | 3.9 | 55 | 31.77 | 54 | -22.23 |
| 2389.25 | 75.59 | PK | 110 | 1.1 | V | 27.7 | 3.9 | 55 | 52.19 | 74 | -21.81 |
| 2389.25 | 76.02 | PK | 339 | 1.1 | H | 27.7 | 3.9 | 55 | 52.62 | 74 | -21.38 |

Middle Channel (2437 MHz)

| Frequency (MHz) | Substituted level (dB μ V/m) | Detector (PK/AV) | Direction (degree) | Height (m) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre- Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------|--|---------------------|-----------------------|---------------|-------------------|--------------------------|-----------------------|------------------------------|---------------------------------|-------------------------|----------------|
| 4874 | 55.81 | AV | 101 | 1.2 | V | 32.8 | 8.9 | 55 | 42.51 | 54 | -11.49 |
| 4874 | 56.71 | AV | 256 | 1.1 | H | 32.8 | 8.9 | 55 | 43.41 | 54 | -10.59 |
| 4874 | 70.25 | PK | 101 | 1.2 | V | 32.8 | 8.9 | 55 | 56.95 | 74 | -17.05 |
| 4874 | 71.63 | PK | 256 | 1.1 | H | 32.8 | 8.9 | 55 | 58.33 | 74 | -15.67 |
| 1077.75 | 56.59 | AV | 121 | 1.3 | V | 25.2 | 1.9 | 55 | 28.69 | 54 | -25.31 |
| 1077.75 | 57.34 | AV | 274 | 1.2 | H | 25.2 | 1.9 | 55 | 29.44 | 54 | -24.56 |
| 1077.75 | 79.18 | PK | 121 | 1.3 | V | 25.2 | 1.9 | 55 | 51.28 | 74 | -22.72 |
| 1077.75 | 78.92 | PK | 274 | 1.2 | H | 25.2 | 1.9 | 55 | 51.02 | 74 | -22.98 |

High Channel (2462 MHz)

| Frequency (MHz) | Substituted level (dB μ V/m) | Detector (PK/AV) | Direction (degree) | Height (m) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre- Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------|--|---------------------|-----------------------|---------------|-------------------|--------------------------|-----------------------|------------------------------|---------------------------------|-------------------------|----------------|
| 4924 | 56.62 | AV | 158 | 1.2 | V | 32.9 | 10.02 | 55 | 44.54 | 54 | -9.46 |
| 4924 | 56.03 | AV | 221 | 1.1 | H | 32.9 | 10.02 | 55 | 43.95 | 54 | -10.05 |
| 4924 | 71.47 | PK | 158 | 1.2 | V | 32.9 | 10.02 | 55 | 59.39 | 74 | -14.61 |
| 4924 | 69.71 | PK | 221 | 1.1 | H | 32.9 | 10.02 | 55 | 57.63 | 74 | -16.37 |
| 2493.75 | 52.66 | AV | 139 | 1.1 | V | 28.8 | 4.2 | 55 | 30.66 | 54 | -23.34 |
| 2493.75 | 51.91 | AV | 229 | 1.3 | H | 28.8 | 4.2 | 55 | 29.91 | 54 | -24.09 |
| 2493.75 | 80.43 | PK | 139 | 1.1 | V | 28.8 | 4.2 | 55 | 58.43 | 74 | -15.57 |
| 2493.75 | 79.3 | PK | 229 | 1.3 | H | 28.8 | 4.2 | 55 | 57.3 | 74 | -16.7 |



Mode: 802.11g

Low Channel (2412 MHz)

| Frequency (MHz) | Substituted level (dB μ V/m) | Detector (PK/AV) | Direction (degree) | Height (m) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------------------------|------------------|--------------------|------------|----------------|--------------------|-----------------|--------------------|---------------------------|----------------------|-------------|
| 4824 | 53.32 | AV | 133 | 1.1 | V | 32.7 | 8.3 | 55 | 39.32 | 54 | -14.68 |
| 4824 | 51.64 | AV | 320 | 1.1 | H | 32.7 | 8.3 | 55 | 37.64 | 54 | -16.36 |
| 4824 | 70.22 | PK | 133 | 1.1 | V | 32.7 | 8.3 | 55 | 56.22 | 74 | -17.78 |
| 4824 | 68.71 | PK | 320 | 1.1 | H | 32.7 | 8.3 | 55 | 54.71 | 74 | -19.29 |
| 2387 | 53.46 | AV | 120 | 1.2 | V | 24.9 | 2 | 55 | 25.36 | 54 | -28.64 |
| 2387 | 52.75 | AV | 175 | 1.1 | H | 24.9 | 2 | 55 | 24.65 | 54 | -29.35 |
| 2387 | 71.63 | PK | 120 | 1.2 | V | 24.9 | 2 | 55 | 43.53 | 74 | -30.47 |
| 2387 | 72.99 | PK | 175 | 1.1 | H | 24.9 | 2 | 55 | 44.89 | 74 | -29.11 |

Middle Channel (2437 MHz)

| Frequency (MHz) | Substituted level (dB μ V/m) | Detector (PK/AV) | Direction (degree) | Height (m) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------------------------|------------------|--------------------|------------|----------------|--------------------|-----------------|--------------------|---------------------------|----------------------|-------------|
| 4874 | 56.06 | AV | 189 | 1.6 | V | 32.8 | 8.9 | 55 | 42.76 | 54 | -11.24 |
| 4874 | 55.13 | AV | 156 | 1.1 | H | 32.8 | 8.9 | 55 | 41.83 | 54 | -12.17 |
| 4874 | 71.15 | PK | 189 | 1.6 | V | 32.8 | 8.9 | 55 | 57.85 | 74 | -16.15 |
| 4874 | 76.01 | PK | 156 | 1.1 | H | 32.8 | 8.9 | 55 | 62.71 | 74 | -11.29 |
| 1104 | 58.39 | AV | 242 | 1.1 | V | 25.3 | 2.1 | 55 | 30.79 | 54 | -23.21 |
| 1104 | 58.13 | AV | 134 | 1.5 | H | 25.3 | 2.1 | 55 | 30.53 | 54 | -23.47 |
| 1104 | 74.47 | PK | 242 | 1.1 | V | 25.3 | 2.1 | 55 | 46.87 | 74 | -27.13 |
| 1104 | 75.34 | PK | 134 | 1.5 | H | 25.3 | 2.1 | 55 | 47.74 | 74 | -26.26 |

High Channel (2462 MHz)

| Frequency (MHz) | Substituted level (dB μ V/m) | Detector (PK/AV) | Direction (degree) | Height (m) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------------------------|------------------|--------------------|------------|----------------|--------------------|-----------------|--------------------|---------------------------|----------------------|-------------|
| 4924 | 55.22 | AV | 253 | 1.1 | V | 32.9 | 10.02 | 55 | 43.14 | 54 | -10.86 |
| 4924 | 54.83 | AV | 135 | 1.3 | H | 32.9 | 10.02 | 55 | 42.75 | 54 | -11.25 |
| 4924 | 69.44 | PK | 253 | 1.1 | V | 32.9 | 10.02 | 55 | 57.36 | 74 | -16.64 |
| 4924 | 68.14 | PK | 135 | 1.3 | H | 32.9 | 10.02 | 55 | 56.06 | 74 | -17.94 |
| 2489.23 | 70.06 | AV | 168 | 1.2 | V | 25.6 | 2.3 | 55 | 42.96 | 54 | -11.04 |
| 2489.23 | 71.21 | AV | 287 | 1.2 | H | 25.6 | 2.3 | 55 | 44.11 | 54 | -9.89 |
| 2489.23 | 74.55 | PK | 168 | 1.2 | V | 25.6 | 2.3 | 55 | 47.45 | 74 | -26.55 |
| 2489.23 | 75.32 | PK | 287 | 1.2 | H | 25.6 | 2.3 | 55 | 48.22 | 74 | -25.78 |



Mode: 802.11n

Low Channel (2412 MHz)

| Frequency (MHz) | Substituted level (dB μ V/m) | Detector (PK/AV) | Direction (degree) | Height (m) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------------------------|------------------|--------------------|------------|----------------|--------------------|-----------------|--------------------|---------------------------|----------------------|-------------|
| 4824 | 51.25 | AV | 117 | 1 | V | 32.7 | 8.3 | 55 | 37.25 | 54 | -16.75 |
| 4824 | 50.75 | AV | 131 | 1.1 | H | 32.7 | 8.3 | 55 | 36.75 | 54 | -17.25 |
| 4824 | 70.24 | PK | 117 | 1 | V | 32.7 | 8.3 | 55 | 56.24 | 74 | -17.76 |
| 4824 | 68.33 | PK | 131 | 1.1 | H | 32.7 | 8.3 | 55 | 54.33 | 74 | -19.67 |
| 2378 | 53.17 | AV | 120 | 1.2 | V | 24.9 | 1.8 | 55 | 24.87 | 54 | -29.13 |
| 2378 | 52.69 | AV | 105 | 1.1 | H | 24.9 | 1.8 | 55 | 24.39 | 54 | -29.61 |
| 2378 | 71.57 | PK | 120 | 1.2 | V | 24.9 | 1.8 | 55 | 43.27 | 74 | -30.73 |
| 2378 | 72.27 | PK | 105 | 1.1 | H | 24.9 | 1.8 | 55 | 43.97 | 74 | -30.03 |

Middle Channel (2437 MHz)

| Frequency (MHz) | Substituted level (dB μ V/m) | Detector (PK/AV) | Direction (degree) | Height (m) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------------------------|------------------|--------------------|------------|----------------|--------------------|-----------------|--------------------|---------------------------|----------------------|-------------|
| 4874 | 55.47 | AV | 189 | 1.2 | V | 32.8 | 8.9 | 55 | 42.17 | 54 | -11.83 |
| 4874 | 54.28 | AV | 112 | 1.1 | H | 32.8 | 8.9 | 55 | 40.98 | 54 | -13.02 |
| 4874 | 72.1 | PK | 189 | 1.2 | V | 32.8 | 8.9 | 55 | 58.8 | 74 | -15.2 |
| 4874 | 75 | PK | 112 | 1.1 | H | 32.8 | 8.9 | 55 | 61.7 | 74 | -12.3 |
| 1243.5 | 58.79 | AV | 227 | 1.1 | V | 25.3 | 2.2 | 55 | 31.29 | 54 | -22.71 |
| 1243.5 | 58.97 | AV | 155 | 1.3 | H | 25.3 | 2.2 | 55 | 31.47 | 54 | -22.53 |
| 1243.5 | 75.2 | PK | 227 | 1.1 | V | 25.3 | 2.2 | 55 | 47.7 | 74 | -26.3 |
| 1243.5 | 76.09 | PK | 155 | 1.3 | H | 25.3 | 2.2 | 55 | 48.59 | 74 | -25.41 |

High Channel (2462 MHz)

| Frequency (MHz) | Substituted level (dB μ V/m) | Detector (PK/AV) | Direction (degree) | Height (m) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------------------------|------------------|--------------------|------------|----------------|--------------------|-----------------|--------------------|---------------------------|----------------------|-------------|
| 4924 | 51.02 | AV | 130 | 1.1 | V | 32.9 | 10.02 | 55 | 38.94 | 54 | -15.06 |
| 4924 | 52.61 | AV | 157 | 1.3 | H | 32.9 | 10.02 | 55 | 40.53 | 54 | -13.47 |
| 4924 | 69.64 | PK | 130 | 1.1 | V | 32.9 | 10.02 | 55 | 57.56 | 74 | -16.44 |
| 4924 | 68.99 | PK | 157 | 1.3 | H | 32.9 | 10.02 | 55 | 56.91 | 74 | -17.09 |
| 2490.58 | 60.06 | AV | 168 | 1.4 | V | 27.5 | 2.3 | 55 | 34.86 | 54 | -19.14 |
| 2490.58 | 61.21 | AV | 287 | 1.4 | H | 27.5 | 2.3 | 55 | 36.01 | 54 | -17.99 |
| 2490.58 | 74.64 | PK | 168 | 1.4 | V | 27.5 | 2.3 | 55 | 49.44 | 74 | -24.56 |
| 2490.58 | 75.94 | PK | 287 | 1.4 | H | 27.5 | 2.3 | 55 | 50.74 | 74 | -23.26 |

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 66 of 87
www.siemic.com.cn

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

| Instrument | Model | Serial # | Calibration Date | Calibration Due Date |
|---|------------------------|-----------------|------------------|----------------------|
| AC Line Conducted Emissions | | | | |
| R&S EMI Test Receiver | ESPI3 | 101216 | 10/27/2012 | 10/26/2013 |
| V-LISN | ESH3-Z5 | 838979/005 | 10/27/2012 | 10/26/2013 |
| Com-Power Transient Limiter | LIT-153 | 531021 | 11/03/2012 | 11/02/2013 |
| Universal Radio Communication Tester | CMU200 | 104031 | 10/27/2012 | 10/26/2013 |
| A- INFOMW Antenna (1 ~18GHz) | JXTXLB-10180 | J2031081120 092 | 06/25/2012 | 06/24/2013 |
| SIEMIC Labview Conducted Emissions software | V1.0 | N/A | N/A | N/A |
| Radiated Emissions | | | | |
| Hp Spectrum Analyzer | 8563E | 3821A09023 | 01/10/2012 | 01/09/2013 |
| R&S EMI Receiver | ESPI3 | 101216 | 10/27/2012 | 10/26/2013 |
| Antenna (30MHz~6GHz) | JB6 | A121411 | 12/28/2011 | 12/27/2012 |
| EMCO Horn Antenna (1 ~18GHz) | 3115 | N/A | 10/29/2012 | 10/28/2013 |
| A- INFOMW Antenna (1 ~18GHz) | JXTXLB-10180 | J2031081120 092 | 06/25/2012 | 06/24/2013 |
| Horn Antenna (18~40GHz) | AH-840 | 101013 | 04/22/2012 | 04/22/2013 |
| Microwave Pre-Amp (18~40GHz) | PA-840 | 181250 | 05/30/2012 | 05/29/2013 |
| Hp Agilent Pre-Amplifier | 8447F | 1937A01160 | 11/03/2012 | 11/02/2013 |
| MITEQ Pre-Amplifier (0.1 ~ 18GHz) | AMF-7D-00101800-30-10P | 1451709 | 11/03/2012 | 11/02/2013 |
| Universal Radio Communication Tester | CMU200 | 104031 | 10/27/2012 | 10/26/2013 |
| Chamber | 3m | N/A | 04/13/2012 | 04/12/2013 |
| SIEMIC Labview Radiated Emissions software | V1.0 | N/A | N/A | N/A |

**SIEMIC, INC.**


Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 67 of 87
www.siemic.com.cn

Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

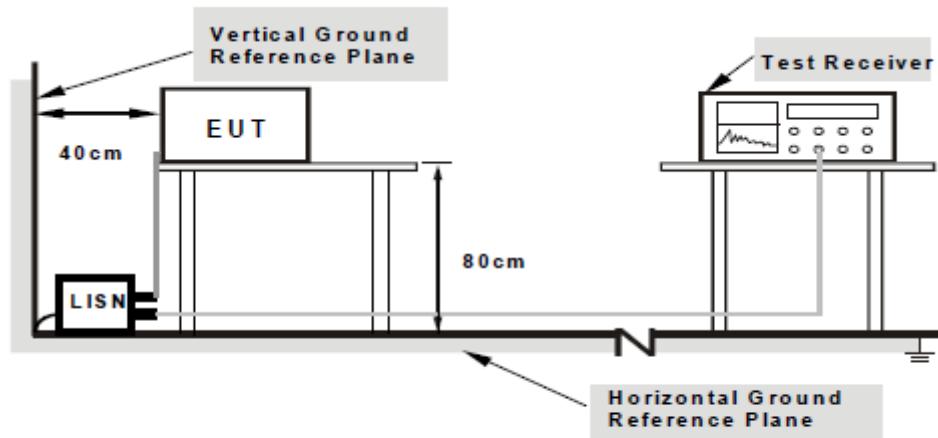

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration1.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Description of Conducted Emission Program

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the common scan range from 150 kHz to 30 MHz; the program will first start a peak and average scan on selectable measurement time and step size. After the program complete the pre-scan, this program will perform the Quasi Peak and Average measurement, based on the pre-scan peak data reduction result.



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 68 of 87
www.siemic.com.cn

Sample Calculation Example

At 20 MHz

$$\text{limit} = 250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver = 40.00 dB μ V
(Calibrated for system losses)

Therefore, Q-P margin = $47.96 - 40.00 = 7.96$ i.e. **7.96 dB below limit**

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 69 of 87
www.siemic.com.cn

Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer / receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

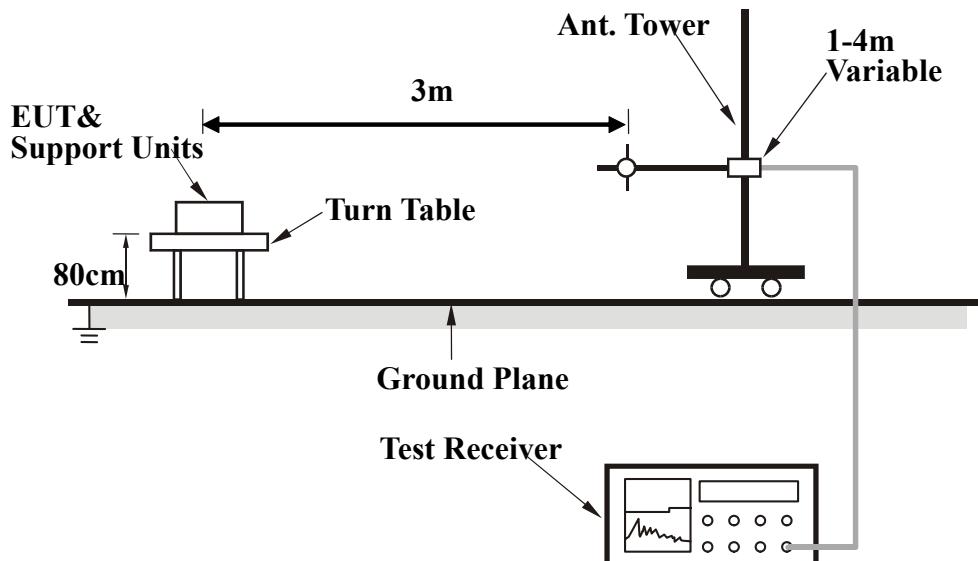

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 70 of 87
www.siemic.com.cn

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured was complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000 | Peak | 100 kHz | 100 kHz |
| Above 1000 | Peak | 1 MHz | 1 MHz |
| | Average | 1 MHz | 10 Hz |

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor} \text{ or}$$
$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 71 of 87
www.siemic.com.cn

Annex B. EUT AND TEST SETUP PHOTOGRAPHS

Annex B.i. Photograph 1: EUT External Photo



Whole Package - Top View



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 72 of 87
www.siemic.com.cn



EUT - Front View



EUT - Rear View




SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 73 of 87
www.siemic.com.cn

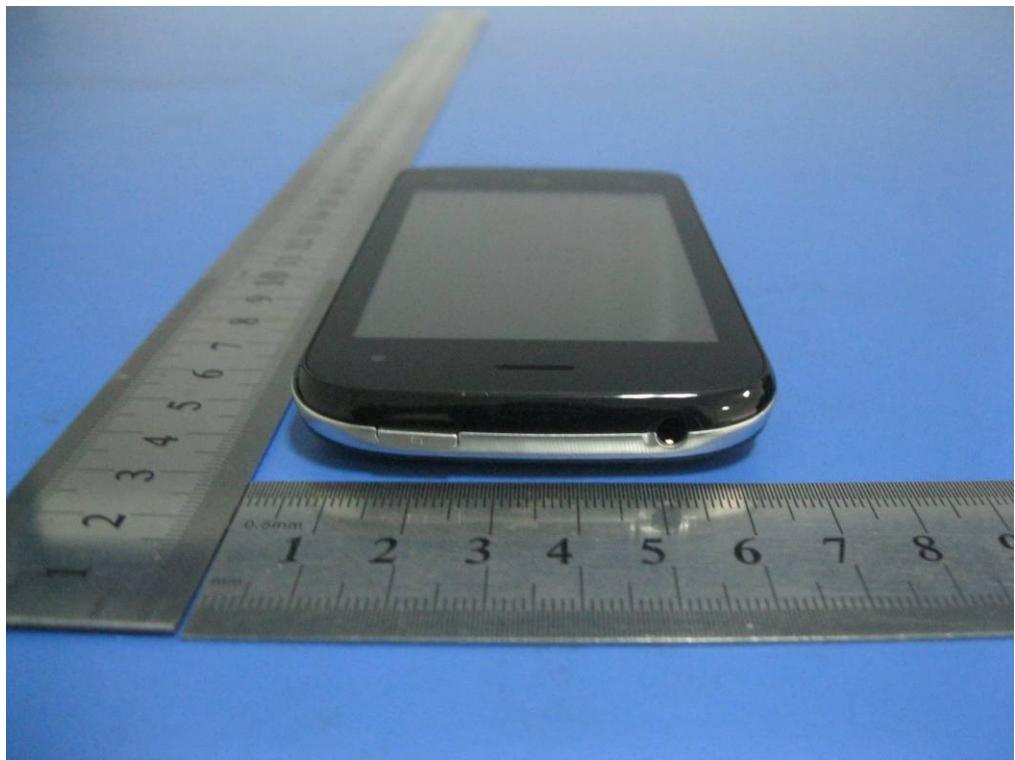

EUT - Top View



EUT - Bottom View



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 74 of 87
www.siemic.com.cn



EUT - Left View



EUT - Right View



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 75 of 87
www.siemic.com.cn

Annex B.ii. Photograph 2: EUT Internal Photo



Cover Off - Top View



Cover Off - Bottom View



Battery - Top View



Battery - Bottom View




SIEMIC, INC.


Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 77 of 87
www.siemic.com.cn

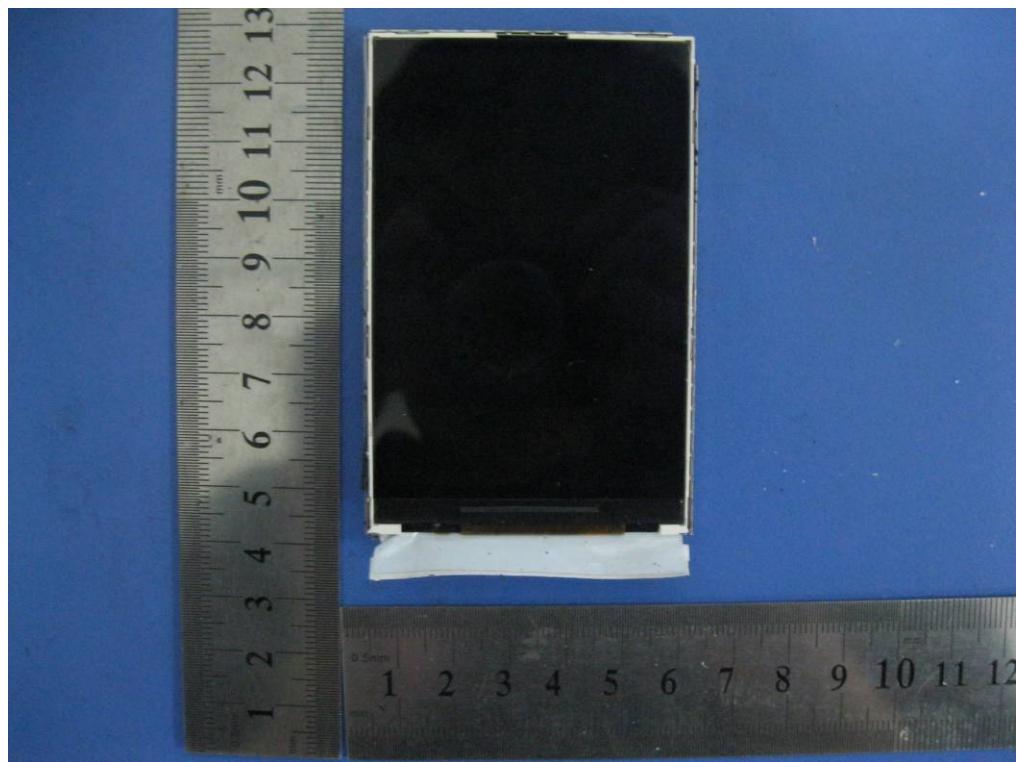

LCD - Top View

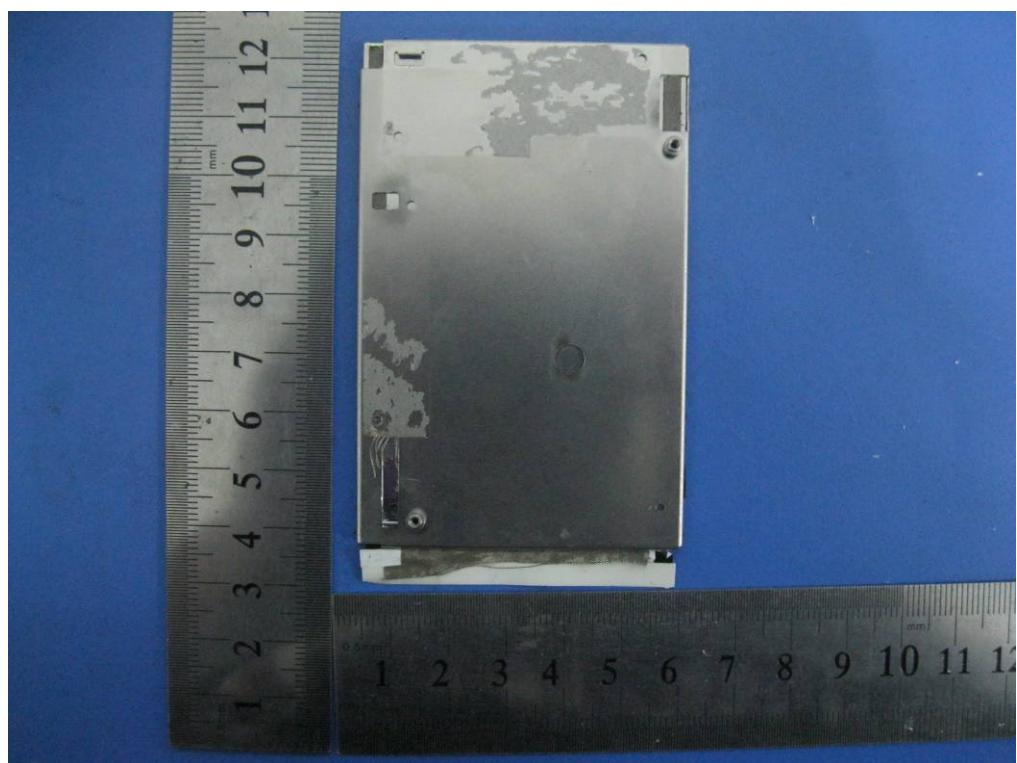

LCD - Bottom View



SIEMIC, INC.


Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009


Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 78 of 87
www.siemic.com.cn



Uncover - Top View

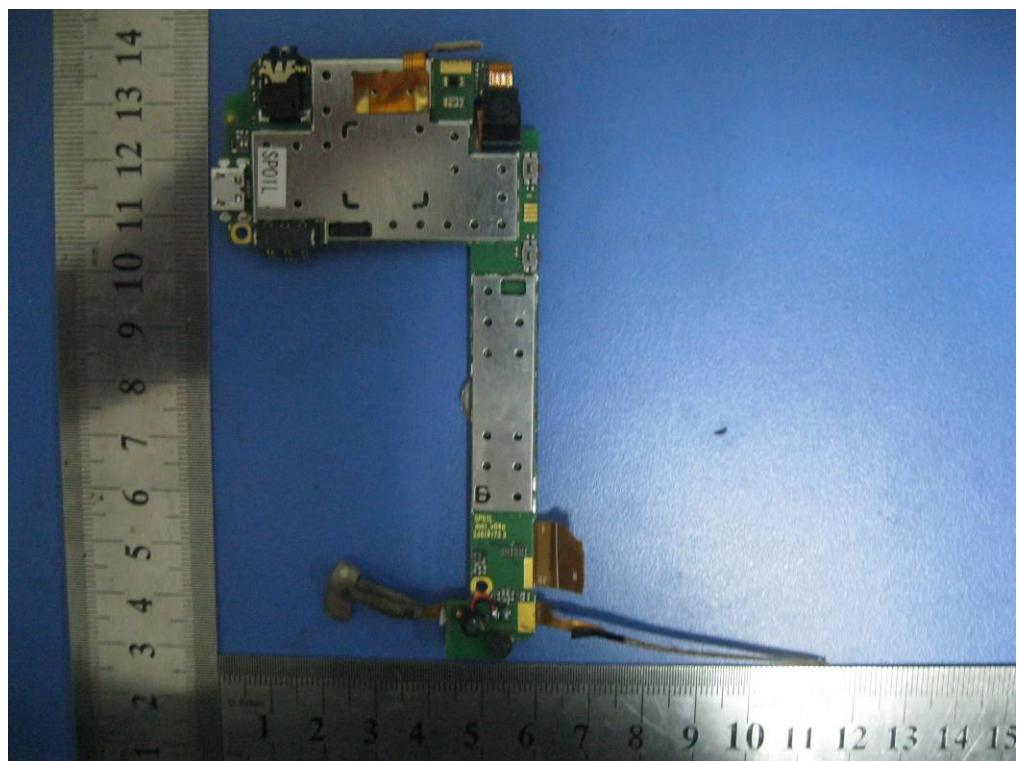

Uncover without LCD - Top View

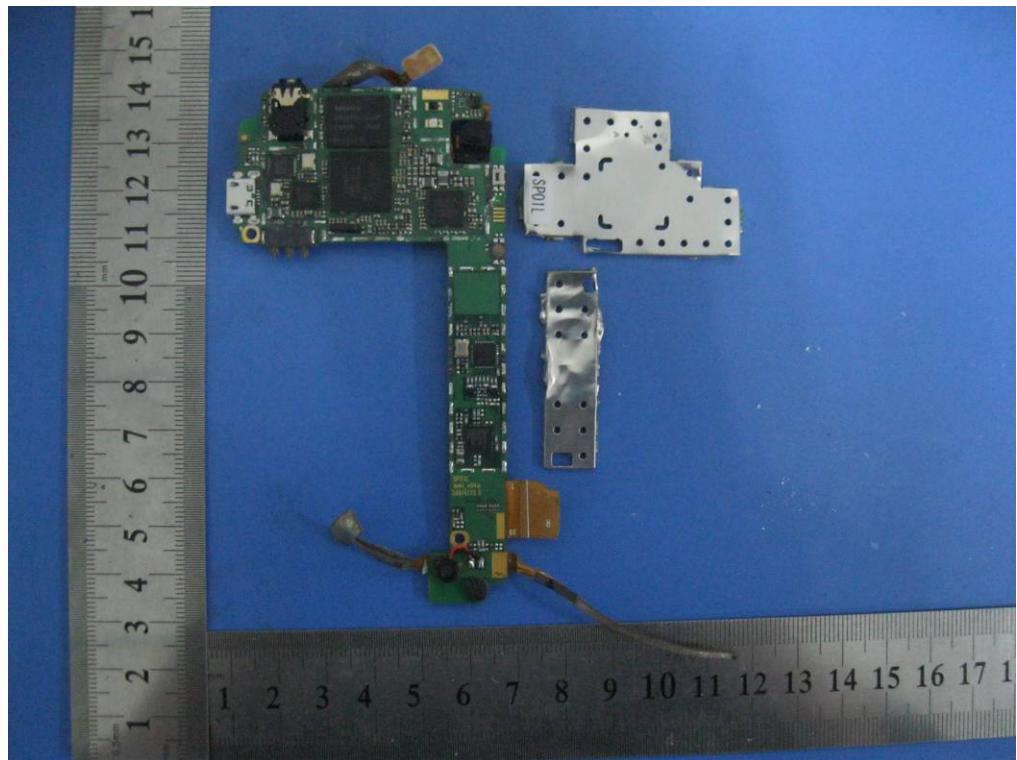

Uncover Without Shielding - Top View



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 80 of 87
www.siemic.com.cn

Annex B.iii. Photograph 3: Test Setup Photo



Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View




SIEMIC, INC.


Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 81 of 87
www.siemic.com.cn

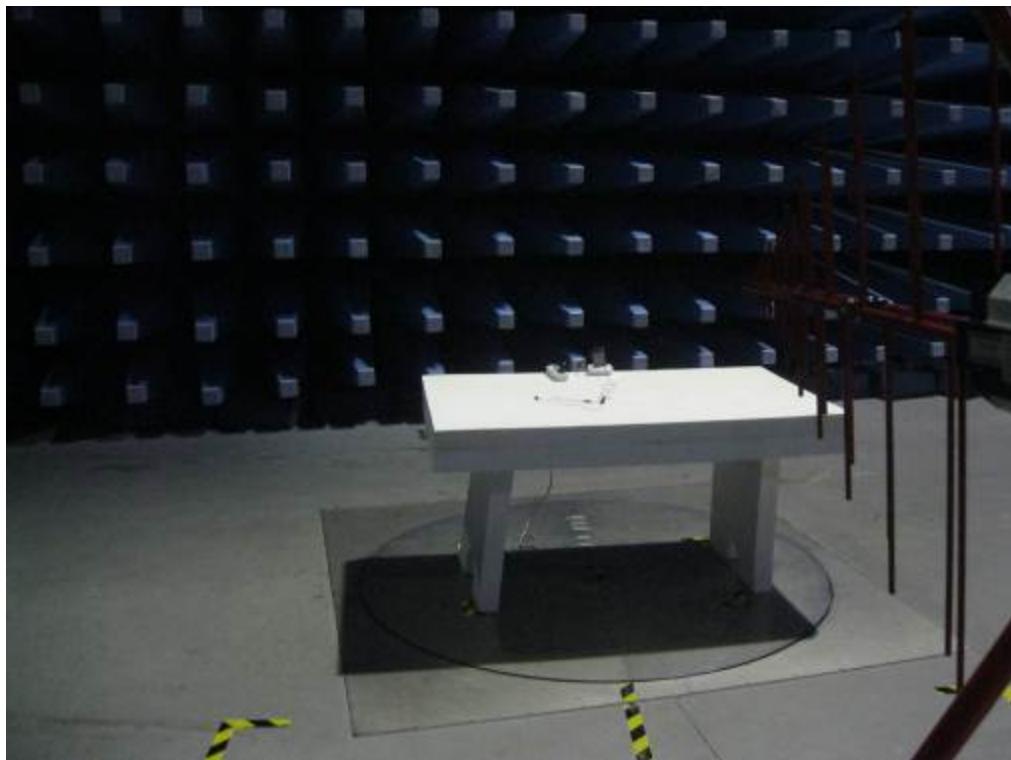

Radiated Spurious Emissions Test Setup Below 1GHz - Front View

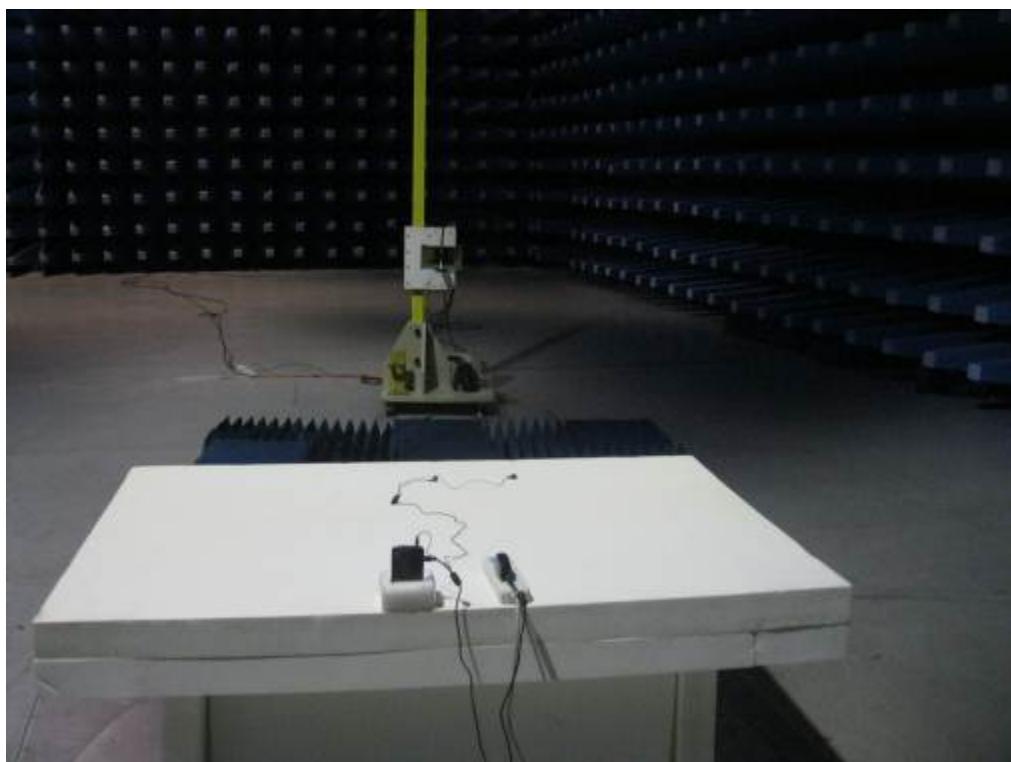

Radiated Spurious Emissions Test Setup Above 1GHz –Front View

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 82 of 87
www.siemic.com.cn

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

EUT TEST CONDITIONS

Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

| Equipment Description (Including Brand Name) | Model & Serial Number | Cable Description (List Length, Type & Purpose) |
|---|-----------------------|--|
| N/A | N/A | N/A |




SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 83 of 87
www.siemic.com.cn

Block Configuration Diagram for Conducted Emissions

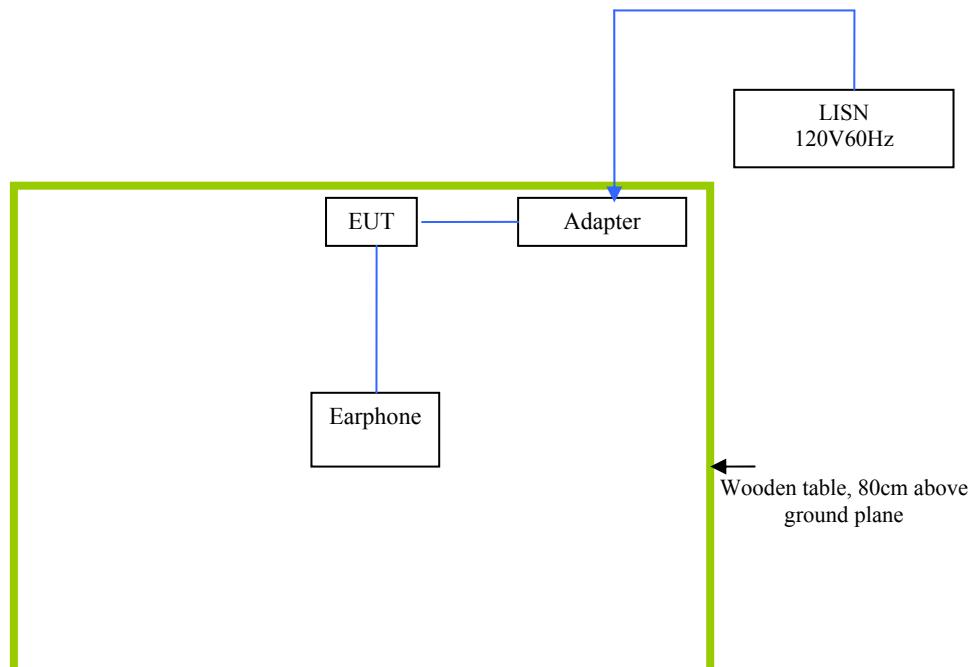




SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 84 of 87
www.siemic.com.cn

Block Configuration Diagram for Radiated Emissions

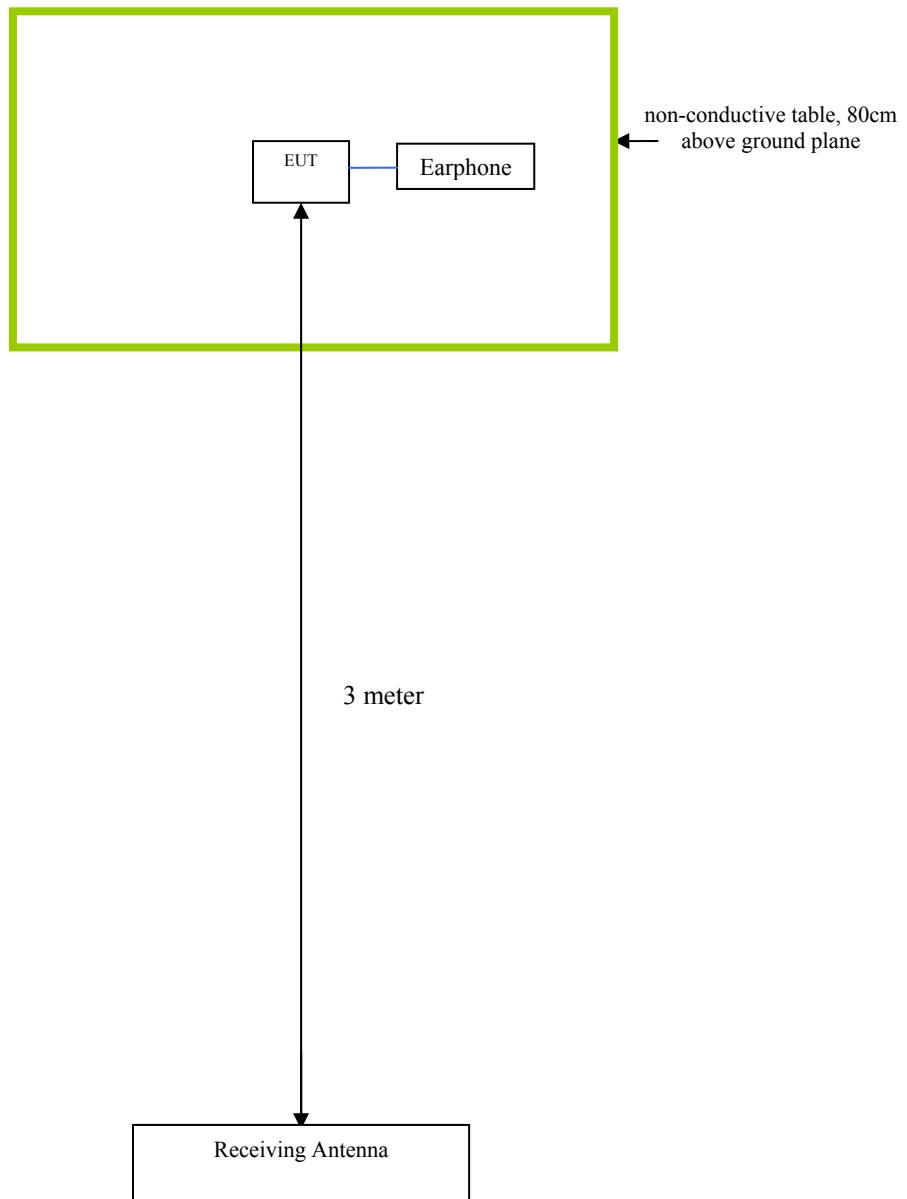

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 85 of 87
www.siemic.com.cn

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

| Test | Description Of Operation |
|-------------------|--|
| Emissions Testing | The EUT was continuously transmitting to stimulate the worst case. |



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 86 of 87
www.siemic.com.cn

Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST

Please see attachment



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Mobile phone
Main Model: L1-Forst
Serial Model: N/A
To: FCC Part 15.247: 2012, ANSI C63.4: 2009

Report No.: 12050085-FCC-R3
Issue Date: December 07, 2012
Page: 87 of 87
www.siemic.com.cn

Annex E. DECLARATION OF SIMILARITY

N/A