



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

Date of Report: November 1, 2002  
Date of Submission: November 25, 2002

Federal Communications Commission  
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Honeywell International Inc.  
Commercial Electronic Systems - Phoenix

Equipment: DM-855

FCC ID: GB8DM855

FCC Rules: 87.187(O), 87.0(Q), 87.475

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.' The signature is fluid and cursive, with a horizontal line underneath the name.

Morton Flom, P. Eng.

enclosure(s)  
cc: Applicant  
MF/cva

LIST OF EXHIBITS  
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Honeywell International Inc.  
Commercial Electronic Systems - Phoenix

FCC ID: GB8DM855

BY APPLICANT:

1. LETTER OF AUTHORIZATION	x
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)	
<input checked="" type="checkbox"/> LABEL	
<input checked="" type="checkbox"/> LOCATION OF LABEL	
<input checked="" type="checkbox"/> COMPLIANCE STATEMENT	
<input checked="" type="checkbox"/> LOCATION OF COMPLIANCE STATEMENT	
3. PHOTOGRAPHS, 2.1033(c)(12)	x
4. DOCUMENTATION: 2.1033(c)	
(3) USER MANUAL	x
(9) TUNE UP INFO	x
(10) SCHEMATIC DIAGRAM	x
(10) CIRCUIT DESCRIPTION	x
BLOCK DIAGRAM	x
PARTS LIST	x

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

T R A N S M I T T E R      C E R T I F I C A T I O N

of

FCC ID: GB8DM855  
MODEL: DM-855

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 87.187(O), 87.0(Q), 87.475

DATE OF REPORT: November 1, 2002  
DATE OF SUBMISSION: November 25, 2002

ON THE BEHALF OF THE APPLICANT:

Honeywell International Inc.  
Commercial Electronic Systems - Phoenix

AT THE REQUEST OF:

P.O. Part of X305730L-06B

Honeywell Inc.  
Business, Regional & General Aviation  
5353 W. Bell Road, MS 2DD80  
Glendale, AZ 85308

Attention of:

Robert H. Fuller, Technical Mgr, EPIC Eng'g  
602 436 4714; FAX: -4040 M/S 2DD80  
bob.fuller@honeywell.com

SUPERVISED BY:



Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1046(a)	ERP Carrier Power (Radiated)	9
2.1051	Unwanted Emissions (Transmitter Conducted)	10
2.1053(a)	Field Strength of Spurious Radiation	13
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	17
2.1055(a)(1)	Frequency Stability (Temperature Variation)	22
2.1055(b)(1)	Frequency Stability (Voltage Variation)	25
2.202(g)	Necessary Bandwidth and Emission Bandwidth	26

PAGE NO. 1 of 26.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d02b0002

d) Client: Honeywell Inc.  
Business, Regional & General Aviation  
5353 W. Bell Road, MS 2DD80  
Glendale, AZ 85308

e) Identification: DM-855  
FCC ID: GB8DM855  
EUT Description: UHF Pulsed L Band TRX

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: November 1, 2002  
EUT Received:

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:

  
Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 26.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,  
VOLUME II, PART 2 AND TO

87.187(O), 87.0(Q), 87.475

### Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:

Honeywell International Inc.  
Commercial Electronic Systems - Phoenix  
2111 N. 19<sup>th</sup> Avenue  
Phoenix, AZ 85027

**MANUFACTURER:**

Honeywell Inc.  
Business, Regional & General Aviation  
5353 W. Bell Road, MS 2DD80  
Glendale, AZ 85308

(c)(2): FCC ID: GB8DM855

MODEL NO: DM-855

(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c) (4): TYPE OF EMISSION: 1MOPON

(c)(5): FREQUENCY RANGE, MHz: 1025 to 1150

(c)(6): POWER RATING, Watts: 350 Peak Pulse  
Switchable Variable x N/A


(c)(7): MAXIMUM POWER RATING, Watts: Per FCC Rule Part 87.131

DUT RESULTS: Passes x Fails

PAGE NO.

3 of 26.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

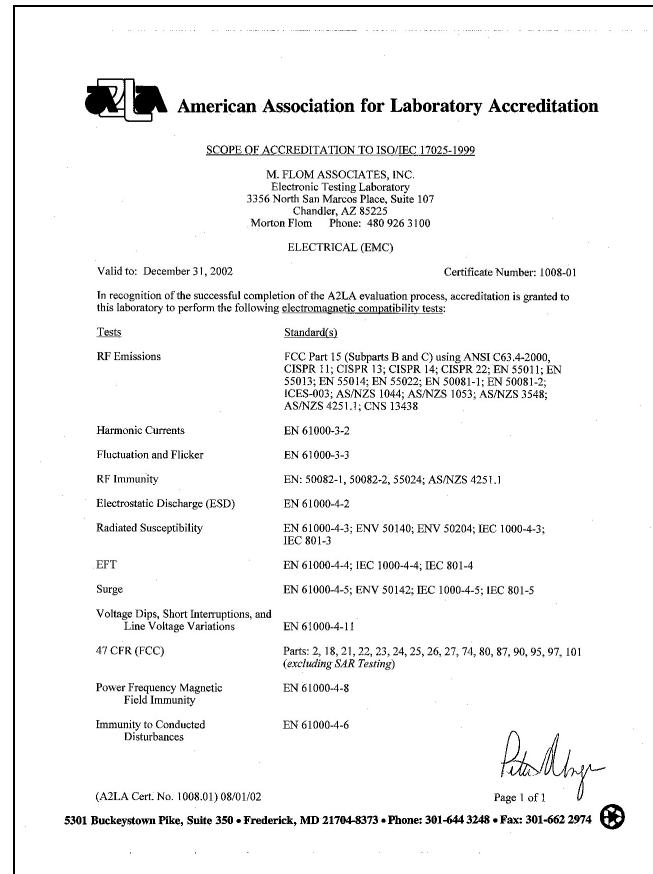

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

PAGE NO.

4 of 26.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,  
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual  
COLLECTOR VOLTAGE, Vdc = per manual  
SUPPLY VOLTAGE, Vdc = 28

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

       ATTACHED EXHIBITS  
      x N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

5 of 26.

Sub-part

2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- \_\_\_\_ 21 - Domestic Public Fixed Radio Services
- \_\_\_\_ 22 - Public Mobile Services
- \_\_\_\_ 22 Subpart H - Cellular Radiotelephone Service
- \_\_\_\_ 22.901(d) - Alternative technologies and auxiliary services
- \_\_\_\_ 23 - International Fixed Public Radiocommunication services
- \_\_\_\_ 24 - Personal Communications Services
- \_\_\_\_ 74 Subpart H - Low Power Auxiliary Stations
- \_\_\_\_ 80 - Stations in the Maritime Services
- \_\_\_\_ 80 Subpart E - General Technical Standards
- \_\_\_\_ 80 Subpart F - Equipment Authorization for Compulsory Ships
- \_\_\_\_ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- \_\_\_\_ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- \_\_\_\_ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- \_\_\_\_ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- \_\_\_\_ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- \_\_\_\_ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- \_\_\_\_ 80 Subpart X - Voluntary Radio Installations
- x 87 - Aviation Services
- \_\_\_\_ 90 - Private Land Mobile Radio Services
- \_\_\_\_ 94 - Private Operational-Fixed Microwave Service
- \_\_\_\_ 95 Subpart A - General Mobile Radio Service (GMRS)
- \_\_\_\_ 95 Subpart C - Radio Control (R/C) Radio Service
- \_\_\_\_ 95 Subpart D - Citizens Band (CB) Radio Service
- \_\_\_\_ 95 Subpart E - Family Radio Service
- \_\_\_\_ 95 Subpart F - Interactive Video and Data Service (IVDS)
- \_\_\_\_ 97 - Amateur Radio Service
- \_\_\_\_ 101 - Fixed Microwave Services

PAGE NO.

6 of 26.

STANDARD TEST CONDITIONS  
and  
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 26.

NAME OF TEST: Carrier Output Power (Conducted)

SPECIFICATION: 47 CFR 2.1046(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is  $\pm 3\%$ .

MEASUREMENT RESULTS  
(Worst case)


FREQUENCY OF CARRIER, MHz = 1041, 1094, 1150

POWER SETTING	R. F. POWER, WATTS
High	350 Peak Pulse

PERFORMED BY:   
Doug Noble, B.A.S. E.E.T.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT  
 TEST 2: FREQUENCY STABILITY

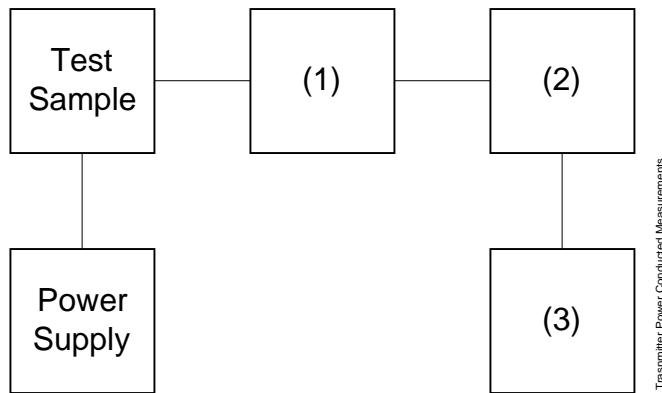

Asset Description (as applicable)	s/n
(1) COAXIAL ATTENUATOR	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(2) POWER METERS	
i00014 HP 435A	1733A05836
i00039 HP 436A	2709A26776
i00020 HP 8901A POWER MODE	2105A01087
(3) FREQUENCY COUNTER	
i00042 HP 5383A	1628A00959
i00019 HP 5334B	2704A00347
i00020 HP 8901A FREQUENCY MODE	2105A01087

PAGE NO.

9 of 26.

NAME OF TEST:

ERP Carrier Power (Radiated)


SPECIFICATION:

TIA/EIA 603A (Substitution Method)

2.2.17.1 Definition: The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

2.2.17.2 Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

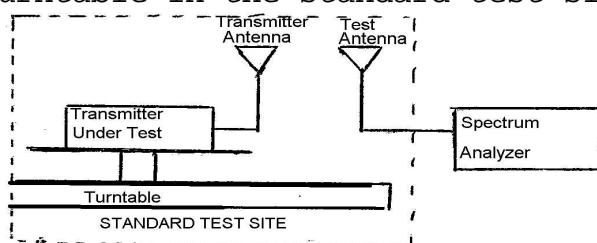

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} \Sigma 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

	RESULTS					
	1041 MHz		1095 MHz		1150 MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	54.6	-1.0	52.4	+0.1	57.5	+0.5
45°	55.1	-1.0	55.2	+0.1	55.8	+0.5
90°	60.4	-1.0	60.6	+0.1	56.0	+0.5
135°	50.4	-1.0	53.5	+0.1	53.6	+0.5
180°	51.0	-1.0	52.9	+0.1	51.5	+0.5
225°	59.3	-1.0	55.6	+0.1	55.1	+0.5
270°	52.5	-1.0	60.9	+0.1	60.8	+0.5
315°	52.9	-1.0	48.0	+0.1	47.7	+0.5

	1041 MHz	1095 MHz	1150 MHz
Av. Radiated Power:	55.525 dbm	54.79 dbm	54.21 dbm
NOTE: Above Readings = EIRP dbm			

PAGE NO. 10 of 26.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 1041, 1094, 1150

SPECTRUM SEARCHED, GHz = 0 to  $10 \times F_c$

MAXIMUM RESPONSE, Hz = N/A

ALL OTHER EMISSIONS =  $\geq 20$  dB BELOW LIMIT

PERFORMED BY:


  
Doug Noble, B.A.S. E.E.T.

PAGE NO.

11 of 26.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
 TEST B. OUT-OF-BAND SPURIOUS

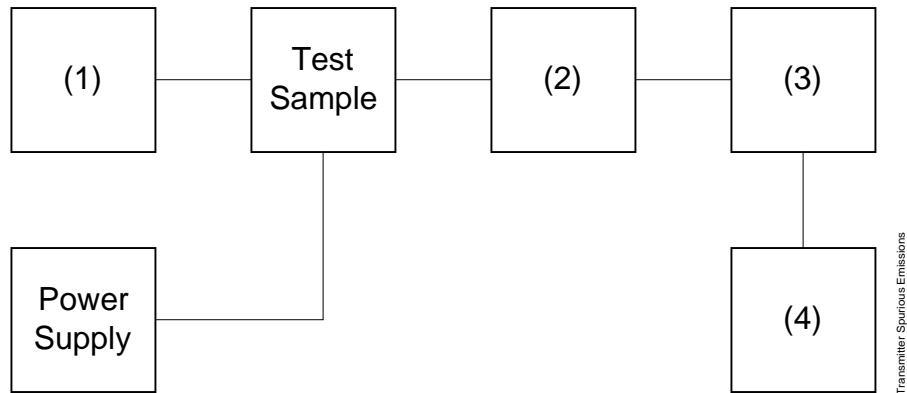

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO.

12 of 26.

NAME OF TEST:

Unwanted Emissions (Transmitter Conducted)

LIMIT(S), dBc

-(43+10xLOG P) = -68.4 (350 Watts)

STATE: 2:High Power g02a0055: 2002-Oct-29 Tue 15:17:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1041.000000	2082.087600	-22.8	-79.2	-9.8
1094.000000	2188.064100	-23.5	-79.9	-10.5
1150.000000	2299.948900	-23.6	-80	-10.6
1041.000000	3122.995500	-25.8	-82.2	-12.8
1094.000000	3281.876800	-23.7	-80.1	-10.7
1150.000000	3449.894800	-25.8	-82.2	-12.8
1041.000000	4163.921400	-25	-81.4	-12
1094.000000	4375.812700	-25.4	-81.8	-12.4
1150.000000	4599.799200	-25.9	-82.3	-12.9
1041.000000	5204.755600	-25.9	-82.3	-12.9
1094.000000	5469.788200	-25.5	-81.9	-12.5
1150.000000	5749.778600	-26	-82.4	-13
1041.000000	6245.966100	-19.1	-75.5	-6.1
1094.000000	6563.828900	-19.4	-75.8	-6.4
1150.000000	6899.990000	-19.9	-76.3	-6.9
1041.000000	7287.171100	-19	-75.4	-6
1094.000000	7657.833400	-19.7	-76.1	-6.7
1150.000000	8049.809500	-20.4	-76.8	-7.4
1041.000000	8327.805000	-19.6	-76	-6.6
1094.000000	8751.870800	-20.5	-76.9	-7.5
1150.000000	9199.832900	-19.4	-75.8	-6.4
1041.000000	9368.904700	-20.1	-76.5	-7.1
1094.000000	9846.248400	-20.4	-76.8	-7.4
1150.000000	10350.232900	-20.3	-76.7	-7.3
1041.000000	10410.114700	-18.7	-75.1	-5.7
1094.000000	10939.964600	-19.2	-75.6	-6.2
1041.000000	11450.836900	-20.3	-76.7	-7.3
1150.000000	11499.787000	-19.5	-75.9	-6.5
1094.000000	12033.874300	-20.1	-76.5	-7.1
1041.000000	12491.866300	-15.5	-71.9	-2.5
1150.000000	12649.834400	-14.6	-71	-1.6
1094.000000	13128.041100	-14.7	-71.1	-1.7
1041.000000	13532.851300	-15.3	-71.7	-2.3
1150.000000	13800.172300	-15	-71.4	-2
1094.000000	14222.033900	-14.2	-70.6	-1.2
1041.000000	14573.906400	-15.4	-71.8	-2.4
1150.000000	14950.231800	-14.5	-70.9	-1.5
1094.000000	15315.988600	-14.4	-70.8	-1.4
1041.000000	15615.194300	-14.4	-70.8	-1.4
1150.000000	16100.131200	-14.6	-71	-1.6
1094.000000	16409.834700	-14.7	-71.1	-1.7
1150.000000	17249.823600	-13.9	-70.3	-0.9

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 13 of 26.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

#### MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
  - 1) Resolution Bandwidth 100 kHz (<1 GHZ), 1 MHZ (> 1GHz).
  - 2) Video Bandwidth  $\geq$  3 times Resolution Bandwidth, or 30 kHz (22.917)
  - 3) Sweep Speed  $\leq$  2000 Hz/second
  - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

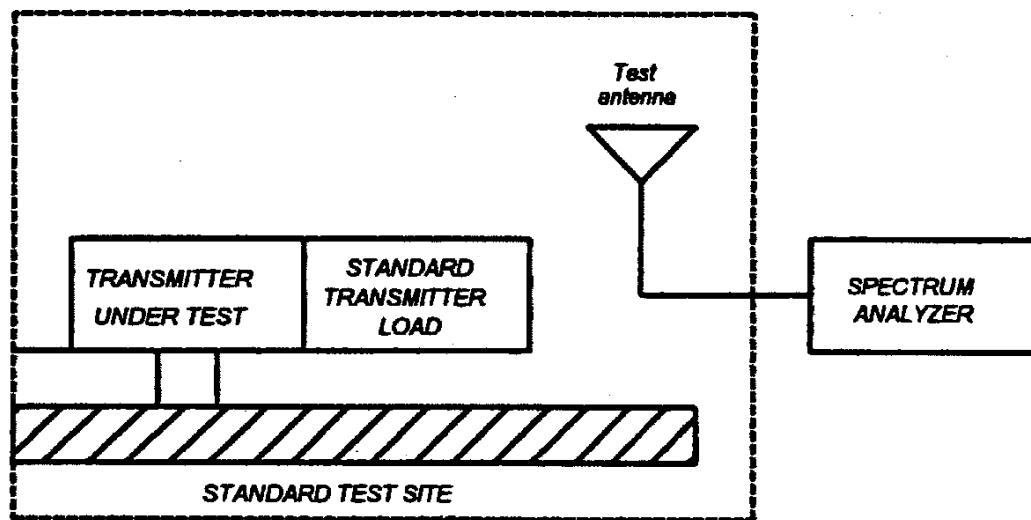

PAGE NO.


14 of 26.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).

E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

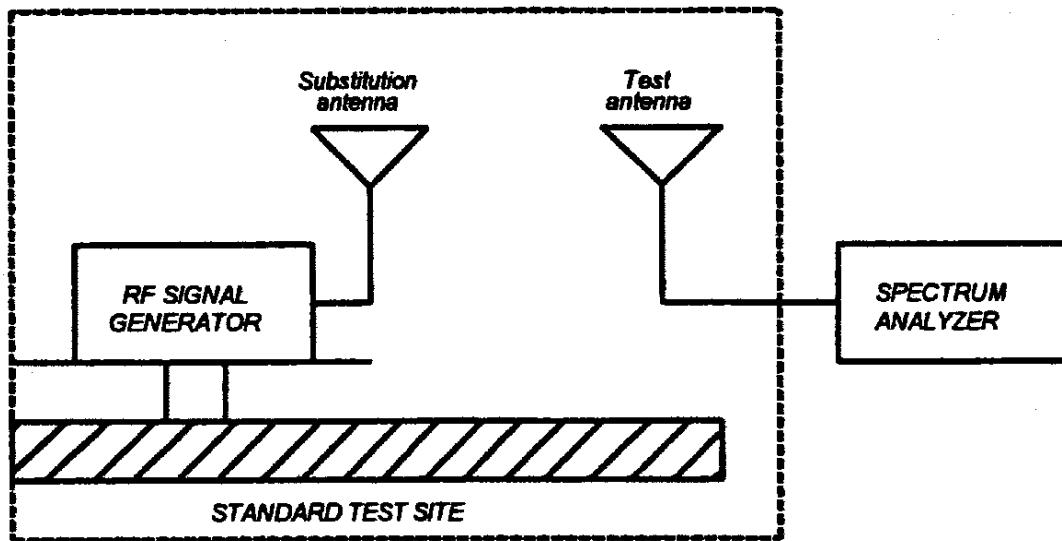

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO.

15 of 26.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =  
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step 1}$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset	Description (as applicable)	s/n	Cycle	Last Cal
Per ANSI C63.4-1992/2000 Draft, 10.1.4				
<u>TRANSDUCER</u>				
i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-02
i00065	EMCO 3301-B Active Monopole	2635	12 mo.	Sep-02
i00089	Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-02
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-02
<u>AMPLIFIER</u>				
i00028	HP 8449A	2749A00121	12 mo.	Mar-02
SPECTRUM ANALYZER				
i00029	HP 8563E	3213A00104	12 mo.	Jan-02
i00033	HP 85462A	3625A00357	12 mo.	Jan-02
i00048	HP 8566B	2511AD1467	6 mo.	Jan-02
<u>MICROPHONE, ANTENNA PORT, AND CABLING</u>				
Microphone	Yes/No		Cable Length	Meters
Antenna Port Terminated	Yes/No		Load	Antenna Gain
All Ports Terminated by	Load		Peripheral	

PAGE NO.

16 of 26.

NAME OF TEST: Field Strength of Spurious Radiation

g02a0045: 2002-Oct-25 Fri 11:40:00

STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	EIRP, dBm	EIRP, dbc
1095.000000	2190.016667	-52.4	≤ -91.04
1095.000000	3284.783333	-46.7	≤ -91.04
1095.000000	4379.783333	-45.9	≤ -91.04
1095.000000	5474.783333	-45.6	≤ -91.04
1095.000000	6570.000000	-43.4	≤ -91.04
1095.000000	7665.000000	-41.7	≤ -91.04
1095.000000	8760.000000	-42.0	≤ -91.04
1095.000000	9855.166667	-37.5	≤ -91.04
1095.000000	10950.200000	-35.6	≤ -91.04

SUPERVISED BY:



Doug Noble, B.A.S. E.E.T.

PAGE NO. 17 of 26.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5/\pm 1.25$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

18 of 26.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0051: 2002-Oct-29 Tue 14:51:00  
 STATE: 2:High Power

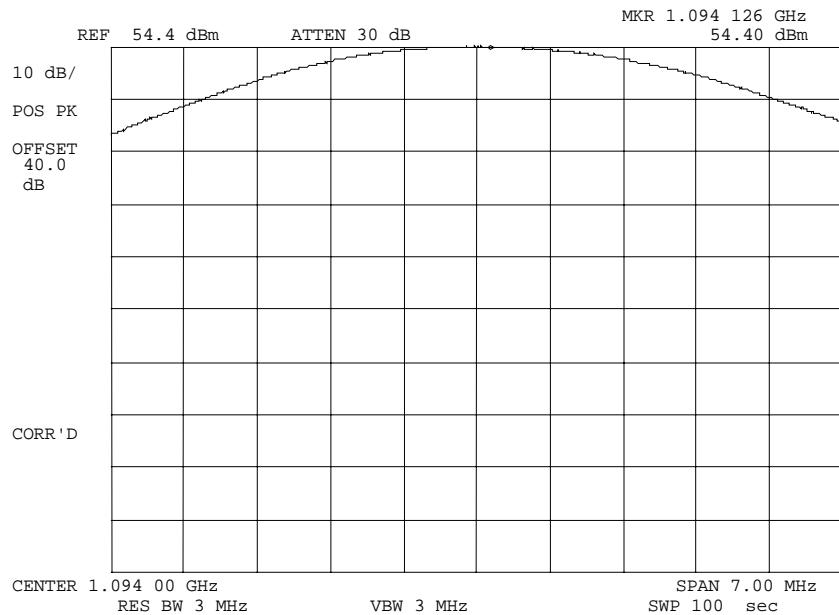

POWER:

HIGH

MODULATION:

L BAND PULSED  
REFERENCE LEVEL


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

19 of 26.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0053: 2002-Oct-29 Tue 15:05:00  
 STATE: 2:High Power

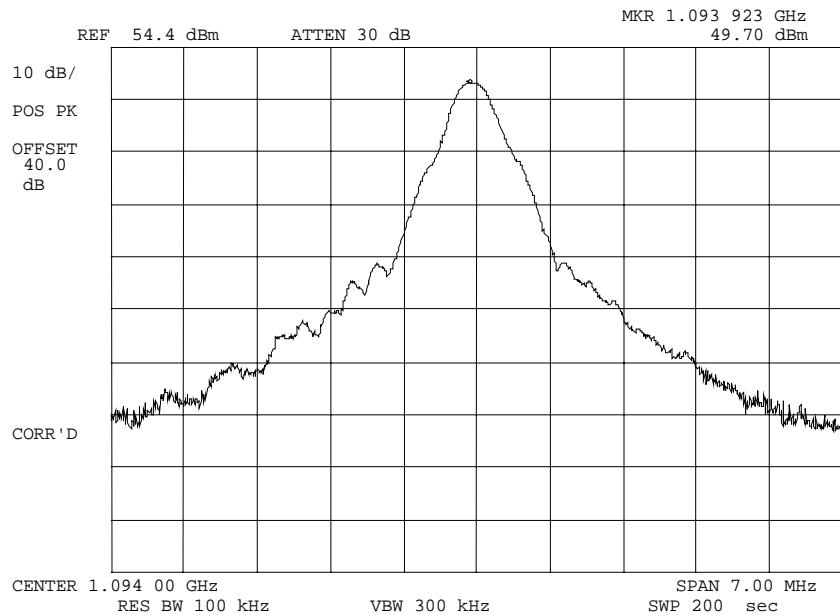

POWER:

HIGH

MODULATION:

L BAND PULSED

OCCUPIED BANDWIDTH

PLEASE NOTE: FOR PULSE POWER EMISSION BAND WIDTH TO BE SPECIFIED ON  
 LICENSE (87.137)


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

20 of 26.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0054: 2002-Oct-29 Tue 15:10:00  
 STATE: 2:High Power

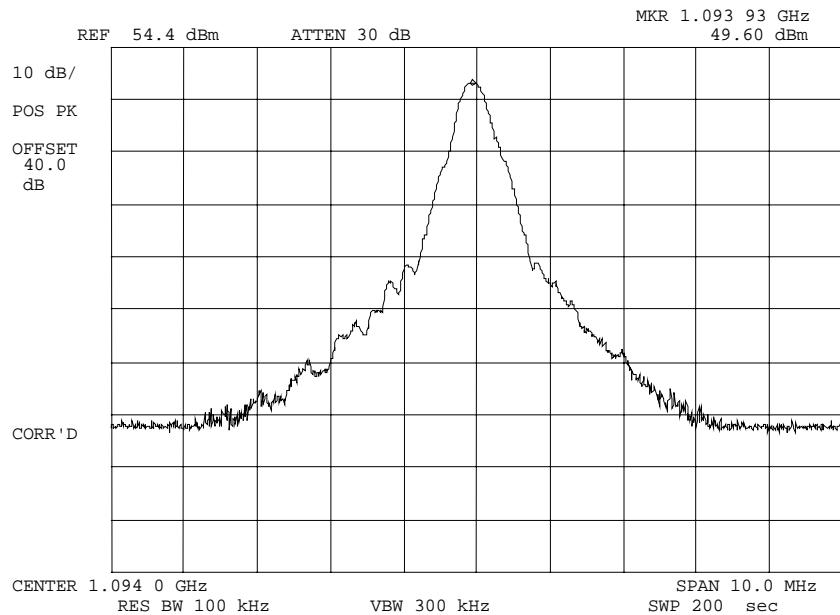

POWER:  
 MODULATION:

HIGH  
 L BAND PULSED  
 OCCUPIED BANDWIDTH


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

21 of 26.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0052: 2002-Oct-29 Tue 15:01:00  
 STATE: 2:High Power

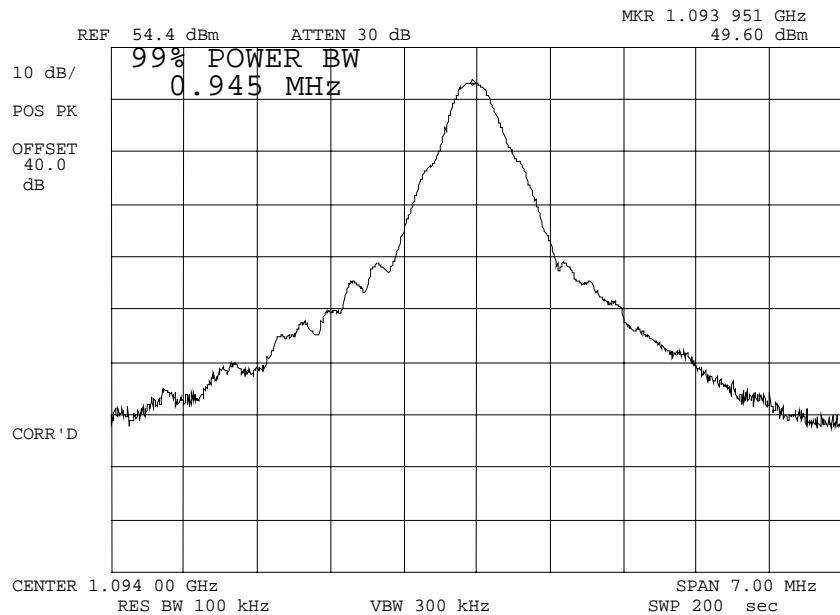

POWER: HIGH  
 MODULATION: L BAND PULSED  
 99 % POWER BANDWIDTH

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 22 of 26.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

23 of 26.

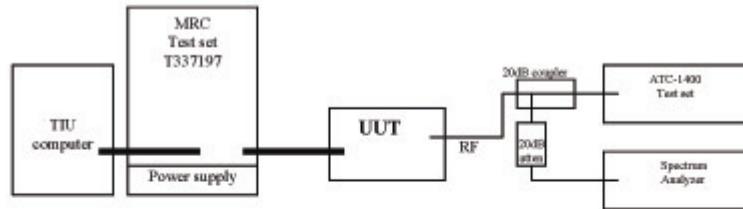TRANSMITTER TEST SET-UPTEST EQUIPMENT

Record of calibration data for all equipment used for this test.

Description	Model No.	ID No.	Calibration Due Date
VDR Test Set	T337197	1	N/R
Spectrum analyzer	H-P 8563E	D401090	10-16-04
Test set	IFR ATC-1400A	AV58994	9-11-03

PAGE NO.

24 of 26.


NAME OF TEST:

Frequency Stability (Temperature Variation)

Test Data Taken at 28 VDC Input

VOR freq	DME Frequency (MHz)	Chamber Temp	Measured Frequency (MHz)	Frequency Error (KHz)	Test Limit ± 100KHz
108.00	1041.00	-20°C	1041.0525	52.5	± 100KHz
"	"	20°C	1041.0450	45.0	± 100KHz
"	"	55°C	1041.0433	43.3	± 100KHz
112.30	1094.00	-20°C	1094.0750	75.0	± 100KHz
"	"	20°C	1094.0592	59.2	± 100KHz
"	"	55°C	1094.0650	65.0	± 100KHz
117.90	1150.00	-20°C	1150.0792	79.2	± 100KHz
"	"	20°C	1150.0500	50.0	± 100KHz
"	"	55°C	1150.0292	29.2	± 100KHz

PERFORMED BY:

  
 Doug Noble, B.A.S. E.E.T.

PAGE NO. 25 of 26.NAME OF TEST: Frequency Stability (Voltage Variation)SPECIFICATION: 47 CFR 2.1055(d)(1)GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2TEST EQUIPMENT: As per previous pageMEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at  $25\pm5^{\circ}\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

Test Data Taken at  $25^{\circ}\text{C}$ 

VOR freq	DME xmit freq (MHz)	Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Test Limit $\pm 100$ KHz
108.00	1041.00	18.0	1041.0408	+40.8KHz	$\pm 100$ KHz
"	"	22.4	1041.0408	+40.8KHz	$\pm 100$ KHz
"	"	23.8	1041.0400	+40.0 KHz	$\pm 100$ KHz
"	"	28.0	1041.0425	+42.5 KHz	$\pm 100$ KHz
"	"	32.2	1041.0425	+42.5 KHz	$\pm 100$ KHz
112.30	1094.00	18.0	1094.0550	+55.0 KHz	$\pm 100$ KHz
"	"	22.4	1094.0567	+56.7 KHz	$\pm 100$ KHz
"	"	23.8	1094.5500	+55.0 KHz	$\pm 100$ KHz
"	"	28.0	1094.0583	+58.3KHz	$\pm 100$ KHz
"	"	32.2	1094.0583	+58.3 KHz	$\pm 100$ KHz
117.90	1149.00	18.0	1149.9650	-35.0 KHz	$\pm 100$ KHz
"	"	22.4	1149.9642	-35.8 KHz	$\pm 100$ KHz
"	"	23.8	1149.9633	-36.7 KHz	$\pm 100$ KHz
"	"	28.0	1149.9617	-38.3KHz	$\pm 100$ KHz
"	"	32.2	1149.9642	-35.8 KHz	$\pm 100$ KHz

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.



PAGE NO. 26 of 26.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 1MOPON

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= N/A
MAXIMUM DEVIATION (D), kHz	= N/A
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B <sub>N</sub> ), kHz	= (2xM)+(2xDxK) = 0.945 MHz, measured

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

END OF TEST REPORT

TESTIMONIAL  
AND  
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.