

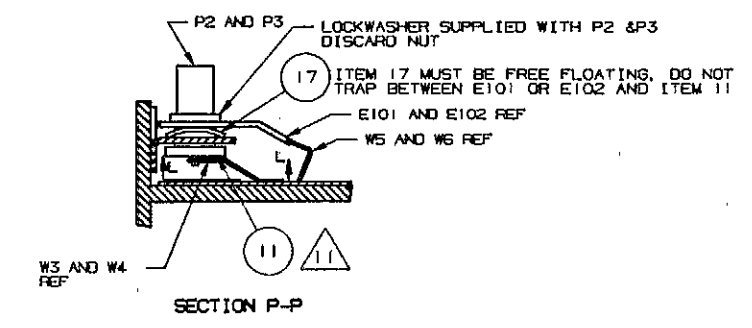

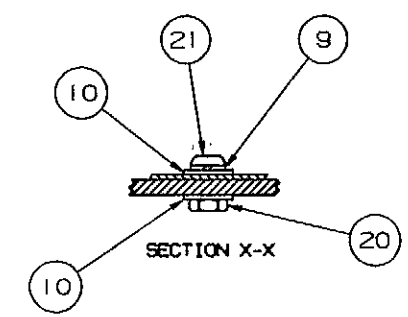
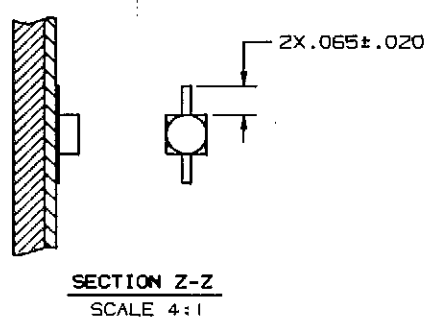
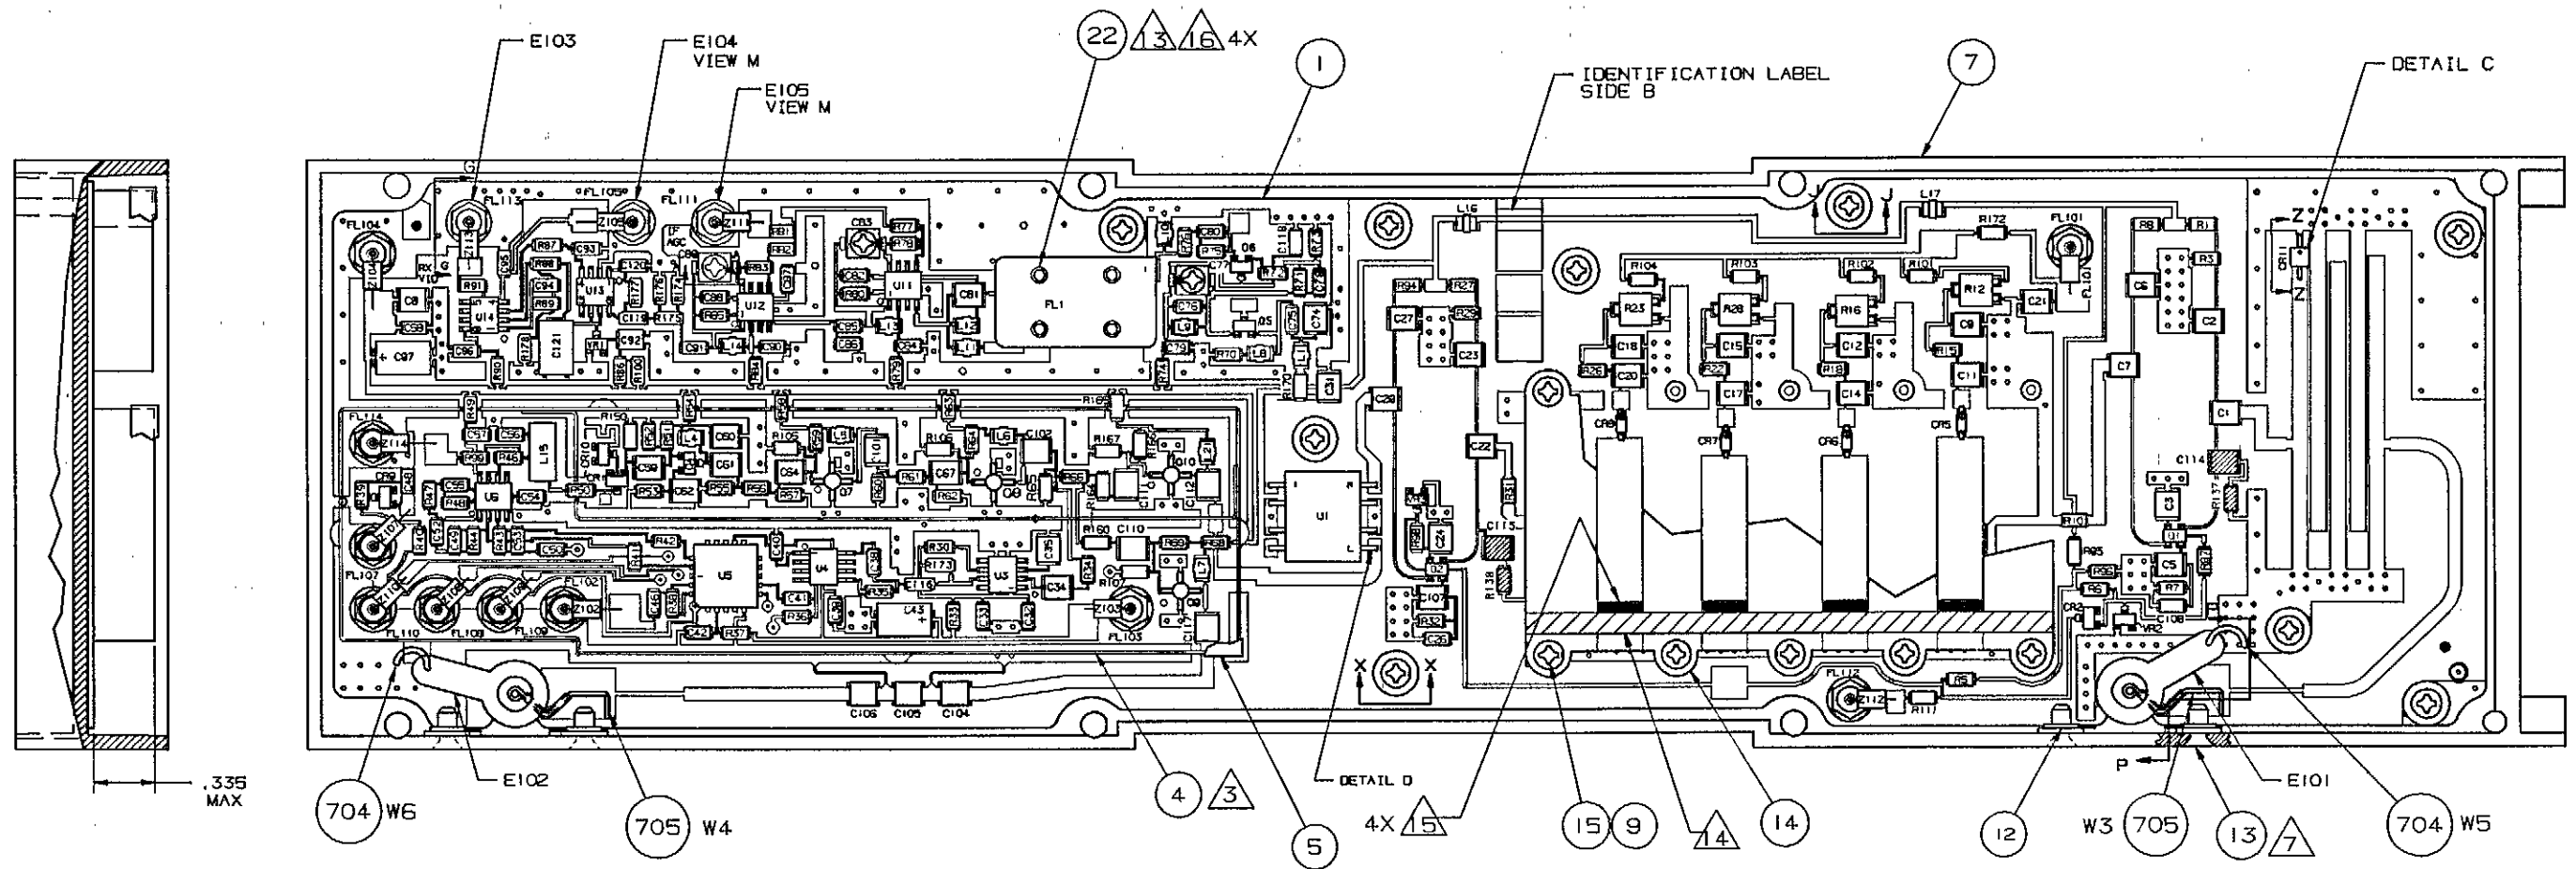

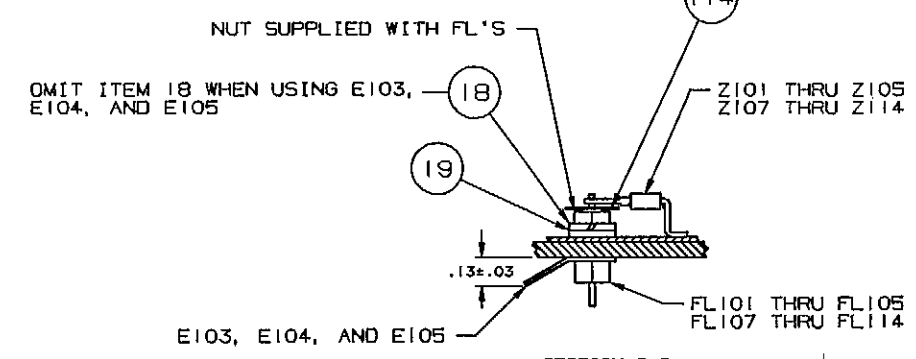

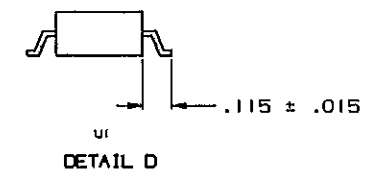



REV. NO.				
REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	UDTD TOLERANCE ON DETAIL D. 102923(NA)	8 MAR 00	M. Arnold J. Olson



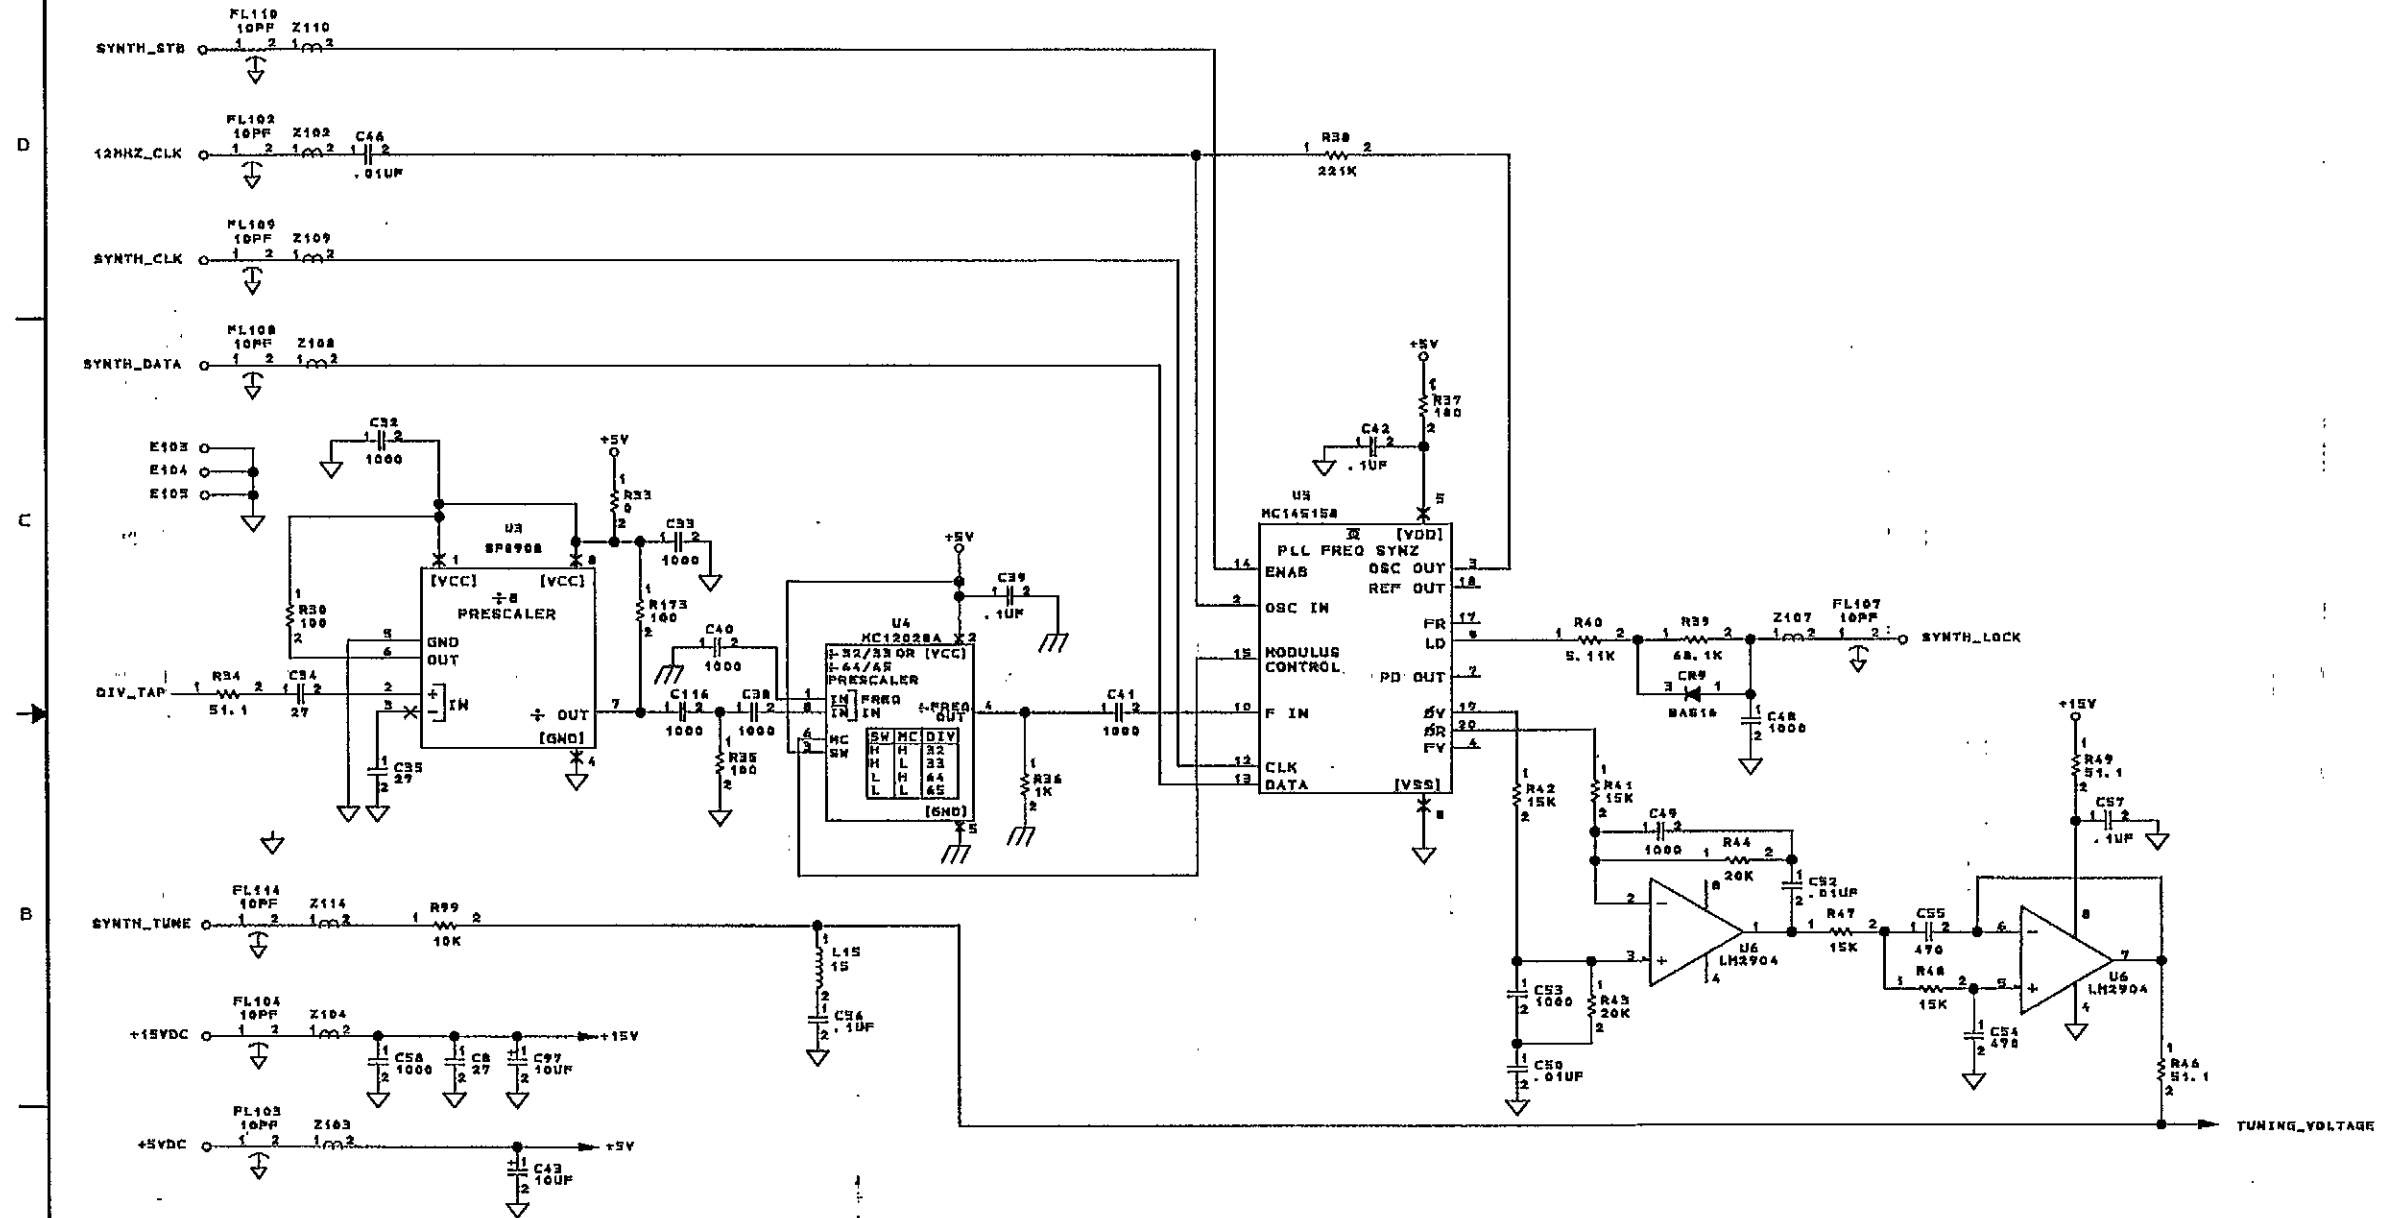

NOTES:
 UNLESS OTHERWISE SPECIFIED:
 1. ALL CAPACITANCE VALUES ARE IN PICOFARADS.
 2. ALL RESISTANCE VALUES ARE IN OHMS.
 3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES.
 4. PARTIAL REFERENCE DESIGNATIONS ARE SHOWN FOR COMPLETE DESIGNATIONS PREFIX PART DESIGNATION WITH SUBASSEMBLY DESIGNATION.
 5. INTERPRET DRAWING PER ANSI Y32.2-1975 AND ANSI/IEEE STD 921-1986. LOGIC SYMBOLS CONFORM TO ANSI/IEEE STD 91-1984.

SCHEMATIC DIAGRAM SHEET NO. 1 OF 3

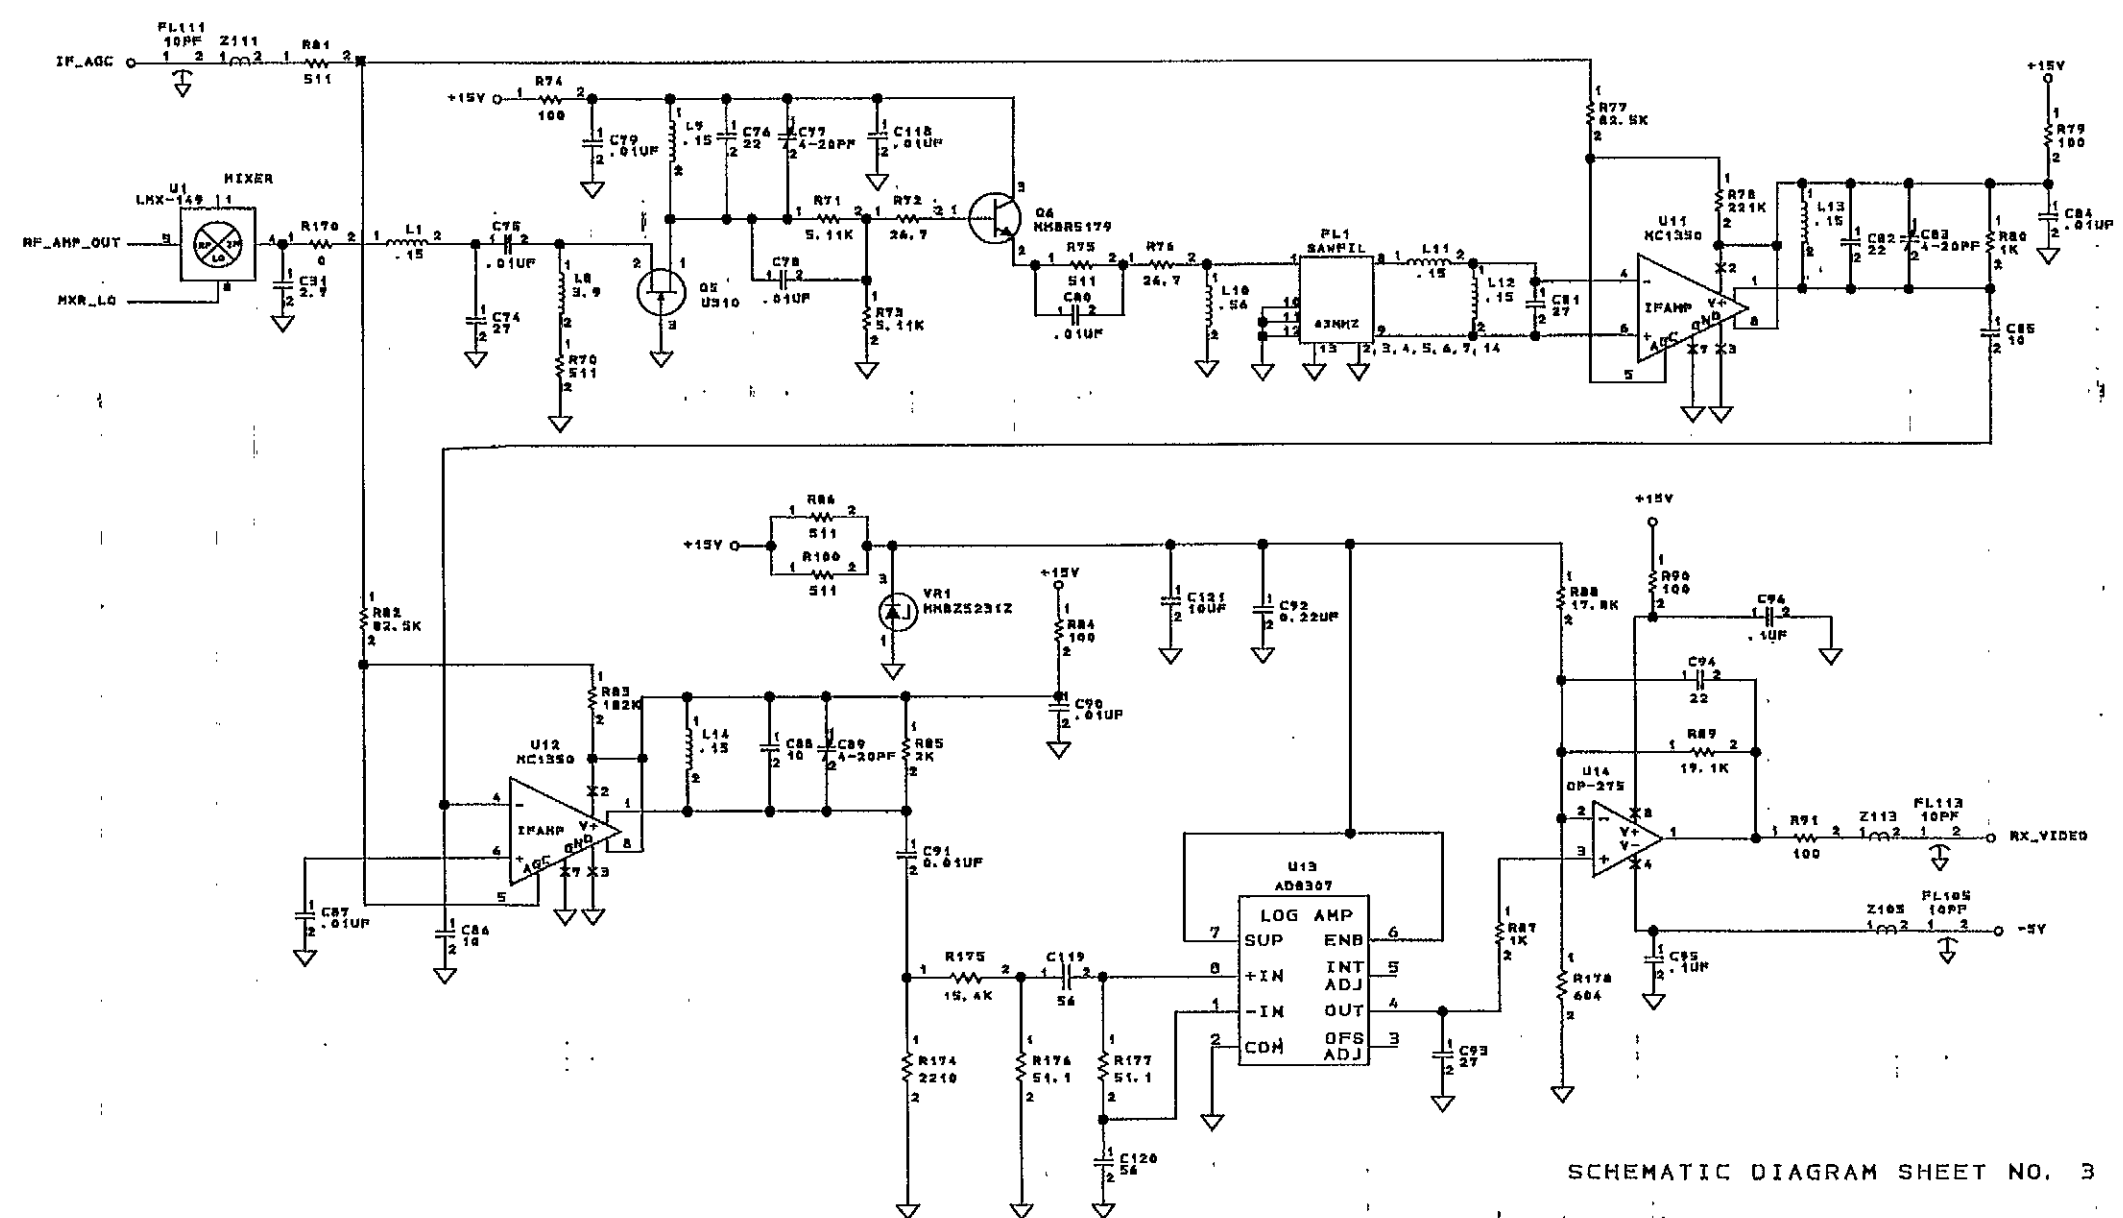

SCHEMATIC DIAGRAM SHEET NO. 3