

TEST REPORT

ACCORDING TO: FCC CFR 47 PART 15 subpart C, section 15.231(a) and
subpart B

FOR:

Rosslare Enterprises Ltd.

**Wireless Access Control Door Interface
Near unit**

Model: MD-W11NGR

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Ports and lines	5
6.3	Support and test equipment	6
6.4	Changes made in EUT	6
6.5	Test configuration	6
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements.....	8
7.1	Periodic operation requirements	8
7.2	Field strength of emissions.....	14
7.3	Occupied bandwidth test	25
7.4	Conducted emissions	27
7.5	Antenna requirements	30
8	Emission tests according to 47CFR part 15 subpart B requirements.....	31
8.1	Conducted emissions	31
8.2	Radiated emission measurements	35
9	APPENDIX A Test equipment and ancillaries used for tests.....	40
10	APPENDIX B Measurement uncertainties	41
11	APPENDIX C Test laboratory description.....	42
12	APPENDIX D Specification references	42
13	APPENDIX E Test equipment correction factors.....	43
14	APPENDIX F Abbreviations and acronyms	50

1 Applicant information

Client name: Rosslare Enterprises Ltd.
Address: Flat 12, 9 Floor, Wing Fat Ind. Bldg., 12 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong
Telephone: +852 2795 5630
Fax: +852 2795 1508
E-mail: leonid.beckman@rosslaresecurity.com
Contact name: Mr. Leonid Beckman

2 Equipment under test attributes

Product name: Wireless access control door interface Near unit
Product type: Transceiver
Model(s): MD-W11NGR
Serial number: 001532
Hardware version: 0101-2000057+05
Software release: MDW11-75 release 2 ver0009
Receipt date: 10/10/2010

3 Manufacturer information

Manufacturer name: Rosslare Enterprises Ltd.
Address: Flat 12, 9 Floor, Wing Fat Ind. Bldg., 12 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong
Telephone: +852 2795 5630
Fax: +852 2795 1508
E-Mail: leonid.beckman@rosslaresecurity.com
Contact name: Mr. Leonid Beckman

4 Test details

Project ID: 21268
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 10/10/2010
Test completed: 11/22/2010
Test specification(s): FCC Part 15, subpart C, §15.231(a); subpart B, class B

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.231(a), Periodic operation requirements	Pass
Section 15.231(b), Field strength of emissions	Pass
Section 15.231(c), Occupied bandwidth	Pass
Section 15.207(a), Conducted emission	Pass
Section 15.203, Antenna requirement	Pass
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Pass
Section 15.109, Radiated emission	Pass
Section 15.111, Conducted emission at receiver antenna port	Not required

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report replaces the previously issued test report identified by Doc ID:ROSRAD_FCC.21268.

	Name and Title	Date	Signature
Tested by:	Mr. A. Troupiansky, test engineer	November 22, 2010	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	November 24, 2010	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	November 25, 2010	

6 EUT description

6.1 General information

The EUT is a Near unit of MD-W11 Wireless Access Control Door Interface, a quick, inexpensive solution for connecting remote door devices, such as readers, locks, and REX Buttons to an access control unit. Includes Bi-directional RF data communication.

The MD-W11 Wireless Access Control Door Interface consists of two units per door, one located near the controller (the Near unit) and the other near the door (the Far unit). The Near unit is connected to a Rosslare door controller (e.g., AC-215, AC-225, or AC-525). The Far unit is connected to proximity card readers or keypads (e.g., AY-K12 and AY-Q64B).

When a card is read or a code is keyed onto the keypad, the Far unit transmits the information to the Near unit. The Near unit, attached to the AC-225 or to another controller, determines whether or not to open the door. The controller then sends the message to the Near unit, which transmits it to the Far unit, and if authorized, the door is opened.

The MD-W11 has ability to work in following 3 modes that selected by dipswitch:

- ✓ Normal operation
- ✓ Enrolling Mode
- ✓ Test mode

All modes the MD-W11 can operate at 4 frequencies (channels) that selected by switches 5 and 6.

Switch 5	Switch 6	Frequency
ON	ON	433.920 MHz
ON	OFF	433.720 MHz
OFF	ON	433.520 MHz
OFF	OFF	433.320 MHz

The Near unit is powered from the controller's power supply.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	AC power	AC/DC adapter	AC mains	1	Wall outlet	NA
Power	DC power	EUT	AC/DC adapter	1	Unshielded	3
Signal	STAM	EUT	Open circuit	1	Unshielded	3
Signal	SPV	EUT	Open circuit	1	Unshielded	3
Signal	LBAT	EUT	Open circuit	1	Unshielded	3
Signal	AC	EUT	Open circuit	1	Unshielded	3
Signal	D0	EUT	Open circuit	1	Unshielded	3
Signal	D1	EUT	Open circuit	1	Unshielded	3
Signal	LED	EUT	Open circuit	1	Unshielded	3
Signal	TMP	EUT	Open circuit	1	Unshielded	3
Signal	GND	EUT	Open circuit	1	Unshielded	3
Signal	Lock	EUT	Open circuit	1	Unshielded	3
Signal	NO2	EUT	Open circuit	1	Unshielded	3
Signal	Com2	EUT	Open circuit	1	Unshielded	3
Signal	NC2	EUT	Open circuit	1	Unshielded	3
Signal	NO1	EUT	Open circuit	1	Unshielded	3
Signal	Com1	EUT	Open circuit	1	Unshielded	3
Signal	NC1	EUT	Open circuit	1	Unshielded	3


6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
AC/DC adapter	FP	D48-13.8-0800 (2A-107)	NA

6.4 Changes made in EUT

No changes were implemented in the EUT.

6.5 Test configuration

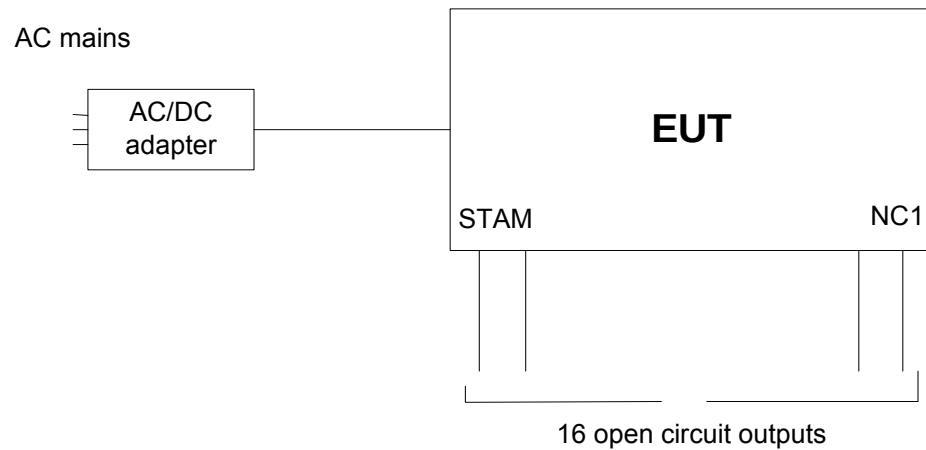

6.6 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Operating frequencies		433.320 MHz, 433.520 MHz, 433.720 MHz, 433.920 MHz				
Maximum rated output power		Maximum field strength		87.9 dB(μ V/m) at 3 m test distance		
Is transmitter output power variable?		X	No			
		Yes	continuous variable			
			stepped variable with stepsize			
			dB			
			dBm			
		dBm				
Antenna connection						
unique coupling		standard connector		X	integral	
				X	without temporary RF connector	
Antenna characteristics						
Type	Manufacturer		Model number		Gain	
External	Bondale		G-RA0G80037083		0 dBi	
Type of modulation		FSK				
Modulating test signal (baseband)		ID code				
Transmitter power source						
	Battery	Nominal rated voltage		Battery type		
X	AC mains	Nominal rated voltage		Frequency	60 Hz	
		120 VAC				
Common power source for transmitter and receiver				X	yes	
					no	

Test specification:		Section 15.231(a), Periodic operation requirements	
Test procedure:		Supplier declaration	
Test mode:		Compliance	Verdict: PASS
Date:		10/11/2010	
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1.


7.1.3 Test procedure for measurements of polling / supervision transmission duration

7.1.3.1 The EUT was set up as shown in Figure 7.1.1.

7.1.3.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.3.3 The transmission time was captured and shown in Plot 7.1.2.

Figure 7.1.1 Setup for transmitter shut down test




Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date:	10/11/2010		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			

Table 7.1.1 Periodic operation requirements


Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	Plot 7.1.1	Comply
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	Plot 7.1.1	Comply
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	Supplier declaration	Comply

Plot 7.1.1 Transmitter shut down test result

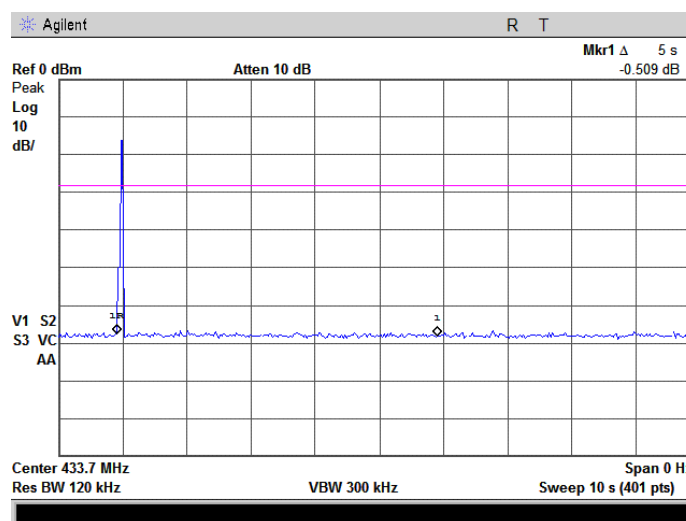


Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date:	10/11/2010		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.2 Transmitter shut down test result, transmission duration time

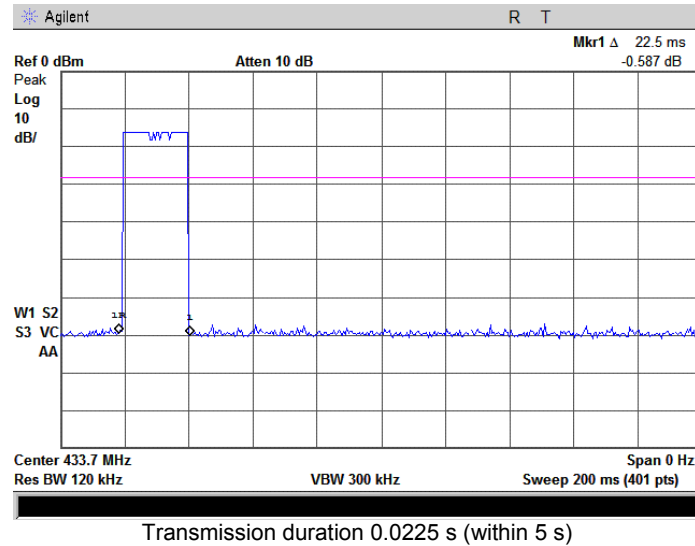


Plot 7.1.3 Polling / supervision transmission duration

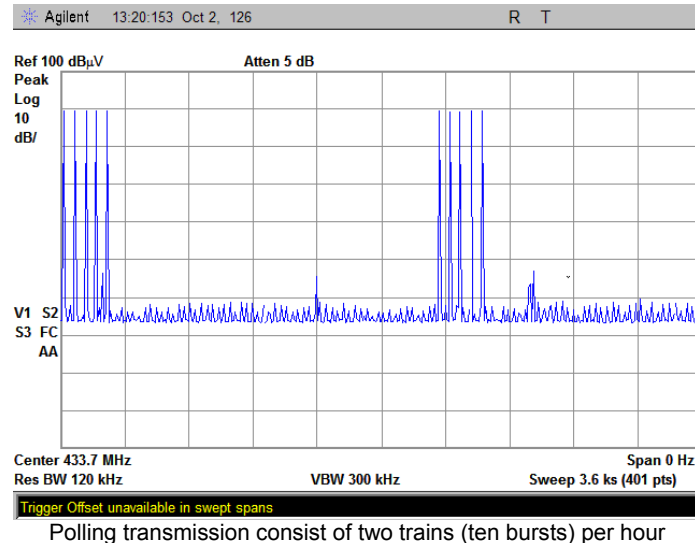


Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date:	10/11/2010		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.4 Polling / supervision transmission duration

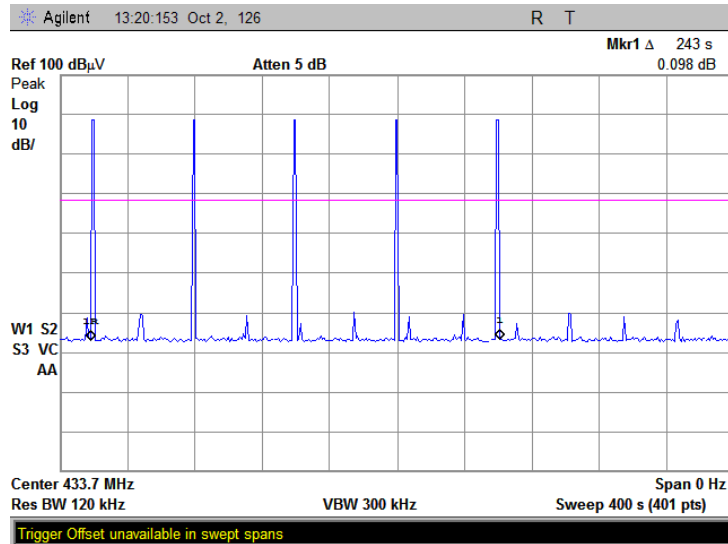

One train consist of 5 bursts


Plot 7.1.5 Polling / supervision transmission duration

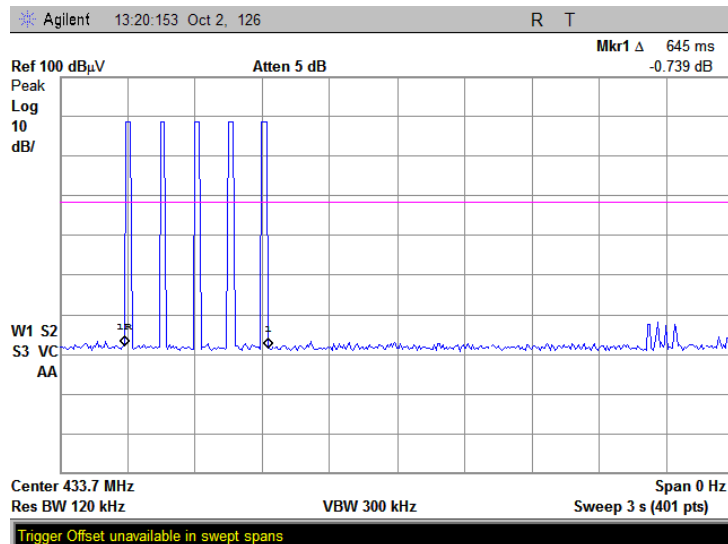

One burst consist of five pulses

Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date:	10/11/2010		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.6 Polling / supervision transmission duration

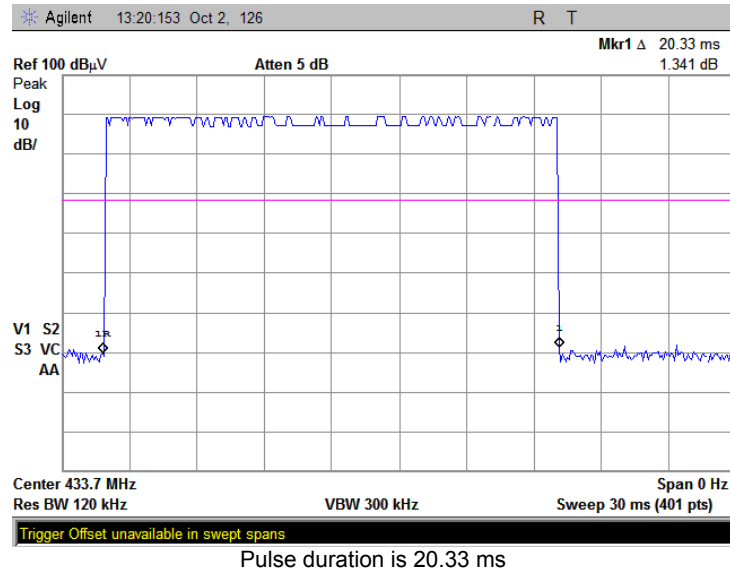

Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date:	10/11/2010		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			

Table 7.1.2 Total duration of polling / supervision transmissions

Pulse duration, ms	Number of pulses in one burst	Number of bursts within one transmission	Maximum number of transmissions within 1 hour	Total duration within 1 hour, ms
20.33	5	5	2	1016.5

Total duration within 1 hour, ms = 20.33 ms x 5 x 5 x 2 = 1016.5 ms

Reference numbers of test equipment used

HL 3001							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Sections 13.1.1, 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	10/18/2010		
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
433.720	100.8	80.8

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	80.8	60.8
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(μV/m) was calculated as follows:

$$\text{Lim}_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) - \text{within } 130 - 174 \text{ MHz band};$$

$$\text{Lim}_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) - \text{within } 260 - 470 \text{ MHz band},$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.4, Sections 13.1.1, 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		10/18/2010	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.


7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

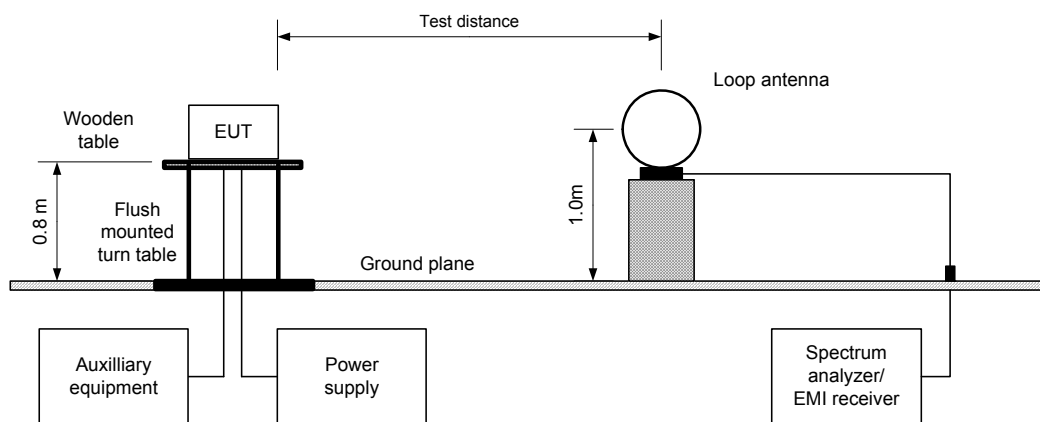

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.4, Sections 13.1.1, 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		10/18/2010	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz

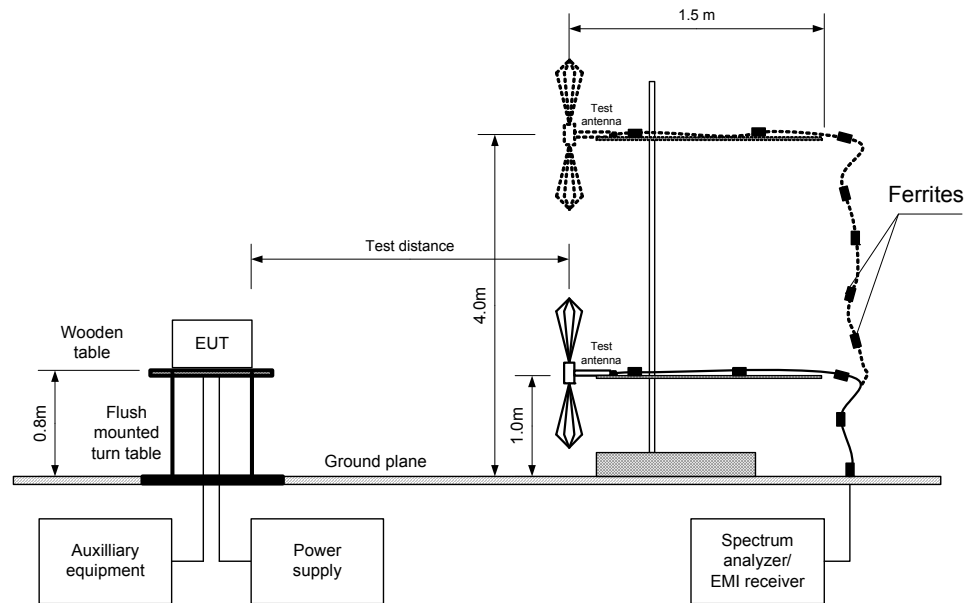

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.4, Sections 13.1.1, 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		10/18/2010	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE: 3 m
EUT POSITION: Typical (Vertical)
MODULATION: FSK
MODULATING SIGNAL: ID code
TRANSMITTER OUTPUT POWER: Maximum
INVESTIGATED FREQUENCY RANGE: 0.009 - 4500 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)
9.0 kHz (150 kHz – 30 MHz)
120 kHz (30 MHz – 1000 MHz)
1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH: ≥ Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission***											
433.72	H	1.00	122	87.9	100.8	-12.9	-13.0	74.9	80.8	-5.9	Pass
Spurious emissions											
312.000	H	1.00	148	40.9	80.8	-39.9	-13.0	27.9	60.8	-32.9	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = dB below (negative if above) specification limit.

*** Was measured at 1 frequency near middle as per ANSI C63.4-2003 section 13.1.1.

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
22.5	100	NA	NA	NA	-13.0

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{22.5\text{ms}}{100\text{ms}} \right) = -13.0\text{dB}$$

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0593	HL 0594	HL 0604	HL 2432	HL 2871	HL 3622
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.4, Sections 13.1.1, 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	10/18/2010		
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: FSK
 MODULATING SIGNAL: ID code
 TRANSMITTER OUTPUT POWER: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
328.009	35.8	32.9	46.0	-13.1	H	1.00	171	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Table 7.2.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used


HL 0446	HL 0521	HL 0593	HL 0594	HL 0604	HL 2432	HL 2871	HL 3622
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.4, Sections 13.1.1, 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		10/18/2010	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: Unom

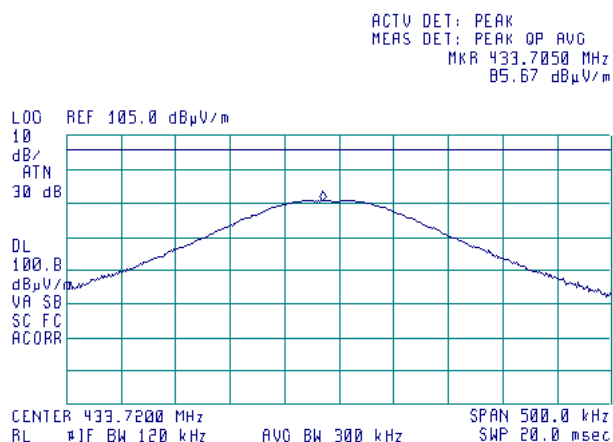

Plot 7.2.2 Radiated emission measurements at the fundamental frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: Unom

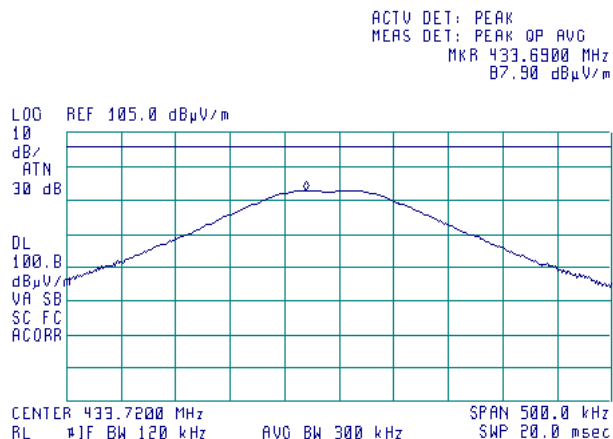

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.4, Sections 13.1.1, 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		10/18/2010	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.3 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: 115%U_{nom}

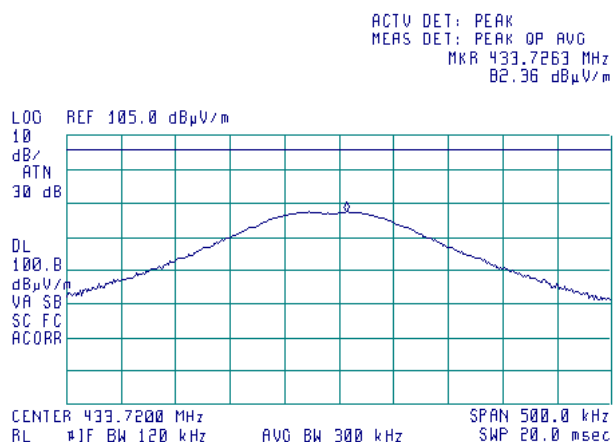

Plot 7.2.4 Radiated emission measurements at the fundamental frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: 115%U_{nom}

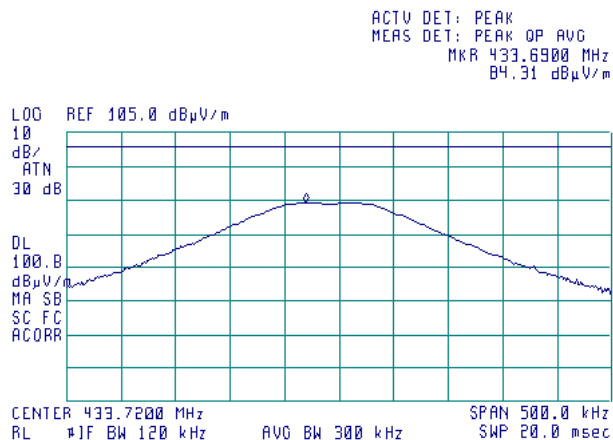

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.4, Sections 13.1.1, 13.1.4	
Test mode:	Compliance	Verdict: PASS	
Date:	10/18/2010		
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.5 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: 85%Unom

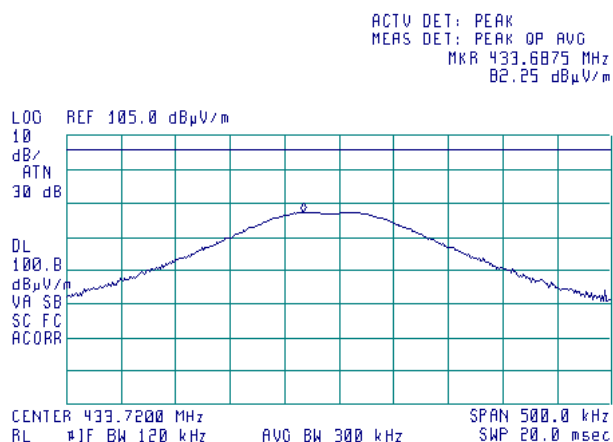

Plot 7.2.6 Radiated emission measurements at the fundamental frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: 85%Unom

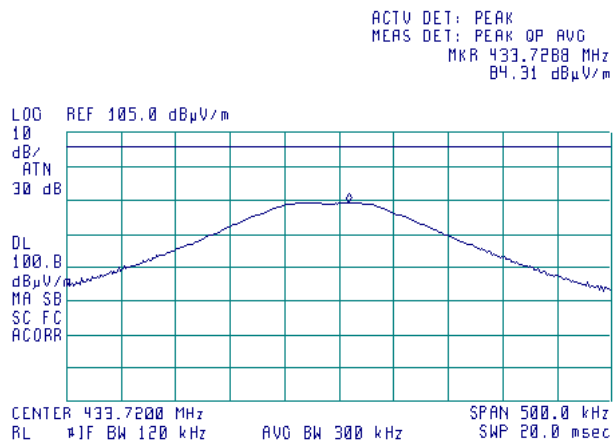

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.4, Sections 13.1.1, 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		10/18/2010	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.7 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

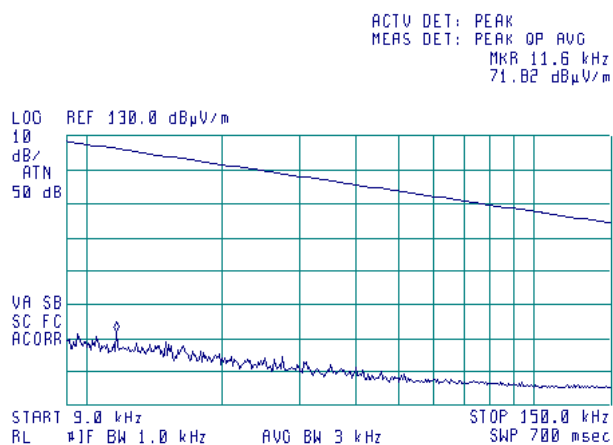

Plot 7.2.8 Radiated emission measurements from 0.15 to 30 MHz


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

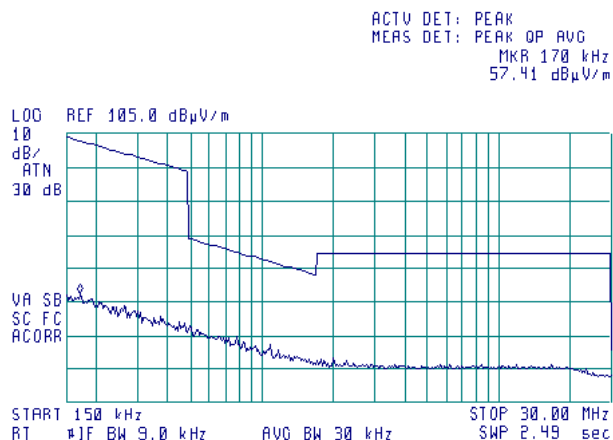

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.4, Sections 13.1.1, 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		10/18/2010	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.9 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)

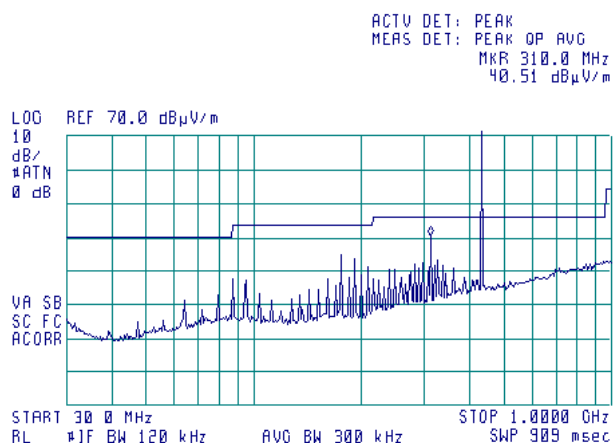


Plot 7.2.10 Radiated emission measurements from 1000 to 4500 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)

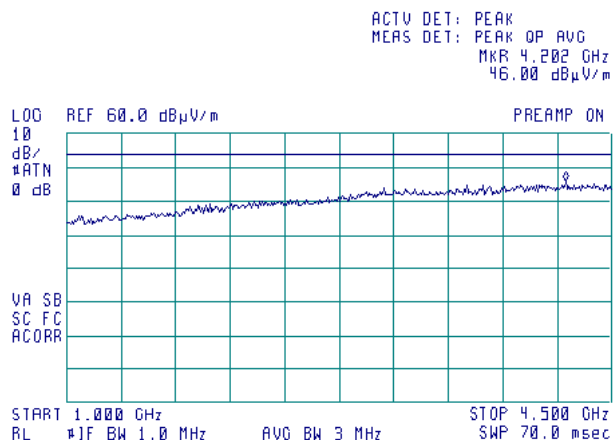

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Sections 13.1.1, 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	10/18/2010		
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 47 %	Power Supply: 120 VAC
Remarks:			

Plot 7.2.11 Transmission pulse duration

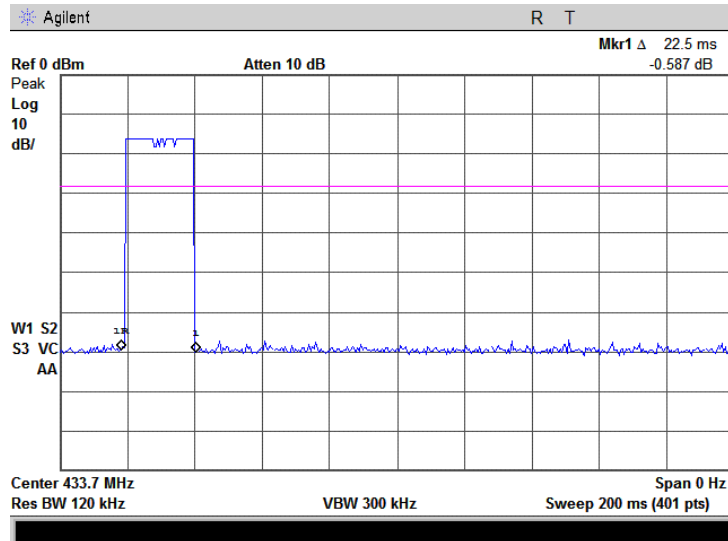

Test specification:		Section 15.231(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date:		10/24/2010	
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 43 %	Power Supply: 120 VAC
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1. The test results are provided in Table 7.3.2 and associated plots.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900	20.0	0.25
Above 900		0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was set to transmit modulated carrier.

7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.

Figure 7.3.1 Occupied bandwidth test setup



Test specification:		Section 15.231(c), Occupied bandwidth			
Test procedure:		ANSI C63.4, Section 13.1.7			
Test mode:		Compliance		Verdict: PASS	
Date:		10/24/2010			
Temperature: 24 °C		Air Pressure: 1013 hPa		Relative Humidity: 43 %	
Remarks:				Power Supply: 120 VAC	

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
RESOLUTION BANDWIDTH: 10 kHz
VIDEO BANDWIDTH: 30 kHz
MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
MODULATION: FSK
MODULATING SIGNAL: ID code
BIT RATE: 2400 bps


Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.720 MHz	91.5	0.25	1084.3	-992.8	Pass

Reference numbers of test equipment used

HL 2780								
---------	--	--	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.3.1 Occupied bandwidth test result

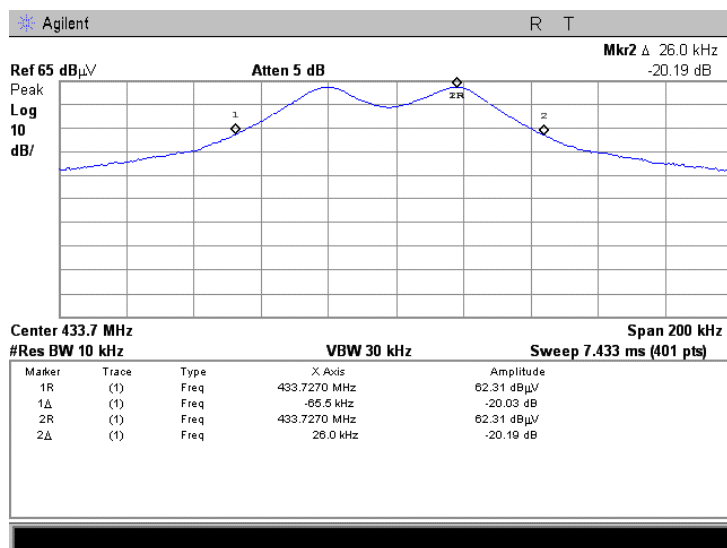

Occupied bandwidth 65.5 kHz + 26.0 kHz = 91.5 kHz

Test specification:		Section 15.207(a), Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:		Compliance	Verdict: PASS
Date:		10/11/2010	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: 120 VAC
Remarks:			

7.4 Conducted emissions

7.4.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.4.1. The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.

Table 7.4.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of frequency.


7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.4.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

7.4.2.3 The position of the device cables was varied to determine maximum emission level.

Figure 7.4.1 Setup for conducted emission measurements, table-top equipment

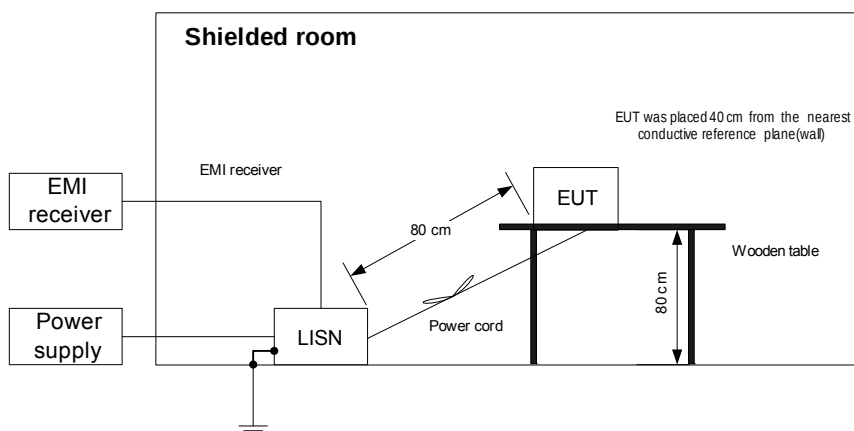

Test specification:		Section 15.207(a), Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:		Compliance	Verdict: PASS
Date:		10/11/2010	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: 120 VAC
Remarks:			

Table 7.4.2 Conducted emission test results

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.456063	44.9	36.9	56.8	-19.9	5.5	46.8	-41.3	L1	Pass
0.481323	44.6	36.3	56.3	-20.0	4.9	46.3	-41.4		
0.482373	43.9	36.4	56.3	-19.9	5.4	47.1	-41.7	L2	Pass
0.440260	44.3	37.0	57.1	-20.1	4.8	46.3	-41.5		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used


HL 0787	HL 1425	HL 1513	HL 2358	HL 2888	HL 3612		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

Test specification:		Section 15.207(a), Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:		Compliance	Verdict: PASS
Date:		10/11/2010	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: 120 VAC
Remarks:			


Plot 7.4.1 Conducted emission measurements

LINE: L1
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

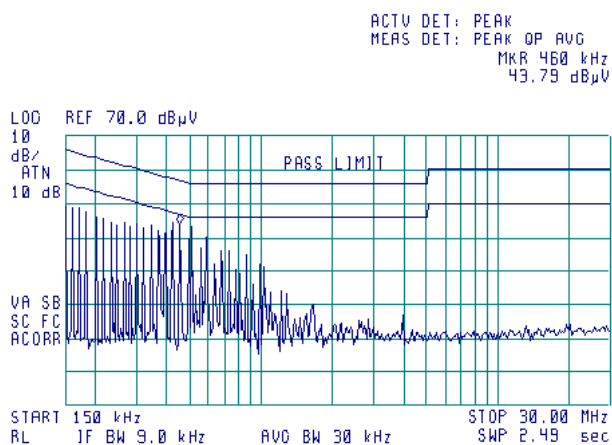

Plot 7.4.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

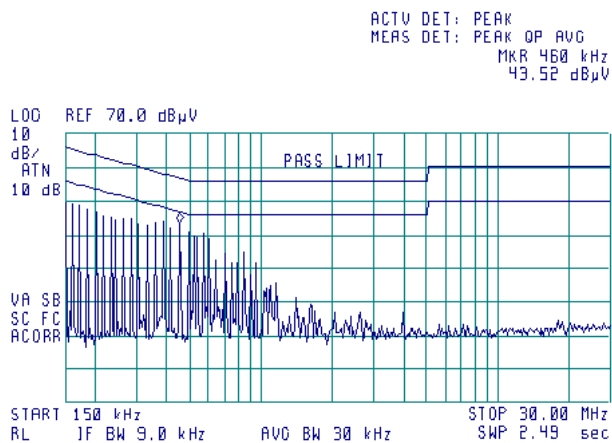

Test specification:	Section 15.203, Antenna requirement		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date:	11/22/2010		
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

7.5 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.5.1.

Table 7.5.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	NA	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	Supplier declaration	

Photograph 7.5.1 Antenna assembly

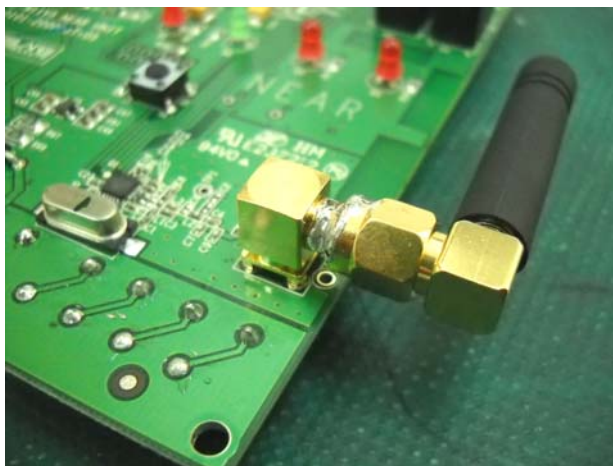

Test specification:		Section 15.107, Conducted emission at AC power port	
Test procedure:		ANSI C63.4, Sections 11.5 and 12.1.3	
Test mode:		Compliance	Verdict: PASS
Date:		10/20/2010	
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

8 Emission tests according to 47CFR part 15 subpart B requirements

8.1 Conducted emissions

8.1.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 8.1.1. The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Table 8.1.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)		Class A limit, dB(μV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60


* The limit decreases linearly with the logarithm of frequency.

8.1.2 Test procedure


- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph, energized and the performance check was conducted.
- 8.1.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 8.1.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 8.1.2.3 The position of the device cables was varied to determine maximum emission level.

Test specification:		Section 15.107, Conducted emission at AC power port	
Test procedure:		ANSI C63.4, Sections 11.5 and 12.1.3	
Test mode:		Compliance	Verdict: PASS
Date:		10/20/2010	
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Figure 8.1.1 Setup for conducted emission measurements, table-top equipment

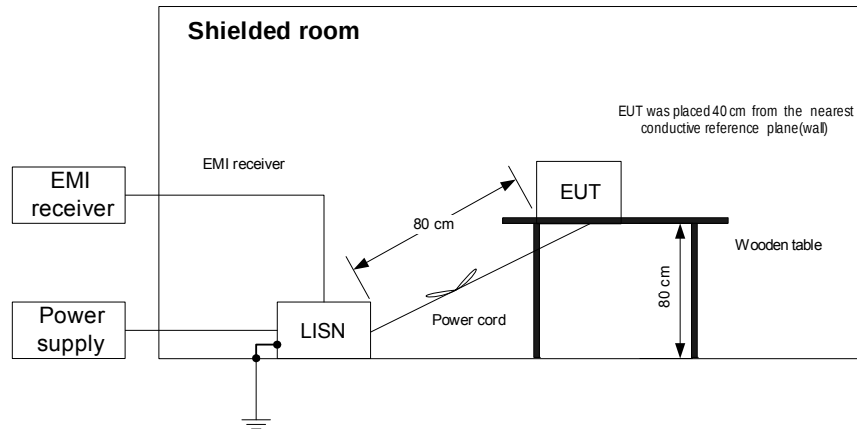

Photograph 8.1.1 Setup for conducted emission measurements

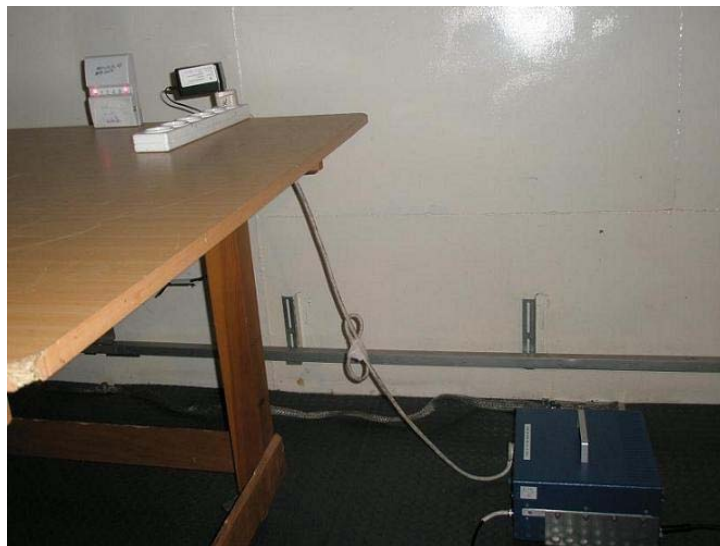

Test specification:		Section 15.107, Conducted emission at AC power port	
Test procedure:		ANSI C63.4, Sections 11.5 and 12.1.3	
Test mode:	Compliance	Verdict:	PASS
Date:	10/20/2010		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Table 8.1.2 Conducted emission test results

LINE: AC mains
 LIMIT: Class B
 EUT OPERATING MODE: Receive / Stand-by
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.420000	44.18	37.17	57.50	-20.33	4.51	47.50	-42.99	L1	Pass
0.450000	43.64	36.41	56.93	-20.52	4.40	46.93	-42.53		
0.470000	43.16	35.98	56.56	-20.58	4.25	46.56	-42.31		
0.480000	43.12	35.85	56.37	-20.52	3.90	46.37	-42.47		
0.490000	43.19	35.70	56.19	-20.49	3.64	46.19	-42.55		
0.500000	42.95	35.39	56.00	-20.61	3.60	46.00	-42.40		
0.450000	44.50	36.77	56.93	-20.16	4.69	46.93	-42.24	L2	Pass
0.460000	44.35	36.61	56.75	-20.14	4.73	46.75	-42.02		
0.470000	44.54	36.40	56.56	-20.16	4.67	46.56	-41.89		
0.480000	44.08	36.06	56.37	-20.31	3.79	46.37	-42.58		
0.490000	43.96	35.81	56.19	-20.38	3.72	46.19	-42.47		
0.500000	43.39	35.67	56.00	-20.33	4.77	46.00	-41.23		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used


HL 0495	HL 0787	HL 1425	HL 1513	HL 2888	HL 3612		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

Test specification:		Section 15.107, Conducted emission at AC power port	
Test procedure:		ANSI C63.4, Sections 11.5 and 12.1.3	
Test mode:		Compliance	Verdict: PASS
Date:		10/20/2010	
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 8.1.1 Conducted emission measurements

LINE: L1
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

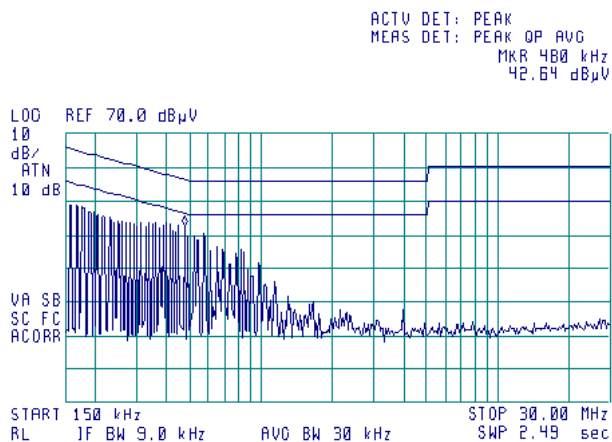

Plot 8.1.2 Conducted emission measurements

LINE: L2
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

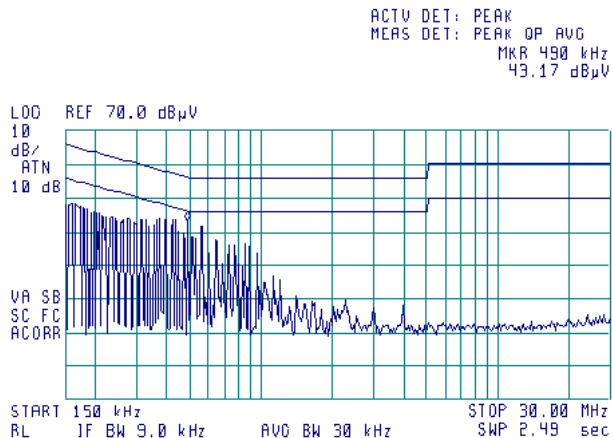

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	10/20/2010		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

8.2 Radiated emission measurements

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*


* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.2.2 Test procedure for measurements in semi-anechoic chamber

- 8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photographs, energized and the performance check was conducted.
- 8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.2.2.3 The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		10/20/2010	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

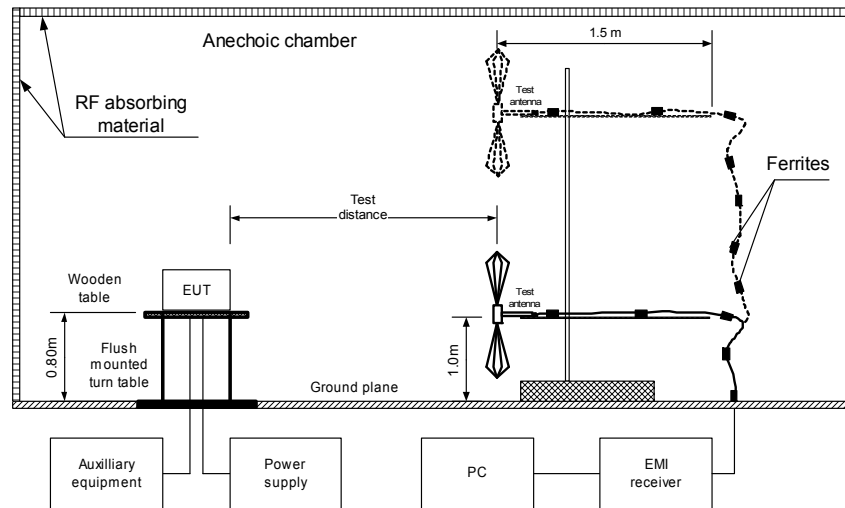


Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		10/20/2010	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Photograph 8.2.1 Setup for radiated emission measurements



Photograph 8.2.2 Setup for radiated emission measurements, EUT cabling

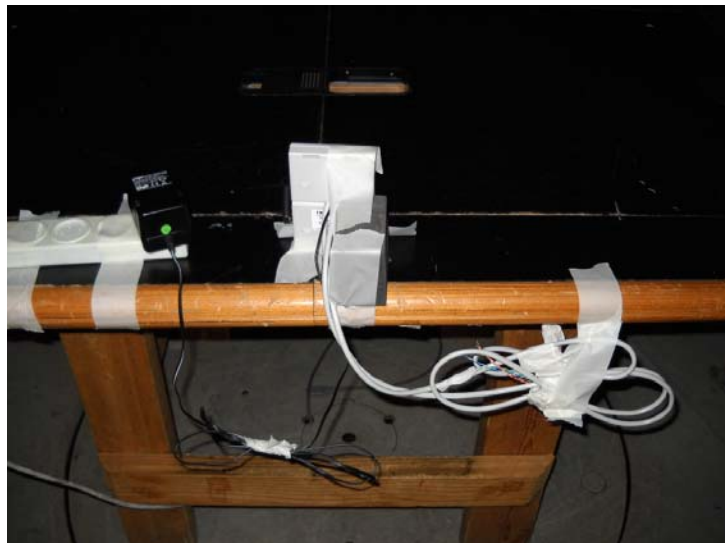

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	10/20/2010		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Table 8.2.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
176.000000	38.8	38.4	43.5	-5.1	H	1.90	14	Pass
192.000000	43.0	42.6	43.5	-0.9	H	2.00	161	
208.000000	40.0	39.4	43.5	-4.1	H	1.70	152	
240.000000	35.1	34.2	46.0	-11.8	H	1.20	188	
288.000000	40.0	39.3	46.0	-6.7	H	1.00	178	
304.000000	40.6	39.8	46.0	-6.2	H	1.40	176	

*- Margin = Measured emission - specification limit.

**-. EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 0521	HL 0593	HL 0594	HL 0604	HL 2871	HL 3622		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict: PASS	
Date:	10/20/2010		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

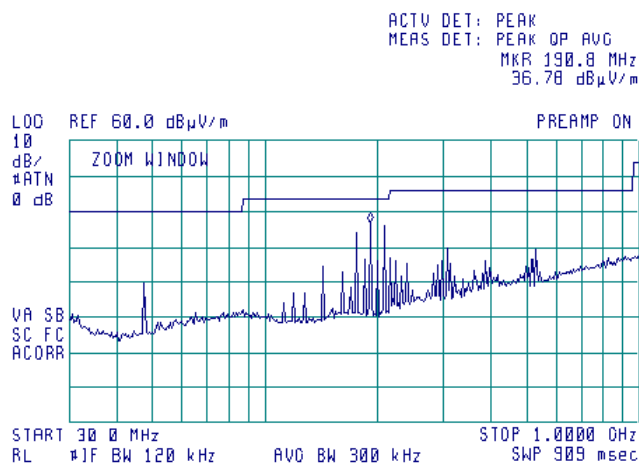

Plot 8.2.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

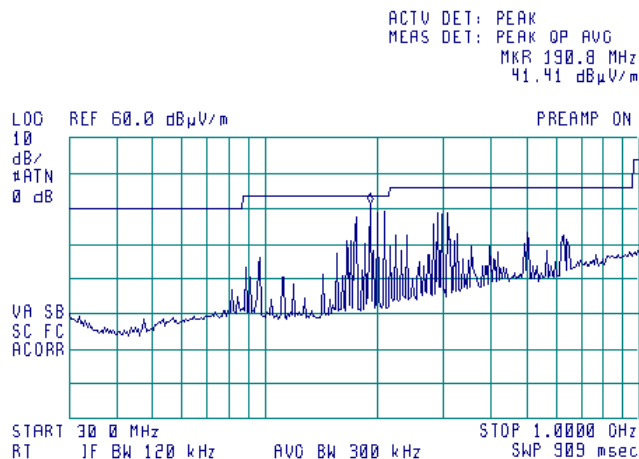

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	29-Jun-10	29-Jun-11
0495	Autotransformer 0-255V, 10A	Variac	EMPL01	495	18-May-10	18-May-11
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	25-Aug-10	25-Aug-11
0593	Antenna Mast, 1-4 m Pneumatic	Madgesh	AM-F1	101	04-Feb-10	04-Feb-11
0594	Turn Table FOR ANECHOIC CHAMBER flush mount d=1.2 m Pneumatic	Hermon Laboratories	TT-WDC1	102	12-Oct-10	12-Oct-11
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-10	11-Jan-11
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	18-Oct-10	18-Oct-11
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	24-Aug-10	24-Aug-11
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	01-Sep-10	01-Sep-11
2358	Power Supply, 2 X 0-36VDC / 5A, 5VDC / 5A	Horizon Electronics	DHR3655 D	767469	08-Mar-10	08-Mar-11
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	11-Jun-10	11-Jun-11
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	07-Jul-10	07-Jul-11
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155- 00	2871	14-Sep-10	14-Sep-11
2888	LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A, MIL STD 461E, CISPR 16-1	Rolf Heine	NNB- 2/16Z	02/10018	07-Jul-10	07-Jul-11
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	02-Dec-09	02-Dec-10
3622	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Alpha Wire	RG 214/U	NA	27-May-10	27-May-11

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.


12 APPENDIX D Specification references

47CFR part 15: 2009	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

13 APPENDIX E Test equipment correction factors

Correction factor Line impedance stabilization network Model NNB-2/16Z, Rolf Heine, HL 2888

Frequency, kHz	Insertion loss,dB		Measurement Uncertainty, dB
	L1	N	
10	0.48	0.79	±0.6
20	0.52	0.63	
30	0.31	0.35	
40	0.20	0.22	
50	0.16	0.17	
100	0.10	0.08	
300	0.08	0.06	
500	0.10	0.06	
600	0.09	0.07	
800	0.10	0.07	
1000	0.10	0.08	
2000	0.12	0.11	
3000	0.16	0.14	
4000	0.17	0.18	
6000	0.26	0.23	
10000	0.49	0.41	
14000	0.66	0.54	
16000	0.79	0.69	
18000	0.86	0.76	
20000	0.96	0.85	
25000	1.22	1.08	
28000	1.35	1.21	
30000	1.43	1.29	

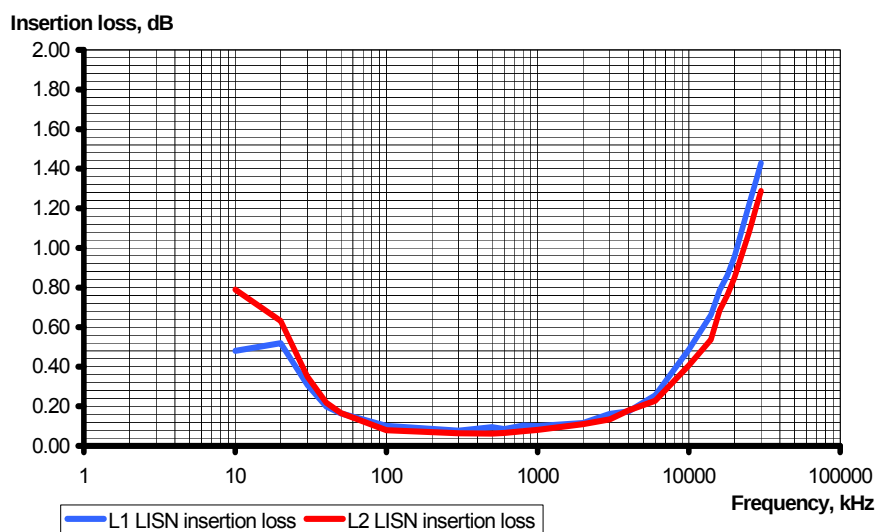

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
Cable coaxial, RG-214/U, N type-N type, 17 m
Teldor, HL 3612

Frequency, GHz	Cable loss, dB
0.1	0.05
0.5	0.07
1	0.10
3	0.22
5	0.29
10	0.39
30	0.68
50	0.90
100	1.27
150	1.58
200	1.80
250	2.12
300	2.36
350	2.60
400	2.82
450	2.99
500	3.23
550	3.40
600	3.56
650	3.71
700	3.90
750	4.04
800	4.23
850	4.39
900	4.55
950	4.65
1000	4.79

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6 m
Alpha Wire, HL 3622

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	2100	2.95	4400	4.99
30	0.24	2200	2.99	4500	5.00
50	0.32	2300	3.11	4600	5.17
100	0.47	2400	3.16	4700	5.18
200	0.70	2500	3.31	4800	5.33
300	0.88	2600	3.36	4900	5.34
400	1.05	2700	3.46	5000	5.50
500	1.21	2800	3.52	5100	5.56
600	1.36	2900	3.65	5200	5.76
700	1.49	3000	3.70	5300	5.76
800	1.63	3100	3.82	5400	5.85
900	1.72	3200	3.88	5500	5.88
1000	1.84	3300	3.99	5600	5.96
1100	1.96	3400	4.08	5700	6.02
1200	2.06	3500	4.19	5800	6.06
1300	2.15	3600	4.28	5900	6.14
1400	2.28	3700	4.42	6000	6.17
1500	2.35	3800	4.40	6100	6.28
1600	2.43	3900	4.51	6200	6.36
1700	2.57	4000	4.62	6300	6.47
1800	2.62	4100	4.70	6400	6.51
1900	2.75	4200	4.78	6500	6.65
2000	2.80	4300	4.83		

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
BB	broad band
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PCB	printed circuit board
PM	pulse modulation
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
VA	volt-ampere
WB	wideband

END OF DOCUMENT