

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan  
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM120400194501  
Page: 1 of 13

## FCC REPORT

**Application No.:** SZEM1204001945TX  
**Applicant:** Create Marvel Industry Ltd  
**Manufacturer:** Create Marvel Industry Ltd  
**Factory:** Jin Tong Le R/C Model factory  
**Product Name:** NAPA hydro boat  
**Model No.(EUT):** 99-0413  
**FCC ID:** GJOCMFG99-041327  
**Standards:** FCC CFR Title 47 Part 15 (2010)  
**Date of Receipt:** 2012-04-20  
**Date of Test:** 2012-04-27 to 2012-05-21  
**Date of Issue:** 2012-05-31

<b>Test Result:</b>	<b>PASS *</b>
---------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Radiated Emission (25MHz to 1GHz)</b>	FCC CFR Title 47 Part 15C Section 15.227	ANSI C63.10 (2009)	PASS
<b>Occupied Bandwidth</b>	FCC CFR Title 47 Part 15C Section 15.215	ANSI C63.10 (2009)	PASS

The EUT passed all tests after modification, see picture below:

Add two capacitors CN1, C2 and replace two capacitors C3 and C5 with new ones for the transmitter as the following figure shown.

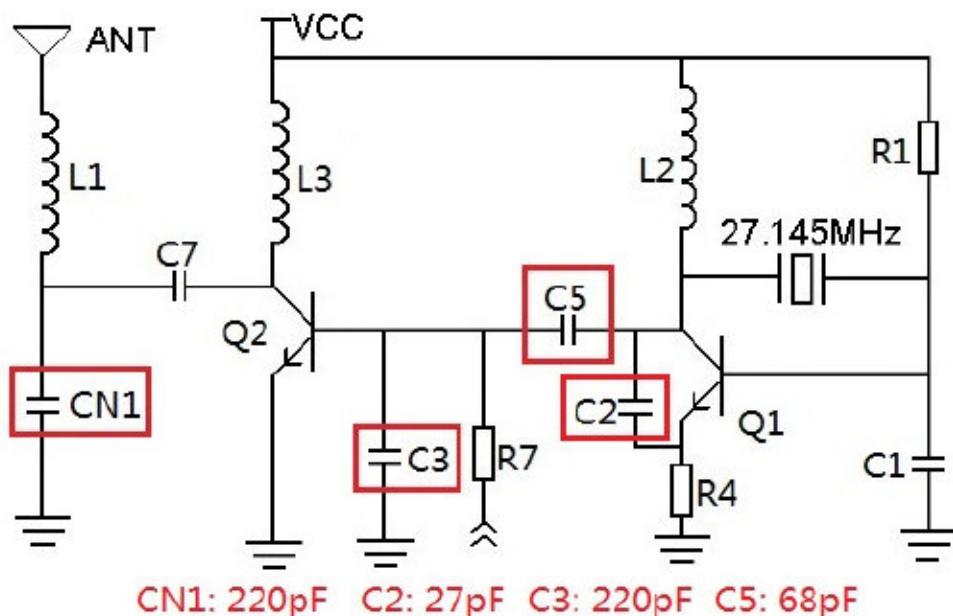

### **3 Contents**

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 TEST SUMMARY</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>4</b>
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF EUT .....	4
4.3 TEST ENVIRONMENT AND MODE .....	4
4.4 DESCRIPTION OF SUPPORT UNITS .....	4
4.5 TEST LOCATION .....	5
4.6 TEST FACILITY .....	5
4.7 DEVIATION FROM STANDARDS .....	5
4.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	5
4.10 TEST INSTRUMENTS LIST .....	6
<b>5 TEST RESULT &amp; MEASUREMENT DATA</b> .....	<b>7</b>
5.1 ANTENNA REQUIRMENT .....	7
5.2 RADIATED EMISSIONS .....	8
5.3 OCCUPIED BANDWIDTH .....	12-13

## 4 General Information

### 4.1 Client Information

Applicant:	Create Marvel Industry Ltd
Address of Applicant:	FLAT/RM B, 6/F, TEDA BUILDING, 87 WING LOK STREET, SHEUNG WAN, HONG KONG
Manufacturer:	Create Marvel Industry Ltd
Address of Manufacturer:	715 unit, 4 Block, Long Ling Shan Zhuang, Buji Town, Sheng zheng city
Factory:	Jin Tong Le R/C Model factory
Address of Factory:	ChengHai BaTou XingDa Industry Zone, Shan Tou

### 4.2 General Description of EUT

Name:	NAPA hydro boat
Trade Mark :	First Gear
Model No.:	99-0413
Sample Type:	Portable production
Operation Frequency:	27.145MHz
Channel Number:	1
Antenna Type:	Integral
Power Supply:	DC9.0V (1 x 9.0V "6F22" Size Battery)
Test Voltage:	9.0V DC

### 4.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
Test mode:	
Transmitting mode:	Keep the EUT transmitted continued modulation signal.

### 4.4 Description of Support Units

The EUT has been tested independent unit.

## 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,  
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

## 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

The EUT passed all tests after modification.

## 4.9 Other Information Requested by the Customer

None.



## 4.10 Test Instruments List


RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2013-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17
8	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2012-10-28

RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23
2	Coaxial cable	SGS	N/A	SEL0028	2013-05-29

General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2012-10-27
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-10-27
3	Barometer	ChangChun	DYM3	SEL0088	2013-05-17

## 5 Test Result & Measurement Data

### 5.1 Antenna requirement
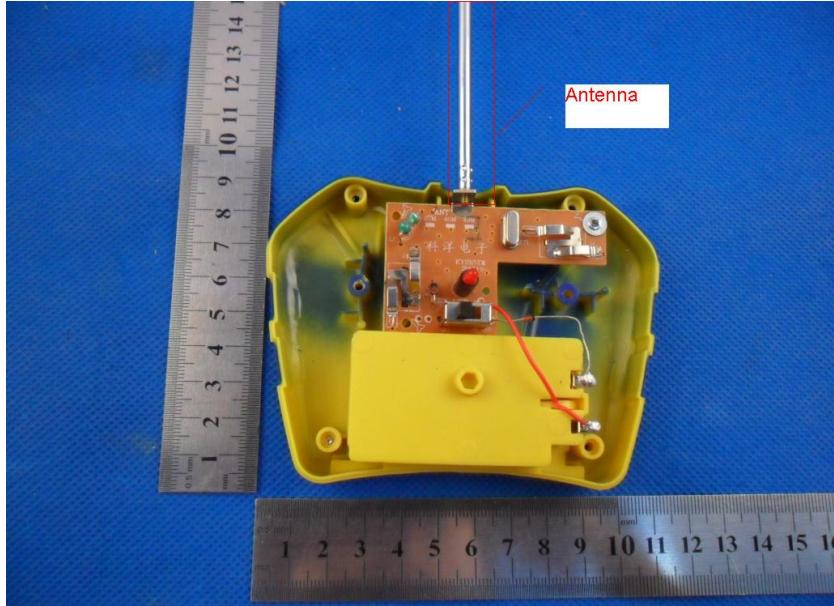
<b>Standard requirement:</b>	FCC Part15 C Section 15.203
15.203 Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
<b>EUT Antenna:</b>	

## 5.2 Radiated Emissions

<b>Test Requirement:</b>	FCC Part15 C Section 15.227				
<b>Test Method:</b>	ANSI C63.10: 2009				
<b>Measurement Distance:</b>	3m (Semi-Anechoic Chamber)				
<b>ERP Limit:</b>	Carrier Power will not exceed 80dBuV/m at 3m (Average).				
<b>Out of Band Emissions Limit:</b>	Out of band emissions shall not exceed:				
	Frequency	Limit (dBuV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
<b>Receiver Setup:</b>	74.0				
	Frequency	Detector	RBW	VBW	Remark
	25MHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
<b>Test Procedure:</b>	Above 1GHz	Peak	1MHz	3MHz	Peak Value
	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.				
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.				
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.				
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.				
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.				
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				

g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.

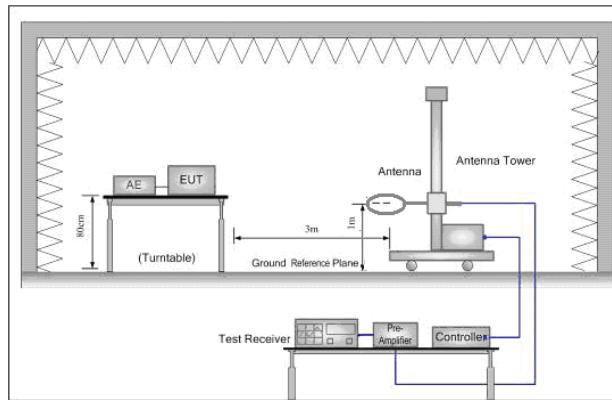
**Test Setup:**


Figure 1. Below 30MHz

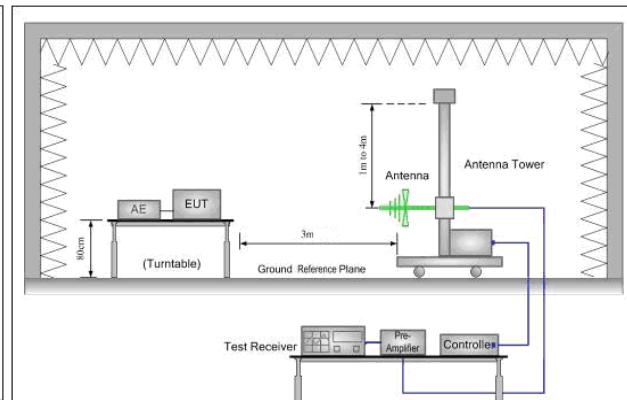


Figure 2. 30MHz to 1GHz

<b>Test Mode:</b>	Transmitting mode
<b>Instruments Used:</b>	Refer to section 4.10 for details
<b>Test Result:</b>	Pass


**27.145MHz Mode**

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10: 2009. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

**Test Result:**
**Intentional emission**

<b>Test Frequency (MHz)</b>	<b>Peak (dB<math>\mu</math>V/m)</b>		<b>Limits (dB<math>\mu</math>V/m)</b>	<b>Margin (dB)</b>	
	Vertical	Horizontal		Vertical	Horizontal
27.145	78.33	70.62	100.00	21.67	29.38

<b>Test Frequency (MHz)</b>	<b>Average (dB<math>\mu</math>V/m)</b>		<b>Limits (dB<math>\mu</math>V/m)</b>	<b>Margin (dB)</b>	
	Vertical	Horizontal		Vertical	Horizontal
27.145	72.30	64.79	80.00	07.70	15.21

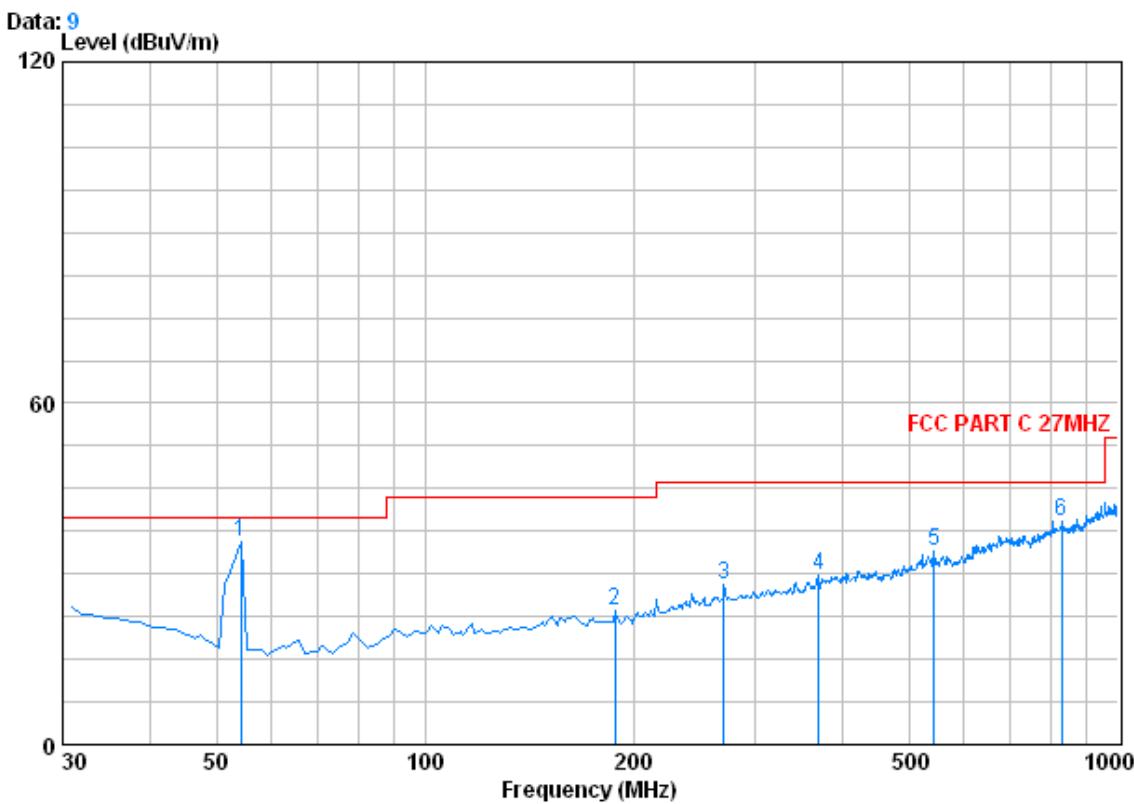**Out of Band Emissions****Vertical**

Condition : FCC PART C 27MHZ 3m 0042673 VERTICAL

JOB NO. : 1945TX

MODE : TX ON

Freq	Cable		Antenna	Preamp	Read	Limit	Line	Over
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	
1	0	54.250	0.80	7.64	27.28	54.37	35.53	40.00 -4.47
2		187.825	1.38	10.06	26.74	38.99	23.69	43.50 -19.81
3		269.725	1.77	12.70	26.48	40.11	28.10	46.00 -17.90
4		370.150	2.12	15.91	26.93	38.74	29.84	46.00 -16.16
5		542.725	2.65	18.78	27.63	40.05	33.85	46.00 -12.15
6	0	830.350	3.34	22.40	27.13	40.66	39.27	46.00 -6.73

**Horizontal**

Data: 10

Level (dBuV/m)

120

60

0

FCC PART C 27MHZ

30 50 100 200 500 1000

Frequency (MHz)

Condition : FCC PART C 27MHZ 3m 0042673 HORIZONTAL  
JOB NO. : 1945TX  
MODE : TX ON


Freq	Cable	Antenna	Preamp	Read	Limit	Line	Over	
	Loss	Factor	Factor	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	54.250	0.80	7.64	27.28	41.13	22.29	40.00	-17.71
2	113.725	1.24	8.33	27.11	38.47	20.93	43.50	-22.57
3	242.425	1.64	12.07	26.56	39.49	26.64	46.00	-19.36
4	476.425	2.51	17.80	27.58	38.38	31.12	46.00	-14.88
5	643.150	2.79	20.57	27.48	38.73	34.61	46.00	-11.39
6	799.150	3.20	22.09	27.30	39.83	37.82	46.00	-8.18

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

### 5.3 Occupied Bandwidth
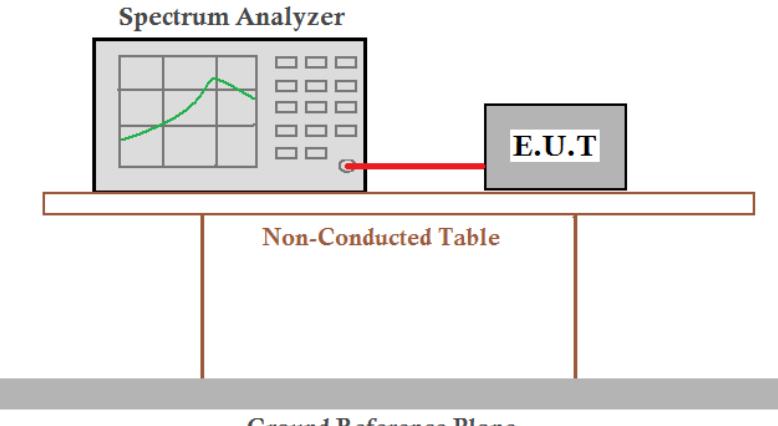
<b>Test Requirement:</b>	FCC Part 15 C Section 15.215 (C)
<b>Test Method:</b>	ANSI C63.10: 2009
<b>Limit:</b>	Operation within the band 26.960 – 27.280 MHz
<b>Requirement :</b>	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through §15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.
<b>Test Setup:</b>	
<b>Test Mode:</b>	Transmitter mode
<b>Instruments Used:</b>	Refer to section 4.10 for details
<b>Test Result:</b>	Pass

**Test Result:**
