

FCC IC Test Report

Report No.: FCC_IC_RF_SL19102501-XIR-017_colocation

XT3182D FCC ID: GKM-XT3182D

XT3182D IC: 10281A-XT3182D

Quectel FCC ID: XMR201706SC20A

Quectel IC: 10224A-201707SC20A

Test Model: XT3182D

Received Date: 12/2/2019

Test Date: 12/5/2019 and 12/19/2019

Issued Date: 12/19/2019

Applicant: Xirgo Technologies, LLC

Address: 188 Camino Ruiz, Camarillo CA 93012

Manufacturer: Xirgo Technologies, LLC

Address: 188 Camino Ruiz, Camarillo CA 93012

Issued By: Bureau Veritas Consumer Products Services, Inc.

Lab Address: 775 Montague Expressway, Milpitas, CA 95035

Test Location (1): 775 Montague Expressway, Milpitas, CA 95035

**FCC Registration /
Designation Number:** 540430

ISED# / CAB identifier: 4842D



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information.....	6
3.1 General Description of EUT	6
3.2 Description of Test Modes.....	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	8
3.3 Description of Support Units	8
3.3.1 Configuration of System under Test	8
3.4 General Description of Applied Standards	9
4 Test Types and Results	10
4.1 Radiated Emission	10
4.1.1 Limits of Radiated Emission and Bandedge Measurement	10
4.1.2 Test Instruments	11
4.1.3 Test Procedures.....	12
4.1.4 Deviation from Test Standard	12
4.1.5 Test Setup.....	12
4.1.6 EUT Operating Conditions.....	13
4.1.7 Test Results	14
5 Pictures of Test Arrangements.....	15
Appendix – Information on the Testing Laboratories	16

Release Control Record

Issue No.	Description	Date Issued
FCC_IC_RF_SL19102501-XIR-017_colocation	Original Release	12/19/2019

1 Certificate of Conformity

Product: Smart Trailer Platform with Integrated Cargo Sensor

Brand: Xirgo Technologies, LLC

Test Model: XT3182D

Sample Status: Engineering sample

Applicant: Xirgo Technologies, LLC

Test Date: 12/5/2019 - 12/6/2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

FCC Part 27

RSS-247 Issue 2, February 2017

ANSI C63.10: 2013

RSS-Gen Issue 5, March 2019

558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services, Inc., Milpitas Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** 12/19/2019
Deon Dai / Test Engineer

Approved by :  , **Date:** 12/19/2019
Chen Ge / Engineer Reviewer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247) RSS 247 Issue2, RSS Gen Issue5			
FCC / IC Clause	Test Item	Result	Remarks
FCC Part 15 FCC Part 27 RSS-GEN	Radiated Emissions and Band	PASS	Meet the requirement of limit.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.51dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.73dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.64dB
	6GHz ~ 18GHz	4.82dB
	18GHz ~ 40GHz	4.91dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Cargo Sensor
Brand	Xirgo Technologies, LLC
Test Model	XT3182D
Identification No. of EUT	53793268
Status of EUT	Engineering Sample
Power Supply Rating	12 V DC

External Antenna Description

The MA2010.A.LBCG.001 antenna is a 4-in-1, custom profile, fully IP67 waterproof external antenna for use on vehicles and containers for telematics, transportation and remote monitoring applications. The MA2010.A.LBCG.001 delivers best in class LTE, GNSS and WILAN antenna performance.

3.2 Description of Test Modes

Internal Antenna: BT + WLAN
External Antenna: BT + WLAN + LTE

3.2.1 Test Mode Applicability and Tested Channel Detail

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0,19,39	GFSK	1

3.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Acer	N17Q1	NXGNPAA0167300AA1C7600	DOC	Provided by lab
B.	Laptop Power Supply	LITEON	PA-1450-26	ADT KP045030107201F23FPE01	NA	Provided by lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RS 232 Cable	1	1.82	No	0	Supplied by client
2.	USB Jumper Cable	1	1.52	No	0	Supplied by client
3.	External Antenna Cable	4	1.82	No	0	Supplied by client

Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

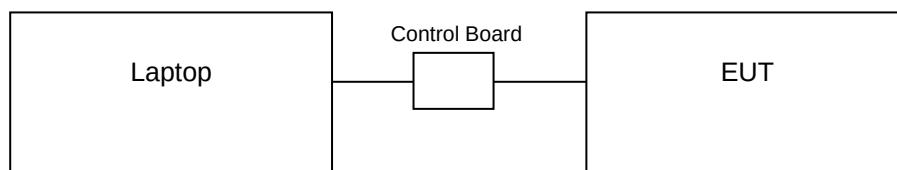

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR FCC Part 15, Subpart C (Section 15.247)

FCC Part 27

RSS 247 Issue2, February 2017

ANSI C63.10: 2013

RSS Gen Issue5, March 2019

558074 D01 15.247 Meas Guidance v05r02

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
EMI Test Receiver ROHDE & SCHWARZ	ESIB 40	100179	08/28/2019	08/28/2020
Spectrum Analyzer KEYSIGHT	N9030B	MY57140374	07/22/2019	07/22/2020
Hybrid Antenna SUNAR	JB6	A111717	03/09/2019	03/09/2020
DRG Horn Antenna ETS LINDGREN	3117	214309	11/22/2019	11/22/2020
Preamplifier RF-LAMBDA	RAMP00M50GA	17032300047	09/19/2019	09/19/2020
Preamplifier RF-BAY	LPA-6-30	11170602	05/06/2019	05/06/2020

4.1.3 Test Procedures

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard

No deviation.

4.1.5 Test Setup

For Radiated emission above 1GHz

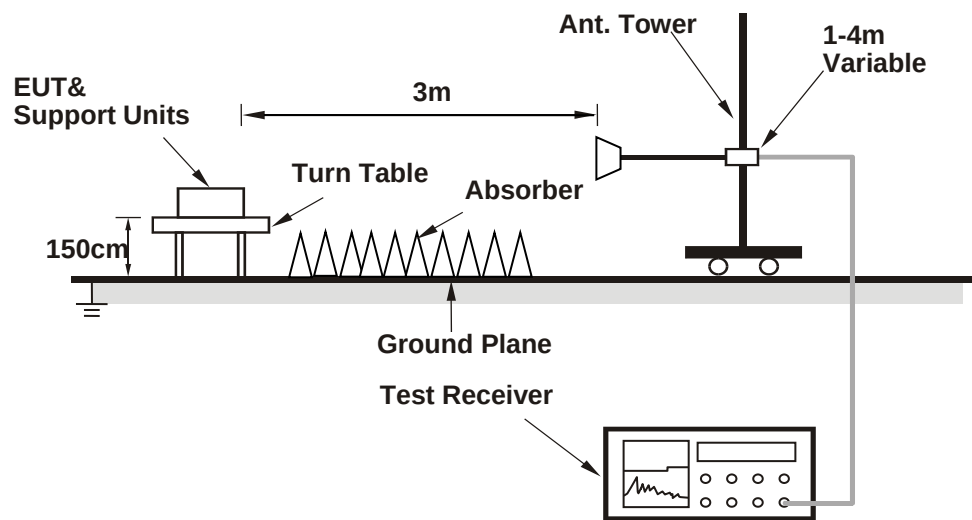

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Notebook Computer which is placed on remote site.
- b. Controlling software has been activated to set the EUT on specific status.

4.1.7 Test Results

ABOVE 1GHz TEST DATA External antenna:

BT-LE (GFSK)

CHANNEL	WLAN + BT + LTE	DETECTOR FUNCTION	Peak
FREQUENCY RANGE	1GHz ~ 25GHz		Average
REMARK	External Antenna		

ANTENNA POLARITY & test distance: HORIZONTAL& VERTICAL at 3 m

Frequency [MHz]	P ol	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit\AV [dB(uV/m)]	Limit\PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1751.17	H	37.7	50.5	-11	26.7	39.5	54	74	-27.3	-34.5	280	313
2383.10	H	36.8	50.2	-9.9	26.9	40.3	54	74	-27.1	-33.7	313	10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Cable Loss (dB) + AF (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Preamplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

ABOVE 1GHz TEST DATA Internal antenna:

CHANNEL	BT + WLAN	DETECTOR FUNCTION	Peak
FREQUENCY RANGE	1GHz ~ 25GHz		Average
REMARK	Internal Antenna		

ANTENNA POLARITY & test distance: HORIZONTAL& VERTICAL at 3 m

Frequency [MHz]	P ol	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Limit\AV [dB(uV/m)]	Limit\PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
2977.10	V	47.1	49.5	-7.8	39.3	41.7	54	74	-14.7	-32.3	133	102
2980.64	H	35.9	49.2	-7.8	28.1	41.4	54	74	-25.9	-32.6	102	210

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Cable Loss (dB) + AF (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Preamplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

5 Pictures of Test Arrangements

Please see setup photo file.

Appendix – Information on the Testing Laboratories

Bureau Veritas is a global leader in testing, inspection and certification (TIC) services. We help businesses improve safety, sustainability and productivity; and our clients include the majority of leading brands in retail, manufacturing and other industries. With a presence in every major country around the world, our quality assurance and compliance solutions are vital in helping our customers enhance product quality and concept-to-consumer journeys. We also assist with increasing speed to market, profitability and brand equity throughout the supply chain. Bureau Veritas is a leading wireless/IoT testing, inspection, audit and certification provider, with a global network of test laboratories to support the IoT industry in areas of connectivity, security, interoperability as well as quality, health & safety, and environmental/chemical requirements.

If you have any comments, please feel free to contact us at the following:

Milpitas EMC/RF/Safety/Telecom Lab

775 Montague Expressway, Milpitas, CA 95035
Tel: +1 408 526 1188

Sunnyvale OTA/Bluetooth Lab

1293 Anvilwood Avenue, Sunnyvale, CA
94089
Tel: +1 669 600 5293

Littleton EMC/RF/Safety/Environmental Lab

1 Distribution Center Cir #1, Littleton, MA 01460
Tel: +1 978 486 8880

Irvine OTA/PTCRB/Bluetooth/V2X Lab

15 Musick, Irvine, CA 92618
Tel: +1 949 716 6512

Email: sales.eaw@us.bureauveritas.com

Web Site: www.cpsusa-bureauveritas.com

The address and road map of all our labs can be found in our web site also.

--- END ---