



**FCC 47 CFR PART 22 SUBPART H AND PART 24 SUBPART E
&
INDUSTRY CANADA RSS-132 & RSS-133**

TEST REPORT

For

Tablet Computer

Trade Name: Lenovo

Model: TP00064B

Issued to

COMPAL ELECTRONICS INC

No.581, Ruiguang Rd., Neihu District, Taipei City 11492, Taiwan (R.O.C)

Issued by

Compliance Certification Services Inc.

**No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)**

<http://www.ccsrf.com>

service@ccsrf.com

Issued Date: April 20, 2015



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 20, 2015	Initial Issue	ALL	Doris Chu



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES	6
3.4 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
4.2 MEASUREMENT EQUIPMENT USED	8
4.3 MEASUREMENT UNCERTAINTY	8
5. FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES	9
5.2 EQUIPMENT	9
5.3 LABORATORY ACCREDITATIONS AND LISTING	9
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	10
6. SETUP OF EQUIPMENT UNDER TEST	11
6.1 SETUP CONFIGURATION OF EUT	11
6.2 SUPPORT EQUIPMENT.....	11
7. FCC PART 22 & 24 REQUIREMENTS & INDUSTRY CANADA RSS-132 & RSS-133 ...	12
7.1 ERP & EIRP MEASUREMENT	12
7.2 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	21
8. APPENDIX II PHOTOGRAPHS OF TEST SETUP	107
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: COMPAL ELECTRONICS INC
No.581, Ruiguang Rd., Neihu District, Taipei City 11492,
Taiwan (R.O.C)

Manufacturer: COMPAL ELECTRONICS INC
No.581, Ruiguang Rd., Neihu District, Taipei City 11492,
Taiwan (R.O.C)

Equipment Under Test: Tablet Computer

Trade Name: Lenovo

Model Number: TP00064B

Date of Test: March 6 ~ 31, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR PART 22 SUBPART H AND PART 24 SUBPART E & IC RSS-132 Issue 3: January, 2013 and IC RSS-133 Issue 6: January, 2013	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rule FCC PART 22 Subpart H, PART 24 Subpart E, IC RSS-132 Issue 3 and IC RSS-133 Issue 6.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

Miller Lee
Manager
Compliance Certification Services Inc.

Angel Cheng
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Tablet Computer	
Trade Name	Lenovo	
Model Number	TP00064B	
Model Discrepancy	N/A	
WLAN Module	Sierra Wireless / EM7345	
Received Date	March 2, 2015	
Power Supply	Power form host device	
Frequency Range	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~1909.2MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855MHz ~1905MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860MHz ~1900MHz
	LTE Band 5 Channel Bandwidth: 1.4MHz	824.7MHz ~848.2MHz
	LTE Band 5 Channel Bandwidth: 5MHz	826.5MHz ~846.5MHz
	LTE Band 5 Channel Bandwidth: 10MHz	829MHz ~844MHz
Modulation Technique	LTE Band 2	QPSK, 16QAM
	LTE Band 5	QPSK, 16QAM
Maximum ERP Power	LTE Band 2 Channel Bandwidth: 1.4MHz	QPSK: 27.91dBm 16QAM: 27.99dBm
	LTE Band 2 Channel Bandwidth: 5MHz	QPSK: 25.16dBm 16QAM: 26.09dBm
	LTE Band 2 Channel Bandwidth: 10MHz	QPSK: 23.73dBm 16QAM: 24.92dBm
	LTE Band 2 Channel Bandwidth: 20MHz	QPSK: 22.39dBm 16QAM: 23.20dBm
Maximum ERP Power	LTE Band 5 Channel Bandwidth: 1.4MHz	QPSK: 23.41dBm 16QAM: 22.91dBm
	LTE Band 5 Channel Bandwidth: 5MHz	QPSK: 20.30dBm 16QAM: 21.18dBm
	LTE Band 5 Channel Bandwidth: 10MHz	QPSK: 19.60dBm 16QAM: 19.52dBm
Release	9	
Antenna Specification	TE Connectivity / DC33001MT00 LTE Band 2: Gain: 2.23dBi LTE Band 5: Gain: -1.07dBi	
Antenna Type	Monopole Antenna	

Remark: The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.



3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.10: 2013 for IC, ANSI C63.10: 2009 for FCC , TIA/EIA-603-C: 2004 and FCC CFR 47, Part 2 and Part 22 Subpart H & Part 24 Subpart E.

The tests documented in this report were performed in accordance with IC RSS-132, SPSR503, RSS-133, SPSR510 and ANSI C63.10: 2013 for IC, ANSI C63.10: 2009 for FCC and TIA/EIA-603-C.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in ANSI C63.10: 2013 for IC, ANSI C63.10: 2009 for FCC. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013 for IC, ANSI C63.10: 2009 for FCC.



3.4 DESCRIPTION OF TEST MODES

The EUT (model: TP00064B) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

LTE Band 2: 1850MHz ~ 1910MHz

Three channels had been tested for each channel bandwidth.

Channel Bandwidth	1.4MHz		5MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low channel (L)	18607	1850.7	18625	1852.5
Middle channel (M)	18900	1880	18900	1880
High channel (H)	19192	1909.2	19175	1907.5

Channel Bandwidth	10MHz		20MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low channel (L)	18650	1855	18700	1860
Middle channel (M)	18900	1880	18900	1880
High channel (H)	19150	1905	19100	1900

LTE Band 5: 824MHz ~ 849MHz

Three channels had been tested for each channel bandwidth.

Channel Bandwidth	1.4MHz		5MHz		10MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low channel (L)	20407	824.7	20425	826.5	20450	829
Middle channel (M)	20525	836.5	20525	836.5	20525	836.5
High channel (H)	20642	848.2	20625	846.5	20600	844

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Test items for conducted and radiated emission were performed for report. Other testing data please refer to module (Brand: Sierra, Model: EM7345, FCC ID: N7NEM7345 and IC: 2417C-EM7345)



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4407B	MY44212686	03/17/2016
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1042473	03/05/2015
Bilog Antenna	Sunol Sciences	JB3	A030205	08/18/2015
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/09/2015
Horn Antenna	EMCO	3117	00055165	01/26/2016
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW 500	116875	05/27/2015

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 for IC, ANSI C63.10: 2009 for FCC and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.


Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.

**5.4 TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1309) to perform FCC Part 15 measurements	 FCC MRA: TW1309
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7. FCC PART 22 & 24 REQUIREMENTS & INDUSTRY CANADA RSS-132 & RSS-133

7.1 ERP & EIRP MEASUREMENT

LIMIT

According to FCC §2.1046

FCC 22.913(b): The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts.


RSS-132 § 4.4 The maximum (ERP) shall be 6.3 Watts for mobile stations.

FCC 24.232(b): The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.


RSS133 § 6.4: Mobile stations and hand-held portables are limited to 2 watts maximum (EIRP).

Test Configuration

Below 1 GHz

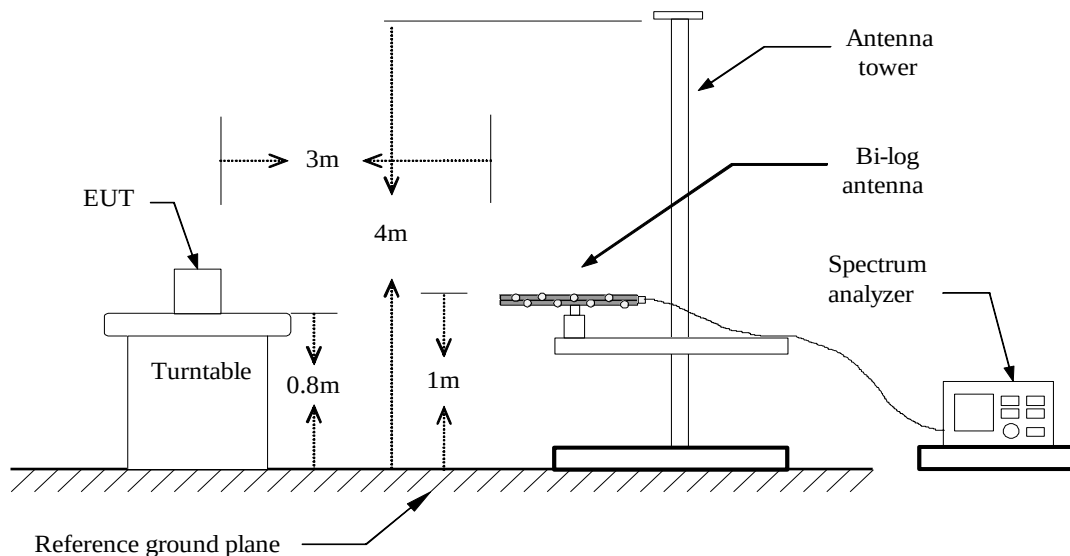


Above 1 GHz

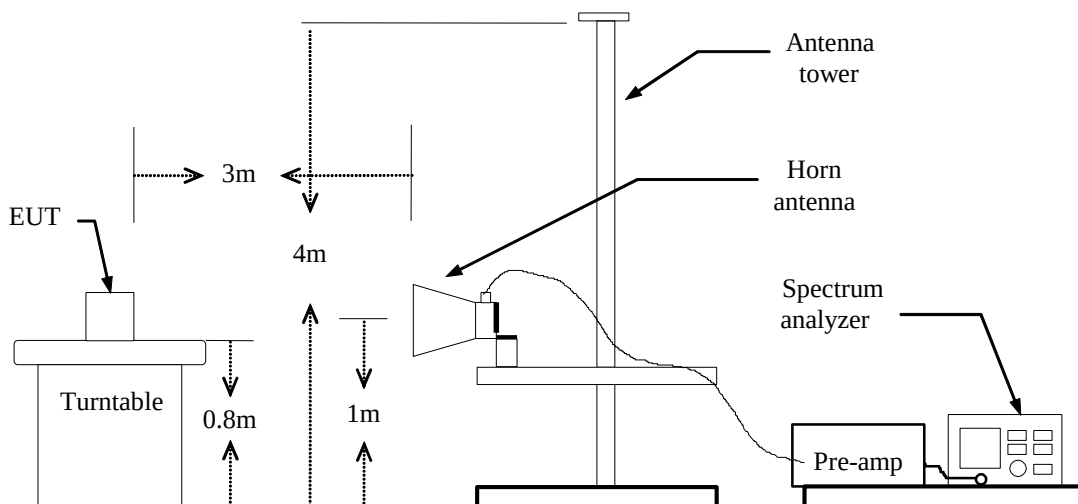



For Substituted Method Test Set-UP

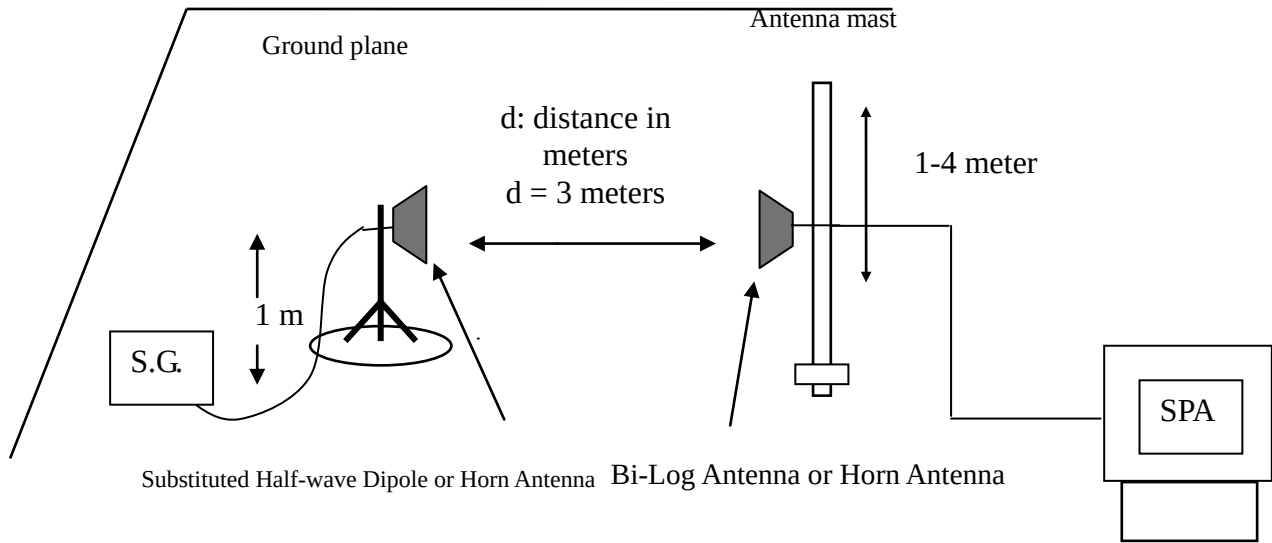

TEST PROCEDURE

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement of the EUT, the resolution bandwidth was set to 5MHz and the average bandwidth was set to 50MHz. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824-849MHz, and EIRP in frequency band 1851.25 –1910MHz were measured using a substitution method. The EUT was replaced by half-wave dipole (824-849MHz) or horn antenna (1851.25-1910MHz) connected to a signal generator. The spectrum analyzer reading was recorded and ERP/EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)} - 2.15$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

TEST RESULTS

No non-compliance noted.

**LTE BAND 5****Channel Bandwidth: 1.4MHz / QPSK**

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
20407	824.5000	V	20.36	3.39	6.24	23.21	38.45	-15.24
	824.5700	H	14.22	3.39	6.24	17.07	38.45	-21.38
20525	836.3300	V	20.45	3.4	6.36	*23.41	38.45	-15.04
	836.8200	H	13.67	3.4	6.37	16.64	38.45	-21.81
20642	848.0900	V	19.84	3.4	6.4	22.84	38.45	-15.61
	848.5800	H	13.56	3.4	6.4	16.56	38.45	-21.89

Channel Bandwidth: 1.4MHz / 16QAM

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
20407	824.9900	V	12.38	3.39	6.25	15.24	38.45	-23.21
	824.6400	H	20.06	3.39	6.24	*22.91	38.45	-15.54
20525	836.6100	V	12.22	3.4	6.37	15.19	38.45	-23.26
	836.6800	H	19.31	3.4	6.37	22.28	38.45	-16.17
20642	848.1600	V	12.76	3.4	6.4	15.76	38.45	-22.69
	848.1600	H	18.73	3.4	6.4	21.73	38.45	-16.72

Remark:

1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = S.G Level + Gain of Substitution horn + TX cable loss.
3. The value in bold is the worst.

**Channel Bandwidth: 5MHz / QPSK**

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
20425	824.9900	V	17.19	3.39	6.25	20.05	38.45	-18.40
	824.9900	H	11.01	3.39	6.25	13.87	38.45	-24.58
20525	837.8000	V	17.33	3.41	6.38	*20.30	38.45	-18.15
	838.2200	H	10.38	3.41	6.38	13.35	38.45	-25.10
20625	845.0800	V	17.22	3.4	6.4	20.22	38.45	-18.23
	845.2900	H	10.9	3.4	6.4	13.90	38.45	-24.55

Channel Bandwidth: 5MHz / 16QAM

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
20425	824.7100	V	9.59	3.39	6.24	12.44	38.45	-26.01
	824.5700	H	17.49	3.39	6.24	20.34	38.45	-18.11
20525	835.3500	V	9.09	3.4	6.35	12.04	38.45	-26.41
	835.0000	H	16.97	3.4	6.35	19.92	38.45	-18.53
20625	845.0800	V	11.34	3.4	6.4	14.34	38.45	-24.11
	844.6600	H	18.19	3.41	6.4	*21.18	38.45	-17.27

Remark:

1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = S.G Level + Gain of Substitution horn + TX cable loss.
3. The value in bold is the worst.

**Channel Bandwidth: 10MHz / QPSK**

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
20450	825.9000	V	16.42	3.39	6.26	19.29	38.45	-19.16
	825.8300	H	10.68	3.39	6.25	13.54	38.45	-24.91
20525	839.5500	V	16.61	3.41	6.4	*19.60	38.45	-18.85
	839.8300	H	10.39	3.41	6.4	13.38	38.45	-25.07
20600	841.2300	V	15.88	3.41	6.4	18.87	38.45	-19.58
	841.2300	H	9.68	3.41	6.4	12.67	38.45	-25.78

Channel Bandwidth: 10MHz / 16QAM

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
20450	824.9200	V	8.17	3.39	6.25	11.03	38.45	-27.42
	825.4100	H	16.66	3.39	6.25	*19.52	38.45	-18.93
20525	832.5500	V	7.74	3.39	6.32	10.67	38.45	-27.78
	833.8100	H	13.26	3.4	6.34	16.20	38.45	-22.25
20600	846.8300	V	9.61	3.4	6.4	12.61	38.45	-25.84
	843.9600	H	16.16	3.41	6.4	19.15	38.45	-19.30

Remark:

1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = S.G Level + Gain of Substitution horn + TX cable loss.
3. The value in bold is the worst.



LTE BAND 2

Channel Bandwidth: 1.4MHz / QPSK

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
18607	1850.400	V	25.89	5.37	5.67	26.19	33.00	-6.81
	1850.640	H	25.96	5.37	5.67	26.26	33.00	-6.74
18900	1879.800	V	25.8	5.42	5.62	26.00	33.00	-7.00
	1880.040	H	20.02	5.42	5.62	20.22	33.00	-12.78
19192	1909.200	V	26.68	5.47	5.56	26.77	33.00	-6.23
	1909.200	H	27.82	5.47	5.56	*27.91	33.00	-5.09

Channel Bandwidth: 1.4MHz / 16QAM

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
18607	1851.000	V	26	5.37	5.67	26.30	33.00	-6.70
	1850.760	H	19.28	5.37	5.67	19.58	33.00	-13.42
18900	1880.280	V	26.27	5.42	5.62	26.47	33.00	-6.53
	1879.920	H	20.35	5.42	5.62	20.55	33.00	-12.45
19192	1909.320	V	27.91	5.48	5.56	*27.99	33.00	-5.01
	1909.560	H	21.6	5.48	5.56	21.68	33.00	-11.32

Remark:

1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = S.G Level + Gain of Substitution horn + TX cable loss.
3. The value in bold is the worst.

**Channel Bandwidth: 5MHz / QPSK**

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
18625	1853.880	V	23.47	5.38	5.66	23.75	33.00	-9.25
	1853.760	H	16.38	5.38	5.66	16.66	33.00	-16.34
18900	1878.360	V	23.83	5.42	5.62	24.03	33.00	-8.97
	1878.720	H	17.38	5.42	5.62	17.58	33.00	-15.42
19175	1905.960	V	25.06	5.47	5.57	*25.16	33.00	-7.84
	1905.960	H	18.3	5.47	5.57	18.40	33.00	-14.60

Channel Bandwidth: 5MHz / 16QAM

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
18625	1854.240	V	24.24	5.38	5.66	24.52	33.00	-8.48
	1852.200	H	17.4	5.37	5.67	17.70	33.00	-15.30
18900	1880.400	V	24.57	5.42	5.62	24.77	33.00	-8.23
	1880.280	H	18.58	5.42	5.62	18.78	33.00	-14.22
19175	1907.760	V	25.99	5.47	5.57	*26.09	33.00	-6.91
	1907.520	H	19.74	5.47	5.57	19.84	33.00	-13.16

Remark:

1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = S.G Level + Gain of Substitution horn + TX cable loss.
3. The value in bold is the worst.

**Channel Bandwidth: 10MHz / QPSK**

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
18650	1858.560	V	22.34	5.38	5.65	22.61	33.00	-10.39
	1858.560	H	15.39	5.38	5.65	15.66	33.00	-17.34
18900	1876.680	V	22.65	5.41	5.62	22.86	33.00	-10.14
	1876.440	H	15.81	5.41	5.62	16.02	33.00	-16.98
19150	1908.480	V	23.64	5.47	5.56	*23.73	33.00	-9.27
	1901.880	H	17.14	5.46	5.58	17.26	33.00	-15.74

Channel Bandwidth: 10MHz / 16QAM

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
18650	1857.960	V	23.31	5.38	5.66	23.59	33.00	-9.41
	1857.000	H	16.35	5.38	5.66	16.63	33.00	-16.37
18900	1877.280	V	23.6	5.41	5.62	23.81	33.00	-9.19
	1876.800	H	17.4	5.41	5.62	17.61	33.00	-15.39
19150	1907.880	V	24.82	5.47	5.57	*24.92	33.00	-8.08
	1907.520	H	18.78	5.47	5.57	18.88	33.00	-14.12

Remark:

1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = S.G Level + Gain of Substitution horn + TX cable loss.
3. The value in bold is the worst.

**Channel Bandwidth: 20MHz / QPSK**

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
18700	1867.320	V	22.11	5.4	5.64	22.35	33.00	-10.65
	1867.800	H	16.11	5.4	5.64	16.35	33.00	-16.65
18900	1872.360	V	21.99	5.41	5.63	22.21	33.00	-10.79
	1875.600	H	15.44	5.41	5.62	15.65	33.00	-17.35
19100	1907.400	V	22.29	5.47	5.57	*22.39	33.00	-10.61
	1907.520	H	16.04	5.47	5.57	16.14	33.00	-16.86

Channel bandwidth: 20MHz / 16QAM

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
18700	1866.360	V	22.3	5.4	5.64	22.54	33.00	-10.46
	1866.240	H	16.17	5.4	5.64	16.41	33.00	-16.59
18900	1875.120	V	22.12	5.41	5.62	22.33	33.00	-10.67
	1879.560	H	16.15	5.42	5.62	16.35	33.00	-16.65
19100	1906.320	V	23.1	5.47	5.57	*23.20	33.00	-9.80
	1901.760	H	17.01	5.45	5.58	17.14	33.00	-15.86

Remark:

1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = S.G Level + Gain of Substitution horn + TX cable loss.
3. The value in bold is the worst.




7.2 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

LIMIT


According to FCC §2.1053, RSS-132 (4.6) & RSS-133 (6.5).

Test Configuration

Below 1 GHz

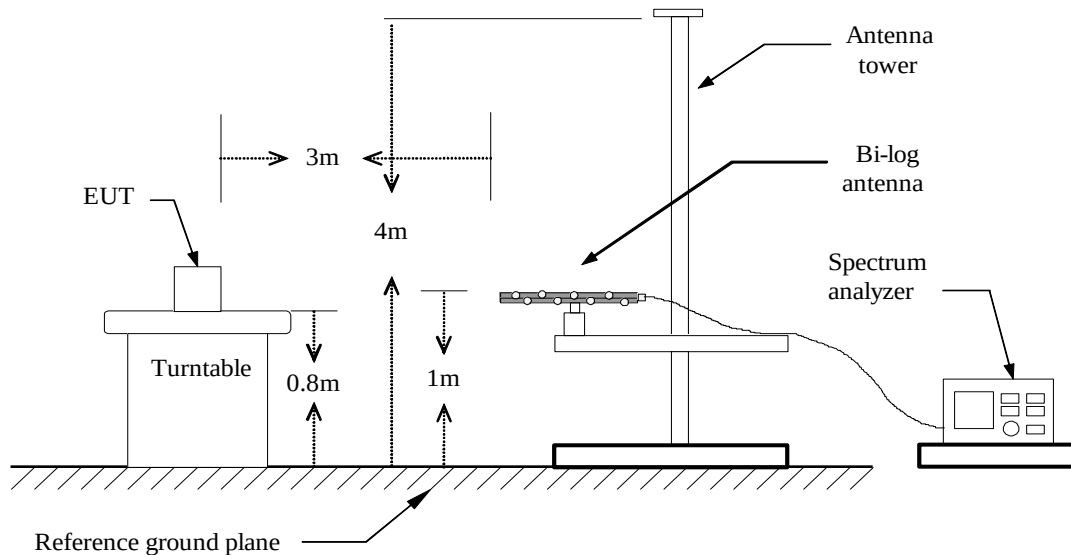


Above 1 GHz

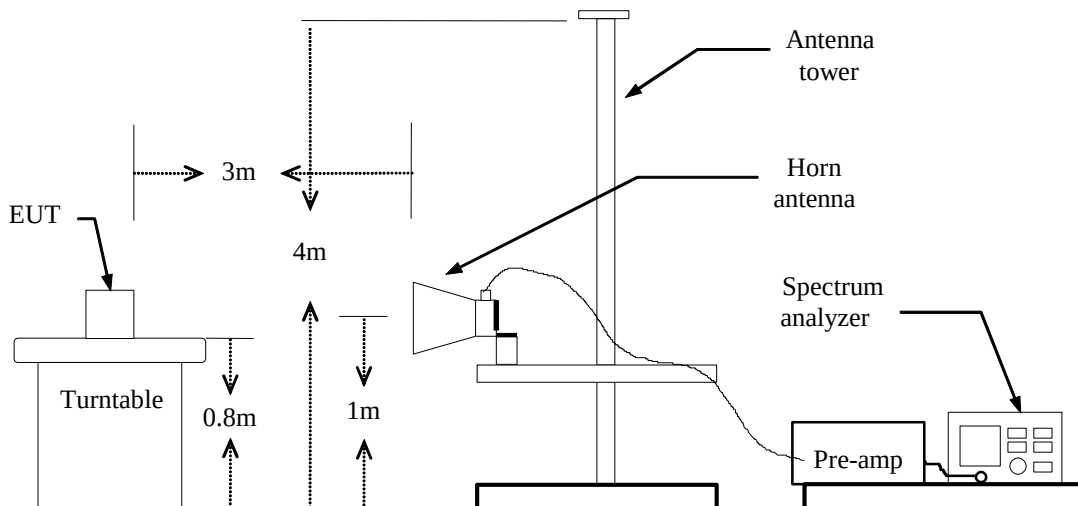



Substituted Method Test Set-up

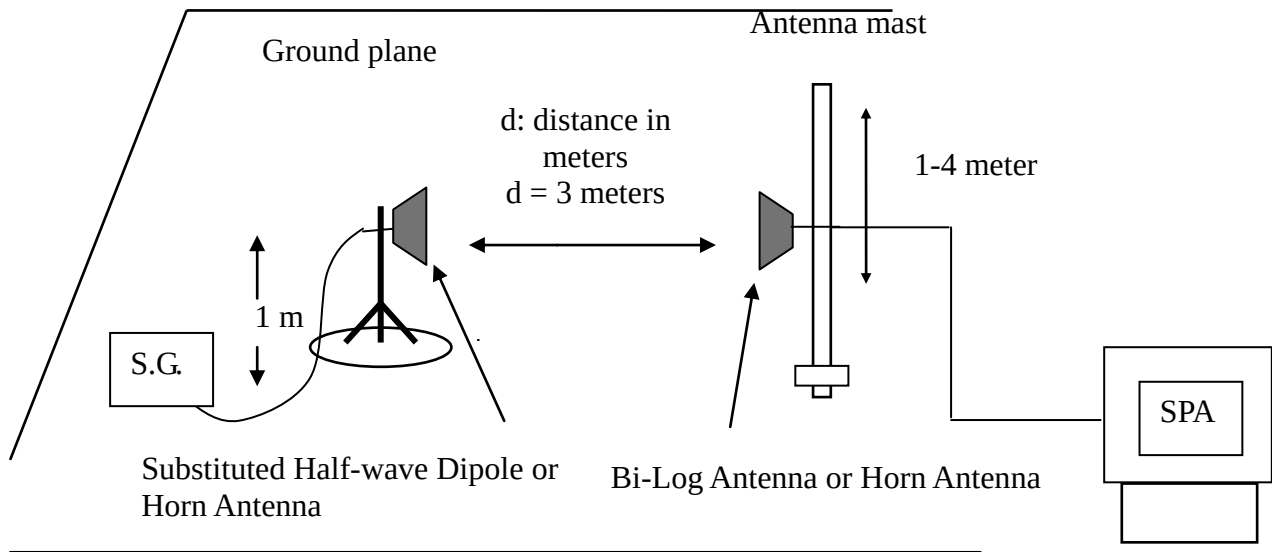

TEST PROCEDURE

The EUT was placed on a non-conductive, the measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

TEST RESULTS

Refer to the attached tabular data sheets.

**Test Results****Below 1GHz****LTE Band 5 / channel bandwidth: 1.4MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
45.5200	-65.32	0.77	-8.09	-74.18	-13.00	-61.18	V
174.5300	-75.52	1.59	3	-74.11	-13.00	-61.11	V
368.5300	-84.98	2.3	5.79	-81.49	-13.00	-68.49	V
400.5400	-77.47	2.4	5.98	-73.89	-13.00	-60.89	V
450.0100	-75.41	2.59	5.72	-72.28	-13.00	-59.28	V
600.3600	-82.61	2.9	6.4	-79.11	-13.00	-66.11	V
44.5500	-63.41	0.76	-8.84	-73.01	-13.00	-60.01	H
130.8800	-70.95	1.35	-1.3	-73.60	-13.00	-60.60	H
176.4700	-76.21	1.59	3.21	-74.59	-13.00	-61.59	H
398.6000	-74.84	2.38	5.98	-71.24	-13.00	-58.24	H
459.7100	-76.56	2.6	5.88	-73.28	-13.00	-60.28	H
645.9500	-78.06	3.02	6.21	-74.87	-13.00	-61.87	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
44.5500	-64.07	0.76	-8.84	-73.67	-13.00	-60.67	V
173.5600	-74.69	1.58	2.9	-73.37	-13.00	-60.37	V
287.0500	-85.5	2.01	5.37	-82.14	-13.00	-69.14	V
401.5100	-77.69	2.4	5.98	-74.11	-13.00	-61.11	V
453.8900	-76.66	2.59	5.79	-73.46	-13.00	-60.46	V
633.3400	-82.12	2.99	6.18	-78.93	-13.00	-65.93	V
46.4900	-64.61	0.78	-7.34	-72.73	-13.00	-59.73	H
127.9700	-70.76	1.33	-1.56	-73.65	-13.00	-60.65	H
173.5600	-75.4	1.58	2.9	-74.08	-13.00	-61.08	H
399.5700	-75.46	2.39	5.98	-71.87	-13.00	-58.87	H
452.9200	-75.94	2.59	5.77	-72.76	-13.00	-59.76	H
618.7900	-78.37	2.94	6.12	-75.19	-13.00	-62.19	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
42.6100	-63.07	0.74	-10.34	-74.15	-13.00	-61.15	V
172.5900	-74.9	1.58	2.8	-73.68	-13.00	-60.68	V
398.6000	-77.48	2.38	5.98	-73.88	-13.00	-60.88	V
450.9800	-75.77	2.59	5.74	-72.62	-13.00	-59.62	V
621.7000	-82.01	2.95	6.13	-78.83	-13.00	-65.83	V
734.2200	-81.07	3.19	6.28	-77.98	-13.00	-64.98	V
45.5200	-63.98	0.77	-8.09	-72.84	-13.00	-59.84	H
126.0300	-70.18	1.32	-1.69	-73.19	-13.00	-60.19	H
172.5900	-75.23	1.58	2.8	-74.01	-13.00	-61.01	H
399.5700	-75.45	2.39	5.98	-71.86	-13.00	-58.86	H
467.4700	-76.35	2.61	5.81	-73.15	-13.00	-60.15	H
612.0000	-78.45	2.94	6.25	-75.14	-13.00	-62.14	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 5MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
45.5200	-65.16	0.77	-8.09	-74.02	-13.00	-61.02	V
174.5300	-75.84	1.59	3	-74.43	-13.00	-61.43	V
402.4800	-76.1	2.41	5.97	-72.54	-13.00	-59.54	V
453.8900	-76.18	2.59	5.79	-72.98	-13.00	-59.98	V
600.3600	-82.52	2.9	6.4	-79.02	-13.00	-66.02	V
719.6700	-81.14	3.17	6.48	-77.83	-13.00	-64.83	V
44.5500	-62.67	0.76	-8.84	-72.27	-13.00	-59.27	H
126.0300	-69.66	1.32	-1.69	-72.67	-13.00	-59.67	H
172.5900	-76.15	1.58	2.8	-74.93	-13.00	-61.93	H
401.5100	-75.49	2.4	5.98	-71.91	-13.00	-58.91	H
450.0100	-75.8	2.59	5.72	-72.67	-13.00	-59.67	H
624.6100	-77.91	2.96	6.15	-74.72	-13.00	-61.72	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
173.5600	-75.25	1.58	2.9	-73.93	-13.00	-60.93	V
270.5600	-85.17	1.98	5.11	-82.04	-13.00	-69.04	V
400.5400	-77.86	2.4	5.98	-74.28	-13.00	-61.28	V
457.7700	-75.55	2.6	5.85	-72.30	-13.00	-59.30	V
644.0100	-82.27	3.02	6.17	-79.12	-13.00	-66.12	V
772.0500	-81.08	3.28	6.32	-78.04	-13.00	-65.04	V
45.5200	-62.41	0.77	-8.09	-71.27	-13.00	-58.27	H
108.5700	-70.79	1.2	-1.51	-73.50	-13.00	-60.50	H
172.5900	-75.43	1.58	2.8	-74.21	-13.00	-61.21	H
370.4700	-81.17	2.3	5.82	-77.65	-13.00	-64.65	H
400.5400	-76.41	2.4	5.98	-72.83	-13.00	-59.83	H
641.1000	-77.39	3.01	6.12	-74.28	-13.00	-61.28	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
43.5800	-63.74	0.75	-9.59	-74.08	-13.00	-61.08	V
175.5000	-75.78	1.59	3.1	-74.27	-13.00	-61.27	V
397.6300	-76.81	2.37	5.99	-73.19	-13.00	-60.19	V
450.9800	-75.44	2.59	5.74	-72.29	-13.00	-59.29	V
600.3600	-82.25	2.9	6.4	-78.75	-13.00	-65.75	V
747.8000	-81.07	3.2	6.1	-78.17	-13.00	-65.17	V
126.0300	-70.35	1.32	-1.69	-73.36	-13.00	-60.36	H
176.4700	-77.34	1.59	3.21	-75.72	-13.00	-62.72	H
277.3500	-80.81	2	5.25	-77.56	-13.00	-64.56	H
401.5100	-74.62	2.4	5.98	-71.04	-13.00	-58.04	H
447.1000	-76.25	2.58	5.76	-73.07	-13.00	-60.07	H
659.5300	-77.98	3.06	6.3	-74.74	-13.00	-61.74	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 10MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
44.5500	-64.77	0.76	-8.84	-74.37	-13.00	-61.37	V
173.5600	-75.14	1.58	2.9	-73.82	-13.00	-60.82	V
379.2000	-84.38	2.31	5.98	-80.71	-13.00	-67.71	V
399.5700	-77.16	2.39	5.98	-73.57	-13.00	-60.57	V
450.0100	-76.06	2.59	5.72	-72.93	-13.00	-59.93	V
462.6200	-75.52	2.61	5.85	-72.28	-13.00	-59.28	V
126.0300	-70.94	1.32	-1.69	-73.95	-13.00	-60.95	H
173.5600	-75.29	1.58	2.9	-73.97	-13.00	-60.97	H
277.3500	-79.83	2	5.25	-76.58	-13.00	-63.58	H
402.4800	-75.22	2.41	5.97	-71.66	-13.00	-58.66	H
468.4400	-76.84	2.62	5.8	-73.66	-13.00	-60.66	H
625.5800	-77.65	2.96	6.16	-74.45	-13.00	-61.45	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-62.27	0.74	-11.1	-74.11	-13.00	-61.11	V
172.5900	-75.86	1.58	2.8	-74.64	-13.00	-61.64	V
342.3400	-85.55	2.18	5.8	-81.93	-13.00	-68.93	V
401.5100	-77	2.4	5.98	-73.42	-13.00	-60.42	V
449.0400	-75.81	2.59	5.72	-72.68	-13.00	-59.68	V
624.6100	-82.94	2.96	6.15	-79.75	-13.00	-66.75	V
47.4600	-65.22	0.78	-6.58	-72.58	-13.00	-59.58	H
127.9700	-70.49	1.33	-1.56	-73.38	-13.00	-60.38	H
276.3800	-80.92	1.99	5.23	-77.68	-13.00	-64.68	H
401.5100	-76.13	2.4	5.98	-72.55	-13.00	-59.55	H
463.5900	-75.68	2.61	5.84	-72.45	-13.00	-59.45	H
620.7300	-77.38	2.94	6.12	-74.20	-13.00	-61.20	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
44.5500	-64.74	0.76	-8.84	-74.34	-13.00	-61.34	V
174.5300	-75.35	1.59	3	-73.94	-13.00	-60.94	V
401.5100	-77.17	2.4	5.98	-73.59	-13.00	-60.59	V
449.0400	-74.88	2.59	5.72	-71.75	-13.00	-58.75	V
600.3600	-82.43	2.9	6.4	-78.93	-13.00	-65.93	V
757.5000	-80.83	3.22	6.25	-77.80	-13.00	-64.80	V
111.4800	-70.23	1.22	-1.76	-73.21	-13.00	-60.21	H
175.5000	-76.43	1.59	3.1	-74.92	-13.00	-61.92	H
326.8200	-81.69	2.17	5.71	-78.15	-13.00	-65.15	H
401.5100	-74.92	2.4	5.98	-71.34	-13.00	-58.34	H
477.1700	-77.99	2.63	5.61	-75.01	-13.00	-62.01	H
643.0400	-78.21	3.01	6.16	-75.06	-13.00	-62.06	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 1.4MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
170.6500	-73.56	1.57	2.59	-72.54	-13.00	-59.54	V
259.8900	-83.71	1.91	5.59	-80.03	-13.00	-67.03	V
394.7200	-76.8	2.35	5.99	-73.16	-13.00	-60.16	V
438.3700	-74.31	2.52	5.89	-70.94	-13.00	-57.94	V
563.5000	-80.33	2.85	6.02	-77.16	-13.00	-64.16	V
644.0100	-80.01	3.02	6.17	-76.86	-13.00	-63.86	V
57.1600	-62.31	0.86	-2.8	-65.97	-13.00	-52.97	H
172.5900	-70.61	1.58	2.8	-69.39	-13.00	-56.39	H
353.0100	-76.19	2.24	5.77	-72.66	-13.00	-59.66	H
444.1900	-67.68	2.56	5.81	-64.43	-13.00	-51.43	H
600.3600	-69.64	2.9	6.4	-66.14	-13.00	-53.14	H
734.2200	-75.84	3.19	6.28	-72.75	-13.00	-59.75	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
170.6500	-74.46	1.57	2.59	-73.44	-13.00	-60.44	V
271.5300	-83.58	1.98	5.13	-80.43	-13.00	-67.43	V
391.8100	-78.34	2.32	6	-74.66	-13.00	-61.66	V
472.3200	-74.48	2.62	5.72	-71.38	-13.00	-58.38	V
600.3600	-78.61	2.9	6.4	-75.11	-13.00	-62.11	V
725.4900	-80.2	3.17	6.45	-76.92	-13.00	-63.92	V
57.1600	-62.31	0.86	-2.8	-65.97	-13.00	-52.97	H
128.9400	-65.69	1.34	-1.5	-68.53	-13.00	-55.53	H
354.9500	-76.28	2.25	5.75	-72.78	-13.00	-59.78	H
451.9500	-68.43	2.59	5.75	-65.27	-13.00	-52.27	H
600.3600	-70.99	2.9	6.4	-67.49	-13.00	-54.49	H
743.9200	-75.2	3.21	6.1	-72.31	-13.00	-59.31	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
66.8600	-72.94	0.93	-1.89	-75.76	-13.00	-62.76	V
170.6500	-74.92	1.57	2.59	-73.90	-13.00	-60.90	V
351.0700	-82.39	2.23	5.79	-78.83	-13.00	-65.83	V
482.9900	-74.23	2.65	5.58	-71.30	-13.00	-58.30	V
600.3600	-78.44	2.9	6.4	-74.94	-13.00	-61.94	V
771.0800	-78.64	3.27	6.35	-75.56	-13.00	-62.56	V
128.9400	-67.15	1.34	-1.5	-69.99	-13.00	-56.99	H
175.5000	-73.06	1.59	3.1	-71.55	-13.00	-58.55	H
260.8600	-79.84	1.91	5.56	-76.19	-13.00	-63.19	H
446.1300	-68.29	2.57	5.78	-65.08	-13.00	-52.08	H
600.3600	-71.32	2.9	6.4	-67.82	-13.00	-54.82	H
747.8000	-75.66	3.2	6.1	-72.76	-13.00	-59.76	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 5MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
171.6200	-74.99	1.57	2.69	-73.87	-13.00	-60.87	V
323.9100	-83.22	2.17	5.7	-79.69	-13.00	-66.69	V
368.5300	-81.51	2.3	5.79	-78.02	-13.00	-65.02	V
440.3100	-74.18	2.53	5.89	-70.82	-13.00	-57.82	V
479.1100	-74.75	2.64	5.56	-71.83	-13.00	-58.83	V
633.3400	-79.75	2.99	6.18	-76.56	-13.00	-63.56	V
171.6200	-70.94	1.57	2.69	-69.82	-13.00	-56.82	H
265.7100	-79.83	1.95	5.32	-76.46	-13.00	-63.46	H
355.9200	-77.12	2.25	5.74	-73.63	-13.00	-60.63	H
449.0400	-67.53	2.59	5.72	-64.40	-13.00	-51.40	H
600.3600	-69.97	2.9	6.4	-66.47	-13.00	-53.47	H
757.5000	-75.56	3.22	6.25	-72.53	-13.00	-59.53	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
171.6200	-74.4	1.57	2.69	-73.28	-13.00	-60.28	V
323.9100	-83.97	2.17	5.7	-80.44	-13.00	-67.44	V
397.6300	-77.05	2.37	5.99	-73.43	-13.00	-60.43	V
438.3700	-74.75	2.52	5.89	-71.38	-13.00	-58.38	V
561.5600	-80.83	2.85	6	-77.68	-13.00	-64.68	V
644.9800	-80.2	3.02	6.19	-77.03	-13.00	-64.03	V
173.5600	-71.17	1.58	2.9	-69.85	-13.00	-56.85	H
257.9500	-79.6	1.89	5.61	-75.88	-13.00	-62.88	H
447.1000	-69.7	2.58	5.76	-66.52	-13.00	-53.52	H
574.1700	-76.68	2.88	6.07	-73.49	-13.00	-60.49	H
600.3600	-70.69	2.9	6.4	-67.19	-13.00	-54.19	H
769.1400	-75	3.27	6.39	-71.88	-13.00	-58.88	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
40.6700	-57.27	0.73	-11.85	-69.85	-13.00	-56.85	V
171.6200	-74.79	1.57	2.69	-73.67	-13.00	-60.67	V
391.8100	-76.83	2.32	6	-73.15	-13.00	-60.15	V
483.9600	-74.04	2.65	5.6	-71.09	-13.00	-58.09	V
600.3600	-78.54	2.9	6.4	-75.04	-13.00	-62.04	V
733.2500	-79.23	3.19	6.31	-76.11	-13.00	-63.11	V
171.6200	-71.04	1.57	2.69	-69.92	-13.00	-56.92	H
256.0100	-79.3	1.88	5.63	-75.55	-13.00	-62.55	H
354.9500	-77.12	2.25	5.75	-73.62	-13.00	-60.62	H
448.0700	-67.44	2.58	5.74	-64.28	-13.00	-51.28	H
600.3600	-72.98	2.9	6.4	-69.48	-13.00	-56.48	H
758.4700	-75.78	3.22	6.27	-72.73	-13.00	-59.73	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 10MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
86.2600	-74.08	1.08	0.62	-74.54	-13.00	-61.54	V
172.5900	-75.13	1.58	2.8	-73.91	-13.00	-60.91	V
383.0800	-79.38	2.31	5.99	-75.70	-13.00	-62.70	V
442.2500	-73.3	2.55	5.85	-70.00	-13.00	-57.00	V
600.3600	-79.26	2.9	6.4	-75.76	-13.00	-62.76	V
732.2800	-79.73	3.18	6.34	-76.57	-13.00	-63.57	V
128.9400	-69.13	1.34	-1.5	-71.97	-13.00	-58.97	H
216.2400	-77.97	1.74	5.36	-74.35	-13.00	-61.35	H
355.9200	-76.71	2.25	5.74	-73.22	-13.00	-60.22	H
445.1600	-67.51	2.56	5.8	-64.27	-13.00	-51.27	H
600.3600	-71.46	2.9	6.4	-67.96	-13.00	-54.96	H
750.7100	-75.52	3.2	6.11	-72.61	-13.00	-59.61	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
172.5900	-75.29	1.58	2.8	-74.07	-13.00	-61.07	V
256.0100	-84.67	1.88	5.63	-80.92	-13.00	-67.92	V
446.1300	-74.69	2.57	5.78	-71.48	-13.00	-58.48	V
485.9000	-74.2	2.65	5.66	-71.19	-13.00	-58.19	V
632.3700	-81.05	2.98	6.19	-77.84	-13.00	-64.84	V
720.6400	-79.03	3.17	6.49	-75.71	-13.00	-62.71	V
128.9400	-67.39	1.34	-1.5	-70.23	-13.00	-57.23	H
172.5900	-71.44	1.58	2.8	-70.22	-13.00	-57.22	H
353.9800	-76.34	2.25	5.76	-72.83	-13.00	-59.83	H
443.2200	-68.49	2.55	5.83	-65.21	-13.00	-52.21	H
600.3600	-71.37	2.9	6.4	-67.87	-13.00	-54.87	H
733.2500	-75.78	3.19	6.31	-72.66	-13.00	-59.66	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
170.6500	-73.85	1.57	2.59	-72.83	-13.00	-59.83	V
382.1100	-80.05	2.31	5.99	-76.37	-13.00	-63.37	V
442.2500	-74.2	2.55	5.85	-70.90	-13.00	-57.90	V
479.1100	-75.06	2.64	5.56	-72.14	-13.00	-59.14	V
600.3600	-79.18	2.9	6.4	-75.68	-13.00	-62.68	V
756.5300	-79.08	3.21	6.23	-76.06	-13.00	-63.06	V
174.5300	-71.76	1.59	3	-70.35	-13.00	-57.35	H
323.9100	-79.91	2.17	5.7	-76.38	-13.00	-63.38	H
451.9500	-68.94	2.59	5.75	-65.78	-13.00	-52.78	H
545.0700	-77.63	2.79	6.22	-74.20	-13.00	-61.20	H
600.3600	-71.33	2.9	6.4	-67.83	-13.00	-54.83	H
719.6700	-76.78	3.17	6.48	-73.47	-13.00	-60.47	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 1.4MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
125.0600	-74.54	1.31	-1.75	-77.60	-13.00	-64.60	V
242.4300	-85.56	1.81	5.39	-81.98	-13.00	-68.98	V
438.3700	-78.77	2.52	5.89	-75.40	-13.00	-62.40	V
485.9000	-79.37	2.65	5.66	-76.36	-13.00	-63.36	V
620.7300	-80.7	2.94	6.12	-77.52	-13.00	-64.52	V
772.0500	-78.8	3.28	6.32	-75.76	-13.00	-62.76	V
129.9100	-71.73	1.34	-1.41	-74.48	-13.00	-61.48	H
171.6200	-74.36	1.57	2.69	-73.24	-13.00	-60.24	H
358.8300	-78.27	2.27	5.71	-74.83	-13.00	-61.83	H
450.9800	-68.56	2.59	5.74	-65.41	-13.00	-52.41	H
749.7400	-75.85	3.2	6.1	-72.95	-13.00	-59.95	H
949.5600	-74.03	3.63	6.3	-71.36	-13.00	-58.36	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
149.3100	-78.55	1.42	0.62	-79.35	-13.00	-66.35	V
441.2800	-79.26	2.54	5.87	-75.93	-13.00	-62.93	V
648.8600	-81.09	3.03	6.26	-77.86	-13.00	-64.86	V
749.7400	-76.57	3.2	6.1	-73.67	-13.00	-60.67	V
889.4200	-78.51	3.5	6.7	-75.31	-13.00	-62.31	V
967.0200	-77.15	3.67	6.33	-74.49	-13.00	-61.49	V
42.6100	-62.04	0.74	-10.34	-73.12	-13.00	-60.12	H
126.0300	-69.83	1.32	-1.69	-72.84	-13.00	-59.84	H
216.2400	-79.81	1.74	5.36	-76.19	-13.00	-63.19	H
447.1000	-69.23	2.58	5.76	-66.05	-13.00	-53.05	H
590.6600	-77.92	2.89	6.21	-74.60	-13.00	-61.60	H
788.5400	-75.58	3.33	6.2	-72.71	-13.00	-59.71	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
127.9700	-74.99	1.33	-1.56	-77.88	-13.00	-64.88	V
264.7400	-85.12	1.94	5.36	-81.70	-13.00	-68.70	V
437.4000	-78.67	2.52	5.88	-75.31	-13.00	-62.31	V
574.1700	-82.17	2.88	6.07	-78.98	-13.00	-65.98	V
657.5900	-81.05	3.05	6.3	-77.80	-13.00	-64.80	V
749.7400	-78.04	3.2	6.1	-75.14	-13.00	-62.14	V
42.6100	-62.66	0.74	-10.34	-73.74	-13.00	-60.74	H
126.0300	-70.24	1.32	-1.69	-73.25	-13.00	-60.25	H
230.7900	-79.75	1.8	5.4	-76.15	-13.00	-63.15	H
446.1300	-69.89	2.57	5.78	-66.68	-13.00	-53.68	H
467.4700	-70.32	2.61	5.81	-67.12	-13.00	-54.12	H
675.0500	-77.05	3.08	6.4	-73.73	-13.00	-60.73	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 5MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
334.5800	-83.61	2.16	5.75	-80.02	-13.00	-67.02	V
483.9600	-77.06	2.65	5.6	-74.11	-13.00	-61.11	V
656.6200	-80.34	3.05	6.3	-77.09	-13.00	-64.09	V
749.7400	-77.64	3.2	6.1	-74.74	-13.00	-61.74	V
894.2700	-78.74	3.51	6.67	-75.58	-13.00	-62.58	V
927.2500	-77.37	3.6	6.46	-74.51	-13.00	-61.51	V
126.0300	-69.88	1.32	-1.69	-72.89	-13.00	-59.89	H
173.5600	-75.5	1.58	2.9	-74.18	-13.00	-61.18	H
438.3700	-73.99	2.52	5.89	-70.62	-13.00	-57.62	H
482.0200	-75.66	2.64	5.55	-72.75	-13.00	-59.75	H
624.6100	-77.44	2.96	6.15	-74.25	-13.00	-61.25	H
806.9700	-75.19	3.34	6.34	-72.19	-13.00	-59.19	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
126.0300	-72.98	1.32	-1.69	-75.99	-13.00	-62.99	V
259.8900	-84.91	1.91	5.59	-81.23	-13.00	-68.23	V
384.0500	-79.81	2.31	5.99	-76.13	-13.00	-63.13	V
438.3700	-77.74	2.52	5.89	-74.37	-13.00	-61.37	V
602.3000	-82.01	2.91	6.38	-78.54	-13.00	-65.54	V
644.0100	-80.41	3.02	6.17	-77.26	-13.00	-64.26	V
126.0300	-68.95	1.32	-1.69	-71.96	-13.00	-58.96	H
243.4000	-78.36	1.82	5.43	-74.75	-13.00	-61.75	H
473.2900	-68.14	2.62	5.7	-65.06	-13.00	-52.06	H
641.1000	-76.8	3.01	6.12	-73.69	-13.00	-60.69	H
810.8500	-75.1	3.34	6.2	-72.24	-13.00	-59.24	H
935.0100	-74.56	3.6	6.4	-71.76	-13.00	-58.76	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
127.0000	-74.51	1.32	-1.63	-77.46	-13.00	-64.46	V
334.5800	-84.32	2.16	5.75	-80.73	-13.00	-67.73	V
440.3100	-79.05	2.53	5.89	-75.69	-13.00	-62.69	V
475.2300	-78.77	2.63	5.65	-75.75	-13.00	-62.75	V
621.7000	-80.81	2.95	6.13	-77.63	-13.00	-64.63	V
702.2100	-81.03	3.12	6.37	-77.78	-13.00	-64.78	V
126.0300	-69.94	1.32	-1.69	-72.95	-13.00	-59.95	H
170.6500	-74.63	1.57	2.59	-73.61	-13.00	-60.61	H
375.3200	-78.99	2.31	5.91	-75.39	-13.00	-62.39	H
453.8900	-69.48	2.59	5.79	-66.28	-13.00	-53.28	H
600.3600	-76.89	2.9	6.4	-73.39	-13.00	-60.39	H
749.7400	-73.24	3.2	6.1	-70.34	-13.00	-57.34	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 10MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
246.3100	-84.49	1.83	5.54	-80.78	-13.00	-67.78	V
353.9800	-82.59	2.25	5.76	-79.08	-13.00	-66.08	V
437.4000	-78.78	2.52	5.88	-75.42	-13.00	-62.42	V
539.2500	-82.7	2.78	6.27	-79.21	-13.00	-66.21	V
688.6300	-80.3	3.13	6.5	-76.93	-13.00	-63.93	V
749.7400	-77.25	3.2	6.1	-74.35	-13.00	-61.35	V
172.5900	-74.25	1.58	2.8	-73.03	-13.00	-60.03	H
239.5200	-79.67	1.81	5.35	-76.13	-13.00	-63.13	H
304.5100	-81.26	2.11	5.69	-77.68	-13.00	-64.68	H
465.5300	-70.86	2.61	5.83	-67.64	-13.00	-54.64	H
692.5100	-76.34	3.12	6.47	-72.99	-13.00	-59.99	H
869.0500	-74.89	3.44	6.5	-71.83	-13.00	-58.83	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
172.5900	-74.02	1.58	2.8	-72.80	-13.00	-59.80	V
355.9200	-79.35	2.25	5.74	-75.86	-13.00	-62.86	V
437.4000	-74.12	2.52	5.88	-70.76	-13.00	-57.76	V
475.2300	-72.68	2.63	5.65	-69.66	-13.00	-56.66	V
671.1700	-79.39	3.07	6.32	-76.14	-13.00	-63.14	V
749.7400	-74.66	3.2	6.1	-71.76	-13.00	-58.76	V
126.0300	-67.92	1.32	-1.69	-70.93	-13.00	-57.93	H
242.4300	-78.47	1.81	5.39	-74.89	-13.00	-61.89	H
447.1000	-68.12	2.58	5.76	-64.94	-13.00	-51.94	H
600.3600	-75.85	2.9	6.4	-72.35	-13.00	-59.35	H
796.3000	-74.58	3.33	6.41	-71.50	-13.00	-58.50	H
848.6800	-74.59	3.4	6.4	-71.59	-13.00	-58.59	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
127.9700	-73.45	1.33	-1.56	-76.34	-13.00	-63.34	V
200.7200	-81.55	1.63	3.19	-79.99	-13.00	-66.99	V
346.2200	-84.16	2.21	5.8	-80.57	-13.00	-67.57	V
478.1400	-77.73	2.63	5.59	-74.77	-13.00	-61.77	V
657.5900	-80.37	3.05	6.3	-77.12	-13.00	-64.12	V
749.7400	-76.28	3.2	6.1	-73.38	-13.00	-60.38	V
126.0300	-71.44	1.32	-1.69	-74.45	-13.00	-61.45	H
230.7900	-79.03	1.8	5.4	-75.43	-13.00	-62.43	H
411.2100	-76.93	2.45	5.9	-73.48	-13.00	-60.48	H
462.6200	-69.22	2.61	5.85	-65.98	-13.00	-52.98	H
600.3600	-77.18	2.9	6.4	-73.68	-13.00	-60.68	H
691.5400	-76.44	3.13	6.48	-73.09	-13.00	-60.09	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 20MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
39.7000	-57.74	0.72	-12.6	-71.06	-13.00	-58.06	V
128.9400	-75.83	1.34	-1.5	-78.67	-13.00	-65.67	V
276.3800	-85.01	1.99	5.23	-81.77	-13.00	-68.77	V
427.7000	-79.91	2.48	5.8	-76.59	-13.00	-63.59	V
482.9900	-78.51	2.65	5.58	-75.58	-13.00	-62.58	V
614.9100	-81.28	2.94	6.2	-78.02	-13.00	-65.02	V
126.0300	-69.47	1.32	-1.69	-72.48	-13.00	-59.48	H
177.4400	-77.81	1.6	3.31	-76.10	-13.00	-63.10	H
358.8300	-77.76	2.27	5.71	-74.32	-13.00	-61.32	H
448.0700	-69.88	2.58	5.74	-66.72	-13.00	-53.72	H
621.7000	-76.65	2.95	6.13	-73.47	-13.00	-60.47	H
771.0800	-74.89	3.27	6.35	-71.81	-13.00	-58.81	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
126.0300	-74.22	1.32	-1.69	-77.23	-13.00	-64.23	V
248.2500	-84.66	1.83	5.61	-80.88	-13.00	-67.88	V
486.8700	-78.81	2.66	5.69	-75.78	-13.00	-62.78	V
636.2500	-80.07	3	6.16	-76.91	-13.00	-63.91	V
749.7400	-77.06	3.2	6.1	-74.16	-13.00	-61.16	V
891.3600	-78.96	3.5	6.7	-75.76	-13.00	-62.76	V
45.5200	-60.79	0.77	-8.09	-69.65	-13.00	-56.65	H
174.5300	-73.98	1.59	3	-72.57	-13.00	-59.57	H
353.9800	-75.82	2.25	5.76	-72.31	-13.00	-59.31	H
449.0400	-68.7	2.59	5.72	-65.57	-13.00	-52.57	H
620.7300	-76.22	2.94	6.12	-73.04	-13.00	-60.04	H
749.7400	-73.48	3.2	6.1	-70.58	-13.00	-57.58	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
127.9700	-73.98	1.33	-1.56	-76.87	-13.00	-63.87	V
346.2200	-82.98	2.21	5.8	-79.39	-13.00	-66.39	V
481.0500	-77.11	2.64	5.52	-74.23	-13.00	-61.23	V
633.3400	-81.27	2.99	6.18	-78.08	-13.00	-65.08	V
811.8200	-78.81	3.35	6.2	-75.96	-13.00	-62.96	V
940.8300	-77.5	3.6	6.39	-74.71	-13.00	-61.71	V
126.0300	-71.57	1.32	-1.69	-74.58	-13.00	-61.58	H
231.7600	-78.89	1.8	5.4	-75.29	-13.00	-62.29	H
447.1000	-69.32	2.58	5.76	-66.14	-13.00	-53.14	H
633.3400	-77.23	2.99	6.18	-74.04	-13.00	-61.04	H
749.7400	-75.71	3.2	6.1	-72.81	-13.00	-59.81	H
913.6700	-74.68	3.57	6.6	-71.65	-13.00	-58.65	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 1.4MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
127.9700	-75	1.33	-1.56	-77.89	-13.00	-64.89	V
266.6800	-84.15	1.96	5.27	-80.84	-13.00	-67.84	V
444.1900	-78.87	2.56	5.81	-75.62	-13.00	-62.62	V
574.1700	-82.16	2.88	6.07	-78.97	-13.00	-65.97	V
667.2900	-80.68	3.07	6.3	-77.45	-13.00	-64.45	V
897.1800	-78.4	3.51	6.64	-75.27	-13.00	-62.27	V
126.0300	-70.73	1.32	-1.69	-73.74	-13.00	-60.74	H
172.5900	-75.68	1.58	2.8	-74.46	-13.00	-61.46	H
264.7400	-79.29	1.94	5.36	-75.87	-13.00	-62.87	H
448.0700	-70.28	2.58	5.74	-67.12	-13.00	-54.12	H
661.4700	-76.71	3.06	6.3	-73.47	-13.00	-60.47	H
749.7400	-74.78	3.2	6.1	-71.88	-13.00	-58.88	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
44.5500	-64.53	0.76	-8.84	-74.13	-13.00	-61.13	V
148.3400	-78.3	1.42	0.53	-79.19	-13.00	-66.19	V
254.0700	-85.23	1.86	5.66	-81.43	-13.00	-68.43	V
387.9300	-80.9	2.32	6	-77.22	-13.00	-64.22	V
437.4000	-77.39	2.52	5.88	-74.03	-13.00	-61.03	V
483.9600	-78.9	2.65	5.6	-75.95	-13.00	-62.95	V
126.0300	-71.3	1.32	-1.69	-74.31	-13.00	-61.31	H
171.6200	-74.67	1.57	2.69	-73.55	-13.00	-60.55	H
307.4200	-79.77	2.12	5.75	-76.14	-13.00	-63.14	H
449.0400	-68.16	2.59	5.72	-65.03	-13.00	-52.03	H
465.5300	-68.77	2.61	5.83	-65.55	-13.00	-52.55	H
690.5700	-77.09	3.13	6.49	-73.73	-13.00	-60.73	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
44.5500	-64.75	0.76	-8.84	-74.35	-13.00	-61.35	V
129.9100	-75.67	1.34	-1.41	-78.42	-13.00	-65.42	V
193.9300	-83.11	1.62	3.58	-81.15	-13.00	-68.15	V
389.8700	-80.68	2.32	6	-77.00	-13.00	-64.00	V
484.9300	-79.52	2.65	5.63	-76.54	-13.00	-63.54	V
749.7400	-76.67	3.2	6.1	-73.77	-13.00	-60.77	V
126.0300	-69.12	1.32	-1.69	-72.13	-13.00	-59.13	H
172.5900	-74.59	1.58	2.8	-73.37	-13.00	-60.37	H
310.3300	-79.42	2.14	5.77	-75.79	-13.00	-62.79	H
449.0400	-70.47	2.59	5.72	-67.34	-13.00	-54.34	H
599.3900	-77.99	2.9	6.39	-74.50	-13.00	-61.50	H
806.9700	-75.81	3.34	6.34	-72.81	-13.00	-59.81	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 5MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
62.0100	-74.34	0.89	-2.1	-77.33	-13.00	-64.33	V
191.0200	-82.97	1.62	3.89	-80.70	-13.00	-67.70	V
354.9500	-82.96	2.25	5.75	-79.46	-13.00	-66.46	V
438.3700	-76.69	2.52	5.89	-73.32	-13.00	-60.32	V
565.4400	-81.96	2.86	6.04	-78.78	-13.00	-65.78	V
718.7000	-80.59	3.16	6.46	-77.29	-13.00	-64.29	V
126.0300	-68.77	1.32	-1.69	-71.78	-13.00	-58.78	H
171.6200	-74.89	1.57	2.69	-73.77	-13.00	-60.77	H
266.6800	-78.79	1.96	5.27	-75.48	-13.00	-62.48	H
438.3700	-72.53	2.52	5.89	-69.16	-13.00	-56.16	H
459.7100	-69.2	2.6	5.88	-65.92	-13.00	-52.92	H
600.3600	-75.54	2.9	6.4	-72.04	-13.00	-59.04	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
128.9400	-74.32	1.34	-1.5	-77.16	-13.00	-64.16	V
245.3400	-85.77	1.82	5.5	-82.09	-13.00	-69.09	V
380.1700	-79.67	2.31	5.98	-76.00	-13.00	-63.00	V
433.5200	-77.52	2.5	5.83	-74.19	-13.00	-61.19	V
749.7400	-77.78	3.2	6.1	-74.88	-13.00	-61.88	V
918.5200	-78.42	3.58	6.6	-75.40	-13.00	-62.40	V
172.5900	-74.37	1.58	2.8	-73.15	-13.00	-60.15	H
243.4000	-78.7	1.82	5.43	-75.09	-13.00	-62.09	H
448.0700	-69.5	2.58	5.74	-66.34	-13.00	-53.34	H
600.3600	-76.65	2.9	6.4	-73.15	-13.00	-60.15	H
861.2900	-75.35	3.43	6.42	-72.36	-13.00	-59.36	H
975.7500	-73.47	3.68	6.29	-70.86	-13.00	-57.86	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
159.9800	-79.83	1.48	1.43	-79.88	-13.00	-66.88	V
365.6200	-83.82	2.29	5.76	-80.35	-13.00	-67.35	V
439.3400	-77.73	2.53	5.9	-74.36	-13.00	-61.36	V
561.5600	-81.25	2.85	6	-78.10	-13.00	-65.10	V
704.1500	-80.44	3.13	6.35	-77.22	-13.00	-64.22	V
864.2000	-78.97	3.44	6.45	-75.96	-13.00	-62.96	V
126.0300	-69.88	1.32	-1.69	-72.89	-13.00	-59.89	H
172.5900	-75.16	1.58	2.8	-73.94	-13.00	-60.94	H
248.2500	-80.92	1.83	5.61	-77.14	-13.00	-64.14	H
356.8900	-77.94	2.26	5.73	-74.47	-13.00	-61.47	H
472.3200	-68.63	2.62	5.72	-65.53	-13.00	-52.53	H
597.4500	-77.22	2.9	6.35	-73.77	-13.00	-60.77	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 10MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
151.2500	-78.96	1.43	0.8	-79.59	-13.00	-66.59	V
321.9700	-83.99	2.18	5.7	-80.47	-13.00	-67.47	V
390.8400	-78.51	2.32	6	-74.83	-13.00	-61.83	V
482.0200	-77.64	2.64	5.55	-74.73	-13.00	-61.73	V
623.6400	-80.88	2.95	6.14	-77.69	-13.00	-64.69	V
749.7400	-75.67	3.2	6.1	-72.77	-13.00	-59.77	V
126.0300	-70.23	1.32	-1.69	-73.24	-13.00	-60.24	H
244.3700	-79.25	1.82	5.47	-75.60	-13.00	-62.60	H
358.8300	-77.55	2.27	5.71	-74.11	-13.00	-61.11	H
474.2600	-69.31	2.63	5.68	-66.26	-13.00	-53.26	H
680.8700	-76.65	3.09	6.5	-73.24	-13.00	-60.24	H
749.7400	-74.76	3.2	6.1	-71.86	-13.00	-58.86	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
126.0300	-74.14	1.32	-1.69	-77.15	-13.00	-64.15	V
239.5200	-84.95	1.81	5.35	-81.41	-13.00	-68.41	V
375.3200	-80.11	2.31	5.91	-76.51	-13.00	-63.51	V
431.5800	-78.71	2.5	5.81	-75.40	-13.00	-62.40	V
490.7500	-79.24	2.67	5.8	-76.11	-13.00	-63.11	V
749.7400	-78.26	3.2	6.1	-75.36	-13.00	-62.36	V
126.0300	-71.69	1.32	-1.69	-74.70	-13.00	-61.70	H
242.4300	-79.46	1.81	5.39	-75.88	-13.00	-62.88	H
353.9800	-78.26	2.25	5.76	-74.75	-13.00	-61.75	H
448.0700	-66.46	2.58	5.74	-63.30	-13.00	-50.30	H
631.4000	-76.74	2.98	6.2	-73.52	-13.00	-60.52	H
826.3700	-76.01	3.39	6.26	-73.14	-13.00	-60.14	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
127.0000	-73.7	1.32	-1.63	-76.65	-13.00	-63.65	V
288.0200	-84.75	2.02	5.38	-81.39	-13.00	-68.39	V
367.5600	-81.74	2.29	5.78	-78.25	-13.00	-65.25	V
480.0800	-77.42	2.64	5.54	-74.52	-13.00	-61.52	V
599.3900	-81.39	2.9	6.39	-77.90	-13.00	-64.90	V
749.7400	-77.92	3.2	6.1	-75.02	-13.00	-62.02	V
126.0300	-70.88	1.32	-1.69	-73.89	-13.00	-60.89	H
244.3700	-78.46	1.82	5.47	-74.81	-13.00	-61.81	H
452.9200	-69.25	2.59	5.77	-66.07	-13.00	-53.07	H
587.7500	-78.06	2.89	6.15	-74.80	-13.00	-61.80	H
726.4600	-76.61	3.18	6.43	-73.36	-13.00	-60.36	H
784.6600	-74.78	3.32	6.16	-71.94	-13.00	-58.94	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 20MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
127.9700	-75.48	1.33	-1.56	-78.37	-13.00	-65.37	V
241.4600	-85.74	1.81	5.36	-82.19	-13.00	-69.19	V
418.9700	-79.33	2.46	5.82	-75.97	-13.00	-62.97	V
479.1100	-78.17	2.64	5.56	-75.25	-13.00	-62.25	V
644.0100	-81.1	3.02	6.17	-77.95	-13.00	-64.95	V
749.7400	-76.62	3.2	6.1	-73.72	-13.00	-60.72	V
126.0300	-70.29	1.32	-1.69	-73.30	-13.00	-60.30	H
229.8200	-79.48	1.8	5.39	-75.89	-13.00	-62.89	H
447.1000	-69.45	2.58	5.76	-66.27	-13.00	-53.27	H
530.5200	-78.17	2.75	6.03	-74.89	-13.00	-61.89	H
749.7400	-74.07	3.2	6.1	-71.17	-13.00	-58.17	H
850.6200	-75.33	3.4	6.4	-72.33	-13.00	-59.33	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
127.0000	-75.53	1.32	-1.63	-78.48	-13.00	-65.48	V
439.3400	-78.87	2.53	5.9	-75.50	-13.00	-62.50	V
479.1100	-78.09	2.64	5.56	-75.17	-13.00	-62.17	V
749.7400	-77.86	3.2	6.1	-74.96	-13.00	-61.96	V
848.6800	-79.17	3.4	6.4	-76.17	-13.00	-63.17	V
959.2600	-77.93	3.66	6.4	-75.19	-13.00	-62.19	V
43.5800	-63.56	0.75	-9.59	-73.90	-13.00	-60.90	H
126.0300	-71.26	1.32	-1.69	-74.27	-13.00	-61.27	H
172.5900	-73.85	1.58	2.8	-72.63	-13.00	-59.63	H
352.0400	-77.46	2.24	5.78	-73.92	-13.00	-60.92	H
463.5900	-70.32	2.61	5.84	-67.09	-13.00	-54.09	H
749.7400	-74.29	3.2	6.1	-71.39	-13.00	-58.39	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 26, 2015**Temperature:** 22°C**Tested by:** David Shu**Humidity:** 57% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
127.0000	-75.11	1.32	-1.63	-78.06	-13.00	-65.06	V
241.4600	-84.99	1.81	5.36	-81.44	-13.00	-68.44	V
390.8400	-80.93	2.32	6	-77.25	-13.00	-64.25	V
476.2000	-79.79	2.63	5.63	-76.79	-13.00	-63.79	V
644.0100	-81.72	3.02	6.17	-78.57	-13.00	-65.57	V
749.7400	-77.91	3.2	6.1	-75.01	-13.00	-62.01	V
113.4200	-74.15	1.23	-1.84	-77.22	-13.00	-64.22	H
172.5900	-75.16	1.58	2.8	-73.94	-13.00	-60.94	H
229.8200	-77.38	1.8	5.39	-73.79	-13.00	-60.79	H
438.3700	-68.99	2.52	5.89	-65.62	-13.00	-52.62	H
596.4800	-77.9	2.9	6.33	-74.47	-13.00	-61.47	H
804.0600	-75.36	3.33	6.45	-72.24	-13.00	-59.24	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor

**Above 1GHz****LTE Band 5 / channel bandwidth: 1.4MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1651.000	-48.52	5.05	6.03	-47.54	-13.00	-34.54	V
2477.000	-39.95	6.31	6.07	-40.19	-13.00	-27.19	V
N/A							
1651.000	-50.28	5.05	6.03	-49.30	-13.00	-36.30	H
2477.000	-42.75	6.31	6.07	-42.99	-13.00	-29.99	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1672.000	-50.02	5.07	5.99	-49.10	-13.00	-36.10	V
2512.000	-36.89	6.37	6.13	-37.13	-13.00	-24.13	V
N/A							
1672.000	-50.26	5.07	5.99	-49.34	-13.00	-36.34	H
2512.000	-40.81	6.37	6.13	-41.05	-13.00	-28.05	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1700.000	-49.67	5.11	5.94	-48.84	-13.00	-35.84	V
2547.000	-40.5	6.42	6.22	-40.70	-13.00	-27.70	V
N/A							
1693.000	-50.64	5.1	5.95	-49.79	-13.00	-36.79	H
2547.000	-39.77	6.42	6.22	-39.97	-13.00	-26.97	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 5MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1651.000	-53.76	5.05	6.03	-52.78	-13.00	-39.78	V
2477.000	-44.71	6.31	6.07	-44.95	-13.00	-31.95	V
N/A							
1651.000	-54.42	5.05	6.03	-53.44	-13.00	-40.44	H
2477.000	-48.9	6.31	6.07	-49.14	-13.00	-36.14	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1679.000	-54	5.08	5.98	-53.10	-13.00	-40.10	V
2512.000	-43.37	6.37	6.13	-43.61	-13.00	-30.61	V
N/A							
1672.000	-52.9	5.07	5.99	-51.98	-13.00	-38.98	H
2512.000	-49.98	6.37	6.13	-50.22	-13.00	-37.22	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1693.000	-55.33	5.1	5.95	-54.48	-13.00	-41.48	V
2540.000	-45.41	6.41	6.2	-45.62	-13.00	-32.62	V
N/A							
1693.000	-52.69	5.1	5.95	-51.84	-13.00	-38.84	H
2540.000	-47.03	6.41	6.2	-47.24	-13.00	-34.24	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 10MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1651.000	-56	5.05	6.03	-55.02	-13.00	-42.02	V
2477.000	-48.12	6.31	6.07	-48.36	-13.00	-35.36	V
N/A							
1658.000	-54.37	5.06	6.02	-53.41	-13.00	-40.41	H
2491.000	-50.74	6.33	6.09	-50.98	-13.00	-37.98	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1679.000	-54.99	5.08	5.98	-54.09	-13.00	-41.09	V
2512.000	-47.11	6.37	6.13	-47.35	-13.00	-34.35	V
N/A							
1672.000	-54.21	5.07	5.99	-53.29	-13.00	-40.29	H
2519.000	-49.8	6.38	6.15	-50.03	-13.00	-37.03	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 6, 2015**Temperature:** 26°C**Tested by:** David Shu**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1679.000	-56.03	5.08	5.98	-55.13	-13.00	-42.13	V
2533.000	-48.99	6.4	6.19	-49.20	-13.00	-36.20	V
N/A							
1686.000	-53.57	5.09	5.97	-52.69	-13.00	-39.69	H
2526.000	-49.31	6.39	6.17	-49.53	-13.00	-36.53	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 1.4MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3702.000	-39.22	8.2	9.1	-38.32	-13.00	-25.32	V
5550.000	-37.66	10.06	10.81	-36.91	-13.00	-23.91	V
N/A							
3702.000	-41.22	8.2	9.1	-40.32	-13.00	-27.32	H
5550.000	-34.85	10.06	10.81	-34.10	-13.00	-21.10	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-38.16	8.23	9.16	-37.23	-13.00	-24.23	V
5641.000	-36.46	10.18	10.83	-35.81	-13.00	-22.81	V
N/A							
3758.000	-37.03	8.23	9.16	-36.10	-13.00	-23.10	H
5641.000	-35.57	10.18	10.83	-34.92	-13.00	-21.92	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3821.000	-35.53	8.29	9.22	-34.60	-13.00	-21.60	V
5725.000	-37.21	10.22	10.84	-36.59	-13.00	-23.59	V
N/A							
3821.000	-36.78	8.29	9.22	-35.85	-13.00	-22.85	H
5725.000	-30.27	10.22	10.84	-29.65	-13.00	-16.65	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 5MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3702.000	-42.53	8.2	9.1	-41.63	-13.00	-28.63	V
5557.000	-47.14	10.08	10.81	-46.41	-13.00	-33.41	V
N/A							
3702.000	-43.44	8.2	9.1	-42.54	-13.00	-29.54	H
5557.000	-40.24	10.08	10.81	-39.51	-13.00	-26.51	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-38.79	8.23	9.16	-37.86	-13.00	-24.86	V
5641.000	-44.4	10.18	10.83	-43.75	-13.00	-30.75	V
N/A							
3758.000	-42.32	8.23	9.16	-41.39	-13.00	-28.39	H
5641.000	-41.11	10.18	10.83	-40.46	-13.00	-27.46	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3814.000	-37.72	8.28	9.21	-36.79	-13.00	-23.79	V
5725.000	-44.03	10.22	10.84	-43.41	-13.00	-30.41	V
N/A							
3821.000	-40.31	8.29	9.22	-39.38	-13.00	-26.38	H
5725.000	-39.14	10.22	10.84	-38.52	-13.00	-25.52	H
N/A							

Remark:

3. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 10MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3709.000	-43.51	8.21	9.11	-42.61	-13.00	-29.61	V
5564.000	-46.46	10.1	10.81	-45.75	-13.00	-32.75	V
N/A							
3716.000	-43.27	8.21	9.12	-42.36	-13.00	-29.36	H
5564.000	-46	10.1	10.81	-45.29	-13.00	-32.29	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-41.99	8.23	9.16	-41.06	-13.00	-28.06	V
5641.000	-47.63	10.18	10.83	-46.98	-13.00	-33.98	V
N/A							
3758.000	-39.94	8.23	9.16	-39.01	-13.00	-26.01	H
5641.000	-48.35	10.18	10.83	-47.70	-13.00	-34.70	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3807.000	-40.53	8.27	9.21	-39.59	-13.00	-26.59	V
5711.000	-49.98	10.19	10.84	-49.33	-13.00	-36.33	V
N/A							
3807.000	-40.34	8.27	9.21	-39.40	-13.00	-26.40	H
5718.000	-46.12	10.21	10.84	-45.49	-13.00	-32.49	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 20MHz / QPSK****Operation Mode:** Tx / Low channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3723.000	-42.86	8.21	9.12	-41.95	-13.00	-28.95	V
5585.000	-48.49	10.15	10.82	-47.82	-13.00	-34.82	V
N/A							
3723.000	-44.61	8.21	9.12	-43.70	-13.00	-30.70	H
5564.000	-50.42	10.1	10.81	-49.71	-13.00	-36.71	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-44.57	8.23	9.16	-43.64	-13.00	-30.64	V
5648.000	-50.55	10.18	10.83	-49.90	-13.00	-36.90	V
N/A							
3758.000	-44.81	8.23	9.16	-43.88	-13.00	-30.88	H
5641.000	-47.91	10.18	10.83	-47.26	-13.00	-34.26	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3800.000	-42.48	8.26	9.2	-41.54	-13.00	-28.54	V
5704.000	-51.68	10.17	10.84	-51.01	-13.00	-38.01	V
N/A							
3800.000	-41.25	8.26	9.2	-40.31	-13.00	-27.31	H
5683.000	-50.19	10.17	10.84	-49.52	-13.00	-36.52	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 1.4MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** David Shu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2477.000	-36.15	6.31	6.07	-36.39	-13.00	-23.39	V
3296.000	-38.32	7.45	8.29	-37.48	-13.00	-24.48	V
N/A							
1651.000	-41.32	5.05	6.03	-40.34	-13.00	-27.34	H
2477.000	-38.97	6.31	6.07	-39.21	-13.00	-26.21	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** David Shu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2512.000	-34.52	6.37	6.13	-34.76	-13.00	-21.76	V
3345.000	-38.37	7.51	8.44	-37.44	-13.00	-24.44	V
N/A							
2512.000	-35.47	6.37	6.13	-35.71	-13.00	-22.71	H
3345.000	-42.33	7.51	8.44	-41.40	-13.00	-28.40	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** David Shu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2547.000	-36.65	6.42	6.22	-36.85	-13.00	-23.85	V
3394.000	-37.68	7.56	8.58	-36.66	-13.00	-23.66	V
N/A							
1700.000	-39.16	5.11	5.94	-38.33	-13.00	-25.33	H
2547.000	-37.53	6.42	6.22	-37.73	-13.00	-24.73	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 5MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** David Shu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2477.000	-41.79	6.31	6.07	-42.03	-13.00	-29.03	V
3303.000	-43.55	7.46	8.31	-42.70	-13.00	-29.70	V
N/A							
1658.000	-43.51	5.06	6.02	-42.55	-13.00	-29.55	H
2484.000	-44.46	6.32	6.08	-44.70	-13.00	-31.70	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** David Shu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1672.000	-48.25	5.07	5.99	-47.33	-13.00	-34.33	V
2512.000	-41.05	6.37	6.13	-41.29	-13.00	-28.29	V
N/A							
1672.000	-43.35	5.07	5.99	-42.43	-13.00	-29.43	H
2512.000	-42.88	6.37	6.13	-43.12	-13.00	-30.12	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** David Shu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2533.000	-42.55	6.4	6.19	-42.76	-13.00	-29.76	V
3387.000	-41.41	7.56	8.56	-40.41	-13.00	-27.41	V
N/A							
1693.000	-42.64	5.1	5.95	-41.79	-13.00	-28.79	H
2540.000	-42.91	6.41	6.2	-43.12	-13.00	-30.12	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 5 / channel bandwidth: 10MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** David Shu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2484.000	-41.24	6.32	6.08	-41.48	-13.00	-28.48	V
3317.000	-44.06	7.48	8.35	-43.19	-13.00	-30.19	V
N/A							
1658.000	-47.63	5.06	6.02	-46.67	-13.00	-33.67	H
2484.000	-43.44	6.32	6.08	-43.68	-13.00	-30.68	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** David Shu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2512.000	-43.82	6.37	6.13	-44.06	-13.00	-31.06	V
3345.000	-44.66	7.51	8.44	-43.73	-13.00	-30.73	V
N/A							
1672.000	-45.23	5.07	5.99	-44.31	-13.00	-31.31	H
2512.000	-45.24	6.37	6.13	-45.48	-13.00	-32.48	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** David Shu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2526.000	-45.79	6.39	6.17	-46.01	-13.00	-33.01	V
3373.000	-44.69	7.54	8.52	-43.71	-13.00	-30.71	V
N/A							
2526.000	-44.19	6.39	6.17	-44.41	-13.00	-31.41	H
3373.000	-46.98	7.54	8.52	-46.00	-13.00	-33.00	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 1.4MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3702.000	-39.5	8.2	9.1	-38.60	-13.00	-25.60	V
5550.000	-38.29	10.06	10.81	-37.54	-13.00	-24.54	V
N/A							
3702.000	-41.22	8.2	9.1	-40.32	-13.00	-27.32	H
5550.000	-32.07	10.06	10.81	-31.32	-13.00	-18.32	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-38.46	8.23	9.16	-37.53	-13.00	-24.53	V
5641.000	-36.72	10.18	10.83	-36.07	-13.00	-23.07	V
N/A							
3758.000	-36.52	8.23	9.16	-35.59	-13.00	-22.59	H
5641.000	-35.81	10.18	10.83	-35.16	-13.00	-22.16	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: Tx / High channel

Test Date: March 31, 2015

Temperature: 23°C

Tested by: Owen Wu

Humidity: 63 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3821.000	-35.66	8.29	9.22	-34.73	-13.00	-21.73	V
5725.000	-34.89	10.22	10.84	-34.27	-13.00	-21.27	V
N/A							
3821.000	-36.85	8.29	9.22	-35.92	-13.00	-22.92	H
5725.000	-32.05	10.22	10.84	-31.43	-13.00	-18.43	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 5MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3702.000	-42.14	8.2	9.1	-41.24	-13.00	-28.24	V
5557.000	-45.42	10.08	10.81	-44.69	-13.00	-31.69	V
N/A							
3702.000	-43.96	8.2	9.1	-43.06	-13.00	-30.06	H
5557.000	-41.26	10.08	10.81	-40.53	-13.00	-27.53	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-39.44	8.23	9.16	-38.51	-13.00	-25.51	V
5641.000	-44.57	10.18	10.83	-43.92	-13.00	-30.92	V
N/A							
3758.000	-42.18	8.23	9.16	-41.25	-13.00	-28.25	H
5641.000	-40.79	10.18	10.83	-40.14	-13.00	-27.14	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3814.000	-37.84	8.28	9.21	-36.91	-13.00	-23.91	V
5725.000	-44.1	10.22	10.84	-43.48	-13.00	-30.48	V
N/A							
3814.000	-39.44	8.28	9.21	-38.51	-13.00	-25.51	H
5725.000	-40.53	10.22	10.84	-39.91	-13.00	-26.91	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 10MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3709.000	-43.33	8.21	9.11	-42.43	-13.00	-29.43	V
5564.000	-48.39	10.1	10.81	-47.68	-13.00	-34.68	V
N/A							
3709.000	-42.1	8.21	9.11	-41.20	-13.00	-28.20	H
5557.000	-48.45	10.08	10.81	-47.72	-13.00	-34.72	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-40.57	8.23	9.16	-39.64	-13.00	-26.64	V
5641.000	-46.9	10.18	10.83	-46.25	-13.00	-33.25	V
N/A							
3758.000	-41.52	8.23	9.16	-40.59	-13.00	-27.59	H
5641.000	-47.1	10.18	10.83	-46.45	-13.00	-33.45	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 30, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3807.000	-41.85	8.27	9.21	-40.91	-13.00	-27.91	V
5718.000	-49.65	10.21	10.84	-49.02	-13.00	-36.02	V
N/A							
3807.000	-39.66	8.27	9.21	-38.72	-13.00	-25.72	H
5711.000	-45.5	10.19	10.84	-44.85	-13.00	-31.85	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**LTE Band 2 / channel bandwidth: 20MHz / 16QAM****Operation Mode:** Tx / Low channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3723.000	-43.99	8.21	9.12	-43.08	-13.00	-30.08	V
5585.000	-51.09	10.15	10.82	-50.42	-13.00	-37.42	V
N/A							
3723.000	-44.15	8.21	9.12	-43.24	-13.00	-30.24	H
5571.000	-49.39	10.12	10.81	-48.70	-13.00	-35.70	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / Middle channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-41.52	8.23	9.16	-40.59	-13.00	-27.59	V
5641.000	-49.52	10.18	10.83	-48.87	-13.00	-35.87	V
N/A							
3758.000	-43.2	8.23	9.16	-42.27	-13.00	-29.27	H
5648.000	-49.18	10.18	10.83	-48.53	-13.00	-35.53	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / High channel**Test Date:** March 31, 2015**Temperature:** 23°C**Tested by:** Owen Wu**Humidity:** 63 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3807.000	-42.9	8.27	9.21	-41.96	-13.00	-28.96	V
5704.000	-51.06	10.17	10.84	-50.39	-13.00	-37.39	V
N/A							
3800.000	-43.3	8.26	9.2	-42.36	-13.00	-29.36	H
5697.000	-48.72	10.16	10.84	-48.04	-13.00	-35.04	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.