


Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

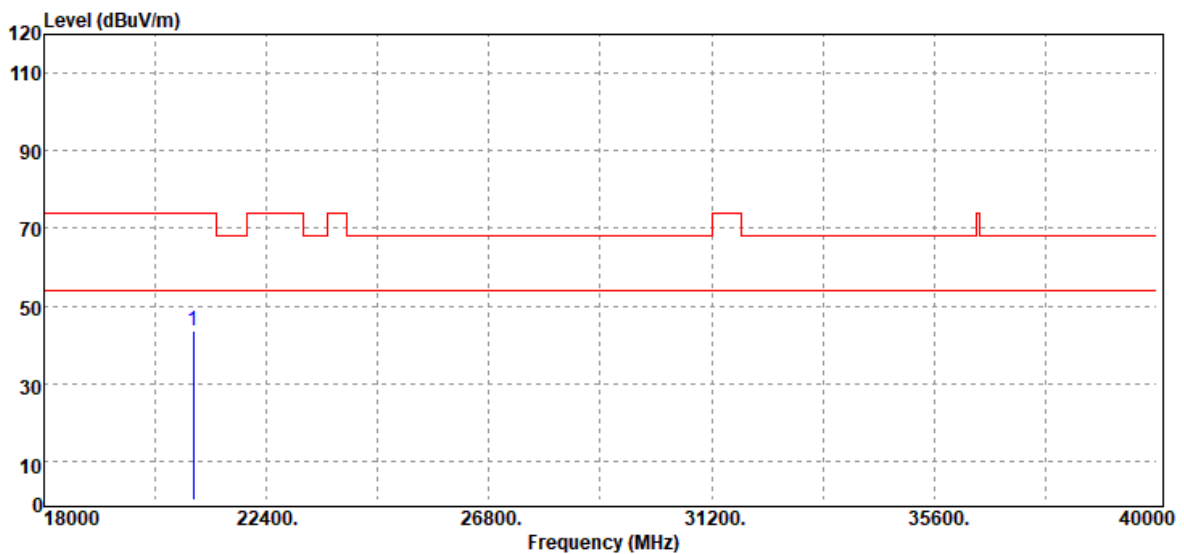

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
20960.00	Peak	28.44	14.96	43.40	74.00	-30.60
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210730W08-RP4

Page: 146 / 187

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5180MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

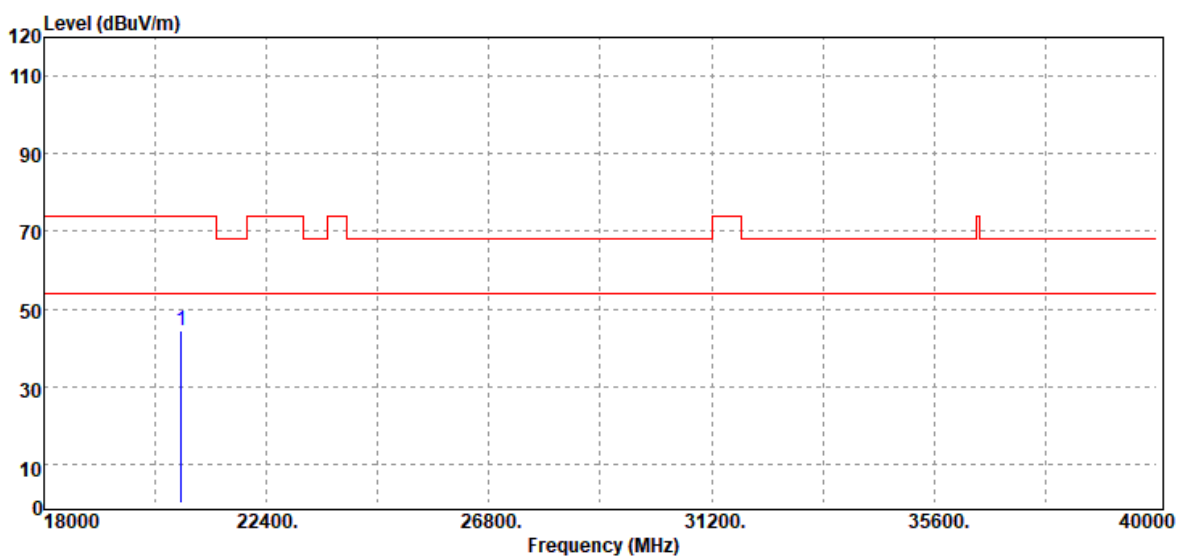


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
20720.00	Peak	29.96	14.64	44.60	74.00	-29.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz/ 5180MHZ	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

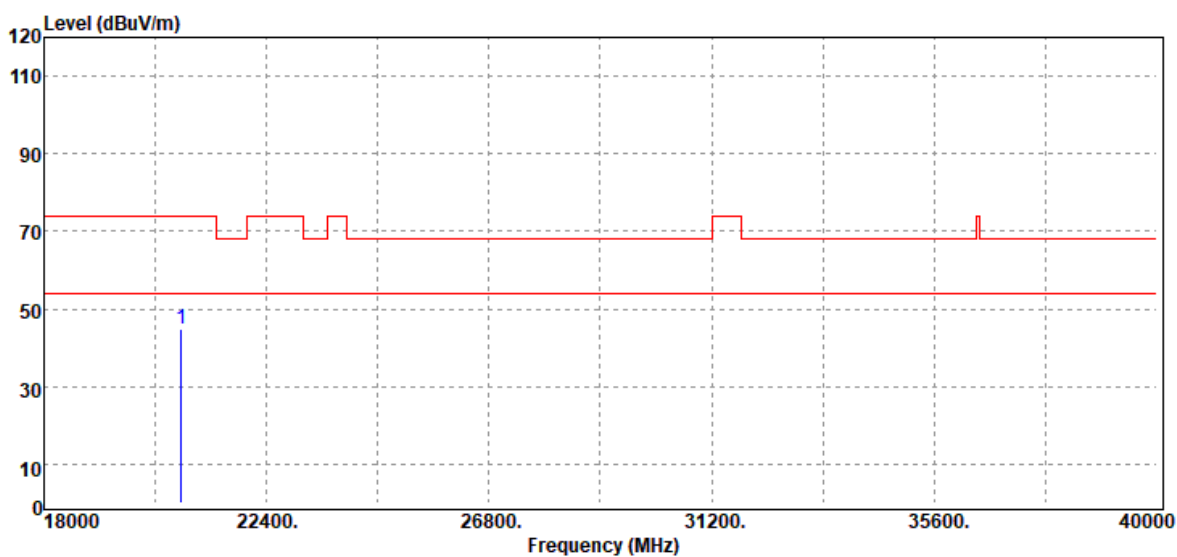


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
20720.00	Peak	30.27	14.64	44.91	74.00	-29.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5220MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

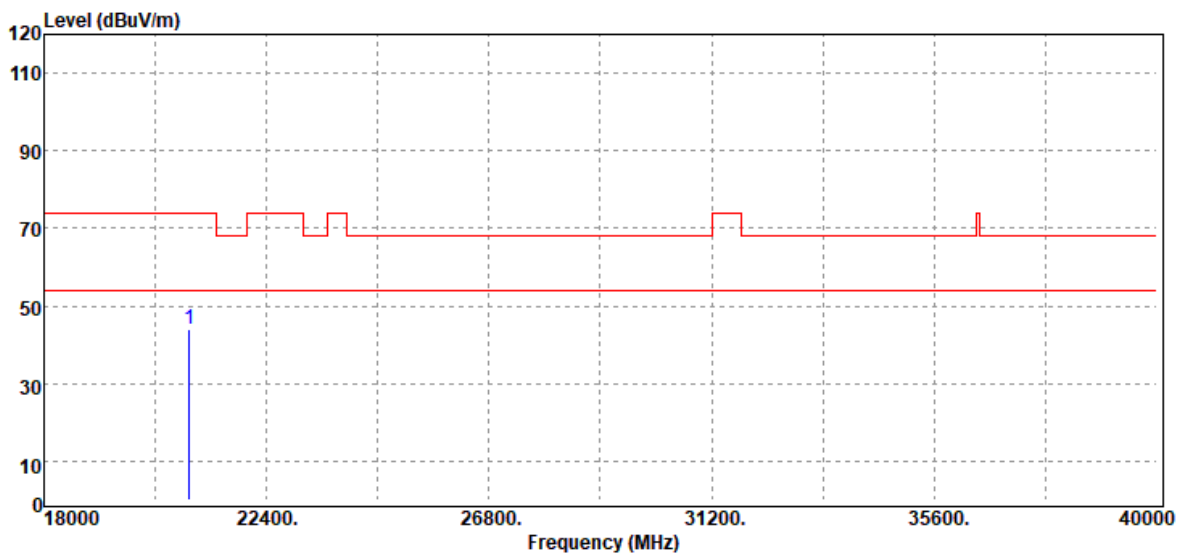


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
20880.00	Peak	28.99	14.85	43.84	74.00	-30.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz / 5220MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

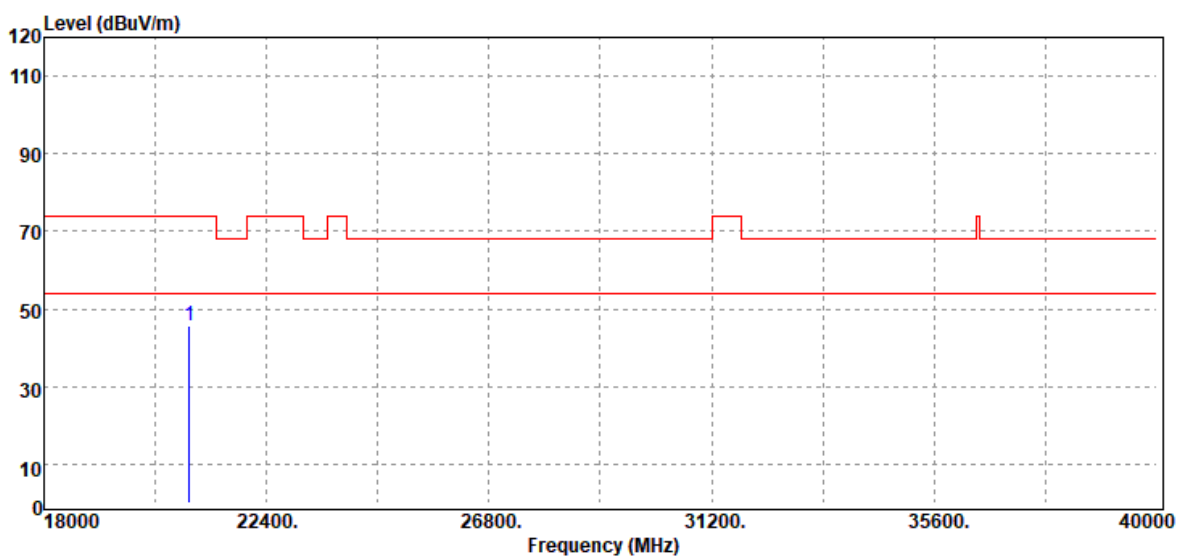

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
20880.00	Peak	30.67	14.85	45.52	74.00	-28.48
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210730W08-RP4

Page: 150 / 187

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5240MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

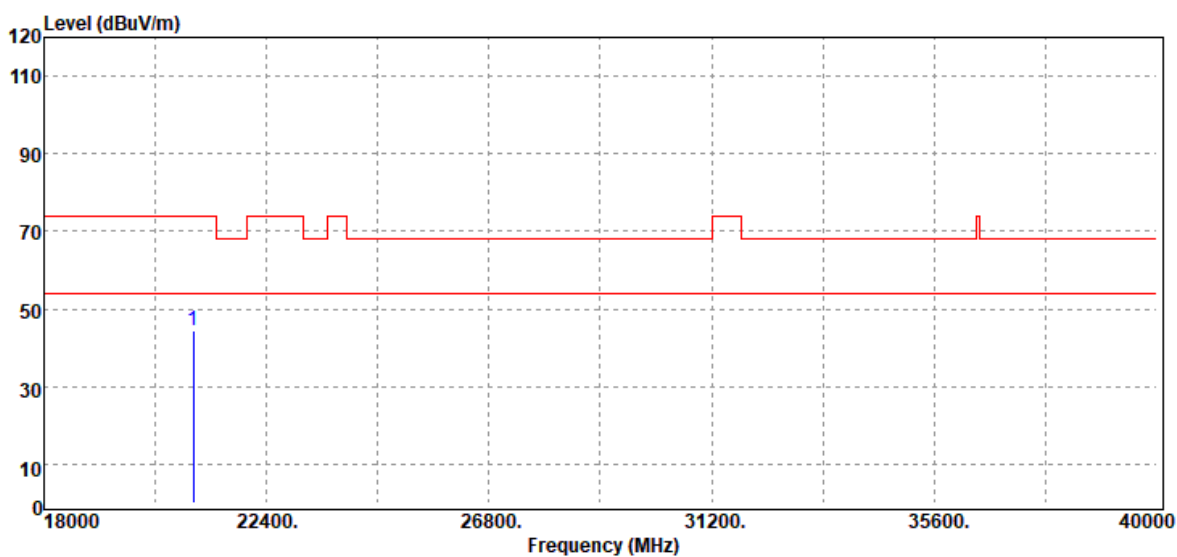


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
20960.00	Peak	29.61	14.96	44.57	74.00	-29.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5240MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

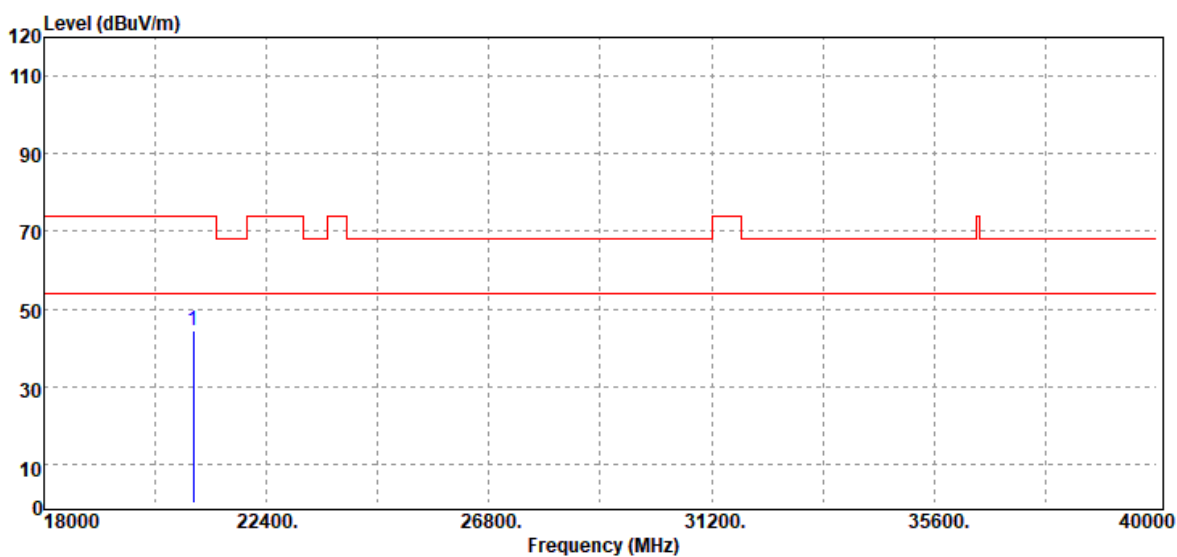


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
20960.00	Peak	29.36	14.96	44.32	74.00	-29.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Data for UNII-2a

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

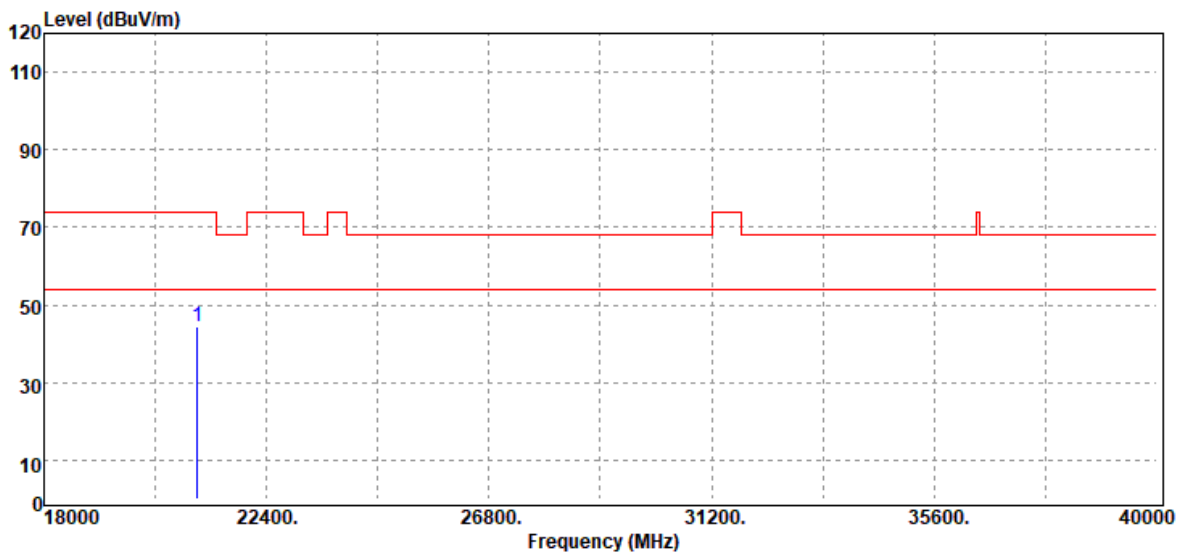


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
21040.00	Peak	29.27	15.15	44.42	74.00	-29.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

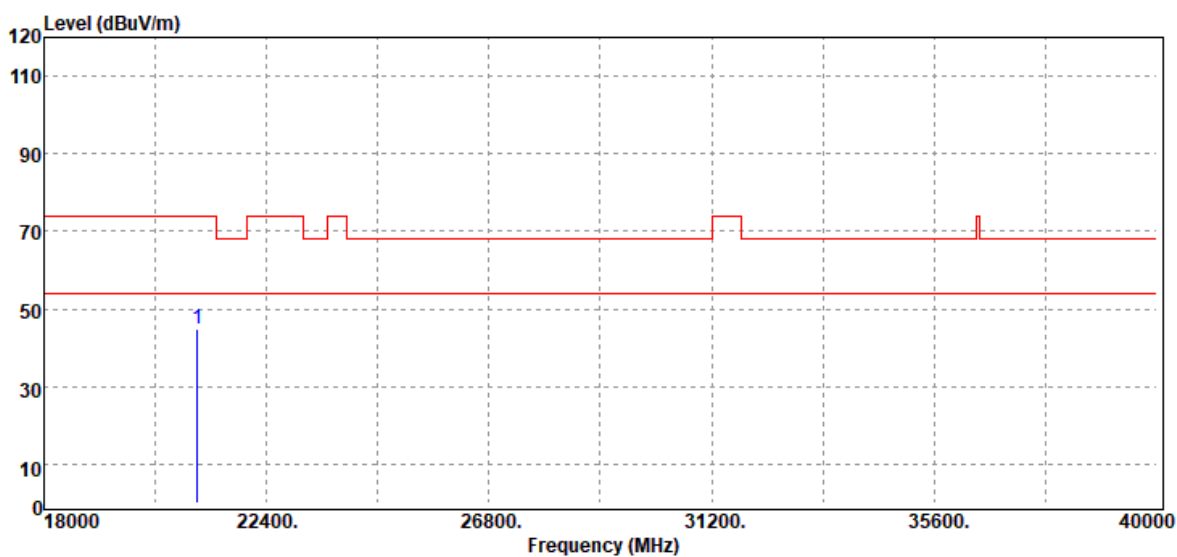


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
21040.00	Peak	29.71	15.15	44.86	74.00	-29.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

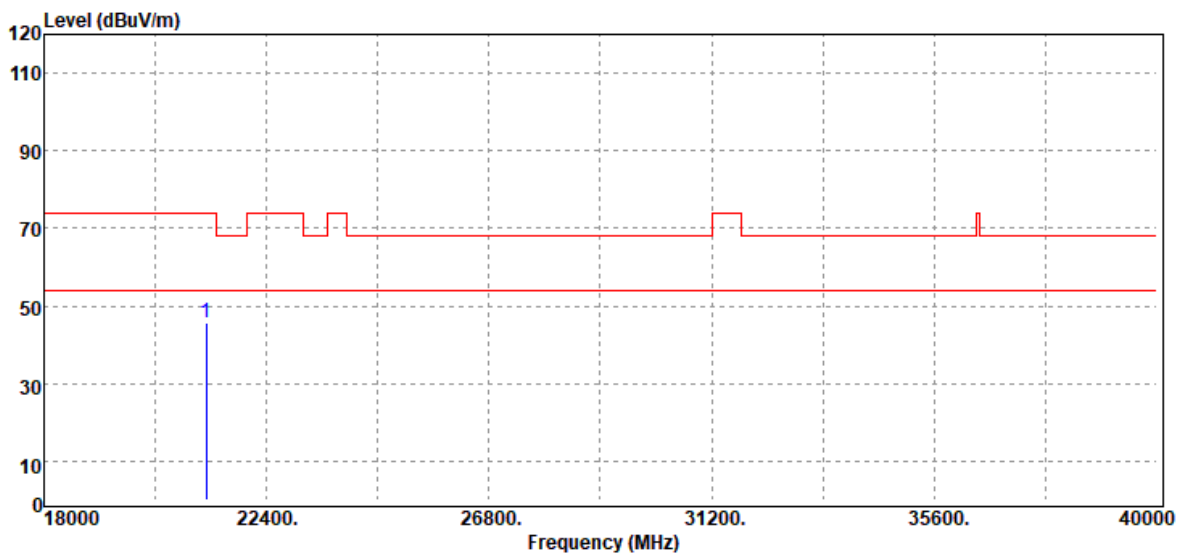


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
21200.00	Peak	30.19	15.60	45.79	74.00	-28.21
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

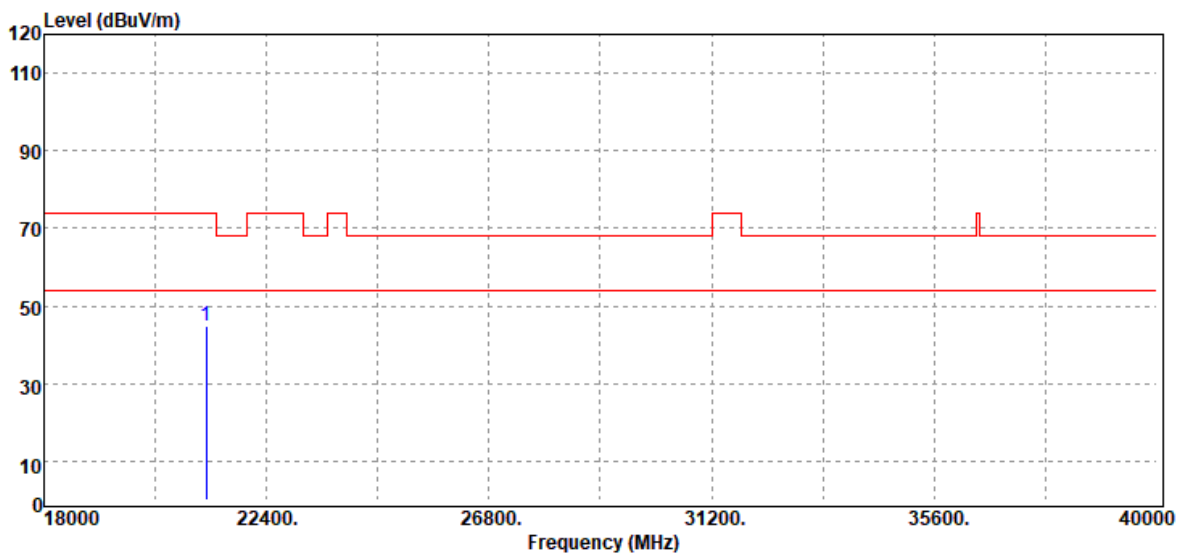


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
21200.00	Peak	29.30	15.60	44.90	74.00	-29.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

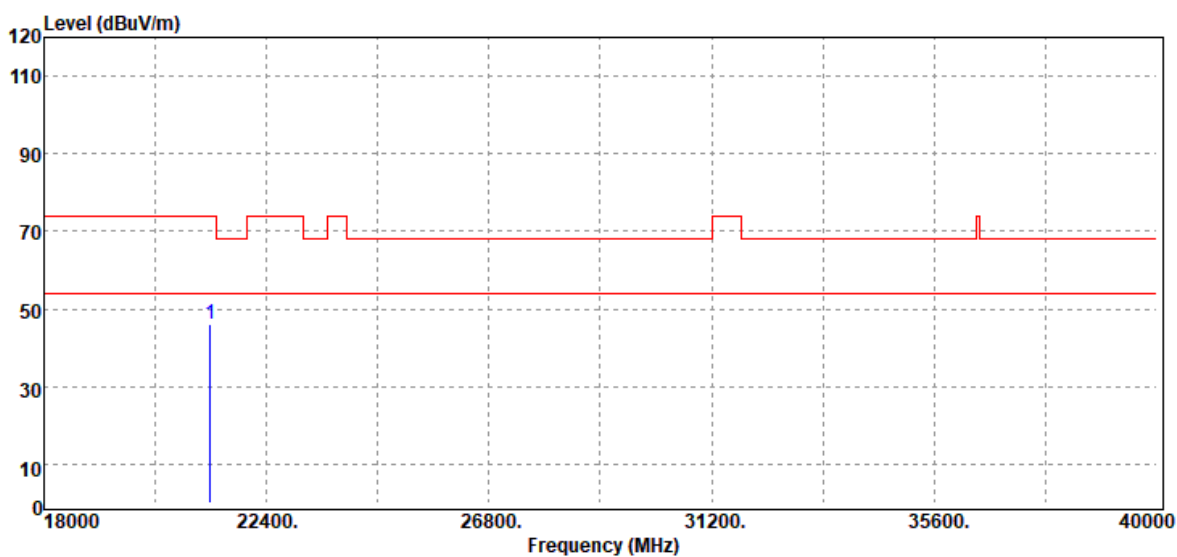

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
21280.00	Peak	30.07	15.84	45.91	74.00	-28.09
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210730W08-RP4

Page: 157 / 187

Rev.: 01

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

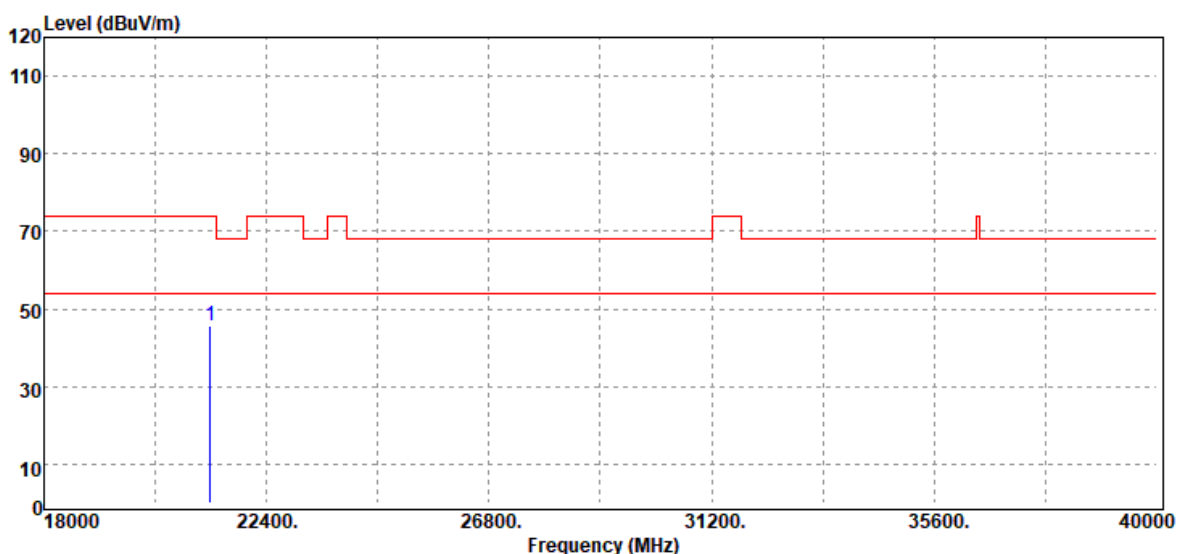


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
21280.00	Peak	29.66	15.84	45.50	74.00	-28.50
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

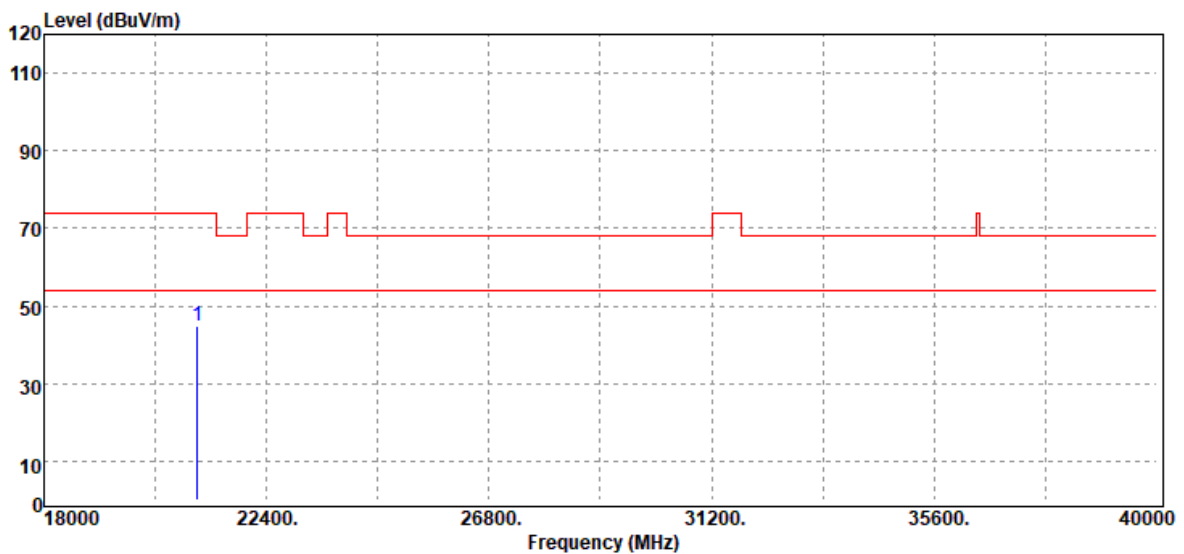


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
21040.00	Peak	29.53	15.15	44.68	74.00	-29.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

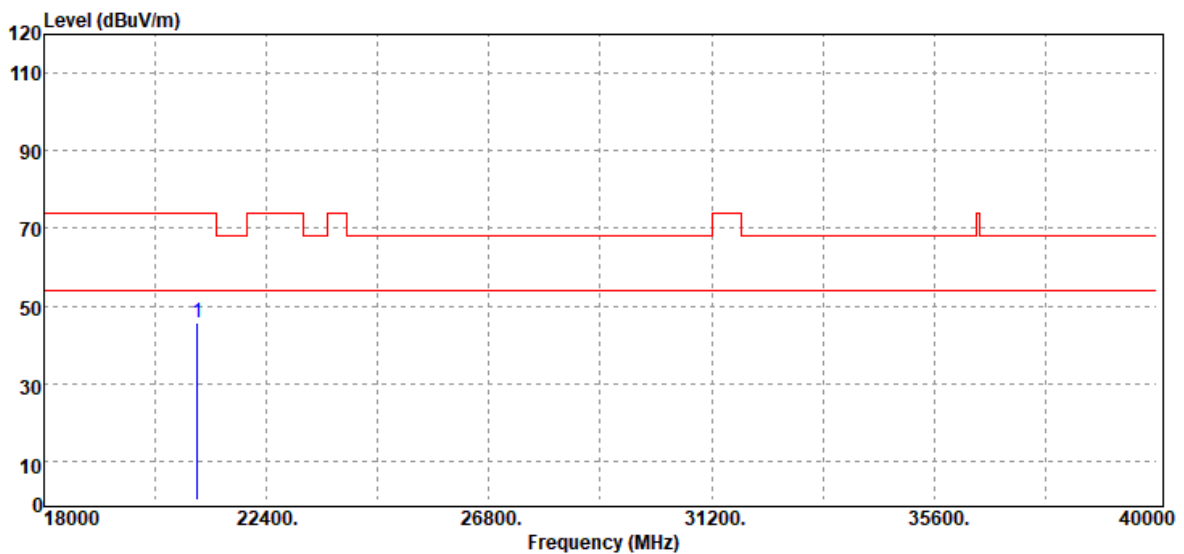


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
21040.00	Peak	30.36	15.15	45.51	74.00	-28.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5300 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

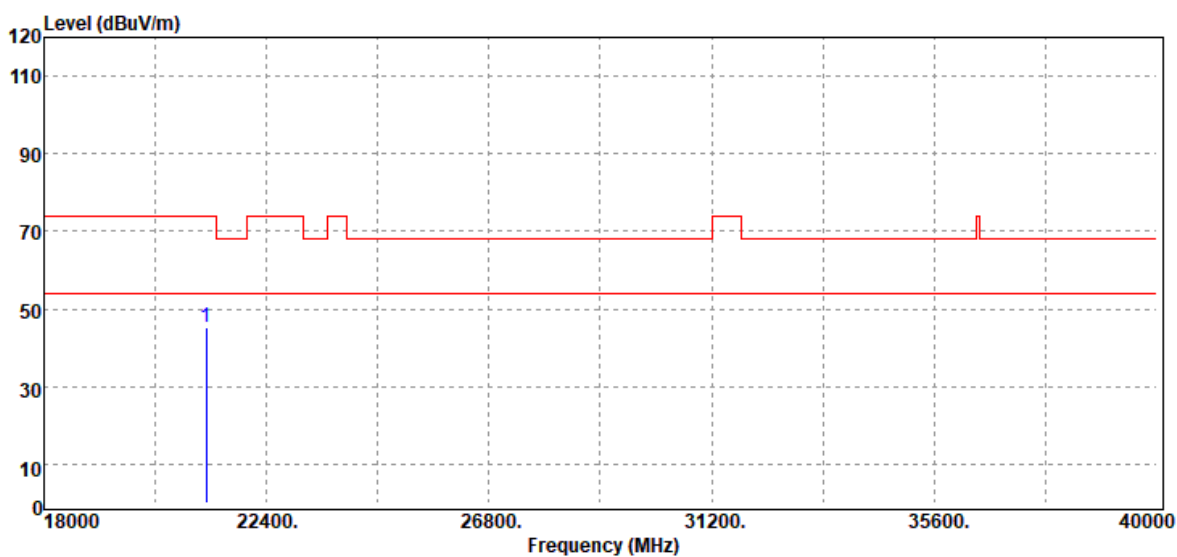


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
21200.00	Peak	29.73	15.60	45.33	74.00	-28.67
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5300 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

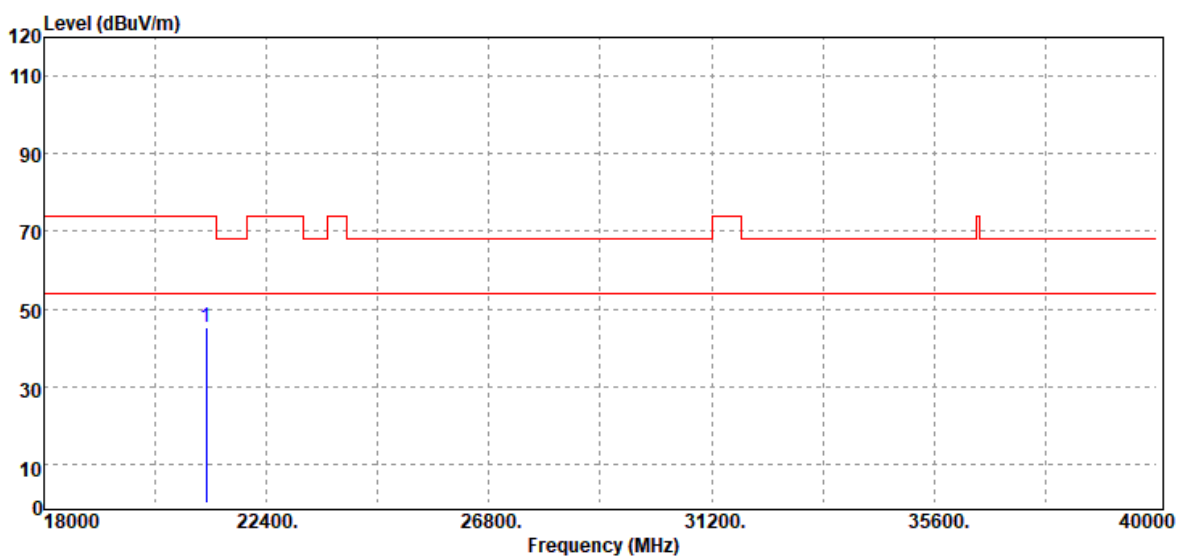


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
21200.00	Peak	29.57	15.60	45.17	74.00	-28.83
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

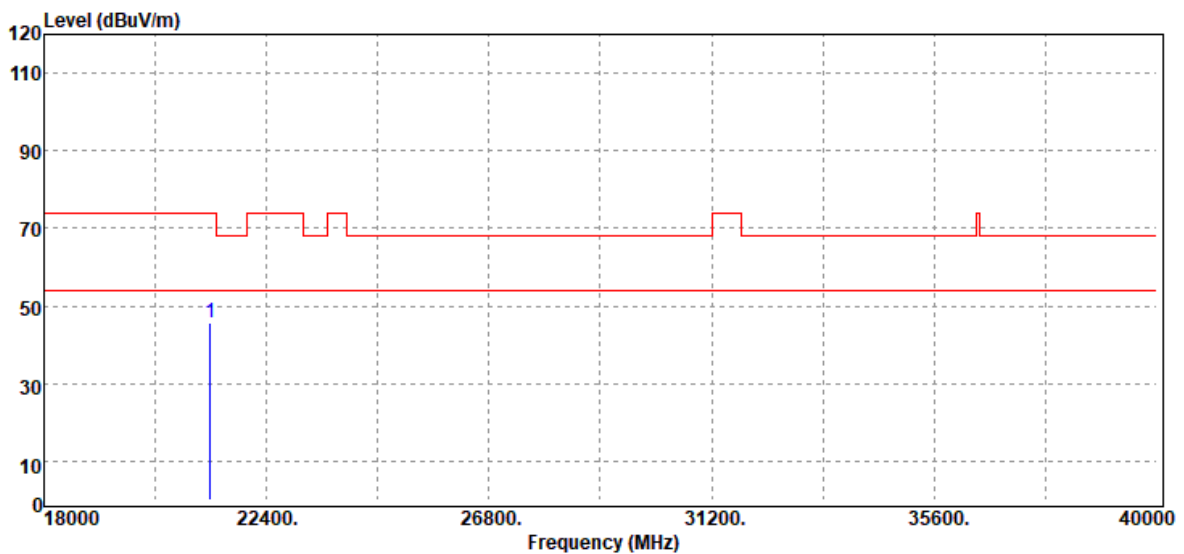


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
21280.00	Peak	29.74	15.84	45.58	74.00	-28.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

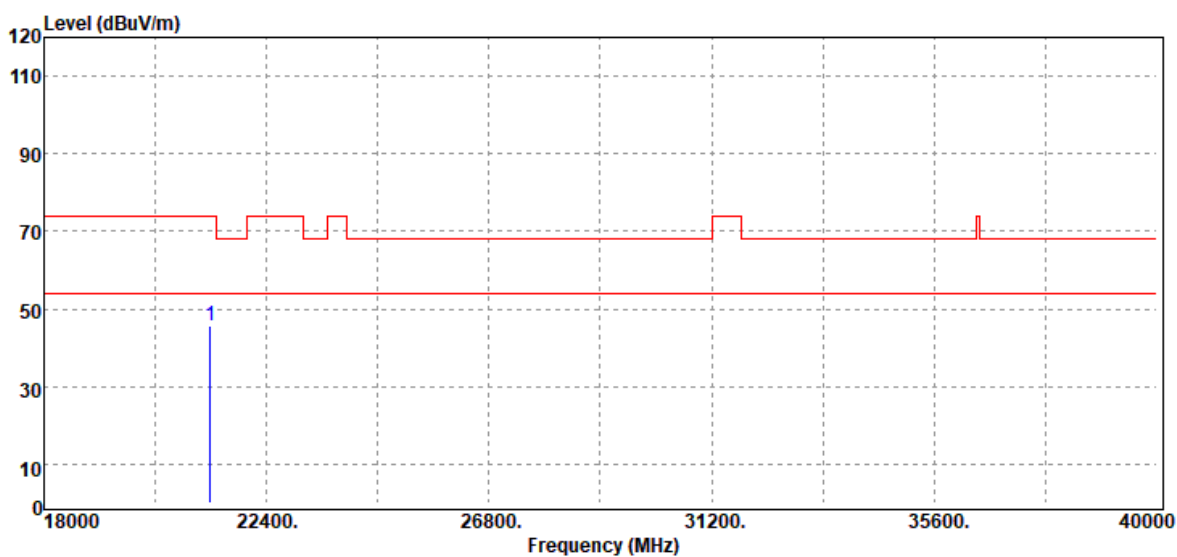

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
21280.00	Peak	29.67	15.84	45.51	74.00	-28.49
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210730W08-RP4

Test Data for UNII-2c

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

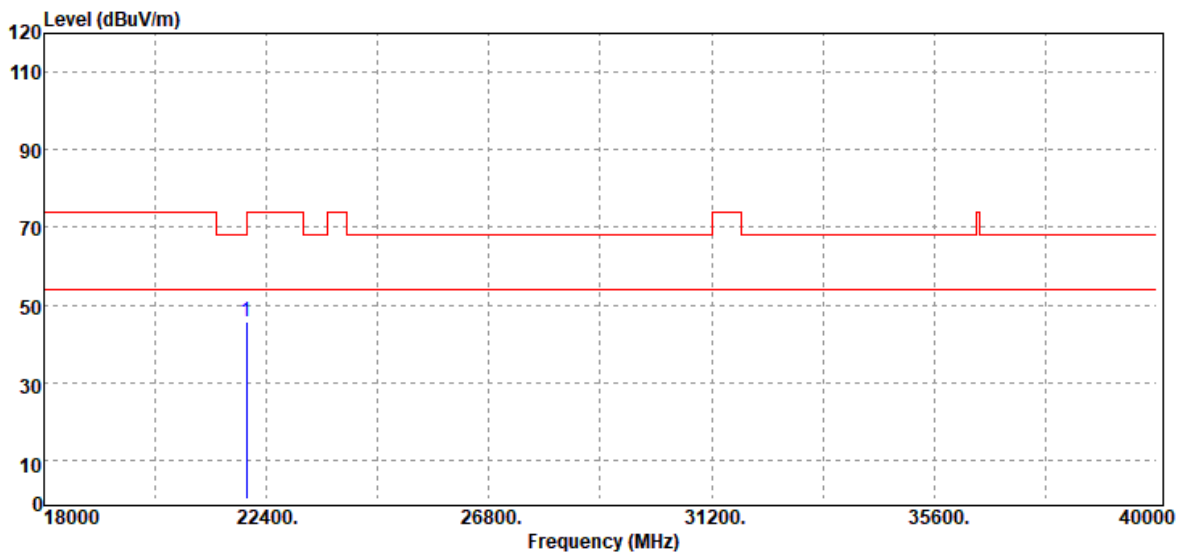


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22000.00	Peak	30.39	15.33	45.72	68.20	-22.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

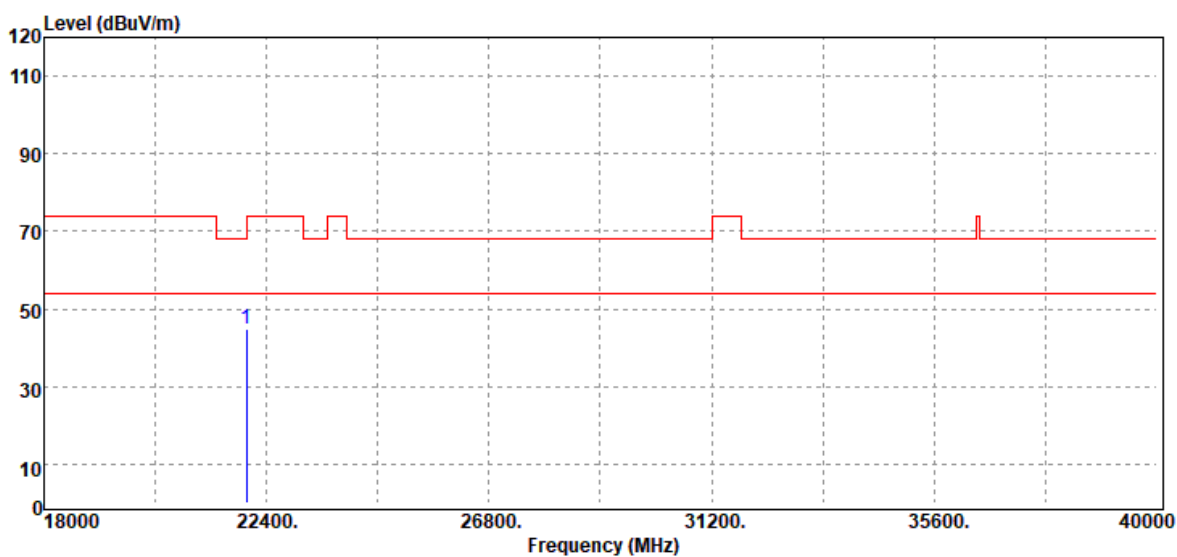


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22000.00	Peak	29.68	15.33	45.01	68.20	-23.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

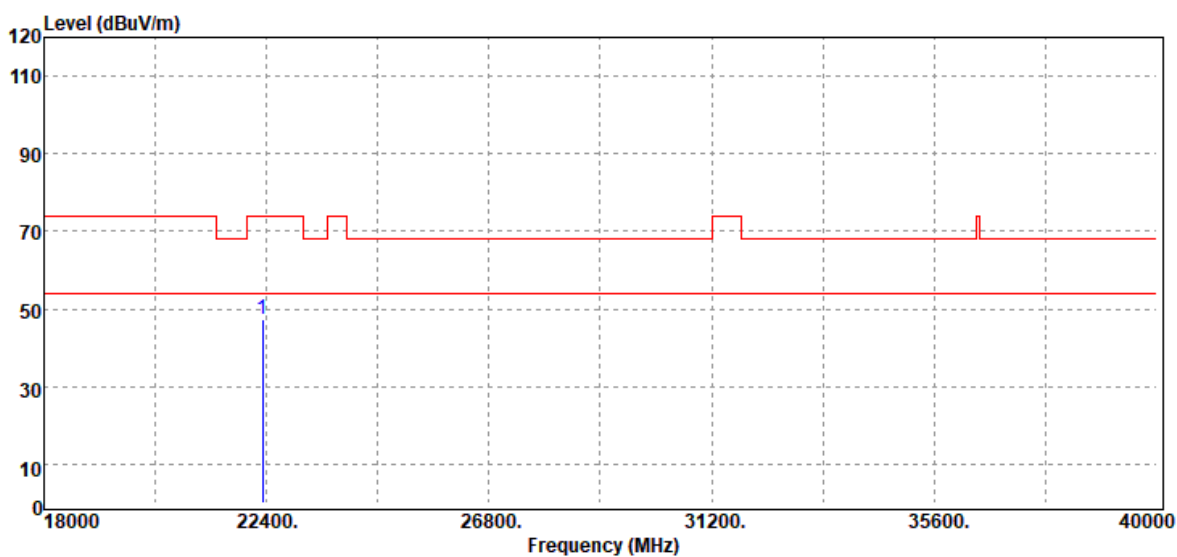


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22320.00	Peak	30.59	16.62	47.21	74.00	-26.79
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

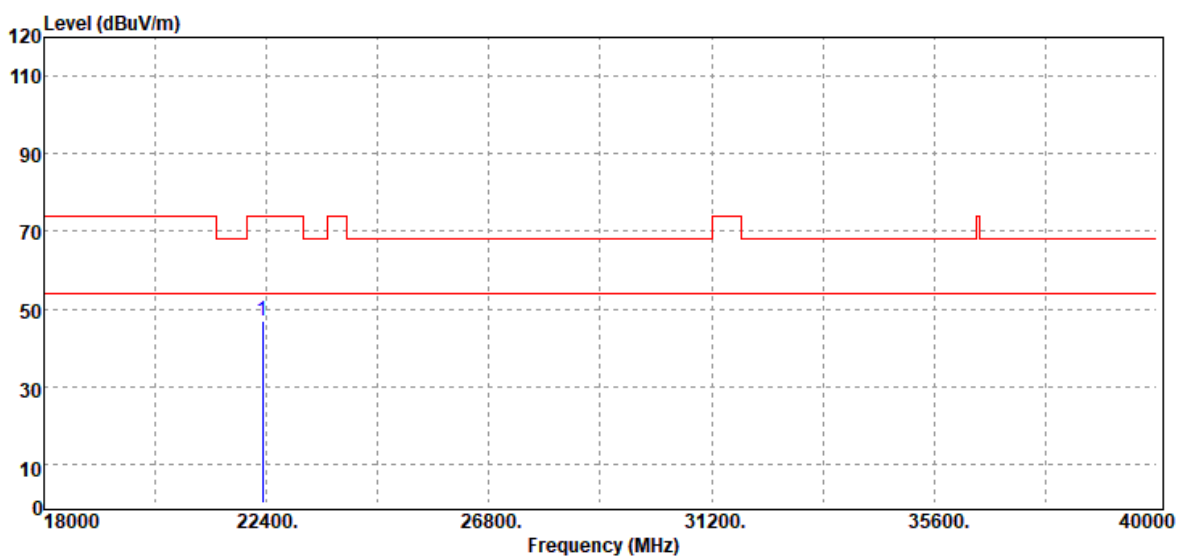

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22320.00	Peak	30.39	16.62	47.01	74.00	-26.99
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210730W08-RP4

Page: 168 / 187

Rev.: 01

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

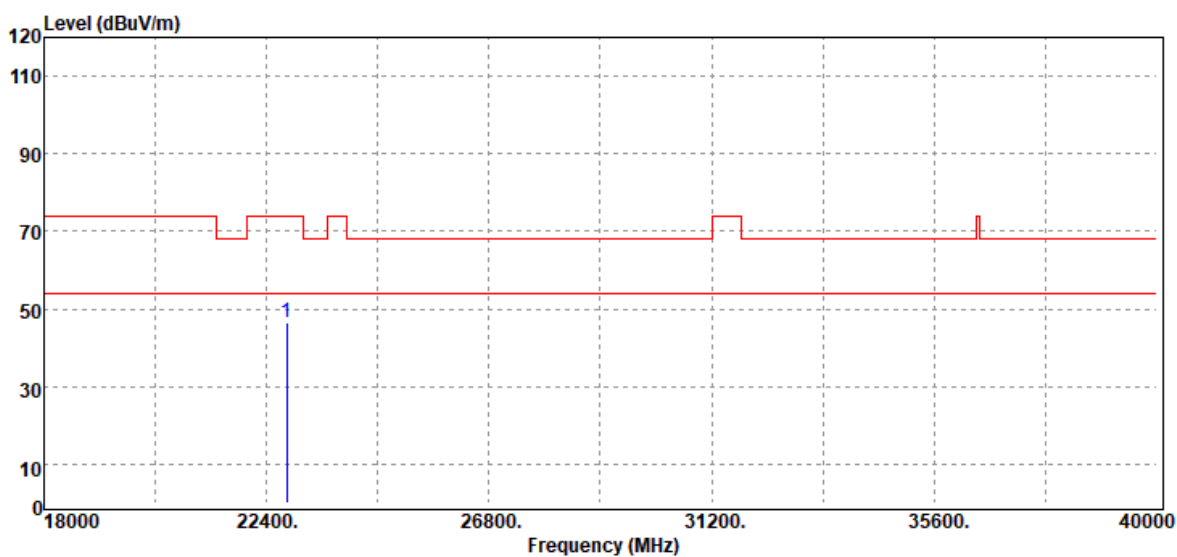


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
22800.00	Peak	30.85	15.77	46.62	74.00	-27.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

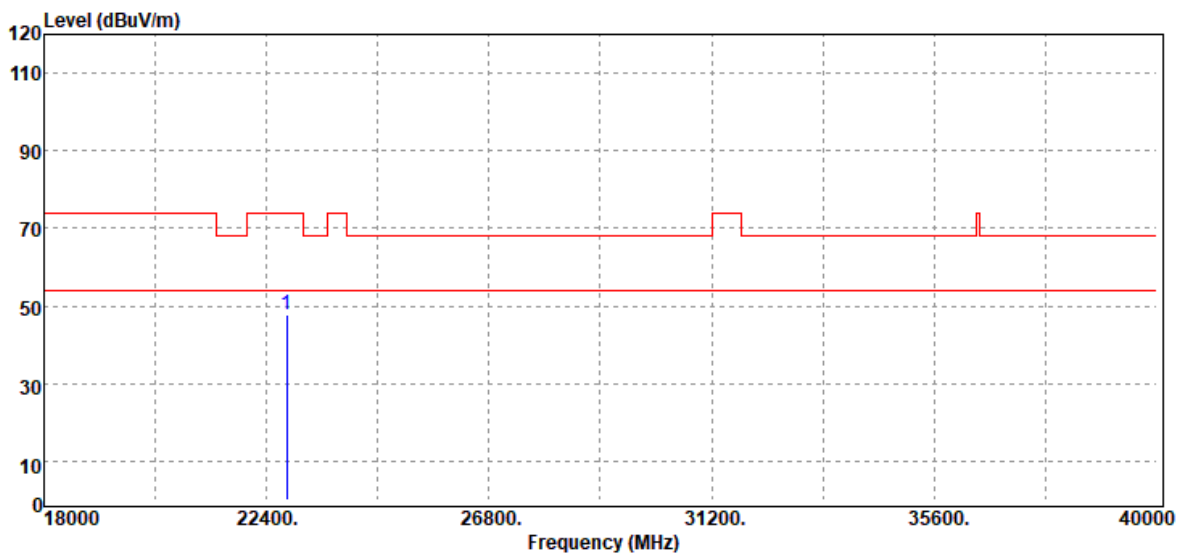


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
22800.00	Peak	31.97	15.77	47.74	74.00	-26.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210730W08-RP4

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

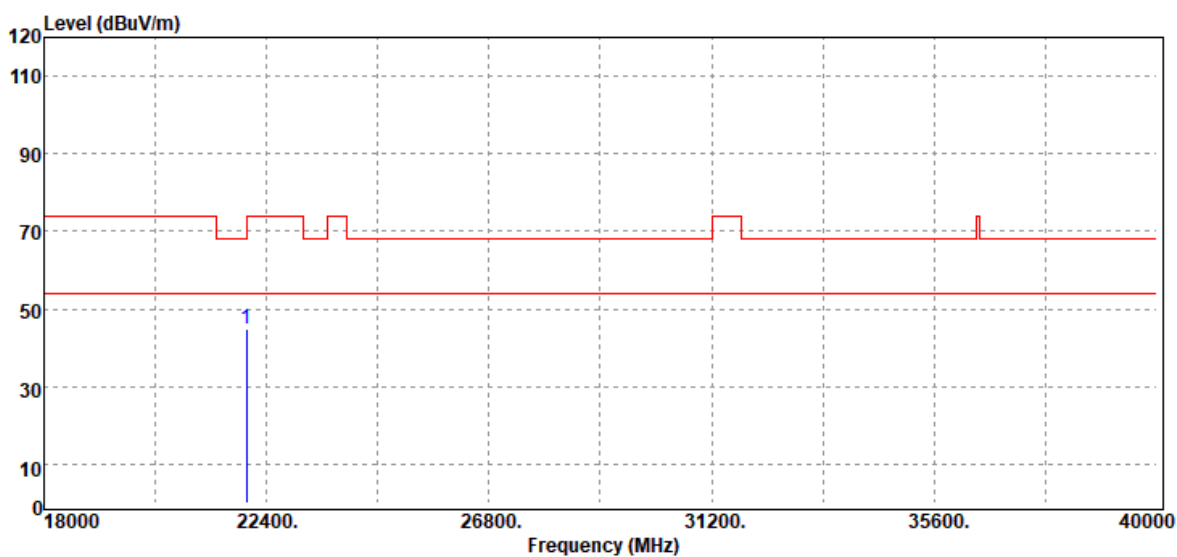


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22000.00	Peak	29.49	15.33	44.82	68.20	-23.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

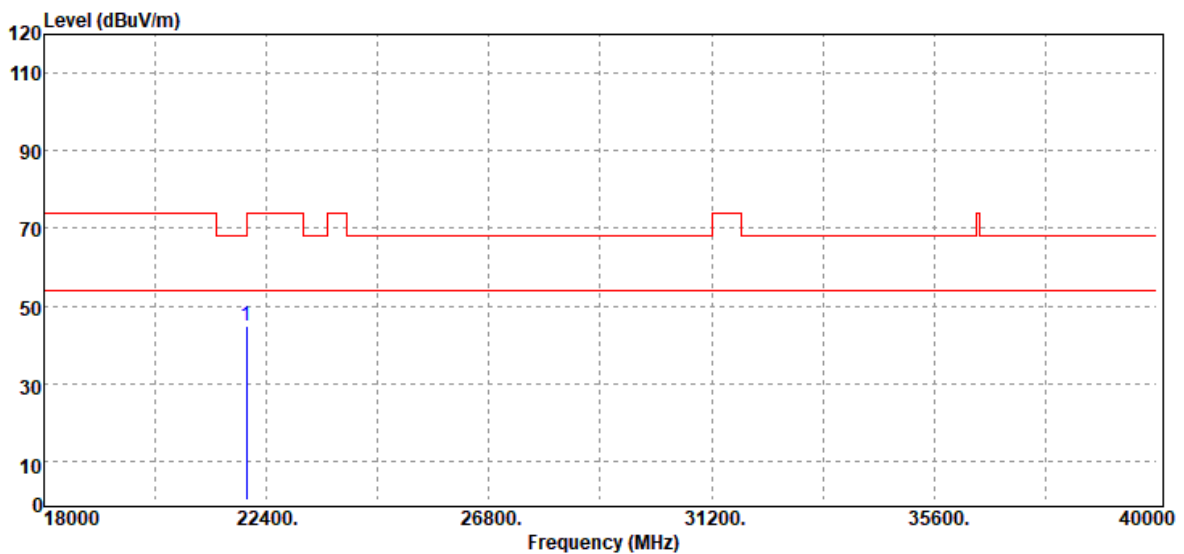


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22000.00	Peak	29.69	15.33	45.02	68.20	-23.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

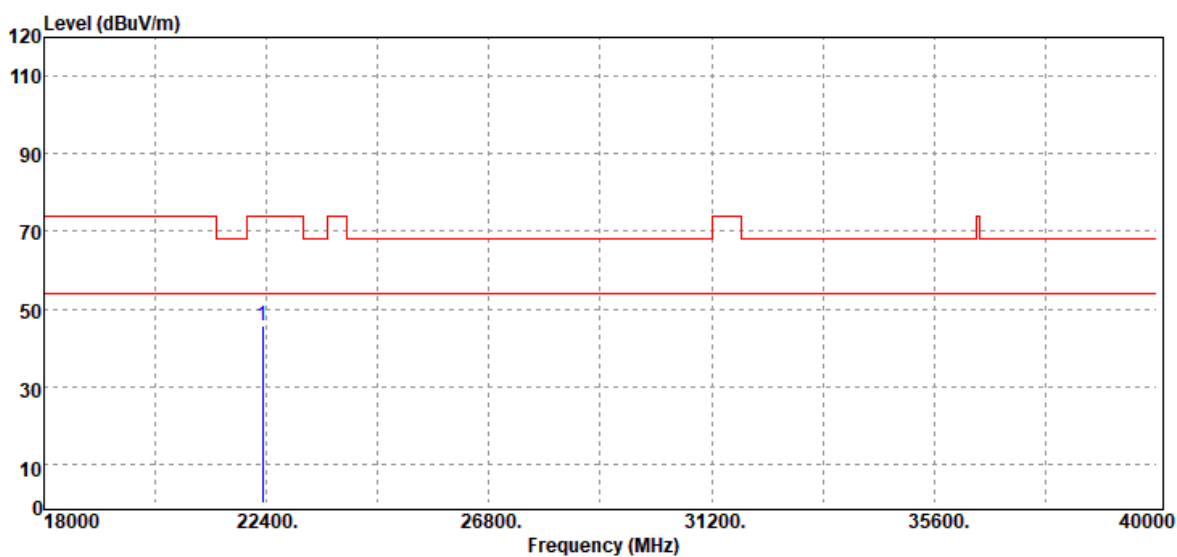


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22320.00	Peak	29.00	16.62	45.62	74.00	-28.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210730W08-RP4

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

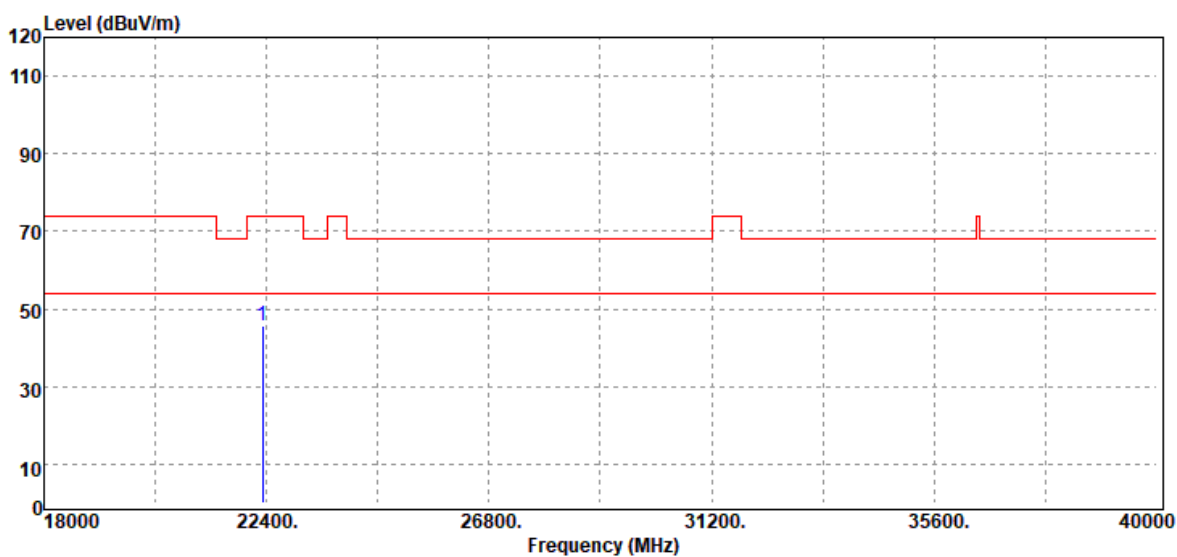


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
22320.00	Peak	29.03	16.62	45.65	74.00	-28.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

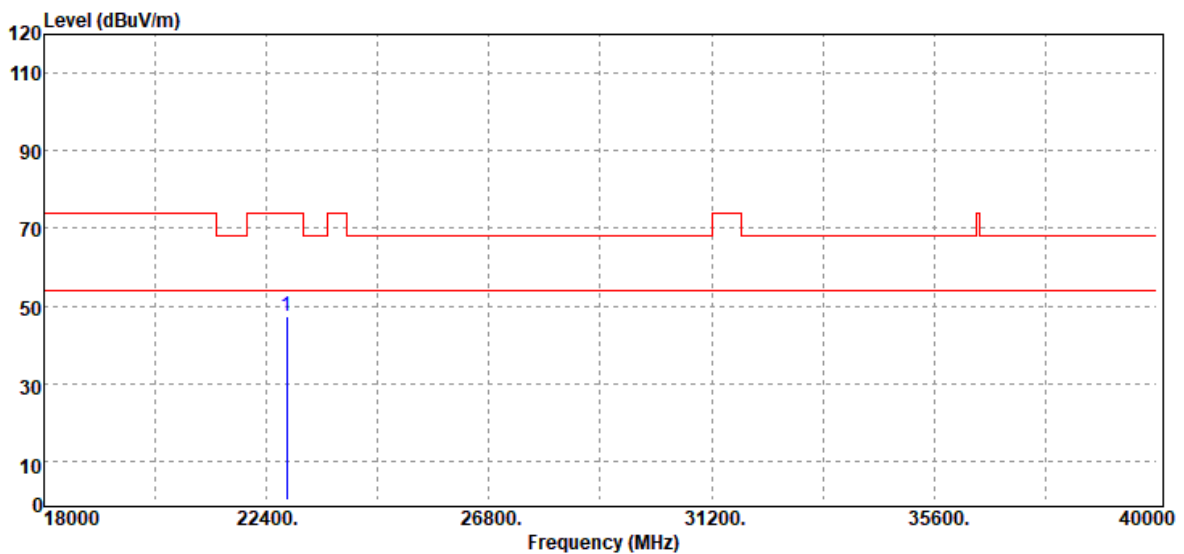


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22800.00	Peak	31.67	15.77	47.44	74.00	-26.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

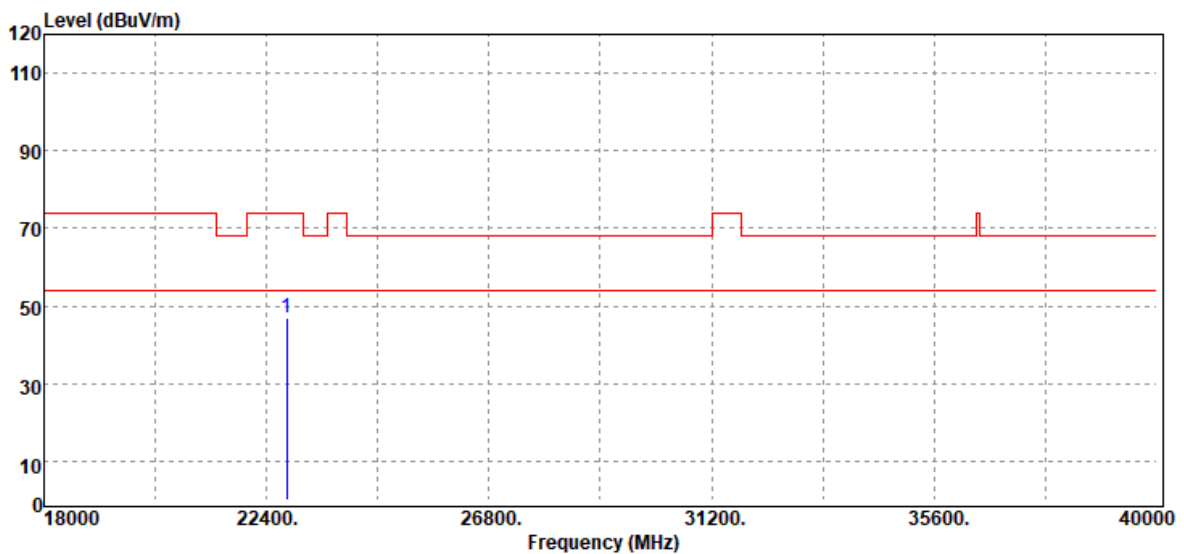


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22800.00	Peak	31.08	15.77	46.85	74.00	-27.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Data for UNII-3

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

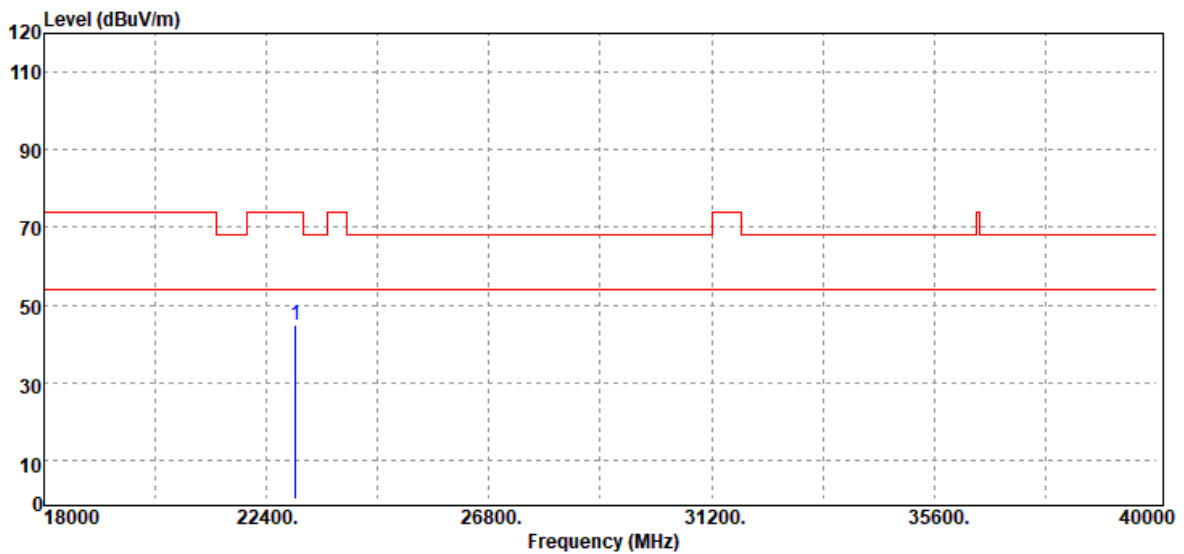


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22980.00	Peak	29.31	15.39	44.70	74.00	-29.30
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

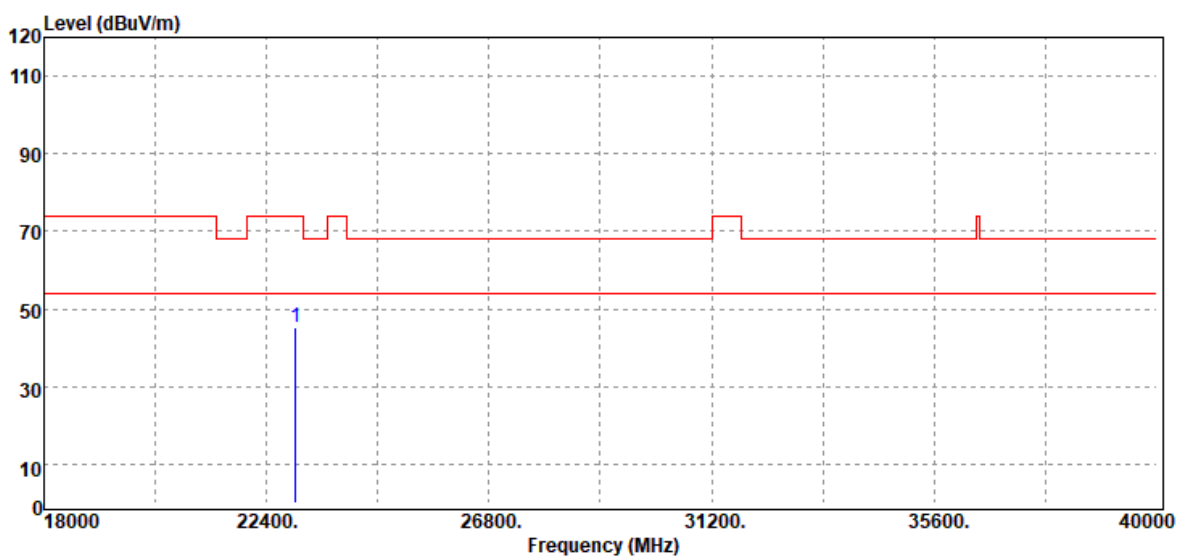


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22980.00	Peak	29.67	15.39	45.06	74.00	-28.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

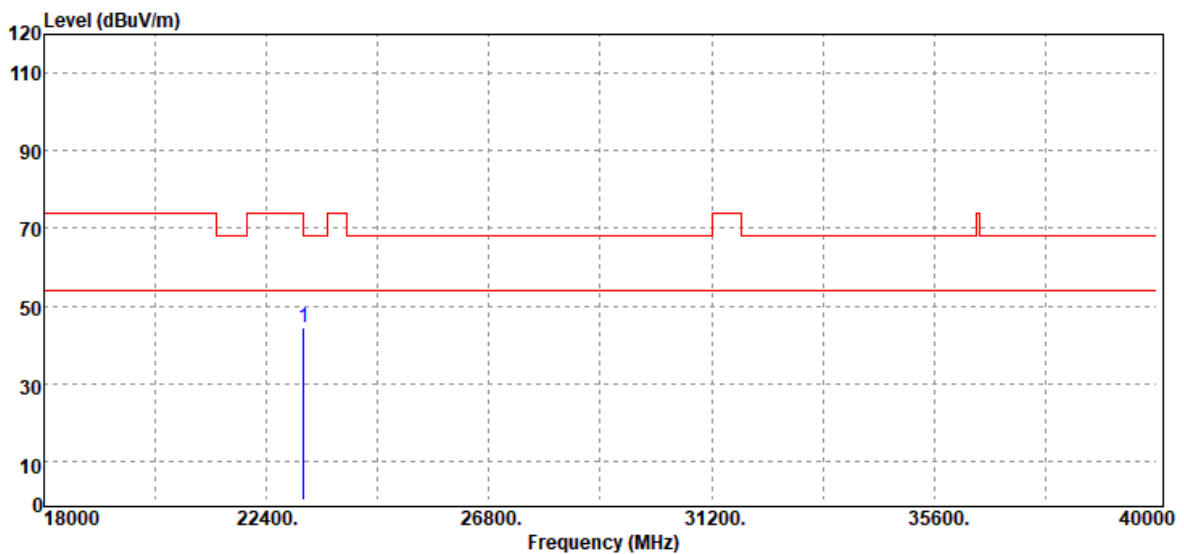


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
23140.00	Peak	28.88	15.57	44.45	68.20	-23.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average	Frequency	18GHz ~ 40GHz

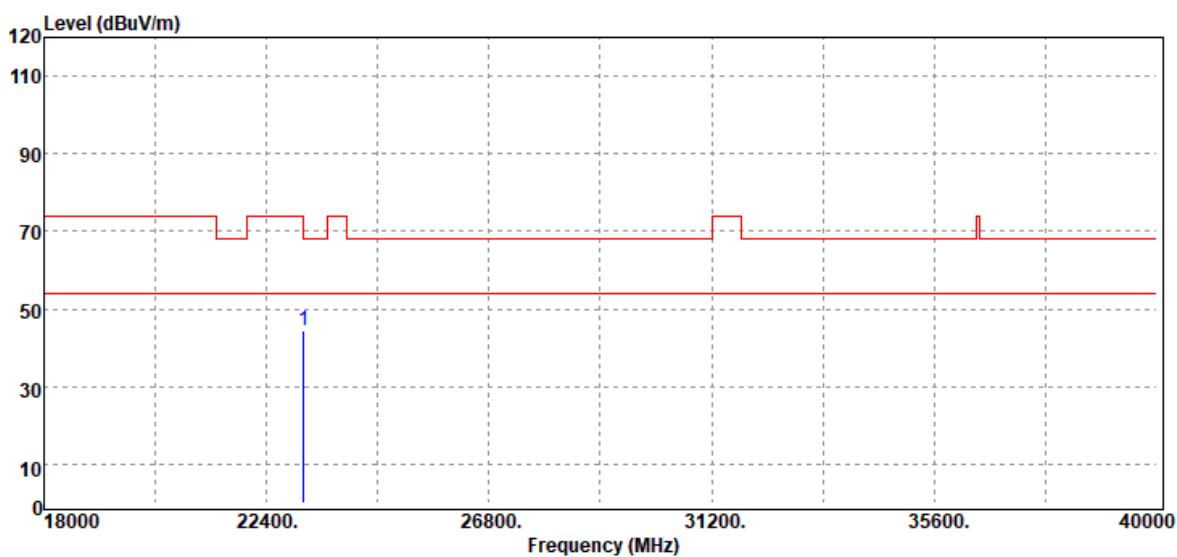

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
23140.00	Peak	28.69	15.57	44.26	68.20	-23.94
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210730W08-RP4

Page: 180 / 187

Rev.: 01

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

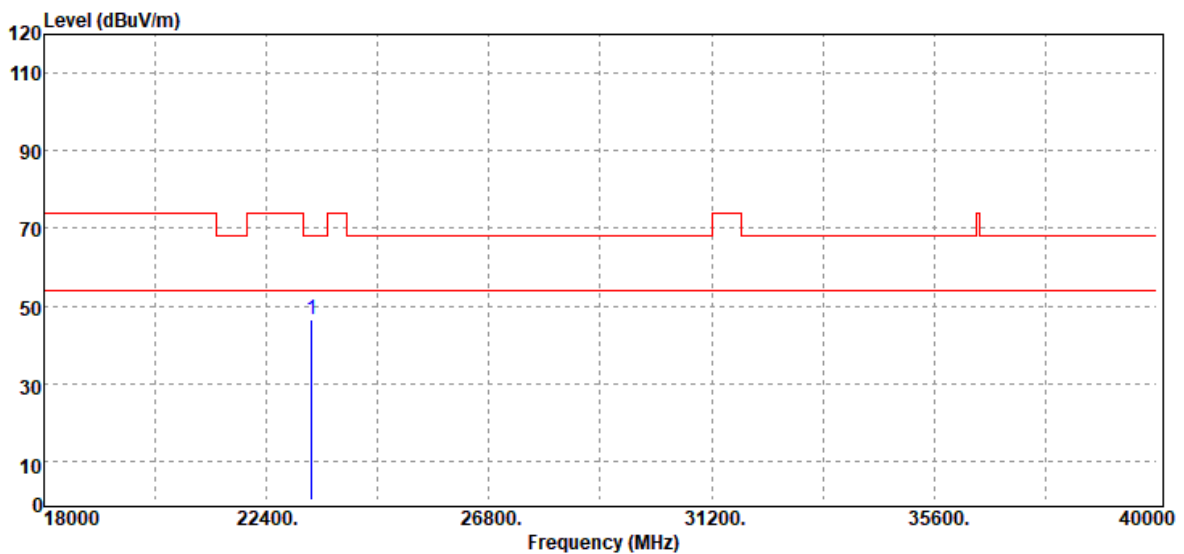


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
23300.00	Peak	30.46	15.85	46.31	68.20	-21.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Frequency	18GHz ~ 40GHz

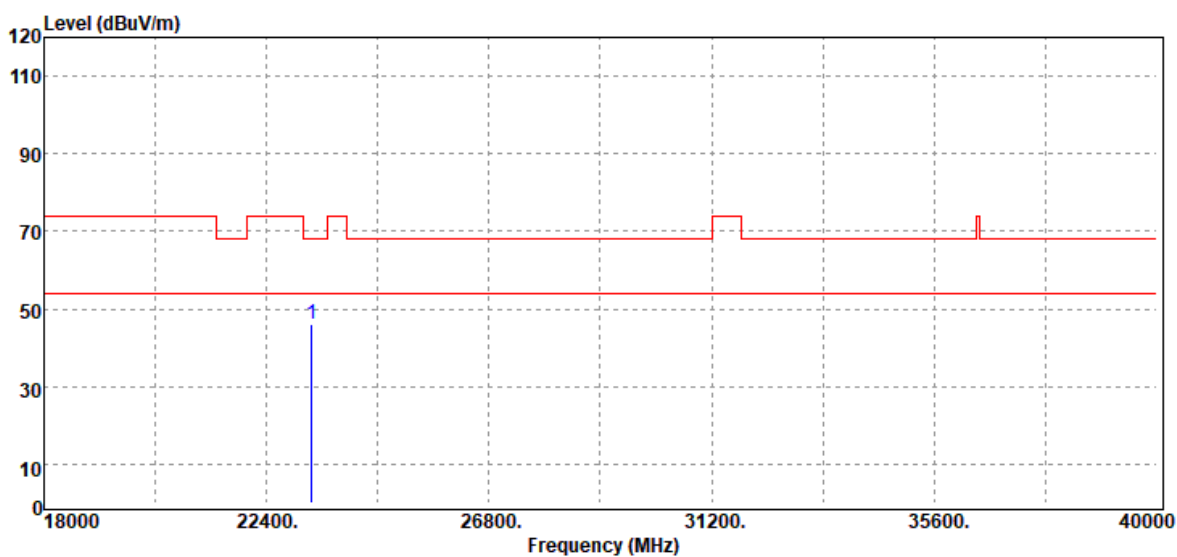


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
23300.00	Peak	30.36	15.85	46.21	68.20	-21.99
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

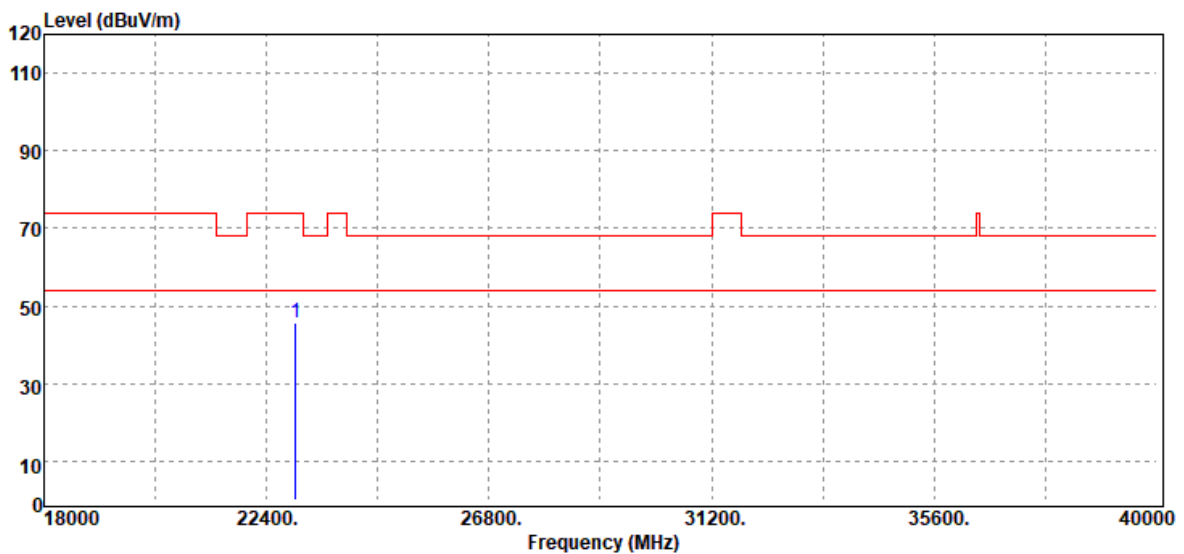


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22980.00	Peak	30.23	15.39	45.62	74.00	-28.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

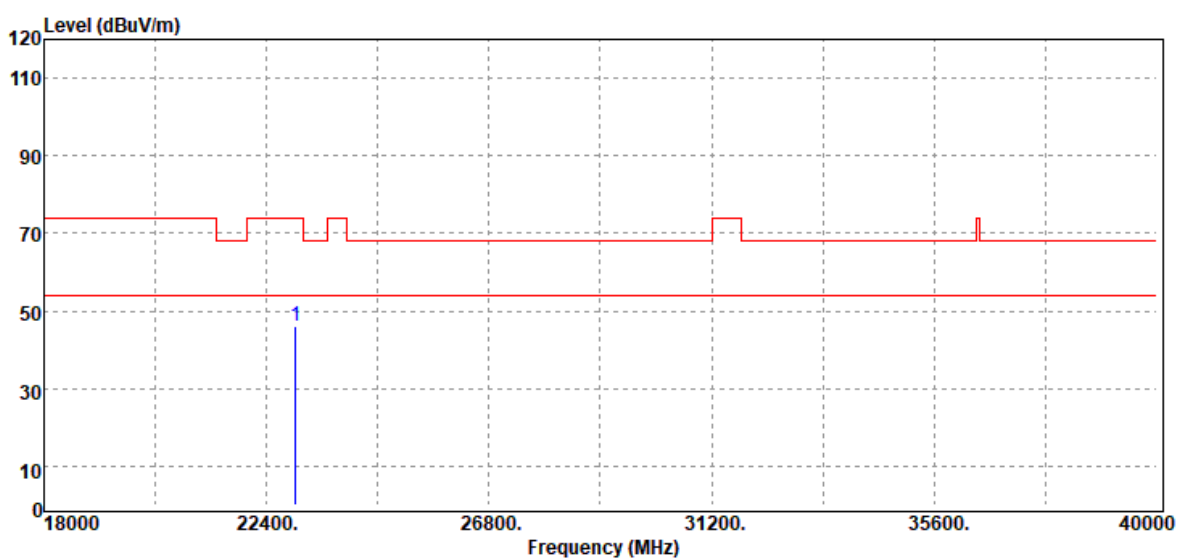


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
22980.00	Peak	30.53	15.39	45.92	74.00	-28.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

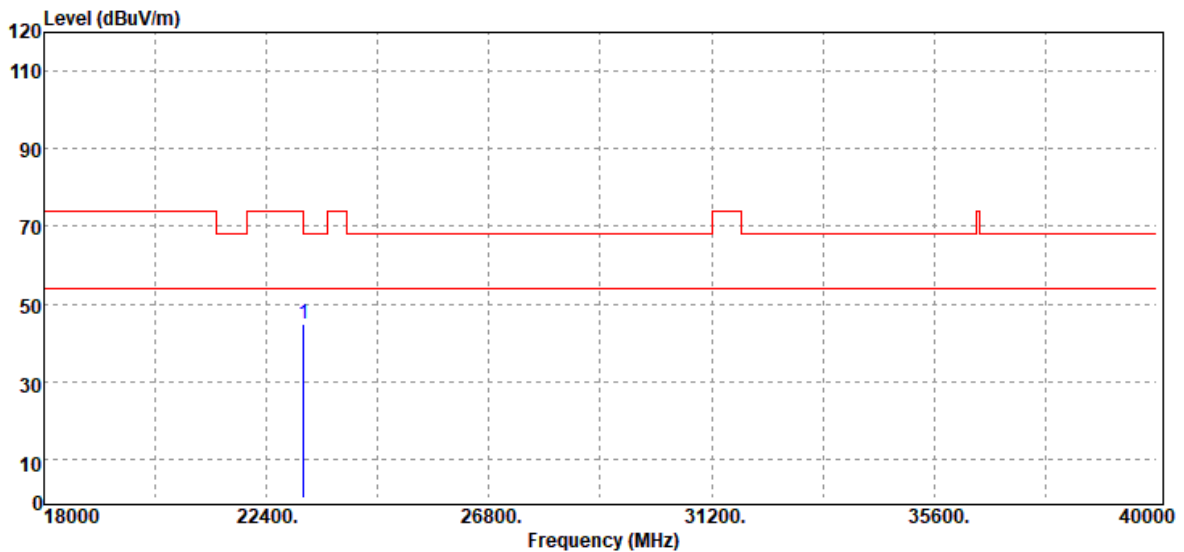


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
23140.00	Peak	29.18	15.57	44.75	68.20	-23.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

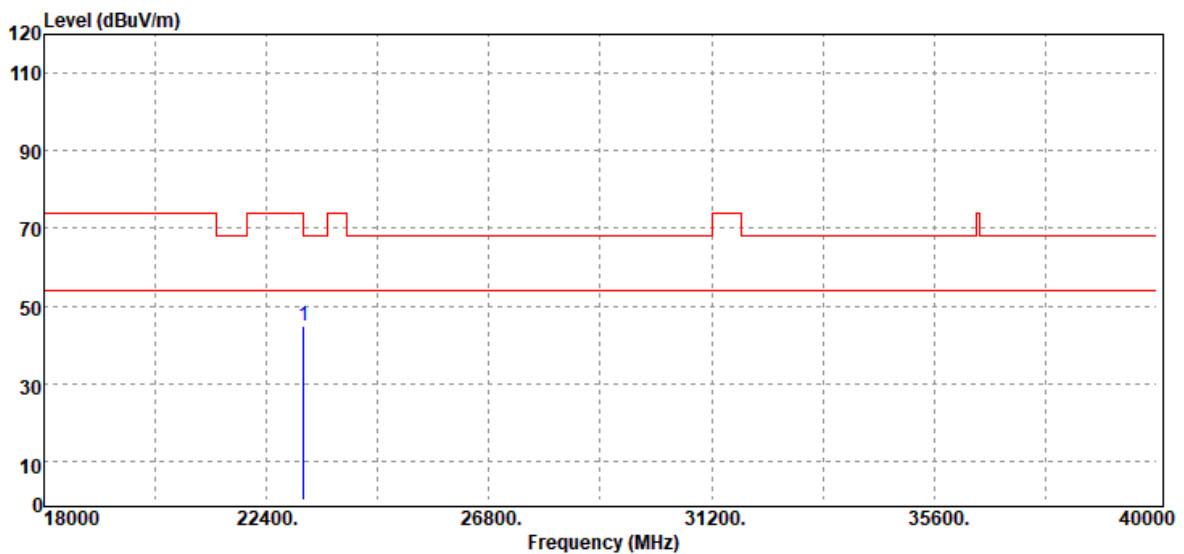


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
23140.00	Peak	29.13	15.57	44.70	68.20	-23.50
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

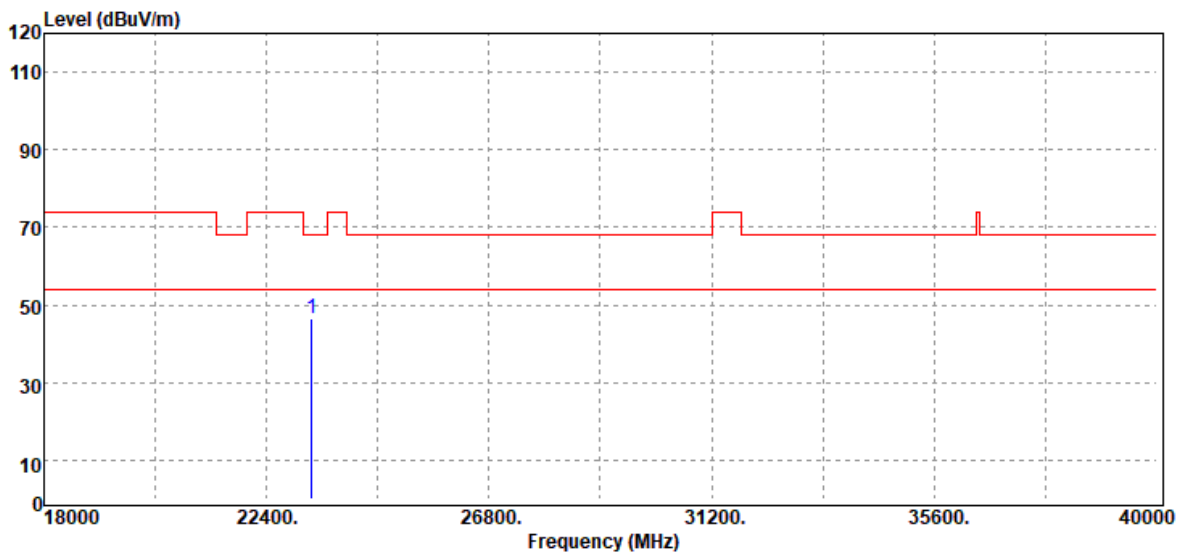


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
23300.00	Peak	30.57	15.85	46.42	68.20	-21.78
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210730W08-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Harmonic	Test Date	December 22, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak	Frequency	18GHz ~ 40GHz

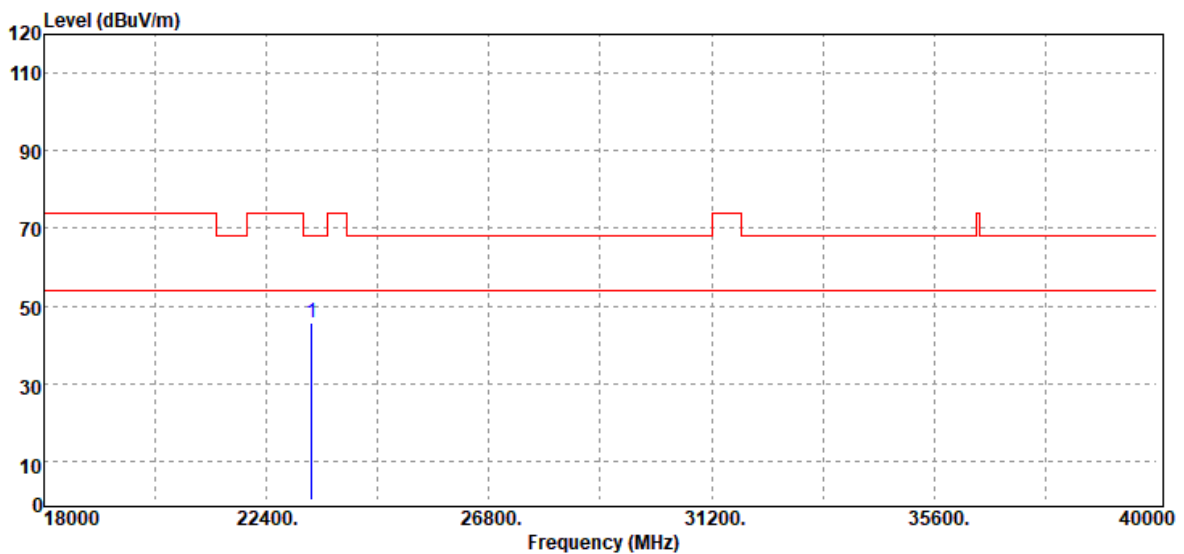

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
23300.00	Peak	30.02	15.85	45.87	68.20	-22.33
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

- End of Test Report -