



FCC RADIO TEST REPORT

FCC ID : GKRGWT9R
Equipment : Wireless Device
Model Name : GWT9R
Applicant : Compal Electronics, Inc.
NO. 581-1 & 581, RUIGUANG RD.,
NEI-HU DISTRICT, TAIPEI CITY 114,
TAIWAN (R.O.C.)
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on May 17, 2021 and testing was started from May 31, 2021 and completed on Sep. 22, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	6
1.3 Modification of EUT	6
1.4 Testing Location	7
1.5 Applicable Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels	10
3 Conducted Test Result	11
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power and ERP/EIRP	12
3.3 Peak-to-Average Ratio	13
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	14
3.5 Conducted Band Edge	15
3.6 Conducted Spurious Emission	16
3.7 Frequency Stability	17
4 Radiated Test Items	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	19
4.4 Field Strength of Spurious Radiation Measurement	20
5 List of Measuring Equipment.....	21
6 Uncertainty of Evaluation	23
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG142875A	01	Initial issue of report	Sep. 27, 2021
FG142875A	02	1. Revise support unit used in test configuration and system in section 2.3 2. Revise Frequency Stability in appendix A2 3. Add remark in section 2.1	Dec. 15, 2021

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	Under limit 32.77 dB at 5640.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Avis Chuang

Report Producer: Amy Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Device
Model Name	GWT9R
FCC ID	GKRGWT9R
EUT supports Radios application	WCDMA/HSPA/LTE/NFC(Passive) WLAN 11b/g/n HT20 Bluetooth BR/EDR/LE

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
14151FQEJXN01N	Conducted Measurement ERP/EIRP
15041FQEJSN00C 14261FQEJSN05P	Radiated Spurious Emission

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	<Top Antenna> Band V: 23.47 dBm Band II: 23.42 dBm Band IV: 23.39 dBm <Bottom Antenna> Band V: 24.30 dBm
Antenna Type	<Top Antenna> : IFA Antenna type <Bottom Antenna> : IFA Antenna type
Type of Modulation	WCDMA: QPSK (Uplink) HSDPA: 16QAM (Downlink) HSUPA: QPSK (Uplink)

<Top Antenna>

Radio Tech	Band Number	Antenna name	Gain
WCDMA	B2	Ant 0	-8.6
WCDMA	B4	Ant 0	-6.3
WCDMA	B5	Ant 0	-14.2

<Bottom Antenna>

Radio Tech	Band Number	Antenna name	Gain
WCDMA	B5	Ant 1	-14.2

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Oscar Chi
Temperature	21-24°C
Relative Humidity	51-55%

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY (TAF Code: 3786)
Test Engineer	Harvey Guo, Fu Chen and Troye Hsieh
Temperature	18.3~26.2°C
Relative Humidity	53.7~69.3%
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find <Top Antenna>: X Plane with Strap 1 for Cellular Band, X Plane with Strap 3 for AWS Band, Z Plane with Strap 1 for PCS Band; <Bottom Antenna>: X Plane with Strap 1 for Cellular Band as worst plane.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II

All modes, data rates and positions were investigated.


Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark:

1. For Conducted Test Cases, the tests were performed with Bottom Antenna as Worst case.
2. Radiation Spurious Emission full test on EUT with Strap 1 and spot check the worst case with Strap 3 on each antenna.

2.2 Connection Diagram of Test System

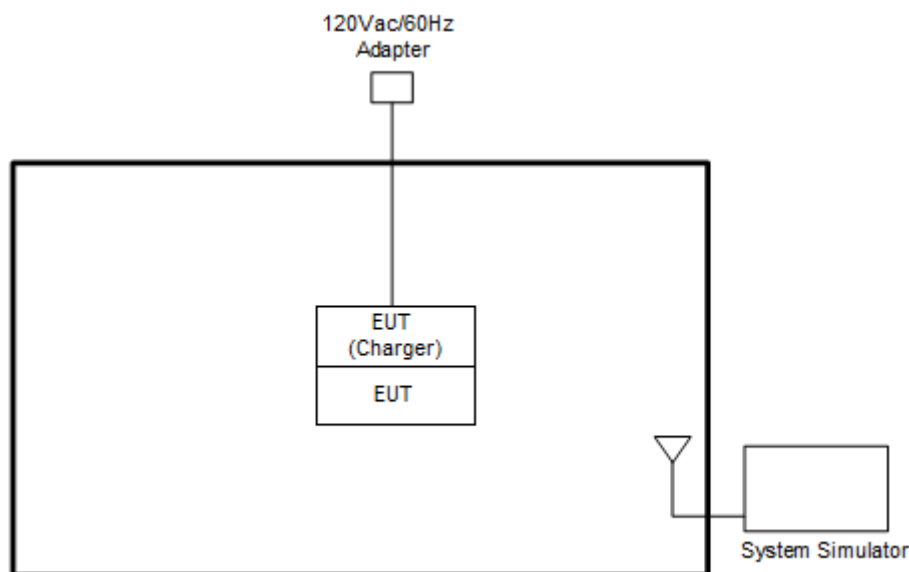

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	Adapter	N/A	N/A	N/A	N/A	N/A
4.	Wireless Device	N/A	G943M	GKRG943M	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10 dB attenuator.

Example:

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

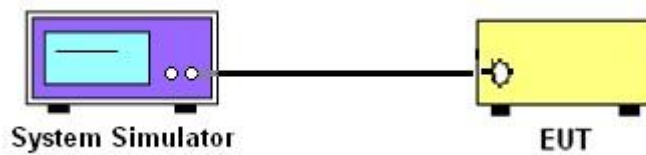

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

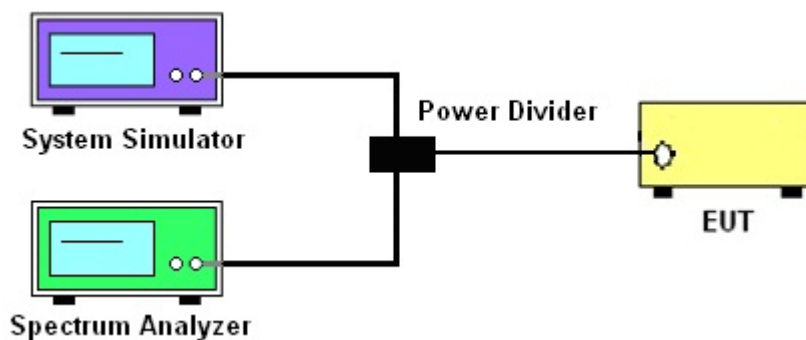

3.1.4 Frequency Stability

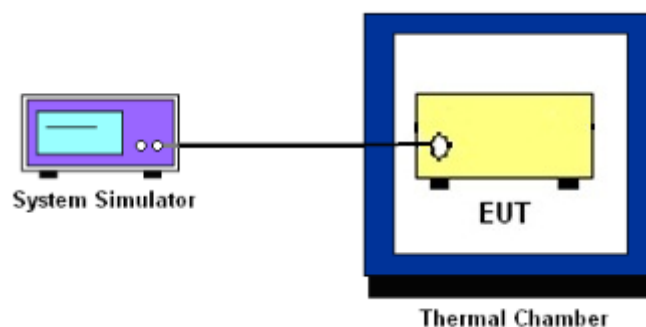

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(This is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated test below 30MHz

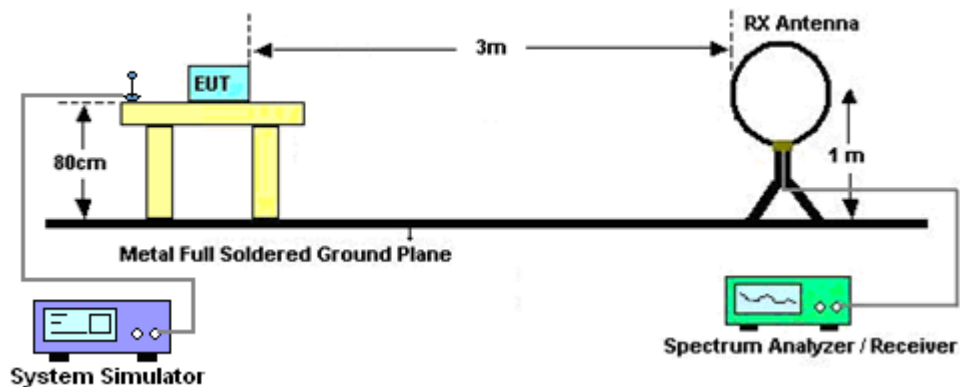

For radiated test from 30MHz to 1GHz

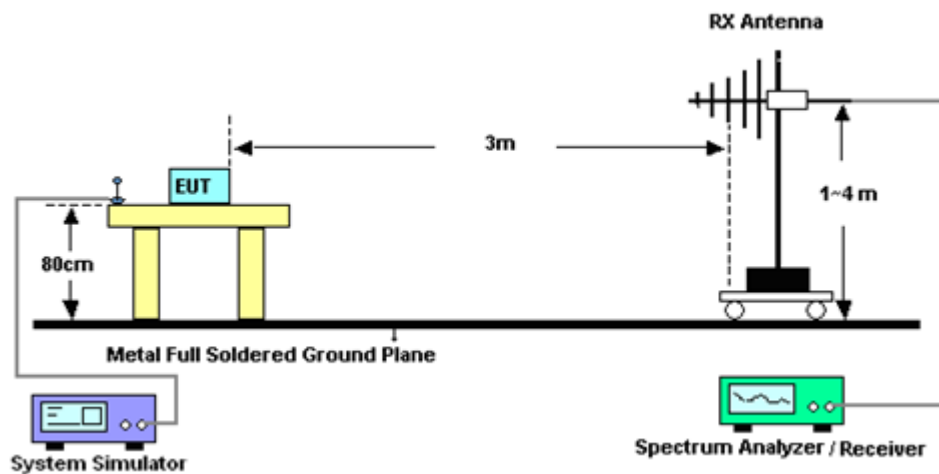

For radiated test above 1GHz

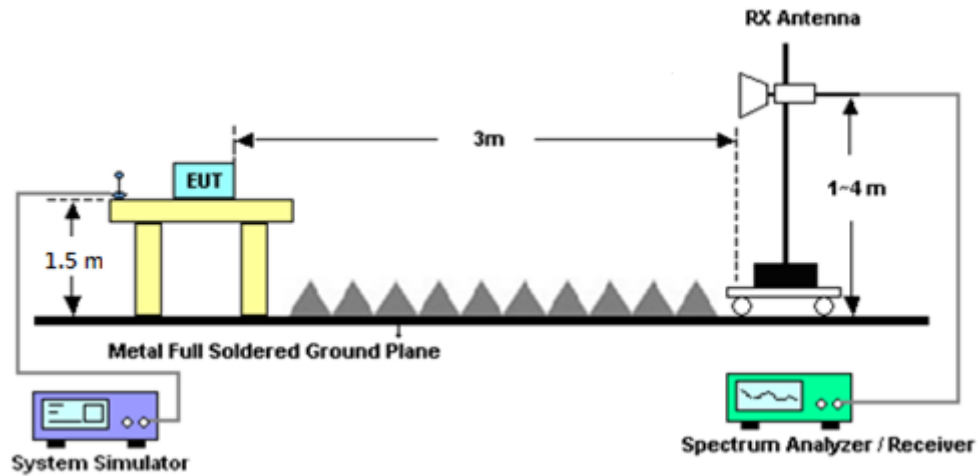

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Nov. 03, 2020	Jun. 02, 2021~ Sep. 22, 2021	Nov. 02, 2021	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	May 18, 2021	Jun. 02, 2021~ Sep. 22, 2021	May 17, 2022	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	Jun. 02, 2021~ Sep. 22, 2021	Oct. 10, 2021	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802 N1D01N-06	54682 & AT-N0603	30MHz~1GHz	Sep. 25, 2020	Jun. 02, 2021~ Sep. 22, 2021	Sep. 24, 2021	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 19, 2020	Jun. 02, 2021~ Sep. 22, 2021	Nov. 18, 2021	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00994	18GHz~40GHz	Nov. 19, 2020	Jun. 02, 2021~ Sep. 22, 2021	Nov. 18, 2021	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Jun. 02, 2021~ Sep. 22, 2021	Jan. 03, 2022	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 12, 2020	Jun. 02, 2021~ Sep. 22, 2021	Nov. 11, 2021	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 02, 2020	Jun. 02, 2021~ Sep. 22, 2021	Dec. 01, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	0600789	18GHz~40GHz	Jul. 31, 2020	Jun. 02, 2021~ Jun. 23, 2021	Jul. 30, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Jun. 24, 2021~ Sep. 22, 2021	Jun. 21, 2022	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 23, 2020	Jun. 02, 2021~ Sep. 22, 2021	Oct. 22, 2021	Radiation (03CH11-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Dec. 14, 2020	Jun. 02, 2021~ Sep. 22, 2021	Dec. 13, 2021	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 02, 2021~ Sep. 22, 2021	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 02, 2021~ Sep. 22, 2021	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 02, 2021~ Sep. 22, 2021	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jun. 02, 2021~ Sep. 22, 2021	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 11, 2021	Jun. 02, 2021~ Sep. 22, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 11, 2021	Jun. 02, 2021~ Sep. 22, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 11, 2021	Jun. 02, 2021~ Sep. 22, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz~40GHz	Mar. 11, 2021	Jun. 02, 2021~ Sep. 22, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-900-1000-15000-6 OSS	SN12	1GHz High Pass Filter	Nov. 05, 2020	Jun. 02, 2021~ Sep. 22, 2021	Nov. 04, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-6 OSS	SN3	3GHz High Pass Filter	Sep. 14, 2020	Jun. 02, 2021~ Sep. 12, 2021	Sep. 13, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-6 OSS	SN3	3GHz High Pass Filter	Sep. 13, 2021	Sep. 14, 2021~ Sep. 22, 2021	Sep. 12, 2022	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 18, 2020	Jun. 02, 2021~ Sep. 22, 2021	Nov. 17, 2021	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 03, 2021	May 31, 2021~ Jun. 04, 2021	Mar. 02, 2022	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 03, 2020	May 31, 2021~ Jun. 04, 2021	Sep. 02, 2021	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 14, 2020	May 31, 2021~ Jun. 04, 2021	Sep. 13, 2021	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 05, 2020	May 31, 2021~ Jun. 04, 2021	Oct. 04, 2021	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Sep. 07, 2020	May 31, 2021~ Jun. 04, 2021	Sep. 06, 2021	Conducted (TH03-HY)
Power Divider	Warison	WCOU-0.4-26. 5S-20	#A	N/A	Nov. 03, 2020	May 31, 2021~ Jun. 04, 2021	Nov. 02, 2021	Conducted (TH03-HY)

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.09 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.56 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.00 dB
--	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

<Top Antenna>

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -14.2 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	23.43	23.47	23.41	7.12	0.0052
HSDPA Subtest-1	21.49	21.44	21.43		
HSDPA Subtest-2	21.52	21.49	21.47		
HSDPA Subtest-3	20.52	20.49	20.44		
HSDPA Subtest-4	19.26	19.31	19.17		
HSUPA Subtest-1	19.93	19.96	19.88		
HSUPA Subtest-2	17.25	17.24	17.17		
HSUPA Subtest-3	19.30	19.31	19.25		
HSUPA Subtest-4	17.22	17.21	17.16		
HSUPA Subtest-5	21.12	21.30	21.20		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = -8.6 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	23.40	23.42	23.25	14.82	0.0303
HSDPA Subtest-1	21.82	21.76	21.54		
HSDPA Subtest-2	21.81	21.80	21.60		
HSDPA Subtest-3	20.94	20.92	20.69		
HSDPA Subtest-4	19.94	19.86	19.69		
HSUPA Subtest-1	19.93	19.86	19.67		
HSUPA Subtest-2	17.73	17.66	17.43		
HSUPA Subtest-3	19.97	19.92	19.72		
HSUPA Subtest-4	17.72	17.71	17.47		
HSUPA Subtest-5	21.60	21.60	21.40		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = -6.3 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.39	23.36	23.16	17.09	0.0512
HSDPA Subtest-1	21.83	21.84	21.66		
HSDPA Subtest-2	21.85	21.90	21.75		
HSDPA Subtest-3	20.81	20.87	20.75		
HSDPA Subtest-4	19.88	19.95	19.80		
HSUPA Subtest-1	19.87	19.88	19.71		
HSUPA Subtest-2	17.66	17.65	17.58		
HSUPA Subtest-3	19.94	19.89	19.78		
HSUPA Subtest-4	17.66	17.68	17.55		
HSUPA Subtest-5	21.60	21.70	21.50		
Limit	EIRP < 1W			Result	Pass



<Bottom Antenna>

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -14.2 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.25	24.28	24.30		
HSDPA Subtest-1	22.38	22.44	22.47		
HSDPA Subtest-2	22.43	22.47	22.51		
HSDPA Subtest-3	21.39	21.50	21.47		
HSDPA Subtest-4	20.18	20.28	20.26		
HSUPA Subtest-1	20.83	20.89	20.92		
HSUPA Subtest-2	18.18	18.21	18.19		
HSUPA Subtest-3	20.23	20.23	20.22		
HSUPA Subtest-4	18.17	18.19	18.23		
HSUPA Subtest-5	20.80	20.81	20.90		
Limit	ERP < 7W			Result	Pass



A2. WCDMA

Peak-to-Average Ratio


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.88	2.28	2.56	PASS
Middle CH	3.00	2.32	3.04	
Highest CH	2.96	2.48	3.16	



WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																												
Lowest Channel	Lowest Channel																												
Ref: 30 dBm, Offset: 16 dB, BW: 10 MHz, AQT: 3.125 ms, Center: 826.4 MHz, Mean: 22.20 dBm, Peak: 25.31 dBm, Crest: 3.11 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.20 dBm</td></tr><tr><td>Peak</td><td>25.31 dBm</td></tr><tr><td>Crest</td><td>3.11 dB</td></tr></table> <table><tr><td>10 %</td><td>1.68 dB</td></tr><tr><td>1 %</td><td>2.48 dB</td></tr><tr><td>.1 %</td><td>2.88 dB</td></tr><tr><td>.01 %</td><td>3.04 dB</td></tr></table>	Mean	22.20 dBm	Peak	25.31 dBm	Crest	3.11 dB	10 %	1.68 dB	1 %	2.48 dB	.1 %	2.88 dB	.01 %	3.04 dB	Ref: 30 dBm, Offset: 17.5 dB, BW: 10 MHz, AQT: 3.125 ms, Center: 1.8524 GHz, Mean: 22.21 dBm, Peak: 24.68 dBm, Crest: 2.46 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.21 dBm</td></tr><tr><td>Peak</td><td>24.68 dBm</td></tr><tr><td>Crest</td><td>2.46 dB</td></tr></table> <table><tr><td>10 %</td><td>1.44 dB</td></tr><tr><td>1 %</td><td>2.00 dB</td></tr><tr><td>.1 %</td><td>2.28 dB</td></tr><tr><td>.01 %</td><td>2.40 dB</td></tr></table>	Mean	22.21 dBm	Peak	24.68 dBm	Crest	2.46 dB	10 %	1.44 dB	1 %	2.00 dB	.1 %	2.28 dB	.01 %	2.40 dB
Mean	22.20 dBm																												
Peak	25.31 dBm																												
Crest	3.11 dB																												
10 %	1.68 dB																												
1 %	2.48 dB																												
.1 %	2.88 dB																												
.01 %	3.04 dB																												
Mean	22.21 dBm																												
Peak	24.68 dBm																												
Crest	2.46 dB																												
10 %	1.44 dB																												
1 %	2.00 dB																												
.1 %	2.28 dB																												
.01 %	2.40 dB																												
Middle Channel	Middle Channel																												
Ref: 30 dBm, Offset: 16 dB, BW: 10 MHz, AQT: 3.125 ms, Center: 826.4 MHz, Mean: 22.14 dBm, Peak: 25.52 dBm, Crest: 3.38 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.14 dBm</td></tr><tr><td>Peak</td><td>25.52 dBm</td></tr><tr><td>Crest</td><td>3.38 dB</td></tr></table> <table><tr><td>10 %</td><td>1.72 dB</td></tr><tr><td>1 %</td><td>2.60 dB</td></tr><tr><td>.1 %</td><td>3.00 dB</td></tr><tr><td>.01 %</td><td>3.24 dB</td></tr></table>	Mean	22.14 dBm	Peak	25.52 dBm	Crest	3.38 dB	10 %	1.72 dB	1 %	2.60 dB	.1 %	3.00 dB	.01 %	3.24 dB	Ref: 30 dBm, Offset: 17.5 dB, BW: 10 MHz, AQT: 3.125 ms, Center: 1.88 GHz, Mean: 22.17 dBm, Peak: 24.68 dBm, Crest: 2.50 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.17 dBm</td></tr><tr><td>Peak</td><td>24.68 dBm</td></tr><tr><td>Crest</td><td>2.50 dB</td></tr></table> <table><tr><td>10 %</td><td>1.52 dB</td></tr><tr><td>1 %</td><td>2.08 dB</td></tr><tr><td>.1 %</td><td>2.32 dB</td></tr><tr><td>.01 %</td><td>2.44 dB</td></tr></table>	Mean	22.17 dBm	Peak	24.68 dBm	Crest	2.50 dB	10 %	1.52 dB	1 %	2.08 dB	.1 %	2.32 dB	.01 %	2.44 dB
Mean	22.14 dBm																												
Peak	25.52 dBm																												
Crest	3.38 dB																												
10 %	1.72 dB																												
1 %	2.60 dB																												
.1 %	3.00 dB																												
.01 %	3.24 dB																												
Mean	22.17 dBm																												
Peak	24.68 dBm																												
Crest	2.50 dB																												
10 %	1.52 dB																												
1 %	2.08 dB																												
.1 %	2.32 dB																												
.01 %	2.44 dB																												
Highest Channel	Highest Channel																												
Ref: 30 dBm, Offset: 16 dB, BW: 10 MHz, AQT: 3.125 ms, Center: 846.6 MHz, Mean: 22.20 dBm, Peak: 25.45 dBm, Crest: 3.25 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.20 dBm</td></tr><tr><td>Peak</td><td>25.45 dBm</td></tr><tr><td>Crest</td><td>3.25 dB</td></tr></table> <table><tr><td>10 %</td><td>1.72 dB</td></tr><tr><td>1 %</td><td>2.56 dB</td></tr><tr><td>.1 %</td><td>2.96 dB</td></tr><tr><td>.01 %</td><td>3.12 dB</td></tr></table>	Mean	22.20 dBm	Peak	25.45 dBm	Crest	3.25 dB	10 %	1.72 dB	1 %	2.56 dB	.1 %	2.96 dB	.01 %	3.12 dB	Ref: 30 dBm, Offset: 17.5 dB, BW: 10 MHz, AQT: 3.125 ms, Center: 1.9076 GHz, Mean: 22.09 dBm, Peak: 24.75 dBm, Crest: 2.66 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.09 dBm</td></tr><tr><td>Peak</td><td>24.75 dBm</td></tr><tr><td>Crest</td><td>2.66 dB</td></tr></table> <table><tr><td>10 %</td><td>1.56 dB</td></tr><tr><td>1 %</td><td>2.16 dB</td></tr><tr><td>.1 %</td><td>2.48 dB</td></tr><tr><td>.01 %</td><td>2.60 dB</td></tr></table>	Mean	22.09 dBm	Peak	24.75 dBm	Crest	2.66 dB	10 %	1.56 dB	1 %	2.16 dB	.1 %	2.48 dB	.01 %	2.60 dB
Mean	22.20 dBm																												
Peak	25.45 dBm																												
Crest	3.25 dB																												
10 %	1.72 dB																												
1 %	2.56 dB																												
.1 %	2.96 dB																												
.01 %	3.12 dB																												
Mean	22.09 dBm																												
Peak	24.75 dBm																												
Crest	2.66 dB																												
10 %	1.56 dB																												
1 %	2.16 dB																												
.1 %	2.48 dB																												
.01 %	2.60 dB																												


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

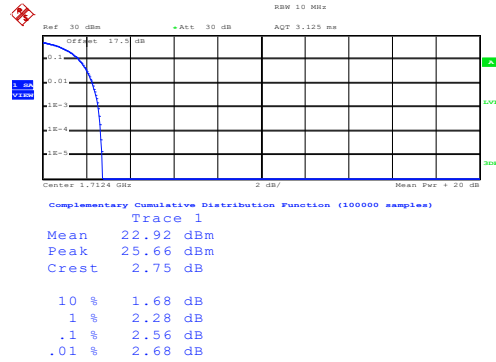


Date: 31.MAY.2021 15:13:07

Middle Channel

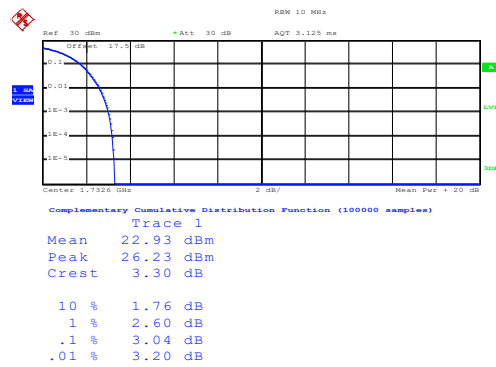

Date: 31.MAY.2021 15:13:24


Highest Channel

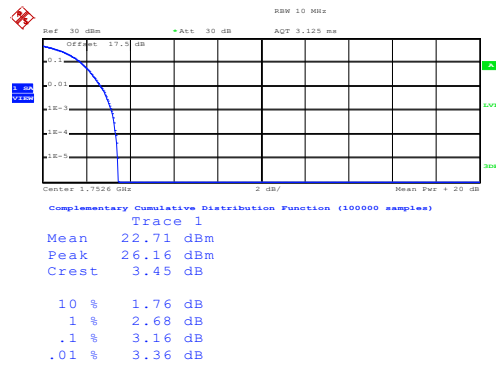


Date: 31.MAY.2021 15:13:40


**26dB Bandwidth**

Mode	WCDMA Band V: 26dB BW(MHz)	WCDMA Band II: 26dB BW(MHz)	WCDMA Band IV: 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.72	4.80	4.77
Middle CH	4.72	4.77	4.72
Highest CH	4.70	4.80	4.71

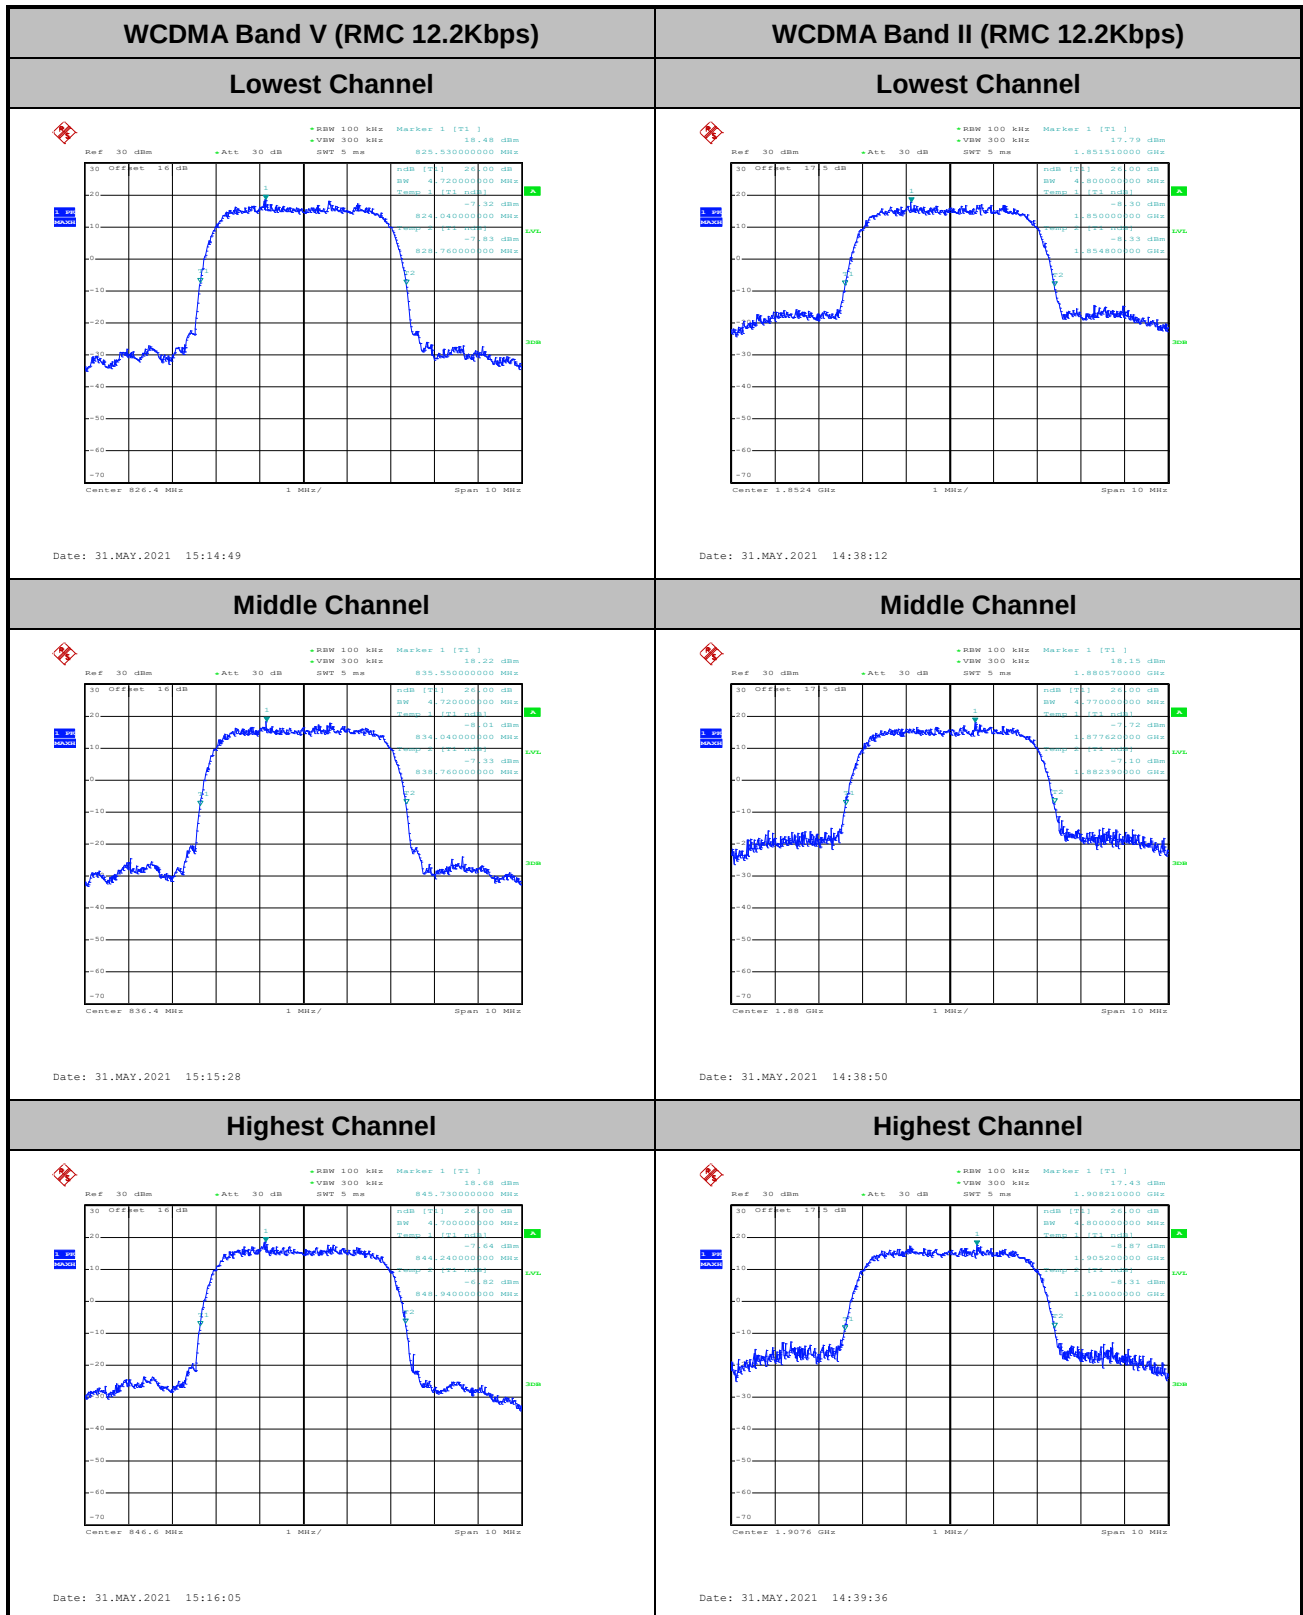


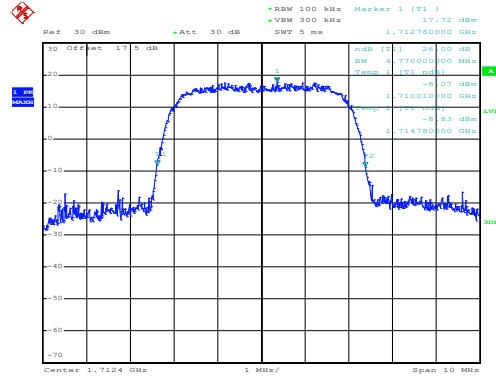WCDMA Band IV (RMC 12.2Kbps)
Lowest Channel


Date: 31.MAY.2021 14:57:24

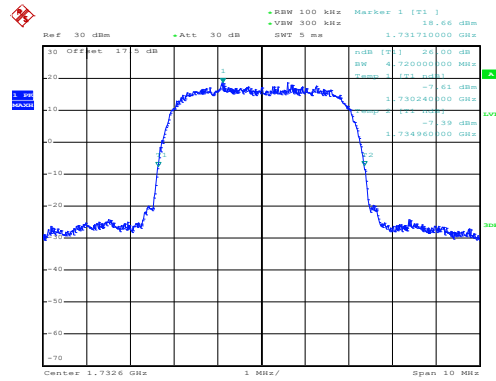Middle Channel


Date: 31.MAY.2021 14:58:00

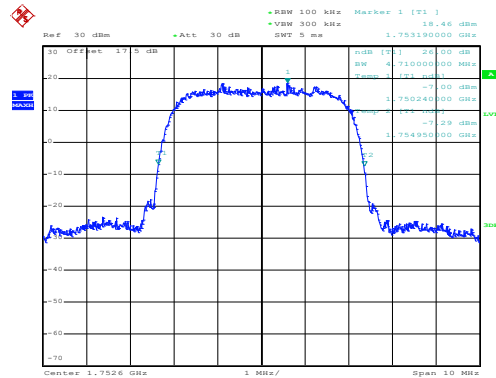Highest Channel


Date: 31.MAY.2021 14:58:37


**Occupied Bandwidth**

Mode	WCDMA Band V: 99% OBW(MHz)	WCDMA Band II: 99% OBW(MHz)	WCDMA Band IV: 99% OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.17	4.14
Middle CH	4.14	4.15	4.14
Highest CH	4.13	4.17	4.14



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

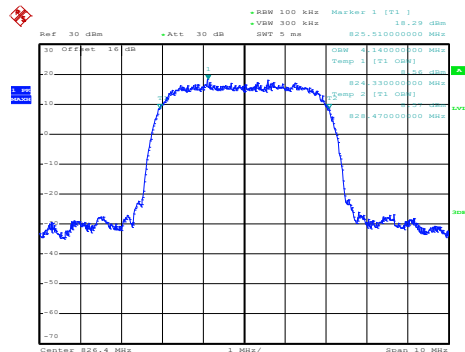

Date: 31.MAY.2021 15:19:59


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

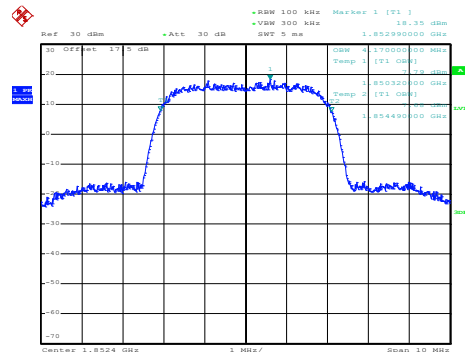


Date: 31.MAY.2021 14:48:04

Middle Channel

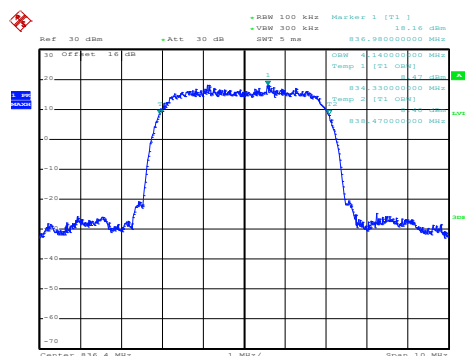


Date: 31.MAY.2021 15:20:39

Middle Channel

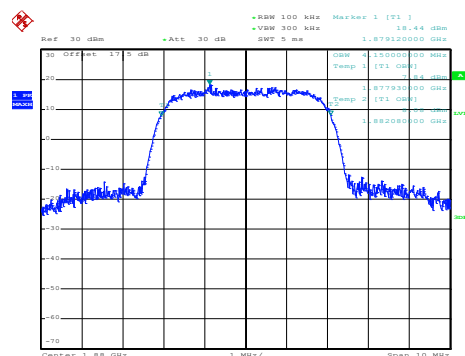


Date: 31.MAY.2021 14:48:41

Highest Channel

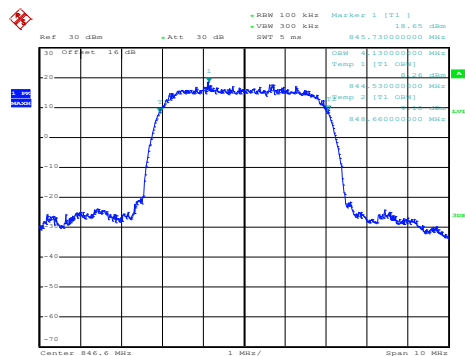

Date: 31.MAY.2021 15:21:16


Highest Channel

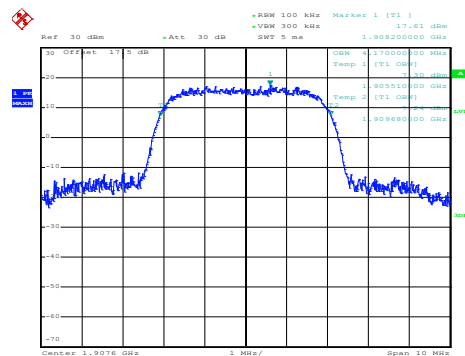

Date: 31.MAY.2021 14:49:20


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

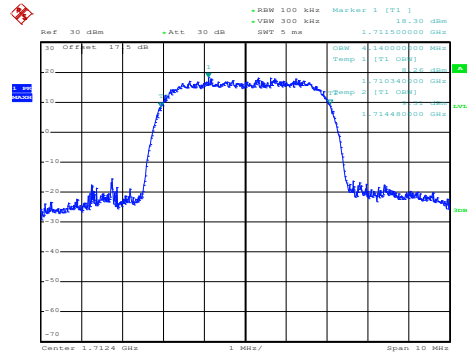


Date: 31.MAY.2021 15:02:18

Middle Channel

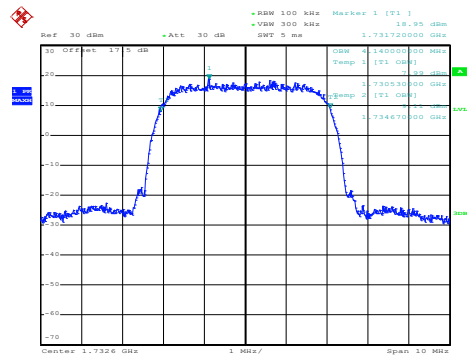


Date: 31.MAY.2021 15:02:55


Highest Channel

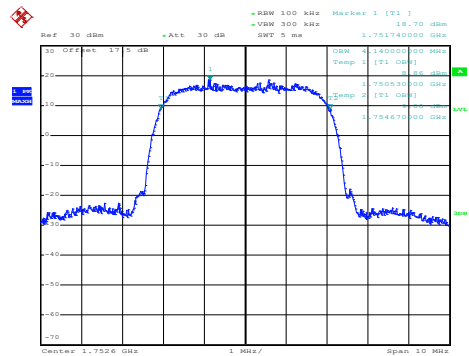


Date: 31.MAY.2021 15:03:32

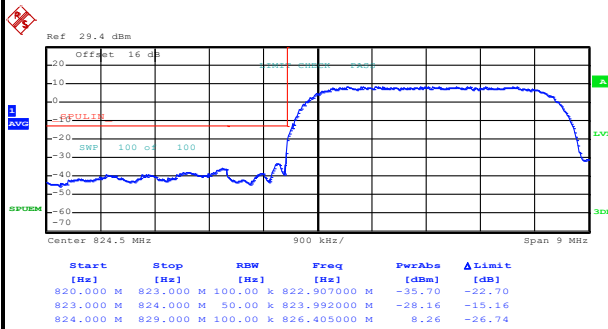**Conducted Band Edge****WCDMA Band V (RMC 12.2Kbps)****Lowest Band Edge**


Date: 31.MAY.2021 15:24:17

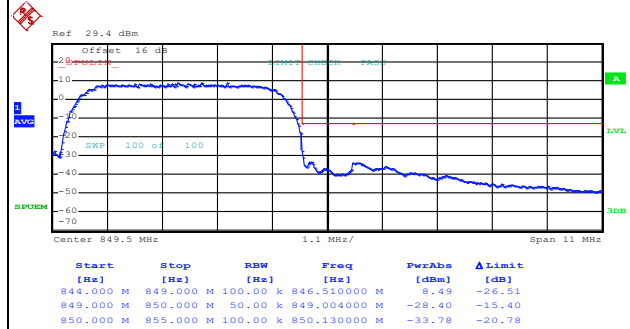Highest Band Edge

Date: 31.MAY.2021 15:27:09

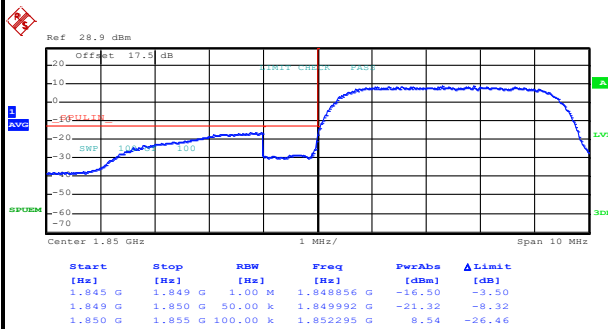WCDMA Band II (RMC 12.2Kbps)**Lowest Band Edge**

Date: 31.MAY.2021 14:52:34

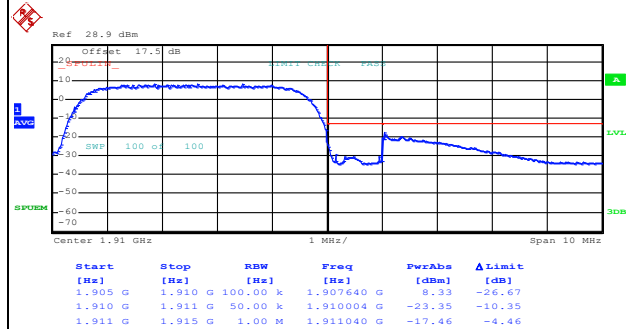
Highest Band Edge

Date: 31.MAY.2021 14:55:27




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

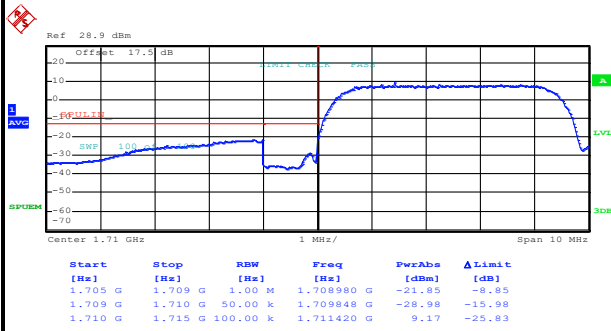







Date: 31.MAY.2021 15:06:31

Highest Band Edge

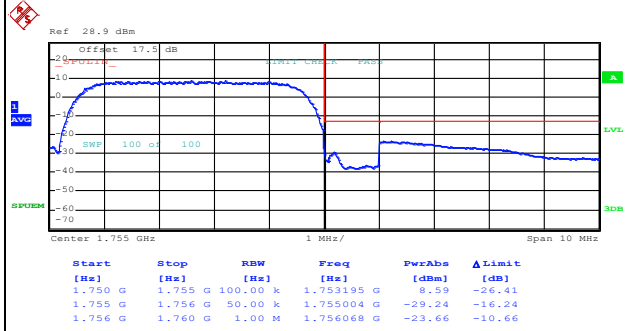

Date: 31.MAY.2021 15:09:35


**Conducted Spurious Emission**

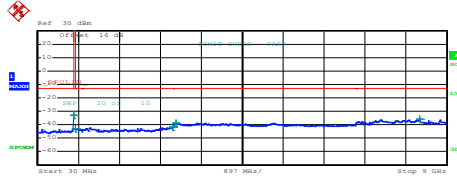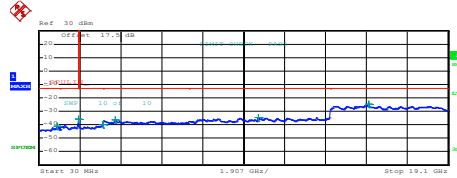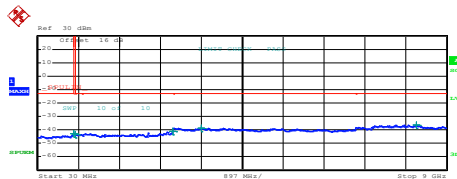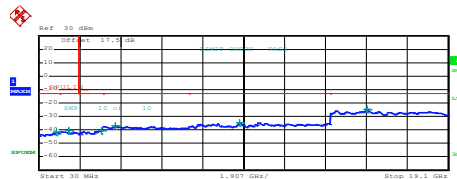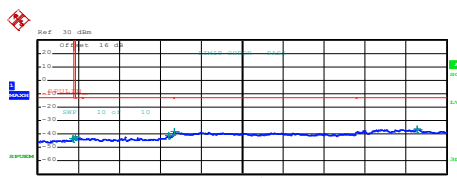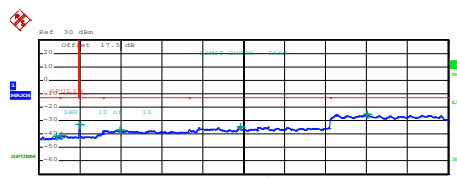WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																																																																														
Lowest Channel	Lowest Channel																																																																														
<table><thead><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbs [dBm]</th><th>ΔLimit [dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>820,000 M</td><td>1,000 M</td><td>819,210000 M</td><td>-32.88</td><td>-19.88</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,000 M</td><td>855,507500 M</td><td>-42.76</td><td>-29.76</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,000 M</td><td>2,992500 G</td><td>-41.61</td><td>-28.61</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,064000 G</td><td>-38.53</td><td>-25.53</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,000 M</td><td>8,412000 G</td><td>-35.89</td><td>-22.89</td></tr></tbody></table> Date: 31.MAY.2021 15:17:10	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	819,210000 M	-32.88	-19.88	855,000 M	1,000 G	1,000 M	855,507500 M	-42.76	-29.76	1,000 G	3,000 G	1,000 M	2,992500 G	-41.61	-28.61	3,000 G	7,000 G	1,000 M	3,064000 G	-38.53	-25.53	7,000 G	9,000 G	1,000 M	8,412000 G	-35.89	-22.89	<table><thead><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbs [dBm]</th><th>ΔLimit [dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>1,000 G</td><td>1,000 M</td><td>867,535000 M</td><td>-41.31</td><td>-28.31</td></tr><tr><td>1,000 G</td><td>1,845 G</td><td>1,000 M</td><td>1,844789 G</td><td>-36.02</td><td>-23.02</td></tr><tr><td>1,915 G</td><td>3,000 G</td><td>1,000 M</td><td>2,996202 G</td><td>-40.07</td><td>-27.07</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,583000 G</td><td>-36.66</td><td>-23.66</td></tr><tr><td>7,000 G</td><td>13,600 G</td><td>1,000 M</td><td>10,236475 G</td><td>-34.41</td><td>-21.41</td></tr><tr><td>13,600 G</td><td>19,100 G</td><td>1,000 M</td><td>15,393000 G</td><td>-24.84</td><td>-11.84</td></tr></tbody></table> Date: 31.MAY.2021 14:41:48	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	867,535000 M	-41.31	-28.31	1,000 G	1,845 G	1,000 M	1,844789 G	-36.02	-23.02	1,915 G	3,000 G	1,000 M	2,996202 G	-40.07	-27.07	3,000 G	7,000 G	1,000 M	3,583000 G	-36.66	-23.66	7,000 G	13,600 G	1,000 M	10,236475 G	-34.41	-21.41	13,600 G	19,100 G	1,000 M	15,393000 G	-24.84	-11.84
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	819,210000 M	-32.88	-19.88																																																																										
855,000 M	1,000 G	1,000 M	855,507500 M	-42.76	-29.76																																																																										
1,000 G	3,000 G	1,000 M	2,992500 G	-41.61	-28.61																																																																										
3,000 G	7,000 G	1,000 M	3,064000 G	-38.53	-25.53																																																																										
7,000 G	9,000 G	1,000 M	8,412000 G	-35.89	-22.89																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	867,535000 M	-41.31	-28.31																																																																										
1,000 G	1,845 G	1,000 M	1,844789 G	-36.02	-23.02																																																																										
1,915 G	3,000 G	1,000 M	2,996202 G	-40.07	-27.07																																																																										
3,000 G	7,000 G	1,000 M	3,583000 G	-36.66	-23.66																																																																										
7,000 G	13,600 G	1,000 M	10,236475 G	-34.41	-21.41																																																																										
13,600 G	19,100 G	1,000 M	15,393000 G	-24.84	-11.84																																																																										
Middle Channel	Middle Channel																																																																														
<table><thead><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbs [dBm]</th><th>ΔLimit [dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>820,000 M</td><td>1,000 M</td><td>819,802500 M</td><td>-42.69</td><td>-29.69</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,000 M</td><td>861,037500 M</td><td>-43.51</td><td>-30.51</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,000 M</td><td>2,996000 G</td><td>-41.25</td><td>-28.25</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,413000 G</td><td>-38.44</td><td>-25.44</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,000 M</td><td>8,337500 G</td><td>-38.30</td><td>-25.30</td></tr></tbody></table> Date: 31.MAY.2021 15:18:05	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	819,802500 M	-42.69	-29.69	855,000 M	1,000 G	1,000 M	861,037500 M	-43.51	-30.51	1,000 G	3,000 G	1,000 M	2,996000 G	-41.25	-28.25	3,000 G	7,000 G	1,000 M	3,413000 G	-38.44	-25.44	7,000 G	9,000 G	1,000 M	8,337500 G	-38.30	-25.30	<table><thead><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbs [dBm]</th><th>ΔLimit [dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>1,000 G</td><td>1,000 M</td><td>821,277500 M</td><td>-41.64</td><td>-28.64</td></tr><tr><td>1,000 G</td><td>1,845 G</td><td>1,000 M</td><td>1,845000 G</td><td>-40.65</td><td>-27.65</td></tr><tr><td>1,915 G</td><td>3,000 G</td><td>1,000 M</td><td>2,918444 G</td><td>-40.39</td><td>-27.39</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,582000 G</td><td>-37.05</td><td>-24.05</td></tr><tr><td>7,000 G</td><td>13,600 G</td><td>1,000 M</td><td>9,383425 G</td><td>-34.42</td><td>-21.42</td></tr><tr><td>13,600 G</td><td>19,100 G</td><td>1,000 M</td><td>15,317375 G</td><td>-24.88</td><td>-11.88</td></tr></tbody></table> Date: 31.MAY.2021 14:42:44	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	821,277500 M	-41.64	-28.64	1,000 G	1,845 G	1,000 M	1,845000 G	-40.65	-27.65	1,915 G	3,000 G	1,000 M	2,918444 G	-40.39	-27.39	3,000 G	7,000 G	1,000 M	3,582000 G	-37.05	-24.05	7,000 G	13,600 G	1,000 M	9,383425 G	-34.42	-21.42	13,600 G	19,100 G	1,000 M	15,317375 G	-24.88	-11.88
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	819,802500 M	-42.69	-29.69																																																																										
855,000 M	1,000 G	1,000 M	861,037500 M	-43.51	-30.51																																																																										
1,000 G	3,000 G	1,000 M	2,996000 G	-41.25	-28.25																																																																										
3,000 G	7,000 G	1,000 M	3,413000 G	-38.44	-25.44																																																																										
7,000 G	9,000 G	1,000 M	8,337500 G	-38.30	-25.30																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	821,277500 M	-41.64	-28.64																																																																										
1,000 G	1,845 G	1,000 M	1,845000 G	-40.65	-27.65																																																																										
1,915 G	3,000 G	1,000 M	2,918444 G	-40.39	-27.39																																																																										
3,000 G	7,000 G	1,000 M	3,582000 G	-37.05	-24.05																																																																										
7,000 G	13,600 G	1,000 M	9,383425 G	-34.42	-21.42																																																																										
13,600 G	19,100 G	1,000 M	15,317375 G	-24.88	-11.88																																																																										
Highest Channel	Highest Channel																																																																														
<table><thead><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbs [dBm]</th><th>ΔLimit [dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>820,000 M</td><td>1,000 M</td><td>809,137500 M</td><td>-43.15</td><td>-30.15</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,000 M</td><td>855,036250 M</td><td>-42.21</td><td>-29.21</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,000 M</td><td>2,906000 G</td><td>-41.10</td><td>-28.10</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,027000 G</td><td>-38.27</td><td>-25.27</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,000 M</td><td>8,357500 G</td><td>-36.45</td><td>-23.45</td></tr></tbody></table> Date: 31.MAY.2021 15:18:59	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	809,137500 M	-43.15	-30.15	855,000 M	1,000 G	1,000 M	855,036250 M	-42.21	-29.21	1,000 G	3,000 G	1,000 M	2,906000 G	-41.10	-28.10	3,000 G	7,000 G	1,000 M	3,027000 G	-38.27	-25.27	7,000 G	9,000 G	1,000 M	8,357500 G	-36.45	-23.45	<table><thead><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbs [dBm]</th><th>ΔLimit [dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>1,000 G</td><td>1,000 M</td><td>836,435000 M</td><td>-41.36</td><td>-28.36</td></tr><tr><td>1,000 G</td><td>1,845 G</td><td>1,000 M</td><td>1,068868 G</td><td>-40.97</td><td>-27.97</td></tr><tr><td>1,915 G</td><td>3,000 G</td><td>1,000 M</td><td>1,953271 G</td><td>-32.65</td><td>-19.65</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,787000 G</td><td>-36.84</td><td>-23.84</td></tr><tr><td>7,000 G</td><td>13,600 G</td><td>1,000 M</td><td>9,395800 G</td><td>-34.70</td><td>-21.70</td></tr><tr><td>13,600 G</td><td>19,100 G</td><td>1,000 M</td><td>15,339375 G</td><td>-25.32</td><td>-12.32</td></tr></tbody></table> Date: 31.MAY.2021 14:43:52	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	836,435000 M	-41.36	-28.36	1,000 G	1,845 G	1,000 M	1,068868 G	-40.97	-27.97	1,915 G	3,000 G	1,000 M	1,953271 G	-32.65	-19.65	3,000 G	7,000 G	1,000 M	3,787000 G	-36.84	-23.84	7,000 G	13,600 G	1,000 M	9,395800 G	-34.70	-21.70	13,600 G	19,100 G	1,000 M	15,339375 G	-25.32	-12.32
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	809,137500 M	-43.15	-30.15																																																																										
855,000 M	1,000 G	1,000 M	855,036250 M	-42.21	-29.21																																																																										
1,000 G	3,000 G	1,000 M	2,906000 G	-41.10	-28.10																																																																										
3,000 G	7,000 G	1,000 M	3,027000 G	-38.27	-25.27																																																																										
7,000 G	9,000 G	1,000 M	8,357500 G	-36.45	-23.45																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	836,435000 M	-41.36	-28.36																																																																										
1,000 G	1,845 G	1,000 M	1,068868 G	-40.97	-27.97																																																																										
1,915 G	3,000 G	1,000 M	1,953271 G	-32.65	-19.65																																																																										
3,000 G	7,000 G	1,000 M	3,787000 G	-36.84	-23.84																																																																										
7,000 G	13,600 G	1,000 M	9,395800 G	-34.70	-21.70																																																																										
13,600 G	19,100 G	1,000 M	15,339375 G	-25.32	-12.32																																																																										




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

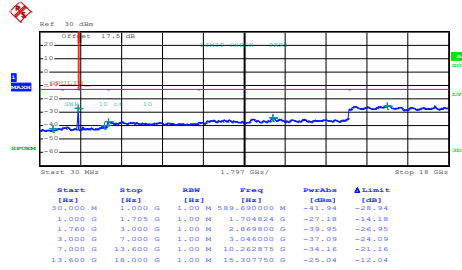


Date: 31.MAY.2021 14:59:39

Middle Channel

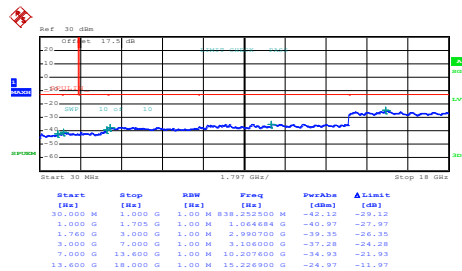

Date: 31.MAY.2021 15:00:33

Highest Channel

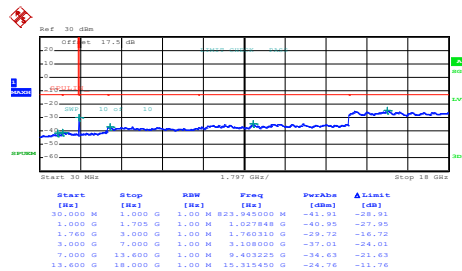

Date: 31.MAY.2021 15:01:29

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0072	PASS
40	Normal Voltage	0.0024	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0048	
-20	Normal Voltage	0.0048	
-30	Normal Voltage	0.0084	
20	Maximum Voltage	0.0024	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0027	PASS
40	Normal Voltage	0.0016	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0005	
-10	Normal Voltage	0.0011	
-20	Normal Voltage	0.0027	
-30	Normal Voltage	0.0048	
20	Maximum Voltage	0.0011	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0016	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.50 V. ; Maximum Voltage =4.30 V.
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0023	PASS
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0006	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0012	
0	Normal Voltage	0.0017	
-10	Normal Voltage	0.0017	
-20	Normal Voltage	0.0029	
-30	Normal Voltage	0.0058	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0006	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.50 V. ; Maximum Voltage =4.30 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

<EUT with Strap 1>

<Top Antenna>

WCDMA 1900

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704	-56.38	-13	-43.38	-73.65	-68.17	0.72	12.52	H
	5557	-50.61	-13	-37.61	-72.56	-62.78	1.00	13.17	H
	7409	-51.54	-13	-38.54	-76.41	-60.92	1.18	10.56	H
									H
									H
									H
	3704	-55.71	-13	-42.71	-74.19	-67.5	0.72	12.52	V
	5557	-48.98	-13	-35.98	-71.05	-61.15	1.00	13.17	V
	7409	-51.61	-13	-38.61	-76.32	-60.99	1.18	10.56	V
									V
									V
									V
Middle	3760	-54.10	-13	-41.10	-71.54	-65.91	0.69	12.50	H
	5640	-50.47	-13	-37.47	-72.39	-62.6	0.98	13.12	H
	7520	-51.11	-13	-38.11	-75.74	-60.39	1.18	10.46	H
									H
									H
									H
	3760	-55.45	-13	-42.45	-74.09	-67.26	0.69	12.50	V
	5640	-45.77	-13	-32.77	-67.87	-57.9	0.98	13.12	V
	7520	-51.26	-13	-38.26	-75.94	-60.54	1.18	10.46	V
									V
									V
									V



Highest	3815	-57.07	-13	-44.07	-74.64	-68.86	0.68	12.47	H
	5722	-51.52	-13	-38.52	-73.51	-63.6	0.99	13.07	H
	7630	-52.05	-13	-39.05	-76.93	-61.63	1.18	10.76	H
									H
									H
									H
	3815	-55.67	-13	-42.67	-74.45	-67.46	0.68	12.47	V
	5722	-47.89	-13	-34.89	-70.08	-59.97	0.99	13.07	V
	7630	-52.34	-13	-39.34	-76.95	-61.92	1.18	10.76	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1700**

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-57.98	-13	-44.98	-75.34	-69.58	0.77	12.37	H
	5137	-55.07	-13	-42.07	-76.09	-66.57	0.97	12.47	H
	6849	-53.63	-13	-40.63	-77.58	-64.44	0.83	11.63	H
									H
									H
									H
	3424	-58.23	-13	-45.23	-75.47	-69.83	0.77	12.37	V
	5137	-54.18	-13	-41.18	-75.39	-65.68	0.97	12.47	V
	6849	-53.22	-13	-40.22	-77.66	-64.03	0.83	11.63	V
									V
									V
									V
Middle	3465	-57.53	-13	-44.53	-75.41	-69.25	0.78	12.50	H
	5197	-55.56	-13	-42.56	-76.84	-67.16	0.99	12.59	H
	6930	-52.98	-13	-39.98	-77.47	-63.43	1.01	11.45	H
									H
									H
									H
	3465	-58.19	-13	-45.19	-75.6	-69.91	0.78	12.50	V
	5197	-55.83	-13	-42.83	-76.95	-67.43	0.99	12.59	V
	6930	-52.83	-13	-39.83	-76.94	-63.28	1.01	11.45	V
									V
									V
									V



Highest	3505	-58.12	-13	-45.12	-75.57	-69.94	0.78	12.60	H
	5257	-55.36	-13	-42.36	-76.6	-67.06	1.01	12.71	H
	7010	-52.18	-13	-39.18	-76.4	-62.3	1.17	11.28	H
									H
									H
									H
	3505	-57.23	-13	-44.23	-75.64	-69.05	0.78	12.60	V
	5257	-54.13	-13	-41.13	-75.52	-65.83	1.01	12.71	V
	7010	-51.76	-13	-38.76	-76.32	-61.88	1.17	11.28	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 850**

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1649	-63.78	-13	-50.78	-73.8	-70.73	0.53	9.63	H
	2474	-60.03	-13	-47.03	-73.66	-68.01	0.65	10.78	H
	3298	-59.24	-13	-46.24	-75.72	-68.33	0.76	11.99	H
									H
									H
									H
	1649	-64.43	-13	-51.43	-74.15	-71.38	0.53	9.63	V
	2474	-60.91	-13	-47.91	-75.03	-68.89	0.65	10.78	V
	3298	-59.44	-13	-46.44	-75.89	-68.53	0.76	11.99	V
									V
									V
									V
Middle	1672	-63.61	-13	-50.61	-73.78	-70.61	0.53	9.68	H
	2509	-60.34	-13	-47.34	-73.95	-68.34	0.66	10.81	H
	3345	-58.76	-13	-45.76	-75.32	-67.98	0.76	12.14	H
									H
									H
									H
	1672	-63.40	-13	-50.40	-73.17	-70.4	0.53	9.68	V
	2509	-58.74	-13	-45.74	-72.75	-66.74	0.66	10.81	V
	3345	-58.60	-13	-45.60	-74.95	-67.82	0.76	12.14	V
									V
									V
									V



Highest	1696	-62.21	-13	-49.21	-72.67	-69.26	0.53	9.73	H
	2544	-55.07	-13	-42.07	-68.74	-63.08	0.67	10.83	H
	3393	-57.87	-13	-44.87	-74.53	-67.23	0.77	12.28	H
									H
									H
									H
	1696	-59.71	-13	-46.71	-69.53	-66.76	0.53	9.73	V
	2544	-54.69	-13	-41.69	-68.73	-62.7	0.67	10.83	V
	3393	-58.71	-13	-45.71	-74.94	-68.07	0.77	12.28	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Bottom Antenna>

WCDMA 850

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1649	-63.55	-13	-50.55	-73.57	-70.5	0.53	9.63	H
	2474	-61.28	-13	-48.28	-74.91	-69.26	0.65	10.78	H
	3298	-59.01	-13	-46.01	-75.49	-68.1	0.76	11.99	H
									H
									H
									H
	1649	-64.02	-13	-51.02	-73.75	-70.97	0.53	9.63	V
	2474	-60.55	-13	-47.55	-74.71	-68.53	0.65	10.78	V
	3298	-59.33	-13	-46.33	-75.78	-68.42	0.76	11.99	V
									V
									V
									V
Middle	1672	-63.59	-13	-50.59	-73.76	-70.59	0.53	9.68	H
	2509	-60.93	-13	-47.93	-74.54	-68.93	0.66	10.81	H
	3345	-59.05	-13	-46.05	-75.61	-68.27	0.76	12.14	H
									H
									H
									H
	1672	-63.72	-13	-50.72	-73.49	-70.72	0.53	9.68	V
	2509	-61.03	-13	-48.03	-75.04	-69.03	0.66	10.81	V
	3345	-59.72	-13	-46.72	-76.06	-68.94	0.76	12.14	V
									V
									V
									V



Highest	1696	-62.80	-13	-49.80	-73.26	-69.85	0.53	9.73	H
	2544	-61.06	-13	-48.06	-74.73	-69.07	0.67	10.83	H
	3393	-58.74	-13	-45.74	-75.4	-68.1	0.77	12.28	H
									H
									H
									H
	1696	-62.17	-13	-49.17	-71.99	-69.22	0.53	9.73	V
	2544	-61.11	-13	-48.11	-75.15	-69.12	0.67	10.83	V
	3393	-59.69	-13	-46.69	-75.92	-69.05	0.77	12.28	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<EUT with Strap 3>

<Top Antenna>

WCDMA 1900

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-58.02	-13	-45.02	-75.61	-69.83	0.69	12.50	H
	5640	-52.46	-13	-39.46	-74.5	-64.59	0.98	13.12	H
	7520	-53.46	-13	-40.46	-78.04	-62.74	1.18	10.46	H
									H
									H
									H
	3760	-57.04	-13	-44.04	-75.84	-68.85	0.69	12.50	V
	5640	-48.52	-13	-35.52	-70.76	-60.65	0.98	13.12	V
	7520	-53.86	-13	-40.86	-78.17	-63.14	1.18	10.46	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Bottom Antenna>

WCDMA 850

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	1696	-62.82	-13	-49.82	-73.28	-69.87	0.53	9.73	H
	2544	-61.66	-13	-48.66	-75.33	-69.67	0.67	10.83	H
	3393	-59.08	-13	-46.08	-75.74	-68.44	0.77	12.28	H
									H
									H
									H
	1696	-64.16	-13	-51.16	-73.98	-71.21	0.53	9.73	V
	2544	-61.41	-13	-48.41	-75.45	-69.42	0.67	10.83	V
	3393	-59.43	-13	-46.43	-75.66	-68.79	0.77	12.28	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

—————THE END—————