

#01 802.11b_Right Cheek_Ch1**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_110622 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.050 mW/g

Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.54 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.098 W/kg

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.049 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.54 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

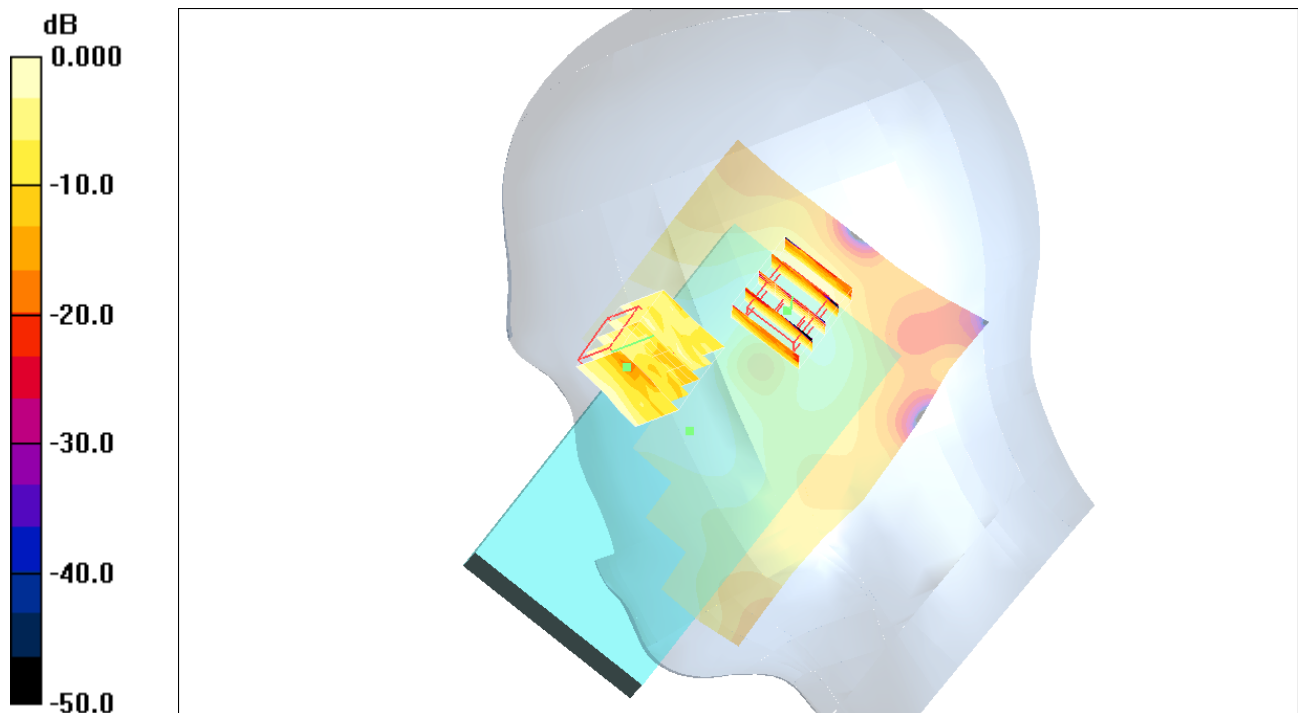

#02 802.11b_Right Tilted_Ch1**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_110622 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.045 mW/g



Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.39 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.046 mW/g

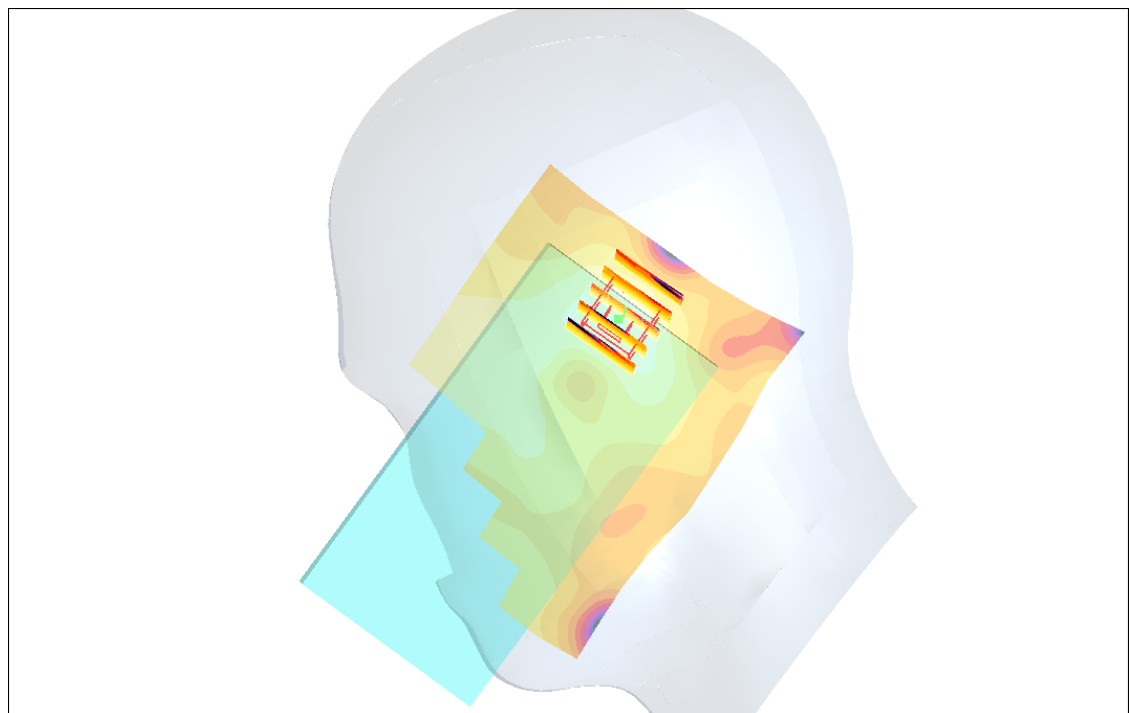

0 dB = 0.046mW/g

#03 802.11b_Left Cheek_Ch1**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_110622 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.064 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.49 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.066 mW/g

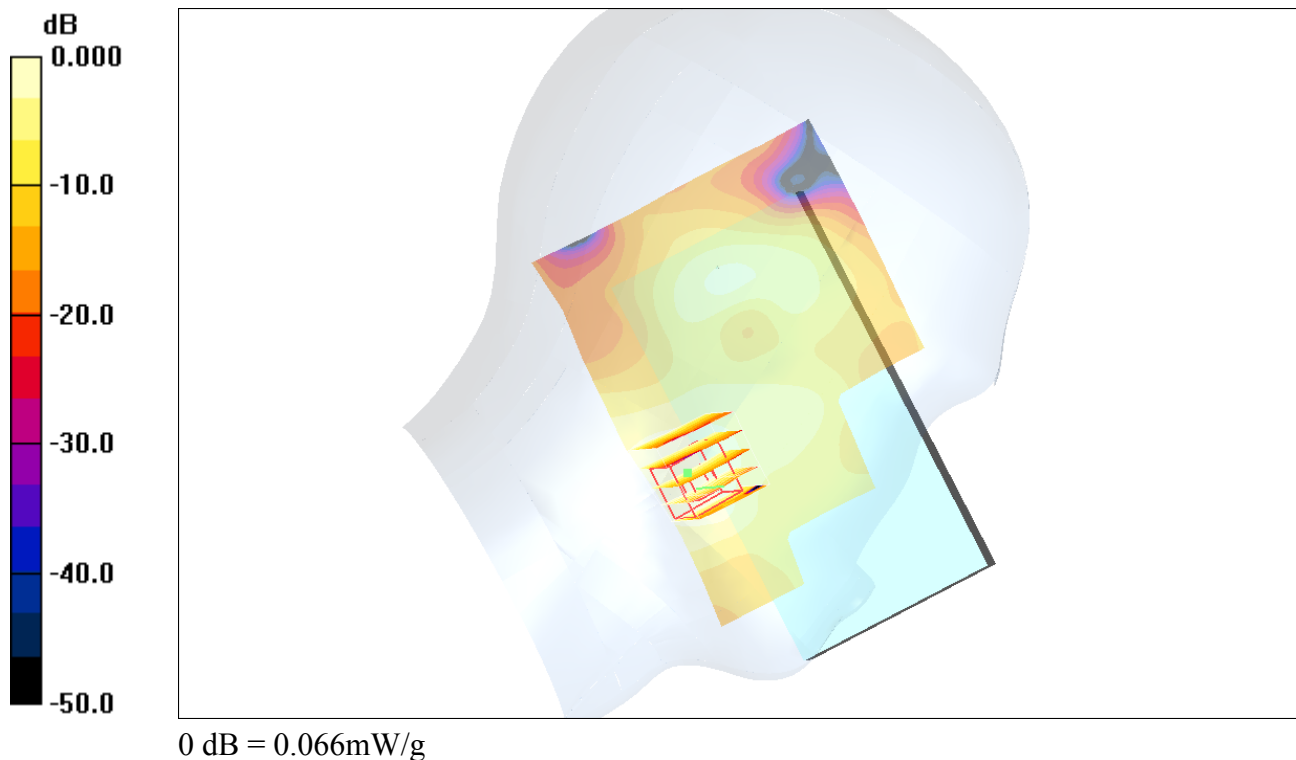

#04 802.11b_Left Tilted_Ch1**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_110622 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.045 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.10 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.070 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.043 mW/g

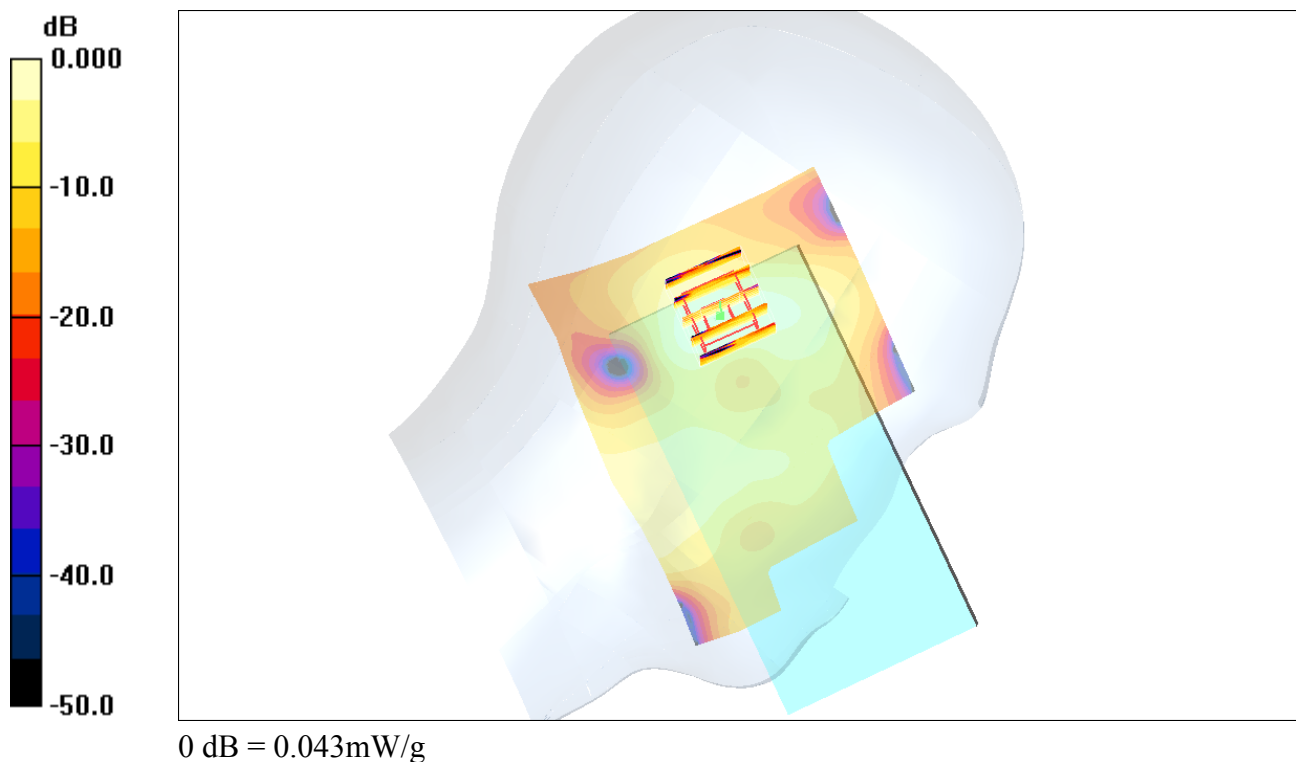

#05 802.11b_Left Cheek_Ch1_RS232**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_110622 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x111x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.066 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.47 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.069 mW/g

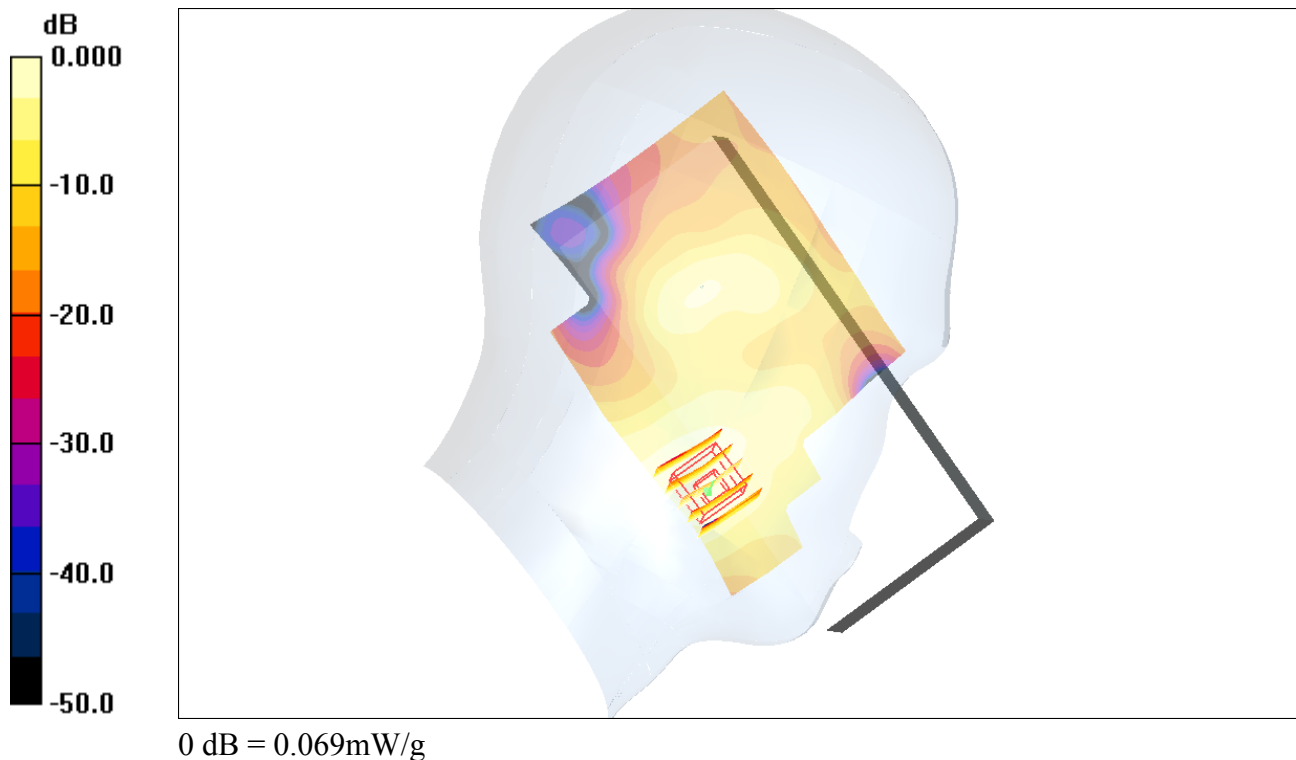

#05 802.11b_Left Cheek_Ch1_RS232_2D**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_110622 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x111x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.066 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.47 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.069 mW/g

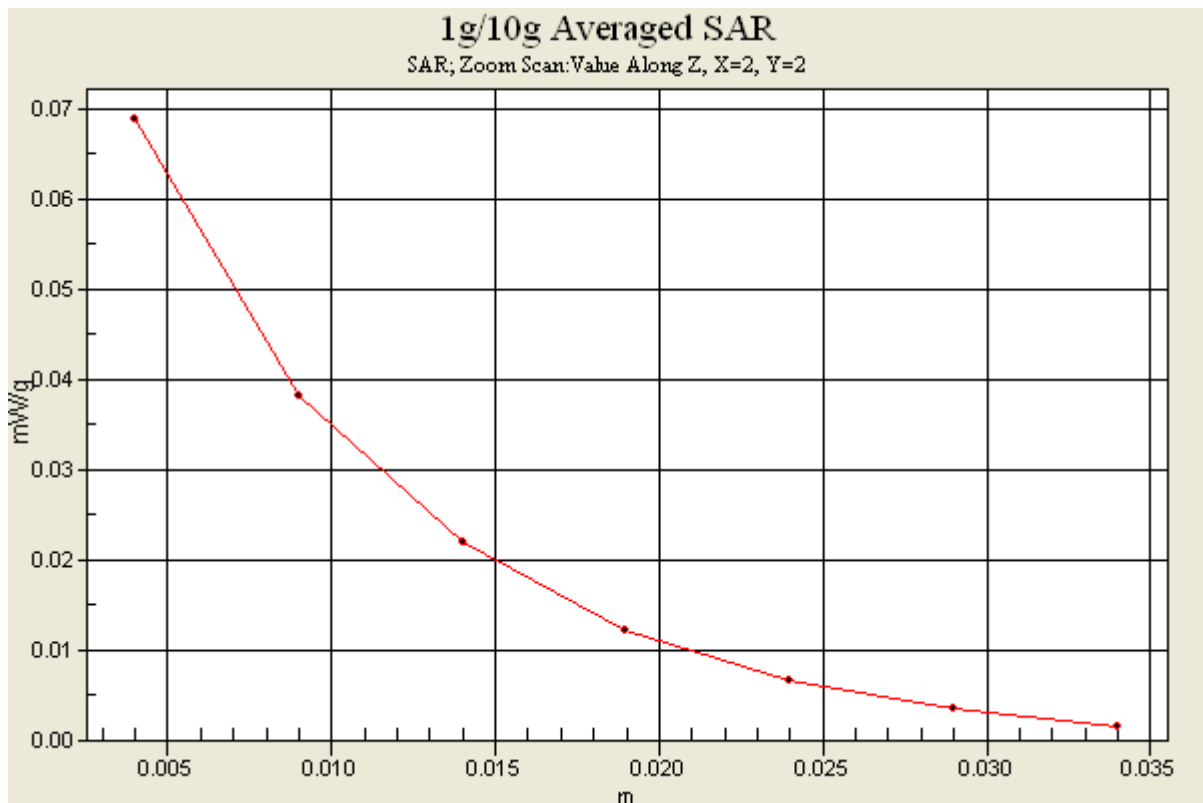

#06 802.11b_Left Cheek_Ch1_USB**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_110622 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x111x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.073 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.05 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.064 mW/g

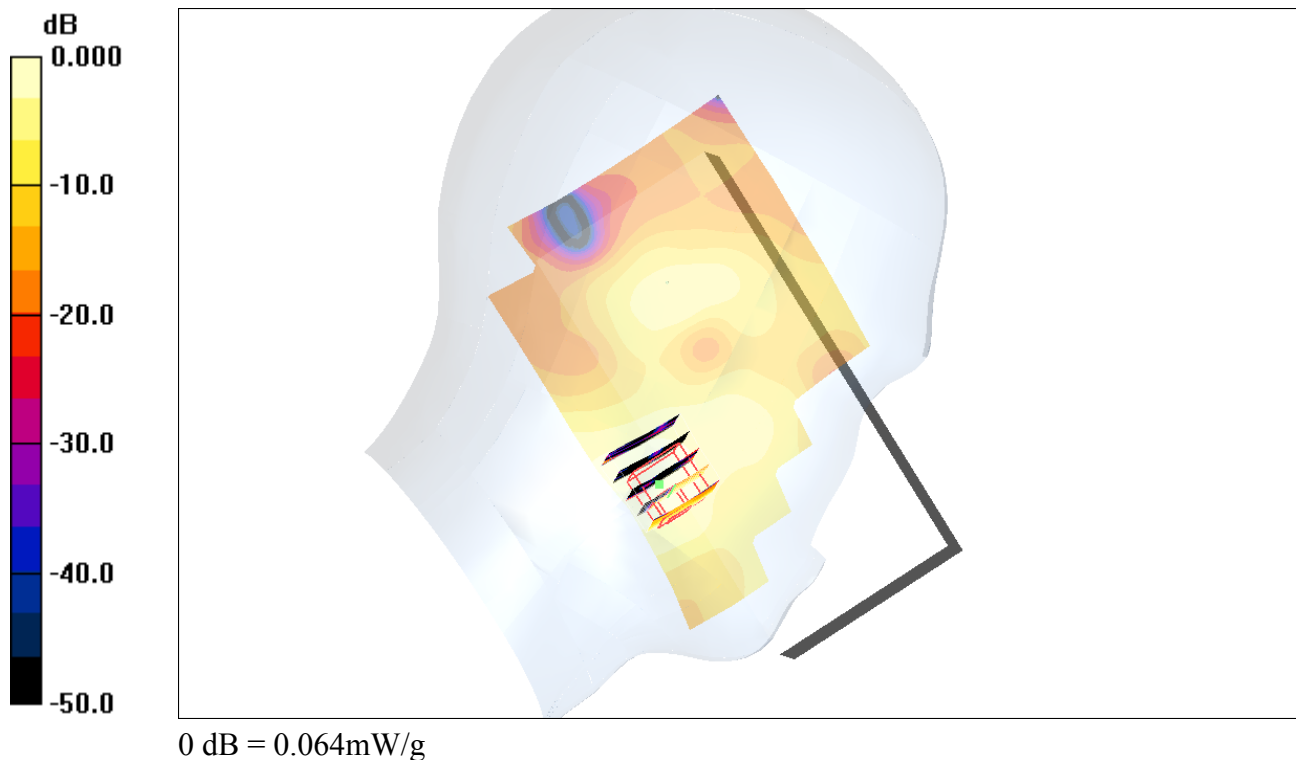

#50 802.11b_Right Tilted_Ch1_USB**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL_2450_110622 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x111x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.038 mW/g

Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.30 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 0.066 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.041 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.30 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 0.041 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.026 mW/g

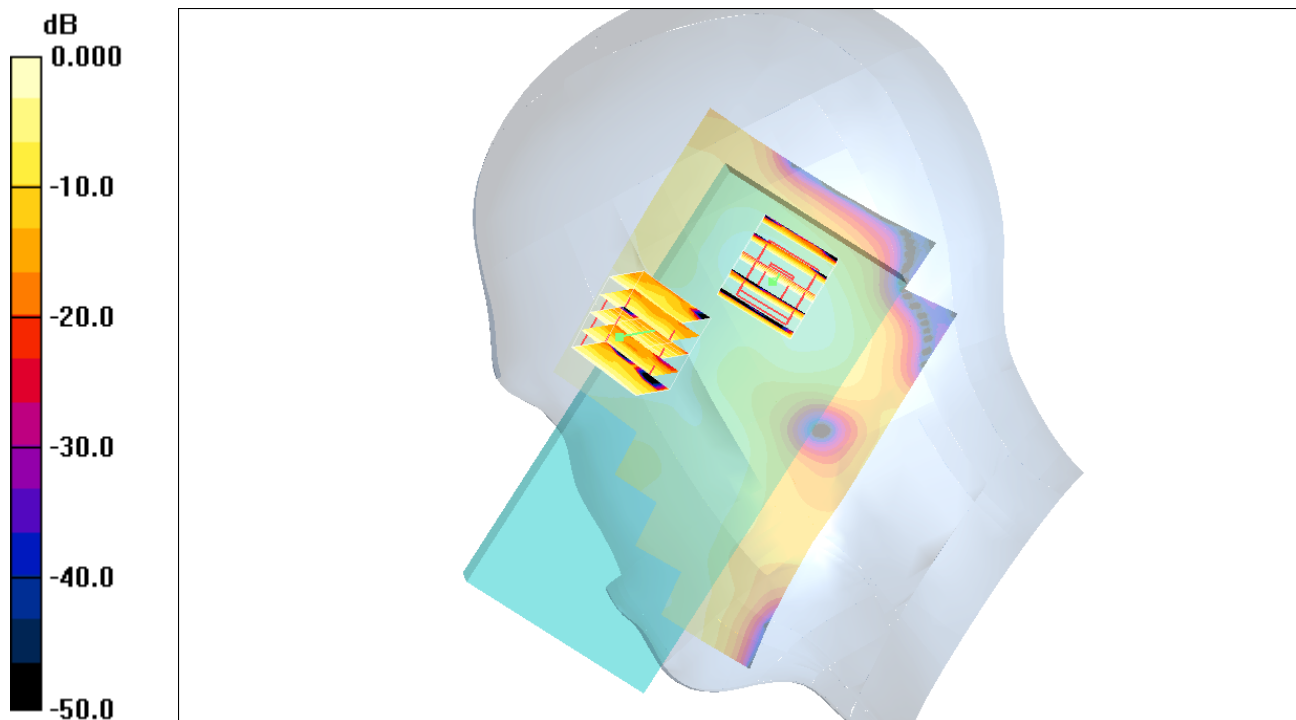

0 dB = 0.026mW/g

#07 802.11a_Right Cheek_Ch161**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5805$ MHz; $\sigma = 5.4$ mho/m; $\epsilon_r = 34.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.22, 4.22, 4.22); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.002 mW/g


Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.179 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00347 mW/g

Maximum value of SAR (measured) = 0.061 mW/g

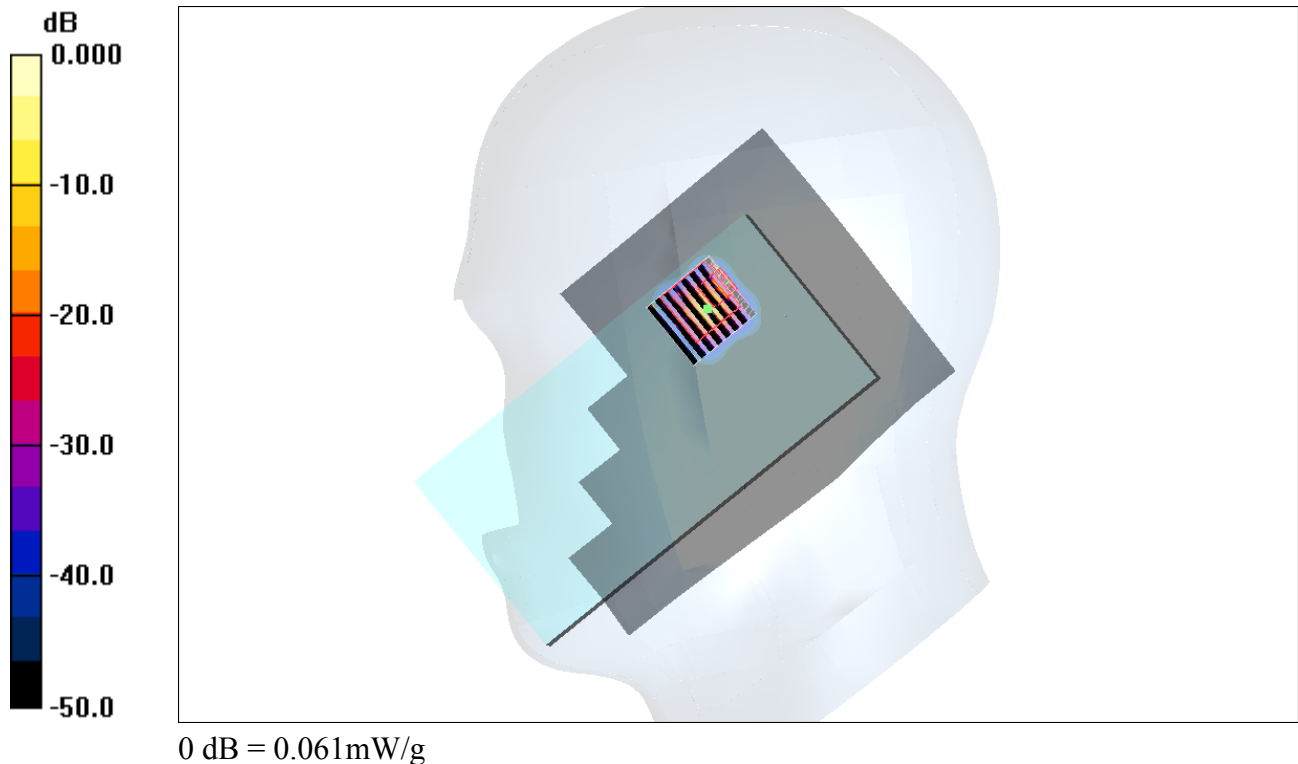

#08 802.11a_Right Tilted_Ch161**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5805$ MHz; $\sigma = 5.4$ mho/m; $\epsilon_r = 34.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.22, 4.22, 4.22); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.011 mW/g


Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00183 mW/g

Maximum value of SAR (measured) = 0.030 mW/g

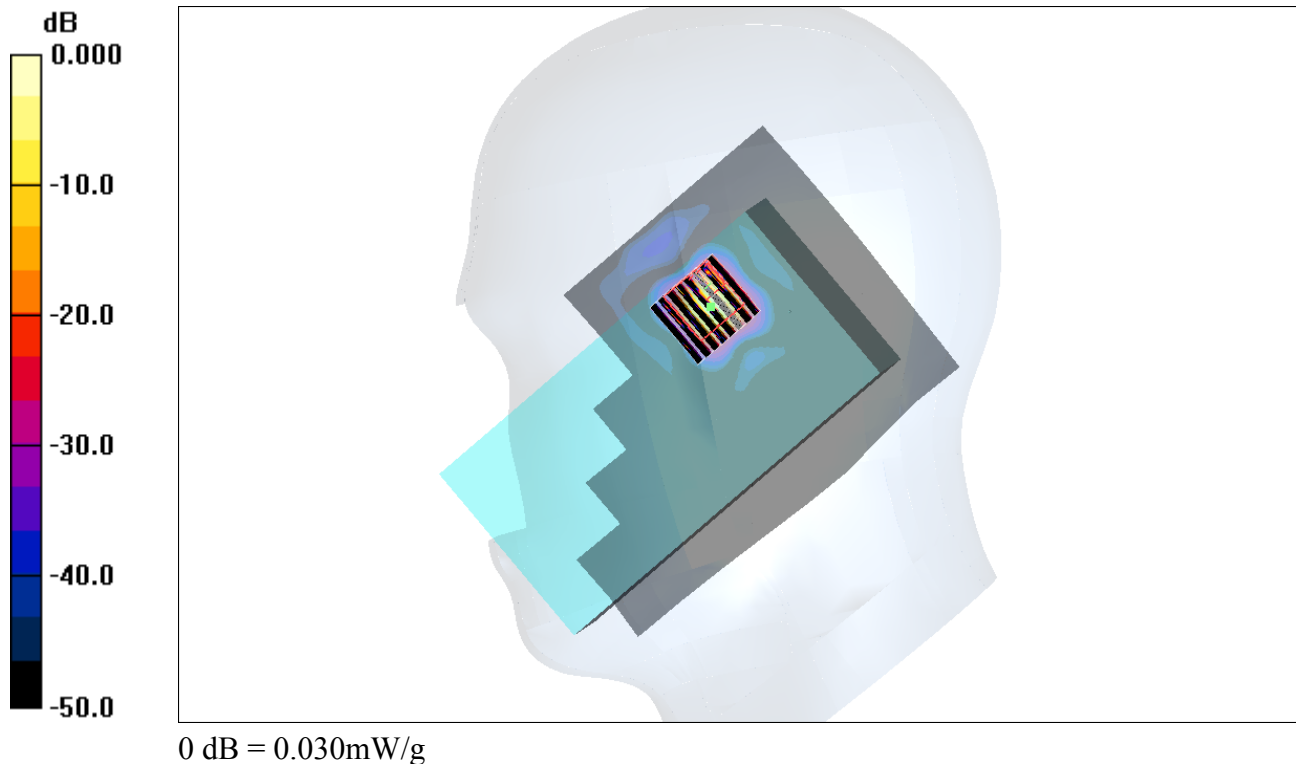

#09 802.11a_Left Cheek_Ch161**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz;Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used : $f = 5805$ MHz; $\sigma = 5.4$ mho/m; $\epsilon_r = 34.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.22, 4.22, 4.22); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.081 mW/g


Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.107 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.145 mW/g

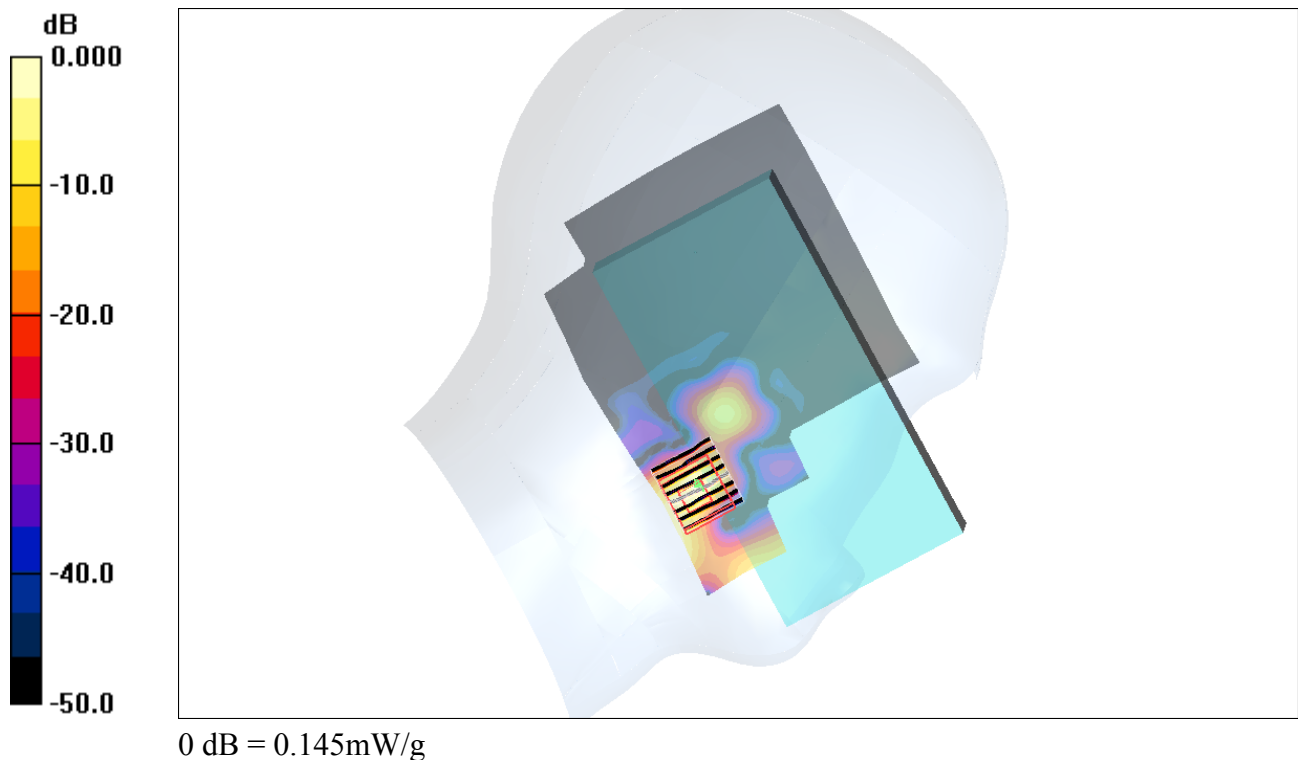

#10 802.11a_Left Tilted_Ch161**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5805$ MHz; $\sigma = 5.4$ mho/m; $\epsilon_r = 34.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.22, 4.22, 4.22); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.015 mW/g


Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.07 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.077 mW/g

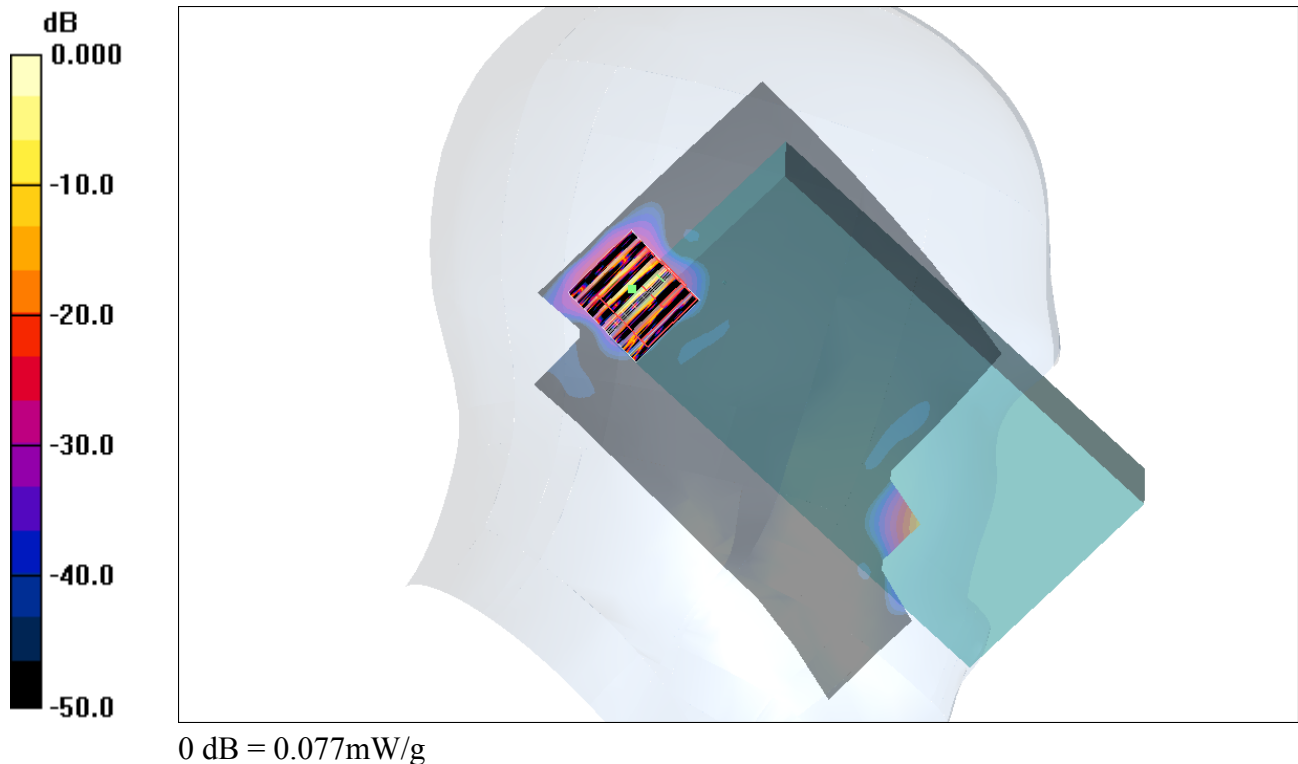

#11 802.11a_Left Cheek_Ch36**DUT: 143002**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.77$ mho/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.83, 4.83, 4.83); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch36/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.115 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.00867 mW/g

Maximum value of SAR (measured) = 0.082 mW/g

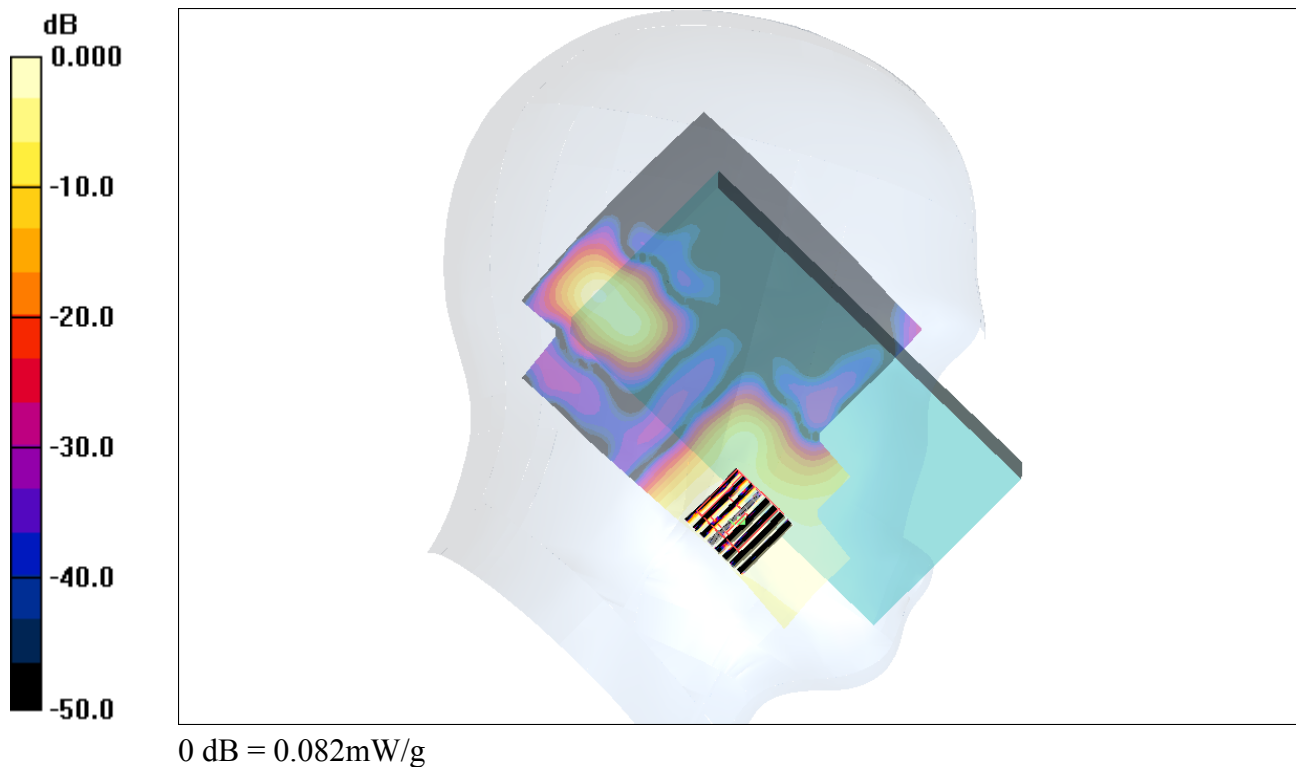

#12 802.11a_Left Cheek_Ch48**DUT: 143002**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.84$ mho/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.83, 4.83, 4.83); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch48/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.126 mW/g


Ch48/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.213 W/kg

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.117 mW/g

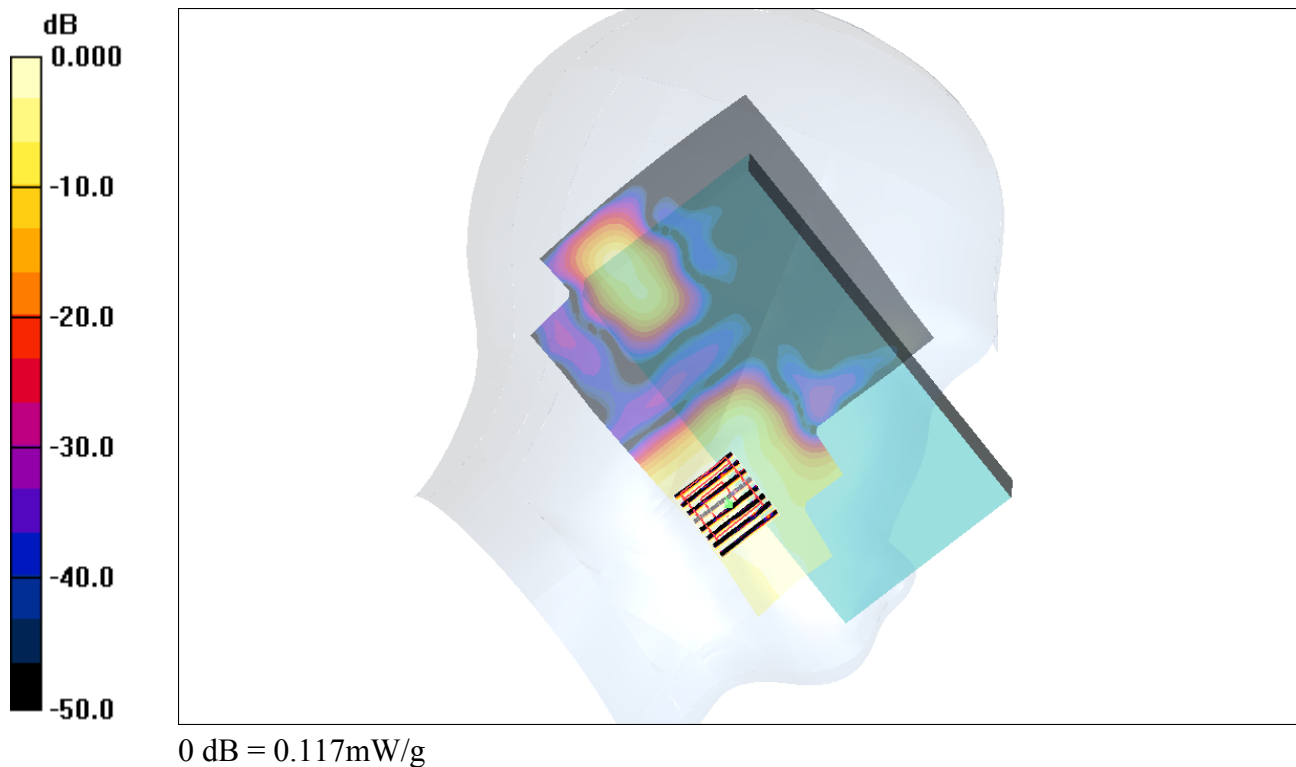

#13 802.11a_Left Cheek_Ch52**DUT: 143002**

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.86$ mho/m; $\epsilon_r = 35.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch52/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.175 mW/g


Ch52/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.650 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.094 mW/g

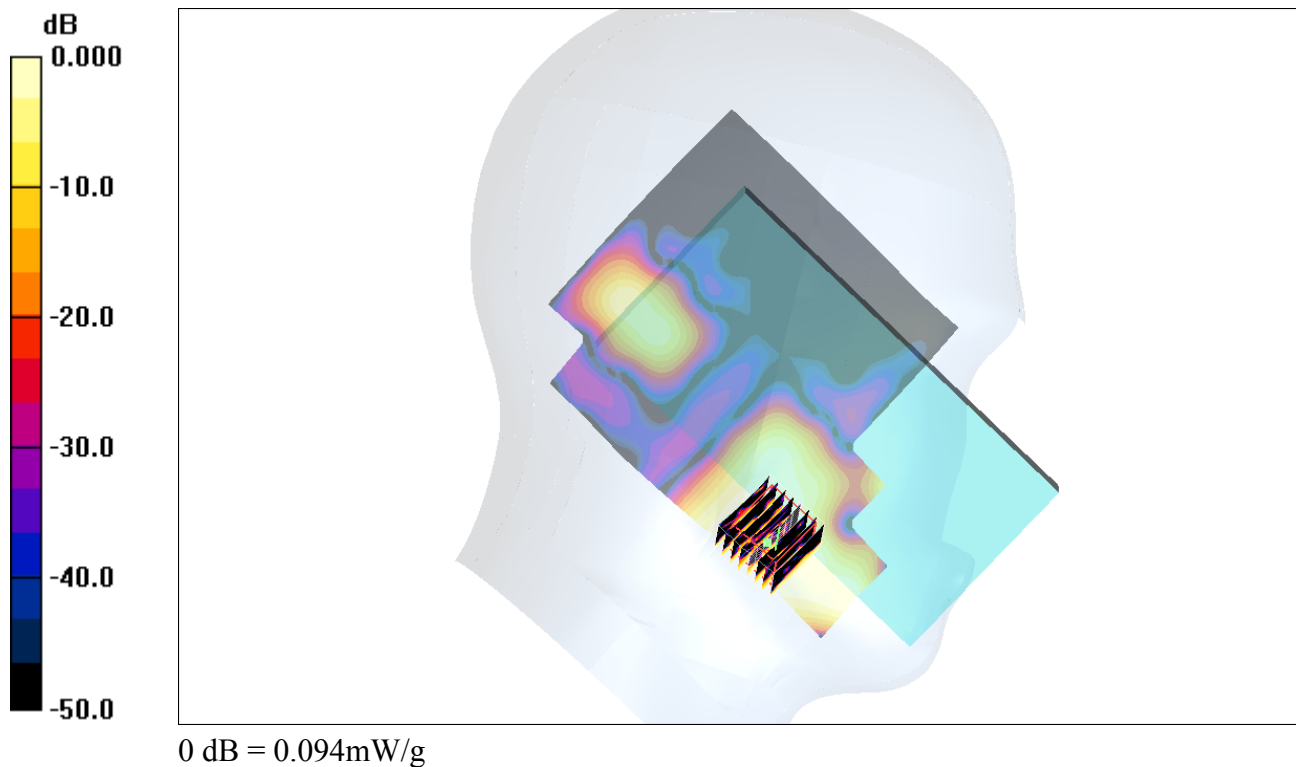

#14 802.11a_Left Cheek_Ch64**DUT: 143002**

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.91$ mho/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch64/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.159 mW/g



Ch64/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.672 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.114 mW/g

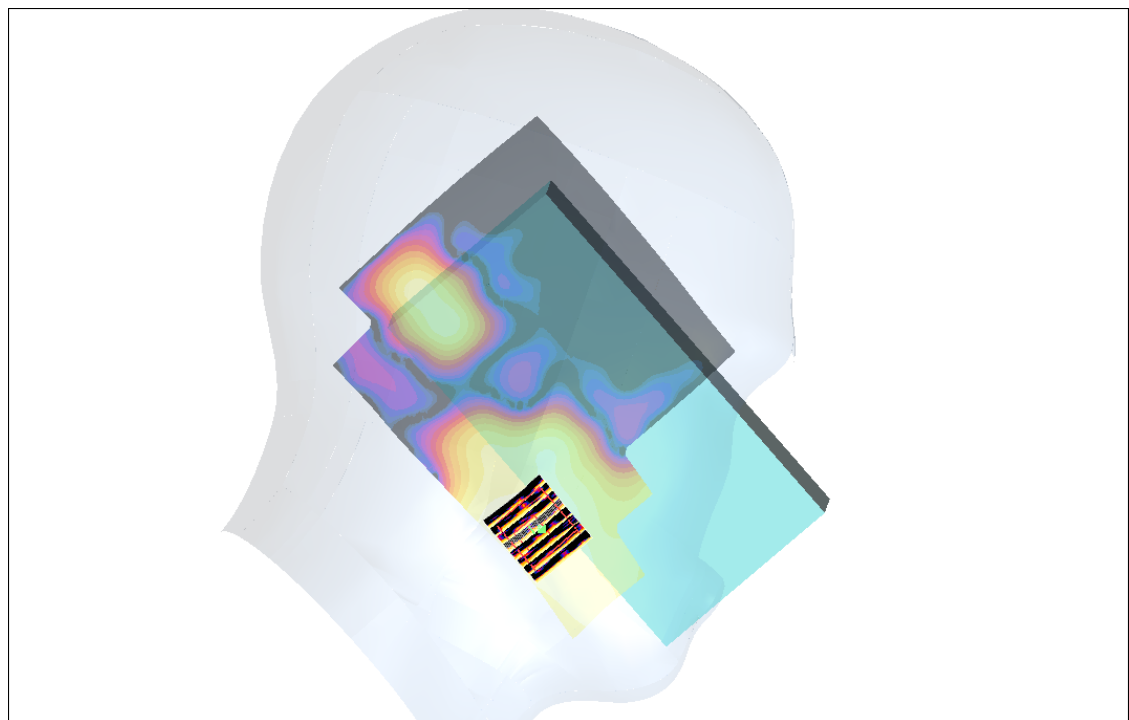

0 dB = 0.114mW/g

#15 802.11a_Left Cheek_Ch104**DUT: 143002**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.12$ mho/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch104/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.218 mW/g


Ch104/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.53 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.194 mW/g

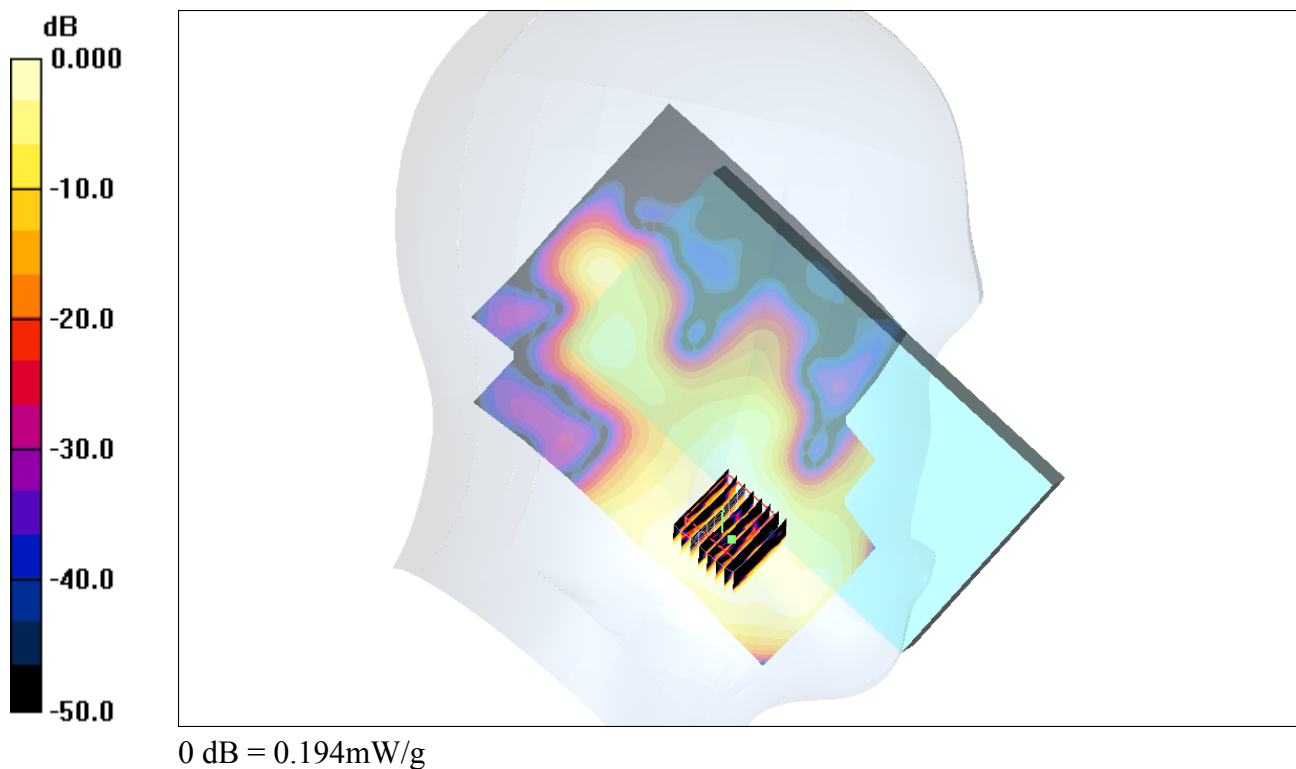

#16 802.11a_Left Cheek_Ch116**DUT: 143002**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.18$ mho/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.07, 4.07, 4.07); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch116/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.228 mW/g


Ch116/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.575 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

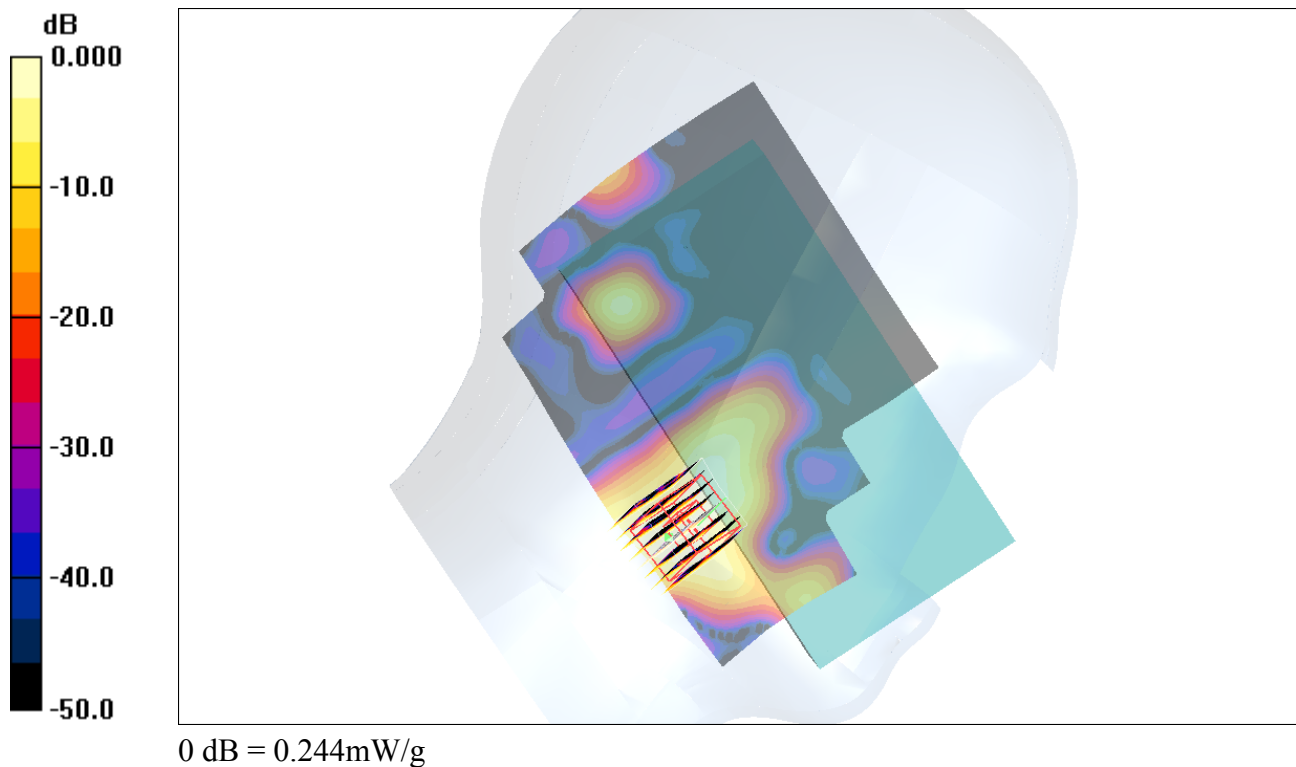

#17 802.11a_Left Cheek_Ch124**DUT: 143002**

Communication System: 802.11a; Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5620$ MHz; $\sigma = 5.22$ mho/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.07, 4.07, 4.07); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch124/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.219 mW/g


Ch124/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 0.903 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.251 mW/g

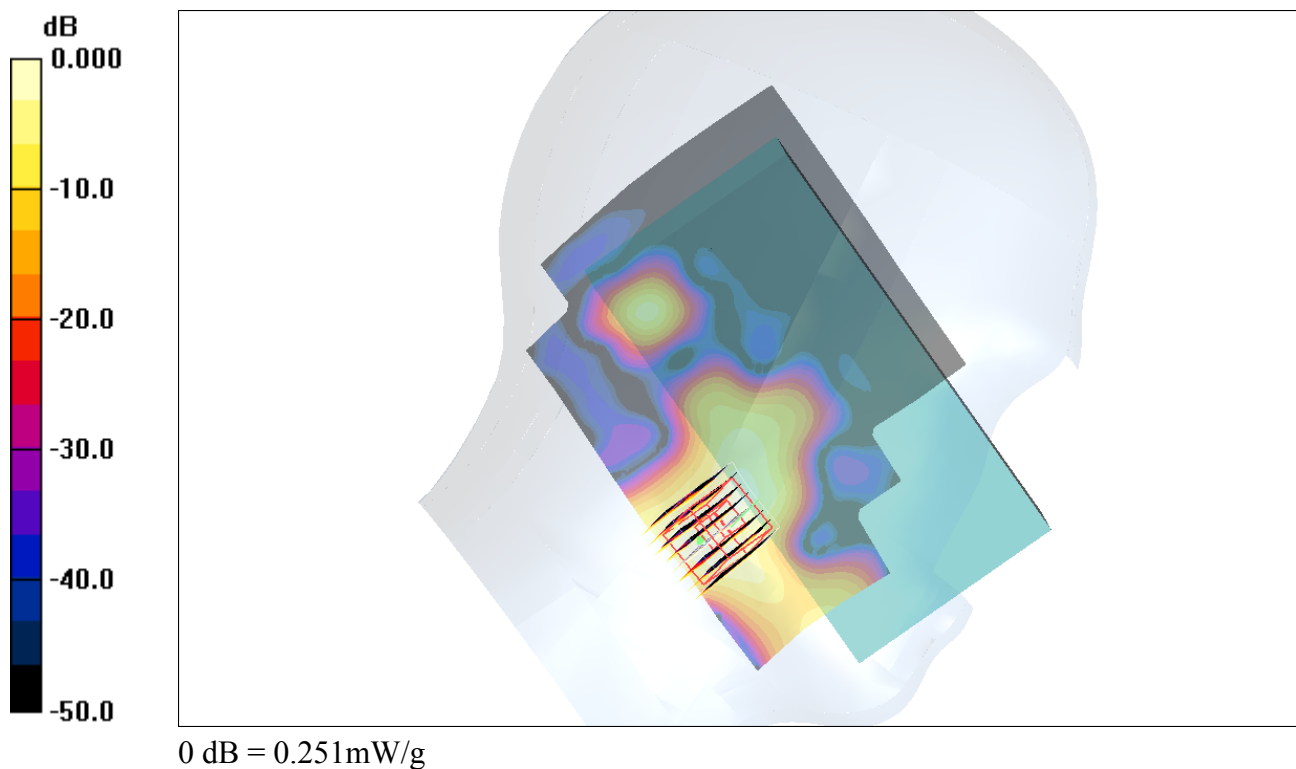

#18 802.11a_Left Cheek_Ch136**DUT: 143002**

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.07, 4.07, 4.07); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch136/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.241 mW/g


Ch136/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.089 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.271 mW/g

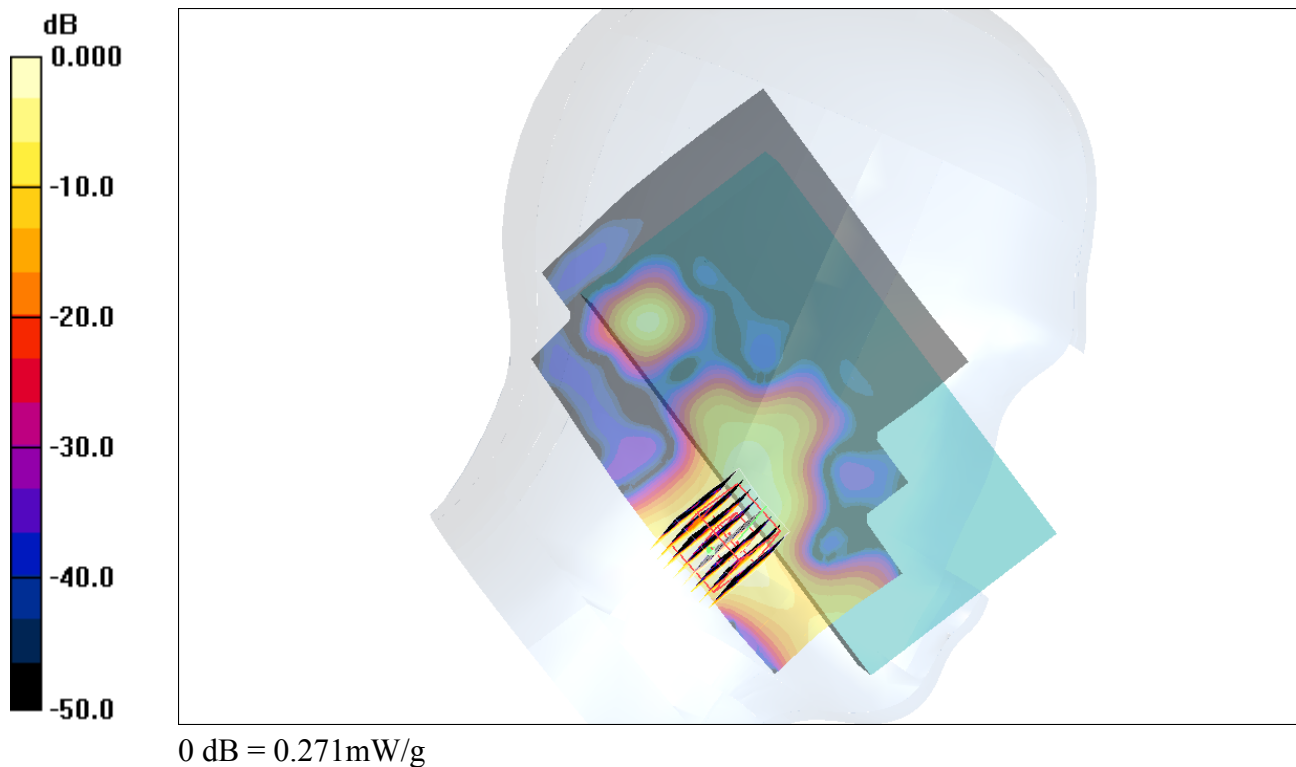

#19 802.11a_Left Cheek_Ch149**DUT: 143002**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.36$ mho/m; $\epsilon_r = 34.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.22, 4.22, 4.22); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch149/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.160 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

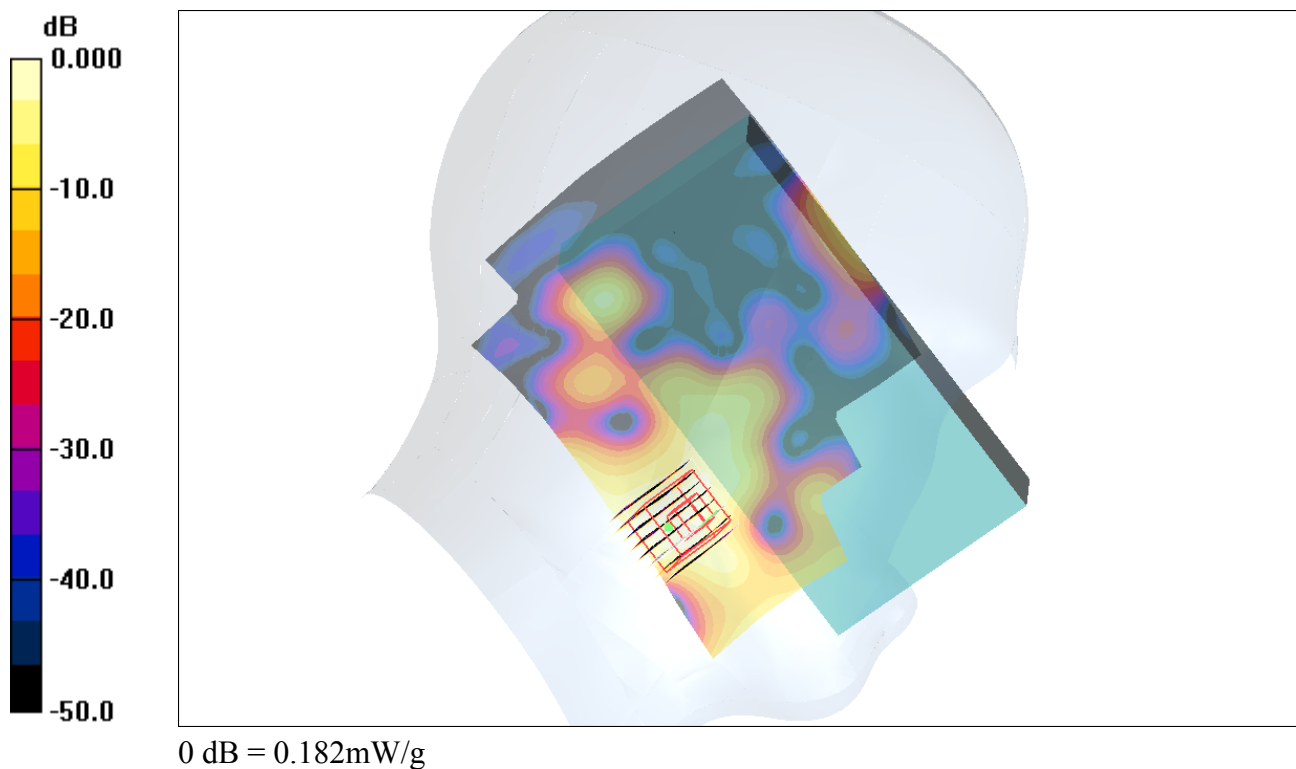

#20 802.11a_Left Cheek_Ch157**DUT: 143002**

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.22, 4.22, 4.22); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch157/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.154 mW/g


Ch157/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.099 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.198 mW/g

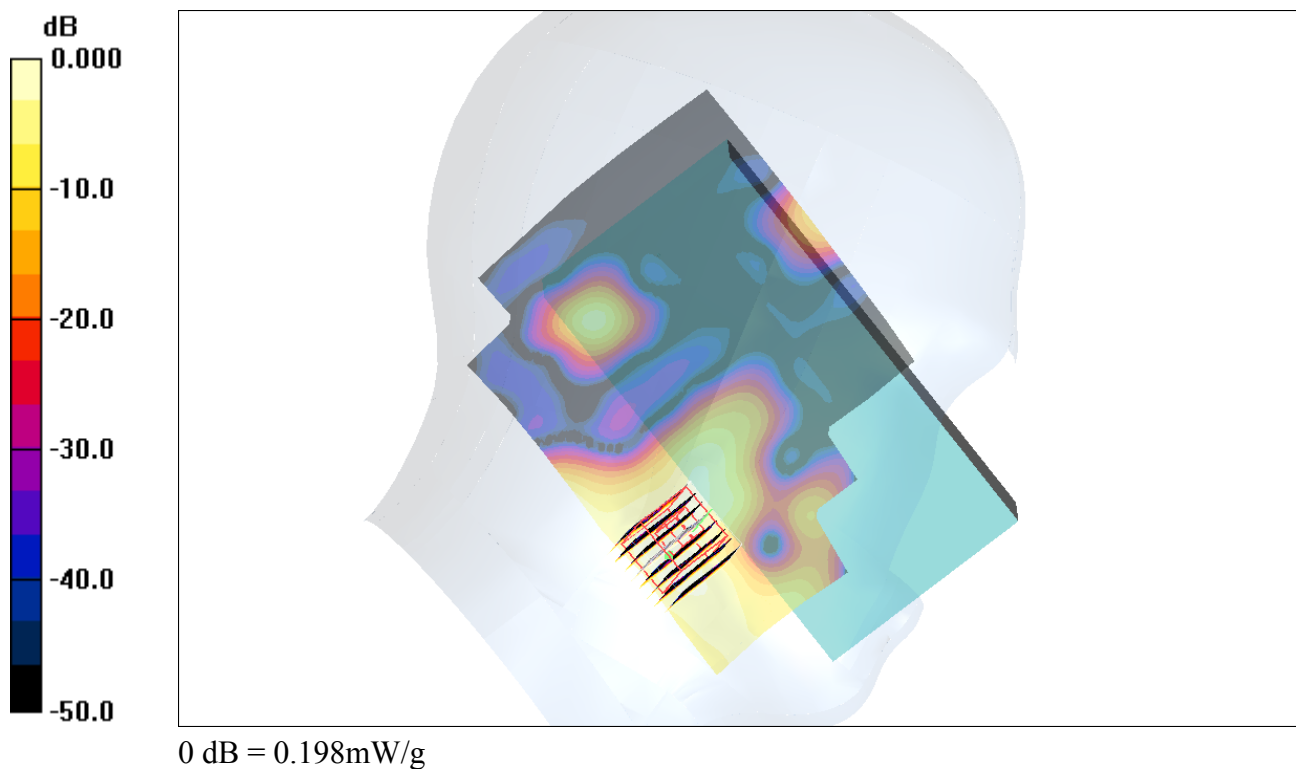

#21 802.11a_Left Cheek_Ch165**DUT: 143002**

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.42$ mho/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.22, 4.22, 4.22); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch165/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.165 mW/g


Ch165/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.214 mW/g

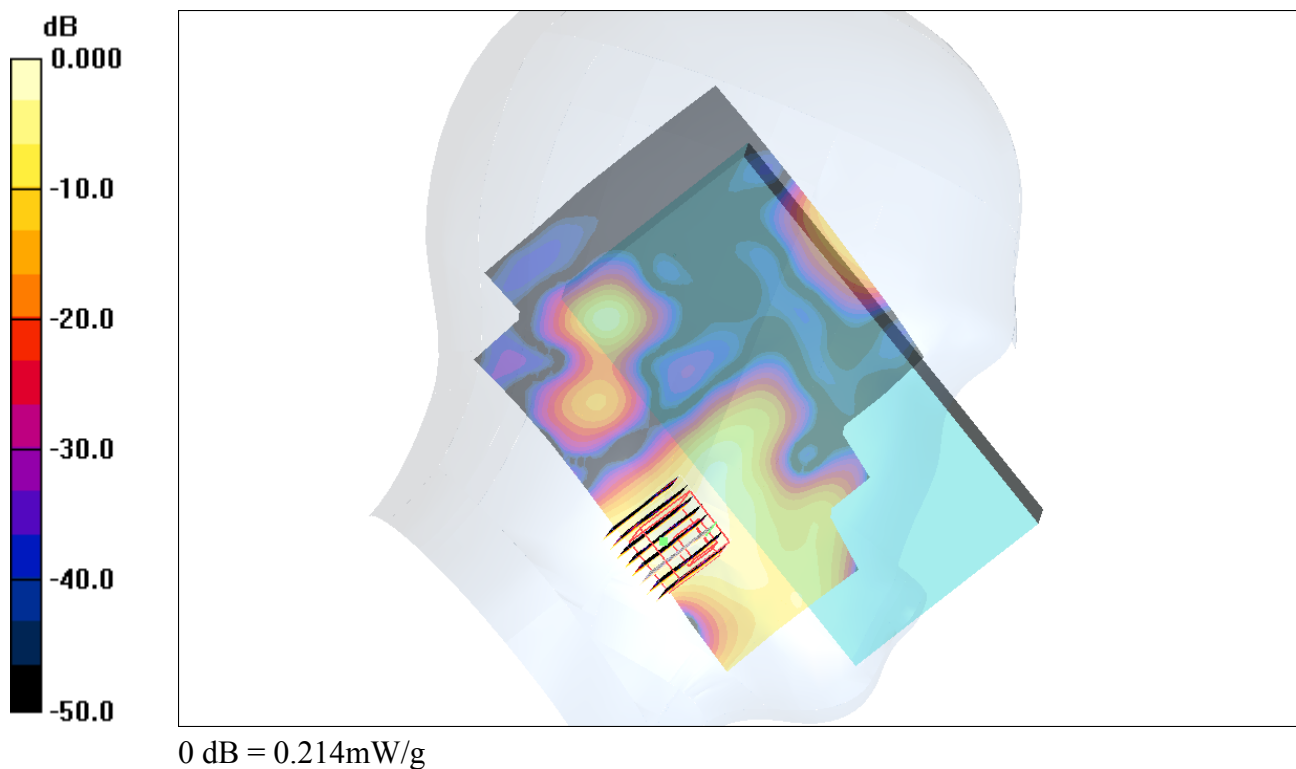

#22 802.11n_20M_Left Cheek_Ch161


DUT: 143002

Communication System: 802.11n; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used : $f = 5805 \text{ MHz}$; $\sigma = 5.4 \text{ mho/m}$; $\epsilon_r = 34.3$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.4°C ; Liquid Temperature : 21.5°C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.22, 4.22, 4.22); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

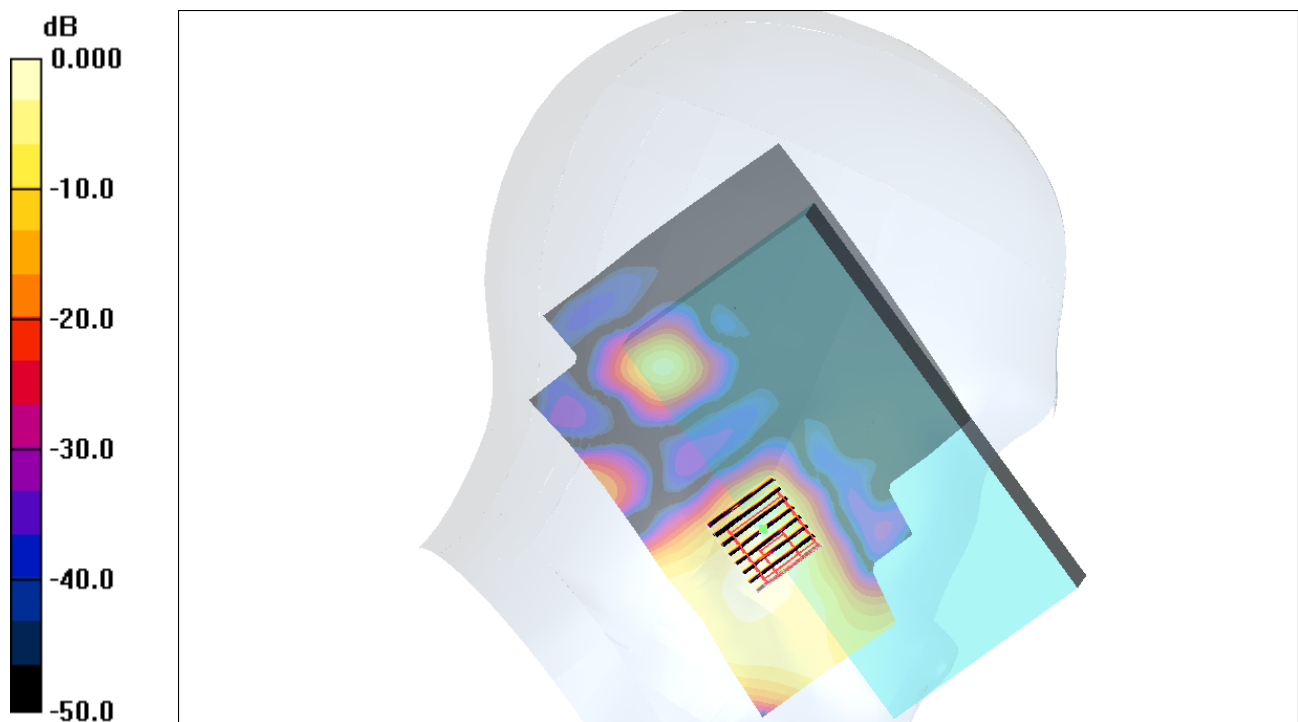Ch161/Area Scan (121x201x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (interpolated) = 0.166 mW/g **Ch161/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$ Reference Value = 0.000 V/m ; Power Drift = 0.187 dB Peak SAR (extrapolated) = 0.430 W/kg **SAR(1 g) = 0.091 mW/g ; SAR(10 g) = 0.036 mW/g** Maximum value of SAR (measured) = 0.203 mW/g 0 dB = 0.203 mW/g

#23 802.11a_Left Cheek_Ch136_RS232

DUT: 143002

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used : $f = 5680$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.07, 4.07, 4.07); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch136/Area Scan (121x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.188 mW/g


Ch136/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 0.484 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.297 mW/g

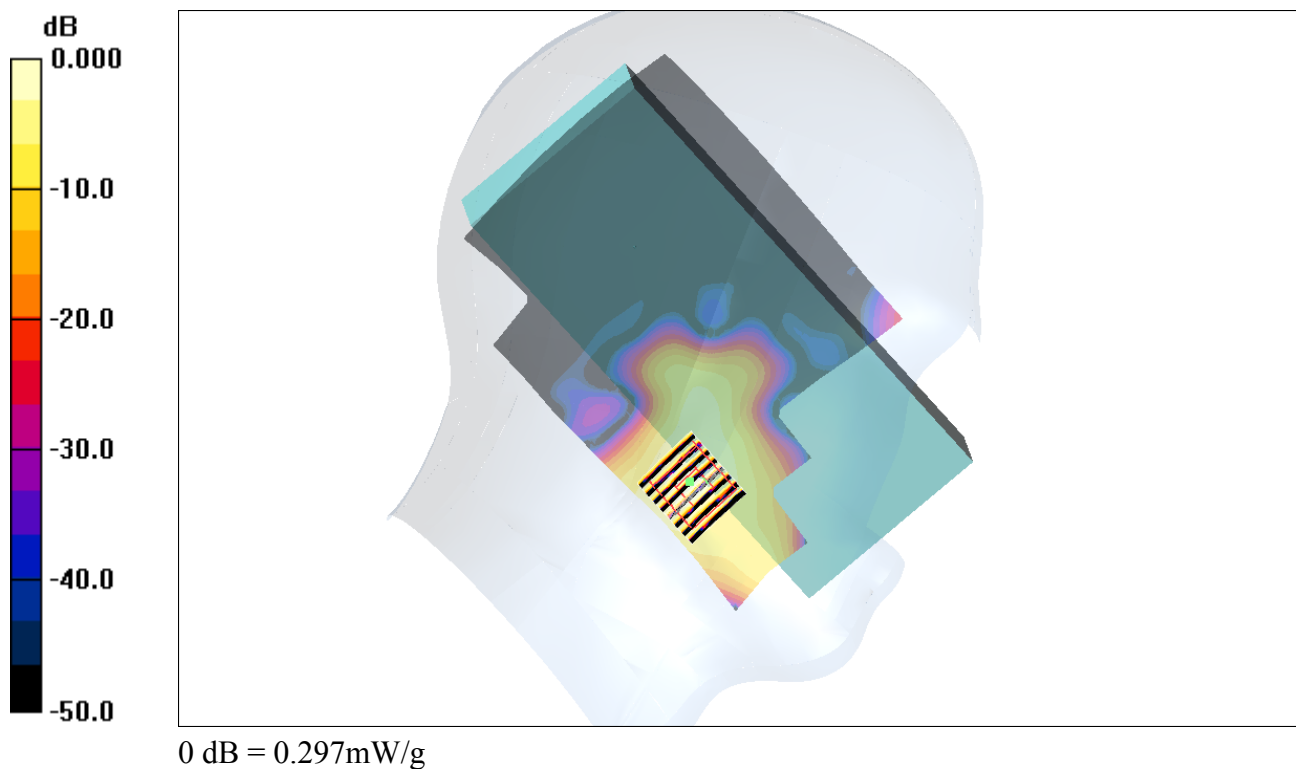

#23 802.11a_Left Cheek_Ch136_RS232_2D**DUT: 143002**

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 34.6$; ρ $= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.07, 4.07, 4.07); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch136/Area Scan (121x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.188 mW/g


Ch136/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.484 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.297 mW/g

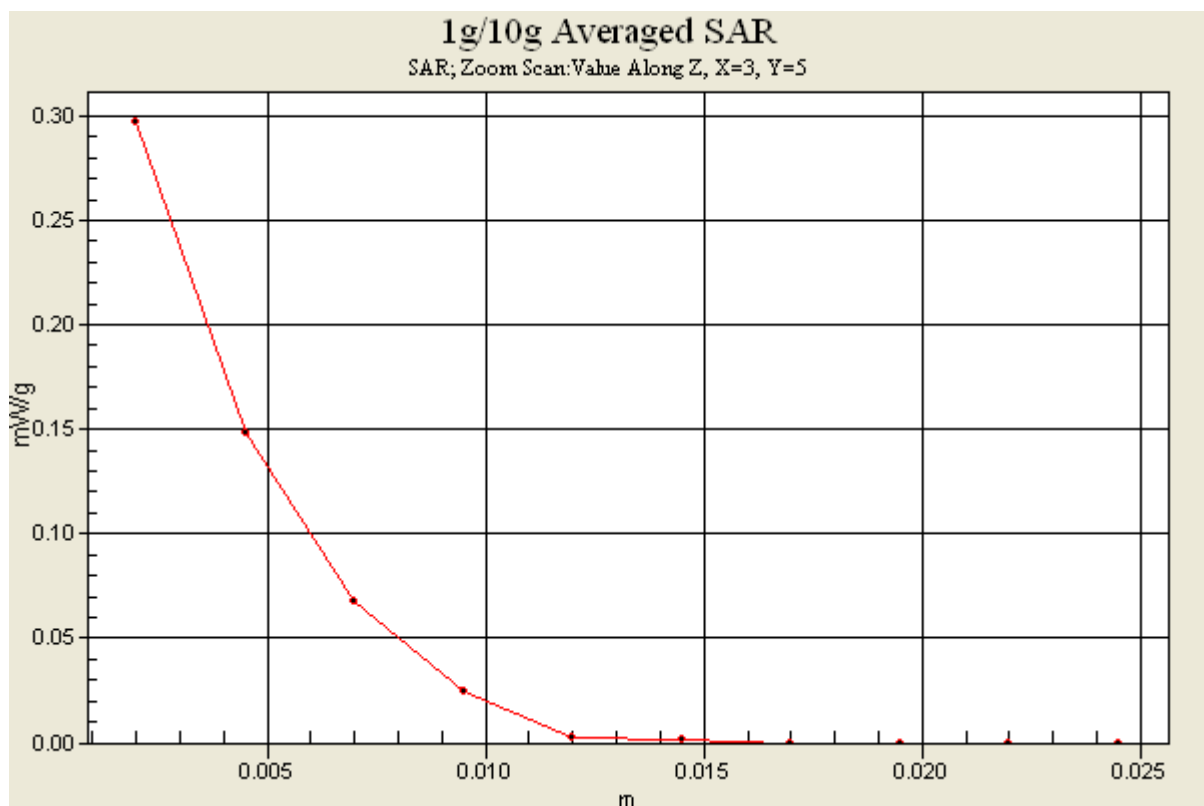

#24 802.11a_Left Cheek_Ch136_USB

DUT: 143002

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1

Medium: HSL5G_110622 Medium parameters used : $f = 5680$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.07, 4.07, 4.07); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch136/Area Scan (121x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.190 mW/g



Ch136/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.274 mW/g

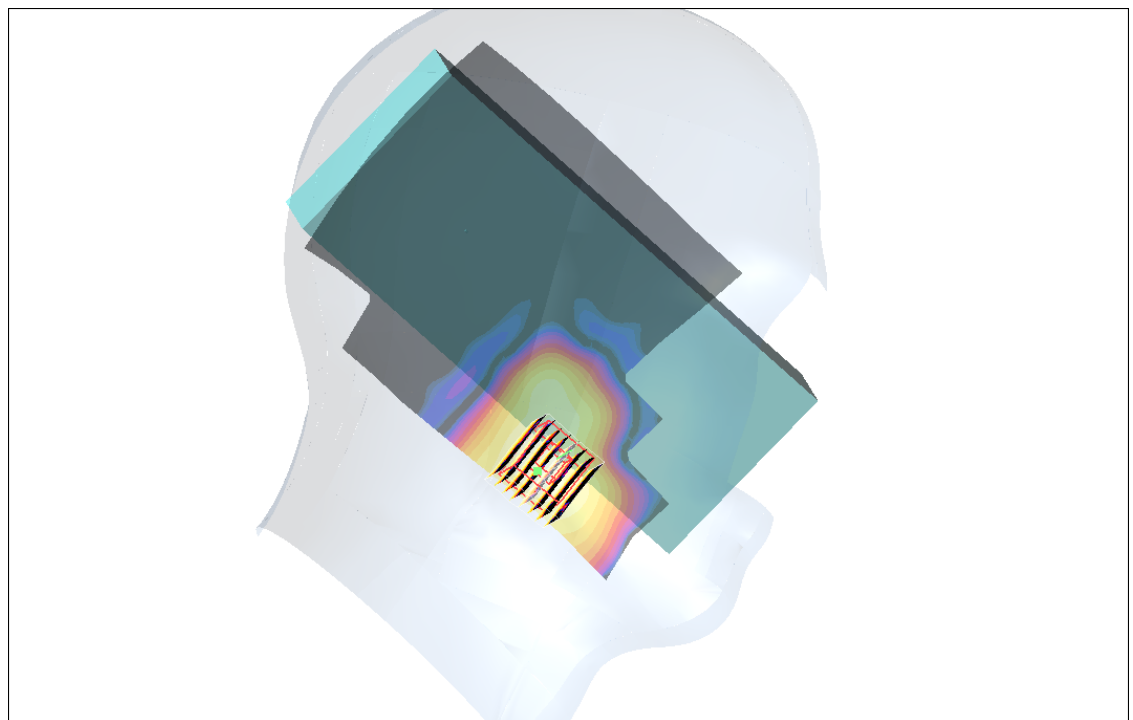

0 dB = 0.274mW/g

#51 802.11a_Right Tilted_Ch136_USB**DUT: 143002**

Communication System: 802.11a; Frequency: 5680 MHz;Duty Cycle: 1:1

Medium: HSL5G_110701 Medium parameters used : $f = 5680$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.97, 3.97, 3.97); Calibrated: 2011/4/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch136/Area Scan (61x111x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.044 mW/g


Ch136/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.086 mW/g

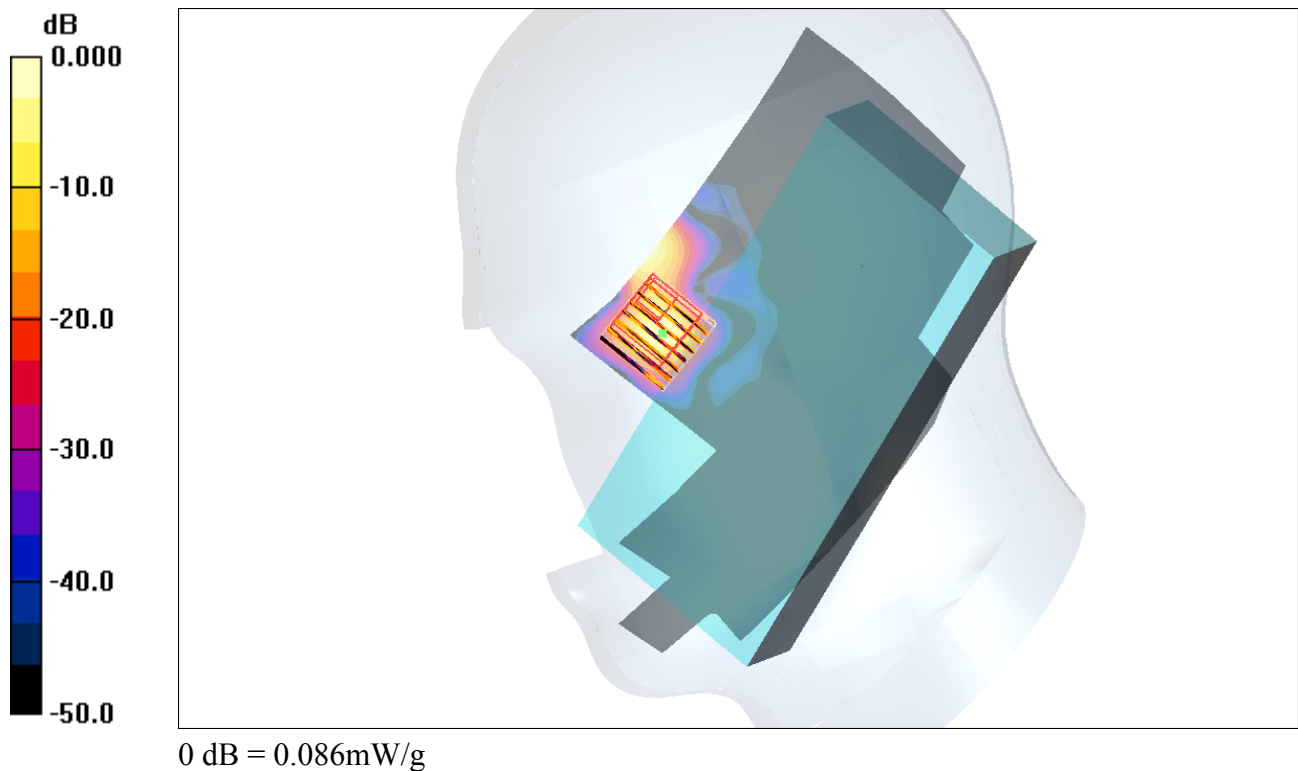

#25 802.11b_Front Face_0cm_Ch1_Holster**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL_2450_110624 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(3.96, 3.96, 3.96); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.048 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.68 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

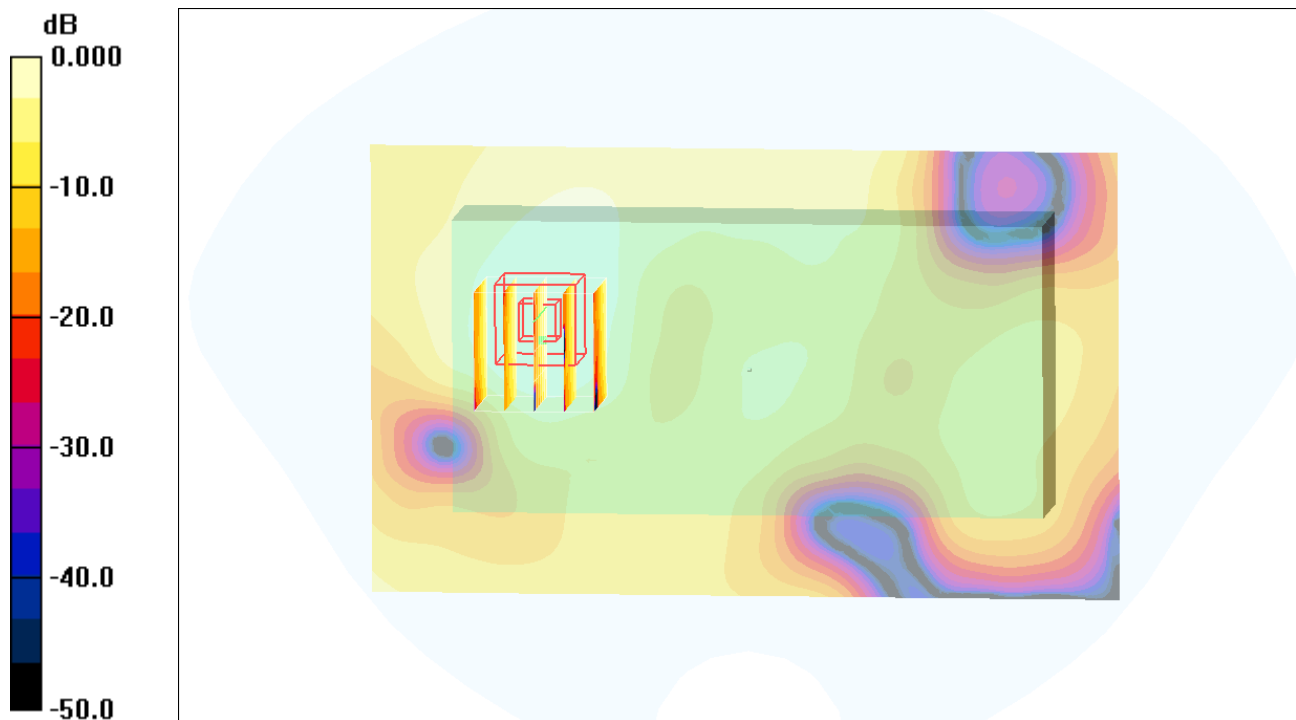

0 dB = 0.037mW/g

#26 802.11b_Rear Face_0cm_Ch1_Holster**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL_2450_110624 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(3.96, 3.96, 3.96); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.202 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.54 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.200 mW/g

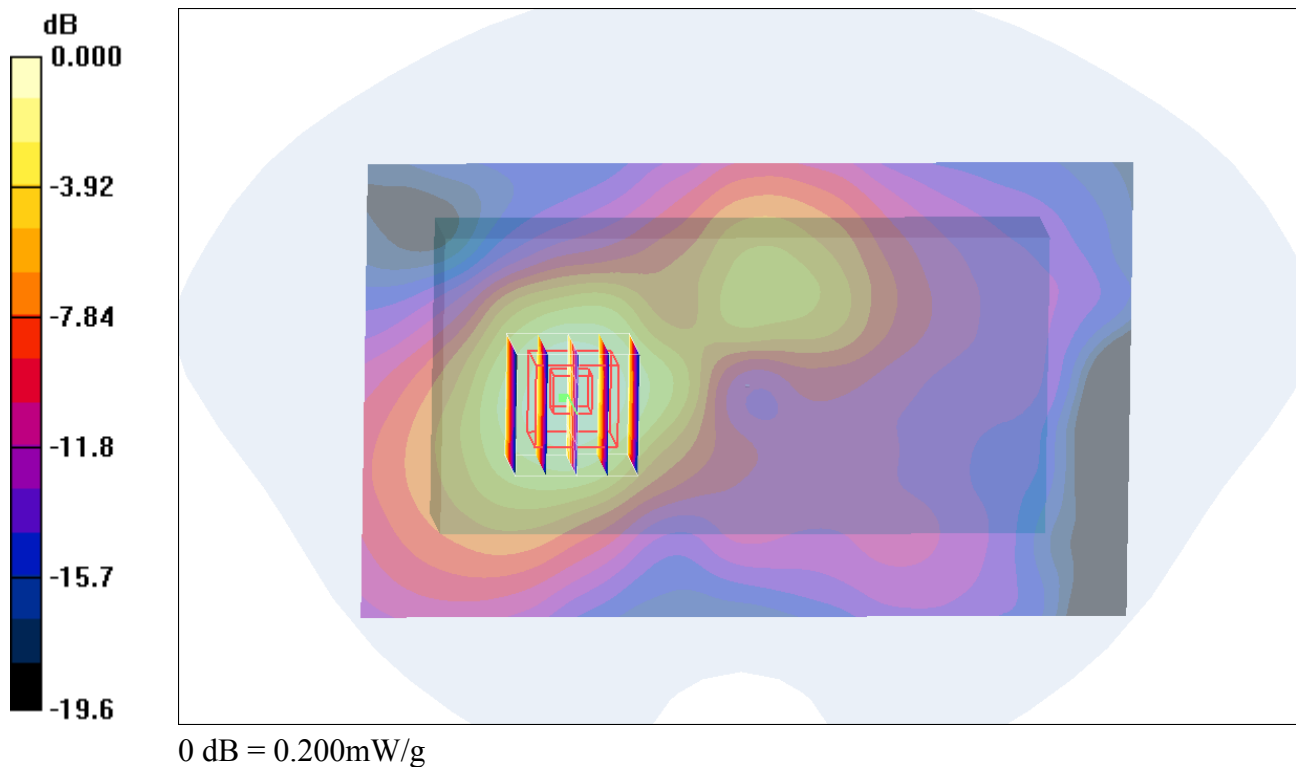

#27 802.11b_Rear Face_1.5cm_Ch1**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL_2450_110624 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(3.96, 3.96, 3.96); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.208 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.94 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.205 mW/g

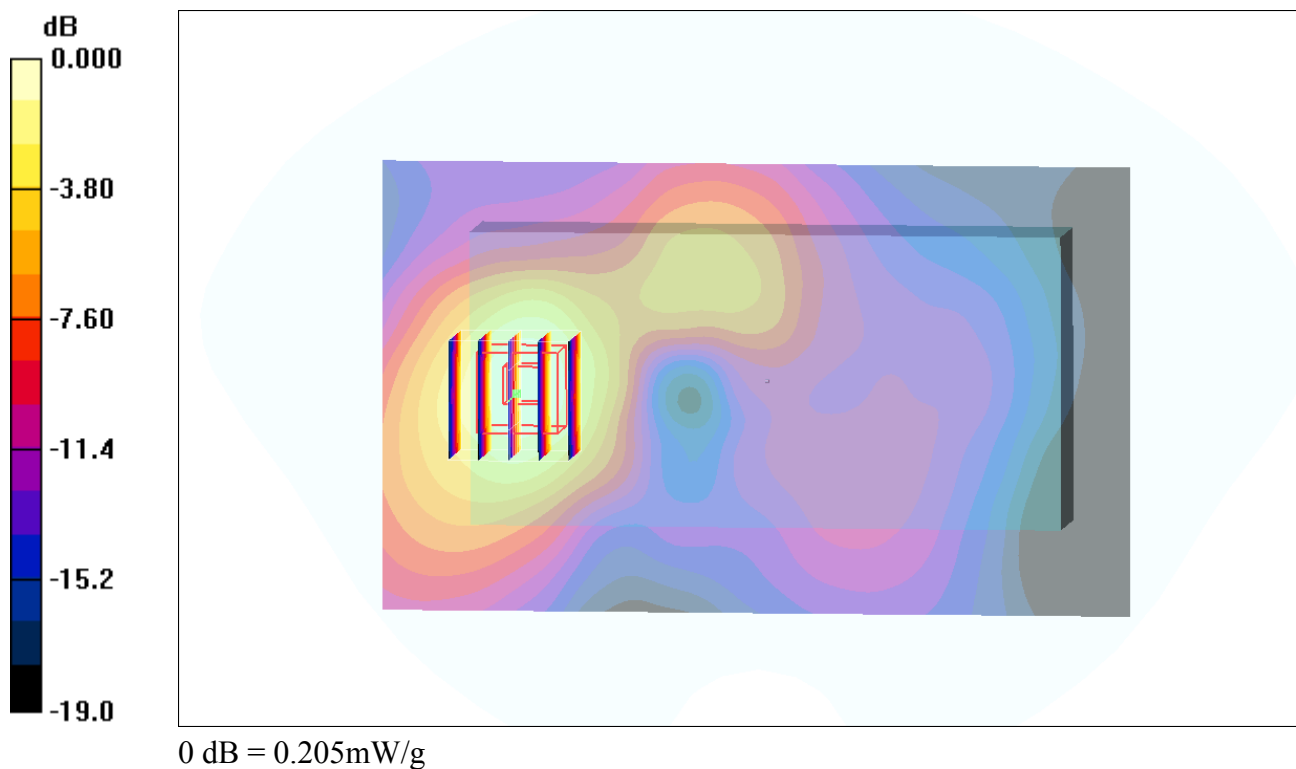

#28 802.11b_Rear Face_1.5cm_Ch1_RS232

DUT: 143002

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL_2450_110624 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(3.96, 3.96, 3.96); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x111x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.229 mW/g



Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.95 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

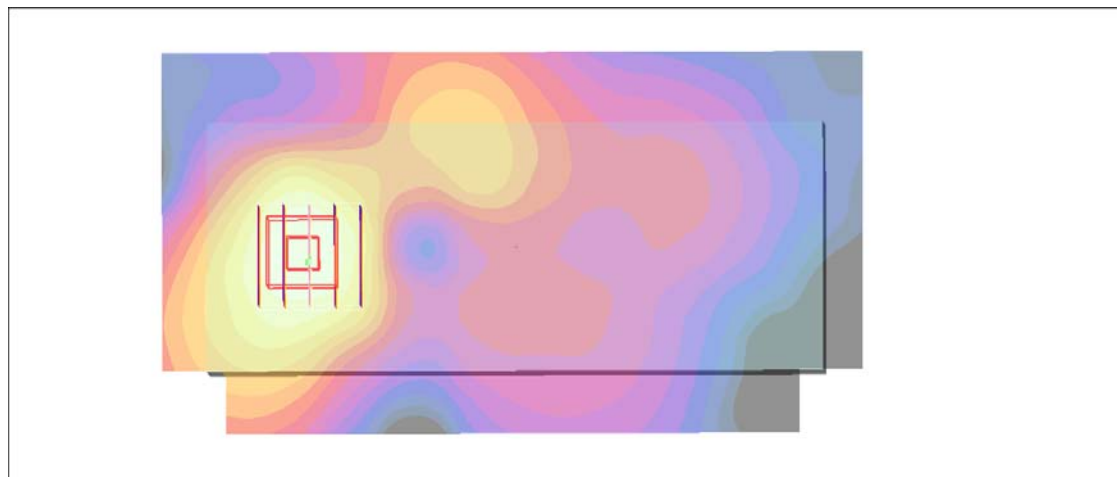

0 dB = 0.212mW/g

#28 802.11b_Rear Face_1.5cm_Ch1_RS232_2D**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110624 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 53.7$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(3.96, 3.96, 3.96); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x111x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.229 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.95 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

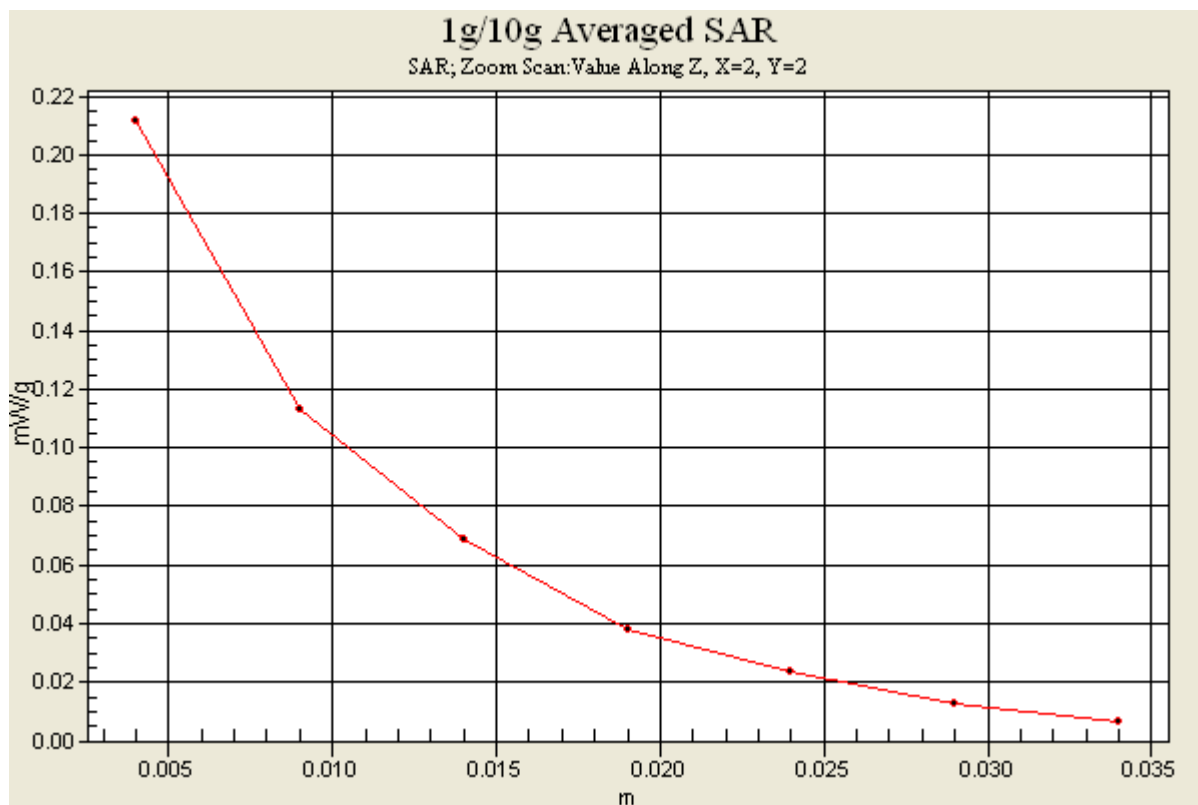

#29 802.11b_Rear Face_1.5cm_Ch1_USB**DUT: 143002**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL_2450_110624 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(3.96, 3.96, 3.96); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.218 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.66 V/m; Power Drift = -0.120 dB

Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.200 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.210 mW/g

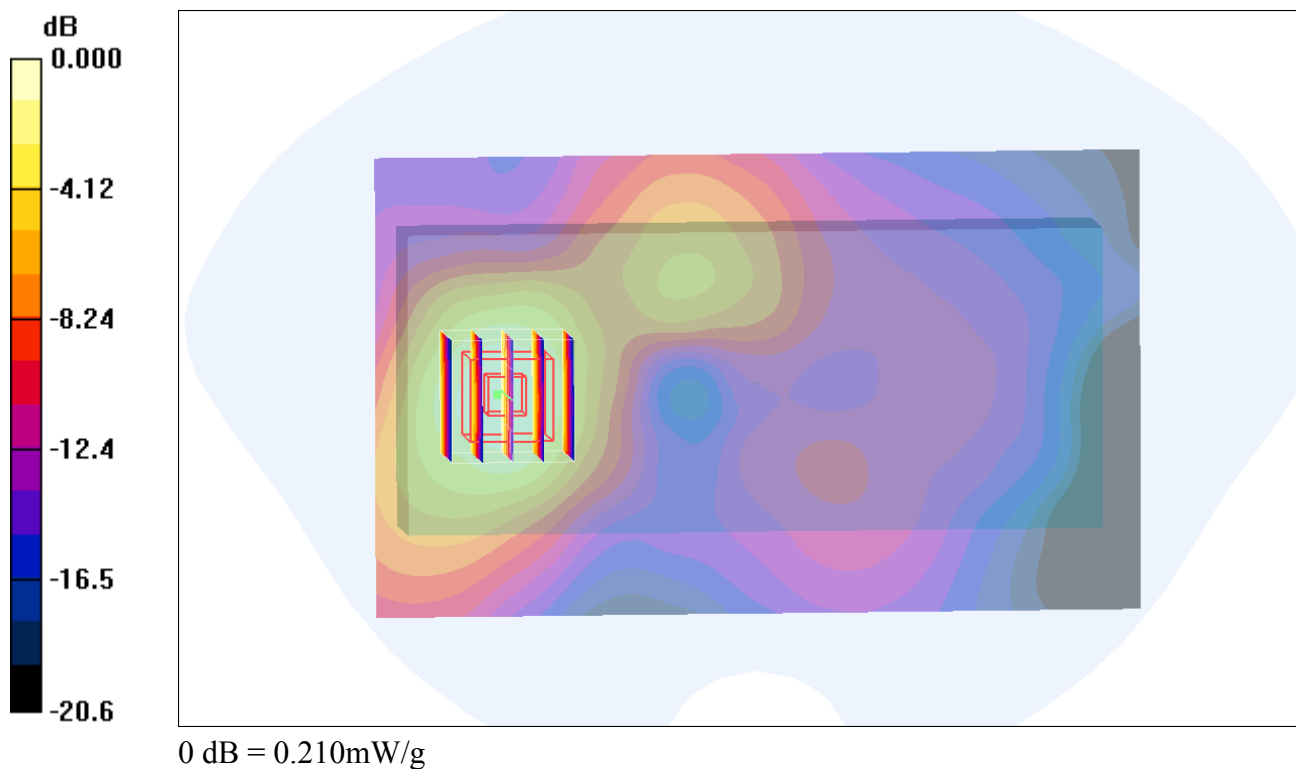

#30 802.11a_Front Face_0cm_Ch161_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5805$ MHz; $\sigma = 6.25$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.211 mW/g


Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

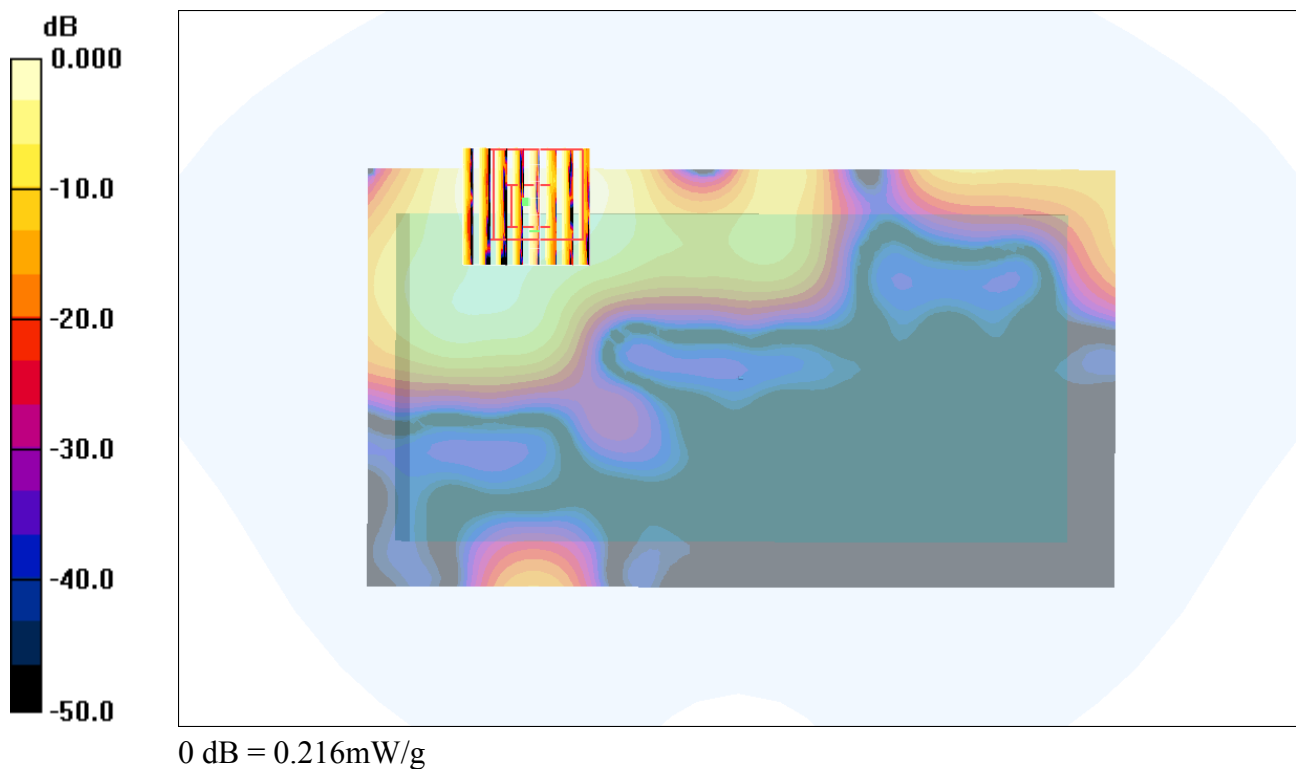

#31 802.11a_Rear Face_0cm_Ch161_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5805$ MHz; $\sigma = 6.25$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.750 mW/g



Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.73 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.720 mW/g; SAR(10 g) = 0.327 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

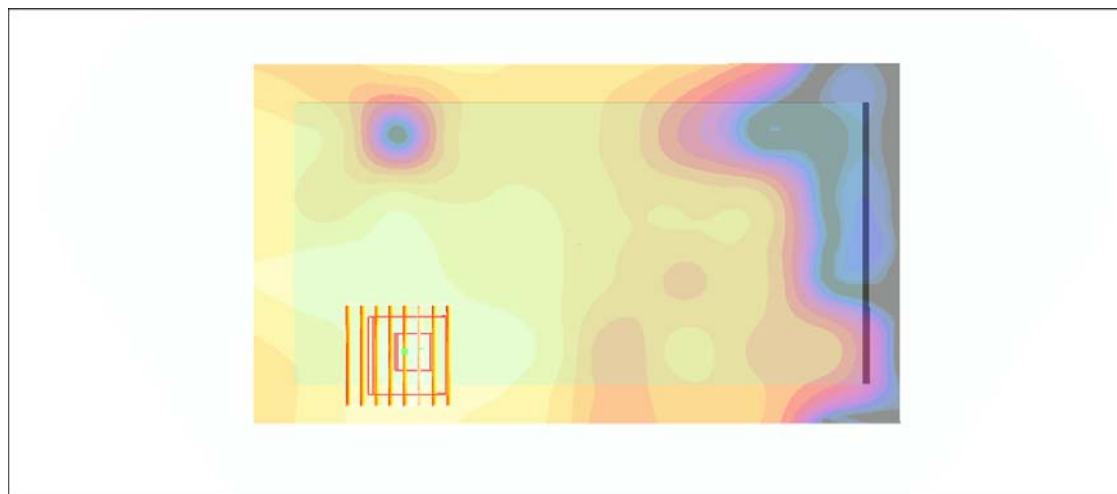

0 dB = 1.10mW/g

#31 802.11a_Rear Face_0cm_Ch161_Holster_2D**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5805$ MHz; $\sigma = 6.25$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.750 mW/g


Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.73 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.720 mW/g; SAR(10 g) = 0.327 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

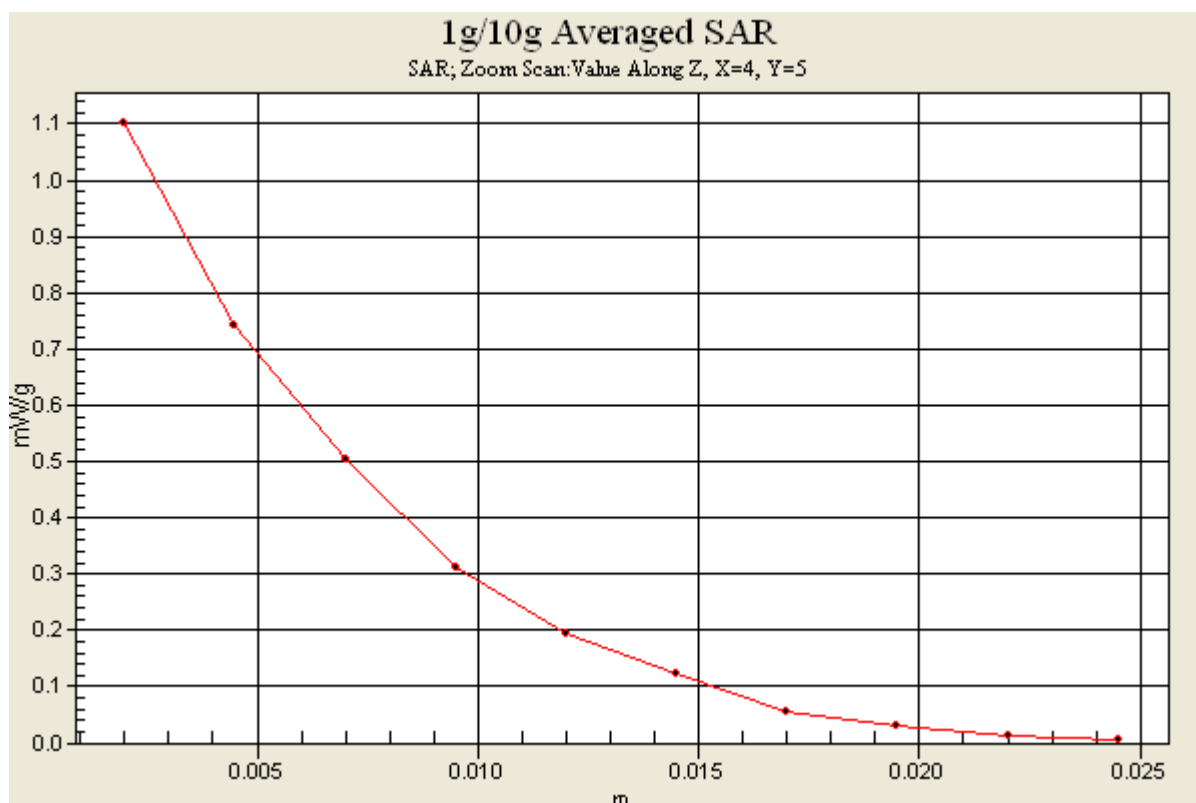

#32 802.11a_Rear Face_0cm_Ch36_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.3$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.87, 3.87, 3.87); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch36/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.175 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.34 V/m; Power Drift = -0.186 dB

Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

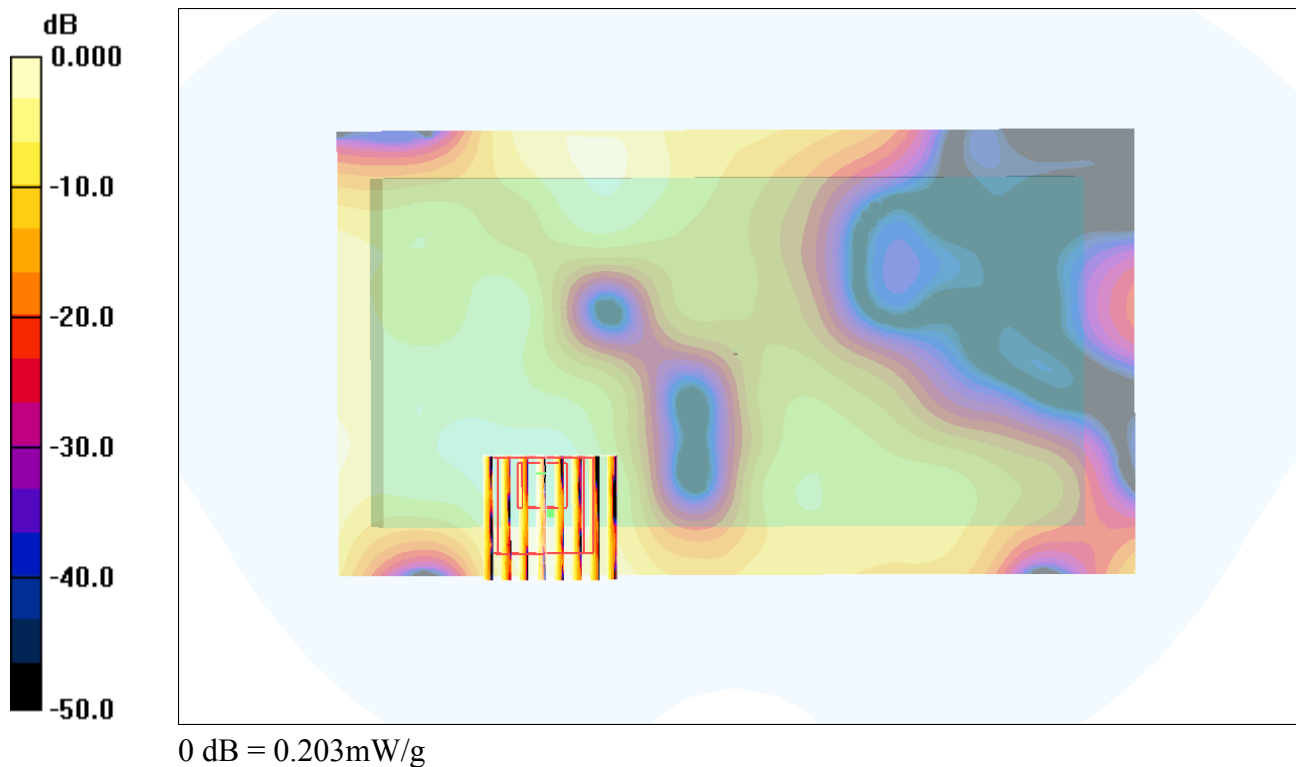

#33 802.11a_Rear Face_0cm_Ch48_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.37$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.87, 3.87, 3.87); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch48/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.225 mW/g


Ch48/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.47 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.255 mW/g

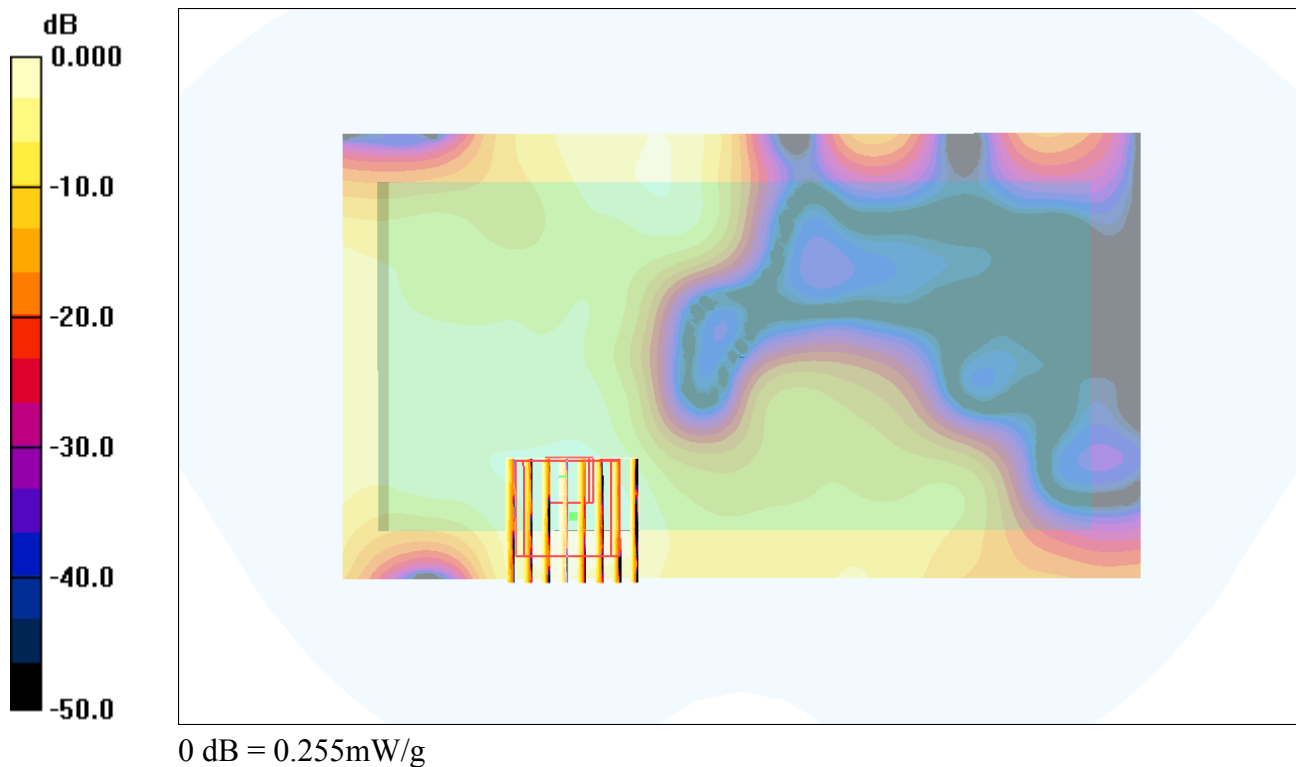

#34 802.11a_Rear Face_0cm_Ch52_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5260$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.63, 3.63, 3.63); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch52/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.214 mW/g


Ch52/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.05 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.230 mW/g

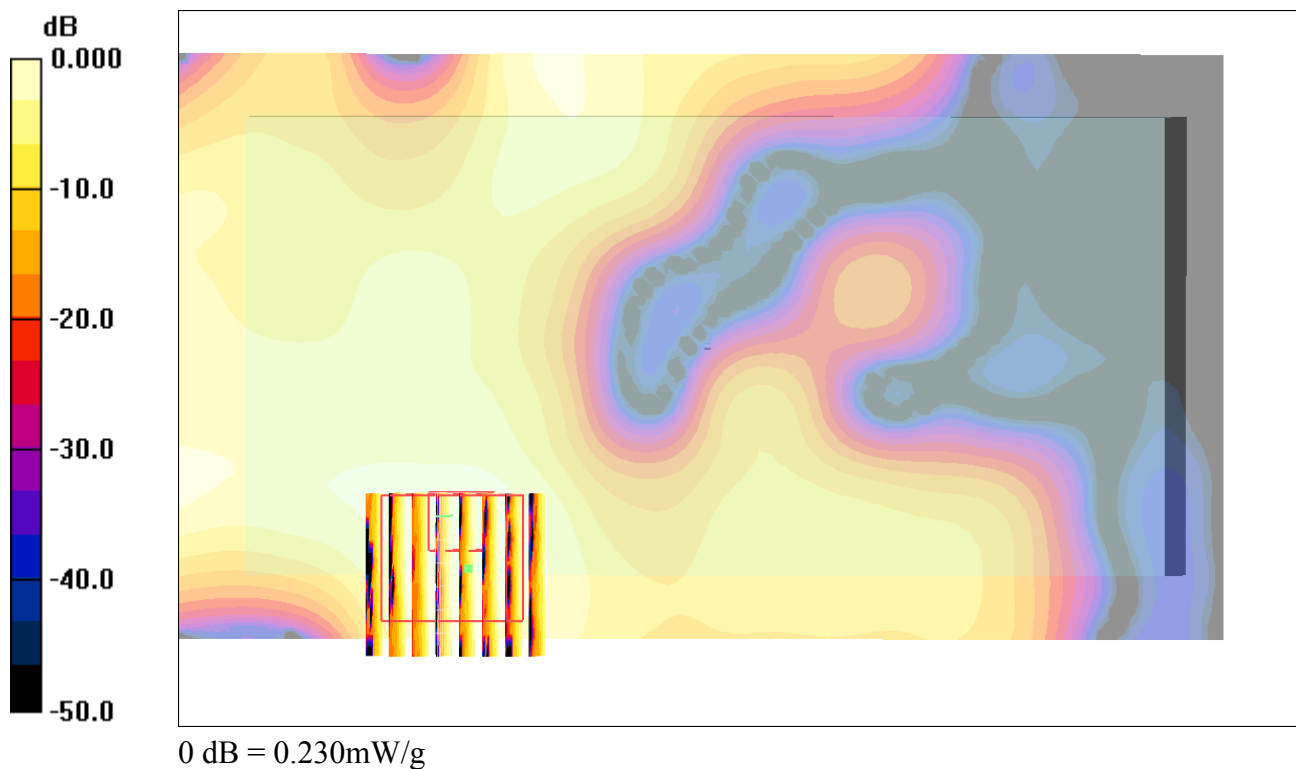

#35 802.11a_Rear Face_0cm_Ch64_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5320$ MHz; $\sigma = 5.49$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.63, 3.63, 3.63); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch64/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.167 mW/g

Ch64/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.91 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.241 mW/g


Ch64/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.91 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.174 mW/g

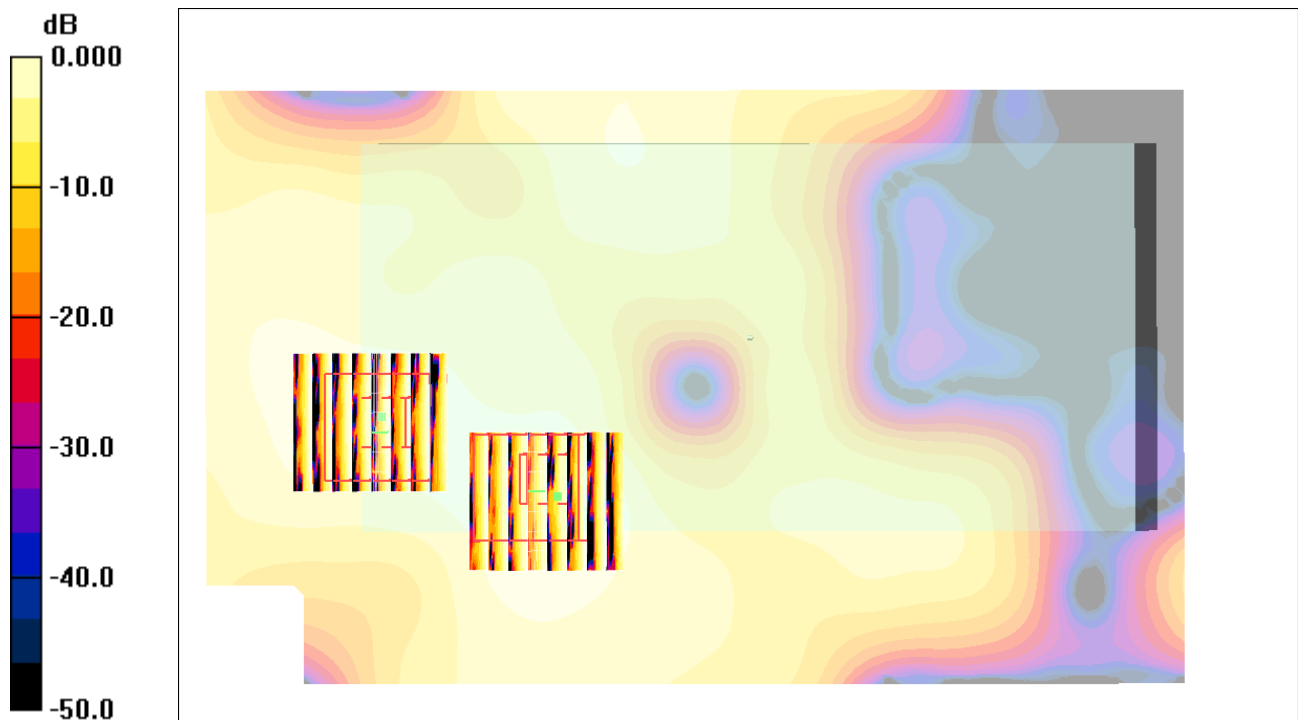

0 dB = 0.174mW/g

#36 802.11a_Rear Face_0cm_Ch104_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.77$ mho/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.44, 3.44, 3.44); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch104/Area Scan (121x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.369 mW/g


Ch104/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.12 V/m; Power Drift = -0.161 dB

Peak SAR (extrapolated) = 0.697 W/kg

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.525 mW/g

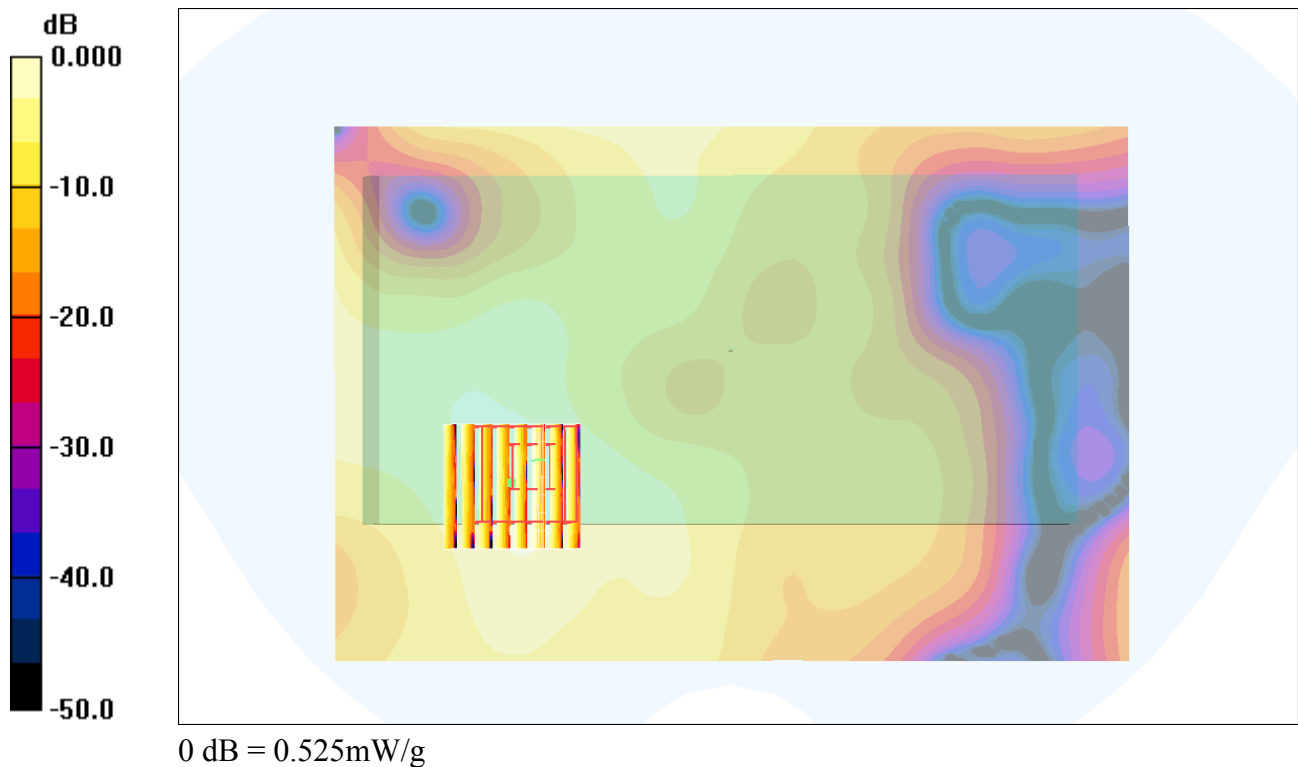

#37 802.11a_Rear Face_0cm_Ch116_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.86$ mho/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.2, 3.2, 3.2); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch116/Area Scan (121x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.386 mW/g


Ch116/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.28 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.406 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.604 mW/g

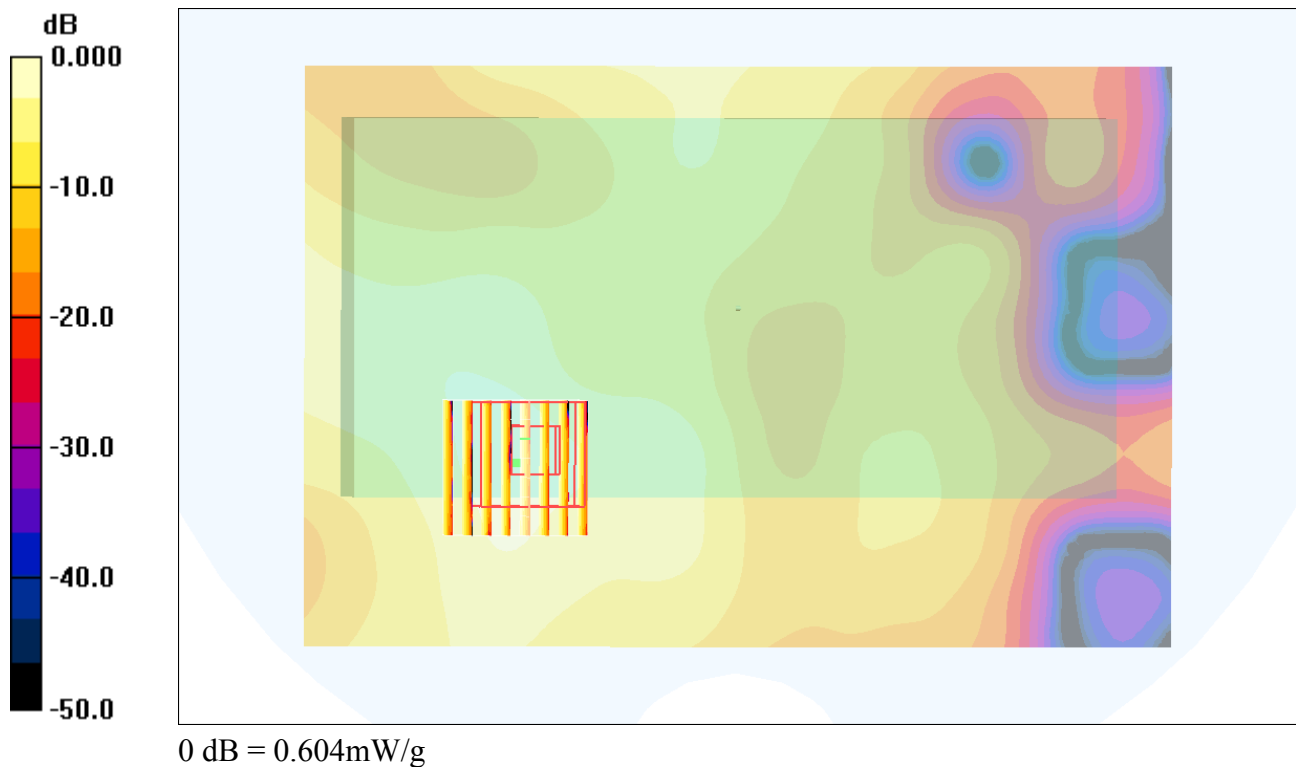

#38 802.11a_Rear Face_0cm_Ch124_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5620$ MHz; $\sigma = 5.92$ mho/m; $\epsilon_r = 46.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.2, 3.2, 3.2); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch124/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.393 mW/g

Ch124/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.59 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.697 W/kg

SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.537 mW/g


Ch124/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.59 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.363 mW/g

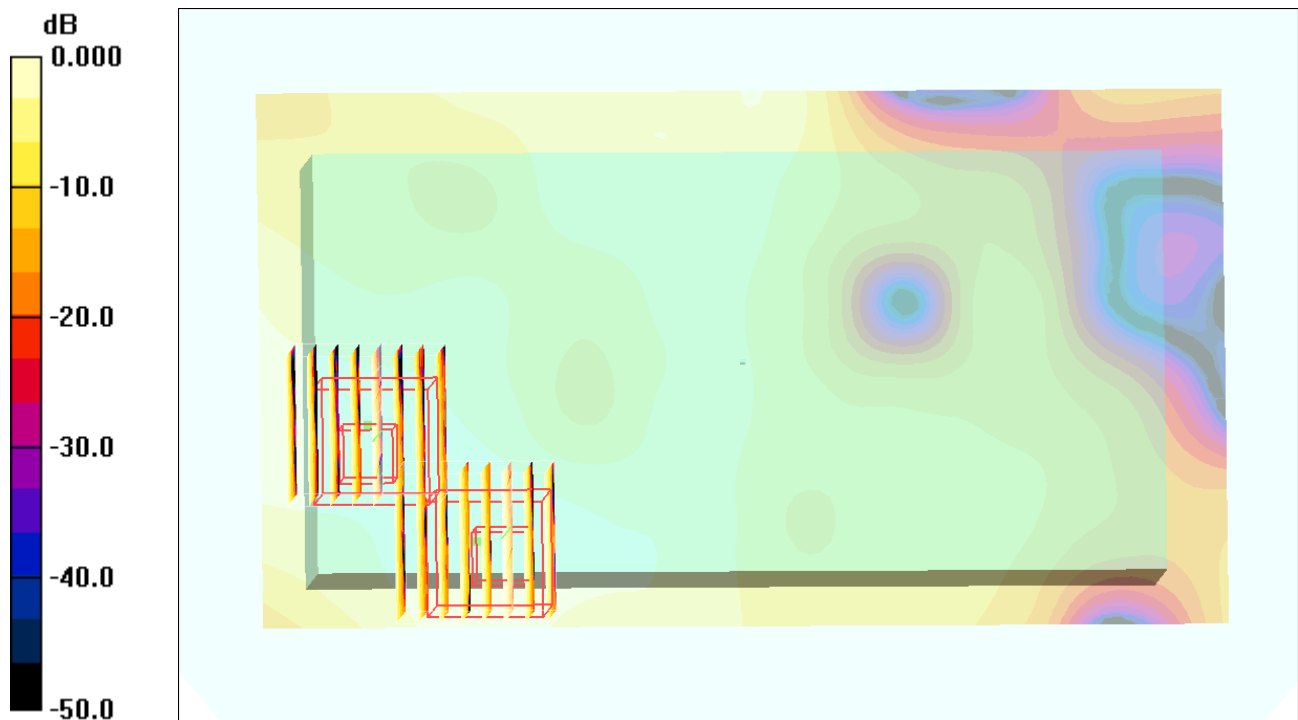

0 dB = 0.363mW/g

#39 802.11a_Rear Face_0cm_Ch136_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5680$ MHz; $\sigma = 6.03$ mho/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.0 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.2, 3.2, 3.2); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch136/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.499 mW/g


Ch136/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.42 V/m; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.678 mW/g

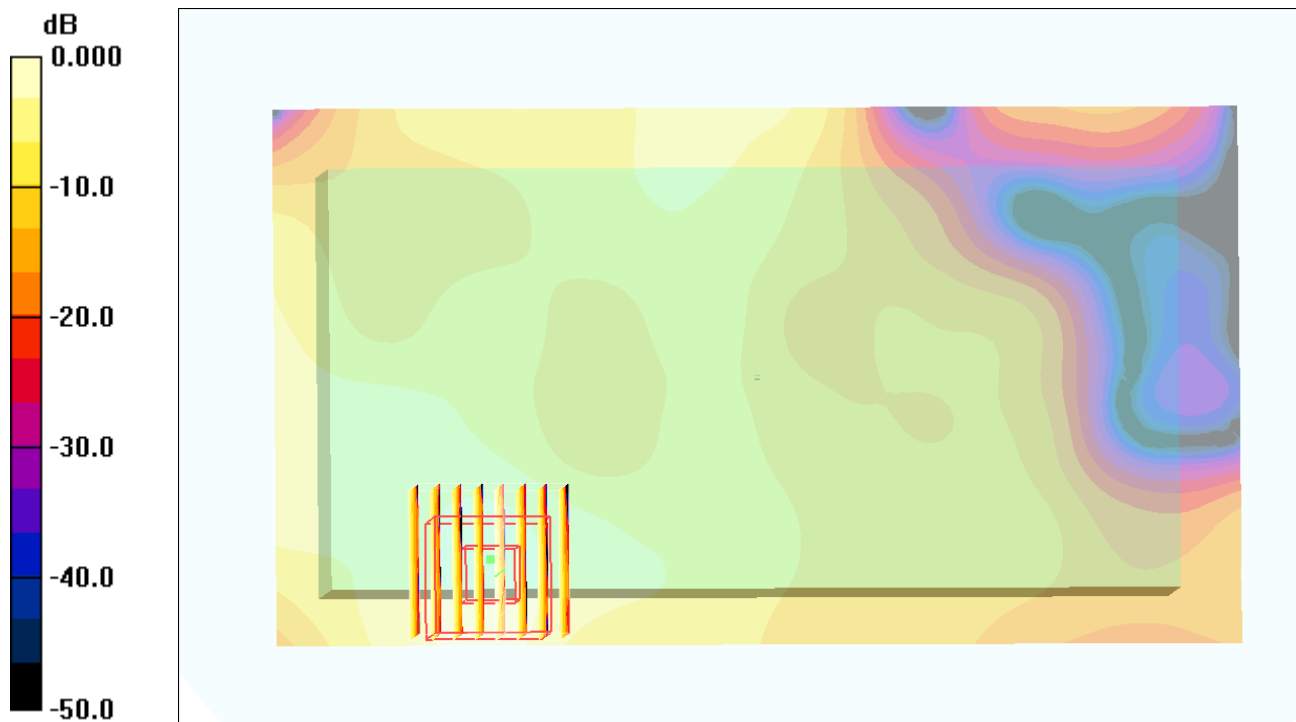

#40 802.11a_Rear Face_0cm_Ch149_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5745$ MHz; $\sigma = 6.18$ mho/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch149/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.386 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.56 V/m; Power Drift = -0.161 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.335 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.511 mW/g

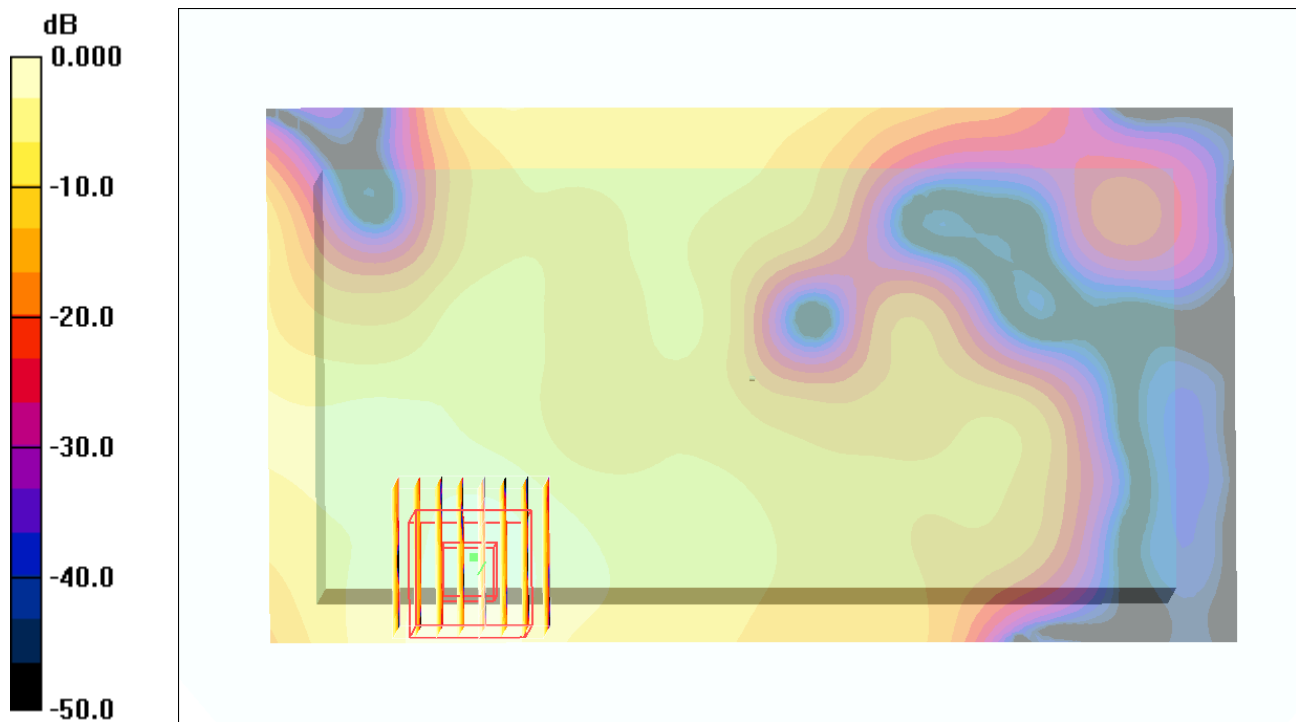

0 dB = 0.511mW/g

#41 802.11a_Rear Face_0cm_Ch157_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5785$ MHz; $\sigma = 6.23$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch157/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.575 mW/g


Ch157/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.02 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.494 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.759 mW/g

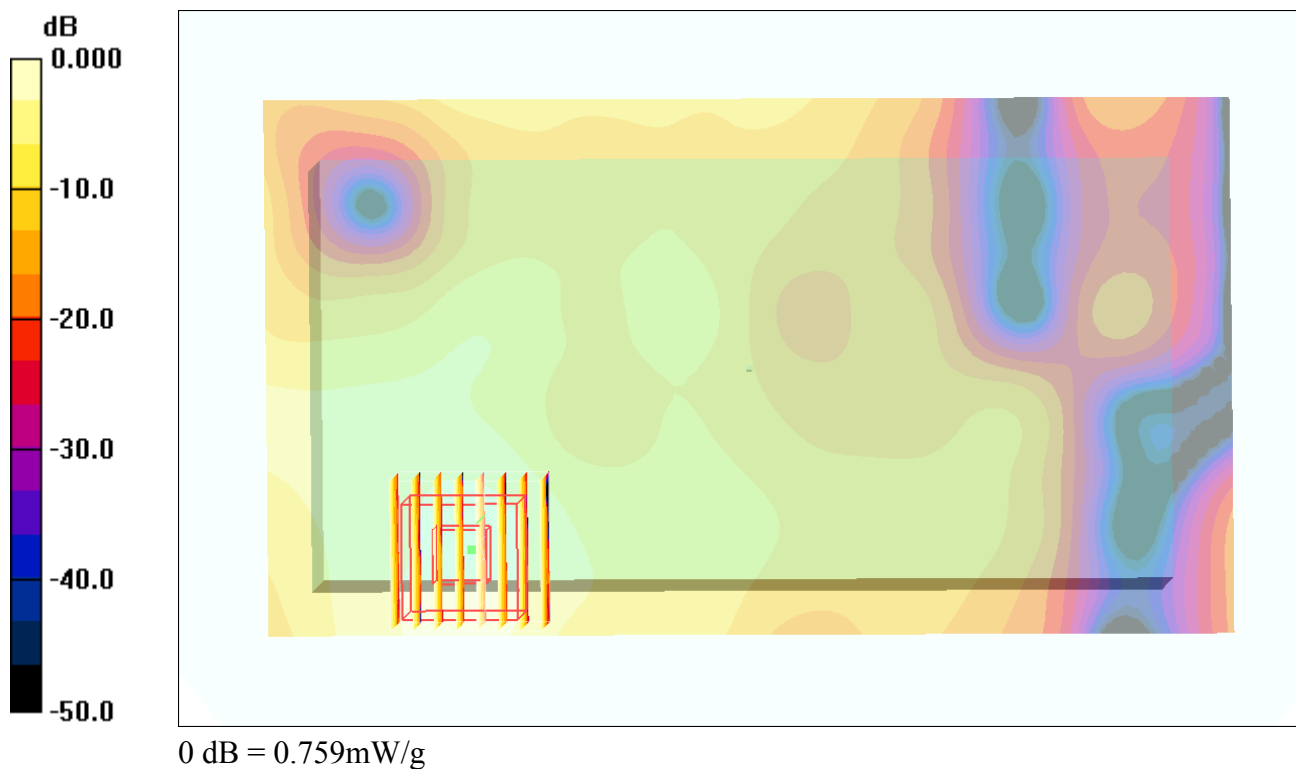

#42 802.11a_Rear Face_0cm_Ch165_Holster**DUT: 143002**

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.28$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch165/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.695 mW/g


Ch165/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.33 V/m; Power Drift = -0.165 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.294 mW/g

Maximum value of SAR (measured) = 0.979 mW/g

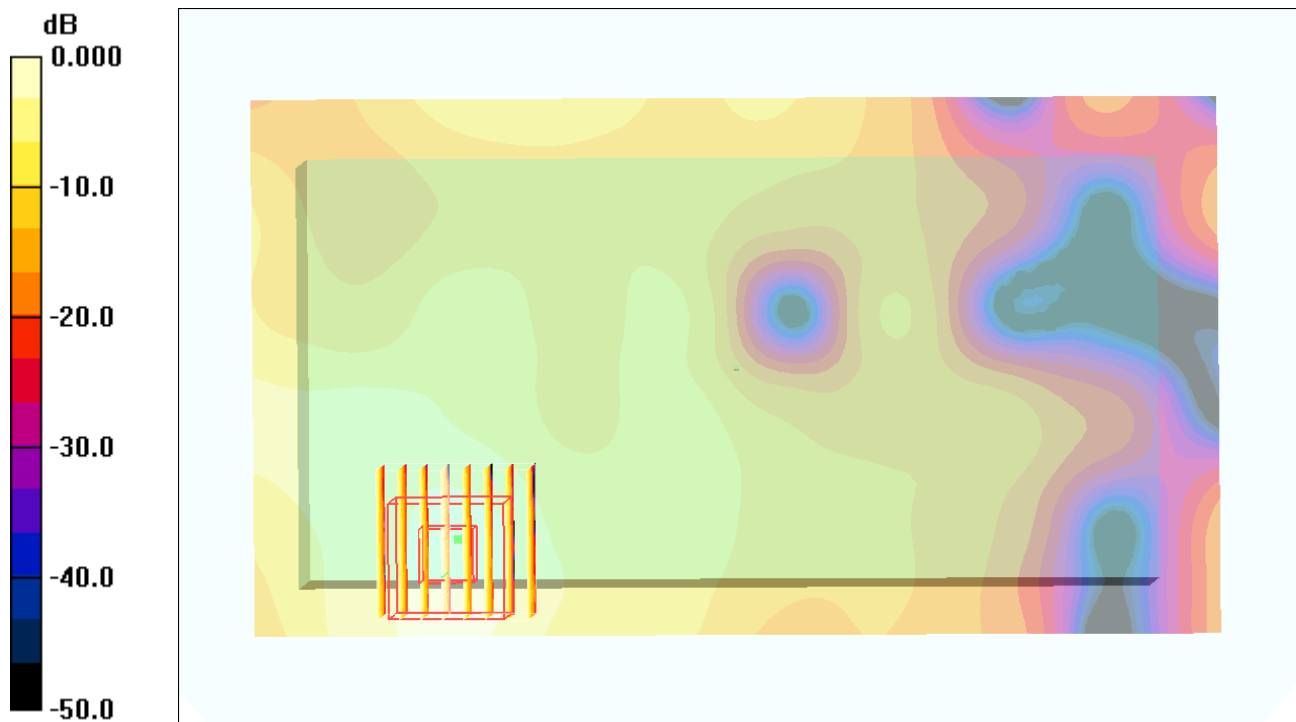

0 dB = 0.979mW/g

#43 802.11n_20M_Rear Face_0cm_Ch161_Holster**DUT: 143002**

Communication System: 802.11n; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5805$ MHz; $\sigma = 6.25$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.692 mW/g


Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.43 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.608 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.918 mW/g

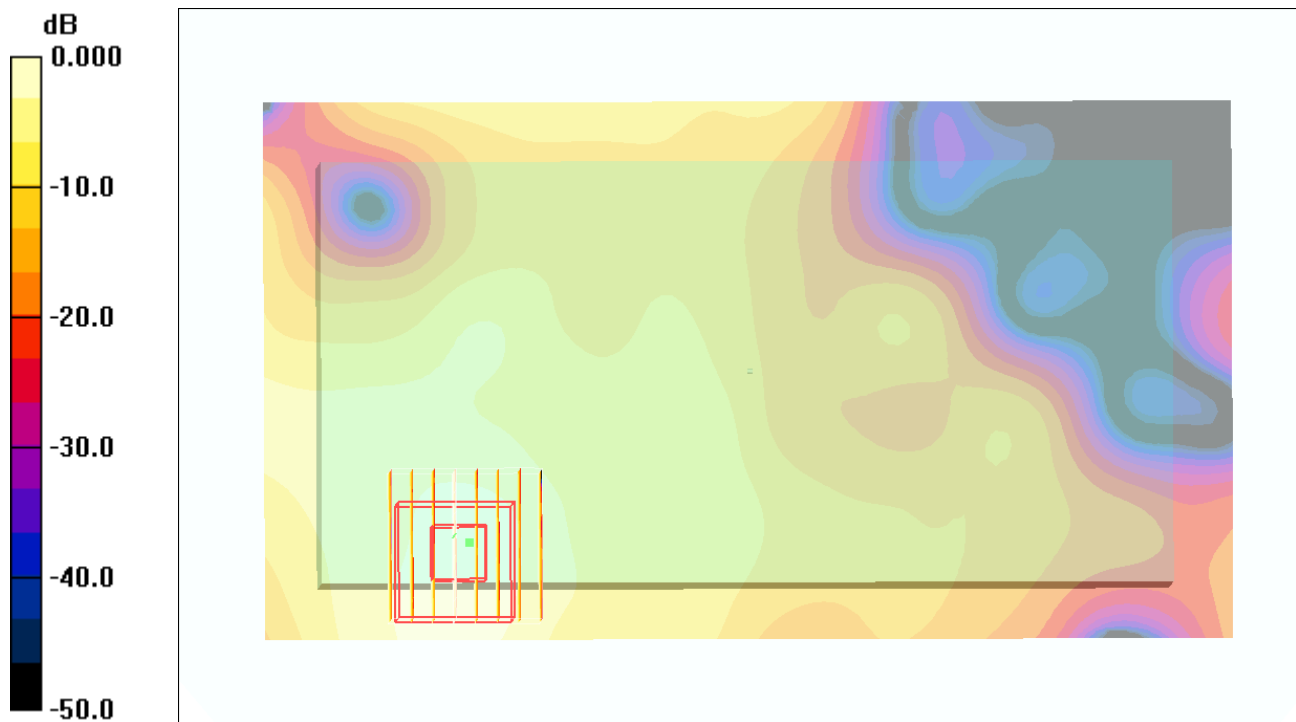

0 dB = 0.918mW/g

#44 802.11a_Rear Face_1.5cm_Ch161**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5805$ MHz; $\sigma = 6.25$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (121x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.553 mW/g


Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.132 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.505 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.775 mW/g

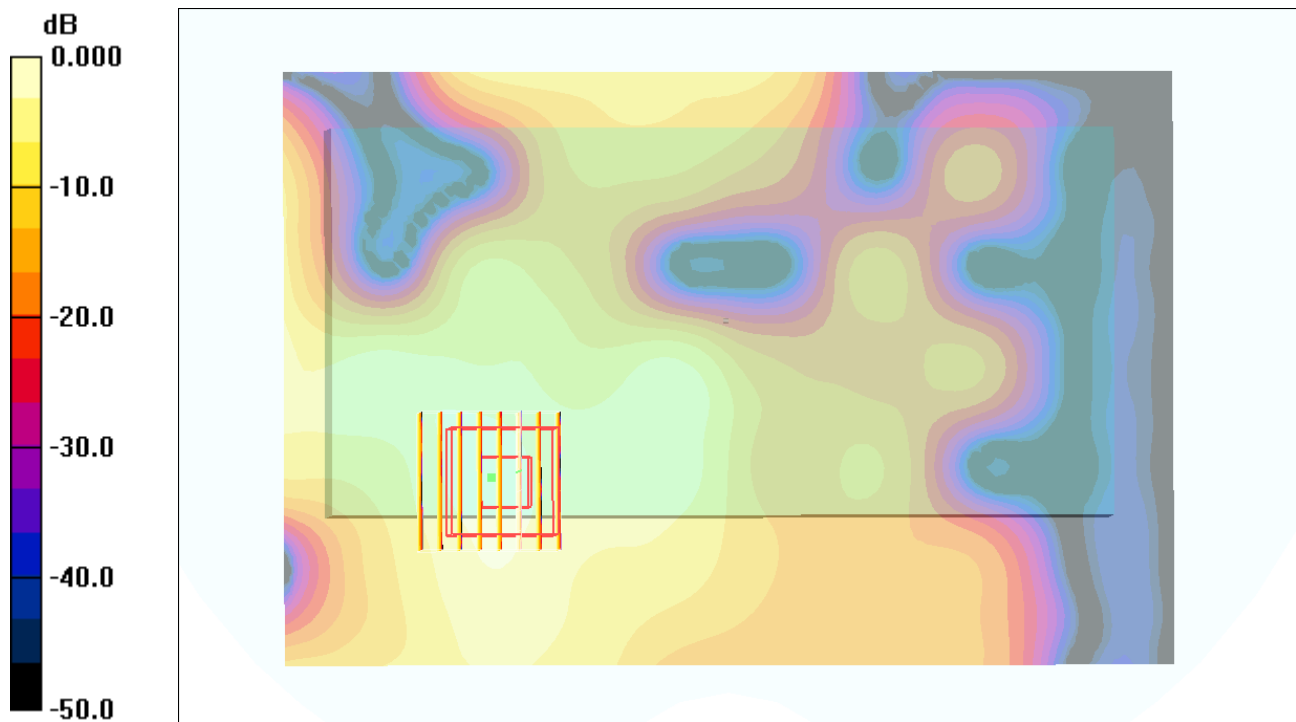

0 dB = 0.775mW/g

#47 802.11a_Rear Face_1.5cm_Ch48**DUT: 143002**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.37$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.87, 3.87, 3.87); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch48/Area Scan (101x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.158 mW/g

Ch48/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.189 mW/g


Ch48/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.177 mW/g

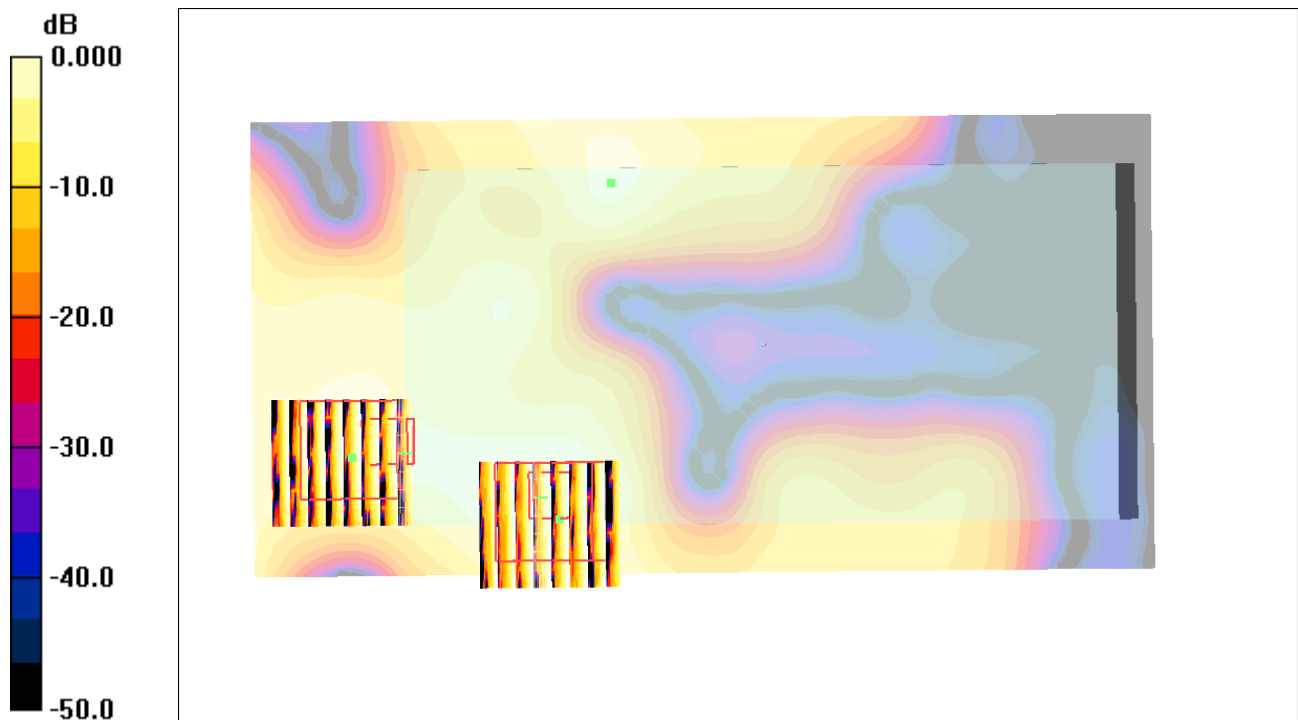

0 dB = 0.177mW/g

#48 802.11a_Rear Face_1.5cm_Ch64**DUT: 143002**

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5320$ MHz; $\sigma = 5.49$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.63, 3.63, 3.63); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch64/Area Scan (101x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.201 mW/g

Ch64/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.205 mW/g


Ch64/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.124 mW/g

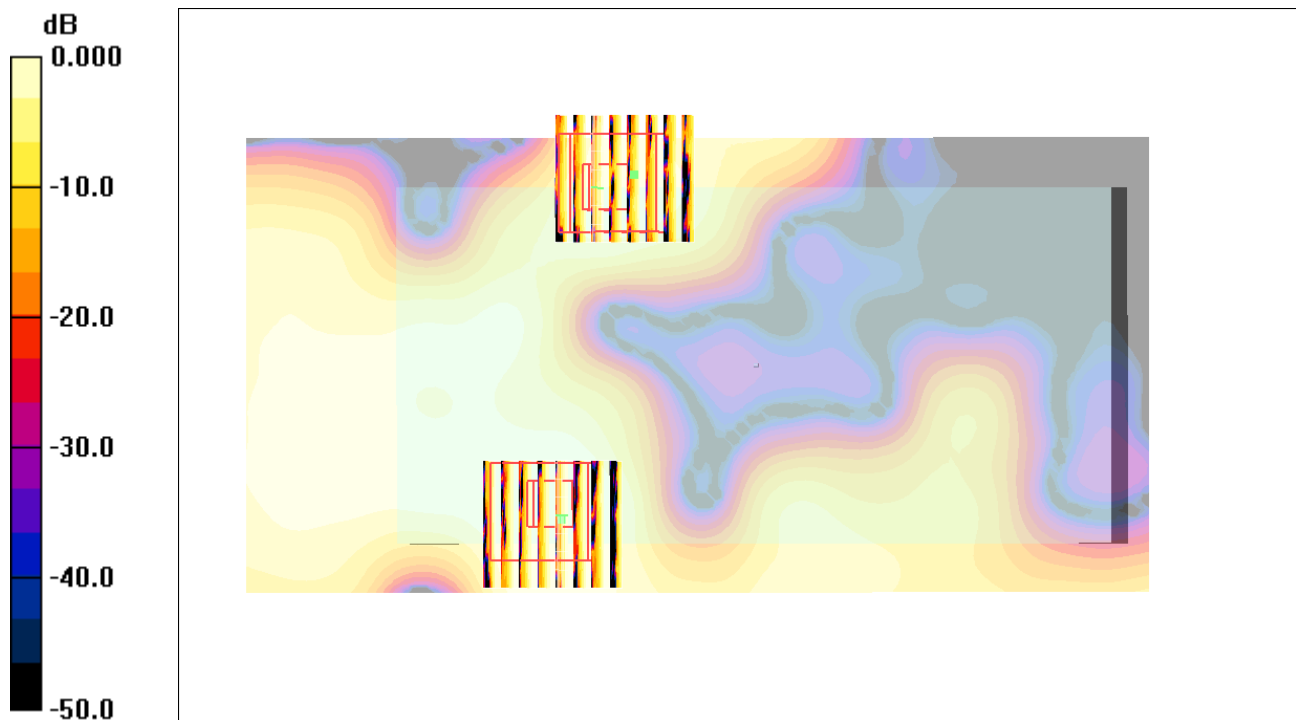

0 dB = 0.124mW/g

#49 802.11a_Rear Face_1.5cm_Ch136**DUT: 143002**

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5680$ MHz; $\sigma = 6.03$ mho/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.2, 3.2, 3.2); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch136/Area Scan (101x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.462 mW/g


Ch136/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.853 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.426 mW/g; SAR(10 g) = 0.195 mW/g

Maximum value of SAR (measured) = 0.650 mW/g

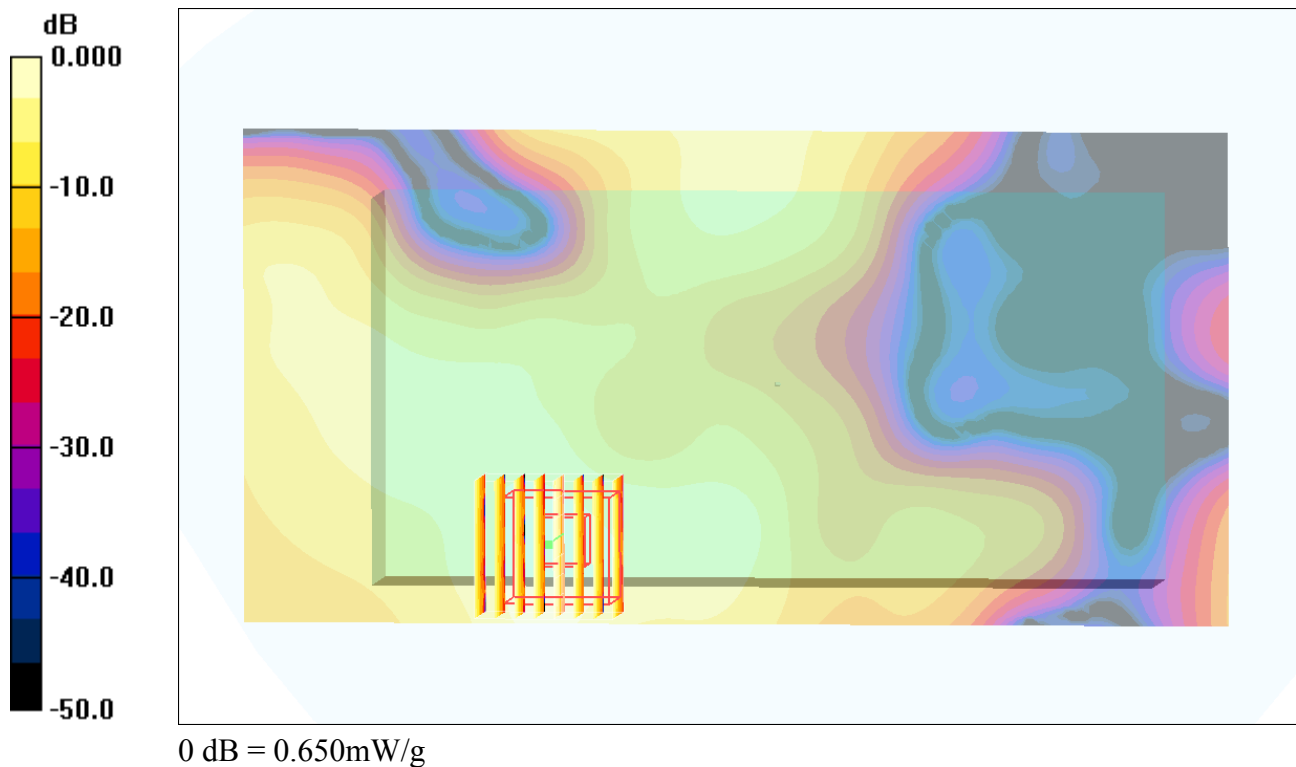

#45 802.11a_Rear Face_1.5cm_Ch161_RS232**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5805$ MHz; $\sigma = 6.25$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.580 mW/g


Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.74 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.509 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.789 mW/g

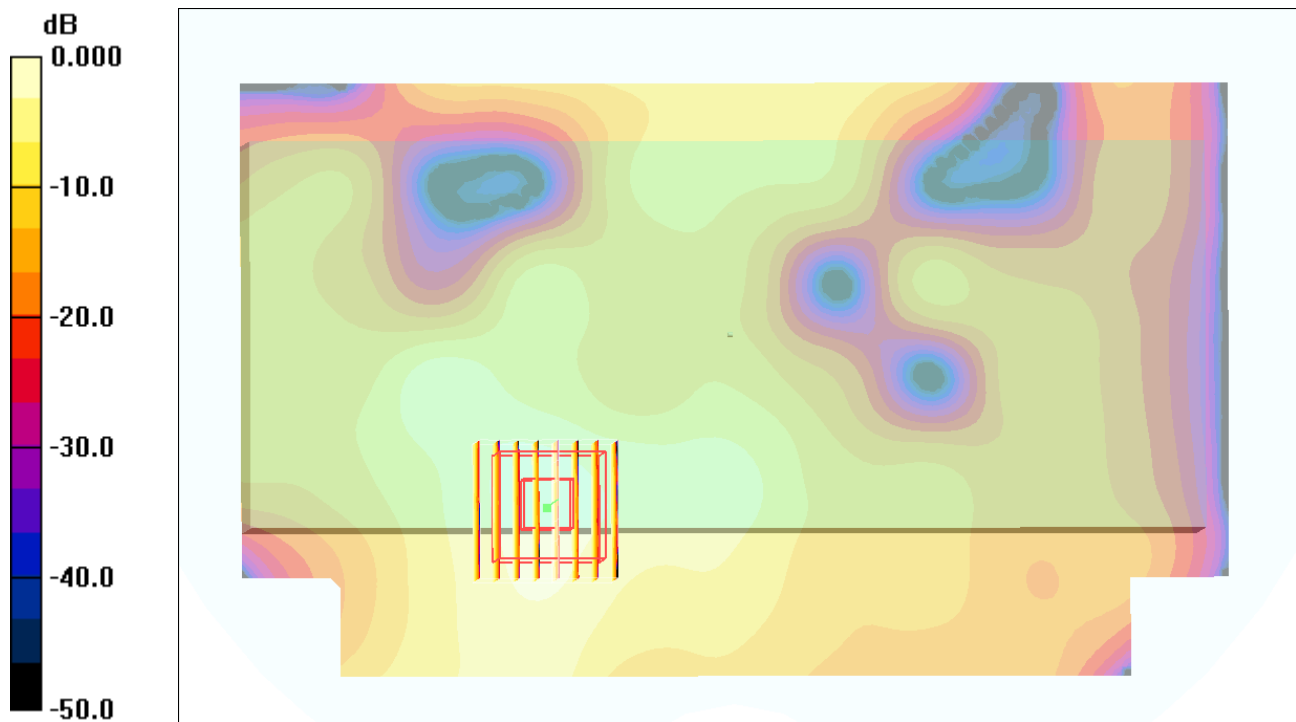

0 dB = 0.789mW/g

#46 802.11a_Rear Face_1.5cm_Ch161_USB**DUT: 143002**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110623 Medium parameters used: $f = 5805$ MHz; $\sigma = 6.25$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(3.55, 3.55, 3.55); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch161/Area Scan (121x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.492 mW/g

Ch161/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.74 V/m; Power Drift = -0.169 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.813 mW/g

