

# ENGINEERING TEST REPORT



## Handheld Computer Model No.: 7535 G2

FCC ID: GM37535G2

*Applicant:*

**Psion Teklogix Inc.**  
2100 Meadowvale Blvd.  
Toronto, Ontario  
Canada, L5N 7J9

*In Accordance With*

**FEDERAL COMMUNICATIONS COMMISSION (FCC)**  
**PART 15, SUBPART C, SECTION 15.247**  
**Frequency Hopping and Digital Modulation Systems (Bluetooth)**  
**Operating in the Frequency Band 2402-2480 MHz**

UltraTech's File No.: TEK-529F15C247

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs

Date: February 27, 2006



Report Prepared by: Dan Huynh

Tested by: Hung Trinh, RFI Technologist

Issued Date: February 27, 2006

Test Dates: January 26 - February 24, 2006

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri.luu@sympatico.ca](mailto:tri.luu@sympatico.ca)



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R



00-034



## TABLE OF CONTENTS

<b>EXHIBIT 1. INTRODUCTION.....</b>	<b>1</b>
1.1. SCOPE .....	1
1.2. RELATED SUBMITTAL(S)/GRANT(S) .....	1
1.3. NORMATIVE REFERENCES .....	1
<b>EXHIBIT 2. PERFORMANCE ASSESSMENT.....</b>	<b>2</b>
2.1. CLIENT INFORMATION .....	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	2
2.3. EUT'S TECHNICAL SPECIFICATIONS.....	3
2.4. LIST OF EUT'S PORTS.....	3
2.5. ANCILLARY EQUIPMENT .....	3
2.6. TEST SETUP BLOCK DIAGRAM .....	4
<b>EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....</b>	<b>5</b>
3.1. CLIMATE TEST CONDITIONS.....	5
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS.....	5
<b>EXHIBIT 4. SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
4.1. LOCATION OF TESTS .....	6
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....	6
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	6
<b>EXHIBIT 5. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS.....</b>	<b>7</b>
5.1. TEST PROCEDURES.....	7
5.2. MEASUREMENT UNCERTAINTIES .....	7
5.3. MEASUREMENT EQUIPMENT USED .....	7
5.4. COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS .....	7
5.5. 6 dB & 20 dB Bandwidth [§15.247(a)(1)&(2)] .....	8
5.6. PEAK OUTPUT POWER [§§ 15.247(b)(1)&(3)].....	15
5.7. SPURIOUS RADIATED EMISSIONS @ 3 METERS [§ 15.247(d)].....	16
5.8. POWER SPECTRAL DENSITY [§ 15.247(e) & (f)] .....	27
5.9. AVERAGE TIME OF OCCUPANCY [§ 15.247(f)] .....	28
<b>EXHIBIT 6. MEASUREMENT UNCERTAINTY.....</b>	<b>36</b>
6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY .....	36
6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY .....	37

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

<b>Reference:</b>	Part 15, Subpart C, Section 15.247
<b>Title:</b>	Telecommunication - Code of Federal Regulations, CFR 47, Part 15
<b>Purpose of Test:</b>	To gain FCC Equipment Authorization for Frequency Hopping and Digital Modulation Systems (Bluetooth) Operating in the Frequency Band 2402-2480 MHz.
<b>Test Procedures:</b>	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
<b>Environmental Classification:</b>	<ul style="list-style-type: none"><li>Residential</li><li>Light-industry, Commercial</li><li>Industry</li></ul>

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

### 1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC 47CFR Parts 0-19	2005	Code of Federal Regulations, Title 47 – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 +A1 EN 55022	2003-04-10 2004-10-14 2003	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-2-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-1: Conducted disturbance measurement
CISPR 16-2-3	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-3: Radiated disturbance measurement
FCC Public Notice DA 00-705	2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
KDB Publication No. 558074	2005	Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: TEK-529F15C247  
February 27, 2006

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

APPLICANT:	
Name:	Psion Teklogix Inc.
Address:	2100 Meadowvale Blvd. Mississauga, ON Canada, L5N 7J9
Contact Person:	Mr. Sada Dharwarkar Phone #: 905-812-6200 (3358) Fax #: 905-812-6301 Email Address: Sada.Dharwarkar@psionteklogix.com

MANUFACTURER:	
Name:	Psion Teklogix Inc.
Address:	2100 Meadowvale Blvd. Mississauga, ON Canada, L5N 7J9
Contact Person:	Mr. Sada Dharwarkar Phone #: 905-812-6200 (3358) Fax #: 905-812-6301 Email Address: Sada.Dharwarkar@psionteklogix.com

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	Psion Teklogix Inc.
Product Name:	Handheld Computer
Model Name or Number:	7535 G2
Serial Number:	EP05
Type of Equipment:	FHSS/DTS (Bluetooth)
Input Power Supply Type:	The 7535 G2 is powered by a lithium-ion rechargeable battery pack. The 7535 G2 can be powered from external power when used with the AC adaptor. When the 7535 G2 is powered from the AC adaptor, it will also charge the battery pack.
Primary User Functions of EUT:	Provide data communication link through air

## 2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
<b>Equipment Type:</b>	Portable
<b>Intended Operating Environment:</b>	Commercial, light industry & heavy industry
<b>Power Supply Requirement:</b>	lithium-ion rechargeable battery pack or 15 VDC from power adaptor
<b>RF Output Power Rating:</b>	2 mW
<b>Operating Frequency Range:</b>	2402-2480 MHz
<b>RF Output Impedance:</b>	50 Ω
<b>Channel Spacing:</b>	1 MHz
<b>Duty Cycle:</b>	100%
<b>Modulation Type:</b>	Bluetooth
<b>Oscillator Frequencies:</b>	13 MHz, 7.3728 MHz, 32.768 KHz, 6.0 MHz, 48 MHz
<b>Antenna Connector Type:</b>	Integral (the antenna component is soldered onto the radio printed circuit board and located inside the enclosure)
<b>Antenna Description:</b>	Manufacturer: Murata Type: Chip Part No.: LBMA2U2BL2-092 Frequency Range: 2.402 – 2.480 GHz Gain: 2.0 dBi

## 2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	Tether	1	Mini-DIN 8 Pin	Decoded Scanner
2	Docking	1	N/A	Terminated with Portable Docking Module

## 2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Scanner Symbol
Brand name:	Psion Teklogix
Serial Number:	M1J3 7E70W
Connected to EUT's Port:	Mini-DIN 8 Pin

## ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: TEK-529F15C247

February 27, 2006

## 2.6. TEST SETUP BLOCK DIAGRAM

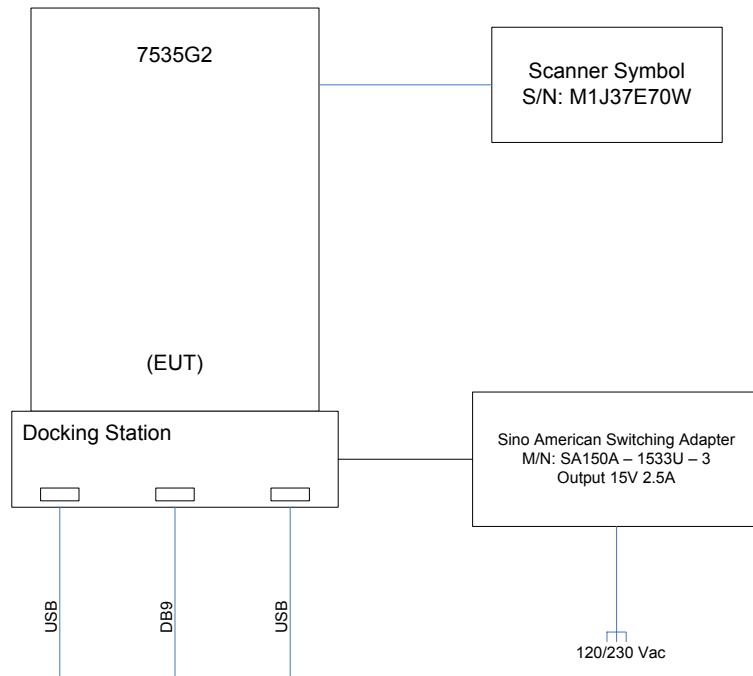

## EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	15 V DC from power adaptor

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

<b>Operating Modes:</b>	<ul style="list-style-type: none"><li>Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements.</li><li>The EUT operates in frequency hopping mode and direct sequence or digital modulation mode.</li></ul>
<b>Special Test Software:</b>	Special software is provided by the applicant to select and operate the EUT at each channel frequency continuously and mode of operation such as frequency hopping and direct sequence or digital modulation for testing purpose.
<b>Special Hardware Used:</b>	N/A
<b>Transmitter Test Antenna:</b>	The EUT is tested with the antenna fitted in a manner typical of normal intended use as integral antenna equipment.

<b>Transmitter Test Signals</b>	
<b>Frequency Band(s):</b>	2402 - 2480 MHz
<b>Frequency(ies) Tested:</b> (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	2402, 2441 & 2480 MHz.
<b>RF Power Output:</b>	0.002 W
<b>Normal Test Modulation:</b>	Bluetooth
<b>Modulating Signal Source:</b>	Internal

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049-1). Last Date of Site Calibration: June 20, 2005.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15. 207	AC Power Conducted Emissions	Yes (Note 1)
15.247(a)(1)&(2)	20dB & 6 dB Bandwidth	Yes
15.247(b)(1) & (3)	Peak Output Power	Yes
15.247(b)(5), 15.247(e)(i) & 1.1307(b)(1)	RF Exposure	Yes (Note 2)
15.247(d), 15.209 & 15.205	Spurious Radiated Emissions	Yes
15.247(e)&(f)	Power Spectral Density	Yes
15.247(f)	Average Time of Occupancy	Yes
15.109	Class B Radiated Emissions	Yes (Note 1)

**Notes:**

- (1) A separate engineering test report for compliance with FCC Part 15, Subpart B – Class B Unintentional Radiators will be provided upon request.
- (2) The SAR tests and RF Exposure requirements is exempted, the device operates at substantially low output power level (2 mW), with a low gain antenna (2 dBi).

### 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: TEK-529F15C247

February 27, 2006

## EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

### 5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in ANSI C63.4; KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247); FCC Public Notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

### 5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document LAB 34 with a confidence level of 95%. Please refer to Exhibit 6 for Measurement Uncertainties.

### 5.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1.

### 5.4. COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS

FCC Section	FCC Rules	
15.203	<p>Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.</p> <p>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</p> <ul style="list-style-type: none"><li>• The application (or intended use) of the EUT</li><li>• The installation requirements of the EUT</li><li>• The method by which the EUT will be marketed</li></ul>	The integral antenna is permanently mounted on the printed circuit board and located inside the enclosure
15.204	<p>Provided the information for every antenna proposed for use with the EUT:</p> <ul style="list-style-type: none"><li>(a) type (e.g. Yagi, patch, grid, dish, etc...),</li><li>(b) manufacturer and model number</li><li>(c) gain with reference to an isotropic radiator</li></ul>	<p>Manufacturer: Murata Type: Chip Part No.: LBMA2U2BL2-092 Frequency Range: 2.402 – 2.480 GHz Gain: 2.0 dBi</p>

## 5.5. 6 dB & 20 dB Bandwidth [§15.247(a)(1)&(2)]

### 5.5.1. Limit

- For Frequency Hopping System, minimum of 25 kHz.
- For a Digital Modulation System, the 6 dB bandwidth shall be at least 500 KHz.

### 5.5.2. Method of Measurements

Refer to FCC Public Notice DA 00-705, KDB Publication No. 558074 and ANSI C63.4 for measurement methods.

### 5.5.3. Test Arrangement

See Section 2.6 of this test report.

### 5.5.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz


### 5.5.5. Test Data

#### 5.5.5.1. For Frequency Hopping Spread Spectrum Mode


Frequency (MHz)	20 dB Bandwidth (MHz)
2402	0.942
2441	0.946
2480	0.946

See the following plots for detailed measurements.

Plot 5.5.5.1.1:  
20 dB Bandwidth  
Test Frequency: 2402 MHz

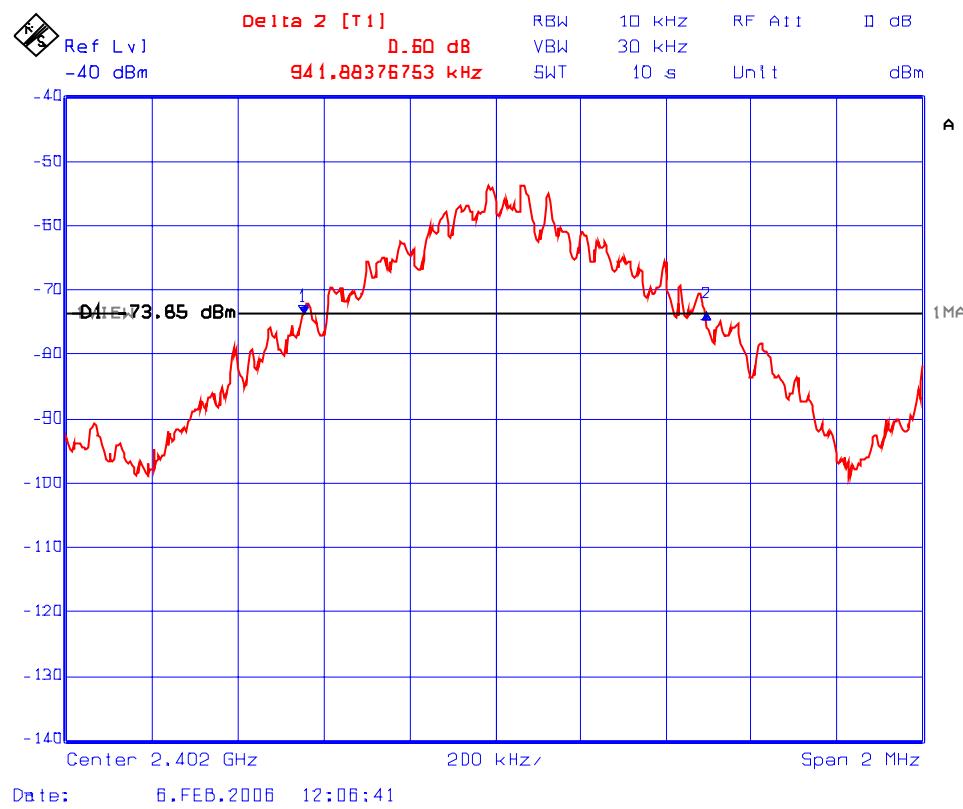

Plot 5.5.5.1.2:  
20 dB Bandwidth  
Test Frequency: 2441 MHz

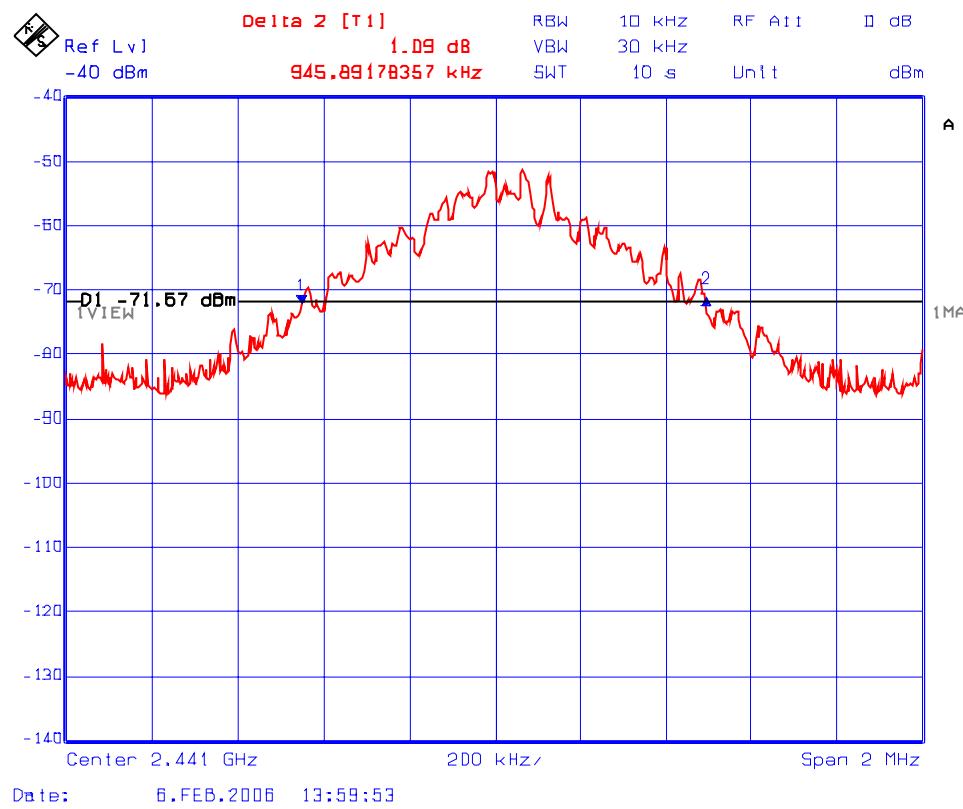

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: TEK-529F15C247  
February 27, 2006

Plot 5.5.5.1.3:  
20 dB Bandwidth  
Test Frequency: 2480 MHz




### 5.5.5.2. For DTS Mode


Frequency (MHz)	6 dB Bandwidth (MHz)
2402	0.515
2441	0.515
2480	0.509

See the following plots for detailed measurements.


Plot 5.5.5.2.1:  
 6 dB Bandwidth  
 Test Frequency: 2402 MHz

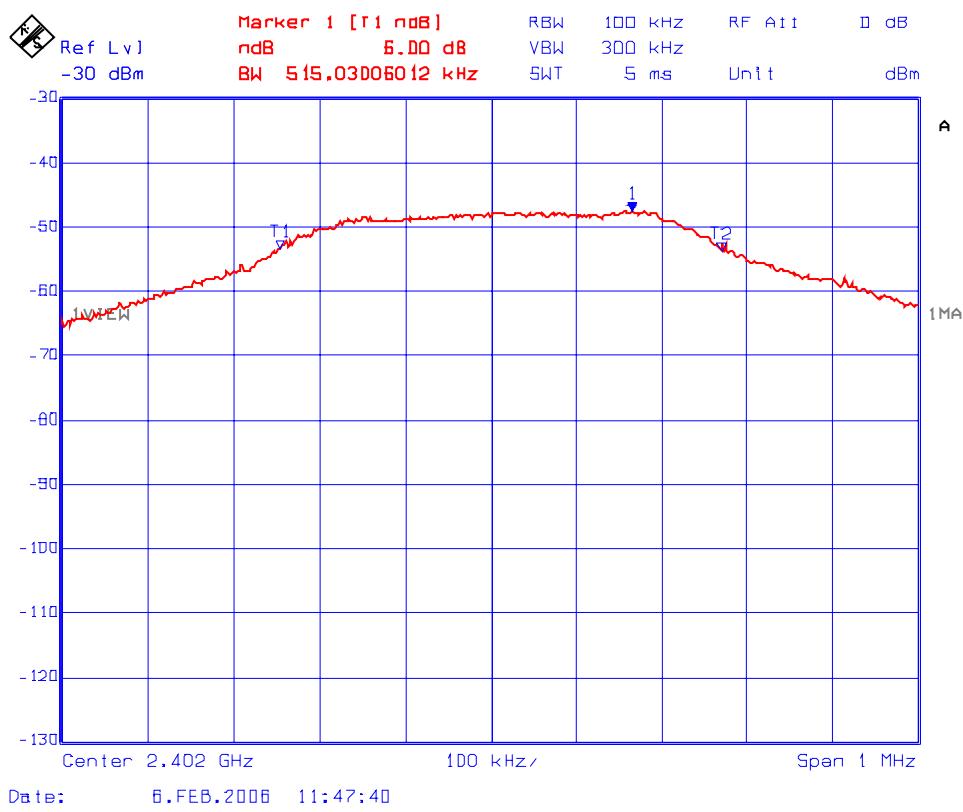

Plot 5.5.5.2.2:  
6 dB Bandwidth  
Test Frequency: 2441 MHz

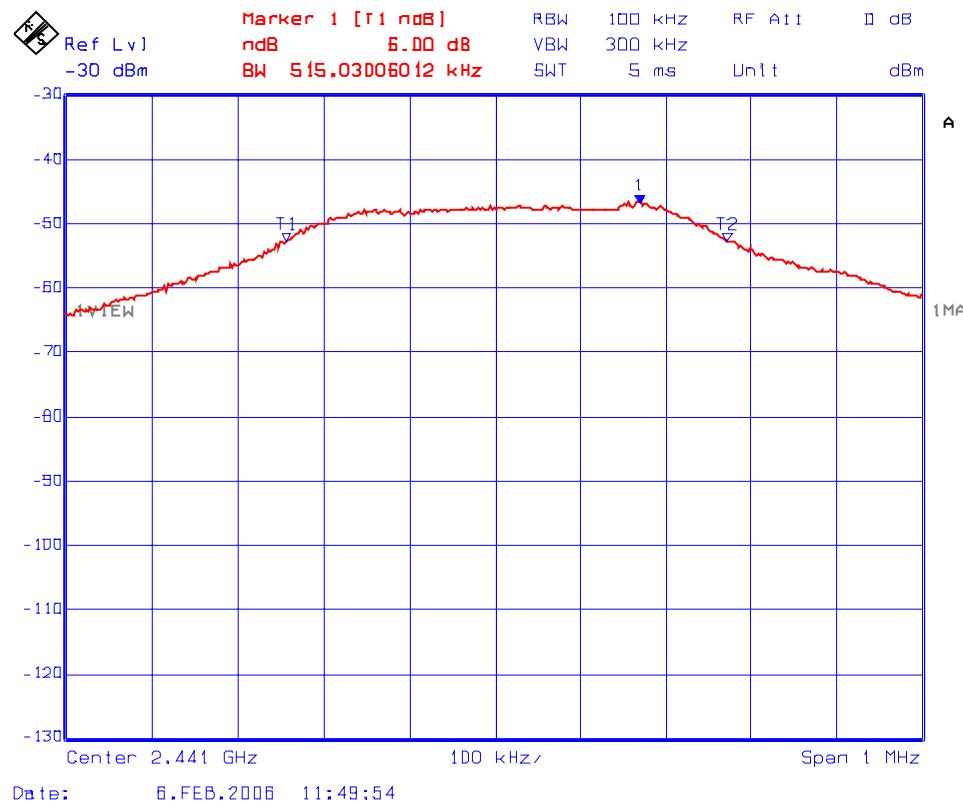

Plot 5.5.5.2.3:  
6 dB Bandwidth  
Test Frequency: 2480 MHz

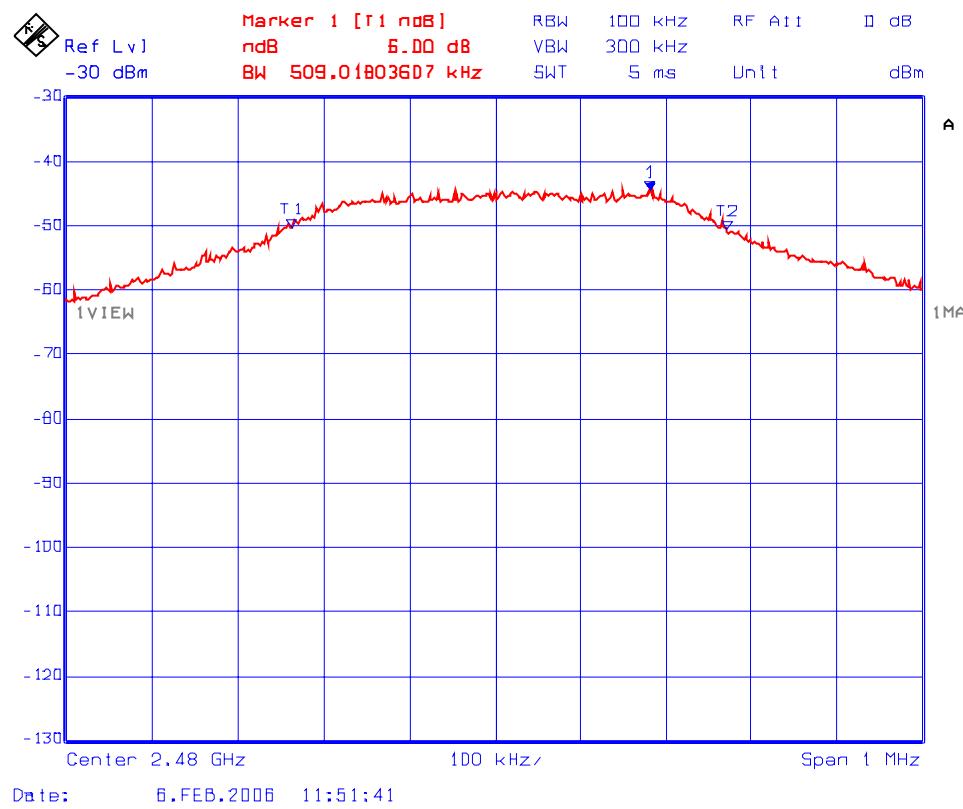

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: TEK-529F15C247  
February 27, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.6. PEAK OUTPUT POWER [§§ 15.247(b)(1)&(3)]

### 5.6.1. Limit

- **FCC 15.247(b)(1):** Maximum peak output power of the transmitter shall not exceed 1 Watt.
- **FCC 15.247(b)(4(i):** If the device is not for fixed point to point radio, the antenna of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.6.2. Method of Measurements

Refer to FCC Public Notice DA 00-705, KDB Publication No. 558074 and ANSI C63.4 for measurement methods.

### 5.6.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

### 5.6.4. Test Data

Frequency (MHz)	E-Field in 1 MHz @ 3m (dBuV/m)	Antenna Polarization (V/H)	*Calculated Peak Power (Watt)
2402	96.17	V	0.0008
2402	97.59		0.0011
2441	96.23	V	0.0008
2441	98.54		0.0014
2480	96.27	V	0.0008
2480	99.29		0.0016

\*Peak power is calculated using the following equation:

$$P = (E \times D)^2 / (30 \times G)$$

Where: E = the measured maximum field strength in V/m

G = the numeric gain of the transmitting antenna over an isotropic radiator.

D = the distance in meters from which the field strength was measured.

P = the power in watts

## 5.7. SPURIOUS RADIATED EMISSIONS @ 3 METERS [§ 15.247(d)]

### 5.7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

47 CFR 15.205(a) - Restricted Bands of Operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

47 CFR 15.209(a) - Radiated emission limits, general requirements

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: TEK-529F15C247  
 February 27, 2006

### 5.7.2. Method of Measurements

Refer to Ultratech Test Procedures, Files # ULTR P002-2004 or ULTR P003-2004 and ANSI C63.4 for measurement methods

### 5.7.3. Test Arrangement

Refer to Section 2.6 of this test report for test setup.


### 5.7.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3160-09	..	18 GHz – 26.5 GHz
Horn Antenna	EMCO	3160-10	..	26.5 GHz – 40 GHz
Mixer	Tektronix	118-0098-00	..	18 GHz – 26.5 GHz
Mixer	Tektronix	119-0098-00	..	26.5 GHz – 40 GHz


### 5.7.5. Test Data

#### 5.7.5.1. Band-edge Radiated Emissions


Plot 5.7.5.1.1  
Band-Edge Radiated Emissions @ 3 meters, Vertical Polarization  
Low End of Frequency Band

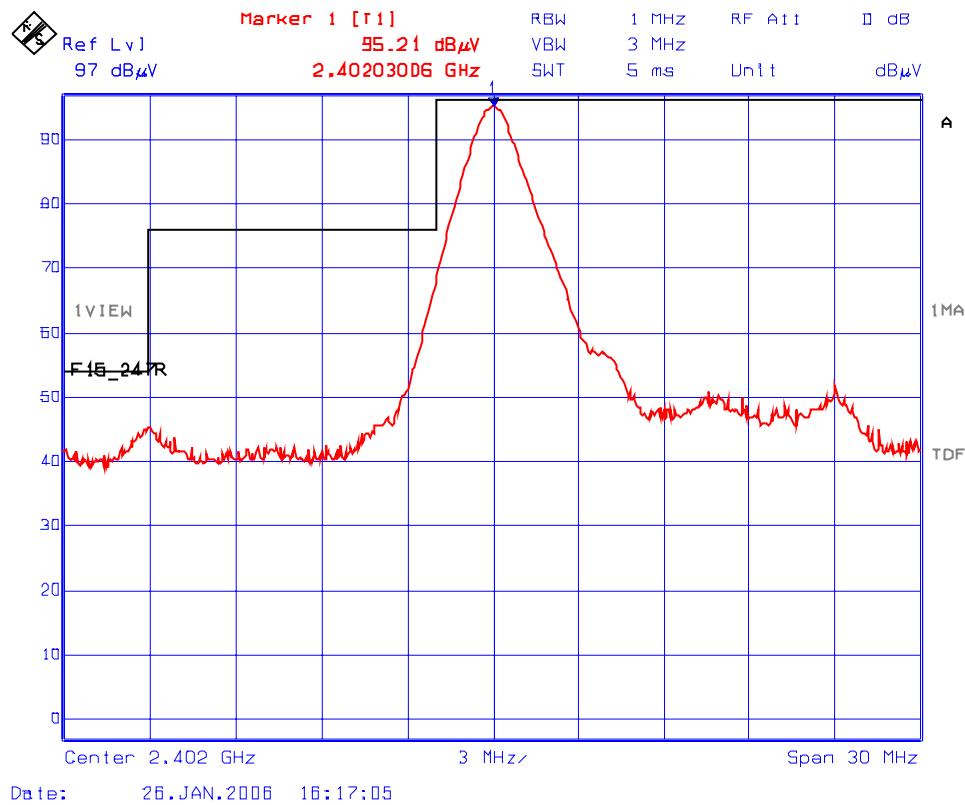


Plot 5.7.5.1.2  
Band-Edge Radiated Emissions @ 3 meters, Horizontal Polarization  
Low End of Frequency Band

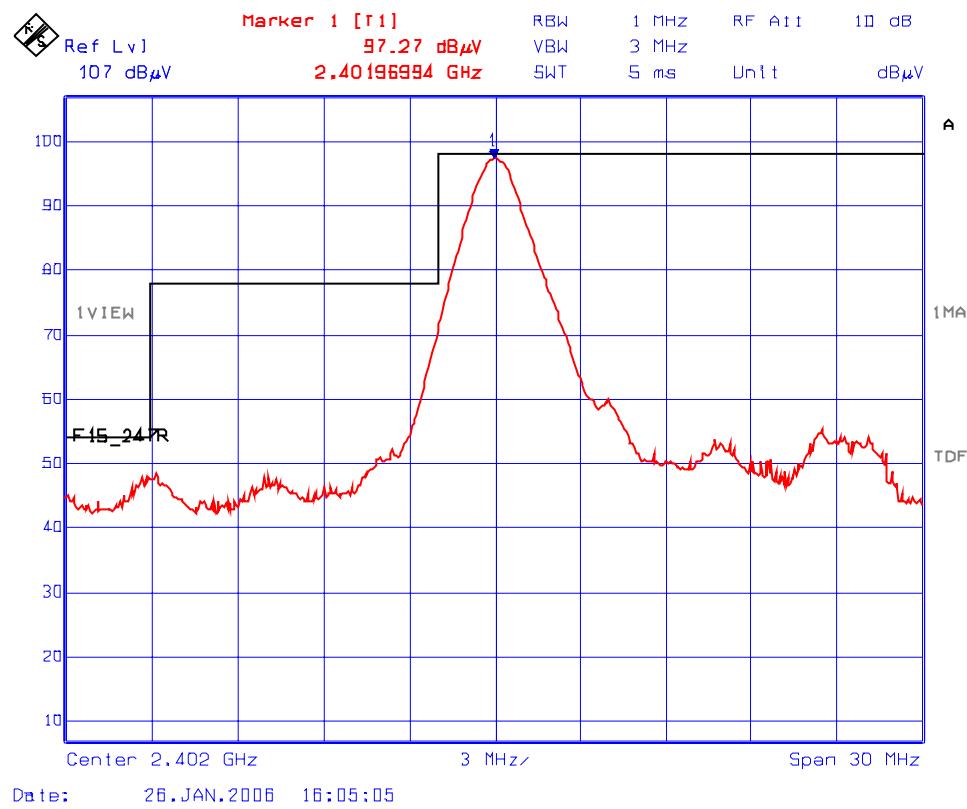


Plot 5.7.5.1.3  
Band-Edge Radiated Emissions @ 3 meters, Vertical Polarization  
Low End of Frequency Band - Frequency Hopping Enabled

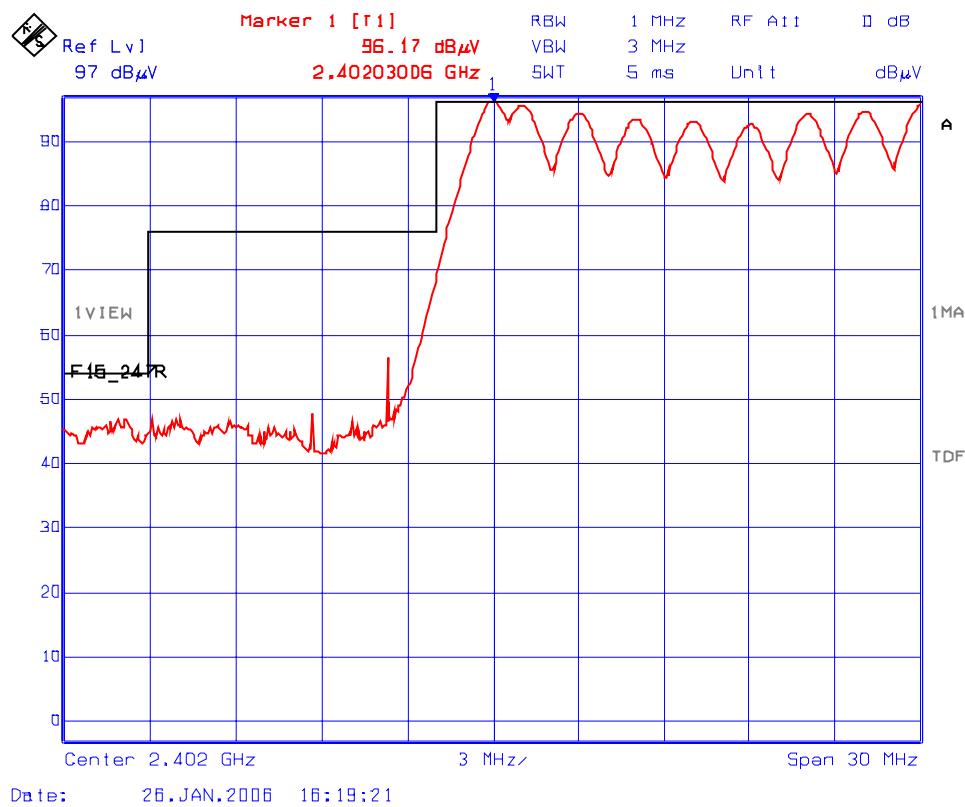


Plot 5.7.5.1.4  
Band-Edge Radiated Emissions @ 3 meters, Horizontal Polarization  
Low End of Frequency Band - Frequency Hopping Enabled

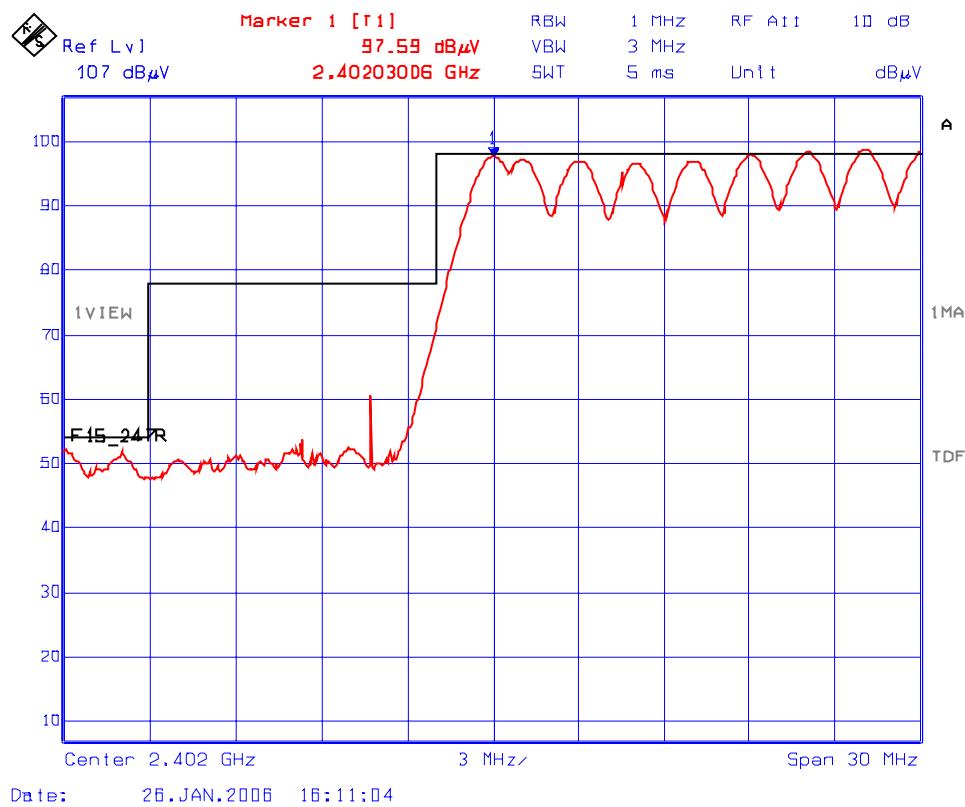

Plot 5.7.5.1.5  
Band-Edge Radiated Emissions @ 3 meters, Vertical Polarization, Upper End of Frequency Band)

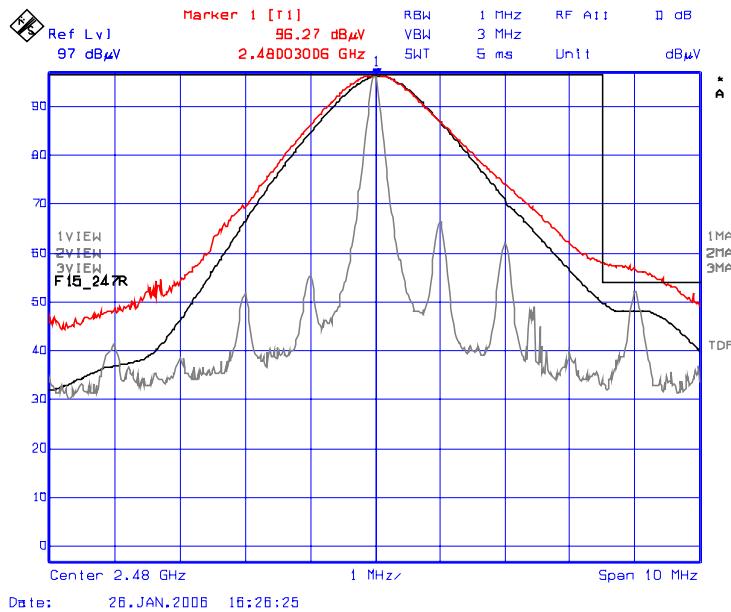


Plot 5.7.5.1.6  
Band-Edge Radiated Emissions @ 3 meters, Vertical Polarization, Upper End of Frequency Band

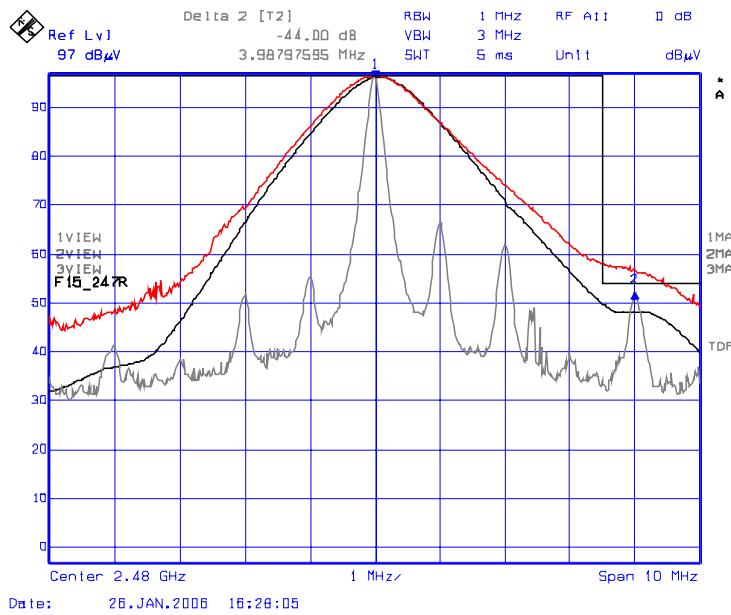


Trace 1 : RBW = 1 MHz, VBW = 3 MHz  
 Trace 2 : RBW = 100 kHz, VBW = 300 kHz, Delta (Peak to Band-Edge): 44.00dB  
 Trace 3 : RBW = 1 MHz, VBW = 10 Hz  
 Band-Edge Level at 2484 MHz: 96.27 dB $\mu$ V/m – 44.00 dB = 52.27 dB $\mu$ V/m

Plot 5.7.5.1.7  
Band-Edge Radiated Emissions @ 3 meters, Horizontal Polarization, Upper End of Frequency Band

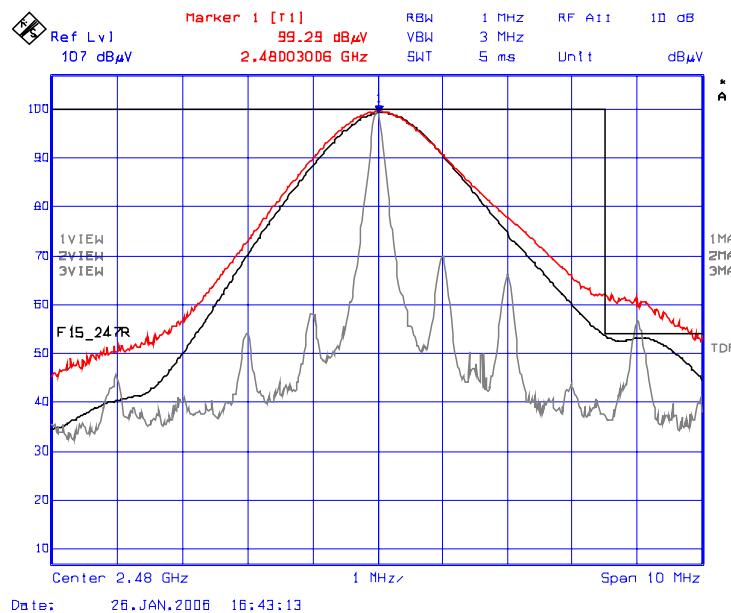


Plot 5.7.5.1.8  
Band-Edge Radiated Emissions @ 3 meters, Horizontal Polarization, Upper End of Frequency Band (2480 MHz)

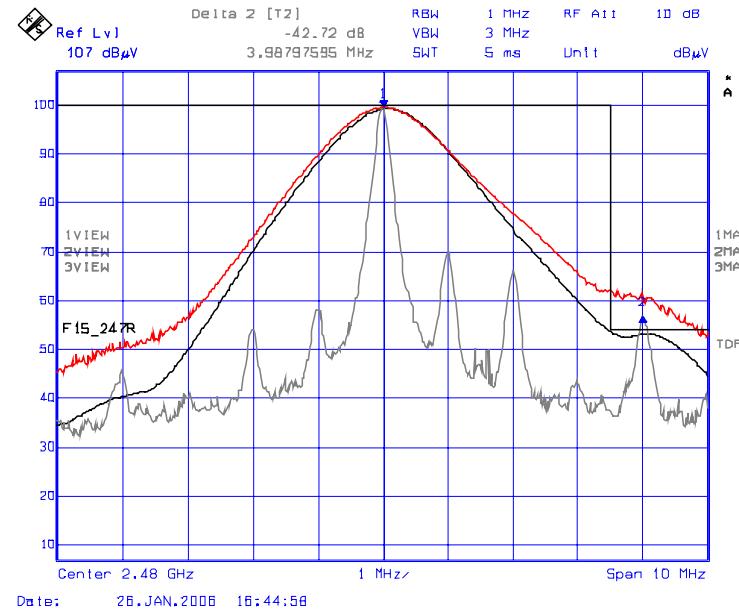


Trace 1 : RBW = 1 MHz, VBW = 3 MHz  
 Trace 2 : RBW = 100 kHz, VBW = 300 kHz, Delta (Peak to Band-Edge): 42.72dB  
 Trace 3 : RBW = 1 MHz, VBW = 10 Hz  
 Band-Edge Level at 2484 MHz: 99.29 dB $\mu$ V/m – 42.72 dB = 56.57 dB $\mu$ V/m

Plot 5.7.5.1.9  
 Band-Edge Radiated Emissions @ 3 meters, Vertical Polarization  
 Upper End of Frequency Band, Frequency Hopping Enabled

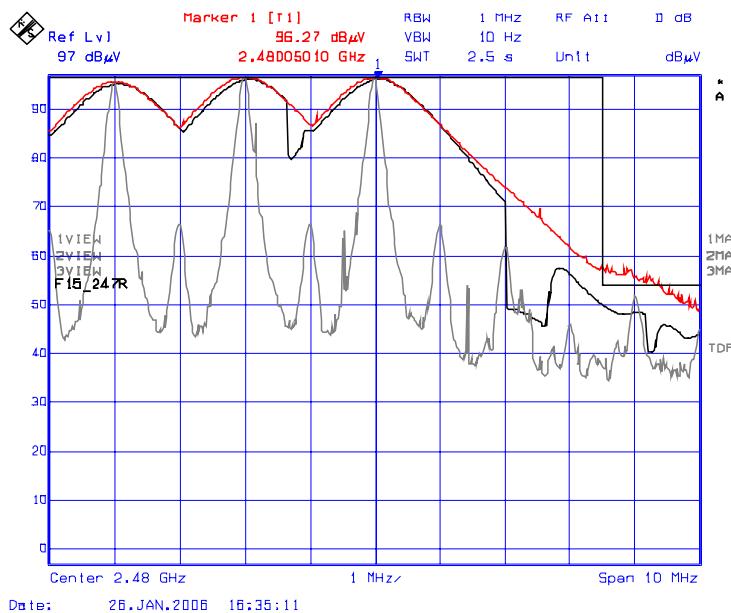


Plot 5.7.5.1.10  
 Band-Edge Radiated Emissions @ 3 meters, Vertical Polarization  
 Upper End of Frequency Band (2480 MHz), Frequency Hopping Enabled

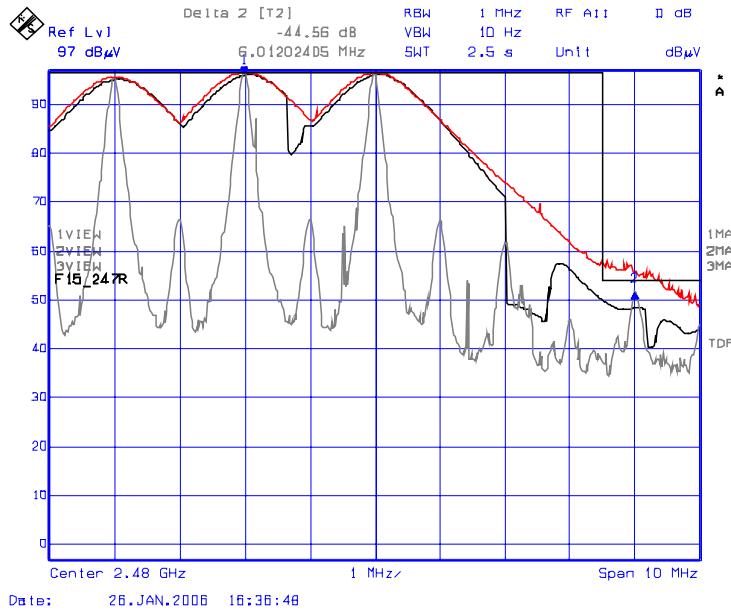


Trace 1: RBW = 1 MHz, VBW = 3 MHz  
 Trace 2: RBW = 100 kHz, VBW = 300 kHz, Delta (Peak to Band-Edge): 44.56 dB  
 Trace 3: RBW = 1 MHz, VBW = 10 Hz  
 Band-Edge Level at 2484 MHz: 96.27 dB $\mu$ V/m – 44.56 dB = 51.71 dB $\mu$ V/m

Plot 5.7.5.1.11  
 Band-Edge Radiated Emissions @ 3 meters, Horizontal Polarization  
 Upper End of Frequency Band, Frequency Hopping Enabled

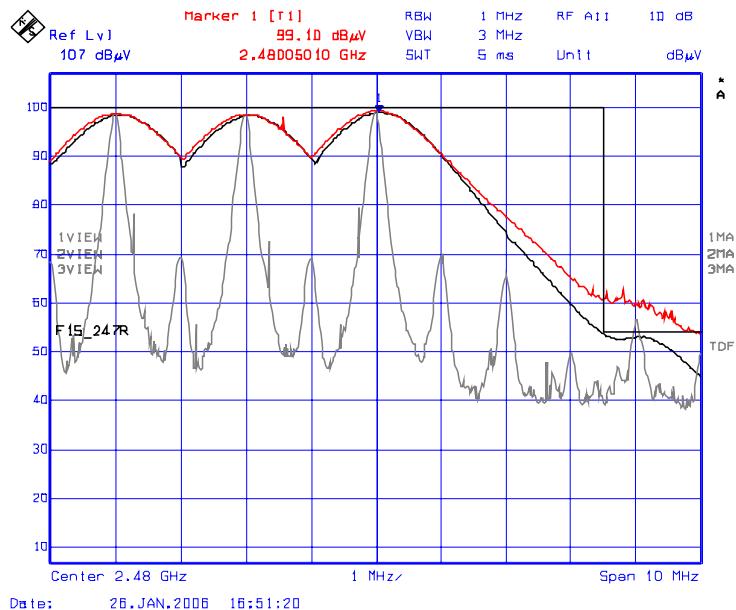

Plot 5.7.5.1.12  
 Band-Edge Radiated Emissions @ 3 meters, Horizontal Polarization  
 Upper End of Frequency Band (2480 MHz), Frequency Hopping Enabled

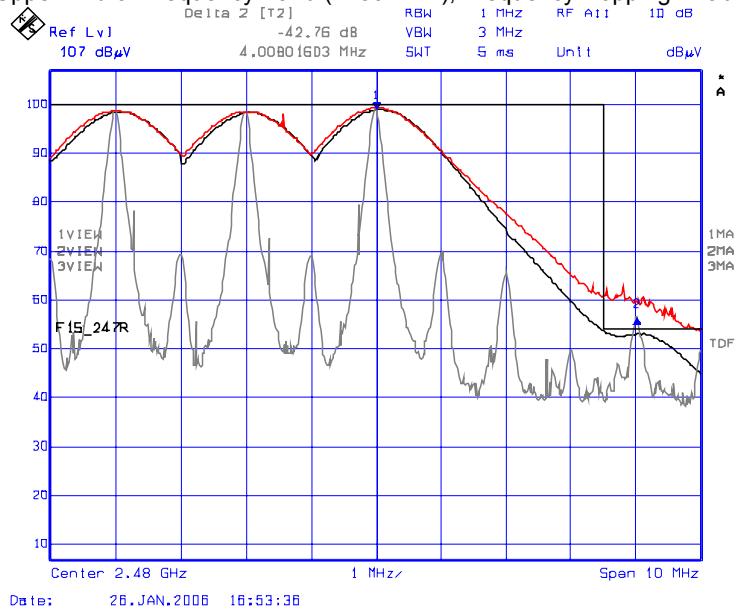

Trace 1: RBW = 1 MHz, VBW = 3 MHz  
 Trace 2: RBW = 100 kHz, VBW = 300 kHz, Delta (Peak to Band-Edge): 42.76 dB  
 Trace 3: RBW = 1 MHz, VBW = 10 Hz  
 Band-Edge Level at 2484 MHz: 99.10 dB $\mu$ V/m – 42.76 dB = 56.34 dB $\mu$ V/m

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: TEK-529F15C247  
 February 27, 2006

### 5.7.5.2. Transmitter Radiated Spurious Emissions

The emissions were scanned from 30 MHz to 25 GHz; all signals within 20 dB below the permissible limit were recorded in the table below.

Frequency (MHz)	RF Peak Level (dB $\mu$ V/m)	RF Avg Level (dB $\mu$ V/m)	Antenna Plane (H/V)	Limit 15.209 (dB $\mu$ V/m)	Limit 15.247 (dB $\mu$ V/m)	Margin (dB)	Pass/Fail
<b>Fundamental Frequency: 2402 MHz</b>							
2402	96.17	-	V	-	-	-	-
2402	97.59	-	H	-	-	-	-
4804	47.18	35.10	V	54.0	77.6	-18.9	Pass*
4804	47.19	34.96	H	54.0	77.6	-19.0	Pass*
<b>Fundamental Frequency: 2441 MHz</b>							
2441	96.23	-	V	-	-	-	-
2441	98.54	-	H	-	-	-	-
4882	47.07	35.76	V	54.0	78.5	-18.2	Pass*
4882	46.87	34.74	H	54.0	78.5	-19.3	Pass*
<b>Fundamental Frequency: 2480 MHz</b>							
2480	96.27	-	V	-	-	-	-
2480	99.29	-	H	-	-	-	-
4960	48.04	38.59	V	54.0	79.3	-15.4	Pass*
4960	49.35	41.49	H	54.0	79.3	-12.5	Pass*

\* Emission in restricted bands.

## 5.8. POWER SPECTRAL DENSITY [§ 15.247(e) & (f)]

### 5.8.1. Limit

For a digitally modulated system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz bandwidth within this band during any time interval of continuous transmission.

### 5.8.2. Method of Measurements

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247), using Alternative Test Procedures.

### 5.8.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

### 5.8.4. Test Data

Frequency (MHz)	Peak E-Field in 3 kHz BW @ 3m (dB $\mu$ V/m)	Tx Ant. Gain (dBi)	*Calculated SPD (dBm)	Limit dBm)	Margin (dBm)
2402	86.80	2.0	-10.4	+8	-18.4
2441	83.07	2.0	-14.2	+8	-22.2
2480	84.76	2.0	-12.5	+8	-20.5

\*SPD is calculated using the following equation:

$$P = (E \times D) \text{ squared} / (30 \times G)$$

Where: E = the measured maximum field strength in V/m  
 G = the numeric gain of the transmitting antenna over an isotropic radiator.  
 D = the distance in meters from which the field strength was measured.  
 P = the power in watts

## 5.9. AVERAGE TIME OF OCCUPANCY [§ 15.247(f)]

### 5.9.1. Limit

The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off shall have an average time of occupancy on any frequency not to exceed 0.4 seconds with in a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

### 5.9.2. Method of Measurements

Refer to FCC DA-00-705 and ANSI C63.4 for measurement methods.


### 5.9.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

#### 5.9.4. Test Data

See the following plots for measurement details.

Plot 5.9.4.1:  
Number of Hopping Frequencies  
79 channels

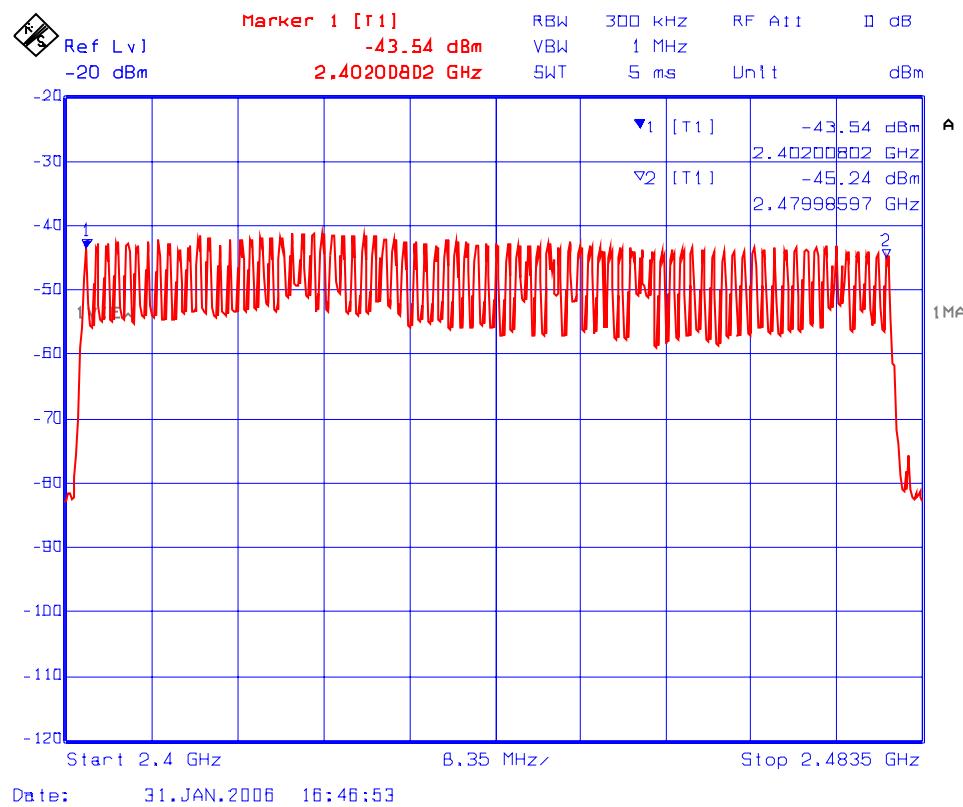


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: TEK-529F15C247  
February 27, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.9.4.2:  
Time of Occupancy  
Test Frequency: 2402 MHz

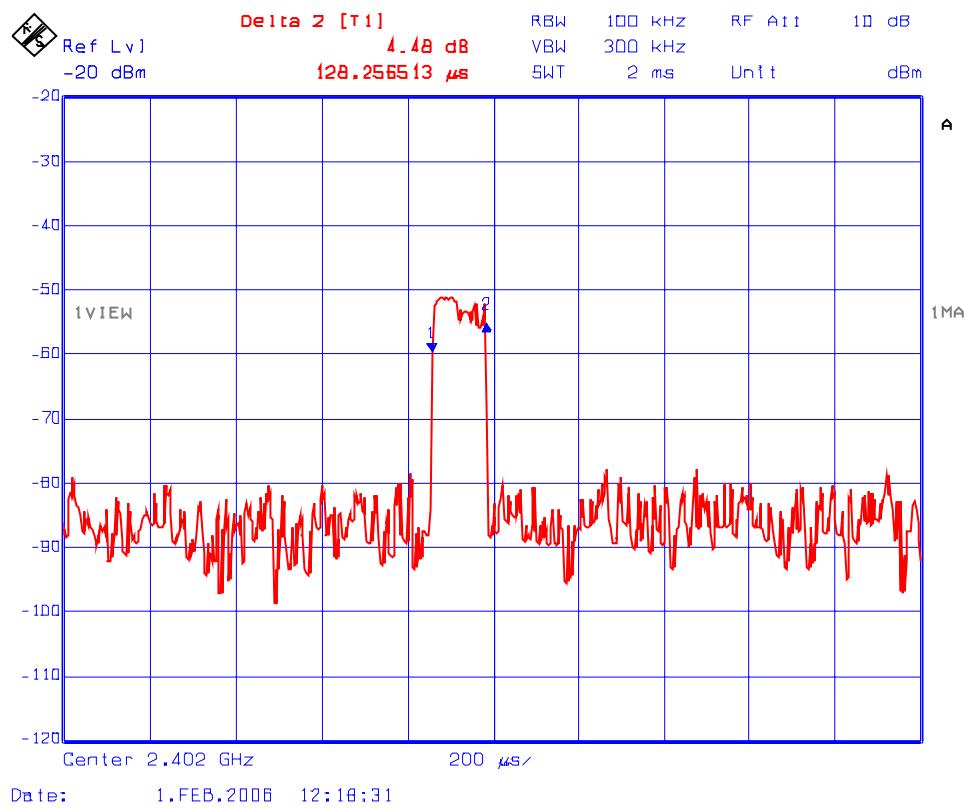


Plot 5.9.4.3:  
Time of Occupancy  
Test Frequency: 2402 MHz

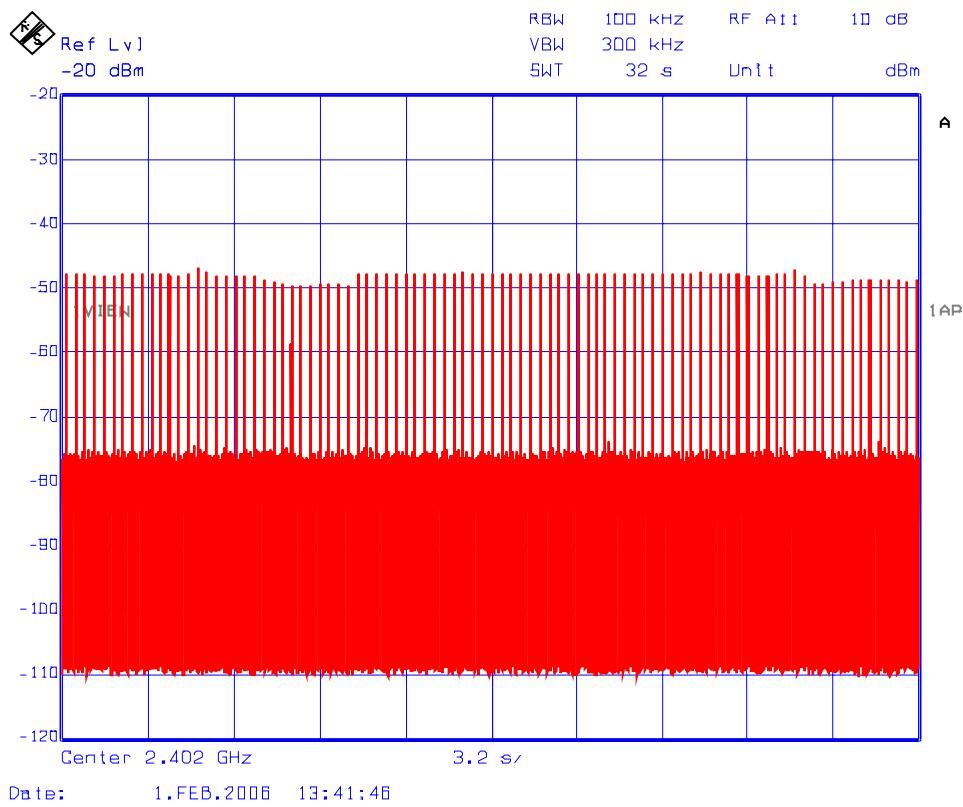


$$\begin{aligned}\text{Average time of occupancy in 31.6 s} &= (\text{Dwell Time @ 2402 MHz}) \times (\text{number of hops in 31.6 s}) \\ &= 128.256513 \mu\text{s} \times 90 \\ &= 11.54 \text{ ms}\end{aligned}$$

Plot 5.9.4.4:  
Time of Occupancy  
Test Frequency: 2441 MHz

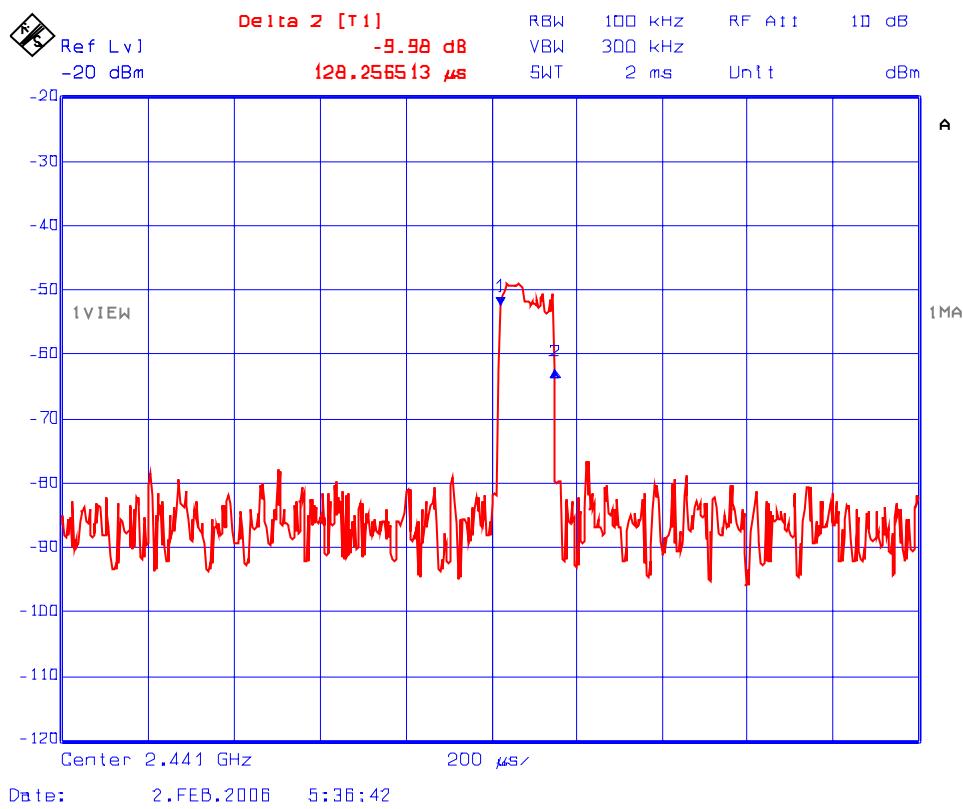


Dwell Time @ 2441 MHz = 128.256513  $\mu$ s

Plot 5.9.4.5:  
Time of Occupancy  
Test Frequency: 2441 MHz

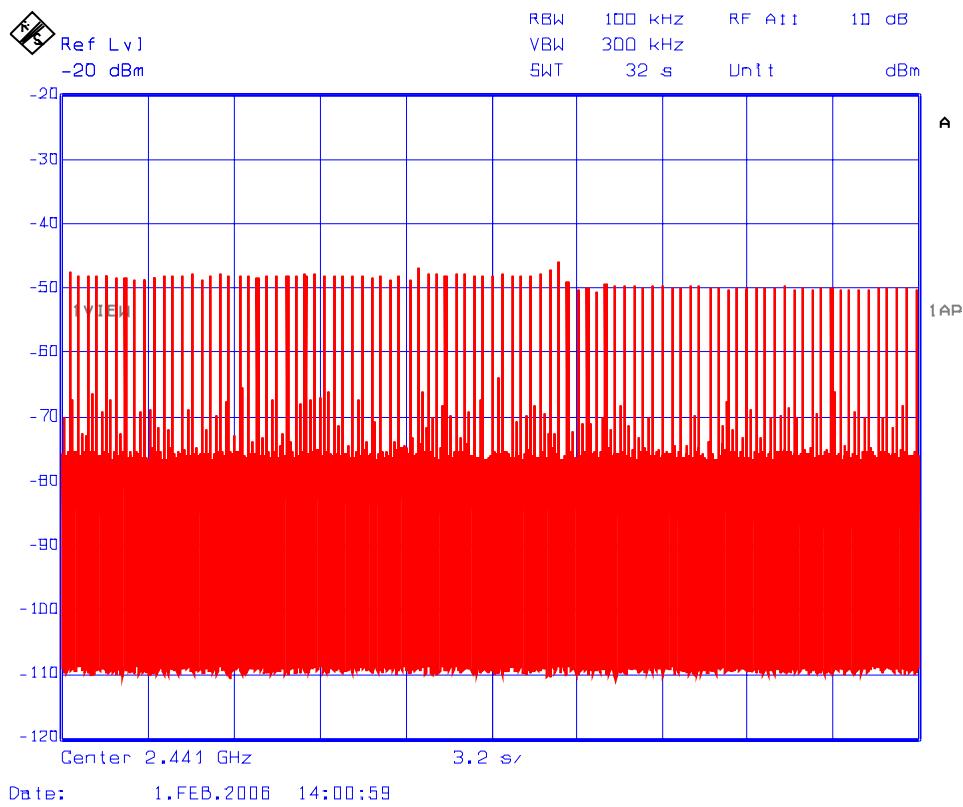


$$\begin{aligned}\text{Average time of occupancy in 31.6 s} &= (\text{Dwell Time @ 2441 MHz}) \times (\text{number of hops in 31.6 s}) \\ &= 128.256513 \mu\text{s} \times 90 \\ &= 11.54 \text{ ms}\end{aligned}$$

Plot 5.9.4.6:  
Time of Occupancy  
Test Frequency: 2480 MHz

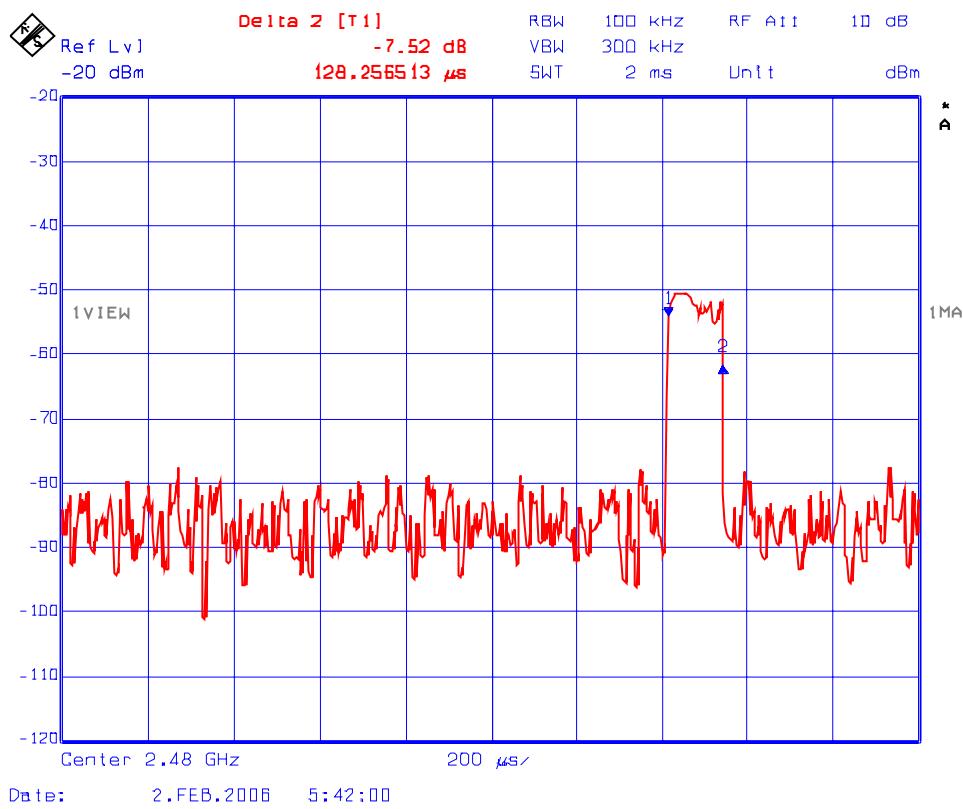

Dwell Time @ 2480 MHz = 128.256513  $\mu$ s

Plot 5.9.4.7:  
Time of Occupancy  
Test Frequency: 2480 MHz

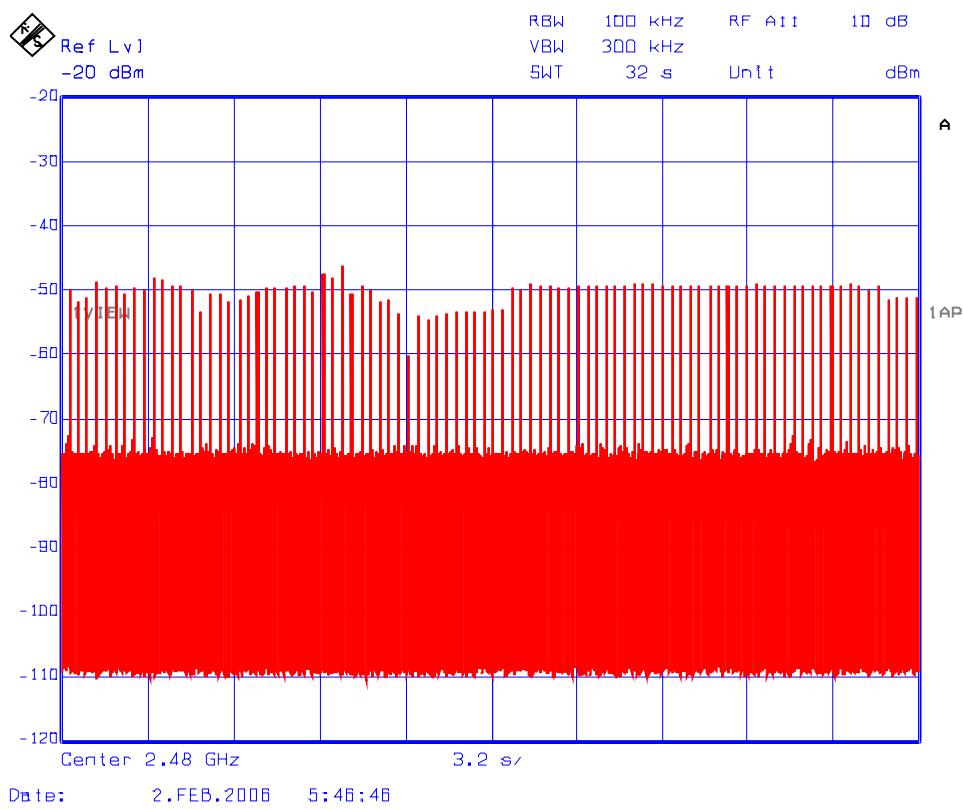

$$\begin{aligned}\text{Average time of occupancy in 31.6 s} &= (\text{Dwell Time @ 2480 MHz}) \times (\text{number of hops in 31.6 s}) \\ &= 128.256513 \mu\text{s} \times 90 \\ &= 11.54 \text{ ms}\end{aligned}$$

## EXHIBIT 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

### 6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
LISN coupling specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Cable and Input Transient Limiter calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$	U-Shaped	$\pm 0.2$	$\pm 0.3$
System repeatability	Std. deviation	$\pm 0.2$	$\pm 0.05$
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	$\pm 1.25$	$\pm 1.30$
Expanded uncertainty U	Normal (k=2)	$\pm 2.50$	$\pm 2.60$

Sample Calculation for Measurement Accuracy in 450 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

## 6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY ( $\pm$ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	$\pm 1.0$	$\pm 1.0$
Cable Loss Calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Antenna Directivity	Rectangular	$\pm 0.5$	$\pm 0.5$
Antenna factor variation with height	Rectangular	$\pm 2.0$	$\pm 0.5$
Antenna phase center variation	Rectangular	0.0	$\pm 0.2$
Antenna factor frequency interpolation	Rectangular	$\pm 0.25$	$\pm 0.25$
Measurement distance variation	Rectangular	$\pm 0.6$	$\pm 0.4$
Site imperfections	Rectangular	$\pm 2.0$	$\pm 2.0$
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi)$ 0.3 (Lp) Uncertainty limits $20\log(1+\Gamma_1\Gamma_R)$	U-Shaped	$\pm 1.1$ -1.25	$\pm 0.5$
System repeatability	Std. Deviation	$\pm 0.5$	$\pm 0.5$
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k = 2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$