


Plot 1: Back 2437MHz

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	3/15/2010 3:51:18 PM	DUT Battery Model/No:	
Filename:	2437_Back.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.5°C	Liquid Simulant:	2450
Device Under Test:	Psion 7545	Relative Permittivity:	47.95
Relative Humidity:	37.3%	Conductivity:	1.913
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.5°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-24.00 mm
DUT Position:	Back	Max SAR Y-axis Location:	-10.00 mm
Antenna Configuration:	Integral	Max E Field:	5.96 V/m
Test Frequency:	2437MHz	SAR 1g:	0.091 W/kg
Air Factors:	936.77 / 700.45 / 673.31	SAR 10g:	0.049 W/kg
Conversion Factors:	0.38 / 0.37 / 0.39	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.93 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/11/10
Input Power Level:	Set by software (15 dBm)	Extrapolation:	poly4

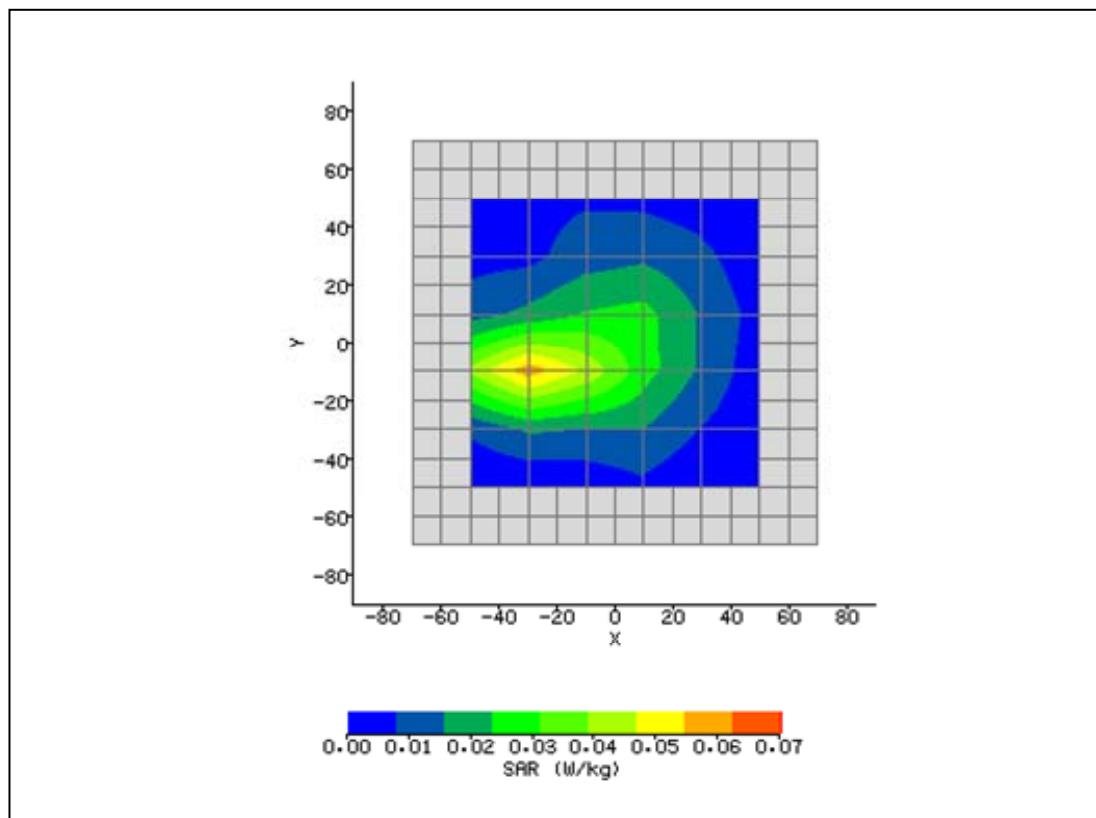

Plot 2: 2450 Validation

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	3/15/2010 1:31:14 PM	DUT Battery Model/No:	
Filename:	2437_Back.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.5°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	47.74
Relative Humidity:	37.3%	Conductivity:	1.92
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.5°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.80 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-7.20 mm
Antenna Configuration:	Dipole	Max E Field:	137.35 V/m
Test Frequency:	2450MHz	SAR 1g:	46.845 W/kg
Air Factors:	936.77 / 700.45 / 673.31	SAR 10g:	22.174 W/kg
Conversion Factors:	0.38 / 0.37 / 0.39	SAR Start:	3.949 W/kg
Type of Modulation:		SAR End:	4.130 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/11/10
Input Power Level:	1W	Extrapolation:	poly4

