



Metricom, Inc.
980 University Avenue
Los Gatos, CA, 93030
(Tel) 408-399-8200
(Fax) 408-354-1024

Amendment

Part 15 Certification Application for FCC ID#GNW-24000

Industrie Canada RSS210 Certification Application

**EMI Test Report
and
Technical Documentation
on
Metricom, Inc.
Ricochet II Network Radio
Model 24000**

Prepared by:
Metricom, Inc.
980 University Ave
Los Gatos, CA. 95030
408-399-8200

Tested: April, May, June 1999

Schematics, block diagrams and algorithm descriptions subject to enclosed confidentiality statement



David Waitt
Metricom, Inc.
980 University Avenue
Los Gatos, CA, 93030
(Tel) 408-399-8126
(Email) david@metricom.com

To whom it may concern,

This document is to serve as an amendment to the original certification application filed in January 1999 for Metricom MCDN Network radio GNW-24000.

The reason for re-testing the radios after the original application was submitted is that there were several modifications made to the radios in terms of hardware and software.

The broad changes that prompted re-testing are outlined below.

- Modifications to the 900 MHz and 2.4 GHz RF boards to improve performance in the MCDN network
- Modifications to the digital card to incorporate the Ethernet "Stuffing Option" (See Below)
- Modifications to the software to incorporate "band-splitting". A detailed explanation of "Band-Splitting" is included in this addendum

The following tests were performed to verify that the MCDN Microcell radio is in compliance with 15.247

- Transmit Power
- 20 dB Occupied Bandwidth
- Channel occupancy time
- Radiated emissions in restricted bands
- Class B radiated emissions

The above tests make up an entire suite of tests that is usually conducted on a new product.

There was an additional type of radio tested that was not available for testing during the original testing several months ago. This is a new version of the MCDN radio that has an external Ethernet port. This is referred to as the Ethernet Radio. The Ethernet radio is identical to the MCDN network radio with a few exceptions.

- 2.4 GHz omni or high gain patch antenna rather than the 2.4 GHz patch antennas used on the MCDN Network radio
- The Ethernet radio is DC powered
- There is an external Ethernet port on the radio.

The internal circuit boards in the two units (the Ethernet Radio and the MCDN Network Radio) are the same layout. There are simply additional components installed on the digital card of the Ethernet radio. The Ethernet components are simply a "stuffing option" on the digital card.

Metricom would like to certify both of these versions of the radio under the same GNW number if possible.

If there are any questions or concerns with the data in this addendum, please do not hesitate to contact me at the address, phone number or email (preferred) above.

Sincerely

A handwritten signature in black ink, appearing to read "David Waitt", written in a cursive style.

David Waitt




David Waitt
Metricom, Inc.
980 University Avenue
Los Gatos, CA, 93030
(Tel) 408-399-8126
(Email) david@metricom.com

“Band-Splitting” in Metricom’s MCDN Network


In the previous MCDN Network that utilized only the Part 15 900 MHz band there were 161 channels that were evenly spaced across the 902 – 928 MHz band. All of these channels were used by the modems (being used by the users of the network) and the MCDN Network radios that would relay the data to a “Wired Access Point” in the MCDN Network.

Thus the same channels were used for the traffic from the radio to the modem (Downlink) and the modem to the nearest radio (Uplink) as well as the traffic from radio to radio across the network.

It was found that in many cases, a transmission occurring from radio ‘R1’ to radio ‘R2’ on a given channel may interfere with data transmission between radio ‘R3’ and modem ‘M1’ on that same channel if all the units were in close proximity to each other. This “Self Interference” would cause the data packet to be re-sent thus creating unnecessary data transmissions and having the effect of slowing the data throughput of the user.

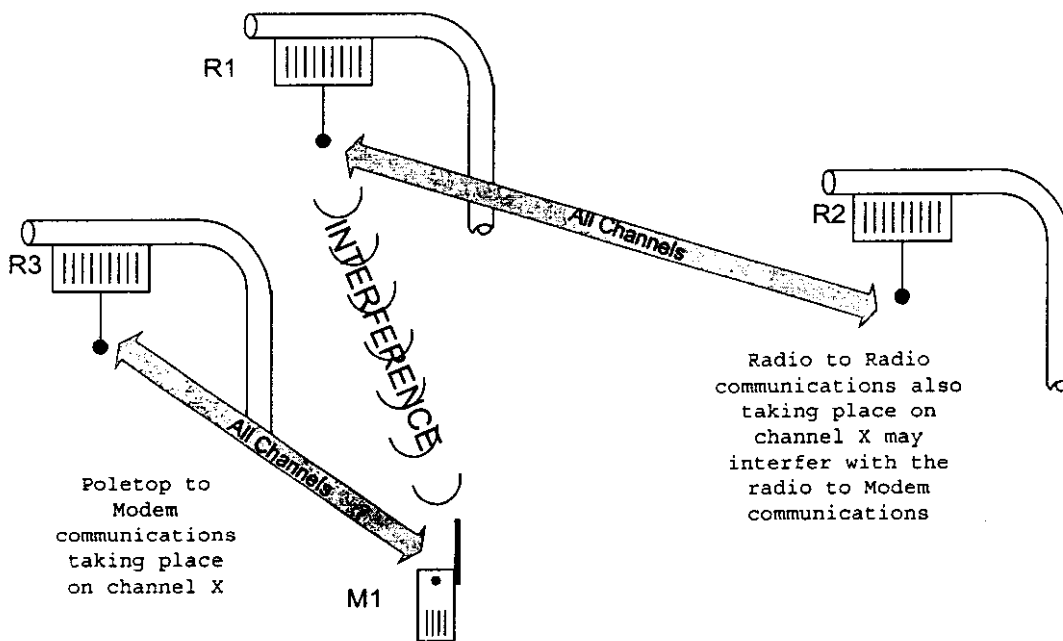

Metricom made the decision to assign certain channels to be used in the uplink and others to be used in the downlink. There are a total of 50 channels assigned to the uplink and 56 channels assigned to the downlink. This would reduce the chance of the interference to the uplink from the modem to the radio which is the least robust link in the system. These uplink and downlink channels are referred to as 'A' and 'B' channels in the diagram below.

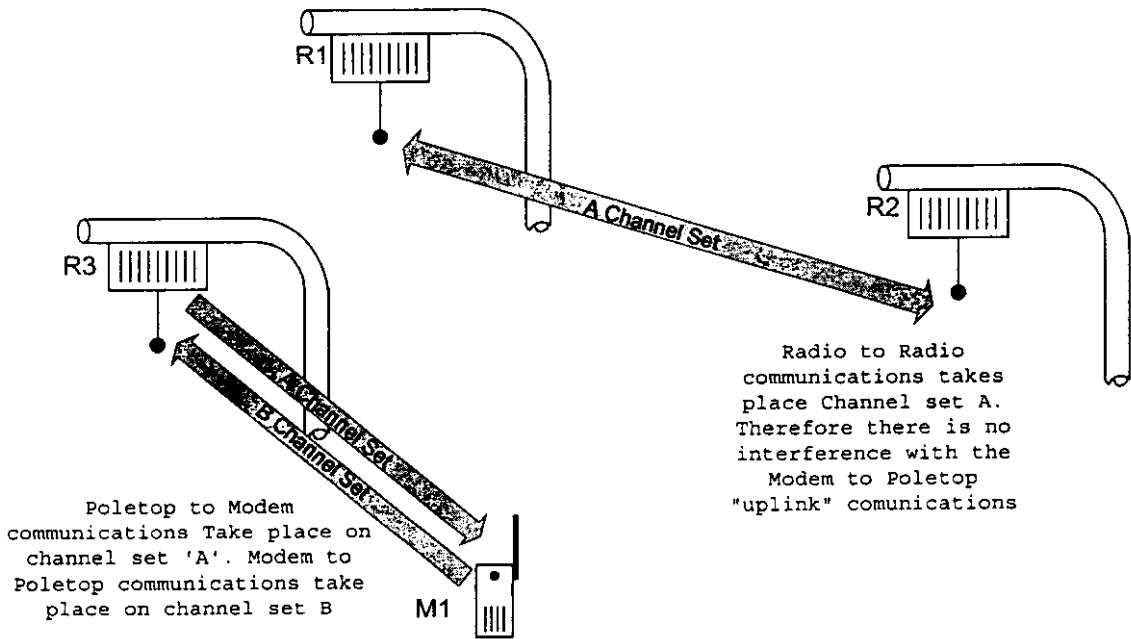

1.0 Verification of Compliance

Description: Metricom MCDN Network Radio
Metricom Ethernet Radio

Model Number: 24000

Serial Number(s): Pre-production Models

Applicant: Metricom Inc.

Type of Test: FCC part 15.247 Application for Part 15 certification
Industrie Canada RSS-210 certification

Date(s) of test: April – Juine 1999

Tested By David Waitt (Metricom, Los Gatos)
Shawn McGuinness, Electronic Compliance Laboratories. (EC Labs)

The above equipment was tested by Metricom Inc. and EC Labs and found to be in compliance with the requirements set forth in Part 15 of the FCC Rules and Regulations and Industrie Canada RSS210 6.2.2.(O) governing licence-exempt low power radio communication devices.



David Waitt
Engineer
Metricom, Inc.

7-7-99

Date

2.0 General Information

Applicant: Metricom, Inc.
980 University Ave.
Los Gatos, CA. 95030

Contact Person: David Waitt
david@metricom.com
(Tel) 408-399-8126
(Fax) 408-354-1024

Equipment Under Test: Metricom Ricochet II Network Radio

Model Number: 24000

Serial Number(s): LG-84010007 and LG-84010019

Type of Test: FCC part 15 Certification for FCC ID GNW-24000
Industrie Canada RSS-210 Certification application

Reason for **ADDITIONAL**
testing:

After the submission of the original certification application, there were several changes made to the radio in both hardware and software. Due to the scope of these changes, the radio was re-tested to ensure that it still complied with 15.247 of the FCC rules.

The note from the original application is included below

Metricom has developed the second generation of its Microcellular Data Network (MCDN). In a broad sense this new network operates in a similar fashion to the current Metricom MCDN, (which is used to provide the Ricochet Wireless data service in the metropolitan areas of San Francisco, San Jose, Seattle and Washington D.C.) The most notable difference between the previous MCDN and the new MCDN is the speed of the network.

Brief description of Metricom's MCDN Network

The MCDN Network is a wide-area wireless data network using frequency-hopping spread-spectrum, packet data technology and Metricom's patented mesh architecture. The new network operates within the Part 15 (902-928 MHz and 2.4-2.4835 GHz) portions of the spectrum.

The Ricochet network consists of shoebox-sized radio transceivers, also called **microcells**, which are typically mounted to streetlights or utility poles and are self-contained units (no connection other than prime power is required). They are strategically placed every quarter to half mile in a checkerboard pattern over a geographic area. Each microcell employs hundreds of hopping channels in the 900 MHz and 2.4 GHz band. (A detailed discussion of the hopping sequences is contained in Appendix C).

Within a "cluster" of microcells covering every 20 square miles, Metricom installs **Wired Access Points**, or **WAPS**, which convert the RF packets into a format for transmission to the wired IP network backbone. Each WAP and its cluster of microcells can support thousands of subscribers.

The purpose of the MCDN Network Radio is to route data between Ricochet wireless modems and the closest WAP thus enabling users to send and receive email and connect to the internet from anywhere within the geographic area covered by the MCDN.

3.0 Results Summary

The following test were performed to demonstrate compliance with FCC Part 15.247 and RSS-210 6.2.2.(o). Compliance with the following Part 15 / RSS-210 regulations was verified:

Part 15 Paragraph	RSS-210 Paragraph	Test	Results
15.247(b)	6.2.2(o)(a) 3	Maximum Power Output at Antenna Terminal	29.6 dBm Max
15.247(a)(1)	6.2.2(o)(a)	Channel Frequency Separation (900MHz) (2.4GHz)	318 kHz Max 320 kHz Max
15.247(a)(1)(I)	6.2.2.(O)(a)-1	Minimum Number of Hopping Channels(900MHz) (2.4GHz)	50 256
15.247(a)(1)	6.2.2.(O)(a)-1	Average Channel Occupancy Time (900MHz) (2.4GHz)	98.32 ms / 10 Sec Avg. 25.16 ms / 10 Sec Avg
15.247(c)	6.2.2(o)(a) 4	Out of Band Conducted Emissions (900MHz) (2.4GHz)	-21.33dB @ Band Edge -21 dB @ Band Edge
15.205	6.3(c)	Radiated Emissions in Restricted bands(900MHz) (2.4GHz)	4.1 dB in spec min 3.1 B in spec min
15.109	6.2.2.(o)(a)4	Class B Unintentional Radiated Emissions	1.7 dB in Spec, min w/QP

4.0 Test Facilities

The following tests:

Part 15	RSS-210	
15.205	6.2.2(o)(a) 5	Radiated Emissions in Restricted bands
15.109	6.2.2.(o)(a)4	Class B Unintentional Radiated Emission
	7.3	Receiver Spurious emissions (Radiated)

were conducted at:

Electronic Compliance Laboratories (**)
1249 Birchwood Drive
Sunnyvale, CA. 94089

The remaining tests described in this report were performed at:

Metricom, Inc.
980 University Ave
Los Gatos, CA. 95030

(**)
A description of the sites located at EC Labs is on file at:
Federal Communications Commission
PO 429
Columbia, MD. 21045

All of the sites at EC Labs are constructed and calibrated to meet ANSI C63.4-1994 requirements.

5.0 Test Equipment & General Test Methods

Equipment:

The following test equipment was used to perform the testing

Description	Manufacturer	S/N	Model No.
EMI Receiver	HP	3325A00137	8456A
Pre-amp	HP	313A06829	8447F
Pre-amp	HP	3008A00527	8449B
LISN	EM	2532	ANS-25/2
Spectrum Analyzer	HP	3137A01183	8563A
Spectrum Analyzer	HP	3137A02798	8563E
Plotter	HP	2644V00365	7470A
Power Meter	HP	US37420106	EPM-442A
Power Sensor	HP	US3718848	ECP-E18A
Biconical Antenna	EM	677	EM-6912
Log-Periodic Antenna	EM	858	EM-6950
Horn Antenna	EM	6231	RGA-60
1.2 - 4GHz Filter	FSY	001	HM1160-11SS
4 - 10 GHz Filter	FSY	001	HM2950-15SS
10 - 18 GHz Filter	FSY	001	HP8601-7SS

HP = Hewlett Packard

EM = Electro Metrics

Methods:

Many of the tests are performed at the low, middle and the high portion of the 902 - 928 MHz band. These tests are typically performed on the following channels / frequencies unless otherwise noted:

900 MHz		2.4 GHz	
Channel	Frequency (MHz)	Channel	Frequency (GHz)
1	902.24	1	2.40064
75	914.08	130	2.44192
161	927.84	259	2.48320

Many of the tests required that the UUT be operated in modes that are not possible in the when the unit is in its normal mode. In these cases, the UUT is put into the "Diagnostic Mode" which allows special commands to sent to the UUT.

The tests below are performed using the basic test setup shown in Fig 1. The only difference between several of the tests is the mode that the UUT is being operated in, normal operating mode or the diagnostic mode.

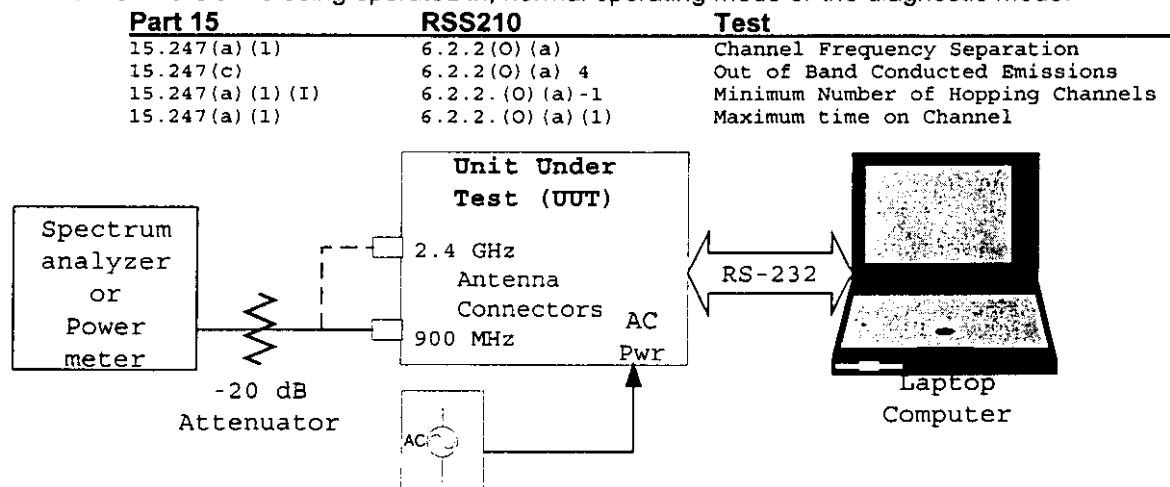


Figure 1. Basic Test Setup

6.0 Test Results

6.1 Maximum Power Output at Antenna Terminals

FCC Specification: Paragraph: 15.247(b)

The maximum peak output power shall not exceed 1 watt. If the gain of the antenna that is connected to the system is greater than 6 dBi, then the RF power at the antenna terminal must be reduced such that the Effective Isotropic Radiated Power (EIRP) is +36 dBm or less.

Industrie Canada Specification: Paragraph RSS210, 6.2.2(o)(a) 3

The peak output power of the transmitter shall not exceed one watt. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limit.

Procedure:

The UUT was configured to run in diagnostic mode and the hopping function was disabled. The test was configured as shown in the basic test setup using a power meter. The power was then read directly from the power meter.

Result:

The following power levels were measured (corrected for the 20 dB attenuator) on the standard test channels:

NETWORK RADIO		
Freq. (MHz)	Level (dBm)	Level (Watts)
902.24	29.2	.831
914.08	29.6	.912
927.84	29.5	.891

Freq. (GHz)	Level (dBm)	Level (Watts)
2.40064	26.2	.416
2.44192	26.2	.416
2.48320	26.7	.467

ETHERNET RADIO		
Freq. (MHz)	Level (dBm)	Level (Watts)
902.24	29.47	.885
914.08	29.23	.837
927.84	29.51	.893

Freq. (GHz)	Level (dBm)	Level (Watts)
2.40064	27.8	.605
2.44192	28.3	.676
2.48320	27.8	.602

6.2 Channel Frequency Separation**FCC Specification: Paragraph 15.247(a)(1)**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

In the case of the Ricochet wireless network, the 20 dB bandwidth specification applies.

Industrie Canada Specification: Paragraph RSS210, 6.2.2(o)(a) 3

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Procedure:

The Metricom MCDN radio and the Ethernet radio operate on 56 channels in the 900MHz band. (A "Channel Vs. Freq" table is included in the appendix). The majority of these channels are spaced at 480kHz, however there are some that are spaced at 320 kHz, therefore the 20dB BW of the 900 MHz channels must be 320 kHz or less.

The MCDN radio and the Ethernet radio operate on 256 channels evenly spaced from 2.40032 GHz to 2.48224 GHz. This yields a channel spacing of:

$$\frac{(2482.24 - 2400.32) \text{ MHz}}{256 \text{ channels}} = \frac{320 \text{ kHz}}{\text{channel}}$$

The test was configured as shown in Figure 1 and performed on channel zero and the highest channel used for that band. Each test channel was tested with each modulation (sometimes called "Gear") that will be used in the system for each band. The UUT was running in the diagnostic mode and set to transmit continuous random data at the highest possible data rate. To reduce possible errors due to an unnecessarily wide resolution bandwidth setting, the spectrum analyzer was set to a resolution bandwidth of 3 kHz. The video bandwidth was also set to 3 kHz.

The analyzer was placed into MAX-HOLD until the trace stabilized. At that point a PEAK SEARCH was performed and the -20 dB points located using the MARKER- DELTA method.

Results:

Given the number of channels being used in each band 320 kHz is the maximum allowed bandwidth. The radios have the capability to use different modulation methods when required, however at the current time, the only modulation used by the Network radio is PI/4 DPSK, however the Ethernet radio will be using two modulations, PI/4DPSK and 16 QAM.

Plots showing the bandwidth for each of the standard test channels are contained in appendix A.

NETWORK RADIO, 900 MHz Band				ETHERNET RADIO, 900 MHz Band			
Chan	Freq MHz	20 dB BW kHz	Modulation	Chan	Freq MHz	20 dB BW kHz	Modulation
0	902.08	315	PI/4 DPSK x 2	0	902.08	318	PI/4 DPSK x 2
75	914.08	317	PI/4 DPSK x 2	75	914.08	313	PI/4 DPSK x 2
161	927.84	313	PI/4 DPSK x 2	161	927.84	315	PI/4 DPSK x 2
NETWORK RADIO, 2.4 GHz Band				ETHERNET RADIO, 2.4 GHz Band			
Chan	Freq MHz	20 dB BW kHz	Modulation	Chan	Freq MHz	20 dB BW kHz	Modulation
1	2400.32	313	PI/4 DPSK x 2	1	2400.32	310	PI/4 DPSK x 2
130	2441.892	317	PI/4 DPSK x 2	130	2441.892	317	PI/4 DPSK x 2
256	2482.22	320	PI/4 DPSK x 2	255	2481.93	315	PI/4 DPSK x 2
				1	2400.32	312	16 QAM x 2
				130	2441.892	313	16 QAM x 2
				255	2481.93	317	16 QAM x 2

6.2A Minimum Number of Hopping Channels**FCC Specification: Paragraph: 15.247(a)(1)(i) and (ii)**

For frequency hopping systems operating in the 902-928 MHz band if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

Frequency hopping systems operating in the 2400-2483.5 MHz and 5725-5850 MHz bands shall use at least 75 hopping frequencies.

Industrie Canada Specification: Paragraph 6.2.2.(o)(a)(1)

Frequency hopping systems operating in the 902-928 MHz band shall use at least 50 hopping frequencies.

Procedure:

The UUT was placed in diagnostic mode. The basic test setup shown in Figure 1 was used. The analyzer was set to sweep over a small portion of the 902 - 928 MHz band, (i.e.: 902 - 905 MHz), and wide resolution bandwidth was chosen to allow a fast sweep. The analyzer is set to MAX HOLD.

With the unit in diagnostic mode it is possible to tell the unit to transmit a CW signal on each channel for a short time. With the spectrum analyzer set to MAX HOLD, each of the individual channels can be seen as the unit steps through all of the channels. Because the channels are relatively close together, 902 - 928 MHz band was examined in segments.

The test was then repeated for the 2.4 GHz band

Results:

Since the channels for the MCDN Network radio and the Ethernet radio are the same, only one set of plots is presented in the appendix. The plots for the 900 MHz band show 56 channels. The plots for the 2.4 GHz band show 259 possible channels, however in normal operating mode, for both the MCDN radio and the Ethernet radio, channel 257, 258 and 259 are not used (this is controlled by the software of the radio which has a "Channel Mask") to ensure compliance with the 2.4 GHz upper band-edge emission requirement.

Plots showing the results of the test are contained in appendix A.

6.2B Average Channel Occupancy Time**FCC Specification: Paragraph 15.247(a)(1)(i) and (ii)**

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Frequency hopping systems operating in the 2400-2483.5 MHz and 5725-5850 MHz bands shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

Industrie Canada Specification: Paragraph 6.2.2.(o)(a)(1)

The average time occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.


Procedure:

The test was configured as shown below. (The test setup is shown for 900 MHz, the setup is similar for 2.4 GHz except that the directional coupler is in the 2.4GHz path.) The units were configured to perform a "Z Modem" file transfer of a 10 MB file. The number of times each channel was used during the transfer was obtained from the radio using a special diagnostic command. The average number of hits per channel was calculated with Excel.

The spectrum analyzer was used to measure the duration of transmissions. This is the time required to transmit one packet. With this information and the average number of hits per channel and the total time required for the file transfer to take place, the total time on channel can be calculated.

The file was transferred in the following directions.

Ethernet Radio to MCDN Network Radio	900 MHz
MCDN Network Radio to Ethernet Radio	900 MHz
Ethernet Radio to Modem	900 MHz
MCDN Network Radio to Modem	900 MHz
Ethernet Radio to MCDN Network Radio	2.4 GHz
MCDN Network Radio to Ethernet Radio	2.4 GHz

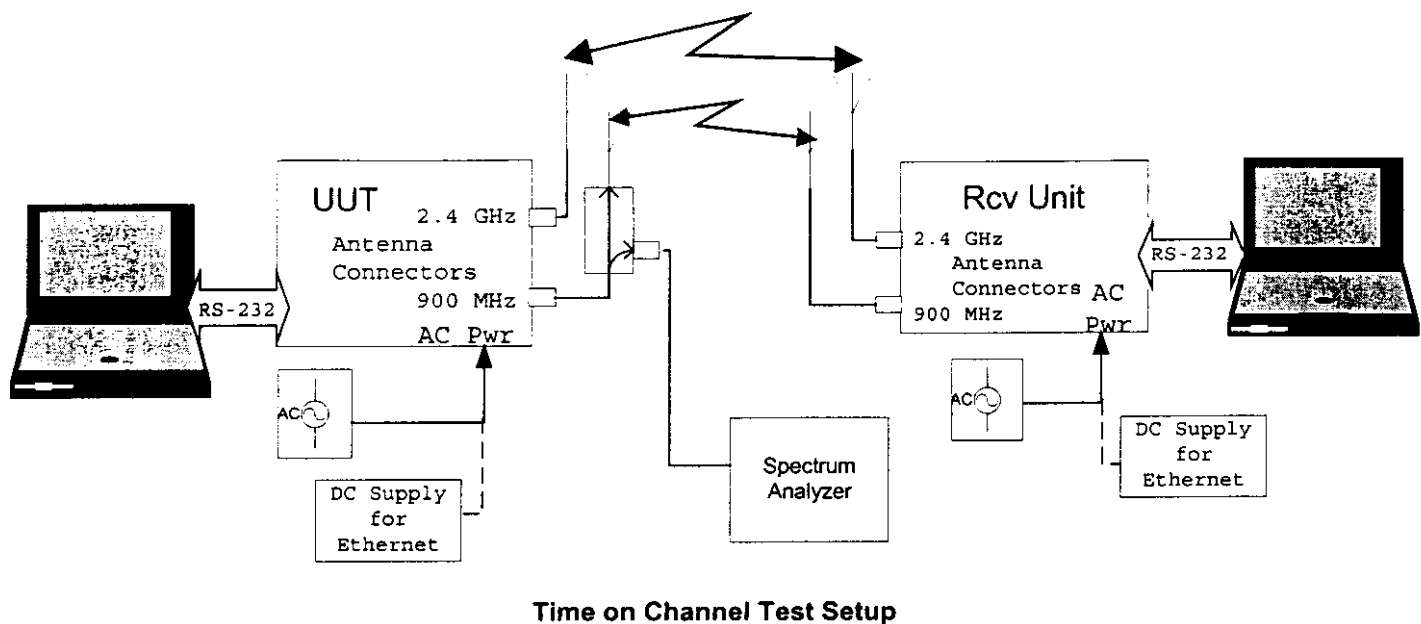

Results:
The following data was gathered:
Total time required to transfer the file in seconds
Average number of hits per channel
Time of each transmission in seconds

The test results were calculated using the following formula

$$\frac{\left(\text{Avg Transmissions per channel} \star \text{Time per transmission} \right)}{\left(\frac{\text{Total file transfer time}}{\text{Spec Window (Sec)}} \right)} = \frac{\text{Total time on channel}}{\text{Qty of "Spec Windows"}} = \frac{\text{Time on Channel per "spec" Sec.}}{\text{Sec.}}$$

The results are presented in the table below. Plots showing the time of a given transmission are presented in the appendix.

From...	To	Band	Avg Hits / Channel	Total Xsfer Time (s)	Time / Transmission (s)	Avg time/ Channel / "Window" (ms)	Spec
Network Radio	Ethernet Radio	900	182	887.07	0.0400	82.07	.4s / 10 S
Network Radio	Ethernet Radio	2.4	37	877.8	0.0199	25.16	.4s / 30 S
Network Radio	Modem	900	190	880.35	0.0417	90.00	.4s / 10 S
Ethernet Radio	Network Radio	900	190	908.76	0.0467	97.64	.4s / 10 S
Ethernet Radio	Network Radio	2.4	35	881.41	0.0194	23.11	.4s / 30 S
Ethernet Radio	Modem	900	193	916.71	0.0467	98.32	.4s / 10 S

6.3 Radiated Emissions in Restricted bands Procedure

FCC Specification: Paragraph 15.205

Any emission falling within one of the restricted bands specified in 15.205 shall be below the limits specified in 15.209.

Industrie Canada Specification: Paragraph RSS210, 6.2.3 (c)

Except as provided in 6.2.2(o), unwanted emissions falling into restricted bands shall meet Tables 3 and 7 limits.

Procedure:

This test was conducted on a 3 meter open air test site at EC Labs. The unit was placed on a rotatable wooden table 1 meter above the ground plane. A 1 – 18 GHz and 18 - 26.5 GHz Horn antenna were secured to a mast 3 meters away. The unit was tested at each of the standard test channels for each band. The UUT was running in the diagnostic mode and set to transmit CW at maximum power on Channel 0. The test equipment was configured as shown in figure 3. The harmonics of the fundamental that fell in restricted bands (up to the tenth) were measured (See table 1 below). A high pass filter prior to the pre-amplifier was required to prevent the large signal level of the fundamental frequency from overloading the front end of the spectrum analyzer and creating harmonics within the analyzer.

The UUT was rotated 360 degrees and the height of the antenna adjusted from 1 to 4 meters above the ground plane to determine the maximum level of the emission. The level of the harmonic emission is measured in two modes, "Peak" and "Average". The spectrum analyzer reading was entered into a spread sheet where correction factors (antenna factor, cable loss, pre-amplifier gain, HPF loss...) were then applied by EC Lab's Software to obtain a final corrected measurement..

Once all the harmonics that fall in a restricted band (up to the 10th harmonic) have been examined for channel 0, the test is repeated for the remaining two standard test channels for each band.

Fund		HARMONICS (MHz)								
Channel	Freq (MHz)	2	3	4	5	6	7	8	9	10
0	902.08	1804.16	2706.24	3608.32	4510.40	5412.48	6314.56	7216.64	8118.72	9020.80
75	914.08	1828.16	2742.24	3656.32	4570.40	5484.48	6398.56	7312.64	8226.72	9140.80
161	927.84	1855.68	2783.52	3711.36	4639.20	5567.04	6494.88	7422.72	8350.56	9278.40
0	2400.32	4800.64	7200.96	9601.28	12001.60	14401.92	16802.24	19202.56	21602.88	24003.20
130	2441.92	4883.84	7325.76	9767.68	12209.60	14651.52	17093.44	19535.36	21977.28	24419.20
259	2483.20	4966.40	7449.60	9932.80	12416.00	14899.20	17382.40	19865.60	22348.80	24832.00

Table 1: 15.205 Harmonic test table

NOTE: The harmonics that are shaded do not fall within a restricted band, they are therefore subject to the general limits in 15.209.

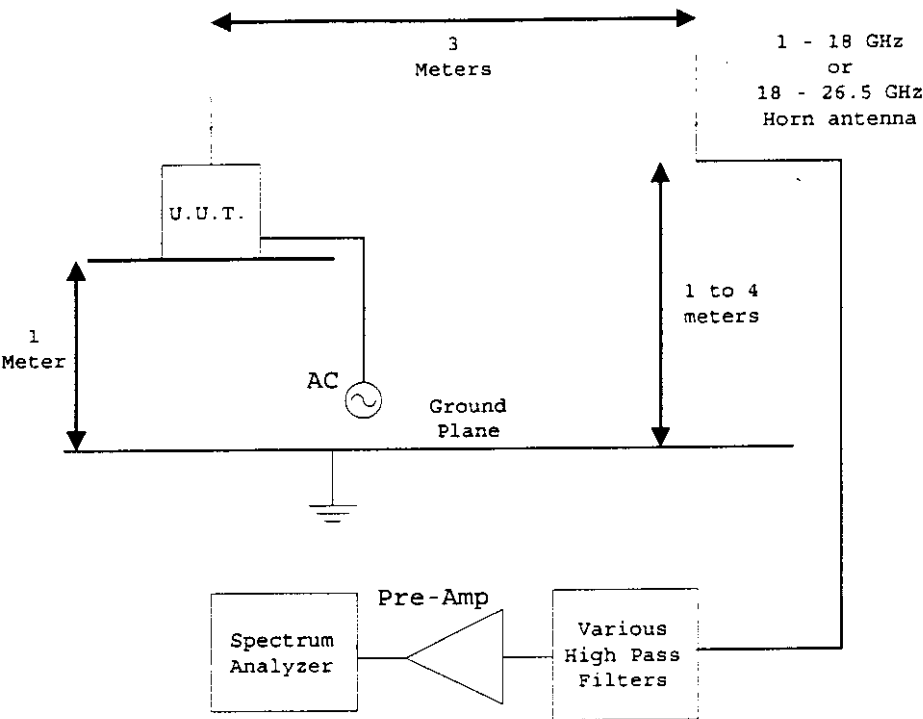


Figure 3: Radiated Emissions in Restricted Bands Test Setup

Results:

There were some harmonic emissions detected during the test. In many cases the resolution bandwidth and the video bandwidth were reduced well below what is required of the specifications in an attempt to find the actual level of the emission. In the case of the "PEAK" measurement the RBW and VBW were always set to 1 MHz. The "AVG" test was conducted with the RBW and VBW set to 10 kHz maximum. There were some cases where an emission was not visible using these 10k/10k bandwidth settings and the bandwidths were set to 1 kHz In an effort to determine if an emission was present. In some cases, even with these lower bandwidths, there was no emission detected.

6.4 Out of Band Emissions**FCC Part 15 specification Paragraph 15.247(c)****Industrie Canada Specification: Paragraph RSS210,6.2.2.(o)(b)4****OVERVIEW**

Two tests were performed to demonstrate 900 MHz band compliance with the 15.247(c) specification.

The first test was performed as a conducted test at Metricom using the Basic Test Setup shown in Figure 1. Only the "edges" of the 902 to 928 MHz band are examined since these are expected to be the worst case frequencies for out of band emissions. (The two points where the in-band UUT signal is most likely to "spill" out of the 902 to 928 MHz band) This test is conducted for the 2.4 GHz band in the same manner as the 900MHz band with the exception that it is not conducted for the upper edge of the 2.4 GHz band due to the fact that there is a restricted band that starts at 2.4835GHz. Therefore the level present at 2.4835 GHz must be measured in a radiated setup.

The second test is performed as a conducted test. This test examines a much wider band for out of band emissions (30 MHz to 10 GHz). The test setup for this test is shown in figure 1. The radio is configured to transmit on a single channel in the center of the 902 – 928 MHz band and then repeated for the 2.4 GHz band. The 30MHz to 10GHz is then examined for Out of Band Emissions.

In the case of the MCDN radio the limits set forth in 15.209 and RSS-210 Table 3 are not relevant to the test (for spurs produced from modulation products of the spreading sequence, the information sequence and the carrier frequency, NOT falling in a restricted band) since the transmit power of the radio is about 1 Watt, the -20 dBc rule will be the governing limit.

FCC Specification: Paragraph 15.247(c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Industrie Canada Specification: Paragraph RSS210,6.2.2.(o)(b)4

In any 100 kHz bandwidth outside the operating frequency bands, between 30 MHz and 5 times the carrier frequency, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in Table 3, whichever is less stringent.

Test 1 Procedure:

The test setup shown in figure 1 was used for this test. The UUT was running the diagnostic mode and is set to transmit on channel 161 (927.84 MHz). The sweep was set to 928 MHz center with 1 MHz span. The analyzer was set to MAX HOLD and then a peak search was done with the marker and then a delta measurement was made to insure that the signal level was at least -20 dBc at 928.0 MHz. This measurement was made for each of the gears (different modulations) of the Network and Ethernet radios.

The test was then repeated with the sweep set to a center of 902 MHz with a 1 MHz span. The UUT was set to transmit on the lowest channel (902.4 MHz). The measurement was made for each of the modulations that will be used in normal operation.

The test was then repeated for the lower edge of the 2.4GHz band, (The upper bandedge of the 2.4GHz band was not measured in this test due the restricted band that begins at 2483.5GHz.

6.4 Out of Band Emissions (Cont)

Test 1 Results

The upper and lower edges of the 900 MHz band as well as the lower edge of the 2.4 GHz band were examined for the Ethernet radio and the network radio. The results of the upper edge test of the 2.4 GHz band are presented in the Restricted Band Emissions test results. The -dBc level was measured for each of the modulations that the radio will use in normal operation.

MCDN Network Radio				Ethernet Radio			
Edge	Channel	Gear	-dBc @ Bandedge	Edge	Channel	Gear	-dBc @ Bandedge
900 - LOW	2	2FSK	60.33	900 - LOW	2	2FSK	57.34
900 - LOW	2	4FSK	60.67	900 - LOW	2	4FSK	54.84
900 - LOW	2	pi/4 DPSKx2	50.50	900 - LOW	2	pi/4 DPSKx2	48.67
900 - HIGH	161	2FSK	38.67	900 - HIGH	161	2FSK	40.17
900 - HIGH	161	4FSK	39.00	900 - HIGH	161	4FSK	38.67
900 - HIGH	161	pi/4 DPSKx2	27.16	900 - HIGH	161	pi/4 DPSKx2	21.33
2.4 - LOW	0	pi/4 DPSKx2	21.00	2.4 - LOW	0	pi/4 DPSKx2	33.83
2.4 - LOW	0	16 QAM	21.66	2.4 - LOW	0	16 QAM	43.84

Test 2 Procedure (900 and 2.4 GHz):

The test equipment was configured as shown in figure 1. The test unit was configured to transmit random data on a single channel in the middle of the band being tested. The level of the fundamental was measured to establish a reference to measure the level of the out of band emissions against The 1 GHz to 10GHz band was then examined (in small segments) for out of band emissions. The test was repeated for the 2.4 GHz band. The band of 1 GHz to 25 GHz was examined for Out of band emissions.

Test 2 Results (900 and 2.4 GHz):

- Network Radio 900 MHz worst case emission:

-92.00 dBm
- Network Radio 2.4 GHz worst case emission:

-87.50 dBm
- Ethernet Radio 900 MHz worst case emission:

-71.33 dBm
- Ethernet Radio 2.4 GHz worst case emission:

-68.33 dBm

6.4 Out of Band Emissions (Upper bandedge of 2.4 GHz band)**Test 1 Procedure for Upper bandedge of the 2.4 GHz band.**

The procedure below was provided to EC Labs in Sunnyvale, CA. by the FCC. This is the procedure that was followed to determine compliance with the restricted band emission spec for 2483.5MHz.

STEP 1) Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4 and our Rules for the frequency being measured. For example, for a device operating in the 902-928 MHz band under Section 15.249, use a 120 kHz RBW with a CISPR QP detector (a peak detector with 100 kHz RBW may alternatively be used). For transmitters operating above 1 GHz, use a 1 MHz RBW and a peak detector (as required by Section 15.35). Repeat the measurement with an average detector (i.e., 1 MHz RBW with 10 Hz video bandwidth). Note: For pulsed emissions, other factors must be included. Please contact us for details if the emission under investigation is pulsed. Also, please note that radiated measurements of the fundamental emission of a transmitter operating under 15.247 are not normally required, but they are necessary in connection with this procedure.

STEP 2) Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1 % of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant bandedge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the bandedge emission. This is not a field strength measurement, it is only a relative measurement to determine how much the emission drops at the band-edge relative to the highest fundamental emission level.

STEP 3) Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by either 15.249(c) or 15.205.

STEP 4) You can use the above "delta" measurement technique for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for bandedge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two bandwidths must be measured in the conventional manner.

Test 1 Results for Upper bandedge of the 2.4 GHz band.

The reference measurement of the CW carrier @ 2483.2MHz discussed in step 1 yielded a field strength reading of 110.5 dBuV/m in the peak mode (1 MHz RBW & VBW). This is the highest channel that will be used by the system in normal operation. Correction this level for amplifier gain, antenna factor and attenuation the test setup yields

$$110.5 \text{ dBuV/m} + 28.5 \text{ dB} - 16.691 \text{ dB} = 122.309 \text{ dBuV/m}$$

The delta measurement was made with RBW = VBW = 30 kHz, and yielded 69.5 dB. Subtracting this from the reference measurement:

$$122.309 \text{ dBuV/m} - 69.5 \text{ dB} = 52.809 \text{ dBuV/m}$$

Plots showing the reference measurement and the delta measurement are contained in appendix A

6.5 Class B Unintentional Radiated Emissions

FCC Specification: Paragraph 15.103

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

FREQ (MHz)	Field Strength (uV/M)
30->88	100
88->216	150
216->960	200
Above 960	500

Industrie Canada Specification: Paragraph RSS210, 6.2.2.(o)(a)4


In any 100 kHz bandwidth outside the operating frequency bands, between 30 MHz and 5 times the carrier frequency, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in Table 3, whichever is less stringent.

FUNDAMENTAL FREQ (MHz)	FIELD STRENGTH microvolts/metre (watts) #	MEASUREMENT DISTANCE (metres) #
30-88	100 (3 nW), Note 1	3
88-216	150 (6.8 nW), Note 1	3
216-960	200 (12 nW), Note 1	3
Above 960 MHz	500 (75 nW)	3

(RSS-210 Table 3)

Procedure

This was performed on the 3 meter open air test site located at EC Labs with the UUT running normal operating software. The band from 30 MHz to 1 GHz was examined using a BiConical and Log Periodic antenna. The UUT was put on the OATS turntable, and powered up in normal operating mode. The entire 30 MHz to 1 GHz band was examined in small segments for each of the 3 types of test antennas. There was, of course, a lot of background "noise" present (T.V., broadcast radio,) so the turn-table was rotated and the spectrum analyzer closely watched for any signals that appear to coincide with the table movement. In some cases the unit under test was powered off to see if the emission disappeared (it was from the unit under test) or if it remains (it is from another source). The test setup is shown below.

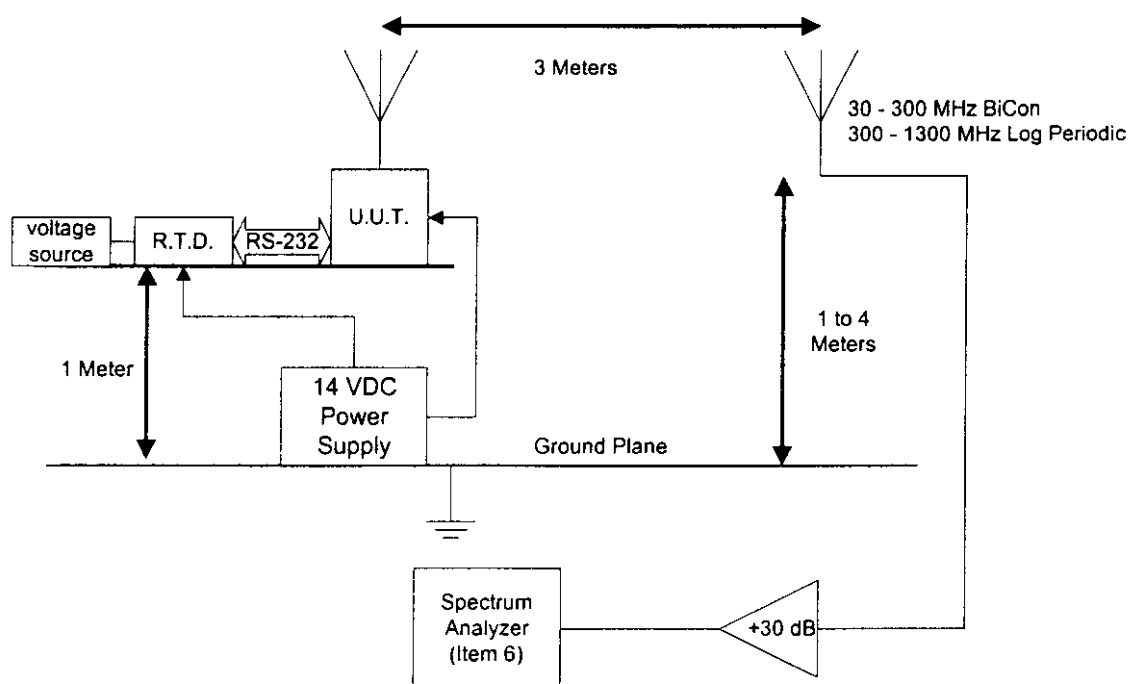

6.5 Class B Unintentional Radiated Emissions (Cont)**Results:**

The worst case radiated emission between 30 MHz and 1 GHz was at 128MHz and was at a level of 41.0 dBuV @ 3 Meters. This is 2.5dB within the specification using a Quasi Peak Detector. The tables showing the levels of the emissions for all three antennas are contained in Appendix A.

Appendix A

Data and Plots for FCC Part 15 Certification Application for GNW-24000

Industrie Canada RSS-210 Certification Application

Appendix Table of Contents

Description	Section
Radiated Emissions in Restricted Bands (Network Radio 900 MHz).....	1
Radiated Emissions in Restricted Bands (Network Radio 2400MHz).....	1
Radiated Emissions in Restricted Bands (Ethernet Radio 900 MHz).....	1
Radiated Emissions in Restricted Bands (Ethernet Radio 2400MHz).....	1
Radiated Emissions @ upper edge of 2.4 GHz.....	1
Class B Emissions (Network Radio).....	1
Class B Emissions (Ethernet Radio).....	1
20 dB Bandwidth (Network Radio, 2.4 GHz).....	2
20 dB Bandwidth (Network Radio, 900 MHz).....	2
20 dB Bandwidth (Ethernet Radio, 2.4 GHz).....	2
20 dB Bandwidth (Ethernet Radio, 900 MHz).....	2
Number of Channels (Network Radio & Ethernet Radio 900 MHz).....	3
Number of Channels (Ethernet Radio, 2.4 GHz).....	3
Number of Channels (Network Radio, 2.4 GHz).....	3
Out of band Conducted Emissions (Network Radio, 2.4 GHz).....	4
Out of band Conducted Emissions (Network Radio, 900 MHz).....	4
Out of band Conducted Emissions (Ethernet Radio, 2.4 GHz).....	4
Out of band Conducted Emissions (Ethernet Radio, 900 MHz).....	4
Time on Channel, Time of 1 transmission (Network Radio -> Modem).....	5
Time on Channel, Time of 1 transmission (Network -> Ethernet 900MHz).....	5
Time on Channel, Time of 1 transmission (Network -> Ethernet 2.4 GHz).....	5
Time on Channel, Time of 1 transmission (Ethernet Radio -> Modem).....	5
Time on Channel, Time of 1 transmission (Ethernet -> Network 900MHz).....	5
Time on Channel, Time of 1 transmission (Ethernet -> Network 2.4 GHz).....	5
Pictures of Test setups.....	6
Schematic, 2.4 GHz RF PCA.....	7
Schematic, 900 MHz RF PCA.....	8
Schematic, Digital Card.....	9
Schematic, 2.4 GHz Antenna Swith.....	10
FAQ and Misc Notes.....	11

FCC RADIATED DATA SHEET

DATE: Mar. 17, 1999

EUT: Viper Ethernet Radio

CUSTOMER NAME: Metricom

S/N: 840100ec

WORK ORDER: 9031601

RULE PART: 15 247

FILE: 9031601a.xls

ANTENNA horn

OTHER CAL FACTOR ATTN dB: 0

MODULATION TYPE:

DUTY dB: 0

TESTED BY Shawn

HP IL dB: 0

COMMENT Note: bold font indicates noise floor measurement

DIST dB: 0

FREQ.	READING	Pk, QP,	A.F.	Cable loss	AMP	O.C.F.	TOTAL	LIMIT	DELTA
MHz	dB(uV)	or Av	dB	dB	dB	dB	dB(uV/m)	dB(uV/m)	dB
Fund = 902.08									
1804.16	44.5	Pk	27.4	6.5	35.0	0.0	43.4	74.0	-30.6
1804.16	34.2	Avg	27.4	6.5	35.0	0.0	33.1	54.0	-20.9
2706.24	43.3	Pk	30.6	8.1	35.0	0.0	47.0	74.0	-27.0
2706.24	33.7	Avg	30.6	8.1	35.0	0.0	37.4	54.0	-16.6
3608.32	43.5	Pk	32.5	9.8	35.0	0.0	50.8	74.0	-23.2
3608.32	33.8	Avg	32.5	9.8	35.0	0.0	41.1	54.0	-12.9
4510.40	44.1	Pk	34.2	11.7	35.0	0.0	55.0	74.0	-19.0
4510.40	33.0	Avg	34.2	11.7	35.0	0.0	43.9	54.0	-10.1
5412.48	37.7	Pk	34.8	14.1	35.0	0.0	51.6	74.0	-22.4
5412.48	28.3	Avg	34.8	14.1	35.0	0.0	42.2	54.0	-11.8
6314.56	37.7	Pk	37.3	15.4	35.0	0.0	55.4	74.0	-18.6
6314.56	26.6	Avg	37.3	15.4	35.0	0.0	44.3	54.0	-9.7
7216.64	41.1	Pk	36.8	16.9	35.0	0.0	59.8	74.0	-14.2
7216.64	28.3	Avg	36.8	16.9	35.0	0.0	47.0	54.0	-7.0
8118.72	38.2	Pk	38.4	18.3	35.0	0.0	59.9	74.0	-14.1
8118.72	26.0	Avg	38.4	18.3	35.0	0.0	47.7	54.0	-6.3
9020.80	36.2	Pk	40.4	18.9	35.0	0.0	60.5	74.0	-13.5
9020.80	22.5	Avg	40.4	18.9	35.0	0.0	46.8	54.0	-7.2
Fund = 914.13									
1828.26	44.3	Pk	27.4	6.5	35.0	0.0	43.2	74.0	-30.8
1828.26	34.0	Avg	27.4	6.5	35.0	0.0	32.9	54.0	-21.1
2742.39	43.2	Pk	30.6	8.1	35.0	0.0	46.9	74.0	-27.1
2742.39	33.7	Avg	30.6	8.1	35.0	0.0	37.4	54.0	-16.6
3656.52	45.5	Pk	32.5	10.1	35.0	0.0	53.1	74.0	-20.9
3656.52	33.8	Avg	32.5	10.1	35.0	0.0	41.4	54.0	-12.6
4570.65	39.8	Pk	34.2	11.9	35.0	0.0	50.9	74.0	-23.1
4570.65	27.6	Avg	34.2	11.9	35.0	0.0	38.7	54.0	-15.3
5484.78	37.0	Pk	34.8	13.9	35.0	0.0	50.7	74.0	-23.3
5484.78	28.0	Avg	34.8	13.9	35.0	0.0	41.7	54.0	-12.3
6398.91	37.0	Pk	37.3	15.3	35.0	0.0	54.6	74.0	-19.4
6398.91	26.8	Avg	37.3	15.3	35.0	0.0	44.4	54.0	-9.6
7313.04	38.6	Pk	36.8	17.3	35.0	0.0	57.7	74.0	-16.3
7313.04	26.4	Avg	36.8	17.3	35.0	0.0	45.5	54.0	-8.5
8227.17	38.2	Pk	38.4	18.2	35.0	0.0	59.8	74.0	-14.2
8227.17	28.3	Avg	38.4	18.2	35.0	0.0	49.9	54.0	-4.1
9141.30	36.5	Pk	40.4	19.2	35.0	0.0	60.1	74.0	-13.9
9141.30	22.7	Avg	40.4	19.2	35.0	0.0	47.3	54.0	-6.7
Fund = 927.84									
1855.68	46.0	Pk	27.4	6.7	35.0	0.0	45.1	74.0	-28.9
1855.68	34.5	Avg	27.4	6.7	35.0	0.0	33.6	54.0	-20.4
2783.52	41.3	Pk	30.6	8.3	35.0	0.0	45.2	74.0	-28.8
2783.52	33.8	Avg	30.6	8.3	35.0	0.0	37.7	54.0	-16.3
3711.36	43.3	Pk	32.5	10.2	35.0	0.0	51.0	74.0	-23.0
3711.36	33.7	Avg	32.5	10.2	35.0	0.0	41.4	54.0	-12.6
4639.20	42.5	Pk	34.2	11.8	35.0	0.0	53.5	74.0	-20.5
4639.20	33.5	Avg	34.2	11.8	35.0	0.0	44.5	54.0	-9.5
5567.04	42.0	Pk	35.6	14.1	35.0	0.0	56.7	74.0	-17.3
5567.04	31.0	Avg	35.6	14.1	35.0	0.0	45.7	54.0	-8.3
6494.88	41.3	Pk	37.3	15.8	35.0	0.0	59.4	74.0	-14.6
6494.88	30.7	Avg	37.3	15.8	35.0	0.0	48.8	54.0	-5.2
7422.72	39.6	Pk	36.8	17.2	35.0	0.0	58.5	74.0	-15.5
7422.72	28.3	Avg	36.8	17.2	35.0	0.0	47.3	54.0	-6.7
8350.56	39.1	Pk	38.4	18.2	35.0	0.0	60.7	74.0	-13.3
8350.56	26.6	Avg	38.4	18.2	35.0	0.0	48.2	54.0	-5.8
9278.40	35.8	Pk	40.4	19.3	35.0	0.0	60.5	74.0	-13.5

FCC RADIATED DATA SHEET

EUT: Viper Ethernet Radio
S/N: 840100ec
RULE PART: 15 247

DATE: Mar 17, 1999
CUSTOMER NAME: Metncom
WORK ORDER: 9031601
FILE: 9031601b.xls

ANTENNA: horn
MODULATION TYPE:
TESTED BY: Shawn
COMMENT: Note bold font indicates noise floor measurement

OTHER CAL FACTOR ATTN dB: 0
DUTY dB: 0
HP IL dB: 0
DIST dB: 0

FREQ.	READING	Pk, QP, or Av	A.F. dB	Cable loss dB	AMP dB	O.C.F. dB	TOTAL dB(uV/m)	LIMIT dB(uV/m)	DELTA dB
MHz	dB(uV)								
Fund = 2400.32									
4800.64	44.2	Pk	34.2	11.8	35.0	0.0	55.2	74.0	-18.8
4800.64	33.3	Avg	34.2	11.8	35.0	0.0	44.3	54.0	-9.7
7200.96	41.3	Pk	36.8	16.9	35.0	0.0	60.0	74.0	-14.0
7200.96	29.8	Avg	36.8	16.9	35.0	0.0	48.5	54.0	-5.5
9601.28	39.5	Pk	38.0	20.0	35.0	0.0	62.5	74.0	-11.5
9601.28	26.5	Avg	38.0	20.0	35.0	0.0	49.5	54.0	-4.5
12001.60	32.0	Pk	42.6	25.7	35.0	0.0	65.3	74.0	-8.7
12001.60	16.8	Avg	42.6	25.7	35.0	0.0	50.1	54.0	-3.9
14401.92	28.9	Pk	40.9	29.6	35.0	0.0	64.4	74.0	-9.6
14401.92	16.0	Avg	40.9	29.6	35.0	0.0	51.5	54.0	-2.5
16802.24	29.5	Pk	41.2	30.1	35.0	0.0	65.8	74.0	-8.2
16802.24	14.5	Avg	41.2	30.1	35.0	0.0	50.8	54.0	-3.2
19202.56	27.6	Pk	40.2	30.1	35.0	0.0	62.9	74.0	-11.1
19202.56	15.0	Avg	40.2	30.1	35.0	0.0	50.3	54.0	-3.7
21602.88	30.5	Pk	40.3	30.1	35.0	0.0	65.9	74.0	-8.1
21602.88	15.5	Avg	40.3	30.1	35.0	0.0	50.9	54.0	-3.1
24003.20	29.3	Pk	40.4	30.1	35.0	0.0	64.8	74.0	-9.2
24003.20	15.4	Avg	40.4	30.1	35.0	0.0	50.9	54.0	-3.1
Fund = 2441.85									
4883.70	44.5	Pk	34.2	12.0	35.0	0.0	55.7	74.0	-18.3
4883.70	33.8	Avg	34.2	12.0	35.0	0.0	45.0	54.0	-9.0
7325.55	42.0	Pk	36.8	17.3	35.0	0.0	61.1	74.0	-12.9
7325.55	30.2	Avg	36.8	17.3	35.0	0.0	49.3	54.0	-4.7
9767.40	38.5	Pk	38.0	20.3	35.0	0.0	61.8	74.0	-12.3
9767.40	26.0	Avg	38.0	20.3	35.0	0.0	49.3	54.0	-4.8
12209.25	32.1	Pk	42.6	26.2	35.0	0.0	65.9	74.0	-8.1
12209.25	16.5	Avg	42.6	26.2	35.0	0.0	50.3	54.0	-3.7
14651.10	28.4	Pk	41.3	30.3	35.0	0.0	65.0	74.0	-9.0
14651.10	15.0	Avg	41.3	30.3	35.0	0.0	51.6	54.0	-2.4
17092.95	29.6	Pk	43.7	30.1	35.0	0.0	68.4	74.0	-5.6
17092.95	13.0	Avg	43.7	30.1	35.0	0.0	51.8	54.0	-2.2
19534.80	28.0	Pk	40.2	30.1	35.0	0.0	63.3	74.0	-10.7
19534.80	14.0	Avg	40.2	30.1	35.0	0.0	49.3	54.0	-4.7
21978.65	28.2	Pk	40.3	30.1	35.0	0.0	63.6	74.0	-10.4
21978.65	14.4	Avg	40.3	30.1	35.0	0.0	49.8	54.0	-4.2
24418.50	28.6	Pk	40.4	30.1	35.0	0.0	64.1	74.0	-9.9
24418.50	15.0	Avg	40.4	30.1	35.0	0.0	50.5	54.0	-3.5
Fund = 2483.20									
4966.40	46.5	Pk	34.2	11.8	35.0	0.0	57.5	74.0	-16.5
4966.40	36.6	Avg	34.2	11.8	35.0	0.0	47.6	54.0	-6.4
7449.60	42.2	Pk	36.8	17.2	35.0	0.0	61.2	74.0	-12.8
7449.60	29.0	Avg	36.8	17.2	35.0	0.0	48.0	54.0	-6.0
9932.80	39.0	Pk	38.0	20.4	35.0	0.0	62.4	74.0	-11.6
9932.80	25.4	Avg	38.0	20.4	35.0	0.0	48.8	54.0	-5.2
12416.00	32.0	Pk	42.6	26.8	35.0	0.0	66.4	74.0	-7.6
12416.00	16.0	Avg	42.6	26.8	35.0	0.0	50.4	54.0	-3.6
14899.20	28.0	Pk	41.3	30.9	35.0	0.0	65.2	74.0	-8.8
14899.20	14.0	Avg	41.3	30.9	35.0	0.0	51.2	54.0	-2.8
17382.40	27.2	Pk	43.7	30.1	35.0	0.0	68.0	74.0	-8.0
17382.40	13.2	Avg	43.7	30.1	35.0	0.0	52.0	54.0	-2.0
19865.60	28.4	Pk	40.2	30.1	35.0	0.0	63.7	74.0	-10.3
19865.60	14.1	Avg	40.2	30.1	35.0	0.0	49.4	54.0	-4.6
22348.80	27.8	Pk	40.3	30.1	35.0	0.0	63.2	74.0	-10.8
22348.80	14.6	Avg	40.3	30.1	35.0	0.0	50.0	54.0	-4.0
24832.00	28.1	Pk	40.4	30.1	35.0	0.0	63.6	74.0	-10.4

FCC RADIATED DATA SHEET

EUT: Viper Network Radio
S/N: 840100e6
RULE PART: 15 247

DATE: Mar 17 1999
CUSTOMER NAME: Metricom
WORK ORDER: 9031602
FILE: 9031602b.xls

ANTENNA: horn

OTHER CAL FACTOR ATTN dB: 0

MODULATION TYPE:

DUTY dB: 0

TESTED E Shawn

HP IL dB: 0

COMMENT Note: bold font indicates noise floor measurement

DIST dB: 0

FREQ.	READING	Pk, QP, or Av	A.F.	Cable loss	AMP	O.C.F.	TOTAL	LIMIT	DELTA
MHz	dB(uV)		dB	dB	dB	dB	dB(uV/m)	dB(uV/m)	dB
Fund = 2400.32									
4800.64	53.4	Pk	34.2	11.8	35.0	0.0	64.4	74.0	-9.6
4800.64	50.1	Avg	34.2	11.8	35.0	0.0	61.1	54.0	7.1
7200.96	48.5	Pk	36.8	16.9	35.0	0.0	67.2	74.0	-6.8
7200.96	30.7	Avg	36.8	16.9	35.0	0.0	49.4	54.0	-4.6
9601.28	39.2	Pk	38.0	20.0	35.0	0.0	62.2	74.0	-11.8
9601.28	28.5	Avg	38.0	20.0	35.0	0.0	51.5	54.0	-2.5
12001.60	32.5	Pk	42.6	25.7	35.0	0.0	65.8	74.0	-8.2
12001.60	17.8	Avg	42.6	25.7	35.0	0.0	51.1	54.0	-2.9
14401.92	26.0	Pk	40.9	29.6	35.0	0.0	61.5	74.0	-12.5
14401.92	16.0	Avg	40.9	29.6	35.0	0.0	51.5	54.0	-2.5
16802.24	29.0	Pk	41.2	30.1	35.0	0.0	65.3	74.0	-8.7
16802.24	15.4	Avg	41.2	30.1	35.0	0.0	51.7	54.0	-2.3
19202.56	26.4	Pk	40.2	30.1	35.0	0.0	61.7	74.0	-12.3
19202.56	13.2	Avg	40.2	30.1	35.0	0.0	48.5	54.0	-5.5
21602.88	26.0	Pk	40.3	30.1	35.0	0.0	61.4	74.0	-12.6
21602.88	14.0	Avg	40.3	30.1	35.0	0.0	49.4	54.0	-4.6
24003.20	33.2	Pk	40.4	30.1	35.0	0.0	68.7	74.0	-5.3
24003.20	14.0	Avg	40.4	30.1	35.0	0.0	49.5	54.0	-4.5
Fund = 2441.85									
4883.70	57.7	Pk	34.2	12.0	35.0	0.0	68.9	74.0	-5.1
4883.70	55.4	Avg	34.2	12.0	35.0	0.0	66.6	54.0	12.6
7325.55	46.6	Pk	36.8	17.3	35.0	0.0	65.7	74.0	-8.3
7325.55	34.3	Avg	36.8	17.3	35.0	0.0	53.4	54.0	-0.6
9767.40	41.2	Pk	38.0	20.3	35.0	0.0	64.5	74.0	-9.6
9767.40	29.2	Avg	38.0	20.3	35.0	0.0	52.5	54.0	-1.6
12209.25	38.6	Pk	42.6	26.2	35.0	0.0	72.4	74.0	-1.6
12209.25	23.0	Avg	42.6	26.2	35.0	0.0	56.8	54.0	2.8
14651.10	34.0	Pk	41.3	30.3	35.0	0.0	70.6	74.0	-3.4
14651.10	19.2	Avg	41.3	30.3	35.0	0.0	55.8	54.0	1.8
17092.95	32.1	Pk	43.7	30.1	35.0	0.0	70.9	74.0	-3.1
17092.95	23.5	Avg	43.7	30.1	35.0	0.0	62.3	54.0	8.3
19534.80	36.8	Pk	40.2	30.1	35.0	0.0	72.1	74.0	-1.9
19534.80	26.4	Avg	40.2	30.1	35.0	0.0	61.7	54.0	7.7
21976.65	37.6	Pk	40.3	30.1	35.0	0.0	73.0	74.0	-1.0
21976.65	26.4	Avg	40.3	30.1	35.0	0.0	61.8	54.0	7.8
24418.50	34.8	Pk	40.4	30.1	35.0	0.0	70.3	74.0	-3.7
24418.50	22.4	Avg	40.4	30.1	35.0	0.0	57.9	54.0	3.9
Fund = 2483.20									
4966.40	67.5	Pk	34.2	11.8	35.0	0.0	78.5	74.0	4.5
4966.40	66.0	Avg	34.2	11.8	35.0	0.0	77.0	54.0	23.0
7449.60	51.6	Pk	36.8	17.2	35.0	0.0	70.6	74.0	-3.4
7449.60	41.3	Avg	36.8	17.2	35.0	0.0	60.3	54.0	6.3
9932.80		Pk	38.0	20.4	35.0	0.0	23.4	74.0	-50.6
9932.80	33.6	Avg	38.0	20.4	35.0	0.0	57.0	54.0	3.0
12416.00	44.2	Pk	42.6	26.8	35.0	0.0	78.6	74.0	4.6
12416.00	33.5	Avg	42.6	26.8	35.0	0.0	67.9	54.0	13.9
14899.20	36.7	Pk	41.3	30.9	35.0	0.0	73.9	74.0	-0.1
14899.20	23.3	Avg	41.3	30.9	35.0	0.0	60.5	54.0	6.5
17382.40	37.3	Pk	43.7	30.1	35.0	0.0	76.1	74.0	2.1
17382.40	25.2	Avg	43.7	30.1	35.0	0.0	64.0	54.0	10.0
19865.60	39.2	Pk	40.2	30.1	35.0	0.0	74.5	74.0	0.5
19865.60	26.1	Avg	40.2	30.1	35.0	0.0	61.4	54.0	7.4
22348.80	37.5	Pk	40.3	30.1	35.0	0.0	72.9	74.0	-1.1
22348.80	26.3	Avg	40.3	30.1	35.0	0.0	61.7	54.0	7.7
24832.00	33.9	Pk	40.4	30.1	35.0	0.0	69.4	74.0	-4.6

FCC RADIATED DATA SHEET

DATE: Mar 17, 1999

EUT: Viper Network Radio

CUSTOMER NAME: Metricom

S/N: 840100e6

WORK ORDER: 9031602

RULE PART: 15 247

FILE: 9031602a.xls

ANTENNA horn

OTHER CAL FACTOR ATTN dB: 0

MODULATION TYPE:

DUTY dB: 0

TESTED E Shawn

HP IL dB: 0

COMMENT Note: bold font indicates noise floor measurement


DIST dB: 0

FREQ.	READING	Pk, QP,	A.F.	Cable loss	AMP	O.C.F.	TOTAL	LIMIT	DELTA
MHz	dB(uV)	or Av	dB	dB	dB	dB	dB(uV/m)	dB(uV/m)	dB
Fund = 902.08									
1804.16	44.0	Pk	27.4	6.5	35.0	0.0	42.9	74.0	-31.1
1804.16	34.0	Avg	27.4	6.5	35.0	0.0	32.9	54.0	-21.1
2706.24	43.3	Pk	30.6	8.1	35.0	0.0	47.0	74.0	-27.0
2706.24	33.7	Avg	30.6	8.1	35.0	0.0	37.4	54.0	-16.6
3608.32	43.8	Pk	32.5	9.8	35.0	0.0	51.1	74.0	-22.9
3608.32	33.6	Avg	32.5	9.8	35.0	0.0	40.9	54.0	-13.1
4510.40	42.5	Pk	34.2	11.7	35.0	0.0	53.4	74.0	-20.6
4510.40	33.0	Avg	34.2	11.7	35.0	0.0	43.9	54.0	-10.1
5412.48	36.0	Pk	34.8	14.1	35.0	0.0	49.9	74.0	-24.1
5412.48	23.3	Avg	34.8	14.1	35.0	0.0	37.2	54.0	-16.8
6314.56	35.1	Pk	37.3	15.4	35.0	0.0	52.8	74.0	-21.2
6314.56	23.3	Avg	37.3	15.4	35.0	0.0	41.0	54.0	-13.0
7216.64	37.8	Pk	36.8	16.9	35.0	0.0	56.5	74.0	-17.5
7216.64	26.0	Avg	36.8	16.9	35.0	0.0	44.7	54.0	-9.3
8118.72	37.0	Pk	38.4	18.3	35.0	0.0	58.7	74.0	-15.3
8118.72	25.7	Avg	38.4	18.3	35.0	0.0	47.4	54.0	-6.6
9020.80	34.0	Pk	40.4	18.9	35.0	0.0	58.3	74.0	-15.7
9020.80	23.0	Avg	40.4	18.9	35.0	0.0	47.3	54.0	-6.7
Fund = 914.13									
1828.26	45.2	Pk	27.4	6.5	35.0	0.0	44.1	74.0	-29.9
1828.26	34.2	Avg	27.4	6.5	35.0	0.0	33.1	54.0	-20.9
2742.39	43.5	Pk	30.6	8.1	35.0	0.0	47.2	74.0	-26.8
2742.39	33.8	Avg	30.6	8.1	35.0	0.0	37.5	54.0	-16.5
3656.52	45.8	Pk	32.5	10.1	35.0	0.0	53.4	74.0	-20.6
3656.52	33.0	Avg	32.5	10.1	35.0	0.0	40.6	54.0	-13.4
4570.65	44.5	Pk	34.2	11.9	35.0	0.0	55.6	74.0	-18.4
4570.65	33.6	Avg	34.2	11.9	35.0	0.0	44.7	54.0	-9.3
5484.78	33.0	Pk	34.8	13.9	35.0	0.0	46.7	74.0	-27.3
5484.78	23.5	Avg	34.8	13.9	35.0	0.0	37.2	54.0	-16.8
6398.91	32.1	Pk	37.3	15.3	35.0	0.0	49.7	74.0	-24.3
6398.91	23.5	Avg	37.3	15.3	35.0	0.0	41.1	54.0	-12.9
7313.04	36.8	Pk	36.8	17.3	35.0	0.0	55.9	74.0	-18.1
7313.04	26.4	Avg	36.8	17.3	35.0	0.0	45.5	54.0	-8.5
8227.17	37.6	Pk	38.4	18.2	35.0	0.0	59.2	74.0	-14.8
8227.17	26.4	Avg	38.4	18.2	35.0	0.0	48.0	54.0	-6.0
9141.30	34.8	Pk	40.4	19.2	35.0	0.0	59.4	74.0	-14.6
9141.30	22.4	Avg	40.4	19.2	35.0	0.0	47.0	54.0	-7.0
Fund = 927.84									
1855.68	44.2	Pk	27.4	6.7	35.0	0.0	43.3	74.0	-30.7
1855.68	34.2	Avg	27.4	6.7	35.0	0.0	33.3	54.0	-20.7
2783.52	44.1	Pk	30.6	8.3	35.0	0.0	48.0	74.0	-26.0
2783.52	33.8	Avg	30.6	8.3	35.0	0.0	37.7	54.0	-16.3
3711.36	43.5	Pk	32.5	10.2	35.0	0.0	51.2	74.0	-22.8
3711.36	33.6	Avg	32.5	10.2	35.0	0.0	41.3	54.0	-12.7
4639.20	44.2	Pk	34.2	11.8	35.0	0.0	55.2	74.0	-18.8
4639.20	33.5	Avg	34.2	11.8	35.0	0.0	44.5	54.0	-9.5
5567.04	36.7	Pk	35.6	14.1	35.0	0.0	51.4	74.0	-22.6
5567.04	23.3	Avg	35.6	14.1	35.0	0.0	38.0	54.0	-16.0
6494.88	37.3	Pk	37.3	15.8	35.0	0.0	55.4	74.0	-18.6
6494.88	25.2	Avg	37.3	15.8	35.0	0.0	43.3	54.0	-10.7
7422.72	39.2	Pk	36.8	17.2	35.0	0.0	58.2	74.0	-15.8
7422.72	26.1	Avg	36.8	17.2	35.0	0.0	45.1	54.0	-8.9
8350.56	37.5	Pk	38.4	18.2	35.0	0.0	59.1	74.0	-14.9
8350.56	26.3	Avg	38.4	18.2	35.0	0.0	47.9	54.0	-6.1
9278.40	33.9	Pk	40.4	19.3	35.0	0.0	58.6	74.0	-15.4

"REF" MSMT OF 2.4G HIGH BANDWIDTH
COMPLIANCE, CH 256

*ATTEN 20dB

RL 117.0dBμV 10dB/ MKR 110.50dBμV

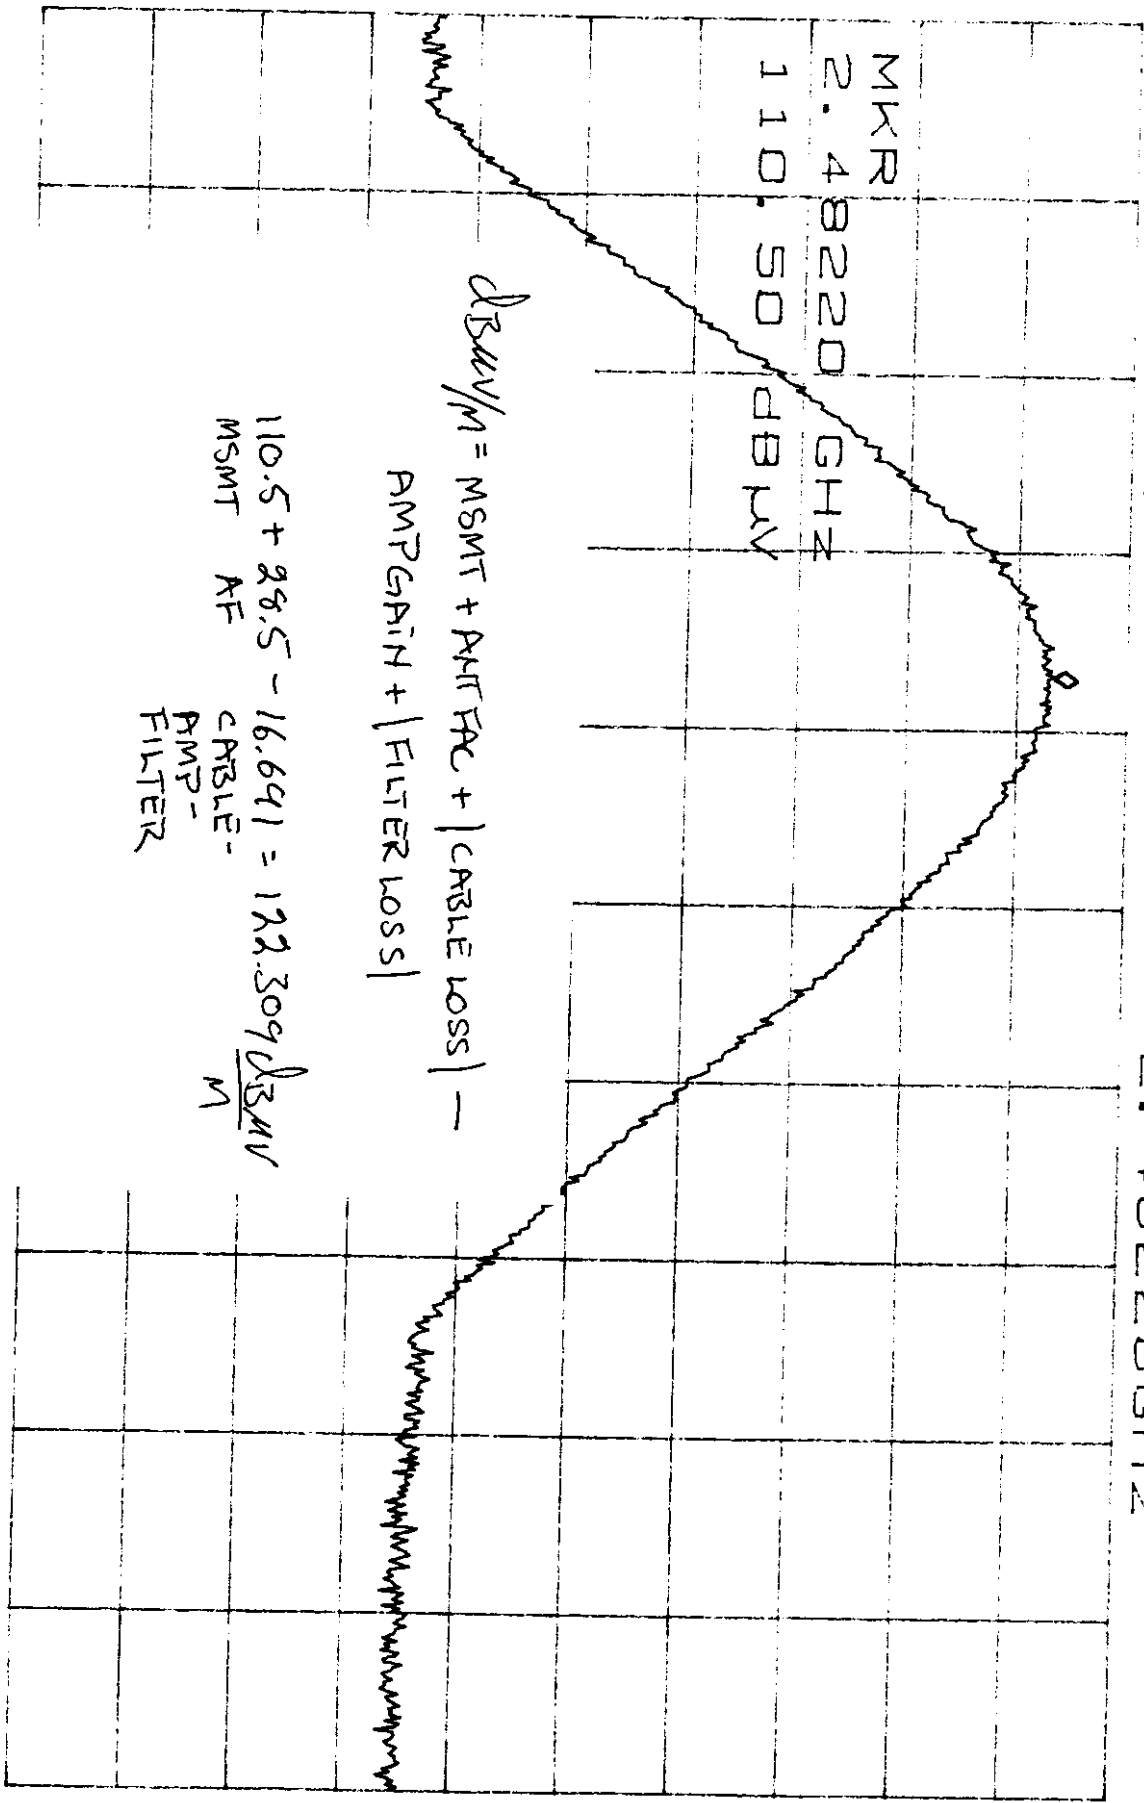

MKR
2.48220 GHz
110.50 dBμV

$$dB\mu V/m = MSMT + AIT FAC + |CABLE LOSS| -$$

$$AMP GAIN + |FILTER LOSS|$$

$$110.5 + 28.5 - 16.641 = 122.309 \frac{dB\mu V}{m}$$

MSMT AF CABLE-
AMP-
FILTER

CENTER 2.48350GHz

*RBW 1.0MHz VBW 1.0MHz

SPAN 10.00MHz

SWP 50ms

"DELTA" MSMT FOR 2.4GHz HIGH
BAND EDGE COMPRIANCE
CH 856


*ATTEN 10dB

ΔMKR 69.50dB

RL 107.00dBμV 10dB/ -1.230MHz

$$122.309 \text{ dBμV} - 69.5 \text{ dB} = 52.809 \text{ dBμV}$$

ΔMKR
-1.230 MHz
69.50 dB

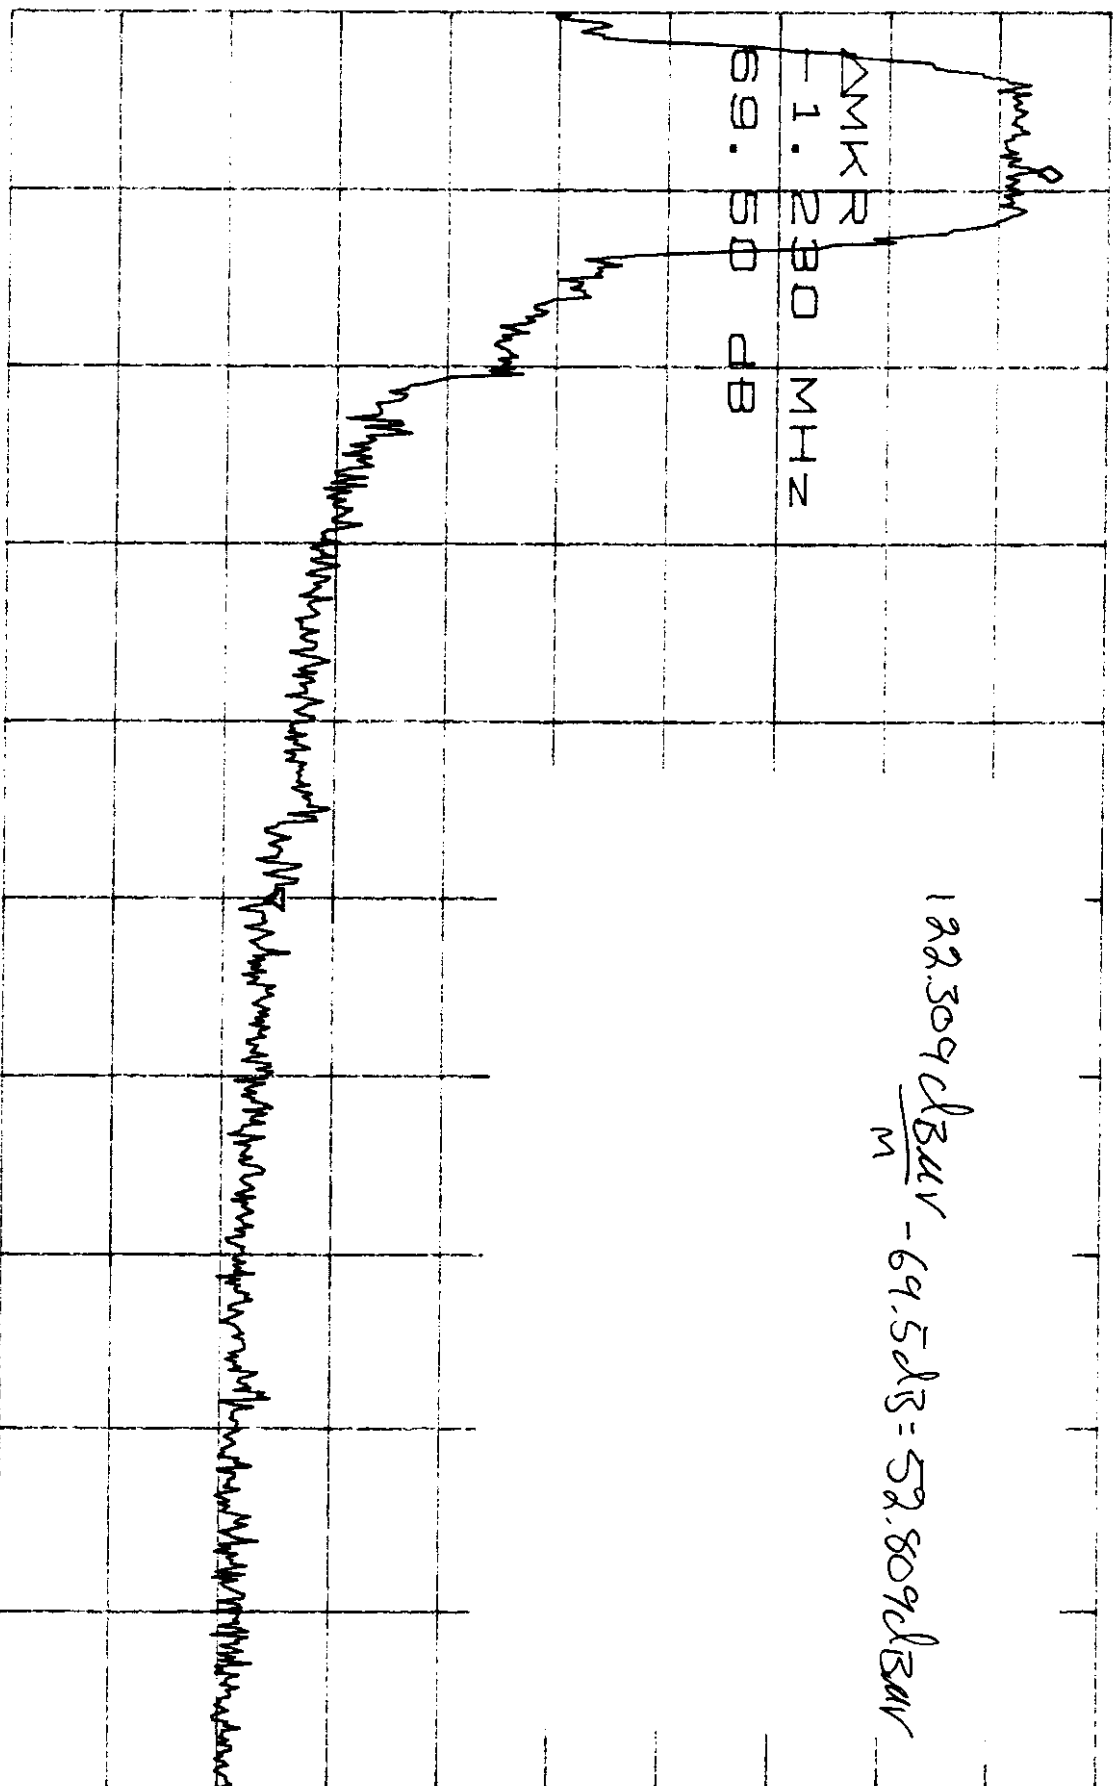

CENTER 2.483500GHz

SPAN 3.000MHz

*RBW 10kHz

VBW 10kHz

SMP 75ms

Electronic Compliance Laboratories, Inc.
1249 Birchwood Ave.
Sunnyvale, CA

Radiated Emissions
Frequency range: 30MHz-1000MHz

3 Meter Open Site
Site Calibrated: June 1997

Government Agency and Limit: FCC Class B

= Quasi-Peak Note: Ignore peak readings when Quasi-Peak reading exists
= Peak

Customer: METRICOM Operator: SHAWN
Date: 03-16-1999 Time: 16:18:12
Temperature Range: 66 Deg F Percent Humidity: 48
U.T.: VIPER NETWORK RADIO
Serial Number: 840100E6
Support Devices:
Serial Number:
C ID:
Exercise Program:
Modifications: None
Report File Name: F:\TESTDATA\9031602.RF

Antenna Type: BICONICAL

TEST REQ	TEST dBuV	ACTUAL dBuV/m	CLASS B LIMIT	VERSUS B LIMIT	TABLE DEGREES	ANTENNA HEIGHT	POLAR- IZATION	DETECTOR Type
=====	=====	=====	=====	=====	=====	=====	=====	=====
6.000	31.0	22.2	40.0	-17.8	120	1.5	H	PK
2.000	33.9	16.6	40.0	-23.4	90	1.5	H	PK
0.000	52.8	42.0	43.5	-1.5	90	1.5	H	PK
0.000	49.1	38.3	43.5	-5.2	90	1.5	H	QP
TE: BB EMISSIONS FROM 115Mhz TO 175Mhz FOLLOWING READINGS ARE BB PEAKS								
5.690	37.2	25.8	43.5	-17.7	90	1.5	H	PK
0.310	44.5	34.4	43.5	-9.1	90	1.5	H	PK
5.430	53.5	43.9	43.5	0.4	90	2.0	H	PK
5.430	51.4	41.8	43.5	-1.7	90	2.0	H	QP
8.900	41.7	32.7	43.5	-10.8	90	2.0	H	PK
1.100	32.7	23.8	43.5	-19.7	90	1.5	H	PK
TE: RESUME NB SCANS								
8.000	41.8	32.9	43.5	-10.6	45	2.0	H	PK
2.000	47.6	39.2	43.5	-4.3	45	2.0	H	PK
2.000	45.7	37.3	43.5	-6.2	45	2.0	H	QP
8.000	34.3	26.5	43.5	-17.0	90	1.5	H	PK
8.000	28.9	21.3	46.0	-24.7	90	1.5	H	PK
0.000	43.0	35.5	46.0	-10.5	120	1.5	H	PK
2.000	43.7	36.3	46.0	-9.7	90	1.5	H	PK
0.000	47.7	40.8	46.0	-5.2	90	1.5	H	PK
0.000	44.8	37.9	46.0	-8.1	90	1.5	H	QP
0.000	42.7	37.0	46.0	-9.0	75	1.5	H	PK
0.000	49.3	45.2	46.0	-0.8	90	1.5	H	PK

8.000	46.2	42.1	46.0	-3.9	90	1.5	H	QP
4.000	37.9	31.0	46.0	-15.0	90	1.5	V	PK
0.000	42.2	34.7	46.0	-11.3	120	1.5	V	PK
2.000	45.0	36.6	43.5	-6.9	150	1.5	V	PK
0.000	42.3	33.6	43.5	-9.9	90	1.5	V	PK
8.000	48.6	39.7	43.5	-3.8	120	2.0	V	PK

te: 03-16-1999
 U.T.: VIPER NETWORK RADIO
 rial Number: 840100E6
 tenna Type: BICONICAL

TEST REQ	TEST dBuV	ACTUAL dBuV/m	CLASS B LIMIT	VERSUS B LIMIT	TABLE DEGREES	ANTENNA HEIGHT	POLAR- IZATION	DETECTOR Type
8.000	46.3	37.4	43.5	-6.1	120	2.0	V	QP
4.000	51.6	42.0	43.5	-1.5	120	1.5	V	PK
4.000	49.7	40.1	43.5	-3.4	120	1.5	V	QP
0.000	52.4	41.6	43.5	-1.9	120	1.5	V	PK
0.000	50.6	39.8	43.5	-3.7	120	1.5	V	QP

CHANGED ANTENNA TO LOG PERIODIC

6.000	29.6	20.6	46.0	-25.4	90	1.5	H	PK
4.000	32.0	24.1	46.0	-21.9	150	2.0	H	PK
2.000	37.3	30.2	46.0	-15.8	45	2.0	H	PK
6.000	32.2	25.6	46.0	-20.4	75	2.0	H	PK
0.000	33.5	27.8	46.0	-18.2	90	2.0	H	PK
8.000	37.7	32.9	46.0	-13.1	90	1.5	H	PK
6.000	41.4	37.4	46.0	-8.6	90	1.5	H	PK
0.000	36.2	32.6	46.0	-13.4	90	1.5	H	PK
4.000	42.4	39.1	46.0	-6.9	90	1.5	H	PK
2.000	44.0	42.1	46.0	-3.9	120	1.5	H	PK
2.000	42.5	40.6	46.0	-5.4	120	1.5	H	QP
6.000	34.0	32.7	46.0	-13.3	90	1.5	H	PK
0.000	35.8	34.6	46.0	-11.4	75	1.0	H	PK
4.000	37.3	36.1	46.0	-9.9	90	1.0	H	PK
4.000	34.3	33.1	46.0	-12.9	120	1.0	V	PK
2.000	38.5	36.6	46.0	-9.4	75	1.0	V	PK
4.000	37.3	34.0	46.0	-12.0	150	1.5	V	PK
0.000	37.0	33.4	46.0	-12.6	150	1.5	V	PK
6.000	45.4	41.4	46.0	-4.6	200	1.5	V	PK
6.000	42.3	38.3	46.0	-7.7	200	1.5	V	QP
8.000	32.0	27.2	46.0	-18.8	200	1.5	V	PK
0.000	36.0	30.3	46.0	-15.7	180	1.5	V	PK
2.000	34.3	27.2	46.0	-18.8	180	1.5	V	PK
4.000	38.7	30.8	46.0	-15.2	150	1.5	V	PK
0.000	33.5	25.0	46.0	-21.0	150	1.5	V	PK
6.000	33.3	24.3	46.0	-21.7	45	1.5	V	PK

Electronic Compliance Laboratories, Inc.
1249 Birchwood Ave.
Sunnyvale, CA

Radiated Emissions
Frequency range: 30MHz-1000MHz

3 Meter Open Site
Site Calibrated: June 1997

Government Agency and Limit: FCC Class B

= Quasi-Peak Note: Ignore peak readings when Quasi-Peak reading exists
= Peak

Customer: METRICOM Operator: SHAWN
Date: 03-16-1999 Time: 14:01:57
Temperature Range: 68 Deg F Percent Humidity: 50
U.T.: VIPER BETA ETHERNET RADIO W/ ANTENNA
Serial Number: 840100EC
Support Devices:
Serial Number:
C ID:
Exercise Program:
Modifications: None
Report File Name: F:\TESTDATA\9031601.RF

Antenna Type: BICONICAL

TEST REQ	TEST dBuV	ACTUAL dBuV/m	CLASS B LIMIT	VERSUS B LIMIT	TABLE DEGREES	ANTENNA HEIGHT	POLAR- IZATION	DETECTOR Type
=====	=====	=====	=====	=====	=====	=====	=====	=====
TEST: BB EMISSIONS FROM 35MHZ TO 60 MHZ FOLLOWING READINGS ARE BB PEAKS								
7.150	32.0	22.8	40.0	-17.2	180	1.5	H	PK
3.250	41.7	30.3	40.0	-9.7	180	1.5	H	PK
6.050	39.6	24.0	40.0	-16.0	180	2.0	H	PK
TEST: RESUME NB SCANS								
4.000	39.0	29.4	43.5	-14.1	90	1.5	H	PK
8.000	35.0	26.1	43.5	-17.4	120	2.0	H	PK
0.000	36.1	27.4	43.5	-16.1	90	1.5	H	PK
6.000	30.3	22.5	43.5	-21.0	120	1.5	H	PK
8.000	29.0	21.4	46.0	-24.6	180	2.0	H	PK
0.000	41.0	33.5	46.0	-12.5	200	1.5	H	PK
2.000	38.5	31.1	46.0	-14.9	180	2.0	H	PK
4.000	34.5	27.6	46.0	-18.4	180	1.5	H	PK
6.000	33.2	27.5	46.0	-18.5	120	1.5	H	PK
8.000	45.4	41.3	46.0	-4.7	220	1.5	H	PK
8.000	42.3	38.2	46.0	-7.8	220	1.5	H	QP
9.990	35.8	33.0	46.0	-13.0	90	1.5	H	PK
9.990	36.5	33.7	46.0	-12.3	45	1.5	H	PK
8.000	38.8	34.7	46.0	-11.3	45	1.5	H	PK
6.000	28.8	23.1	46.0	-22.9	90	1.5	H	PK
4.000	31.0	24.1	46.0	-21.9	90	1.5	H	PK
2.000	33.6	26.2	46.0	-19.8	75	1.5	H	PK
0.000	38.7	31.2	46.0	-14.8	100	1.5	H	PK
6.000	33.8	26.0	43.5	-17.5	150	1.5	H	PK

CHANGED ANTENNA TO LOG PERIODIC

6.000	35.6	26.6	46.0	-19.4	120	1.5	H	PK
0.000	32.5	24.0	46.0	-22.0	90	1.5	H	PK
4.000	33.7	25.8	46.0	-20.2	45	1.5	H	PK
2.000	34.7	27.6	46.0	-18.4	120	1.5	H	PK
6.000	32.1	25.5	46.0	-20.5	90	1.5	H	PK
6.000	39.0	32.4	46.0	-13.6	90	1.5	V	PK
2.000	40.0	32.9	46.0	-13.1	120	1.5	V	PK
6.000	35.3	26.3	46.0	-19.7	180	1.5	V	PK

2.46GHz, CH0, 20dB BW, 7/4 DBV, K2


MKR .50dB RADIO

ATTEN 10dB
RL 0dBm

10dB/

-313KHz

MKR
-313 KHz
D
.50 dB

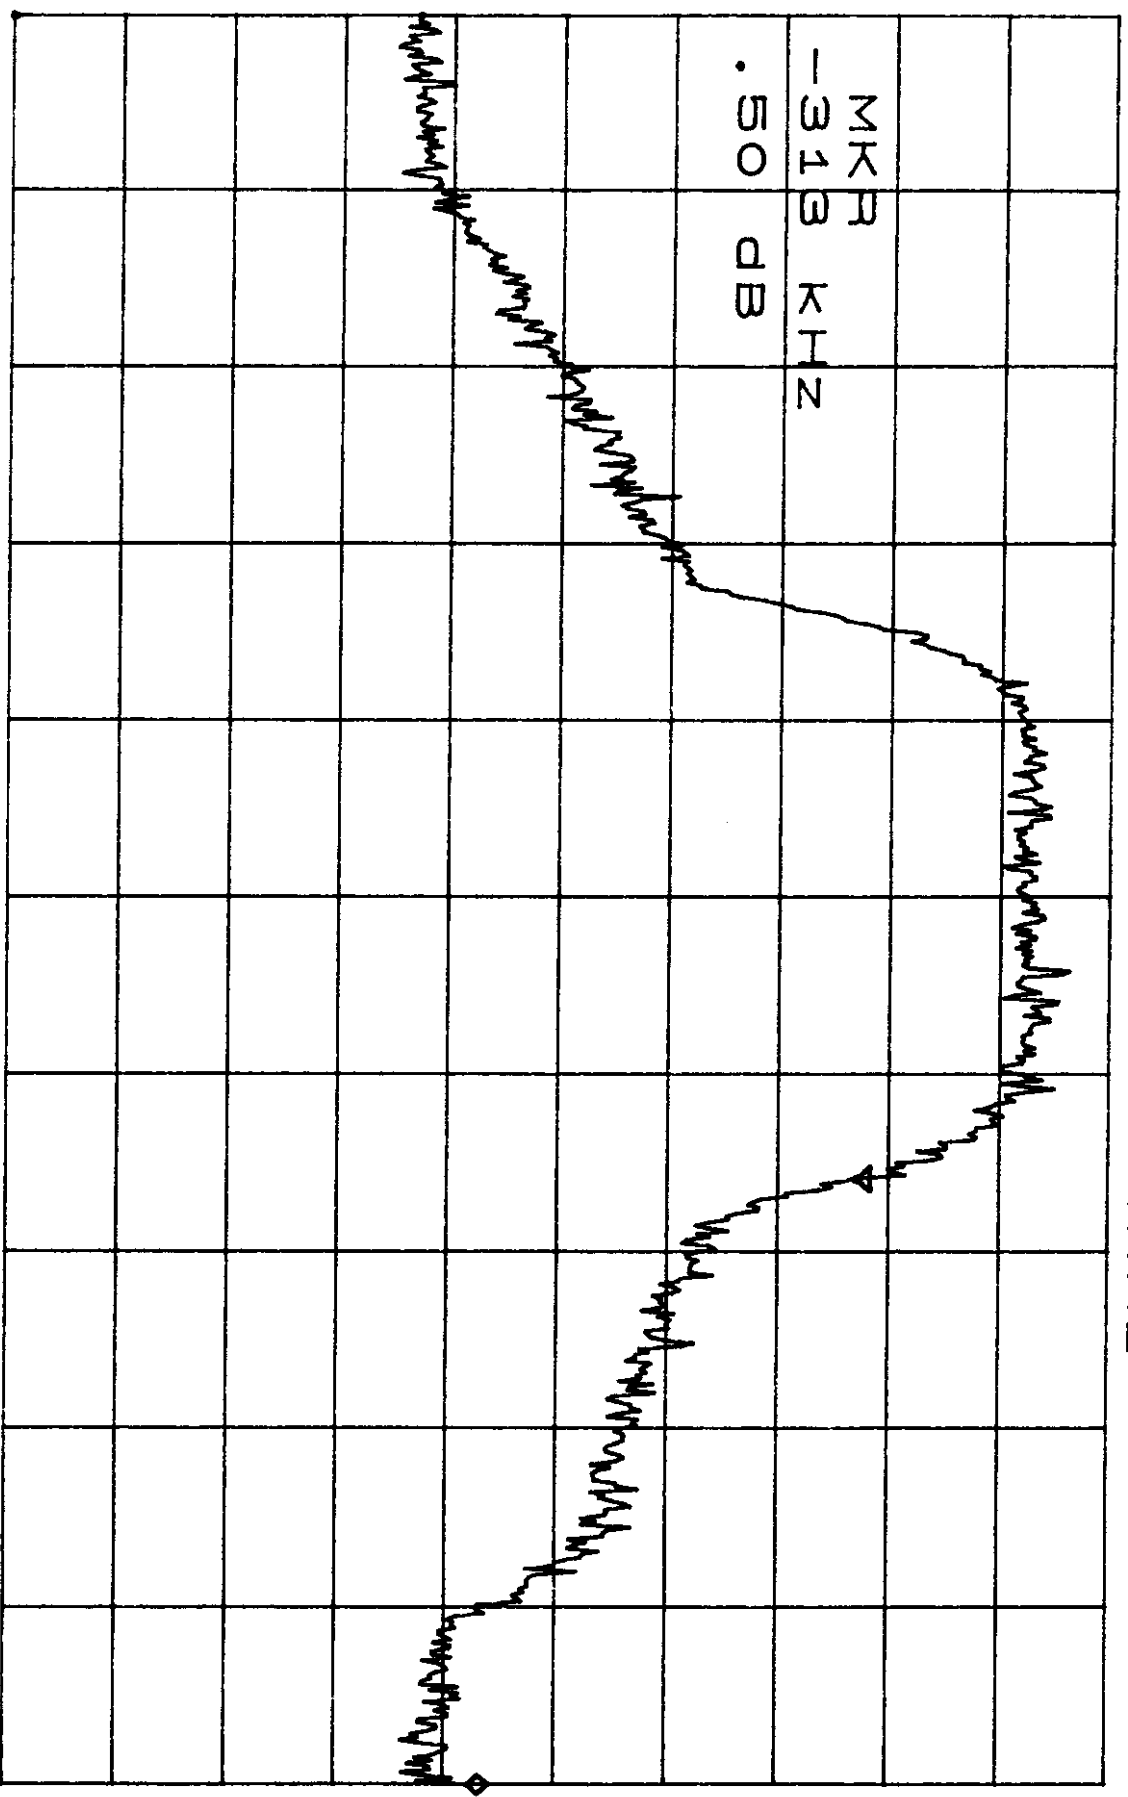

CENTER 2.400320GHz

SPAN 1.000MHz

*RBW 3.0KHz

VBW 3.0KHz


SWB 380ms

ATTEN 10dB
RL 0dBm

10dB/

2.4GHz, CH 130, X0 dBm, 1/4 DBK K2
MKR .83dB RDSIC

MK
-317 KHz
D .83 dB

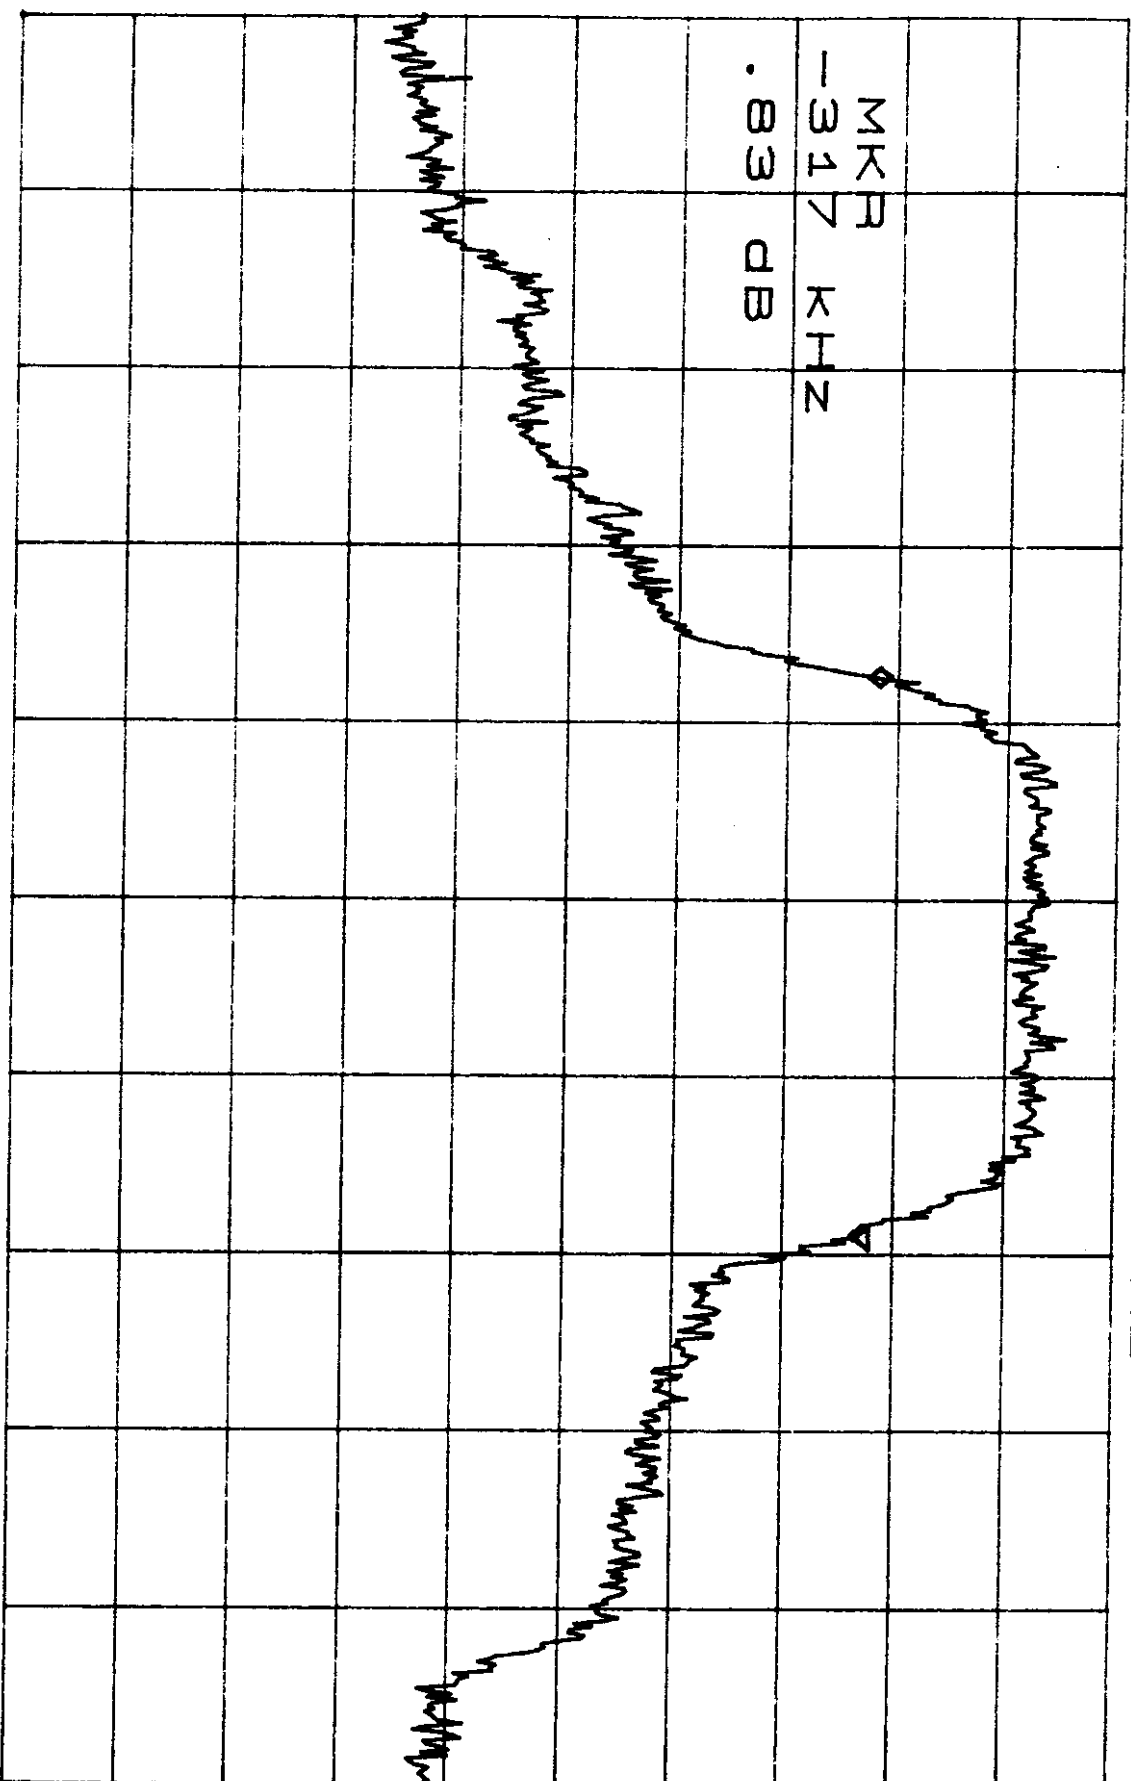

CENTER 2.441892GHz

SPAN 1.000MHz

*RBW 3.0KHz

VBW 3.0KHz

SWP 380dB

2.16GHZ, 30dB BW, CH 856, 7/10/54 X2


MKR . 34dB Radio

ATTEN 10dB
RL 0dBm

10dB/

-320KHZ

ΣX
-320 KHZ
D . 34 dB

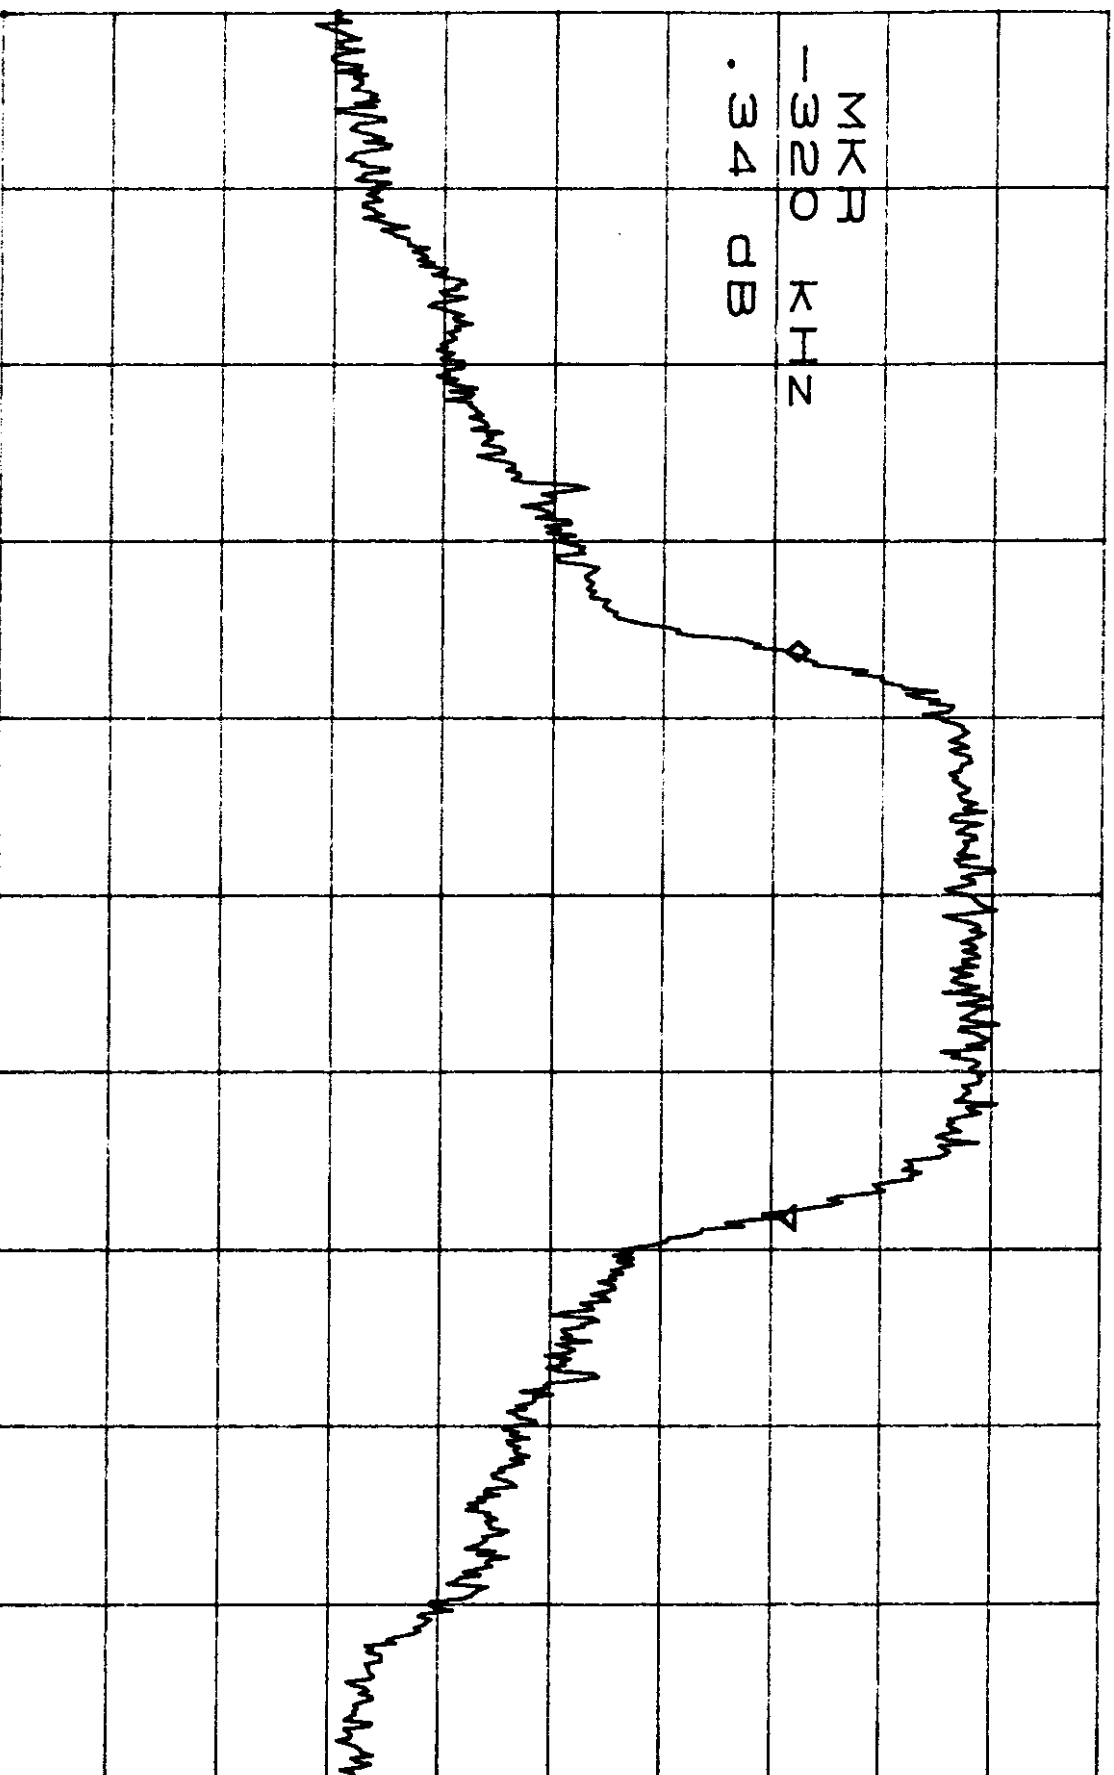

CENTER 2.482220GHZ

SPAN 1.0000MHZ

*RBW 3.0KHZ

VBW 3.0KHZ

SMP 280ms

900 MHz, CHC, 30dB BW, 7/11 DSK X2

ATTEN 10dB

RL 0dBm


10dB/

1340KHz

MARK - 1.16dB Radio

MARK
- 310 KHz
- 1.16 dB

D

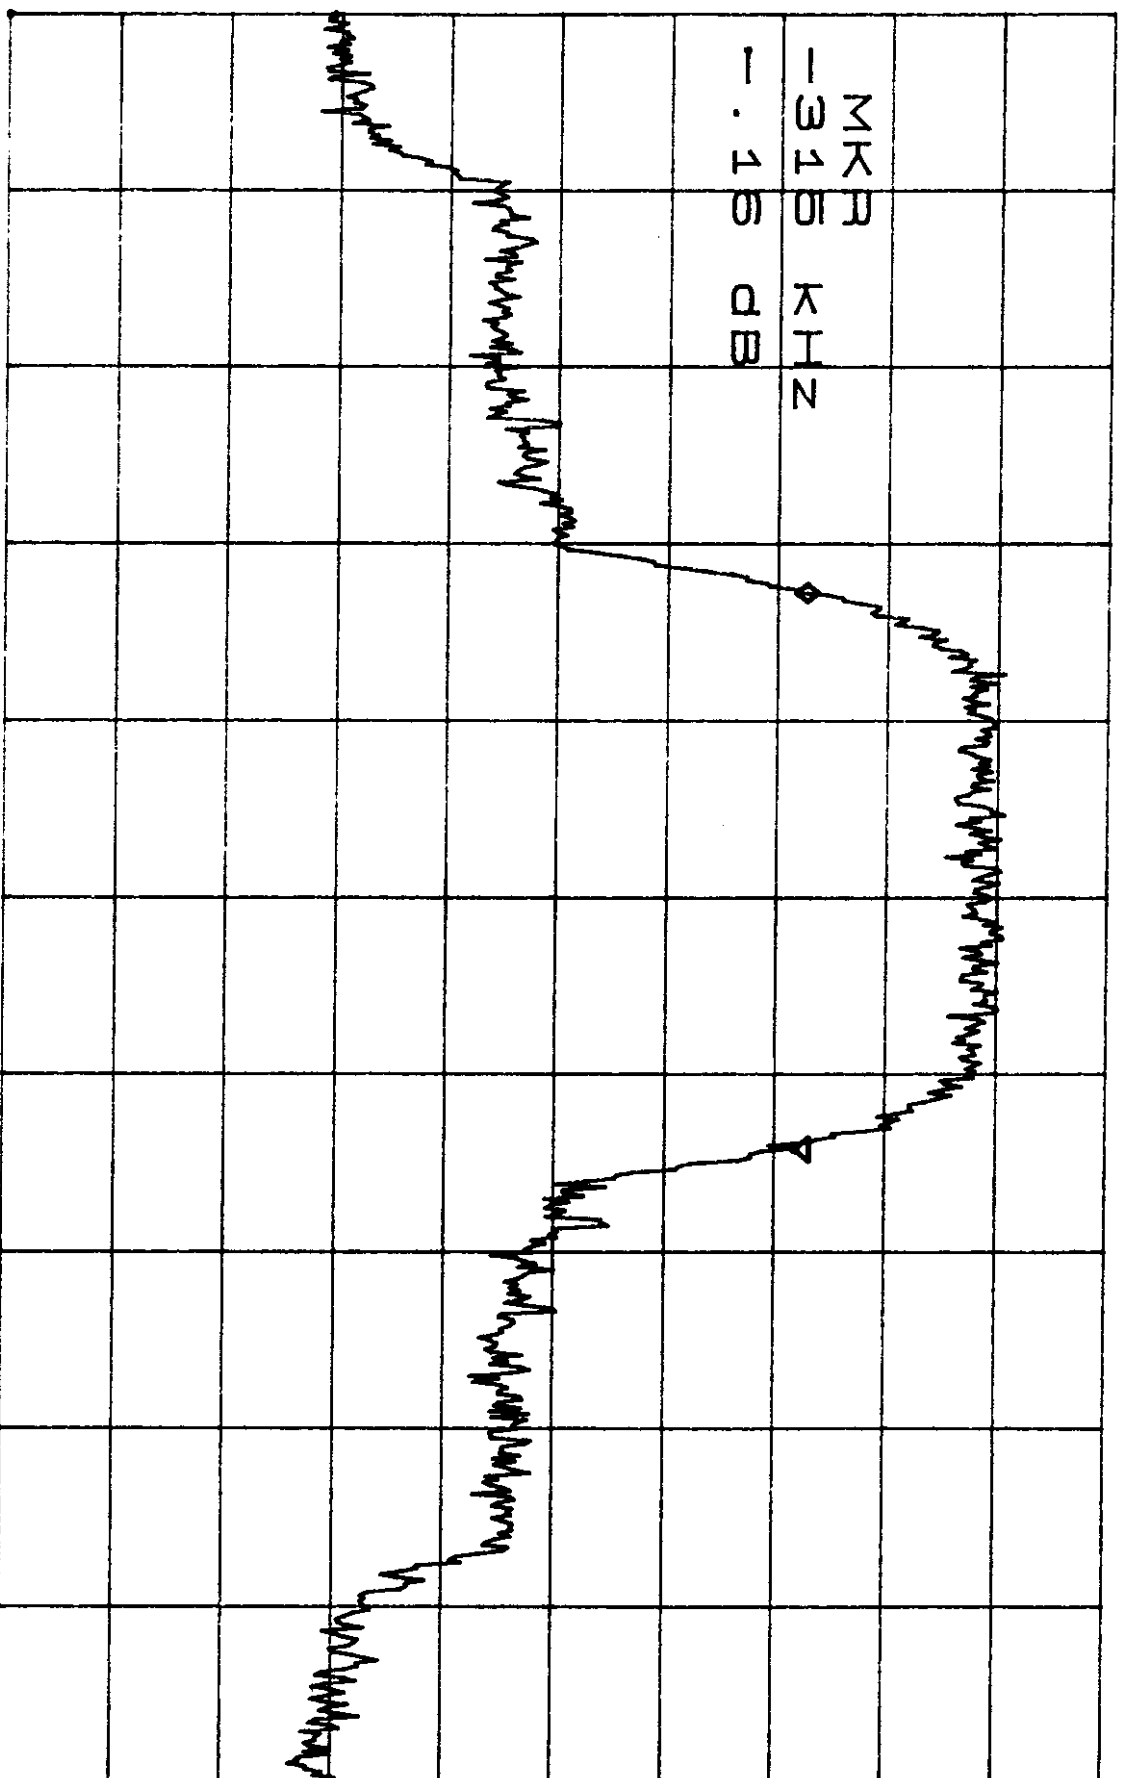

CENTER 902.098MHz

SPAN 1.000MHz

*RBW 3.0KHz


*VBW 1.0KHz

SWB 810ms

400MHz, CH25, 20dB E.W., 1/4 DTSV x 2

ATTEN 10dB
RL 0dBm
10dB/
MKR -1.00dB Radio
-317KHz

ΣK
1317 KIN
-1.00 dB
D

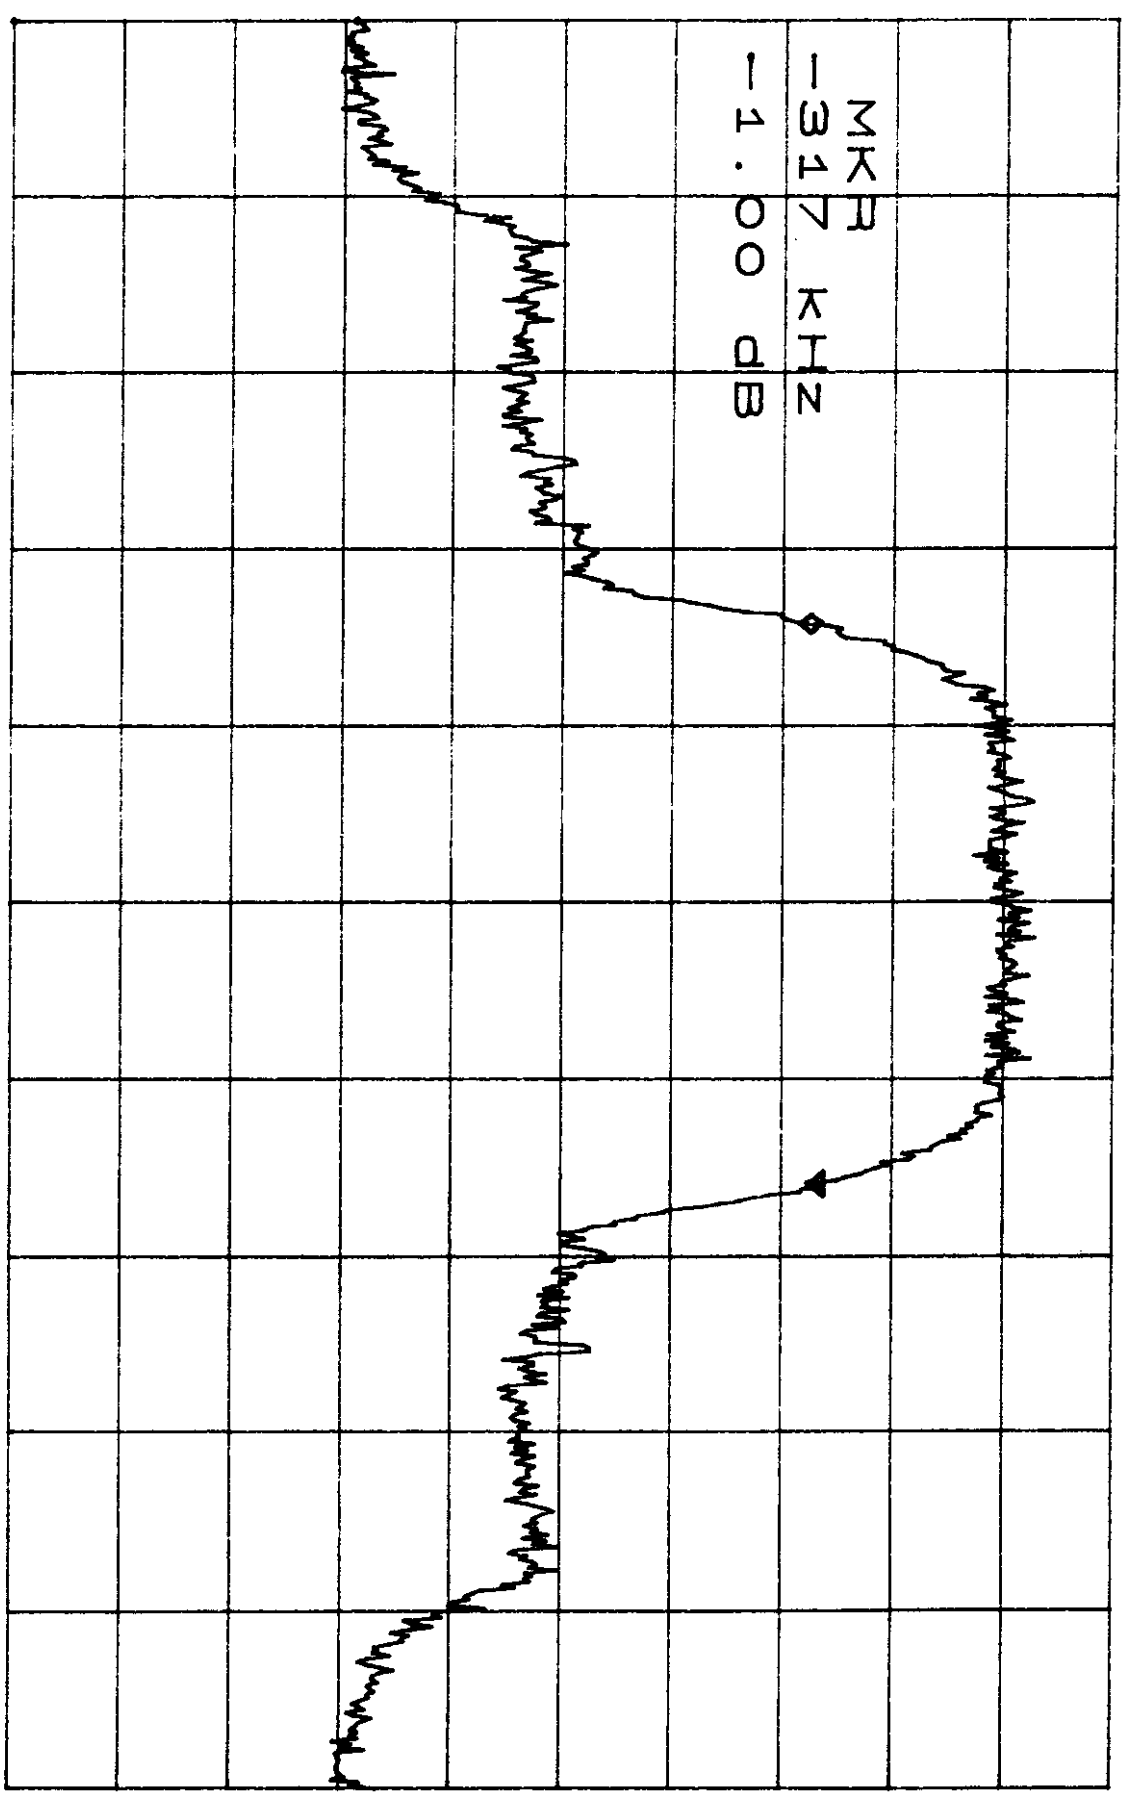

CENTER 914.080MHz
SPAN 1.000MHz
*RBW 3.0KHz *VBW 1.0KHz
SMP 840ms


900MHz, CH161, 30dB BW, 1/4 DTXK2

ATTEN 10dB
RL 0dBm

10dB/

MARK -1.500dB RADIO

MK
-313 KHz
D
-1.50 dB

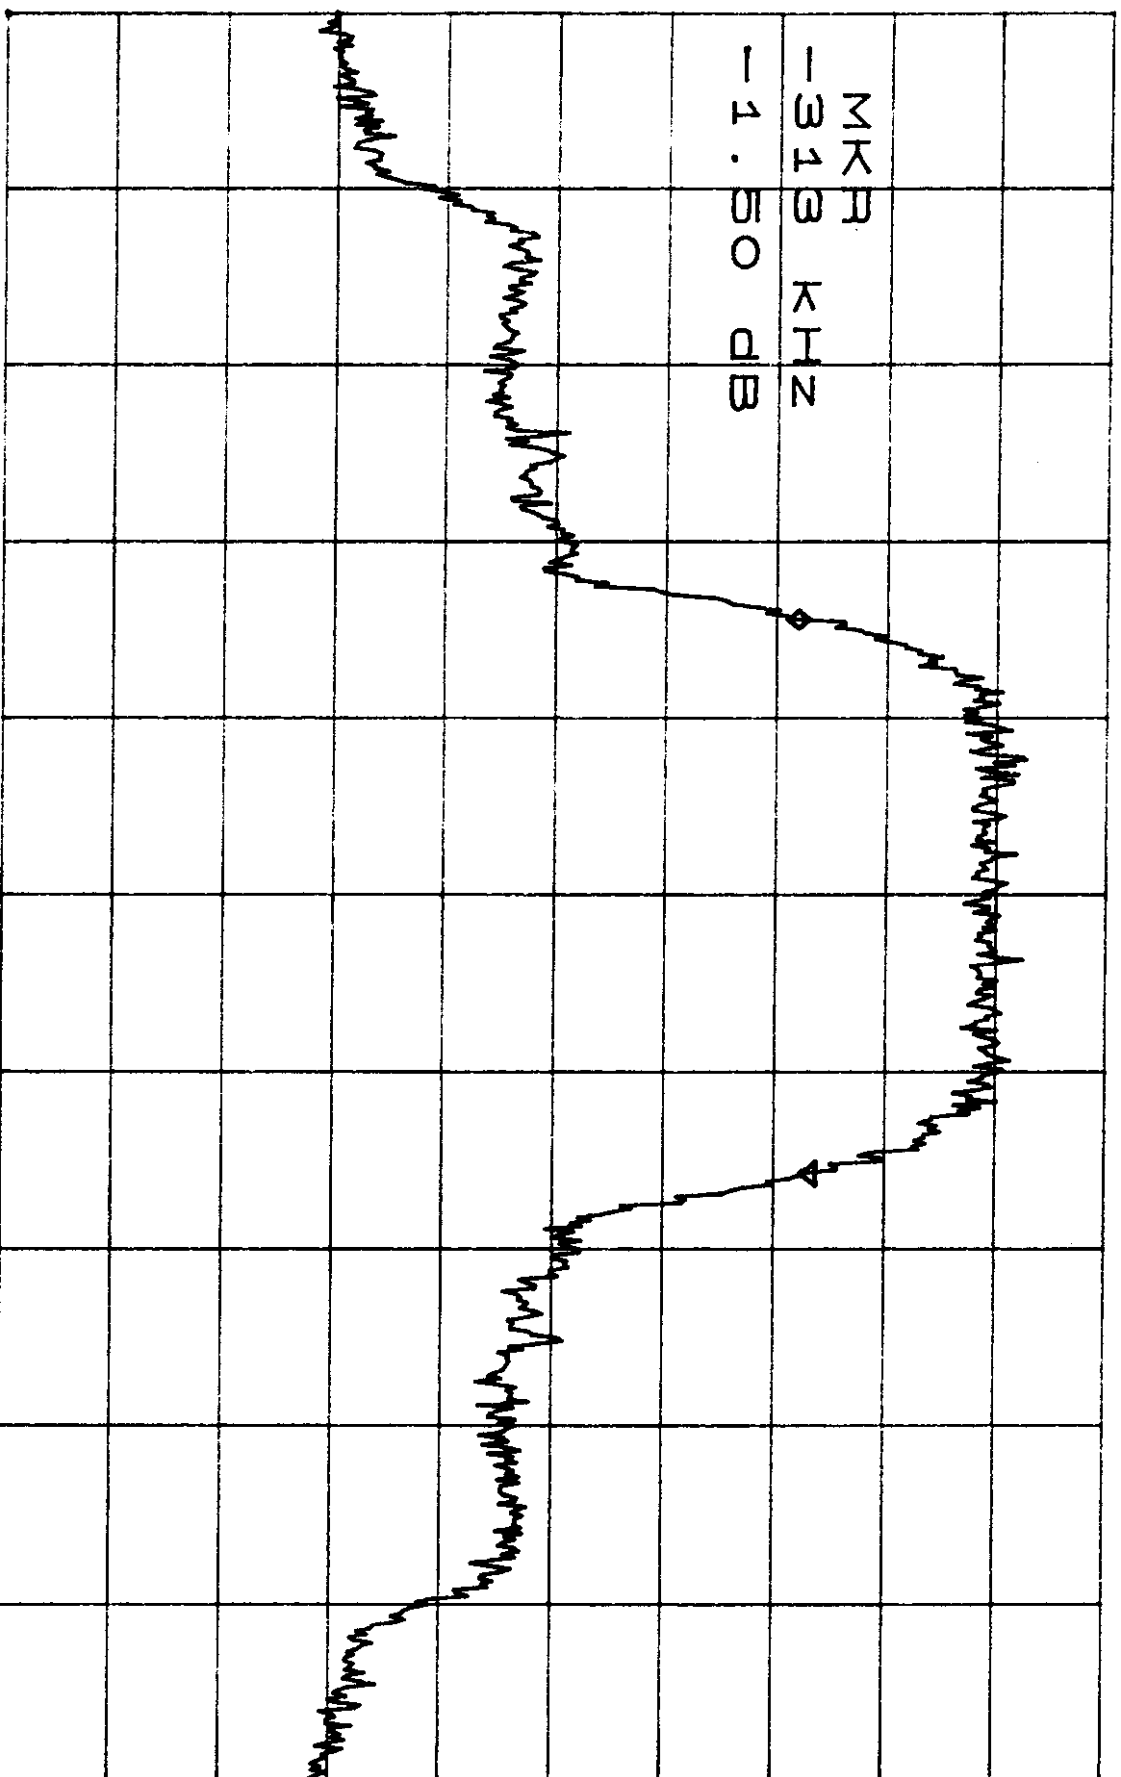

CENTER 927.840MHz

SPAN 1.000MHz

*RBW 3.0KHz

*VBW 1.0KHz

SMB 840ms


2.46, CHD, 200830, 1/4 DP5K X2

ATTEN 10DB
RL 0DBE

10DB/

MARK .500DB ENET
-340KIN

Σ
1000
LIN
D

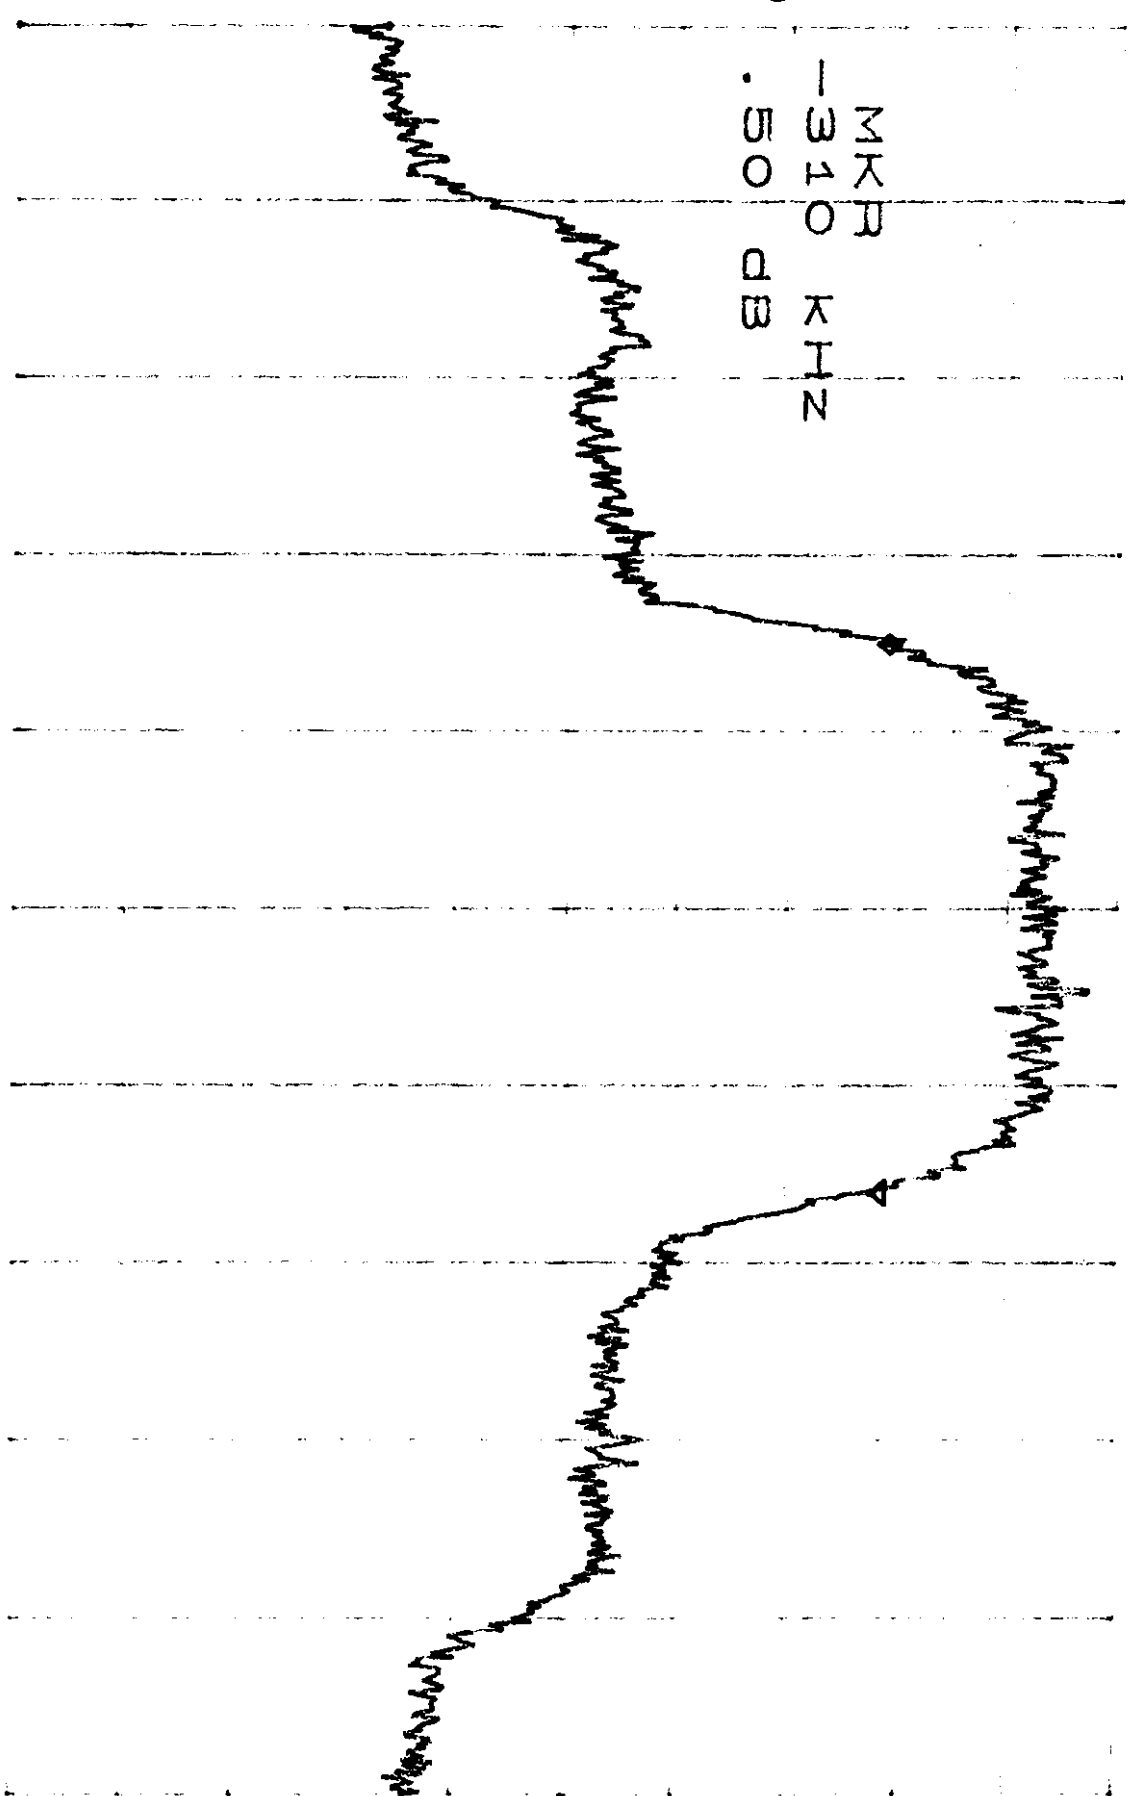


CENTER 2.400320GHZ

SPAN 1.000MHZ

2. Hg+Z, CH₂O, NO₂SO₂, 1/4 H₂SO₄ x 2

ATTEN 400B
FL 000B
400B/
NYN . 000B
-347KIN
IN/ET

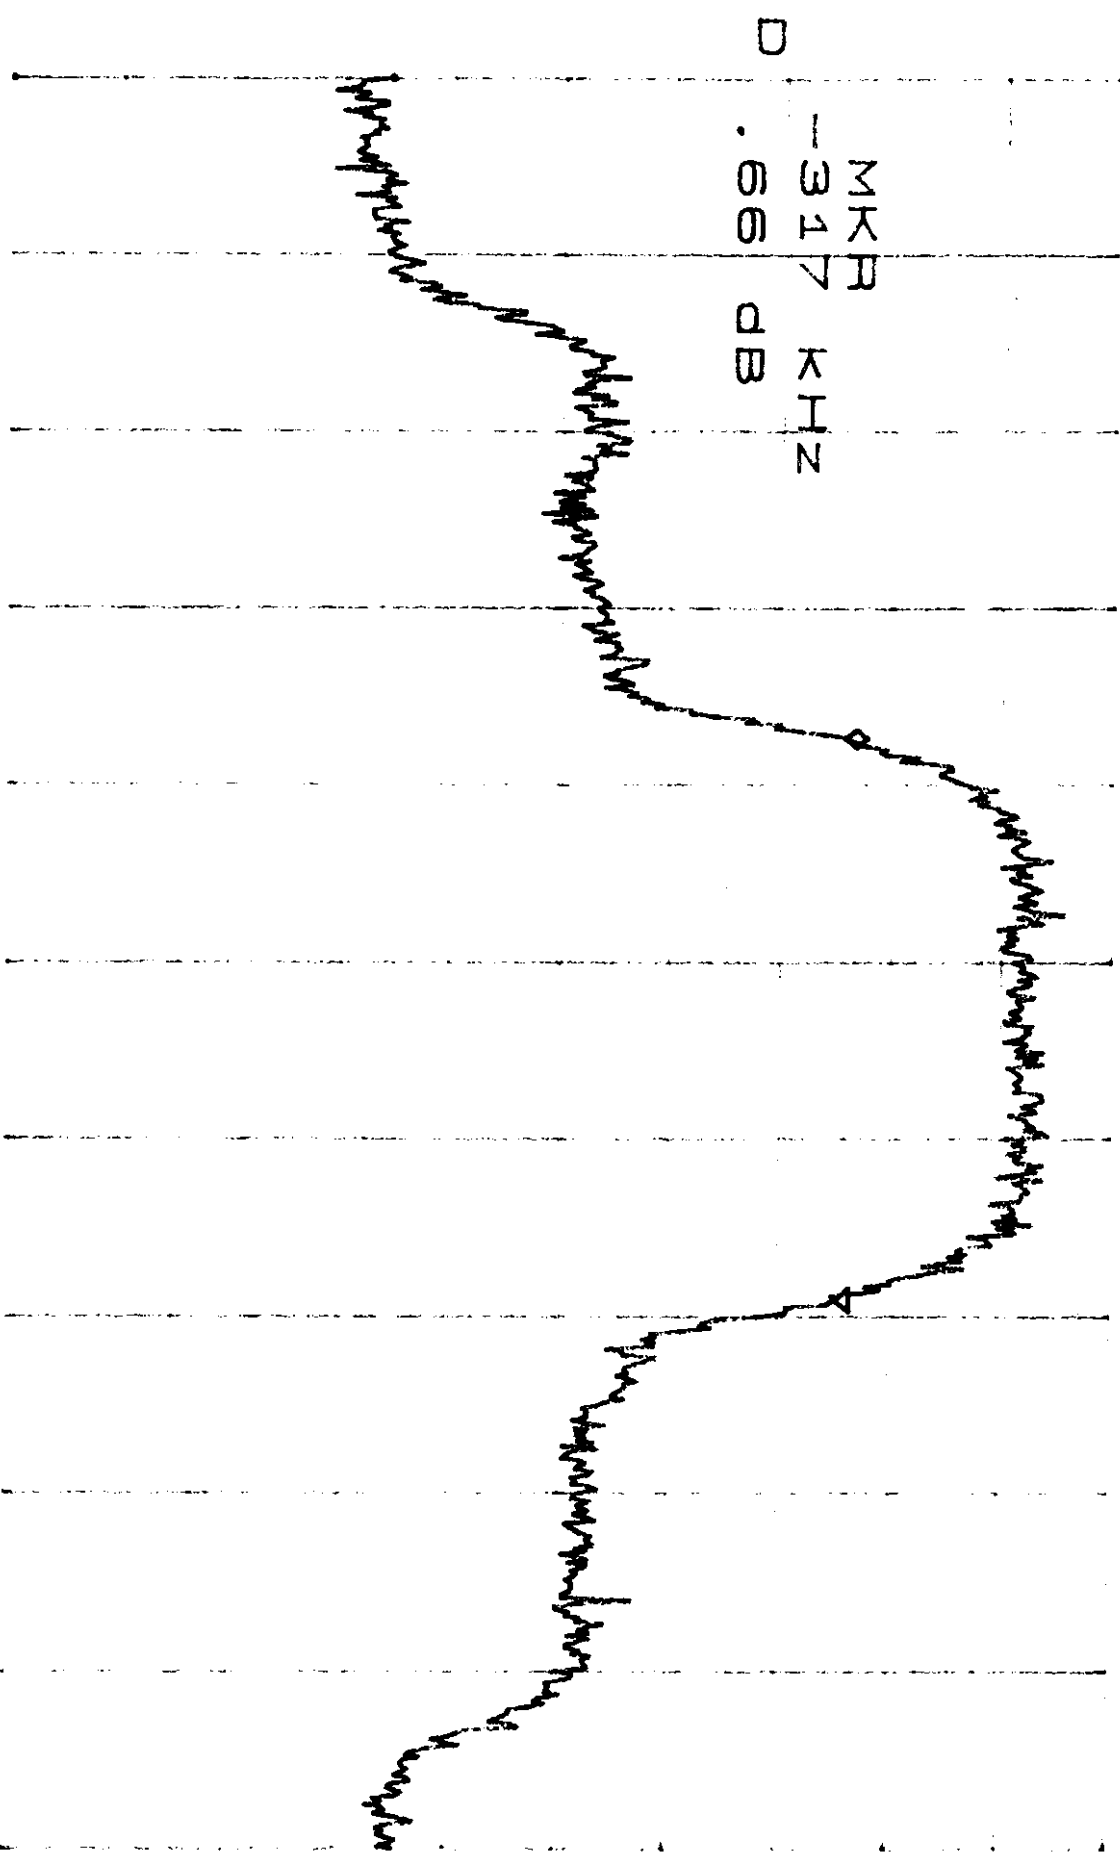

U.S. DEPARTMENT OF JUSTICE
FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D. C. 20535

2.4G, CH 255, 20dBZV, 7/4 DSK X2

ATTEN 400B
PL 00B


100B /

ΣK 0 . 100B ENET
1040K IN

ΣK 0
1040
00B
LIN

CENTER 2.481930GHZ

SPAN 1.000MHZ

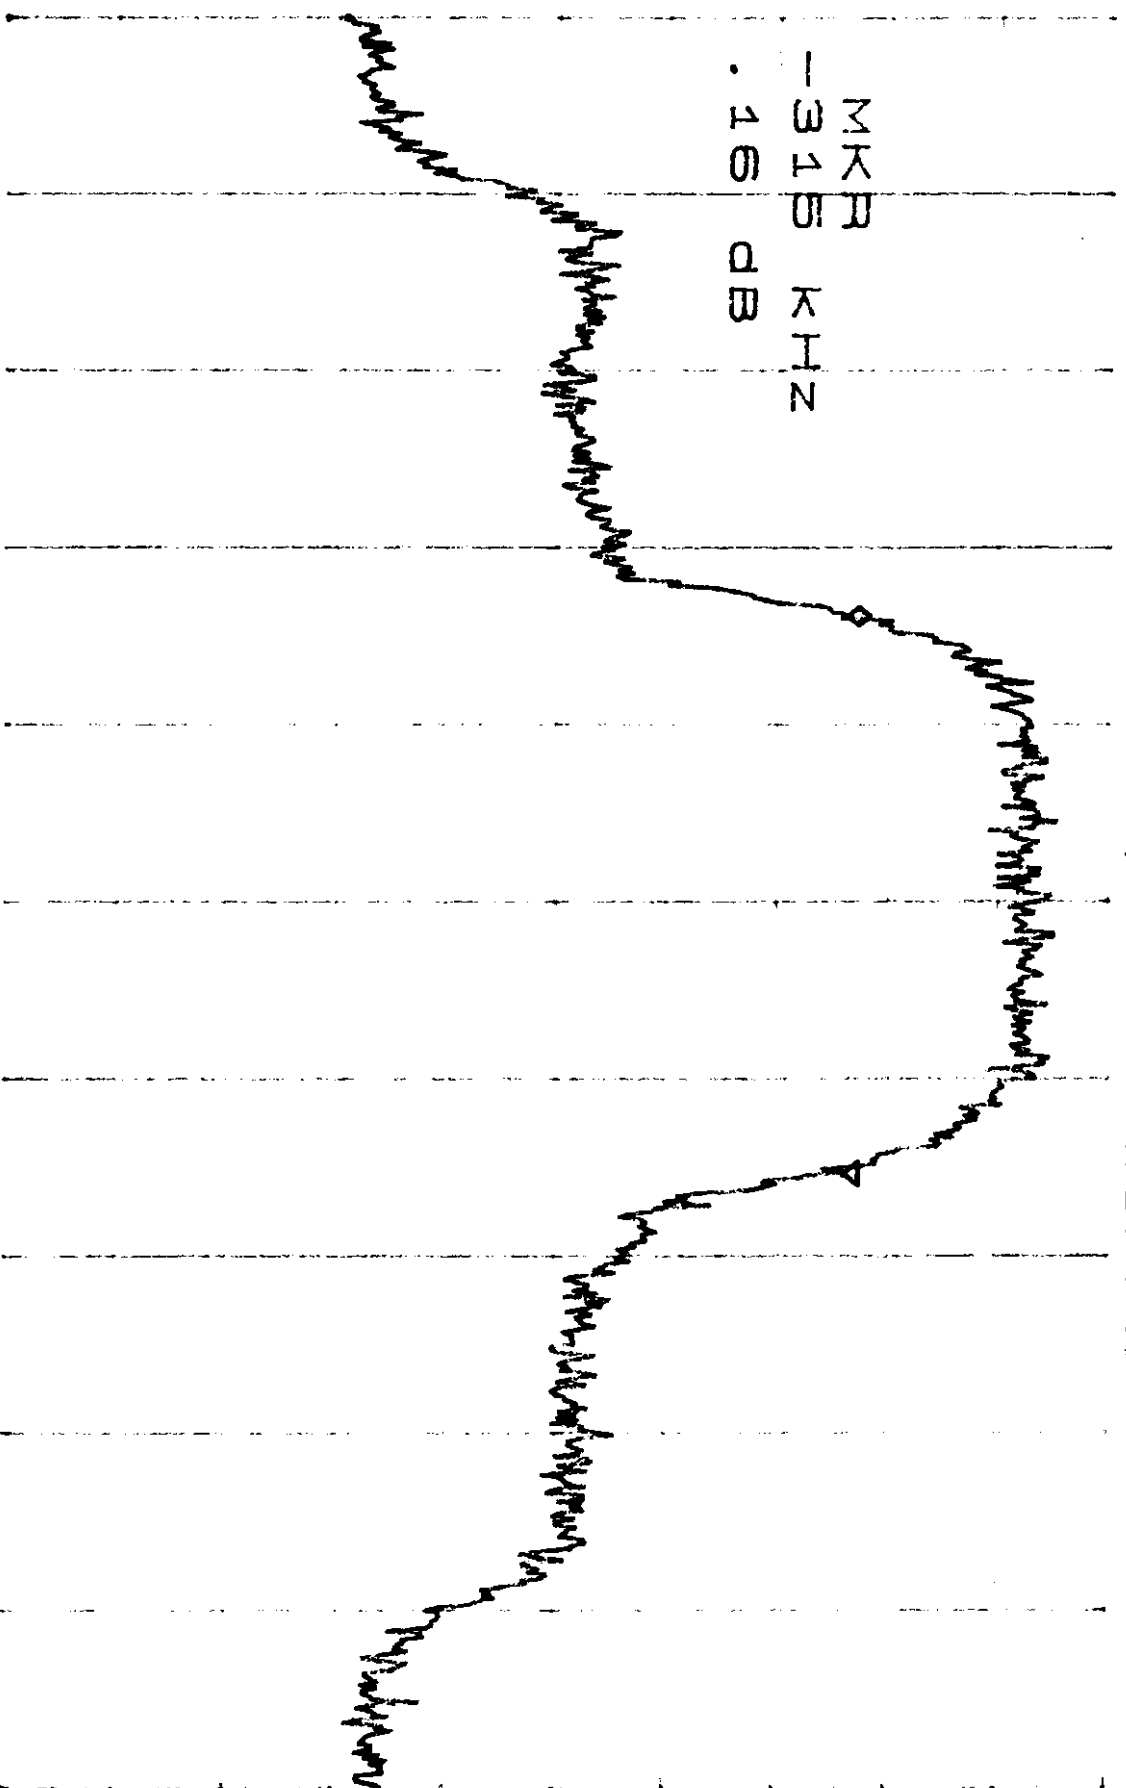


2.HG, CH₃O, 20dB BW, 16QAMx2

ATTEN 30DB
RL 0DB

30DB/

342KIN 1.50DB ENET

Σ 342KIN
1.50DB
D

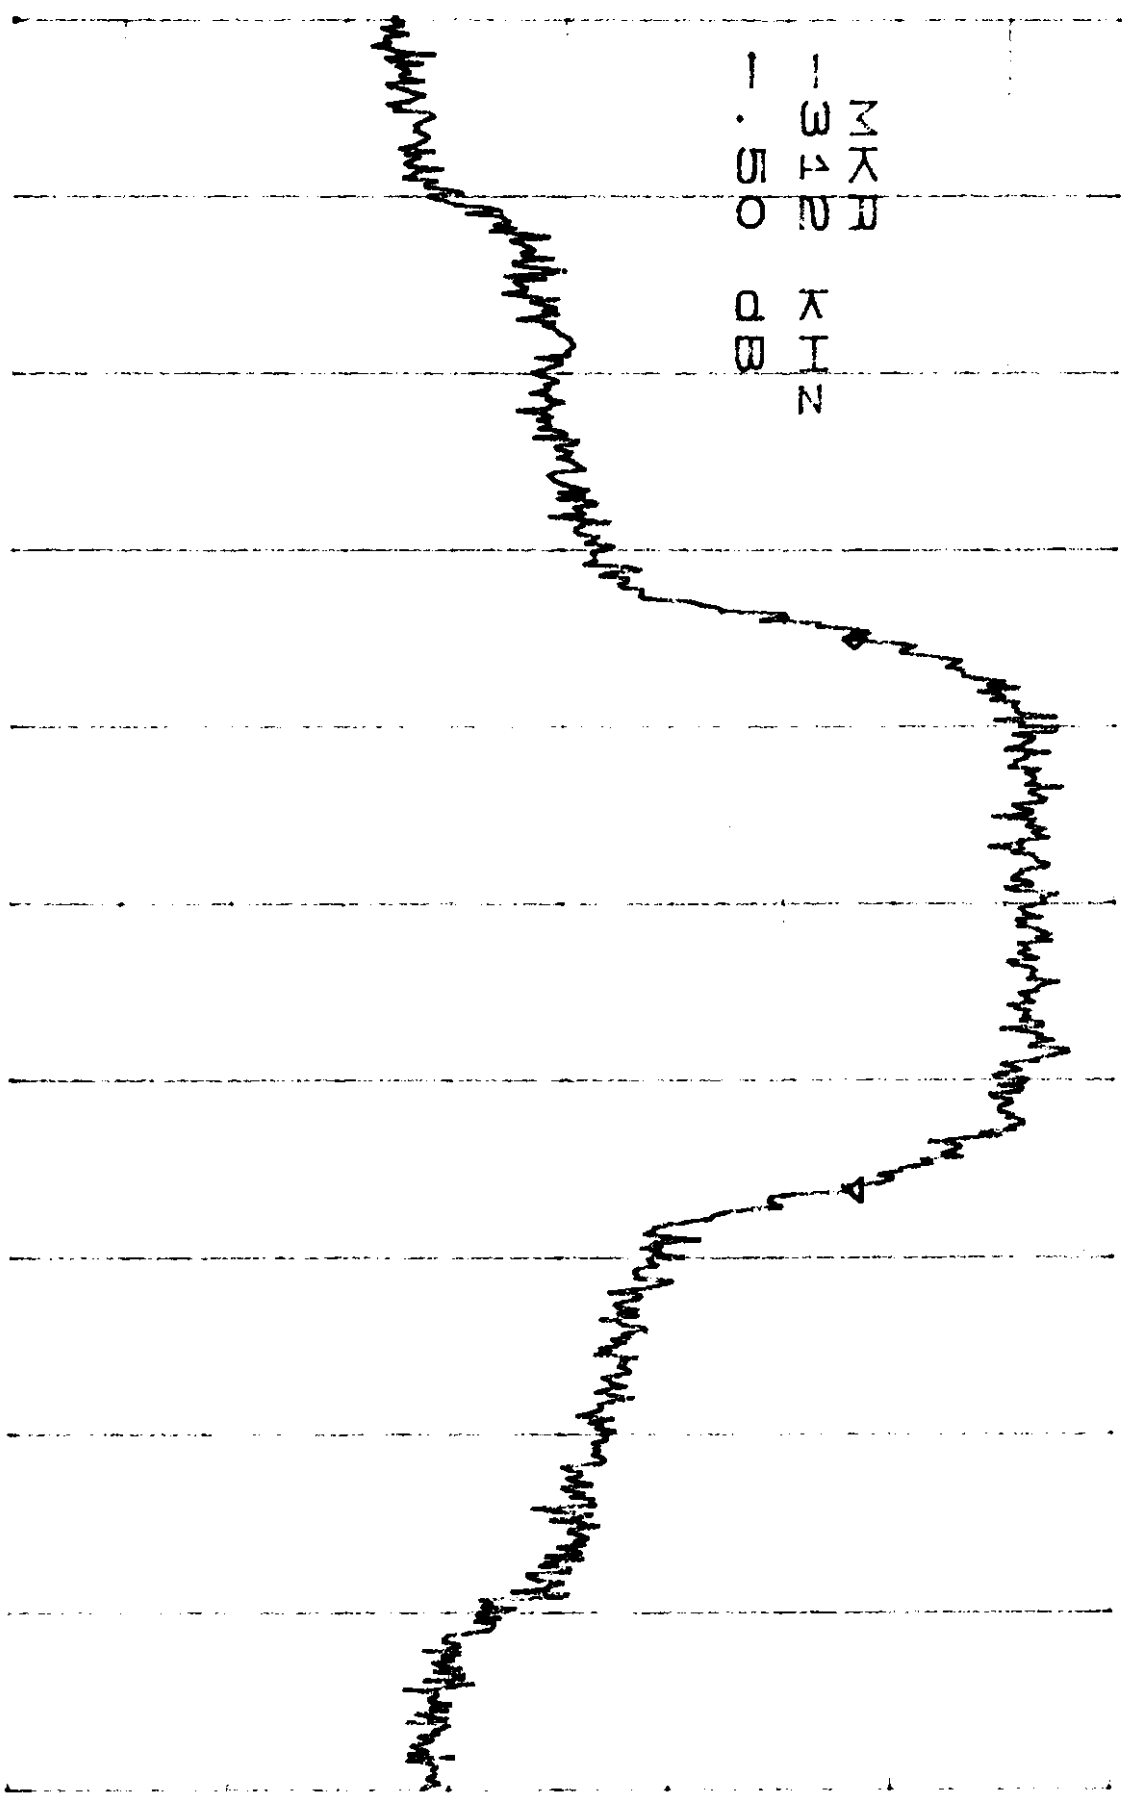

CENTER 2.400320GHZ

SPAN 1.000MHZ


2-HG, CH 150, 20dB BW, 16QAM X2

ATTEN 40DB
RL 0DBE

40DB/

MARK .17DB ENET

Σ K IN
1040
D .17 DB

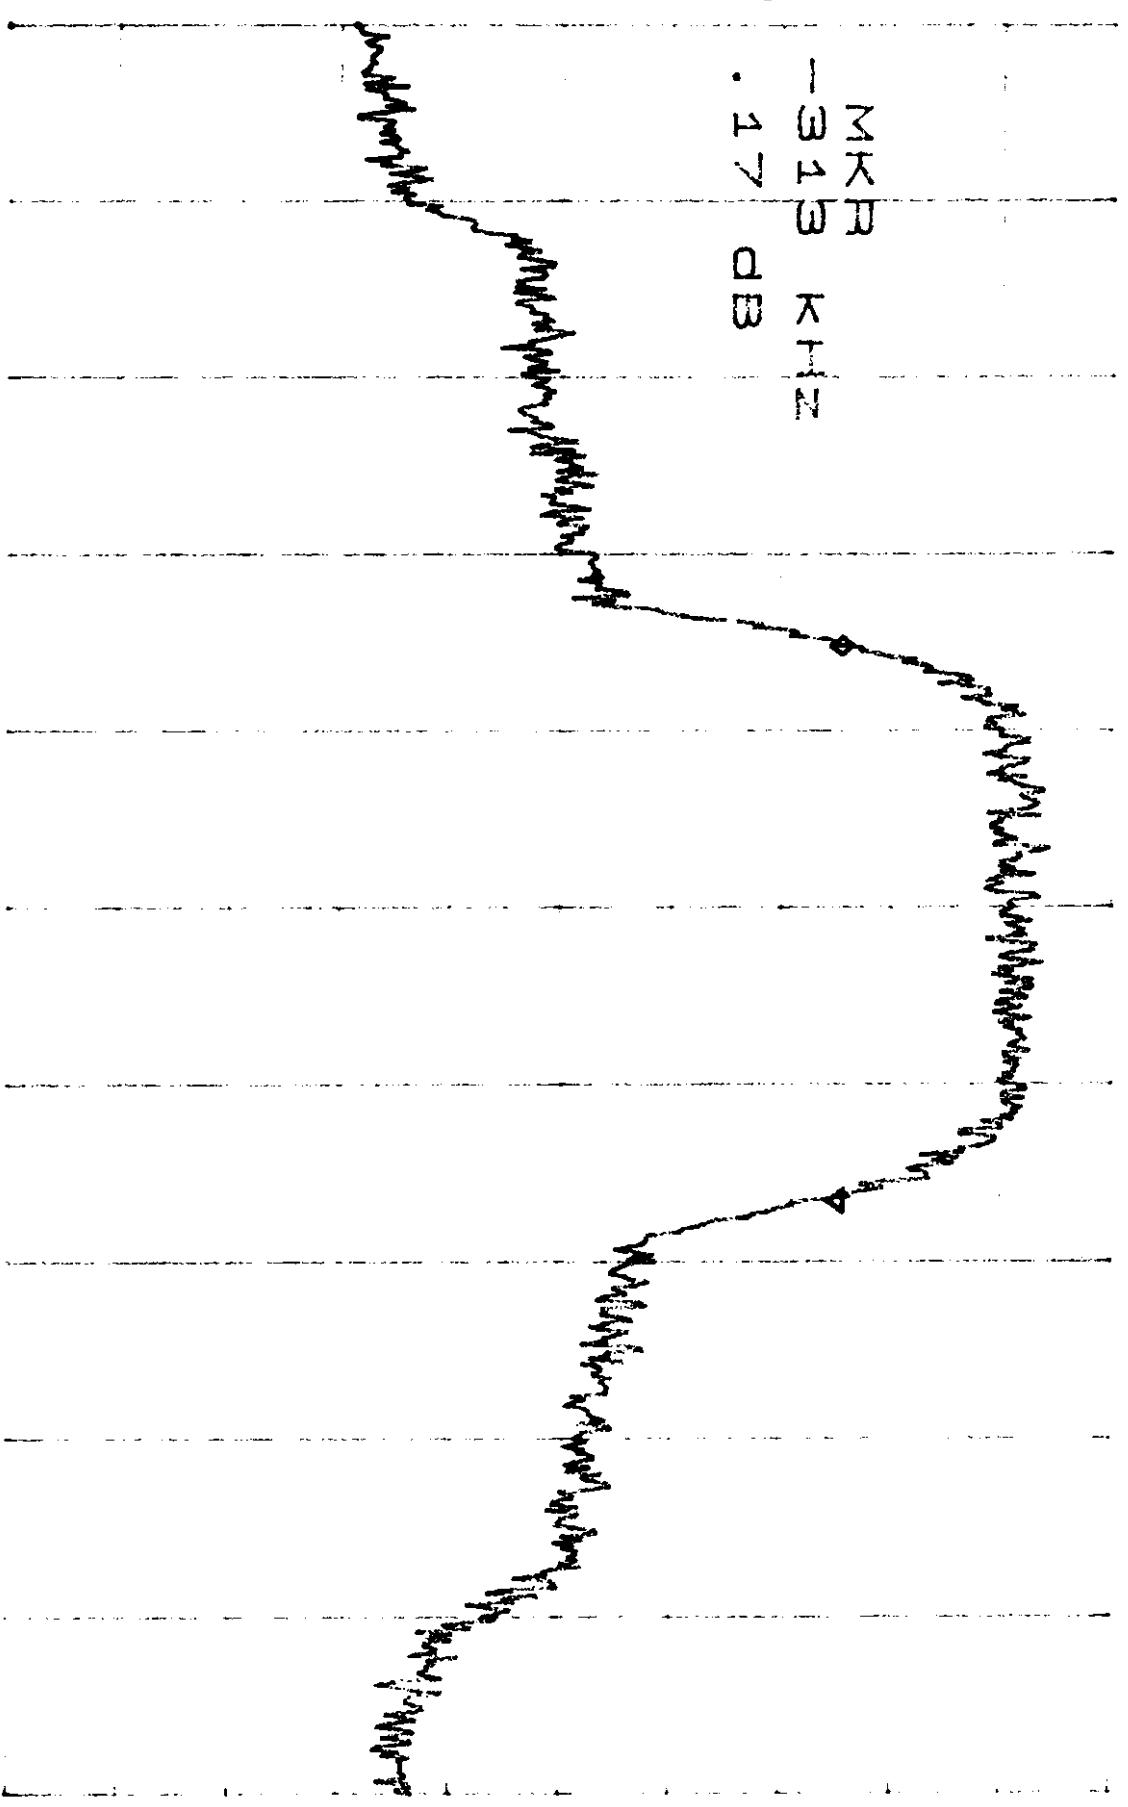

CENTER 2.441917GHZ

SPAN 1.000MHZ


2.46, CH 255, 20dB BW, 16QAM

ATTEN 100B
FL 000B

100B/

MKR -1.000B ENCT
-347KHZ

Σ λ Π
1 3 4
1 4 . 0 0 0 0 0 0

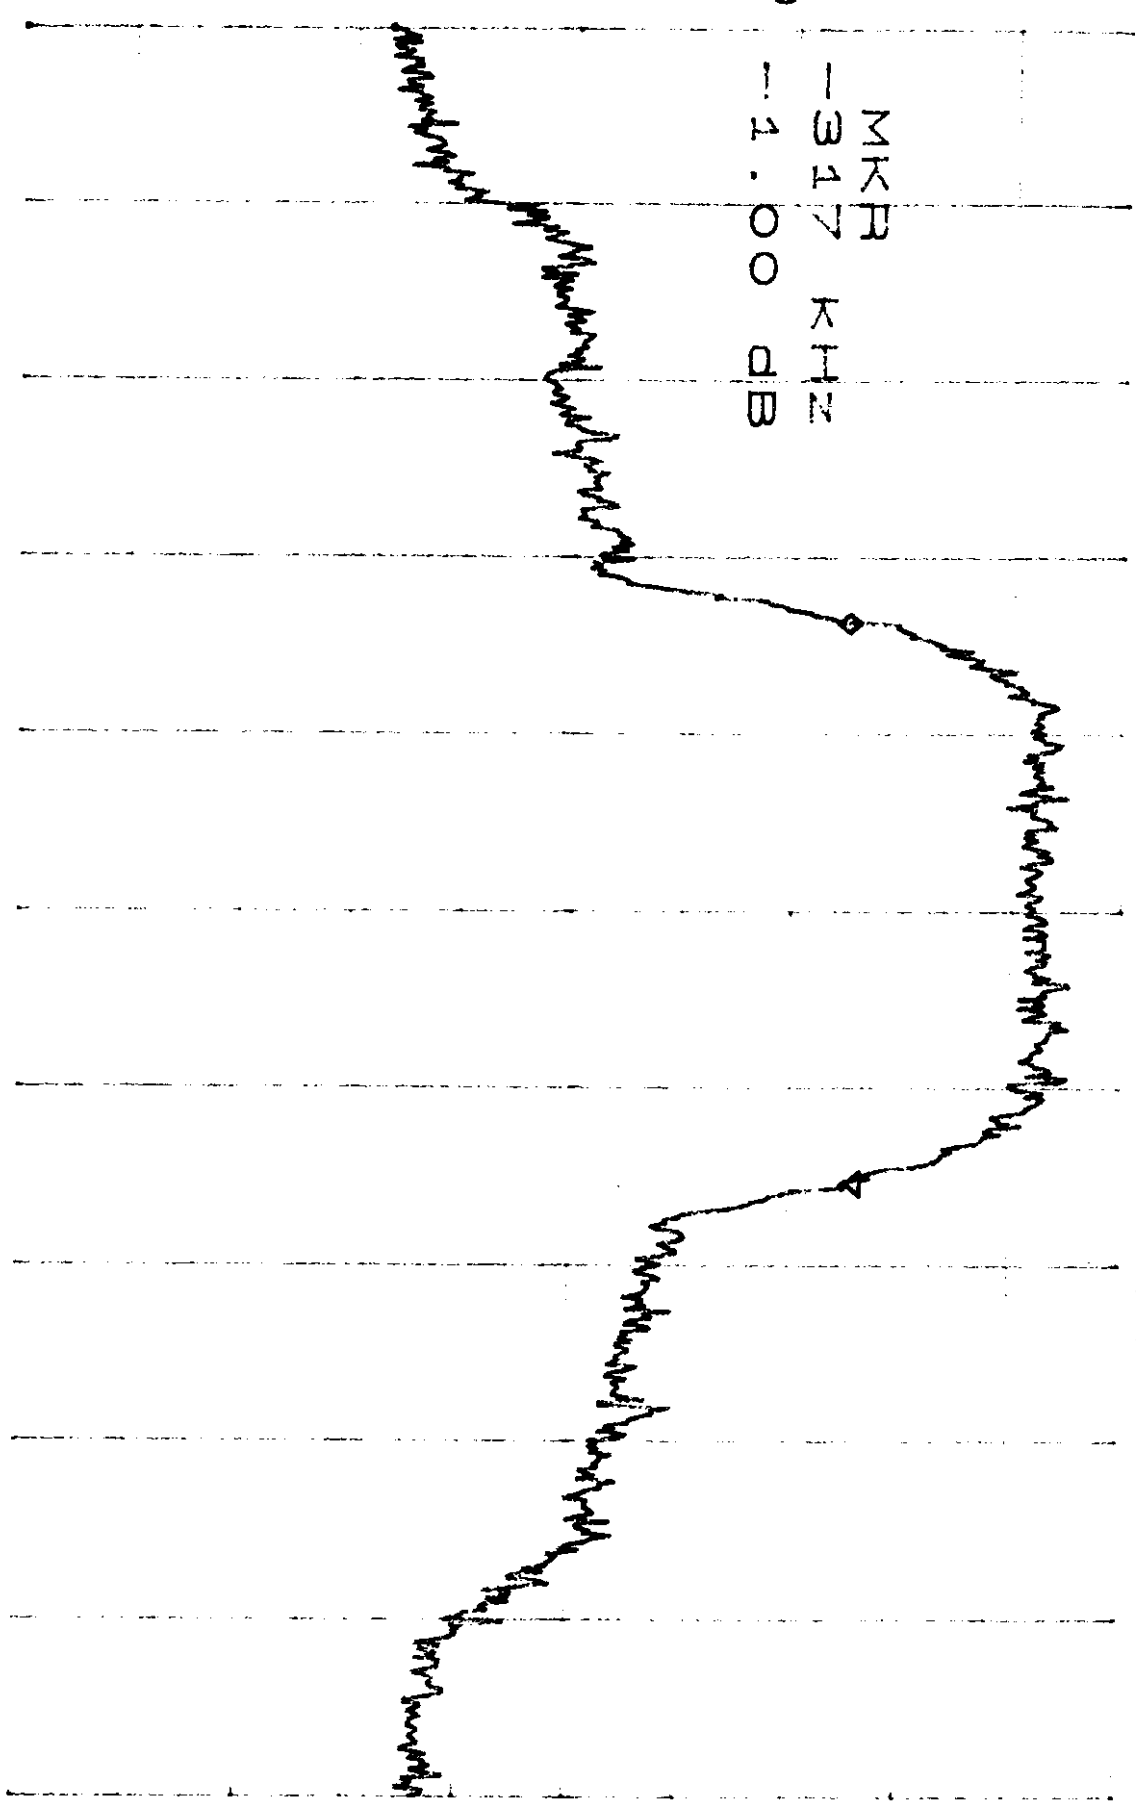

CENTER 2.481930612

SPAN 1.000MHZ


400MHZ, C4O, 30dB BW 7/4 D75K X2
ENET

ATTEN 20dB
RL 10.0dBm

10dB/

NKR 1.50dB
-318KHz

PK 1340
D 1.50
KIN
dB

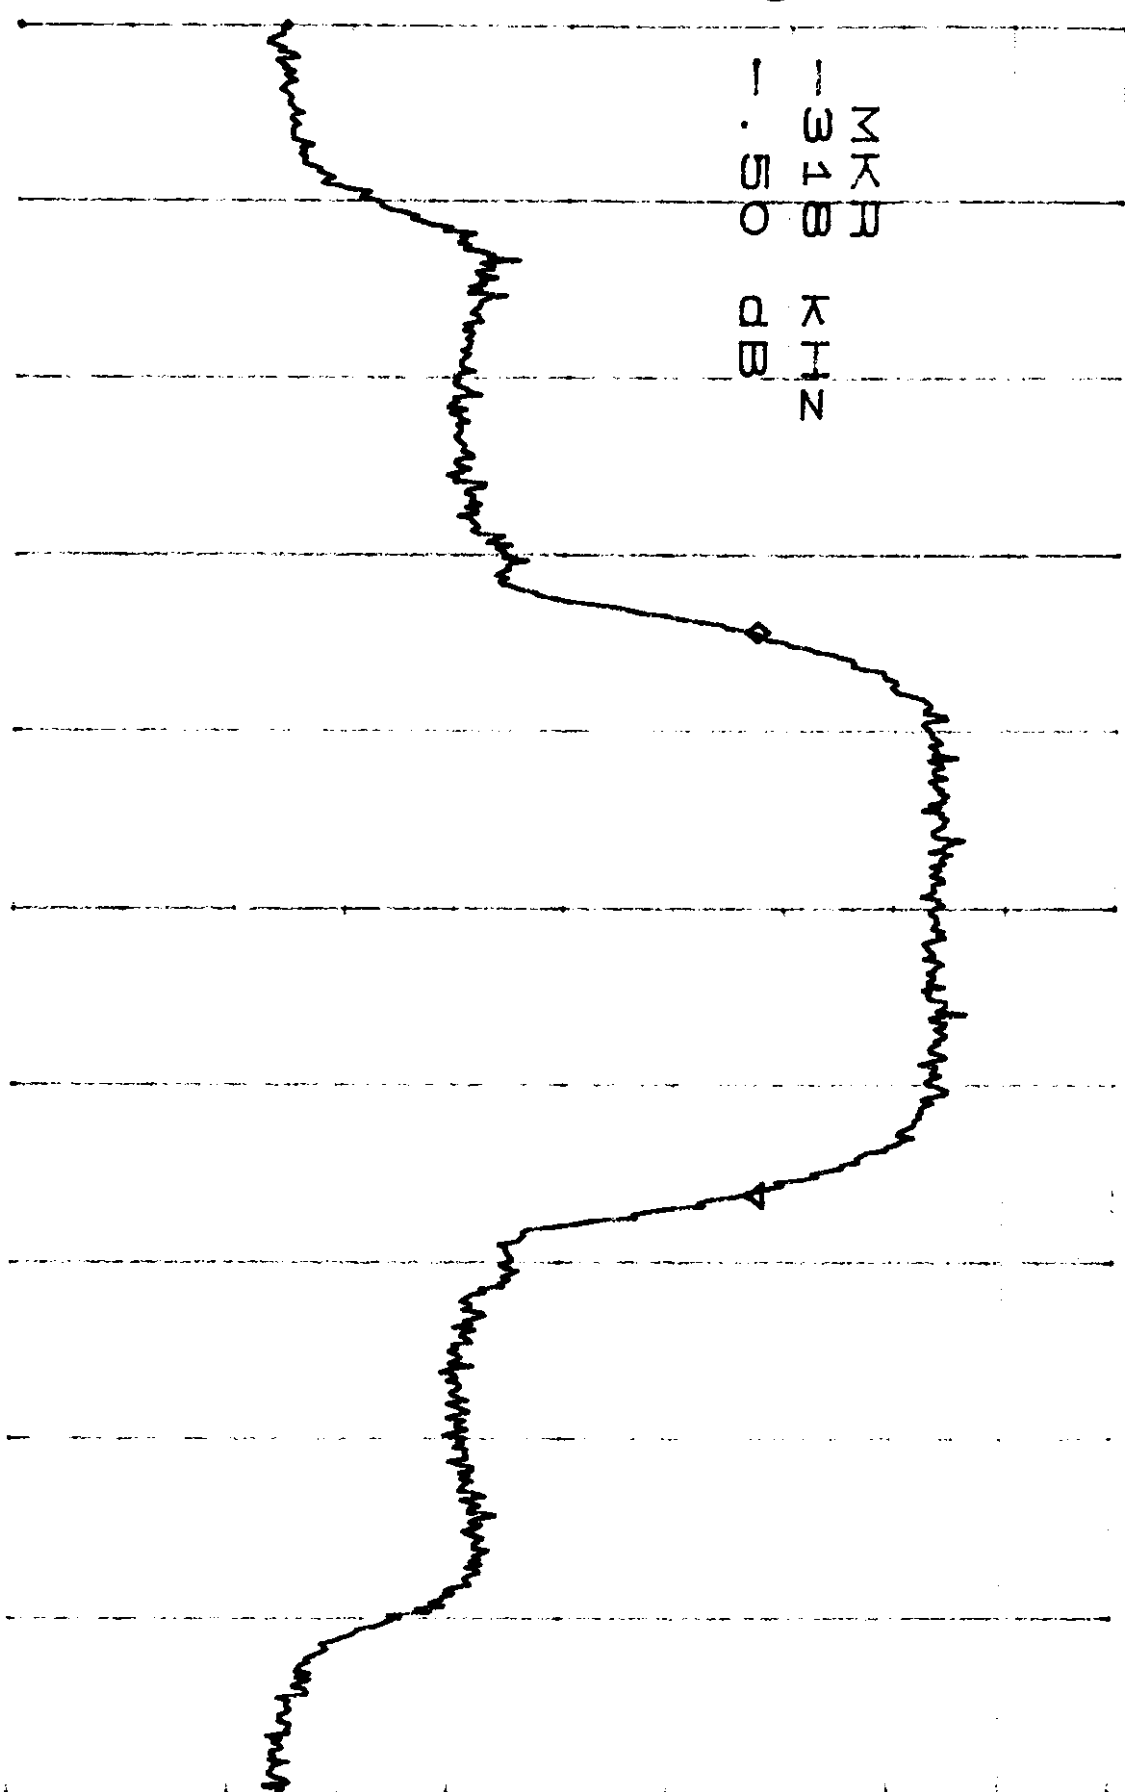

CENTER 902.080MHz

SPAN 1.000MHz

900MHZ, CH 75, 10dB BW, 1/4 DPK X2

ENET


MARK 1.17dB

-343KIN

100B/

ATTEN 20dB
FL 10.00dB

Σ 0
W 1
1 1
D 0

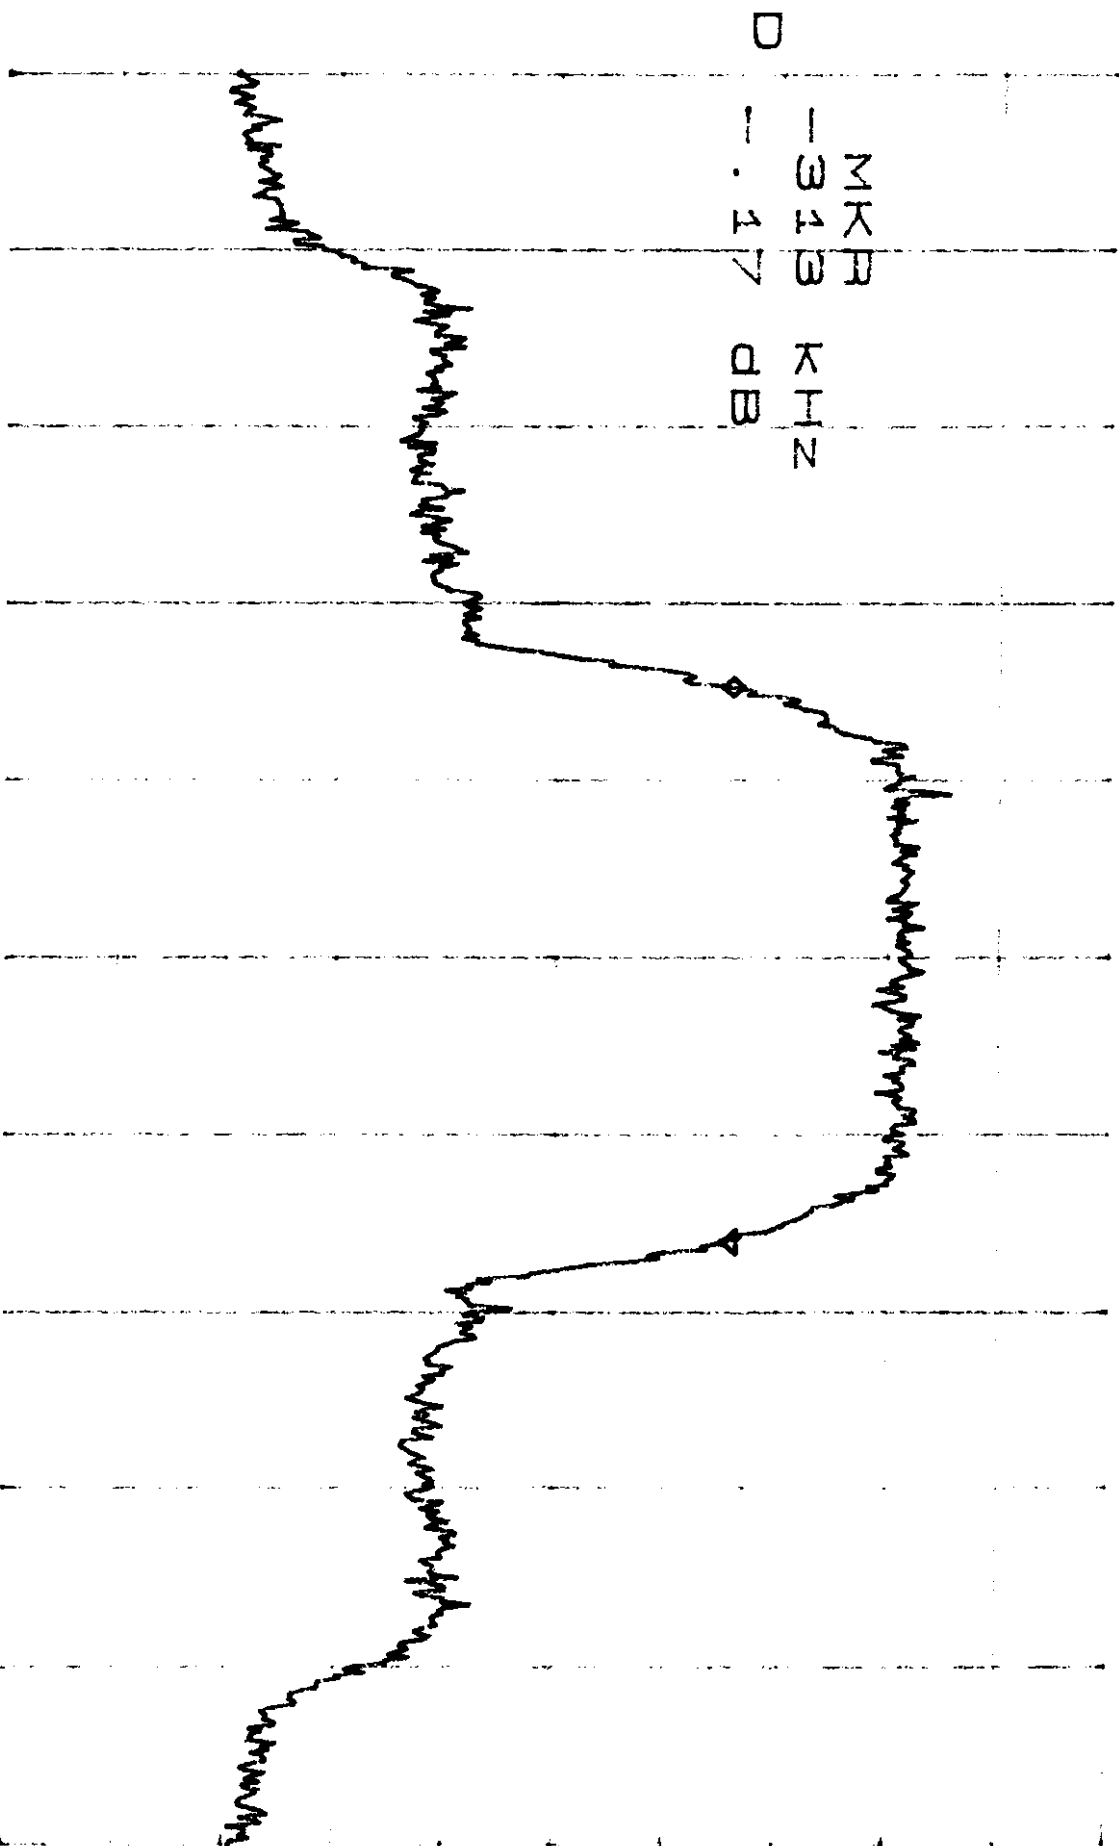

CENTER 914.080MHZ

SPAN 1.000MHZ

900 MHz, CH 161, 20dB BW, 1/4 DDS V.K2

ENET

ATTEN 20dB
RL 40.00dB

40dB/


20dB 1.000dB

ΣK 0.00
1.340
D 1.300

KIN
0.00

CENTER 927.840MHz

SPAN 1.000MHz

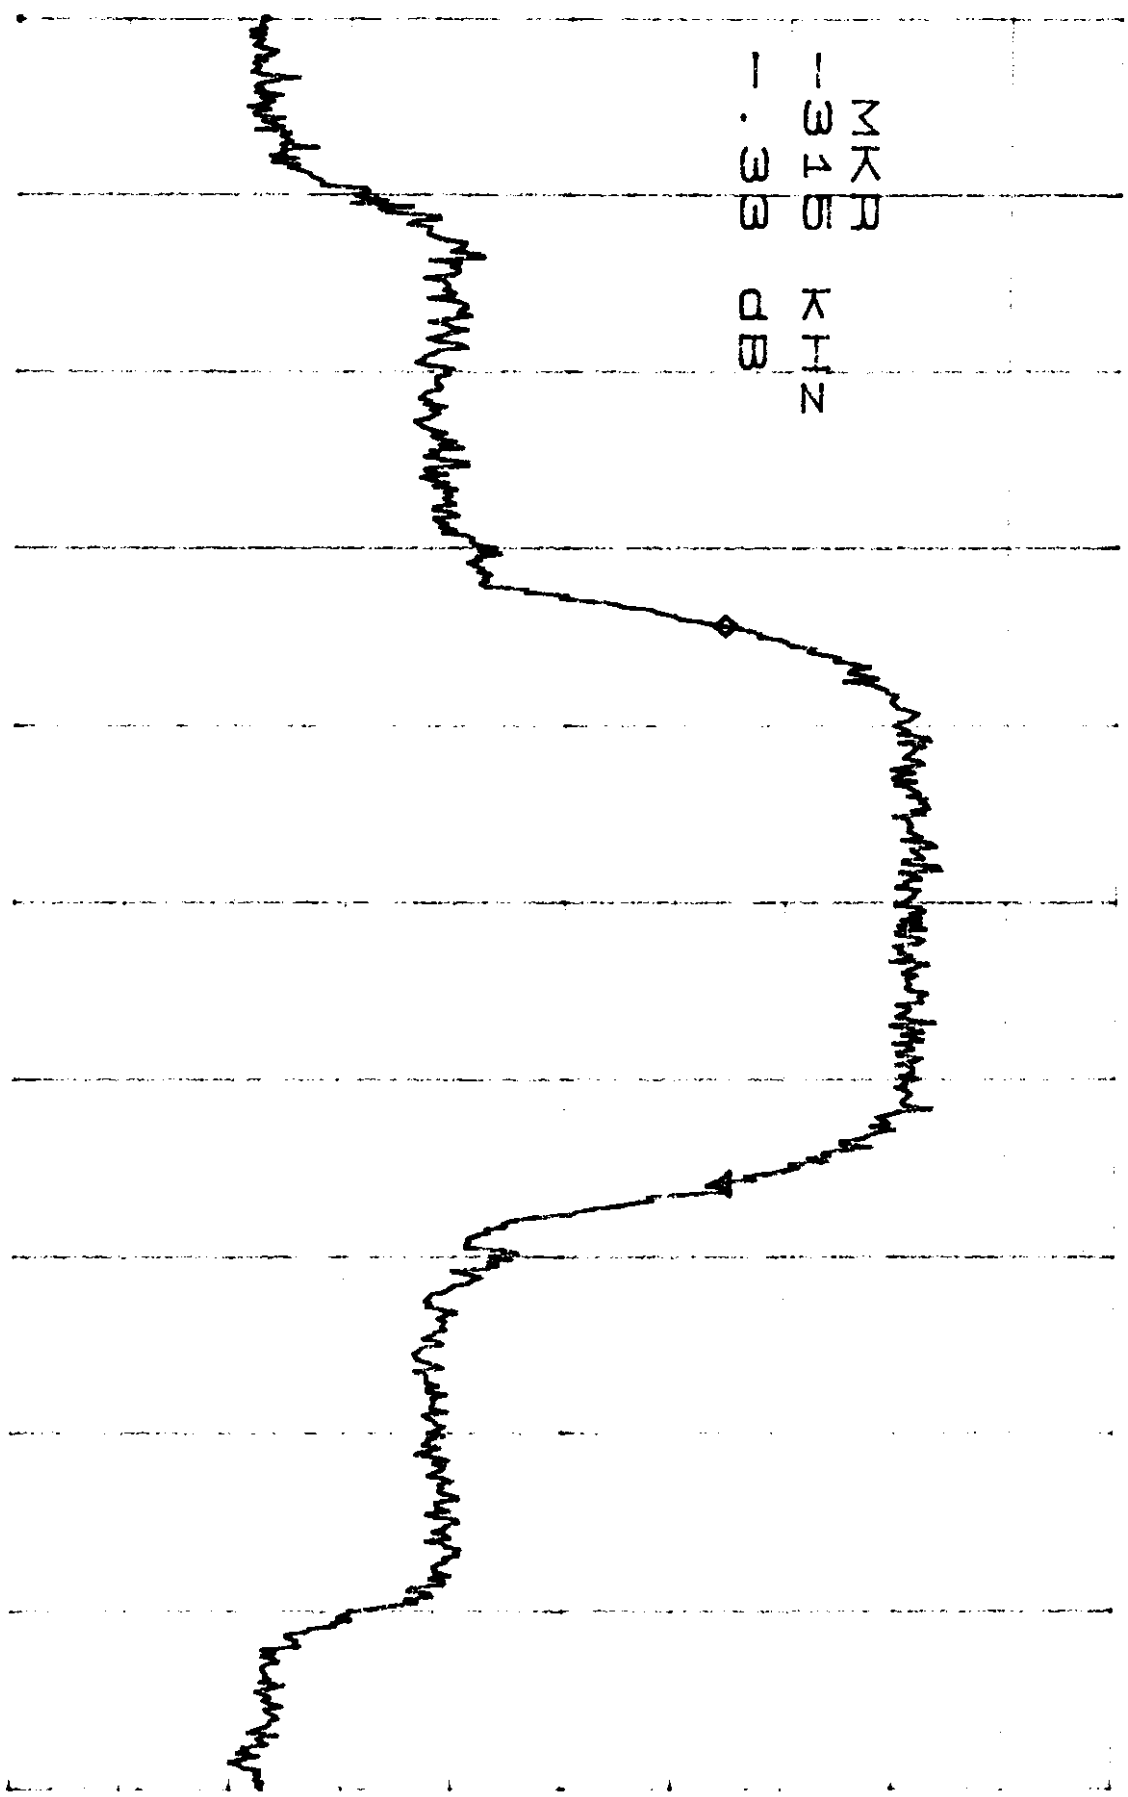

RADIO 400 MHz BAND EDGE
CH 2, MOD 2FSK

ATTEN 40dB

RL 30.0dBm

10dB/


-437KHz

NKPR -60.33dB

NKPR

-437 KHz

D
-60.33 dB

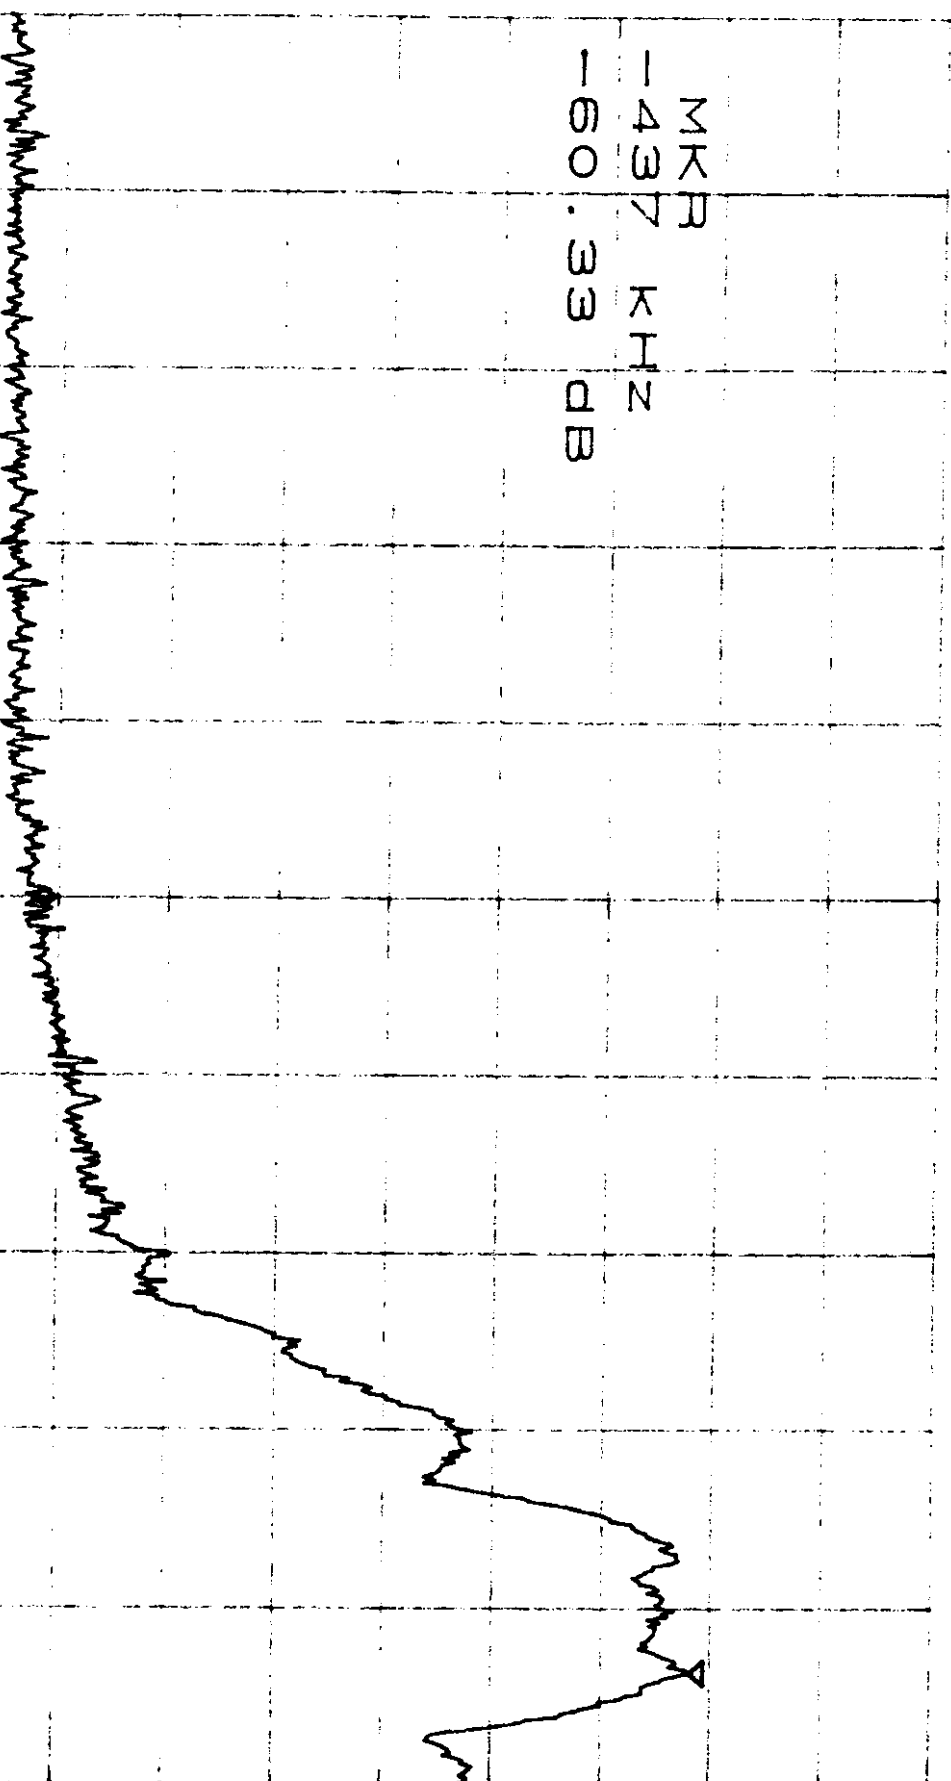


CENTER 902.000MHZ

SPAN 1.000MHZ

RADIO 900 MHz BANDWIDTH
CH2(0) HFSS

ATTEN 40 DB
RL 30.0 DBE
10 DB/
ΣK 160.67 DB

ΣK 160.67 DB
D

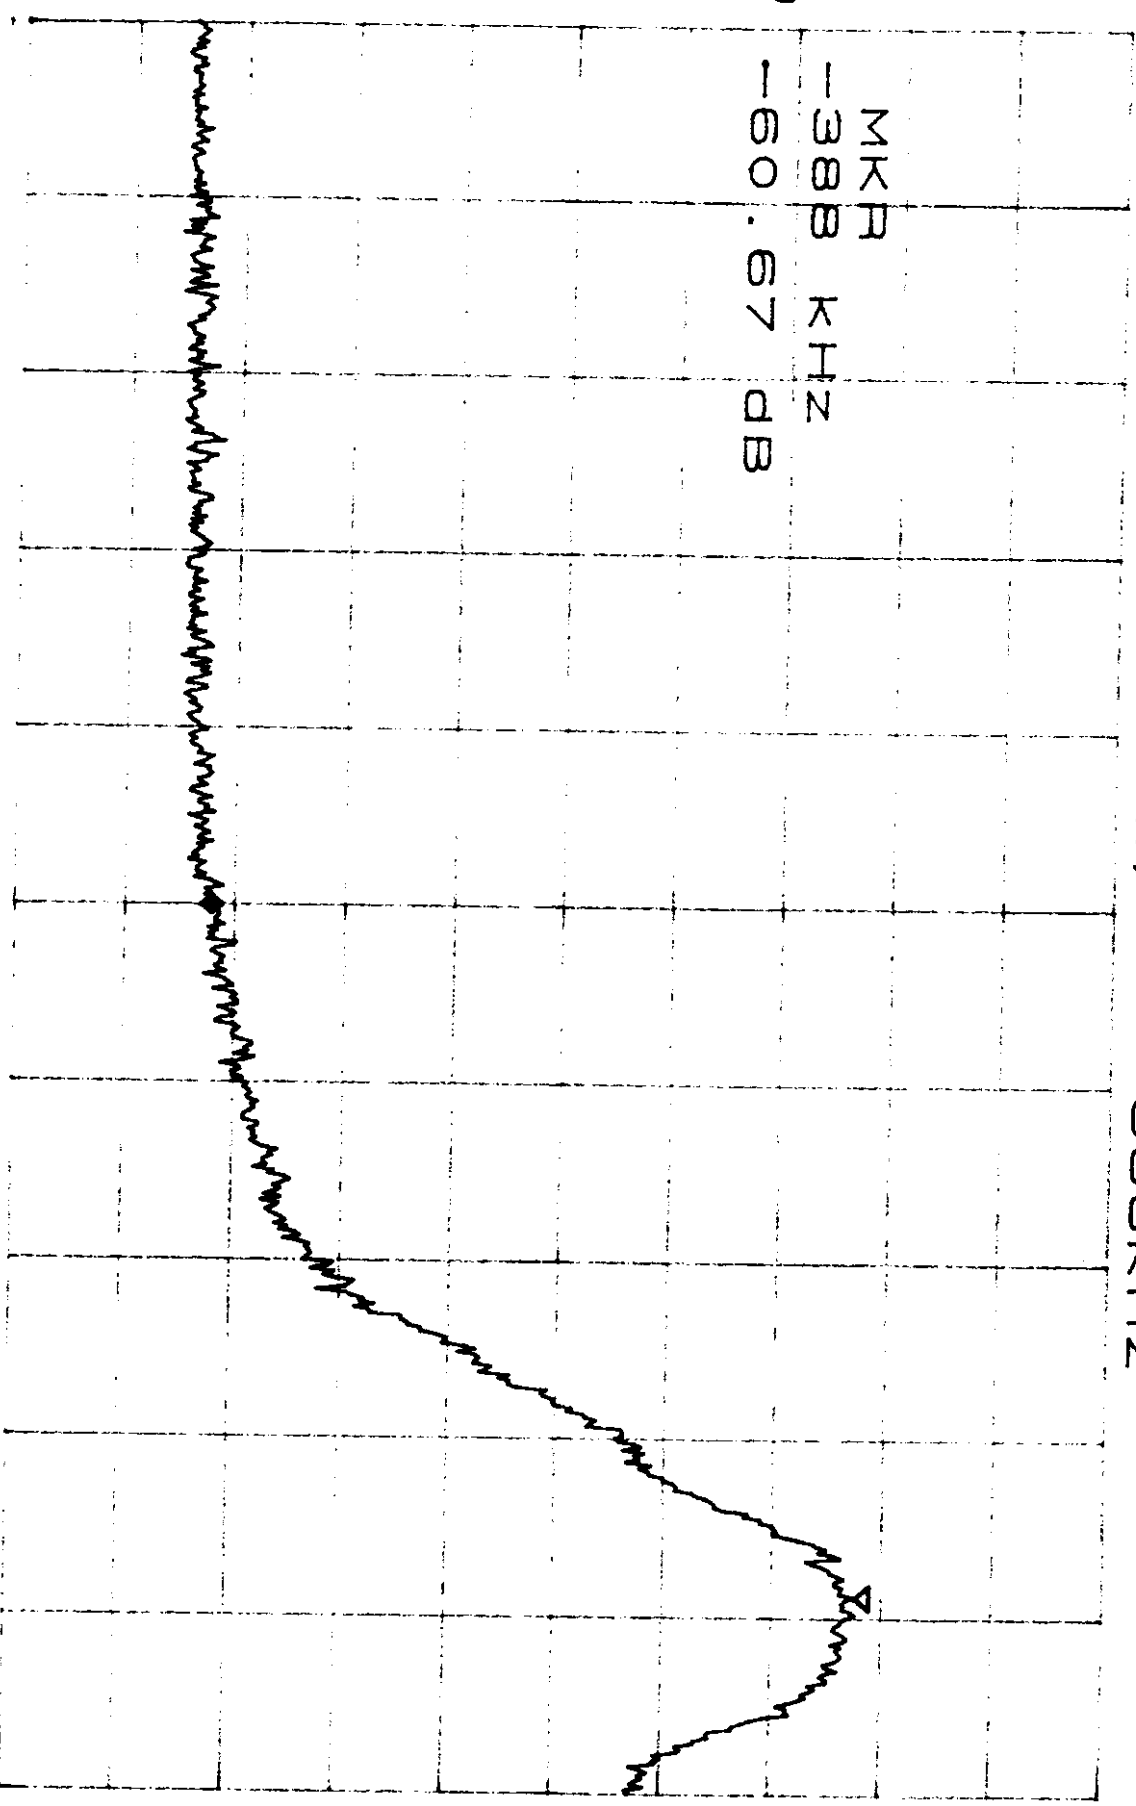

CENTER 902.000 MHz

SPAN 1.000 MHz


RADIO 900MHZ BANDWIDTH
CH2 (0) 1/4 DBSV K2

ATTEN 40DB
RL 30.00DB

10DB/

MKR -50.50DB
-435KHZ

2K
-435 KIN
D -50.50 DB

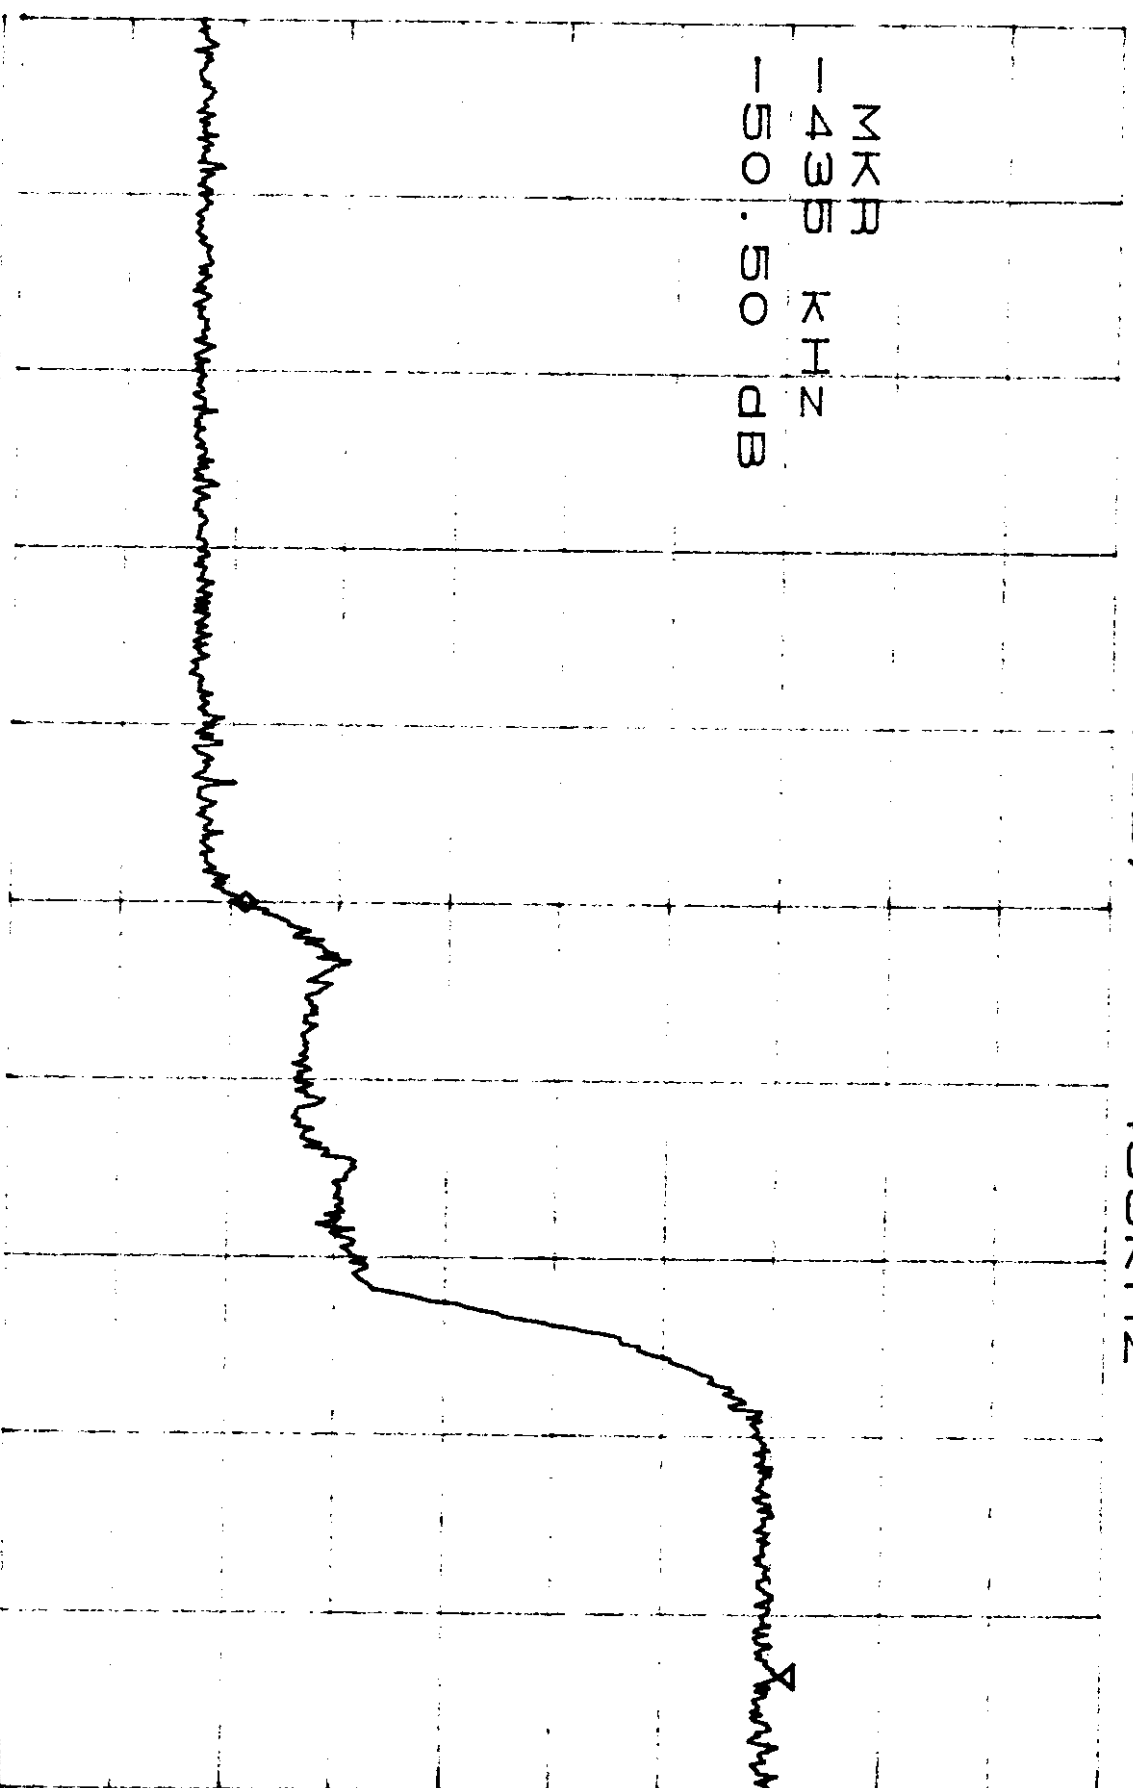

CENTER 902.000MHZ


SPAN 1.000MHZ

RADIO 400 MHz BAND EDGE
CH 161 2FSK

ATTEN 40dB
FL 30.00dB
MKR -38.67dB
10dB/
193KHz

Σ
100
-38.67 dB

CENTER 928.000MHz
SPAN 1.000MHz

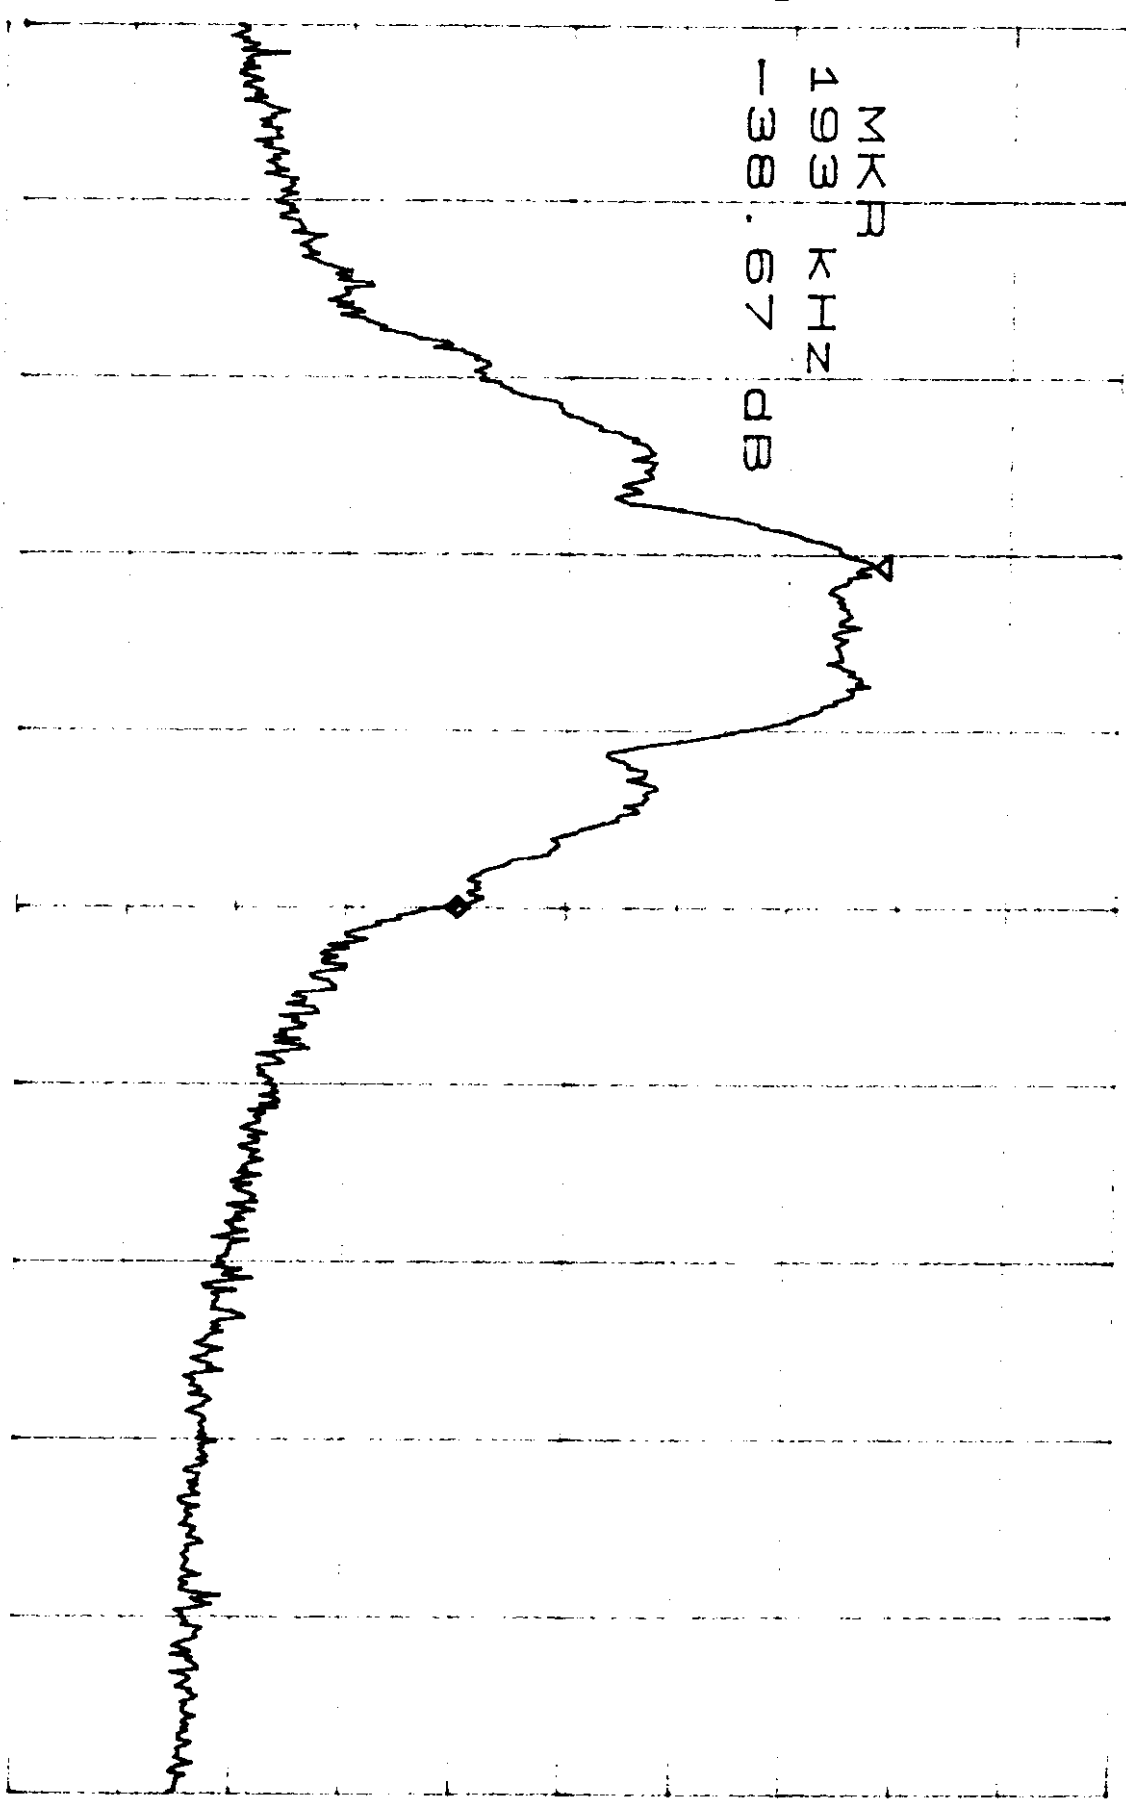


RADIO, 928.000MHZ BANDEDGE
CH 161 UFSK

ATTEN 40dB
RL 30.00dBm

10dB/

MKR -39.00dB
177KHZ

MKR
177 KHZ
D -39.00 dB

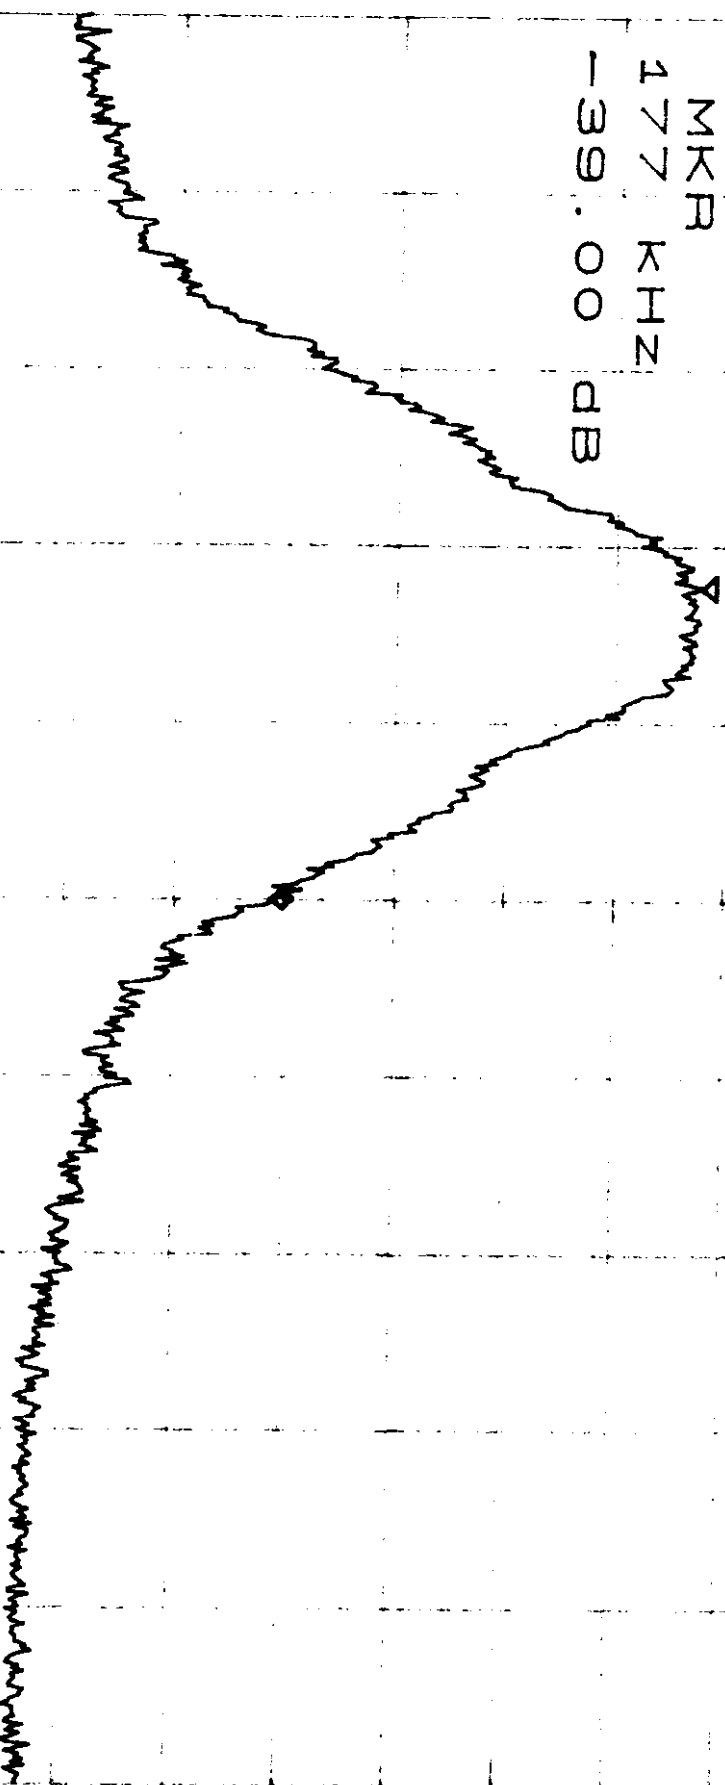

CENTER 928.000MHZ

SPAN 1.000MHZ

RADIO, 900 MHz BAND EDGE
CH 161, 7/14 DSK X2

ATTEN 40 DB
RL 30.0 DBE

10 DB/

Σ K R -27.16 DB
242 KHz

Σ K R

242 KHz


-27.16

DB

D

CENTER 928.000 MHz

SPAN 1.000 MHz

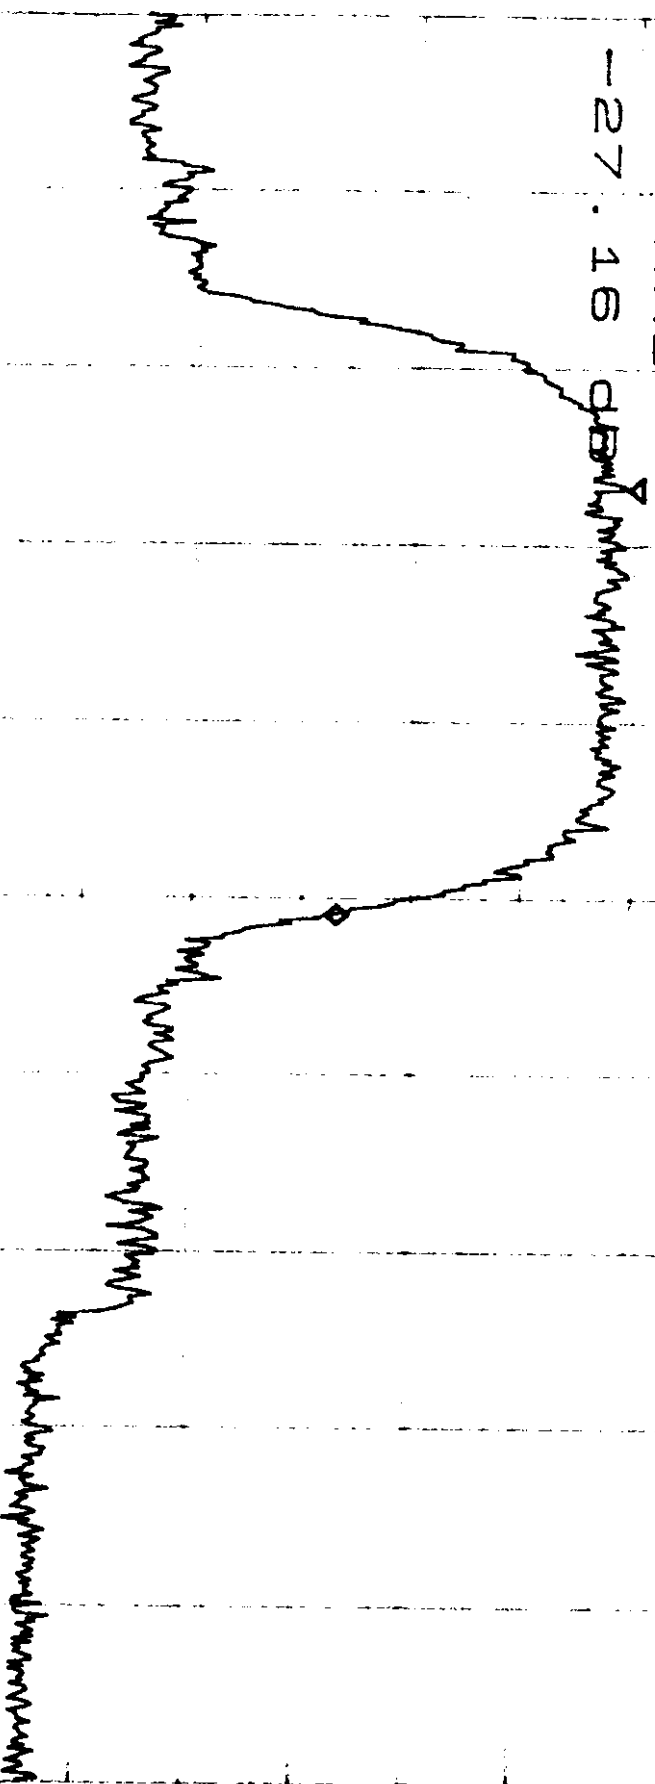

ATTEN 20dB
RL 10.00dBm


MKR
-305 KHz
D -21.00 dB

10dB/

RADIO 3.4GHz BAND EDGE
CH 0, 1/4 DBM x2
MKR -21.00dB
-305KHz

CENTER 2.400000GHz

SPAN 1.000MHz

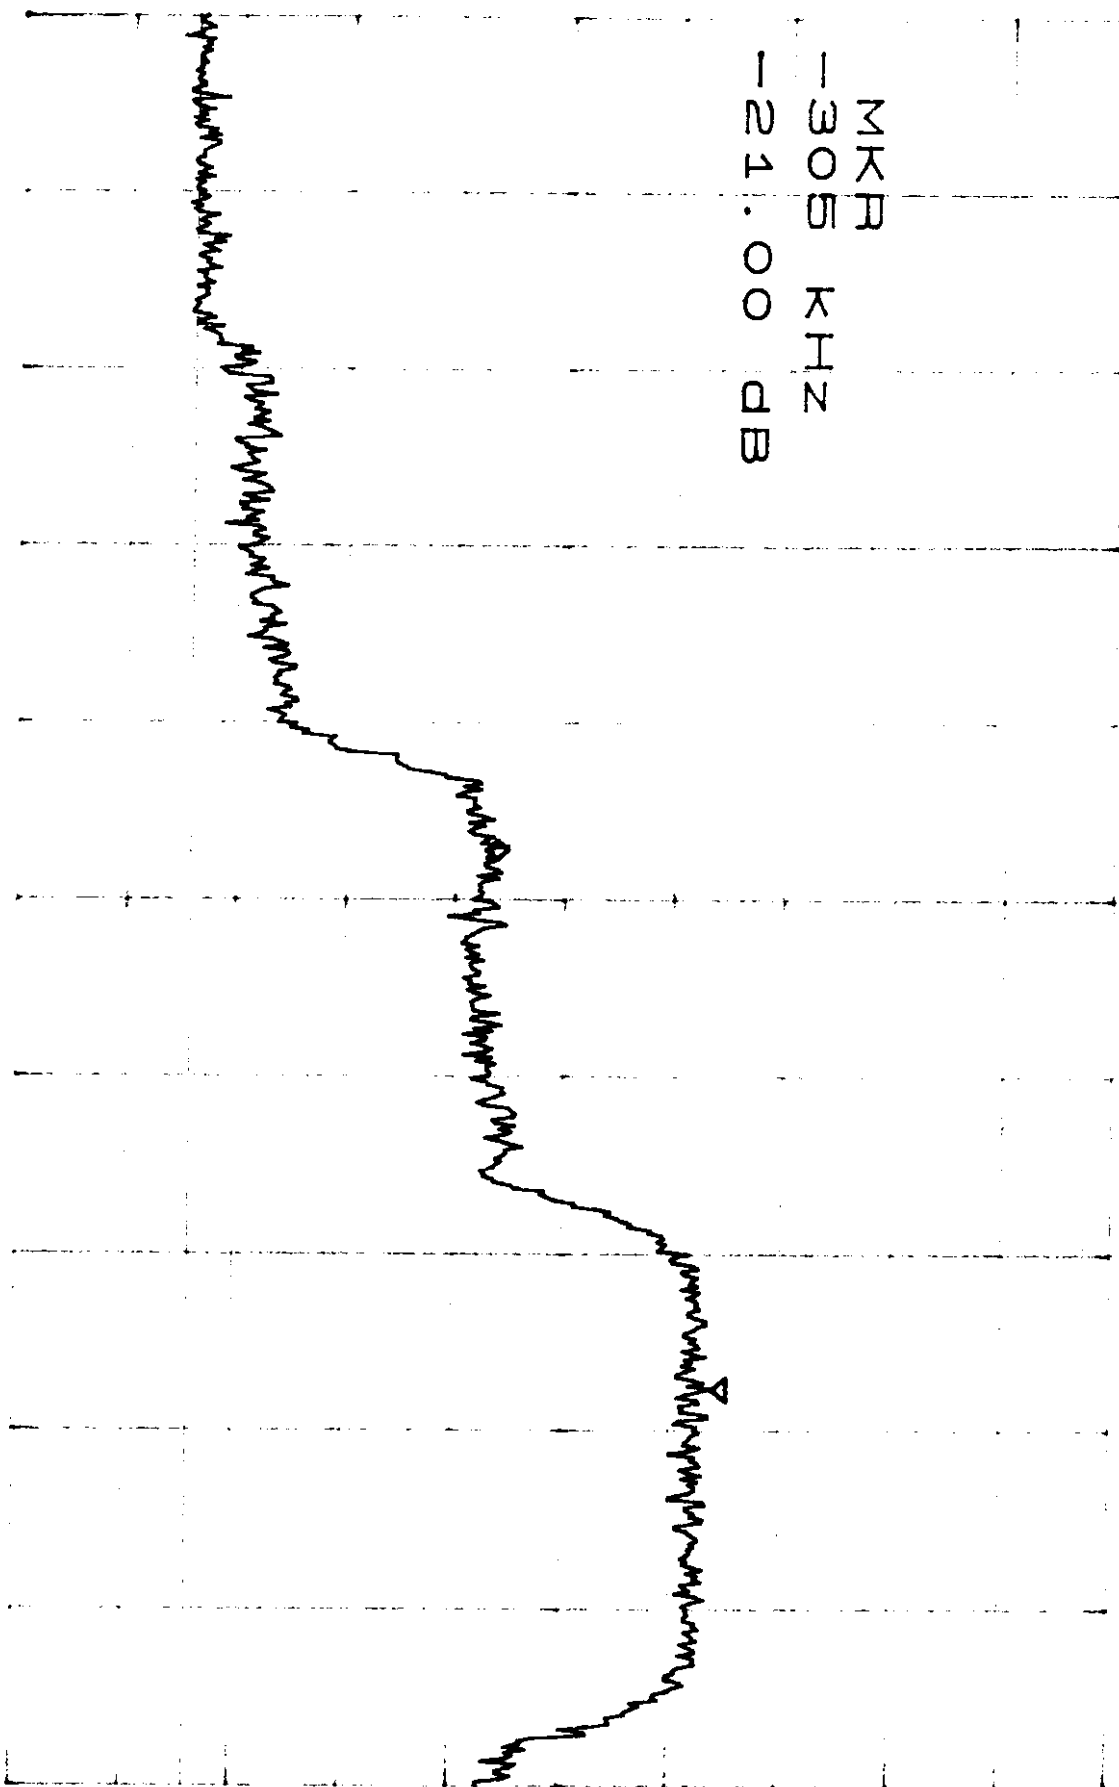

ATTEN 20dB
RL 10.0dB


10dB/

RADIO, 8.46 BAND 6C
CH 0, 16 QAM 42
MKR -21.66dB
-330KIN

ΣX
-330 KIN
D -21.66 dB

CENTER 2.400000GHZ

SPAN 1.000MHZ

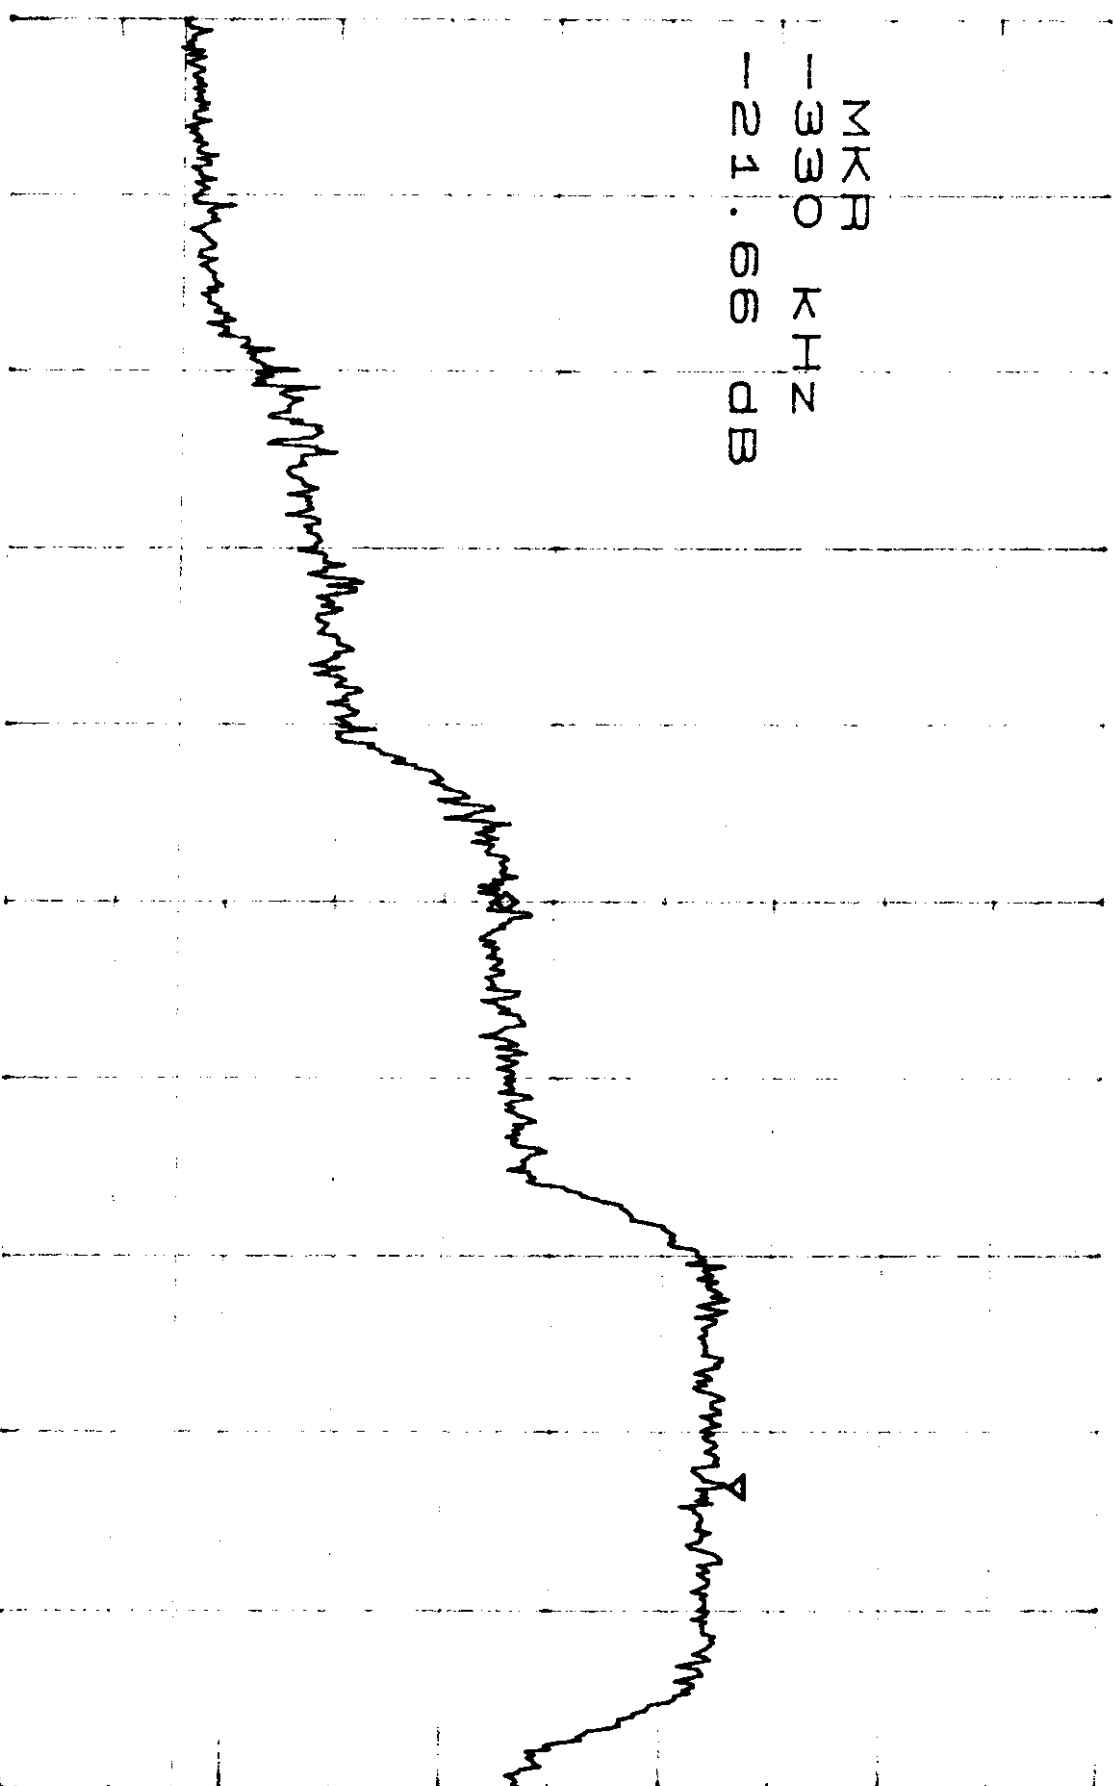


ATTEN 40dB
RL 30.0dBm

10dB/

ENET, 900MHz BAND EDGE
CH2, MOD: QPSK
MKR -57.34dB
-432kHz

MKR
-432KIN
D
-57.34dB

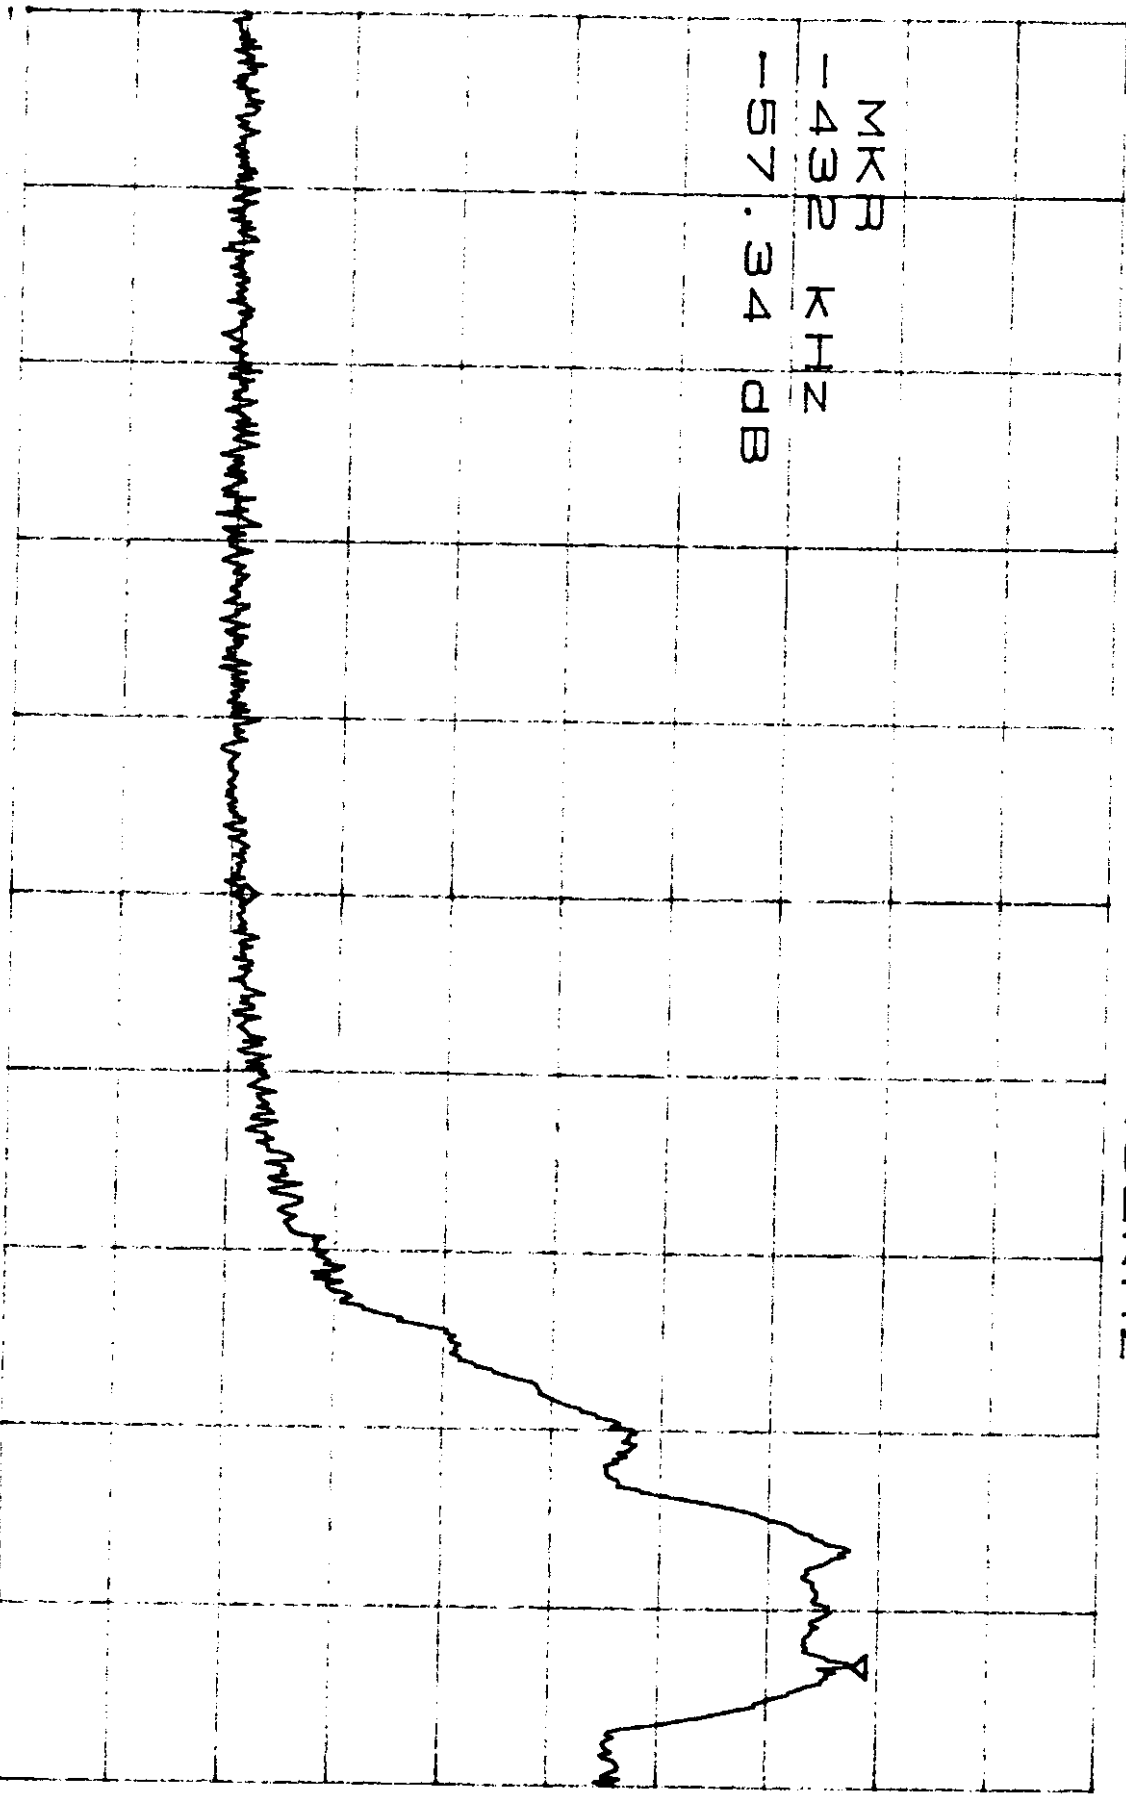

CENTER 902.000MHz


SPAN 1.000MHz

ATTEN 40dB
RL 30.0dB

10dB/

ENET, 900 MHz, 3AHD5G5
CH2 MOD: HFSK
MKR -54.84dB

ΣX
141N
104.84 dB

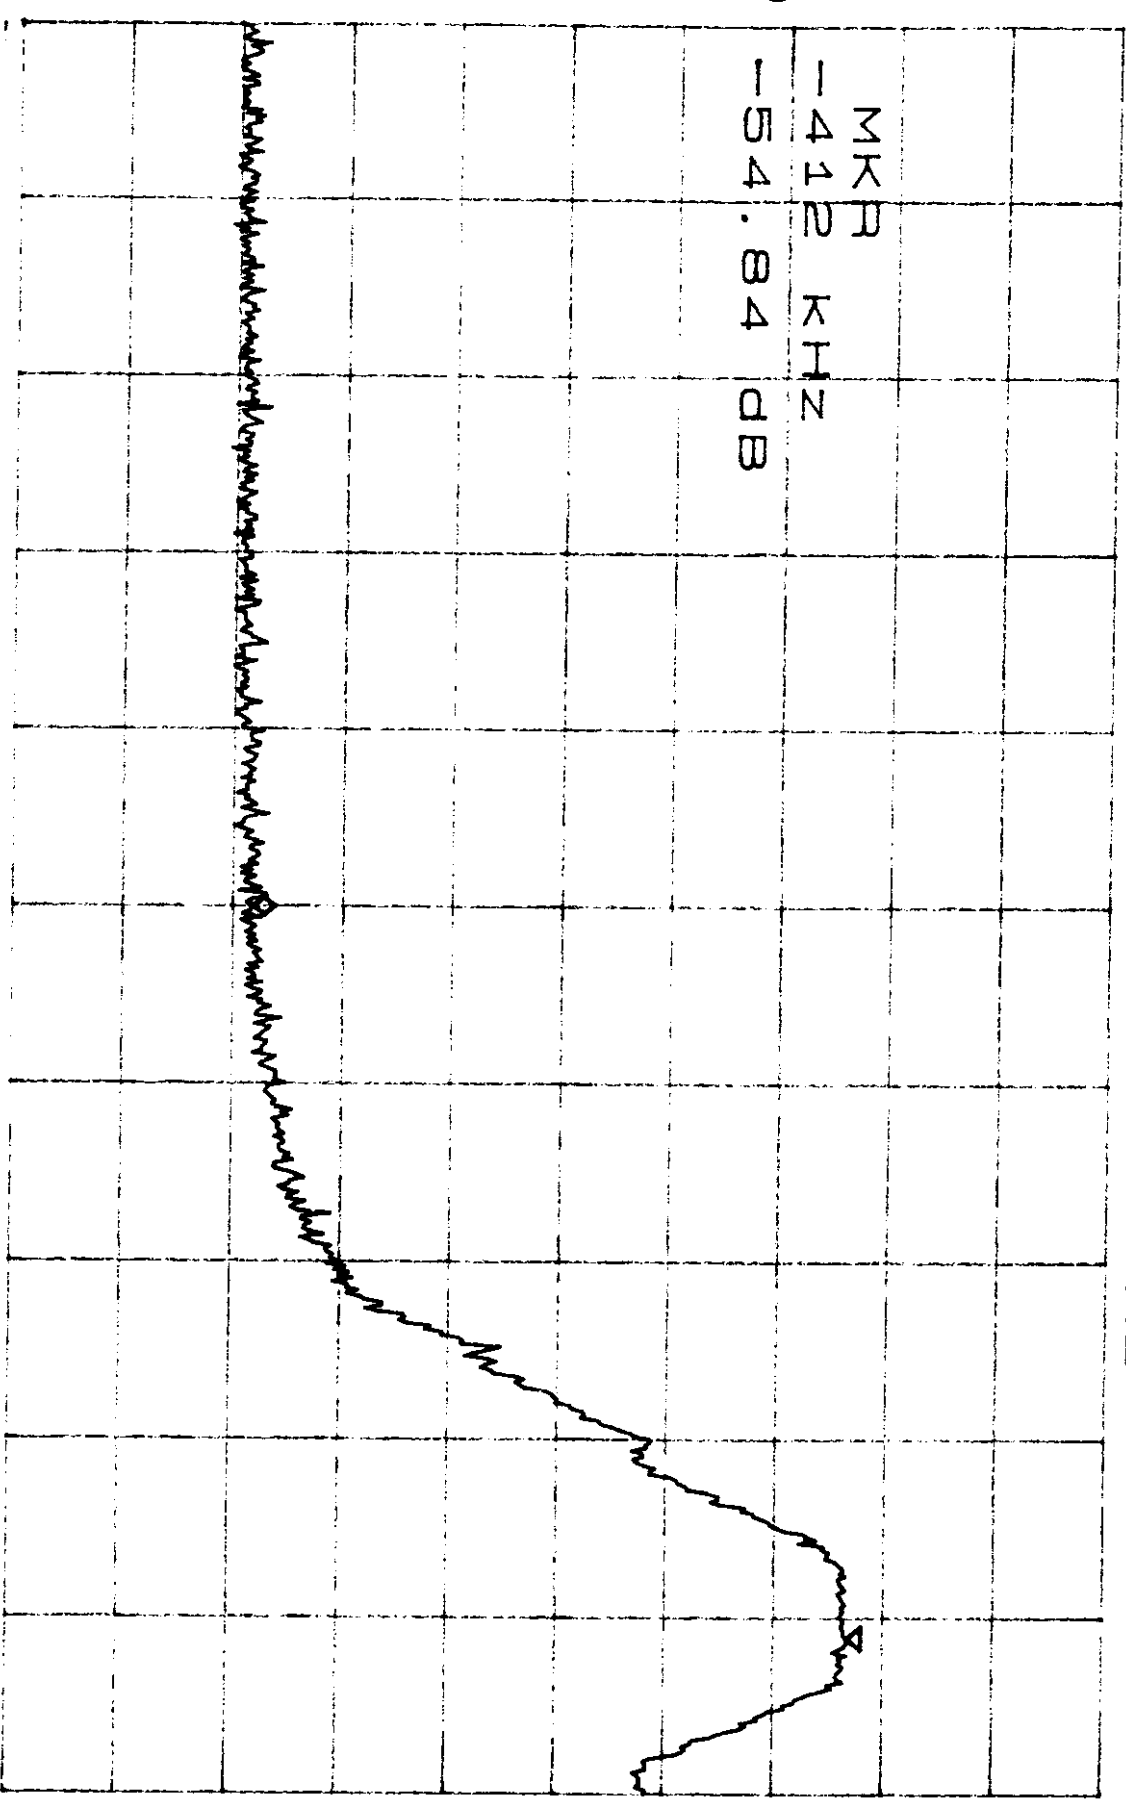

CENTER 902.000MHZ

SPAN 1.000MHZ

ENET, 900 MHz BAND EDGE
CH 2, MOD W/4DPSK X2

ATTEN 40dB

RL 30.0dBm

10dB/

-472KHz


MKR -48.67dB

MKR

-472 KHz

-48.67 dB

D

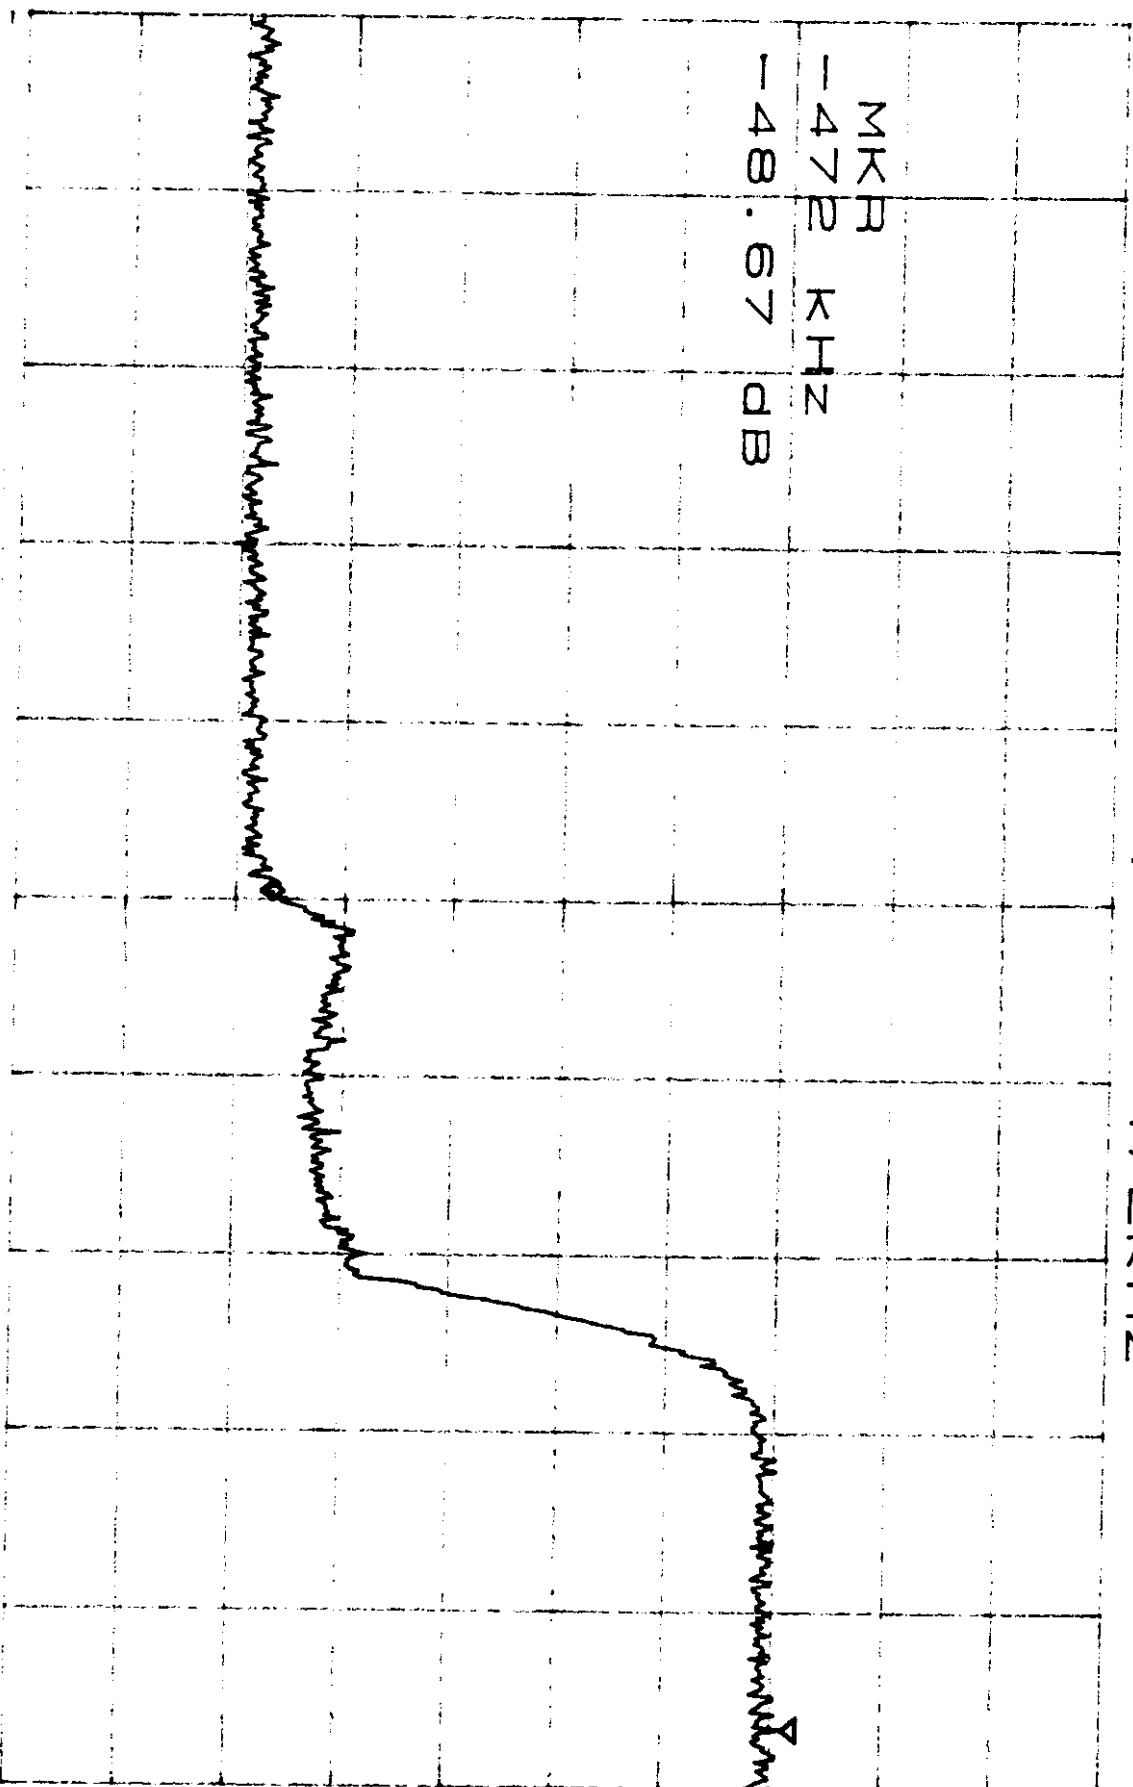

CENTER 902.005MHz

SPAN 1.000MHz

ENET, 900 MHz BAND EDGE
CH 161, MOD: 8FSK


ATTEN 40dB
RL 30.0dB

10dB/

MKR -40.17dB
192KHz

3K
102K IN
-40.17dB

D

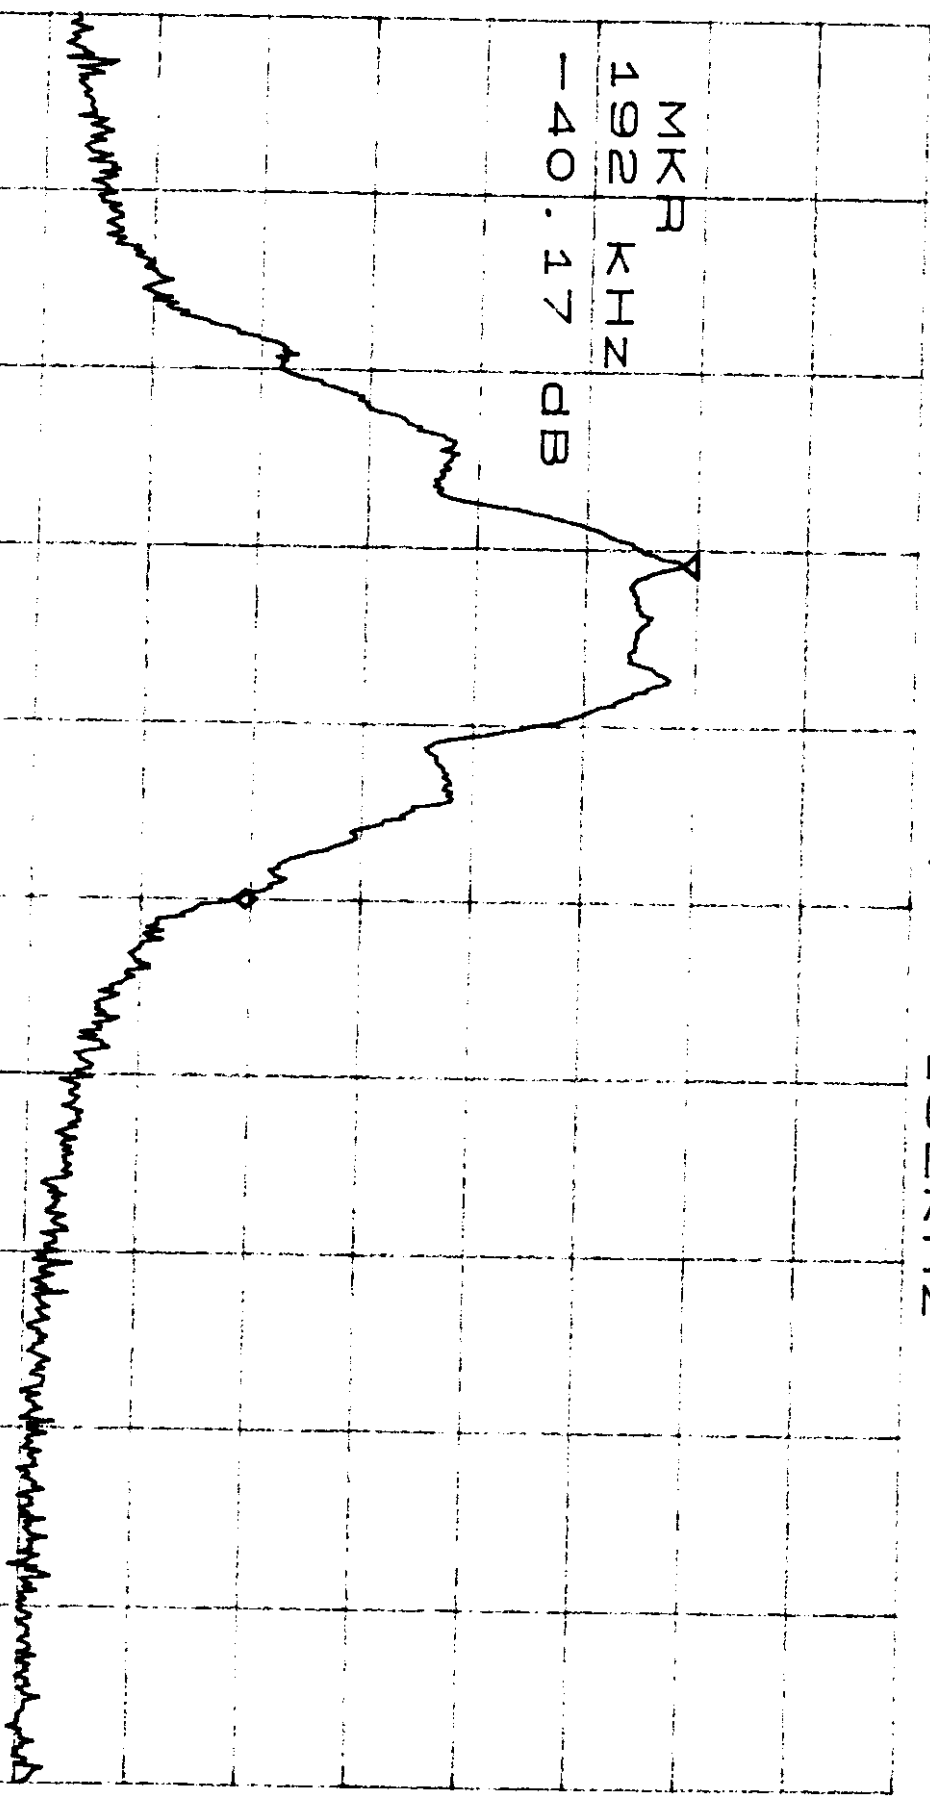

CENTER 928.000MHz

SPAN 1.000MHz

ENET, 400 MHz BAND EDGE
CH161, MOD 4FSK


ATTEN 40dB
RL 30.0dBm

10dB/

MKR -38.67dB
133KHz

MKR
133 KHz
-38.67 dB

D

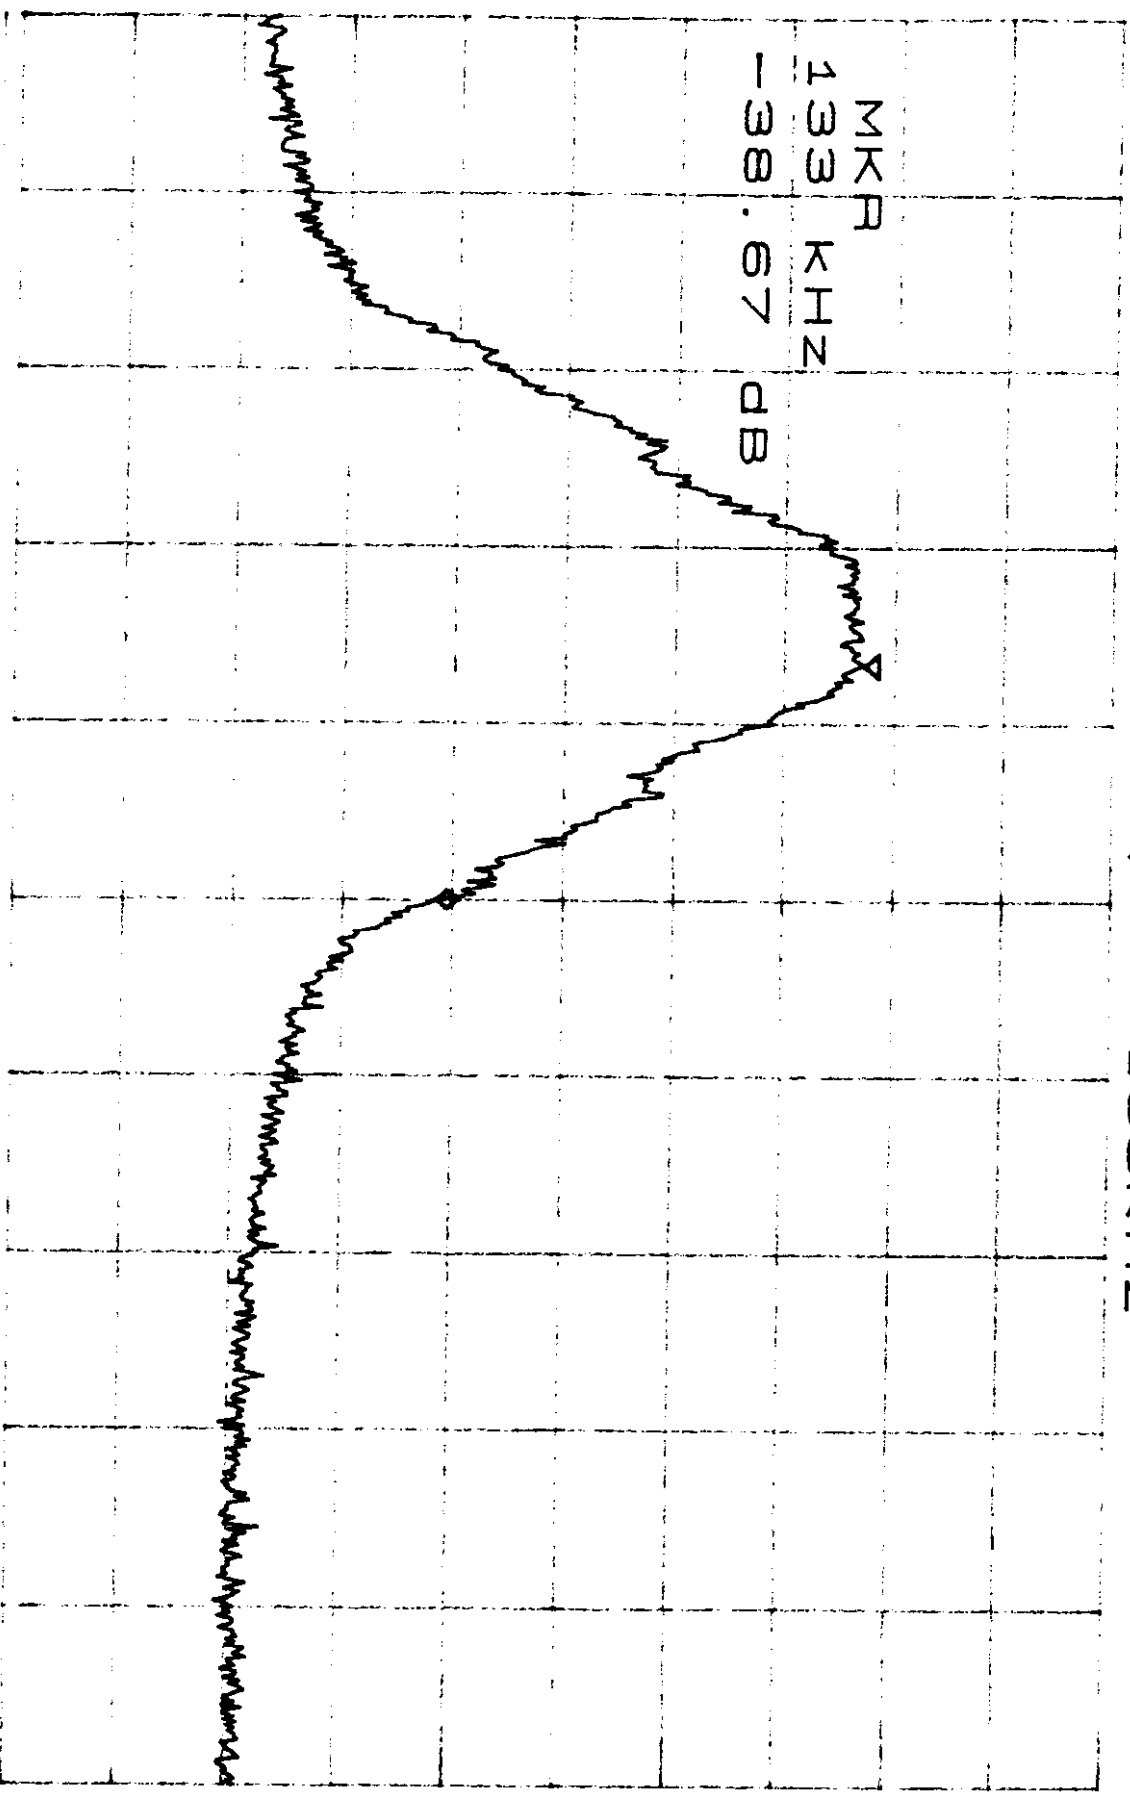

CENTER 928.000MHz

SPAN 1.000MHz

ENET, 900 MHz BAND EDGE
CH 161, 7/4 DSK X2


ATTEN 40 DB
RL 30.0 DBM

10 DB/

MK 0 -24.33 DB
67 KHZ

D
-24.33 DB

MK 0
67 KHZ

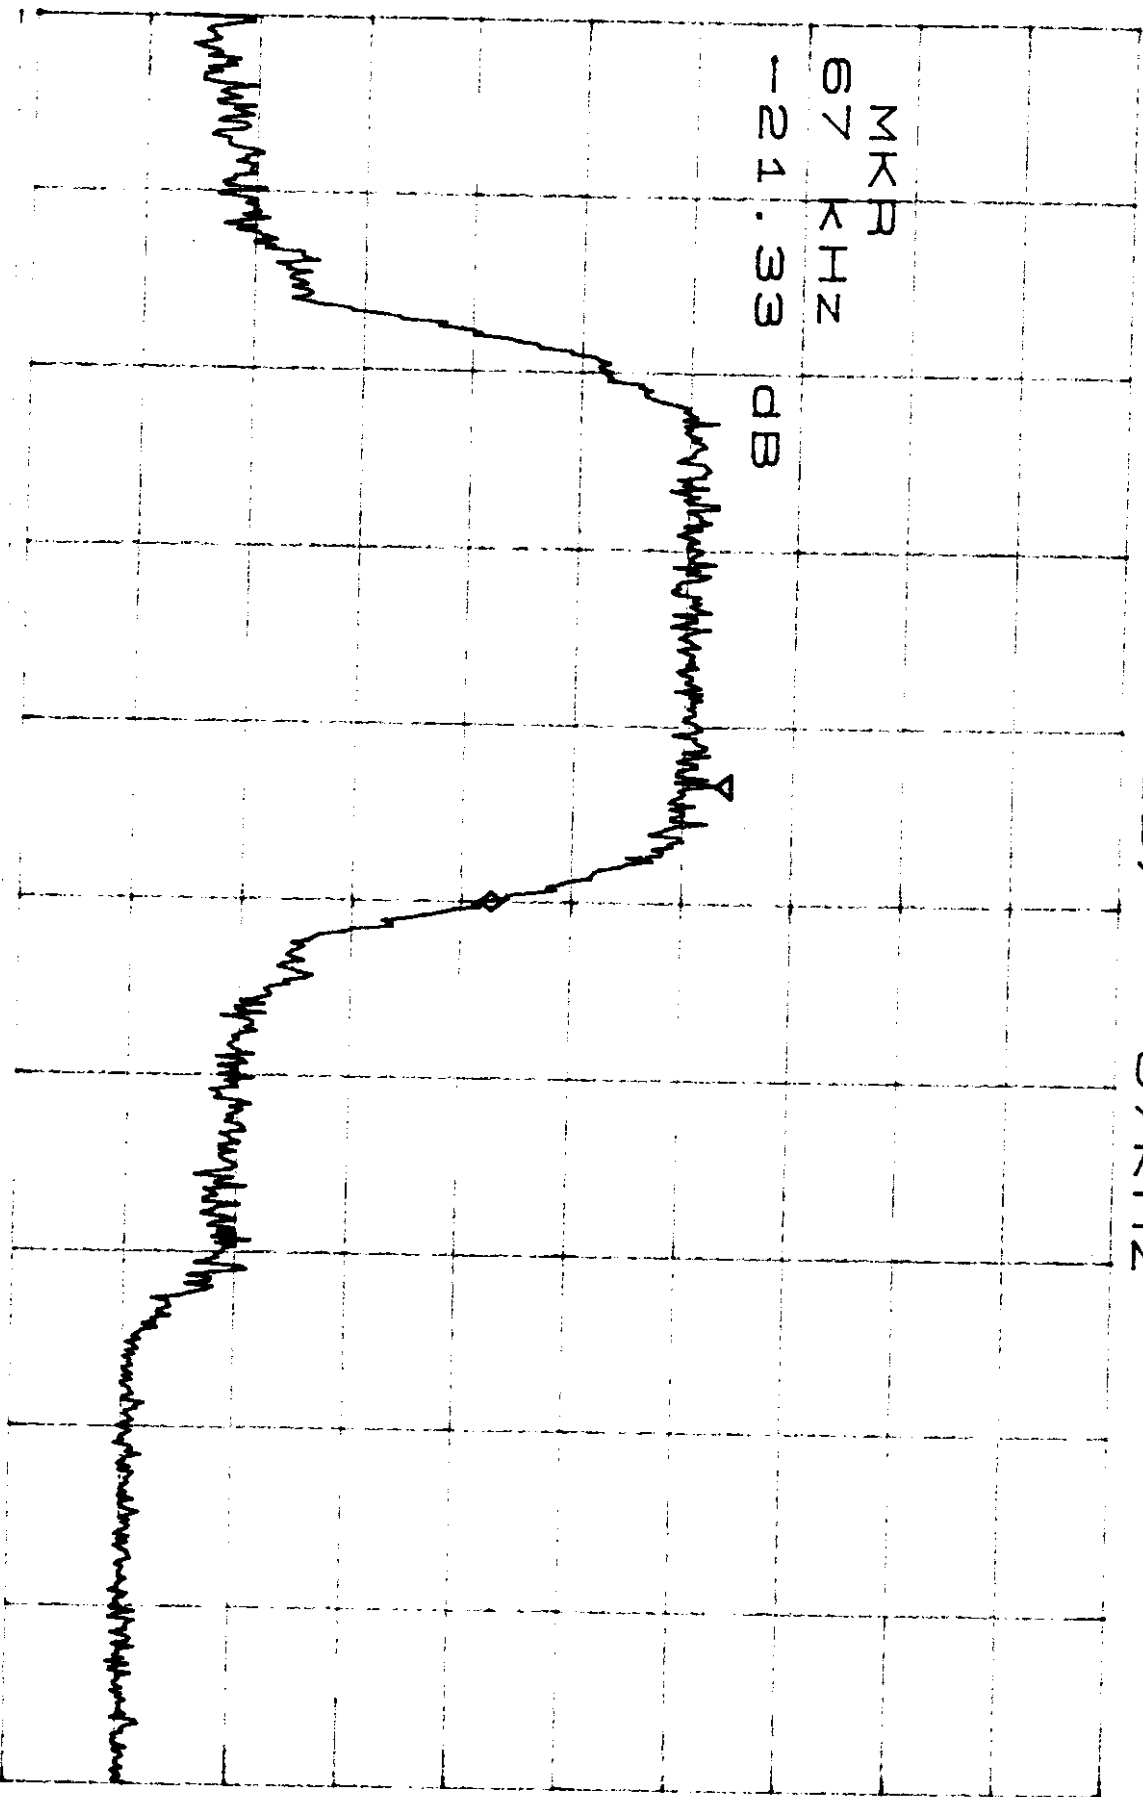

ATTEN 40dB
RL 30.0dBm

10dB/

102KHZ


2.4 GHz
ENET, ~~400 MHz~~ BANDEDGE
CH O, 1/4 DBS K2

MKR -33.83dB

MKR

102 KHZ

D
-33.83 dB

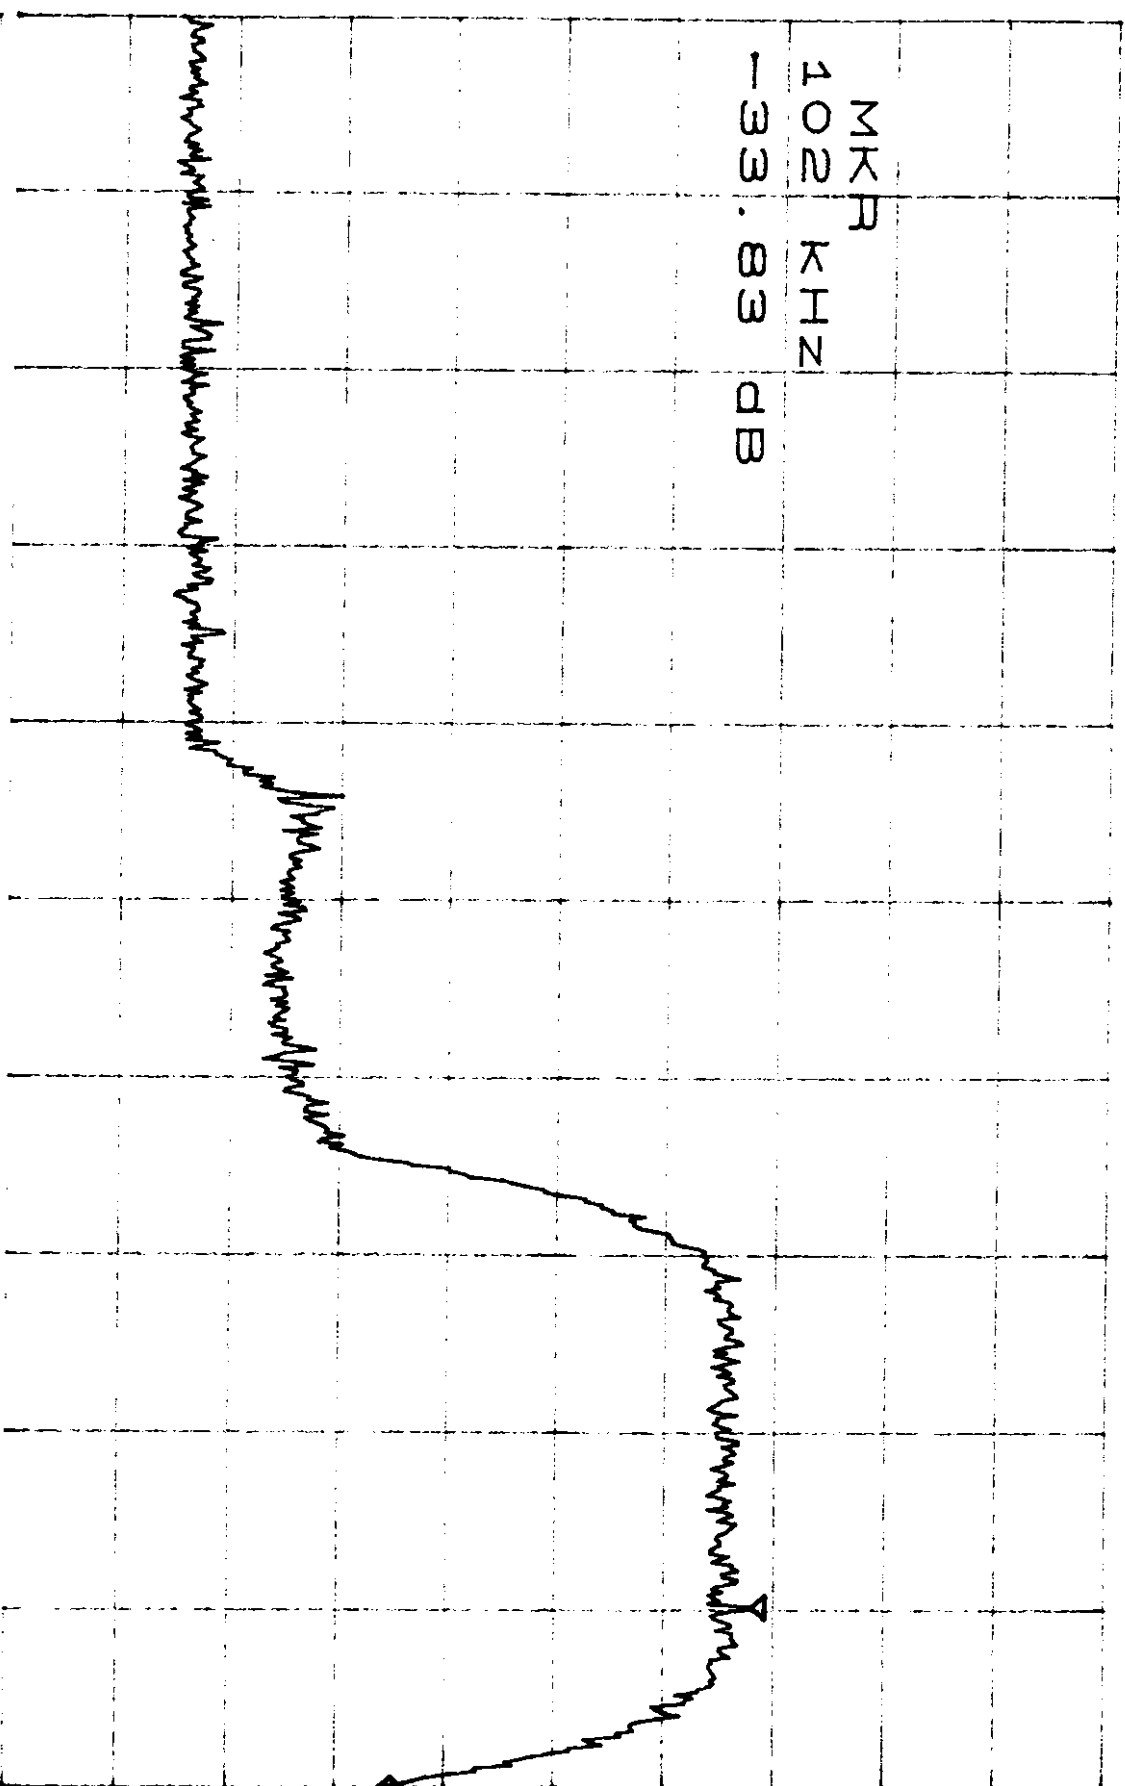

CENTER 2.400000GHZ


SPAN 1.000MHZ

ATTEN 40dB
RL 30.0dBm

10dB/

ENET 2.4GHz BANDWIDTH
CH 0, 16QAM x 2
MKR -43.84dB

MKR
-235 KHz
D
-43.84 dB

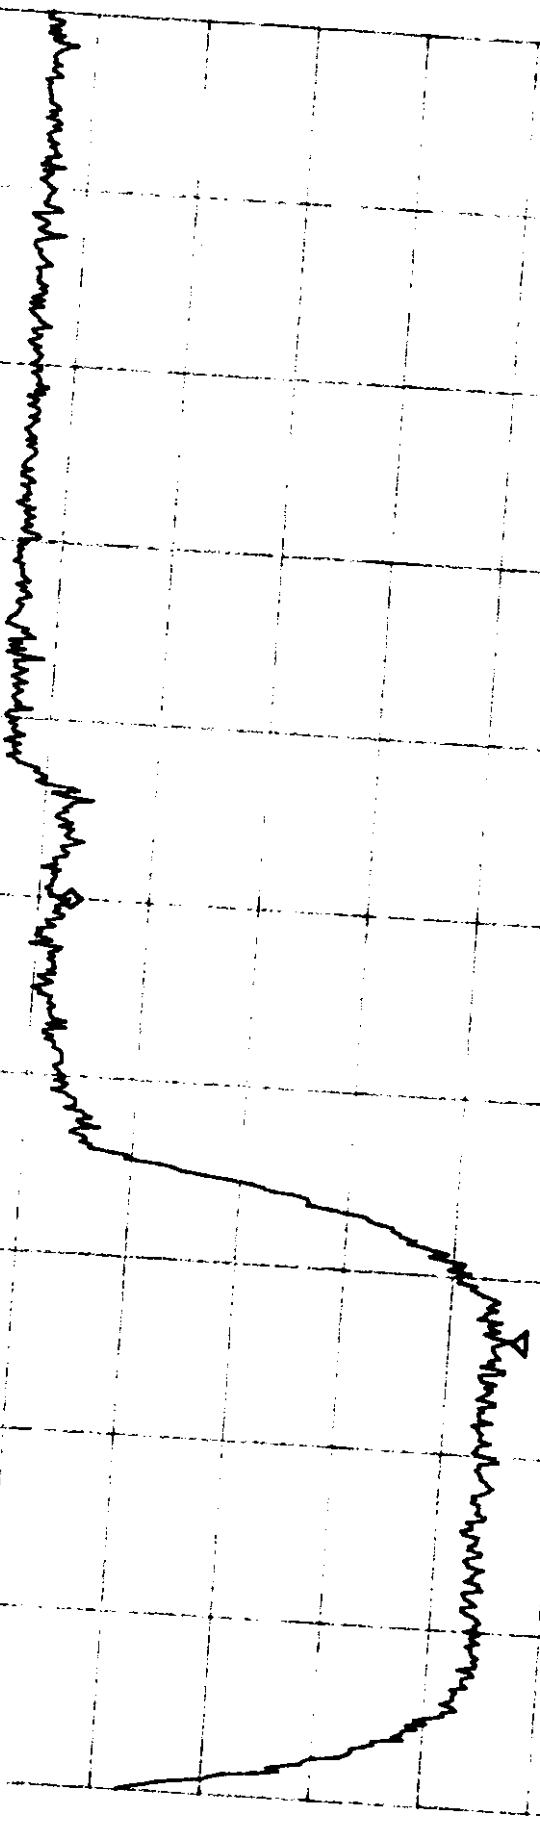

CENTER 2.400000GHZ
*RBW 10KHZ

SPAN 100KHZ

ATTEN 30dB
RL 20.0dBm


10 dB/

NUM OF CHANNELS
ETHERNET 100MHz

1-4

D

STOP
940.000 MHz

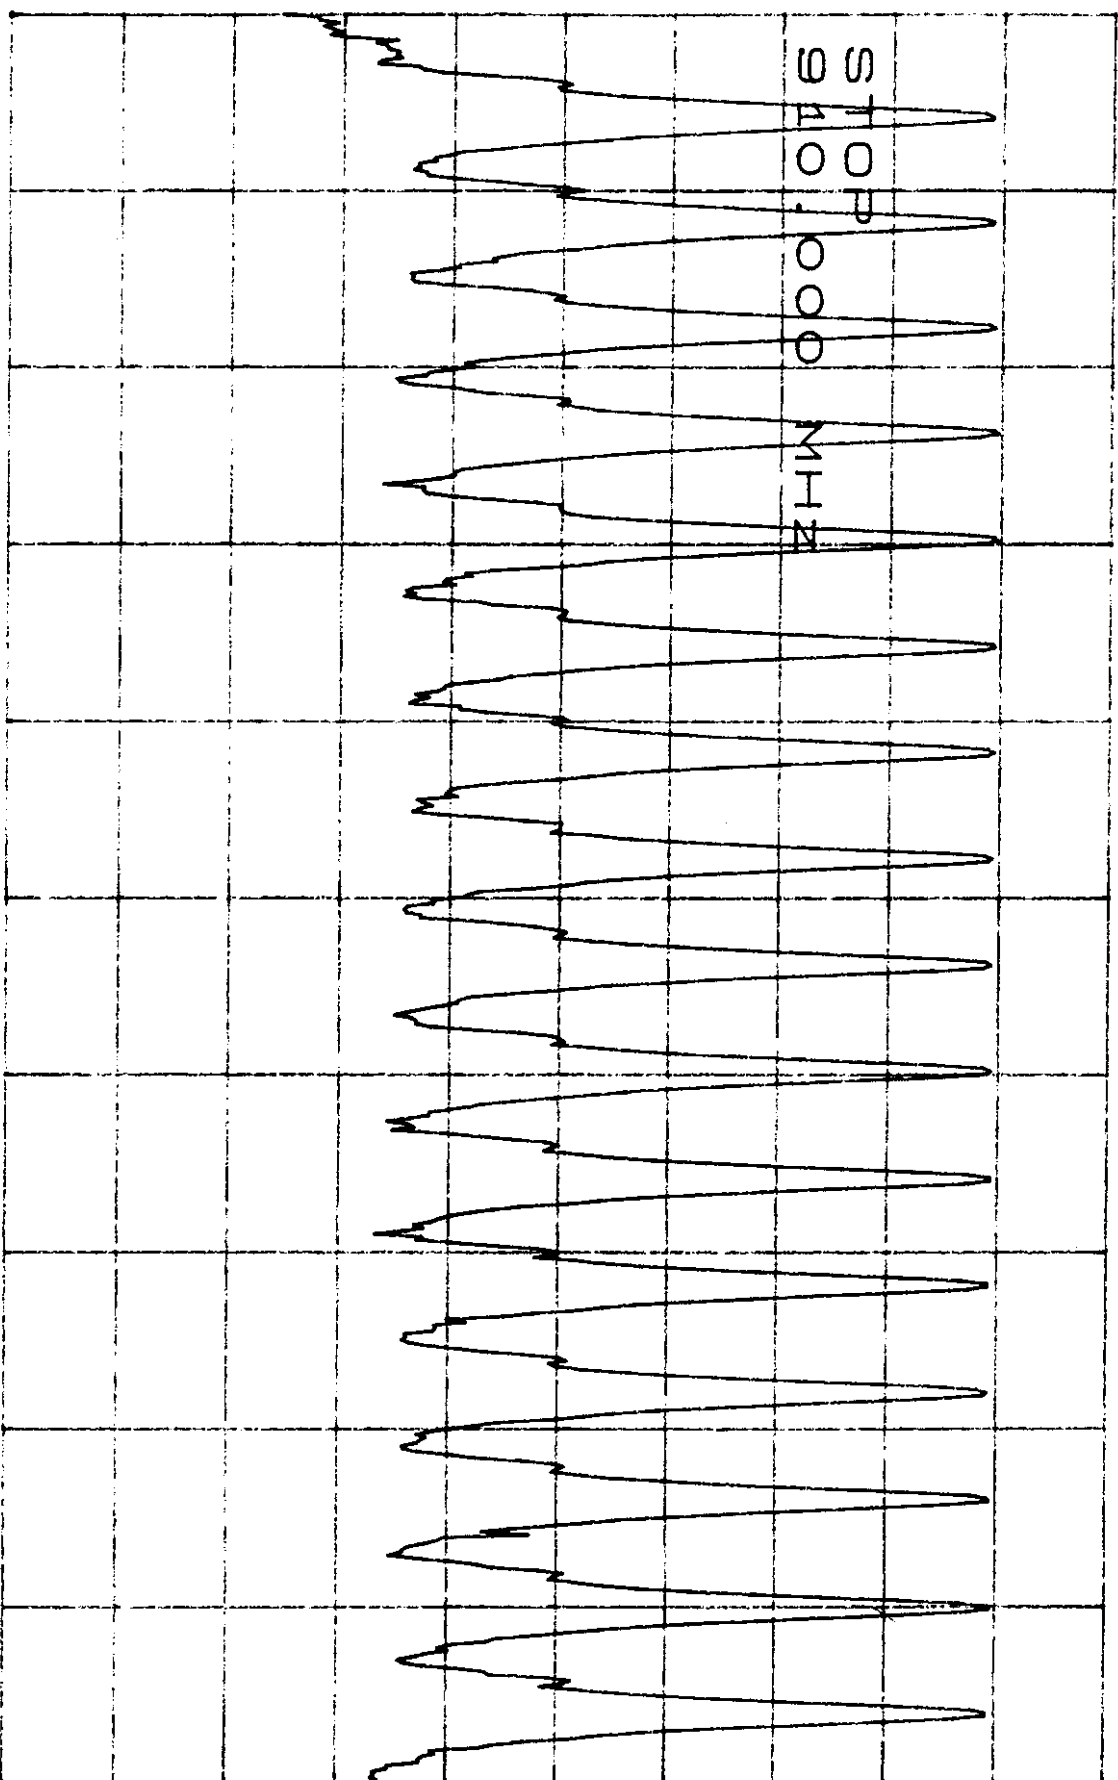

START 902.000MHz

STOP 910.000MHz

*RBW 30kHz

VBW 30kHz

SMP 50.0ms


NOM OF CHANNELS
ETHERNET RADIO
900 MHz

2.4

ATTEN 30dB
RL 20.0dBm

10 dB/

STOP
915.000 MHz
D

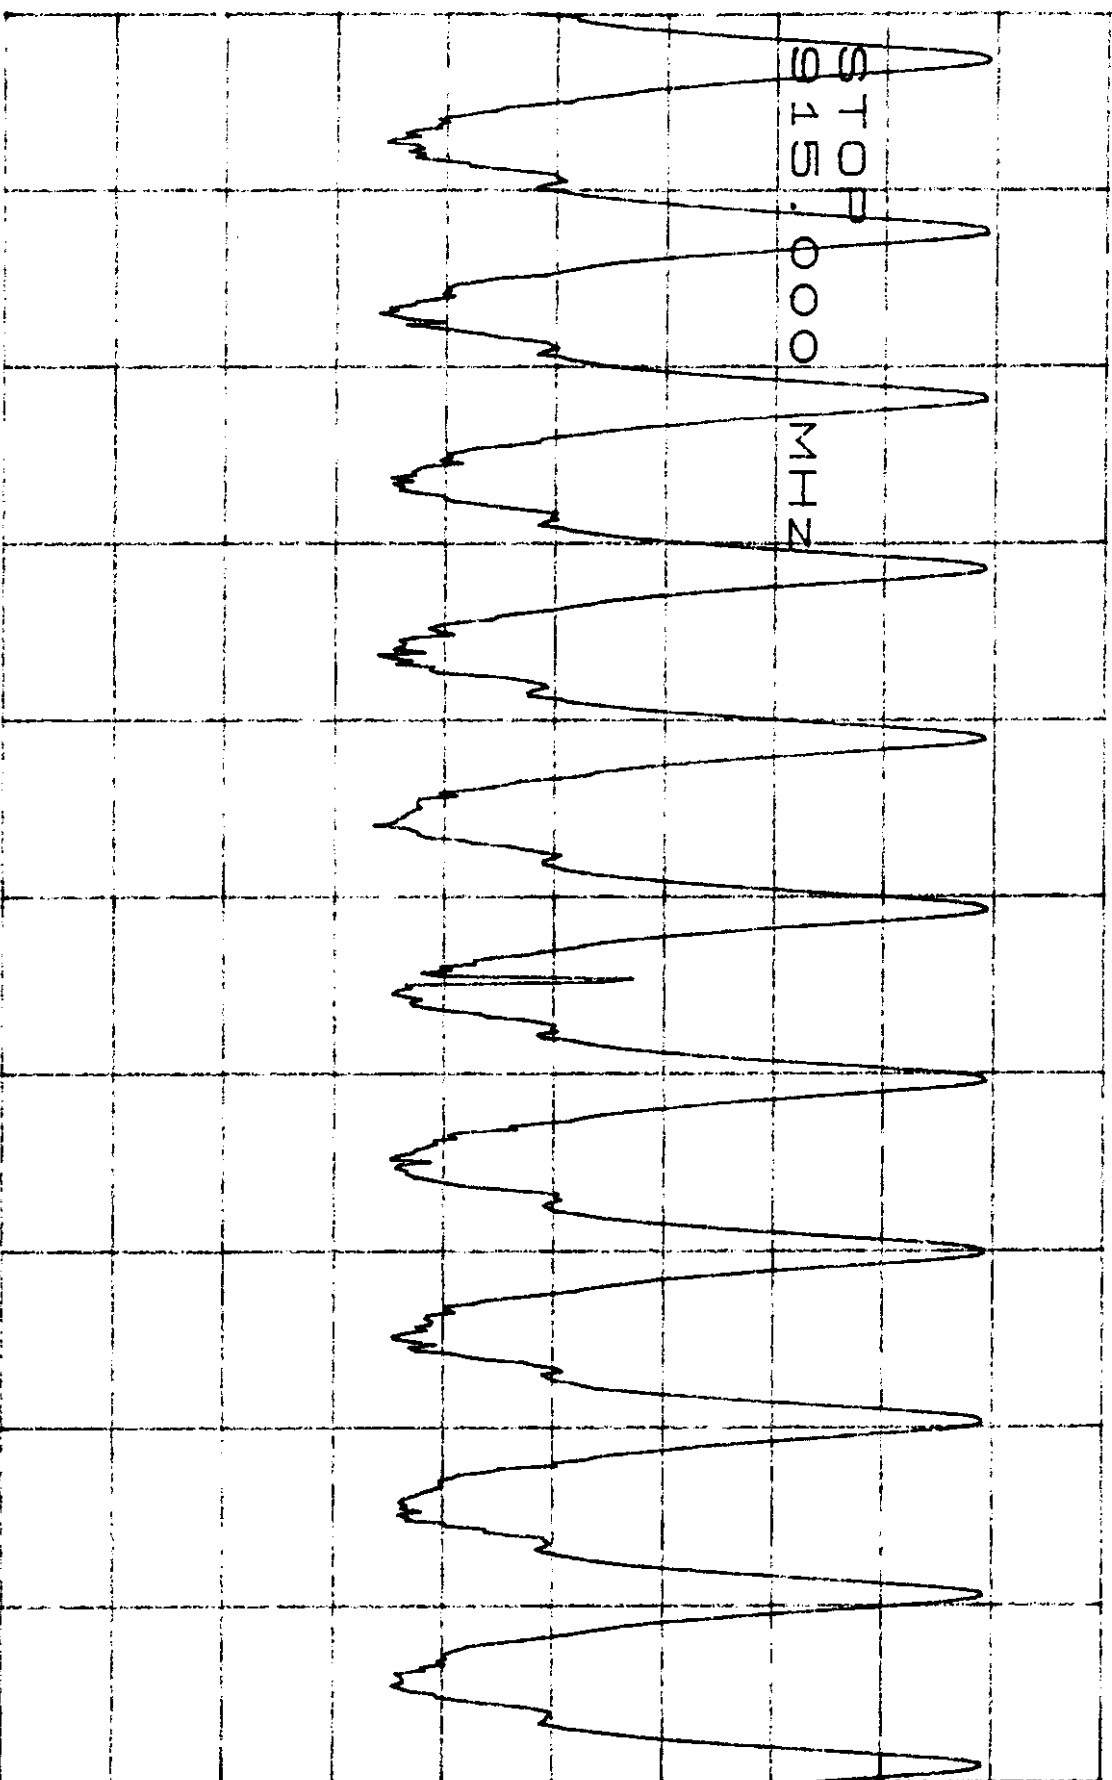

START 910.000MHz

STOP 915.000MHz

ADDITION OF CHANNELS
EXTRACT 1 RADIO
900MHz


3-4

ATTEN 30dB
RL 20.00dBm

10 dB/

D

STOP
920.000 MHz

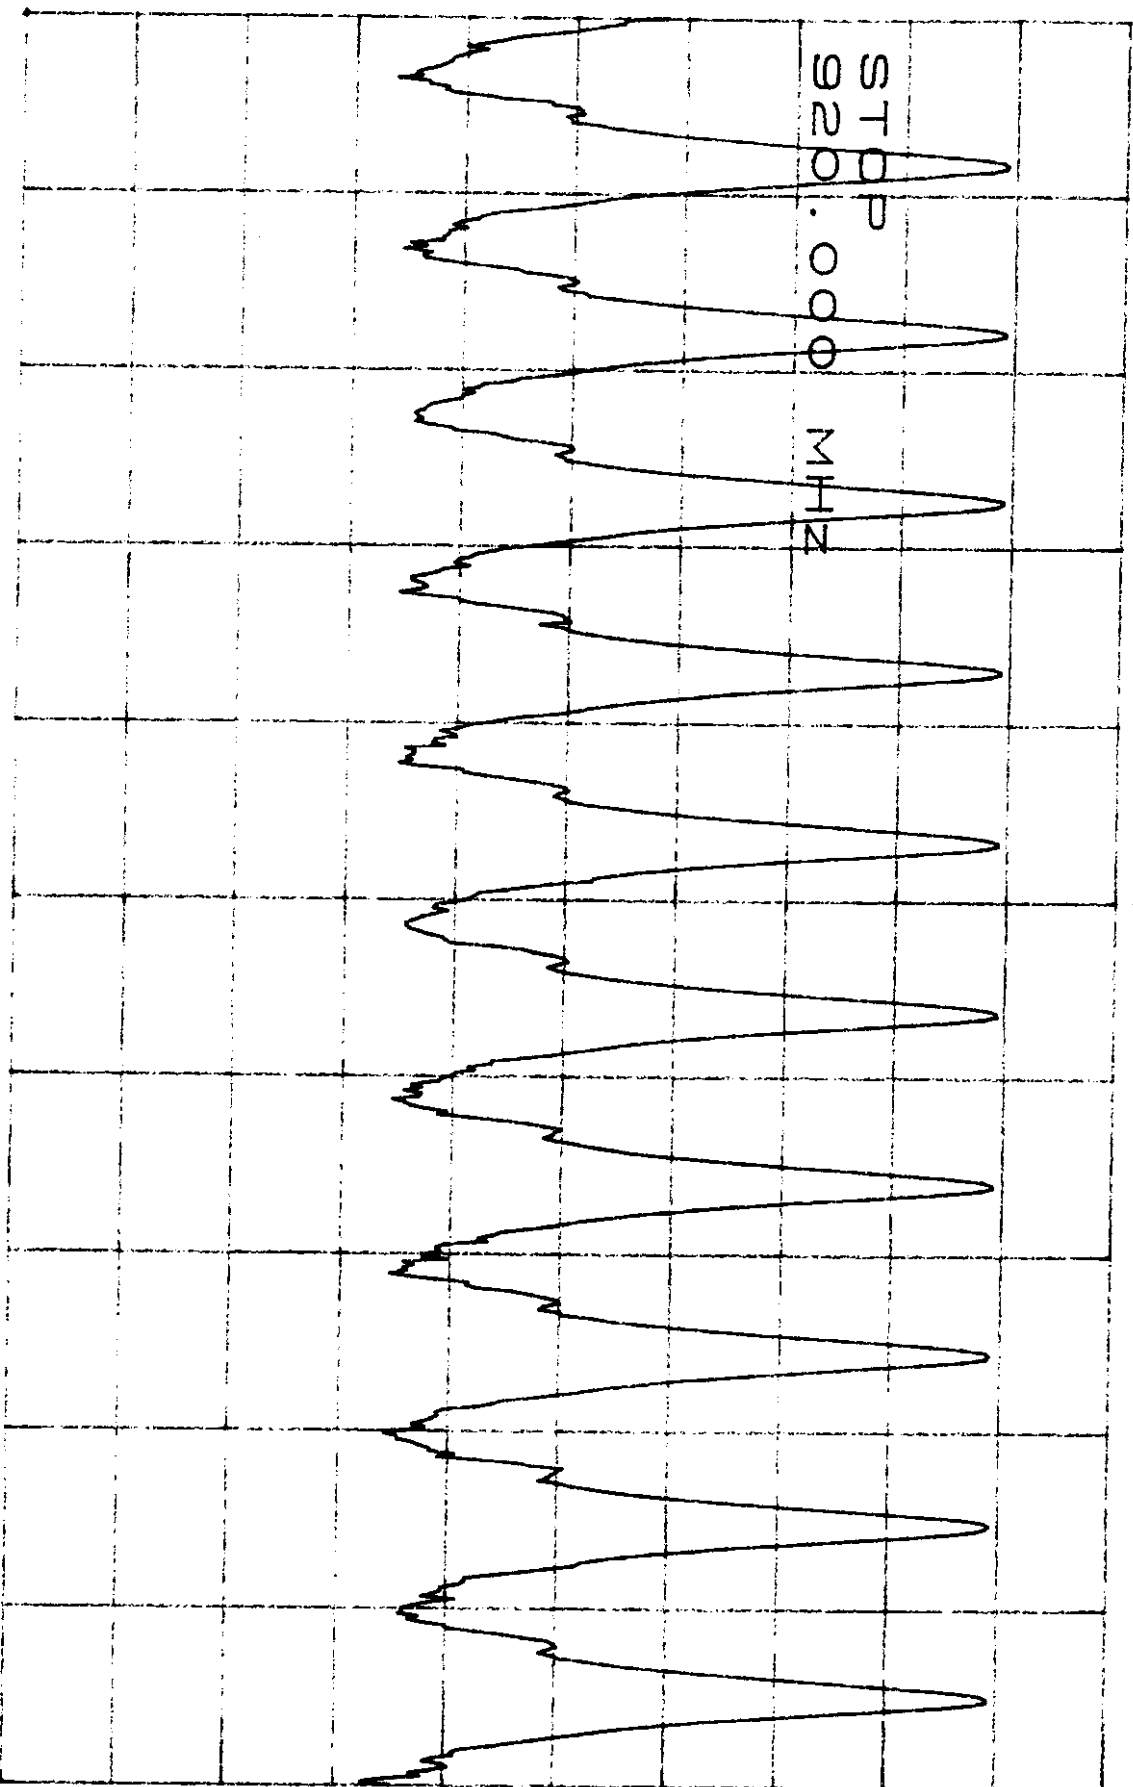

START 915.000MHz

STOP 920.000MHz

*RBM 30KHz

VIEW

COIN


ATTEN 30dB
RL 20.00dBm

10 dB/

10M OF CHANNELS
ETHERNET & RADIO
400MHz
4-4

D

STOP
928.000 MHz

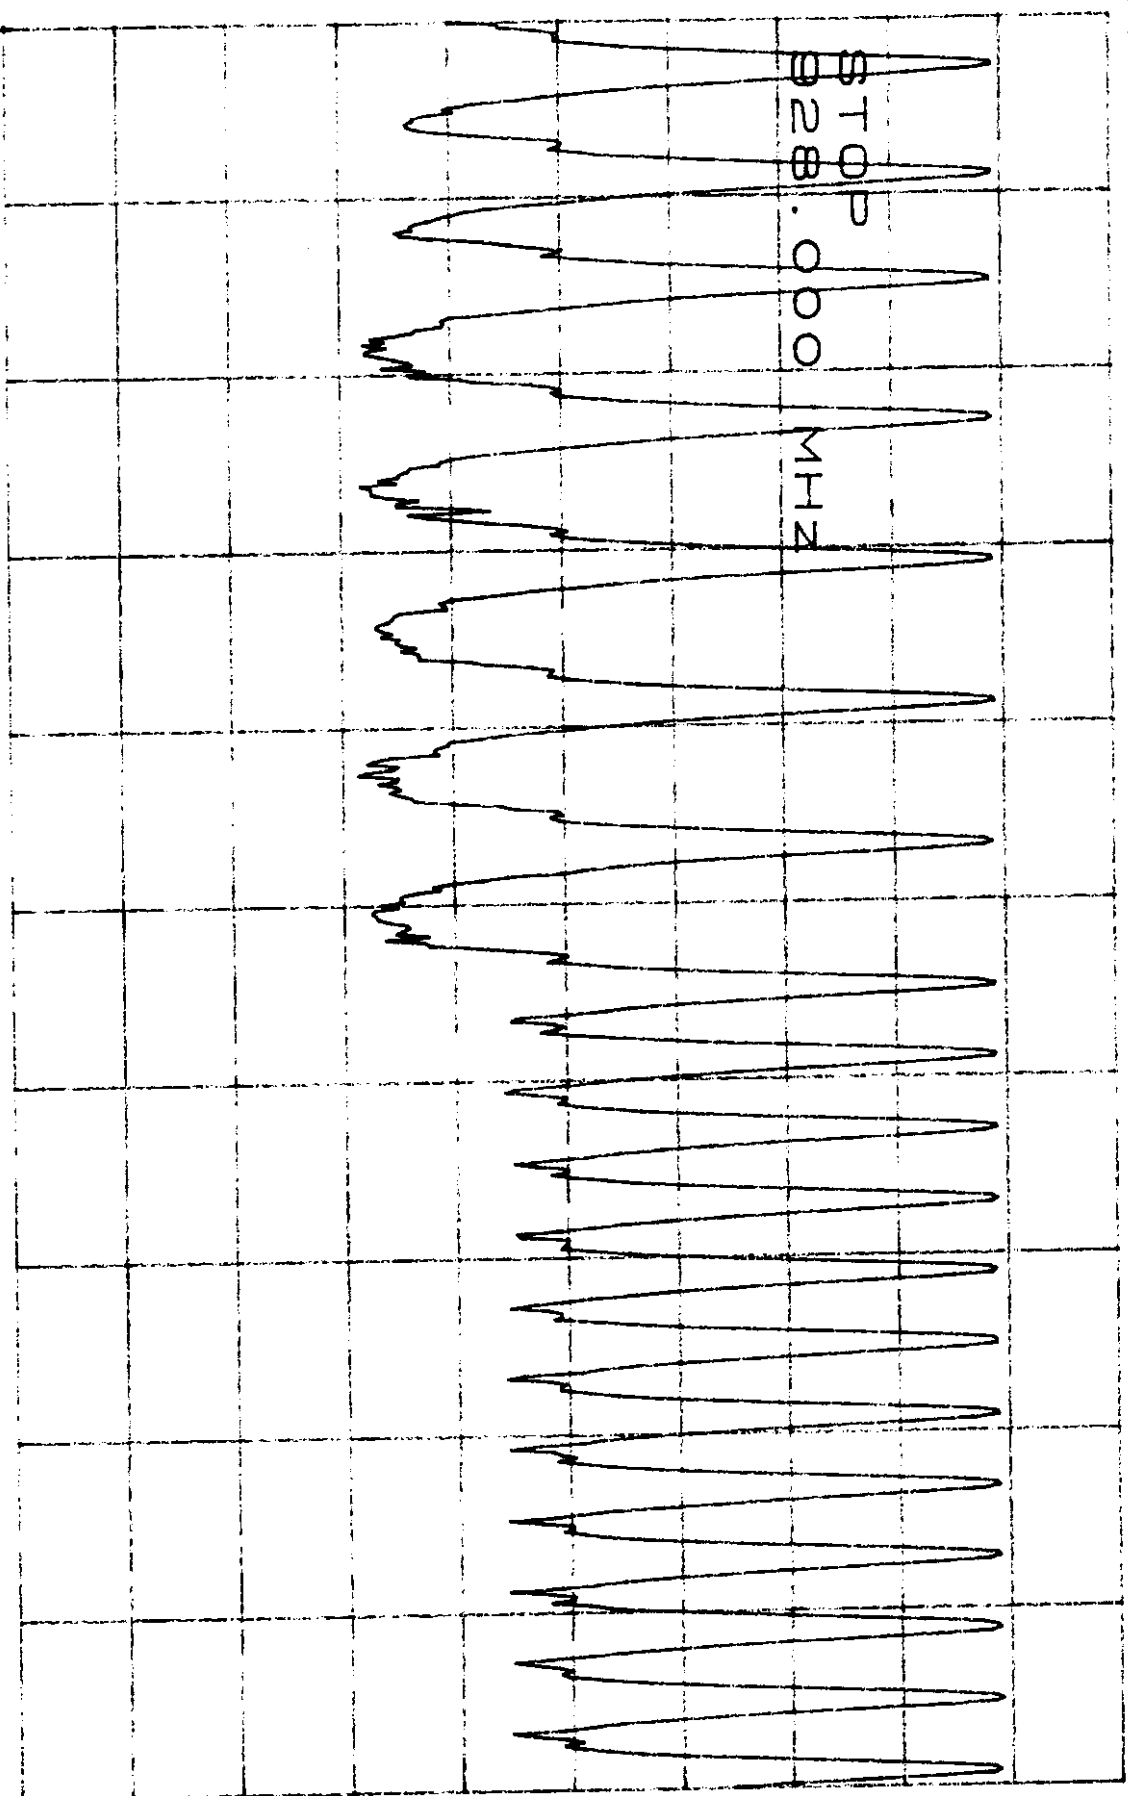

START 920.000MHz

STOP 928.000MHz

SWP 50.0ms


ATTEN 30dB
RL 20.0dBm

10 dB/

ADON OF CHAN
ETHERNET
2.4G
1-9

D

STOP
2.40000 GHz

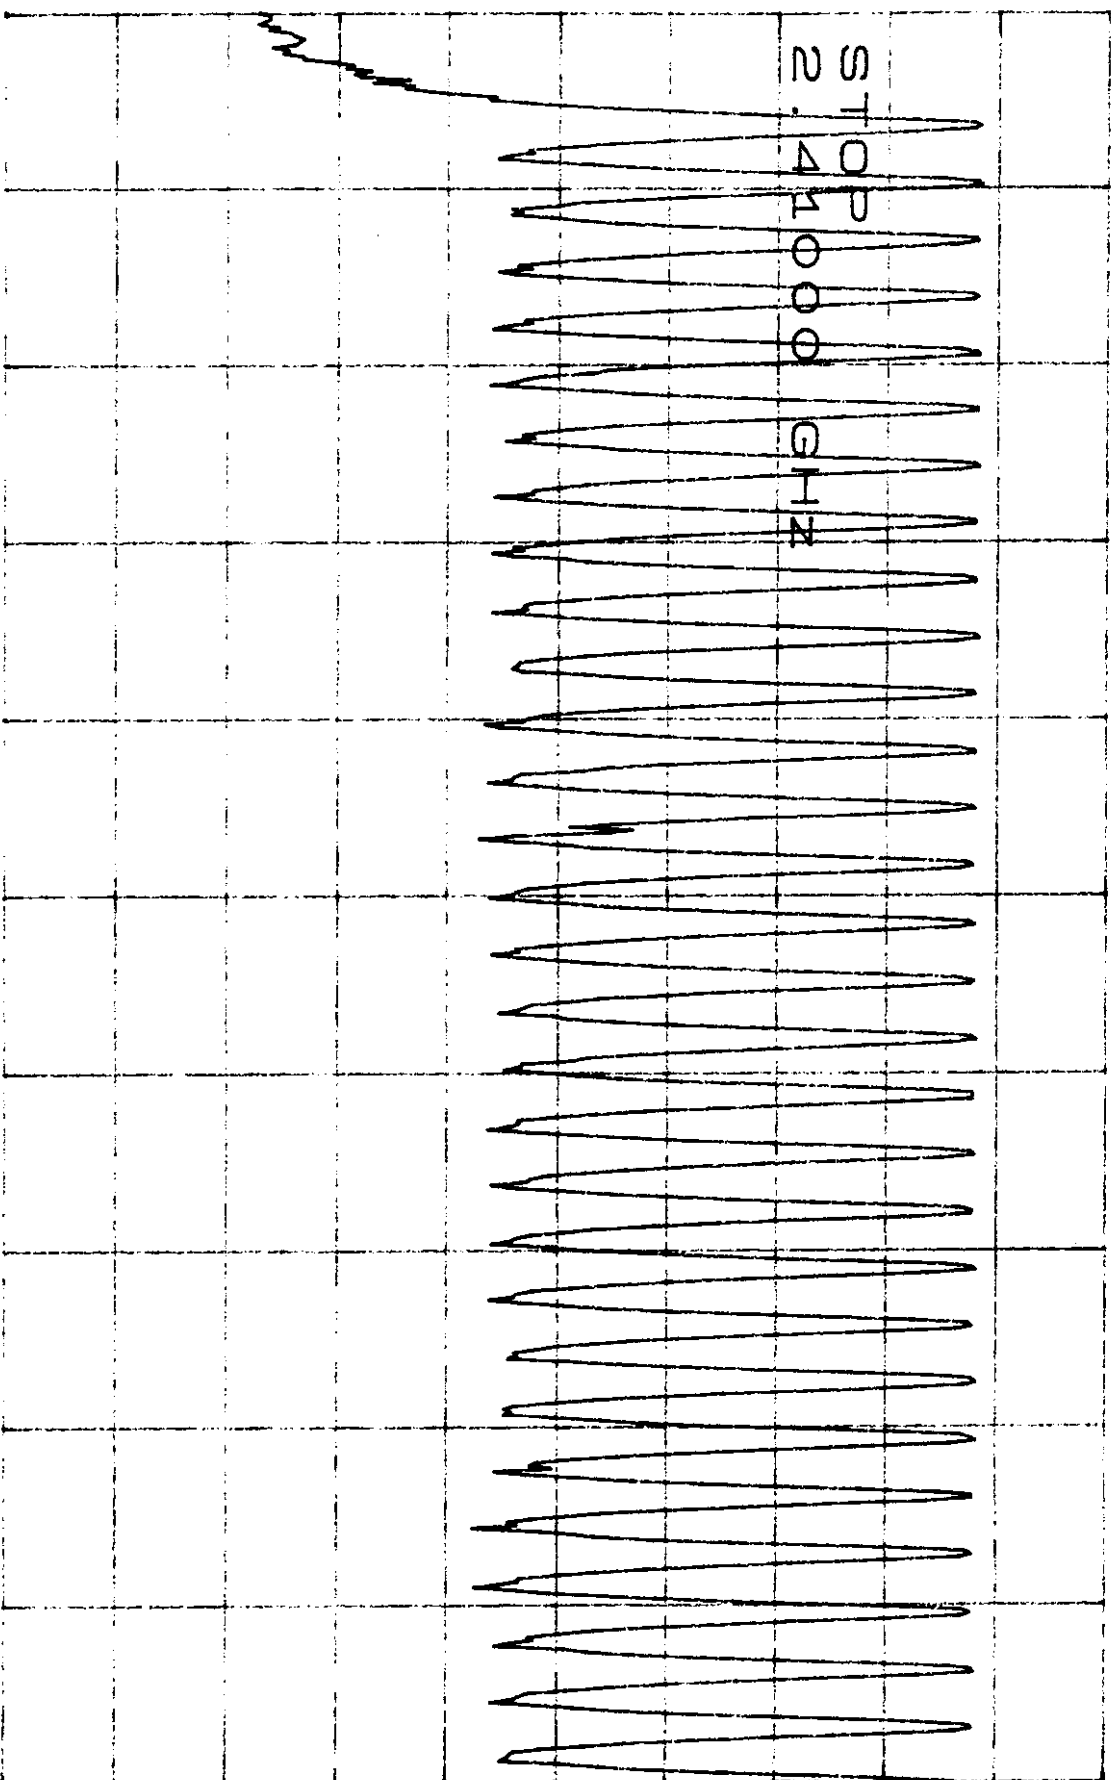

START 2.40000GHz

STOP 2.41000GHz

*RBW 30KHz

VBW 30KHz

SWB 500ms

100M OF CHAN
ETHERNET


ATTEN 30dB
RL 20.0dBm

10 dB/

2-9

D

0.0
0.4
1.2
2.0
3.0
4.0
5.0
6.0
7.0
8.0
9.0
10.0

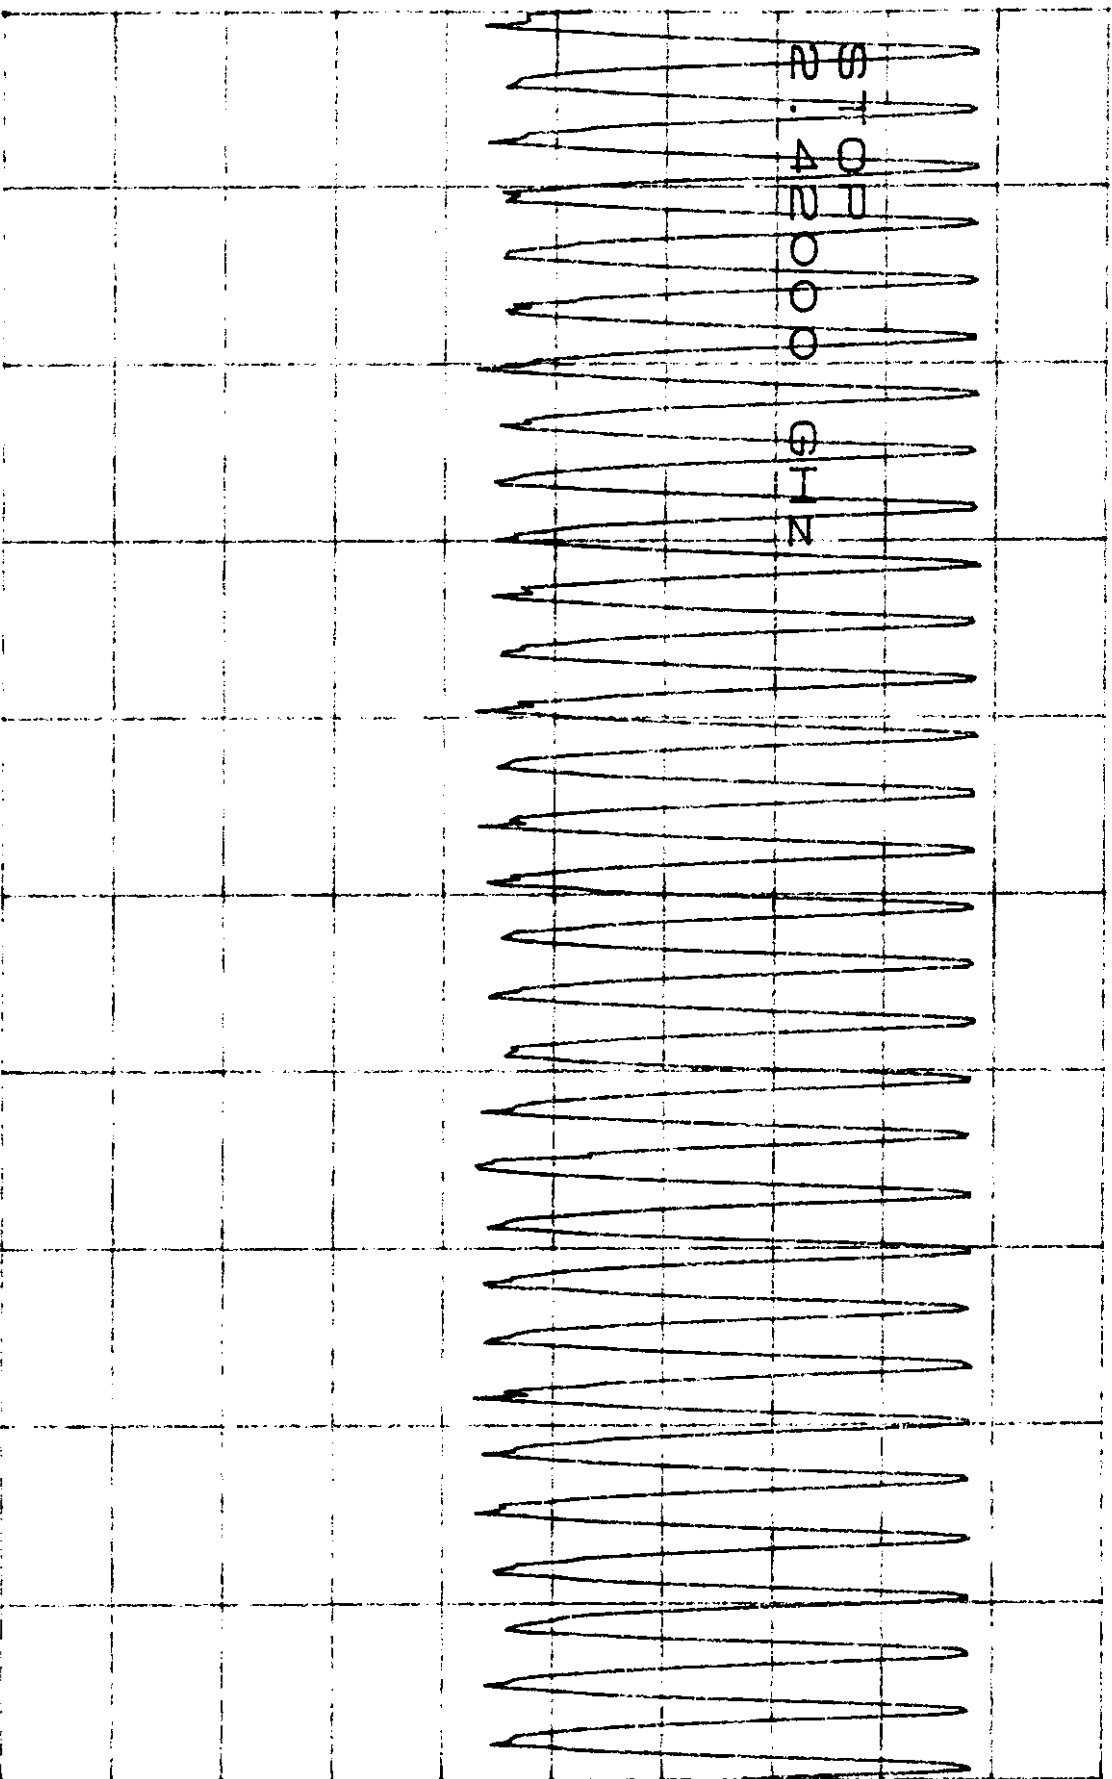

START 2.41000GHZ

STOP 2.42000GHZ

*BRW 30KHZ

VBW 30KHZ


SWB 50.0ms

ALUM OF CHAN ETHERNET

3-9

ATTEN 300B
RL 20.00BFR

10 dB/

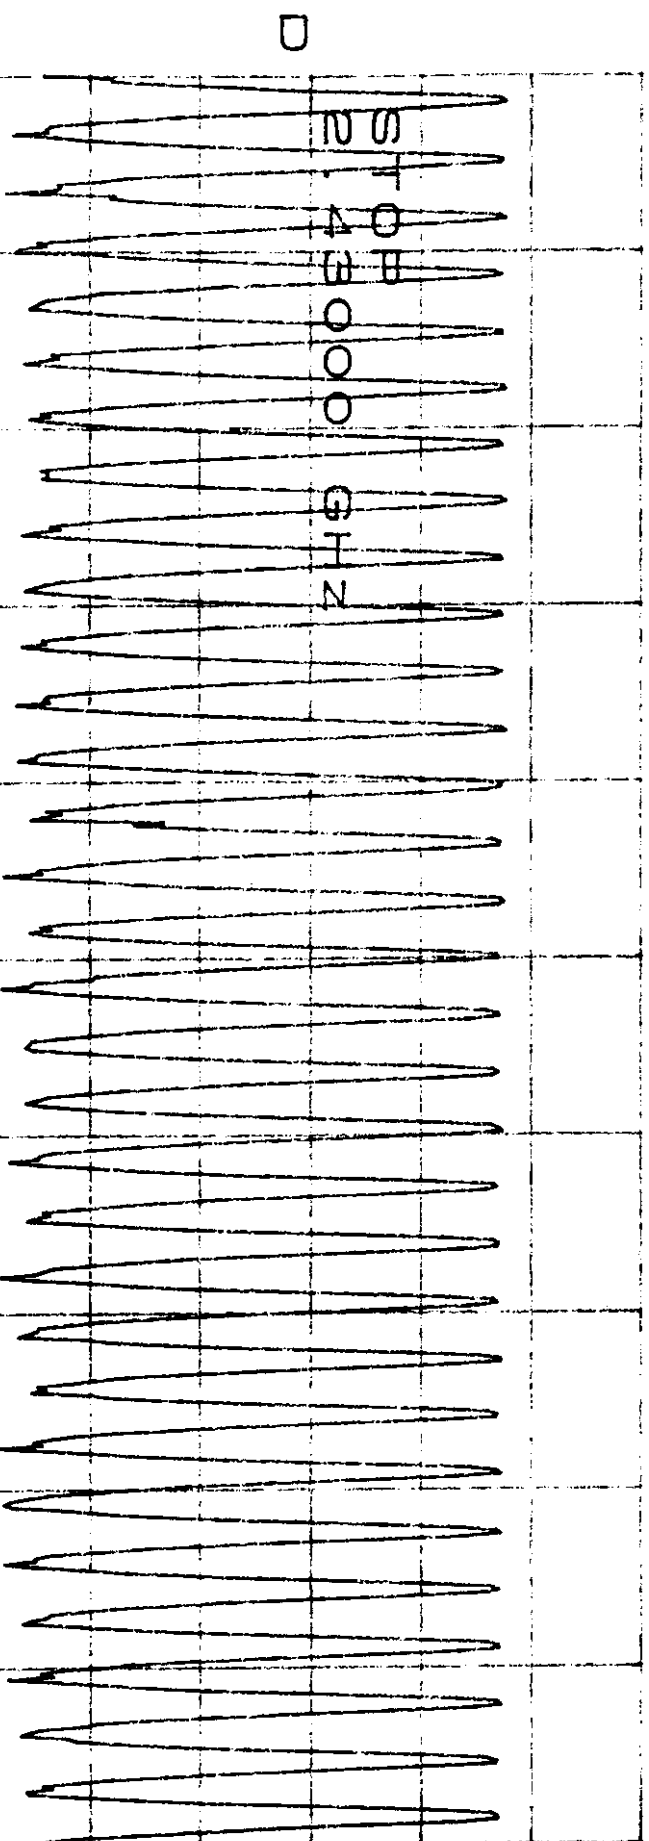

START 2.42000GHZ

STOP 2. 43000GHZ

ATTEN 30dB
PL 20.0dBm

10 dB/

MON OF CHAN
ETHERNET


4-9

D

STOP
2.44000GHz

START 2.43000GHz

STOP 2.44000GHz

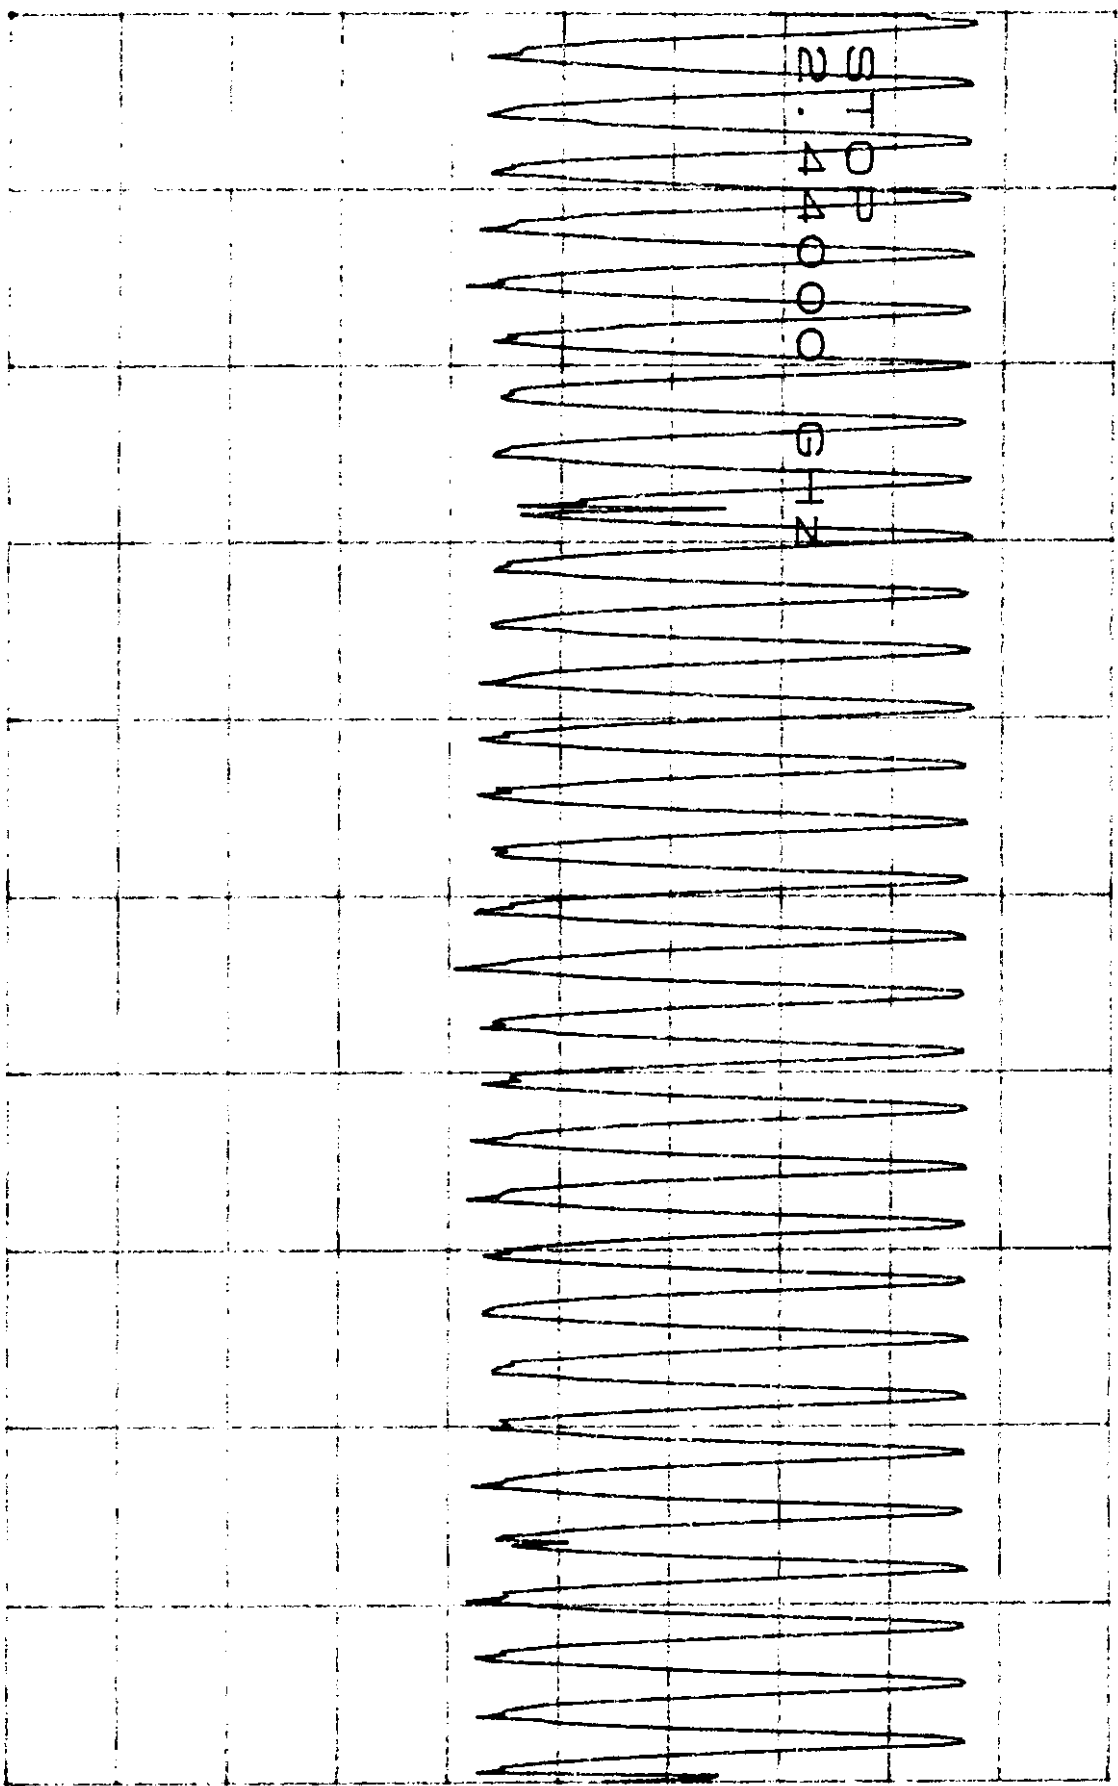

ATTEN 30dB
RL 20.0dBm

10 dB/

10M OF CHAN
ETHERNET


5-9

D

0.00
1.00
2.00
3.00
4.00
5.00
6.00
7.00
8.00
9.00
10.00
11.00
12.00
13.00
14.00
15.00
16.00
17.00
18.00
19.00
20.00
21.00
22.00
23.00
24.00
25.00
26.00
27.00
28.00
29.00
30.00
31.00
32.00
33.00
34.00
35.00
36.00
37.00
38.00
39.00
40.00
41.00
42.00
43.00
44.00
45.00
46.00
47.00
48.00
49.00
50.00
51.00
52.00
53.00
54.00
55.00
56.00
57.00
58.00
59.00
60.00
61.00
62.00
63.00
64.00
65.00
66.00
67.00
68.00
69.00
70.00
71.00
72.00
73.00
74.00
75.00
76.00
77.00
78.00
79.00
80.00
81.00
82.00
83.00
84.00
85.00
86.00
87.00
88.00
89.00
90.00
91.00
92.00
93.00
94.00
95.00
96.00
97.00
98.00
99.00
100.00

START 2.44000GHZ


STOP 2.45000GHZ

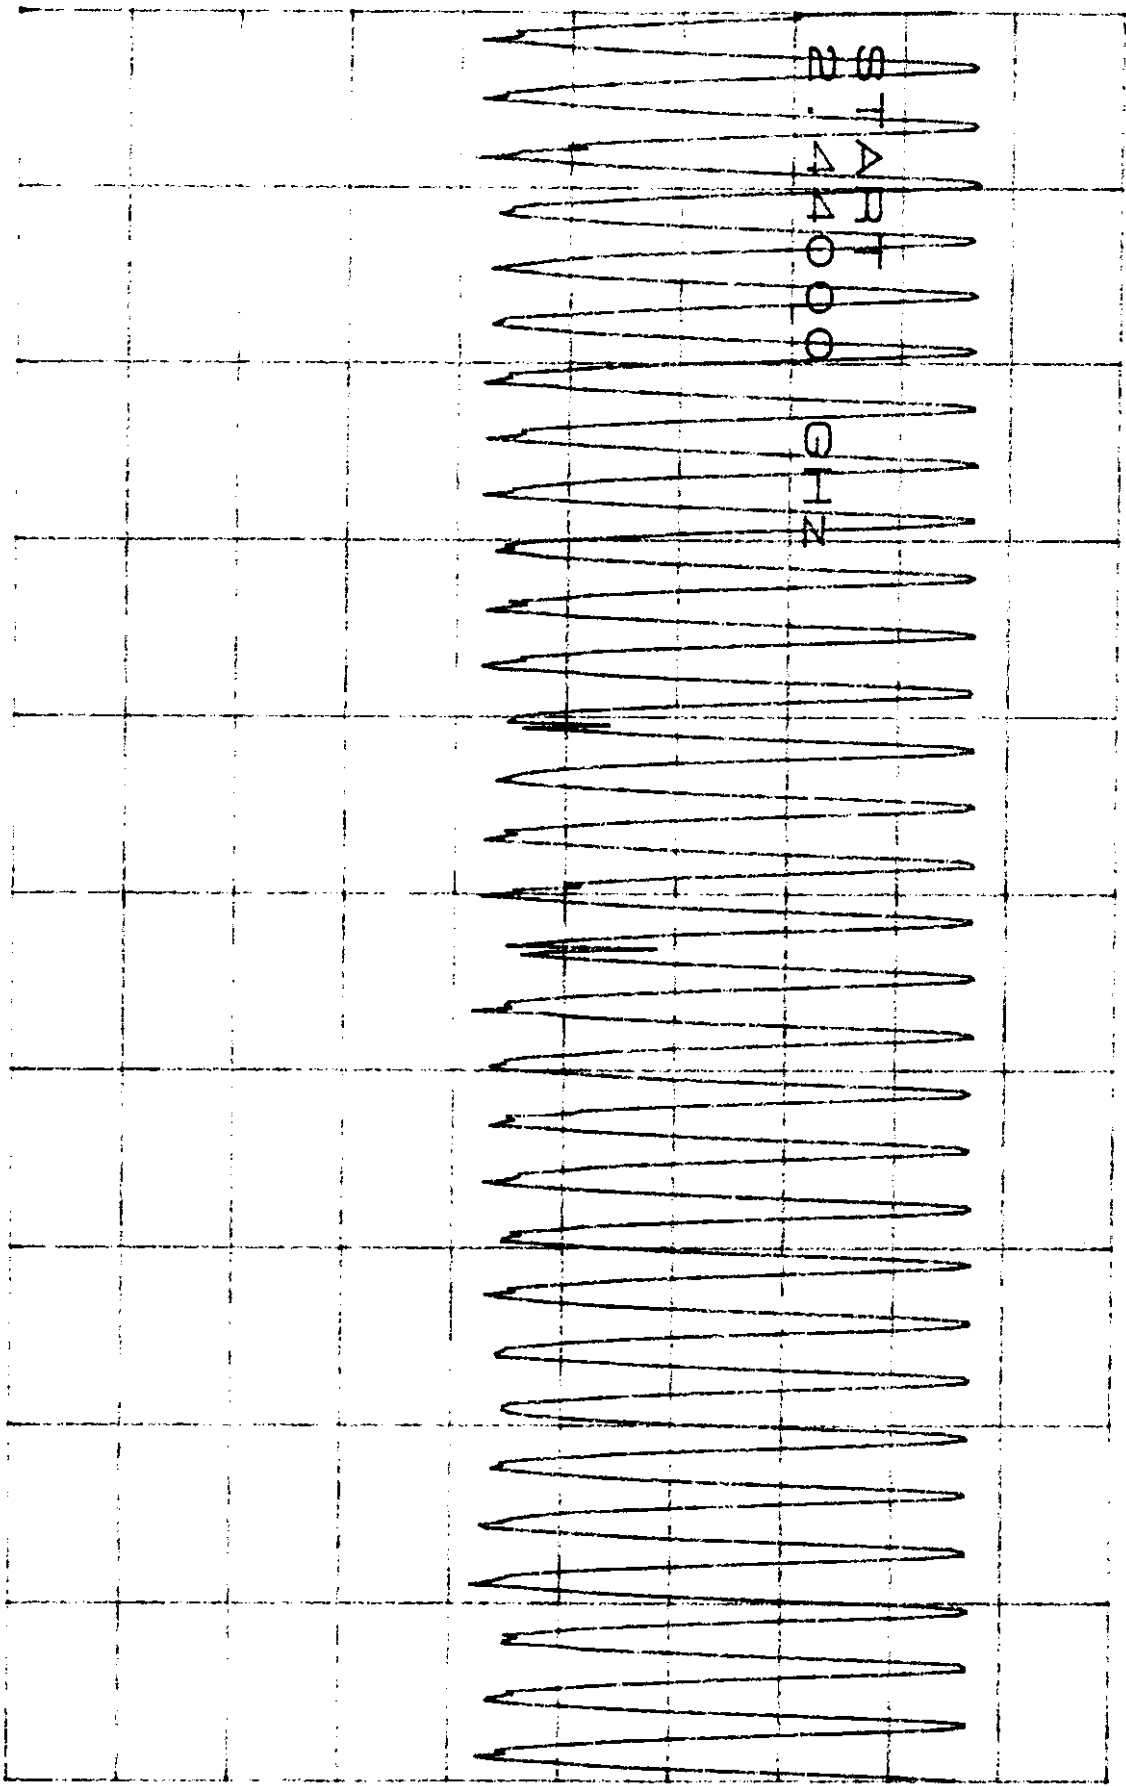

70 DB/

ROOM OF CHAN
ETHEZNET

6-9

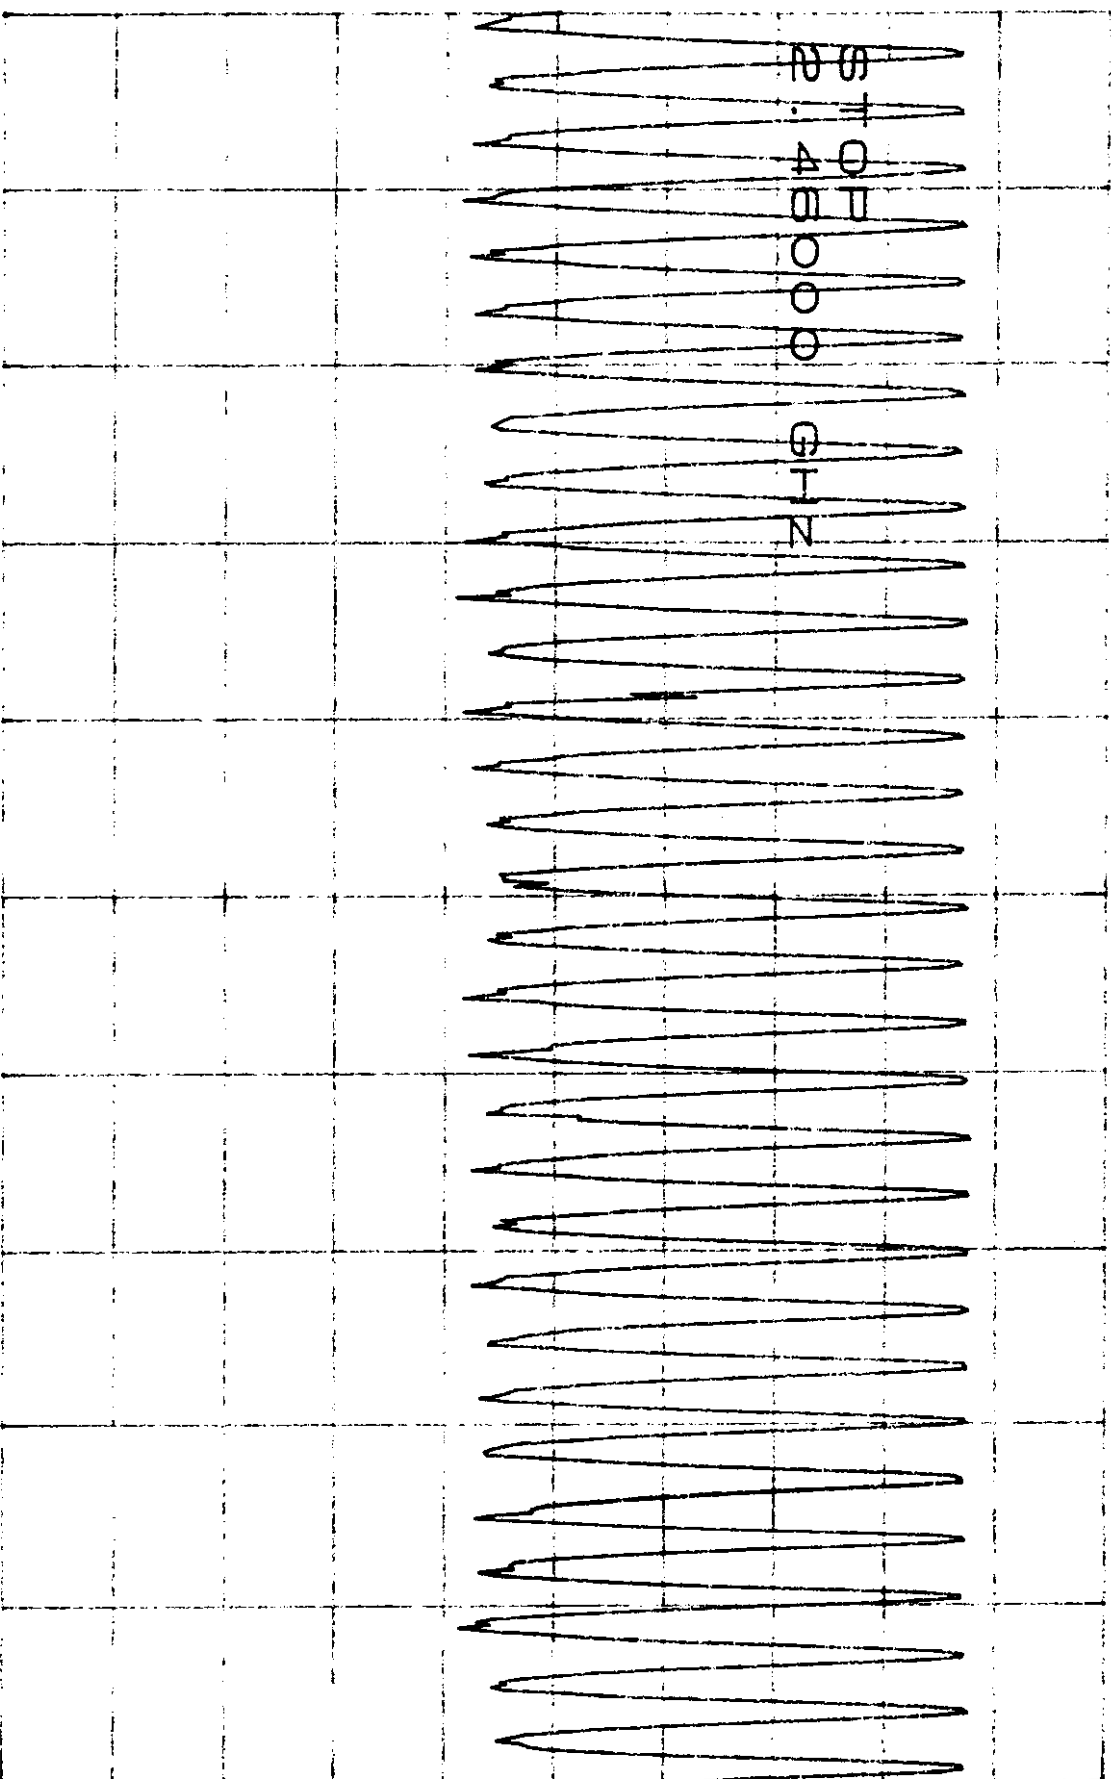

START 2.45000GHZ

STOP 2. 46000GHZ

ATTEN 30dB
RL 20.0dBm


10 dB/

NIOM OF CHRY
ETHERNET

2.9

D

ST 0.4
N. 47000
GHz

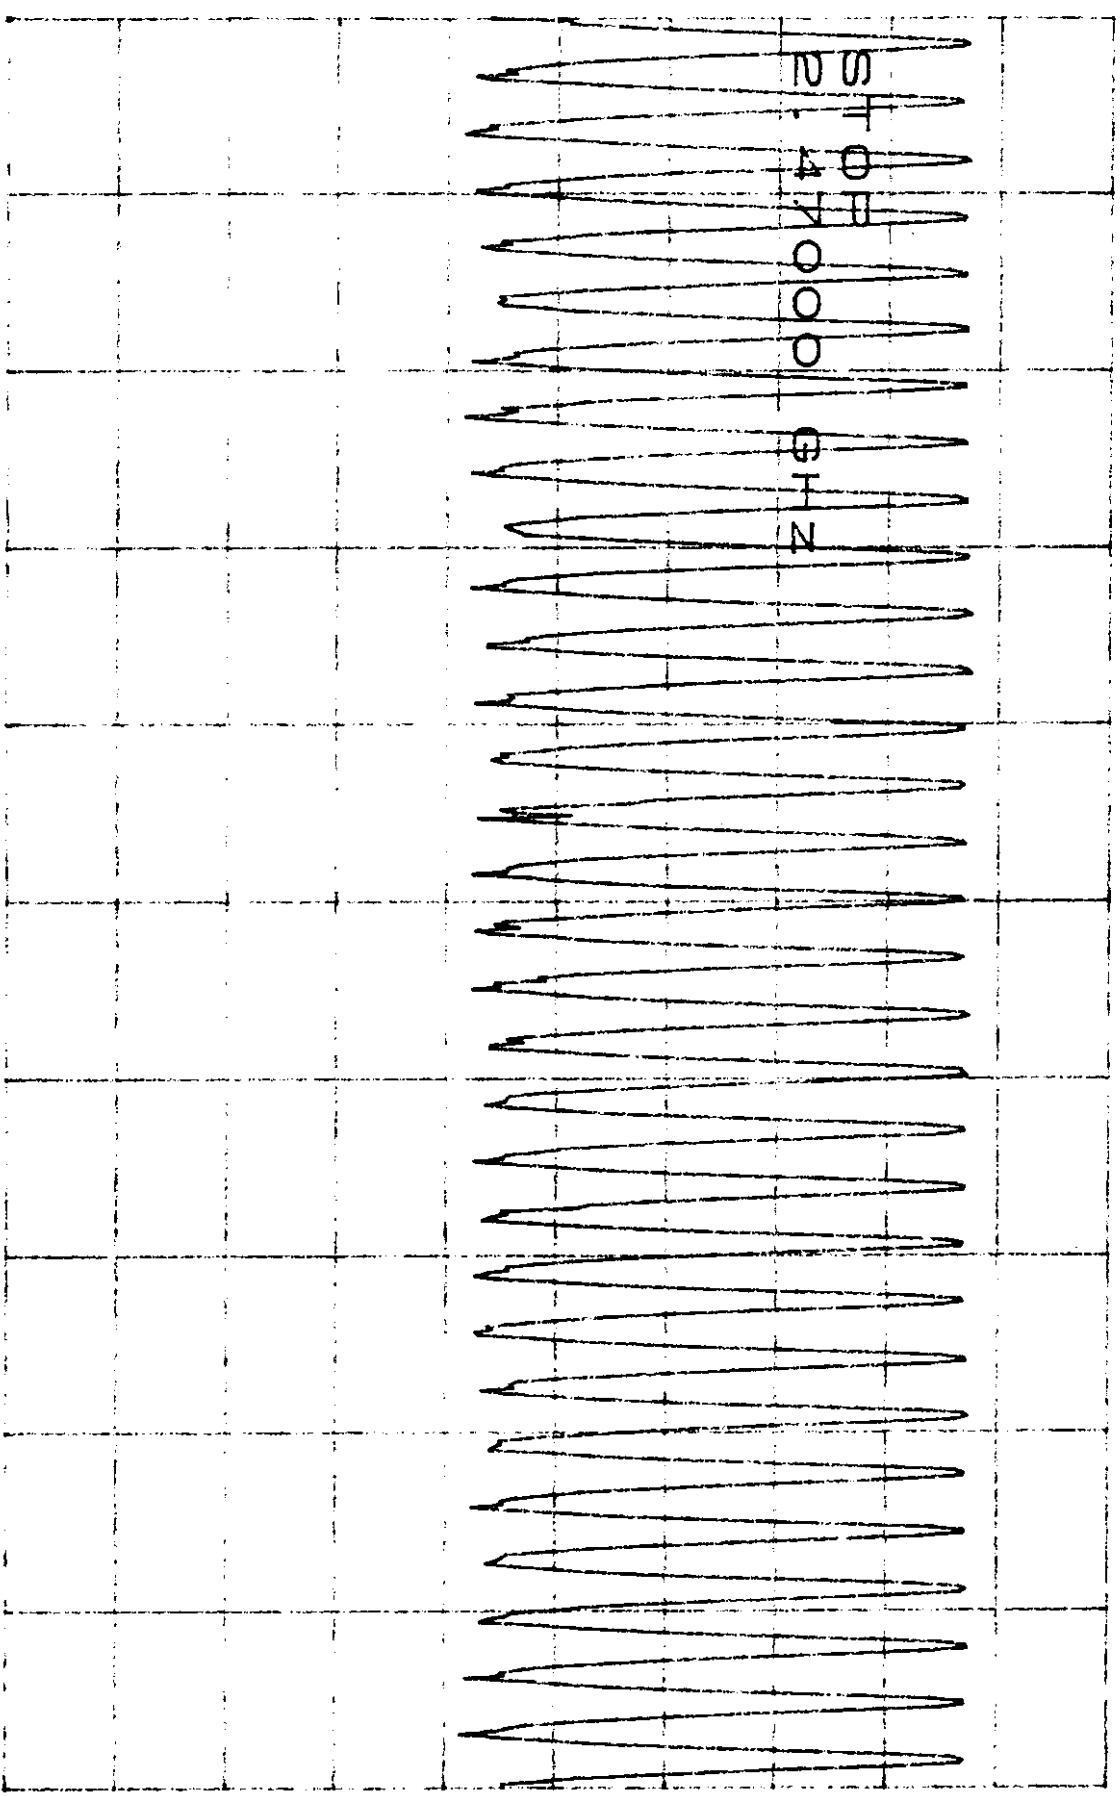

START 2.46000GHz

STOP 2.47000GHz

*RBW 30kHz

VBW 30kHz

SWP 50.0ms

ATTEN 30dB
RL 20.0dBm


10 dB/

MON OF CHAN
ETHERNET

8.9

D

STOP
2.48000GHz

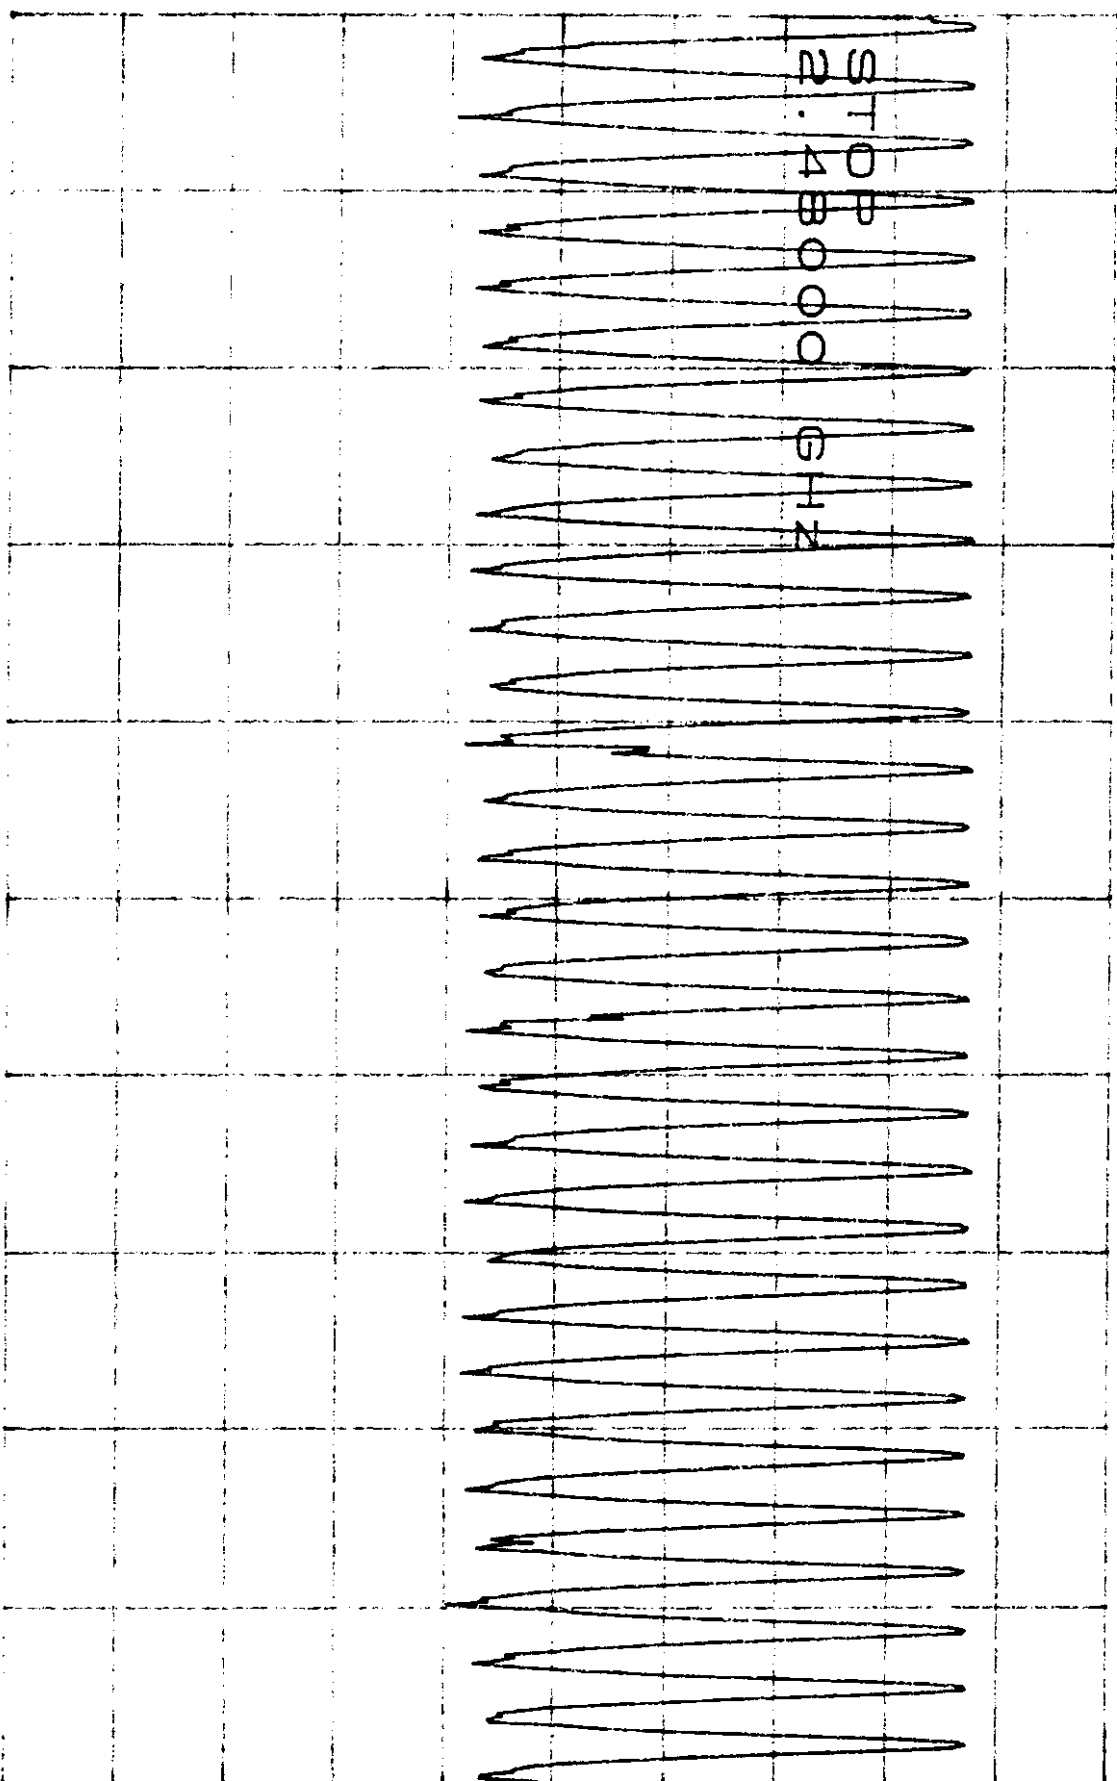

START 2.47000GHz


STOP 2.48000GHz

ATTEN 30dB
RL 20.0dBm

10 dB/

10M OF CHAN
ETHERNET
9-9

STOP
2.483500 GHz
D

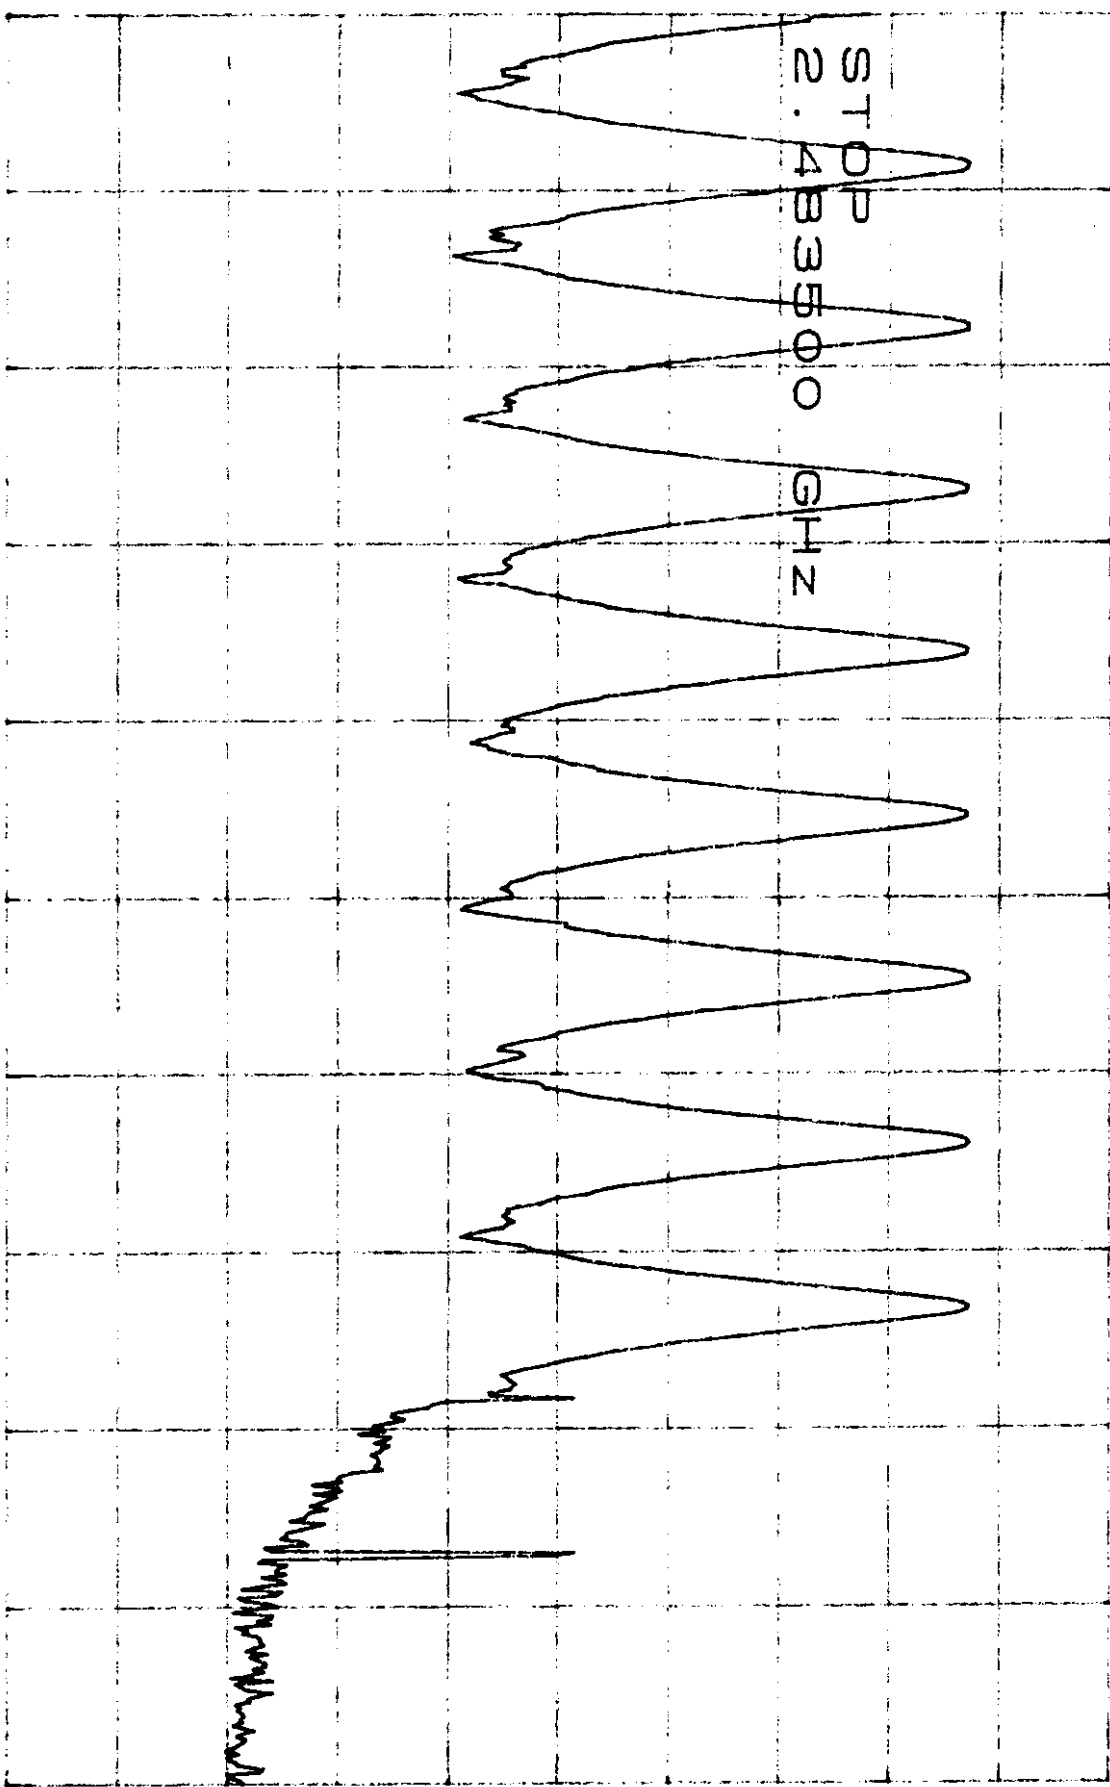

START 2.480000GHz STOP 2.483500GHz

2.4GHz
NUMBER OF CHANNELS: 30

MRK -42.50dBm

1-8


ATTEN 30dB
RL 20.0dBm

10dB/

2.40010GHz

D

REF
20.0
dBm

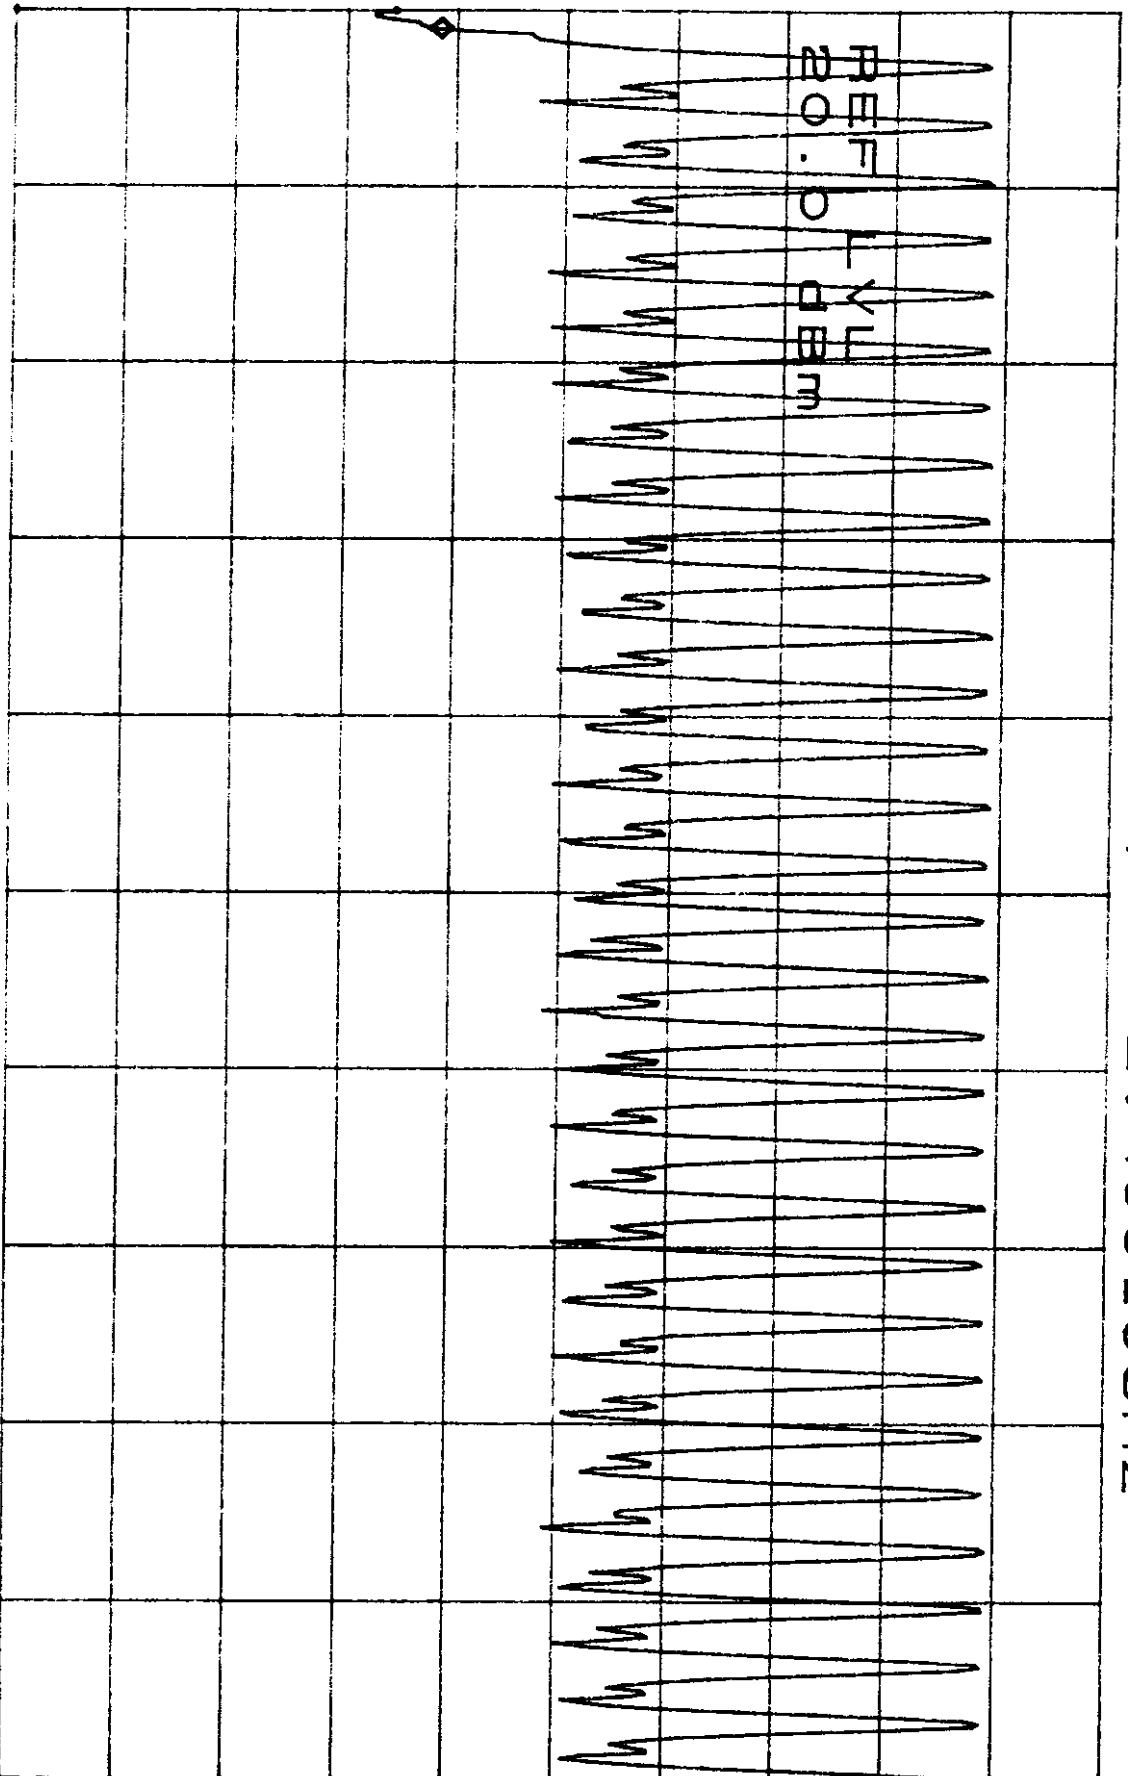

START 2.40000GHz

STOP 2.41000GHz


*RBW 30kHz

VBW 30kHz

SMB 50ms

ATTEN 30dB
 FL 20.0dBm
 10dB/
 2.41010GHz

2.41GHz
 NUMBER OF CHANNELS: 32
 MKR 130.50dBm 2.8

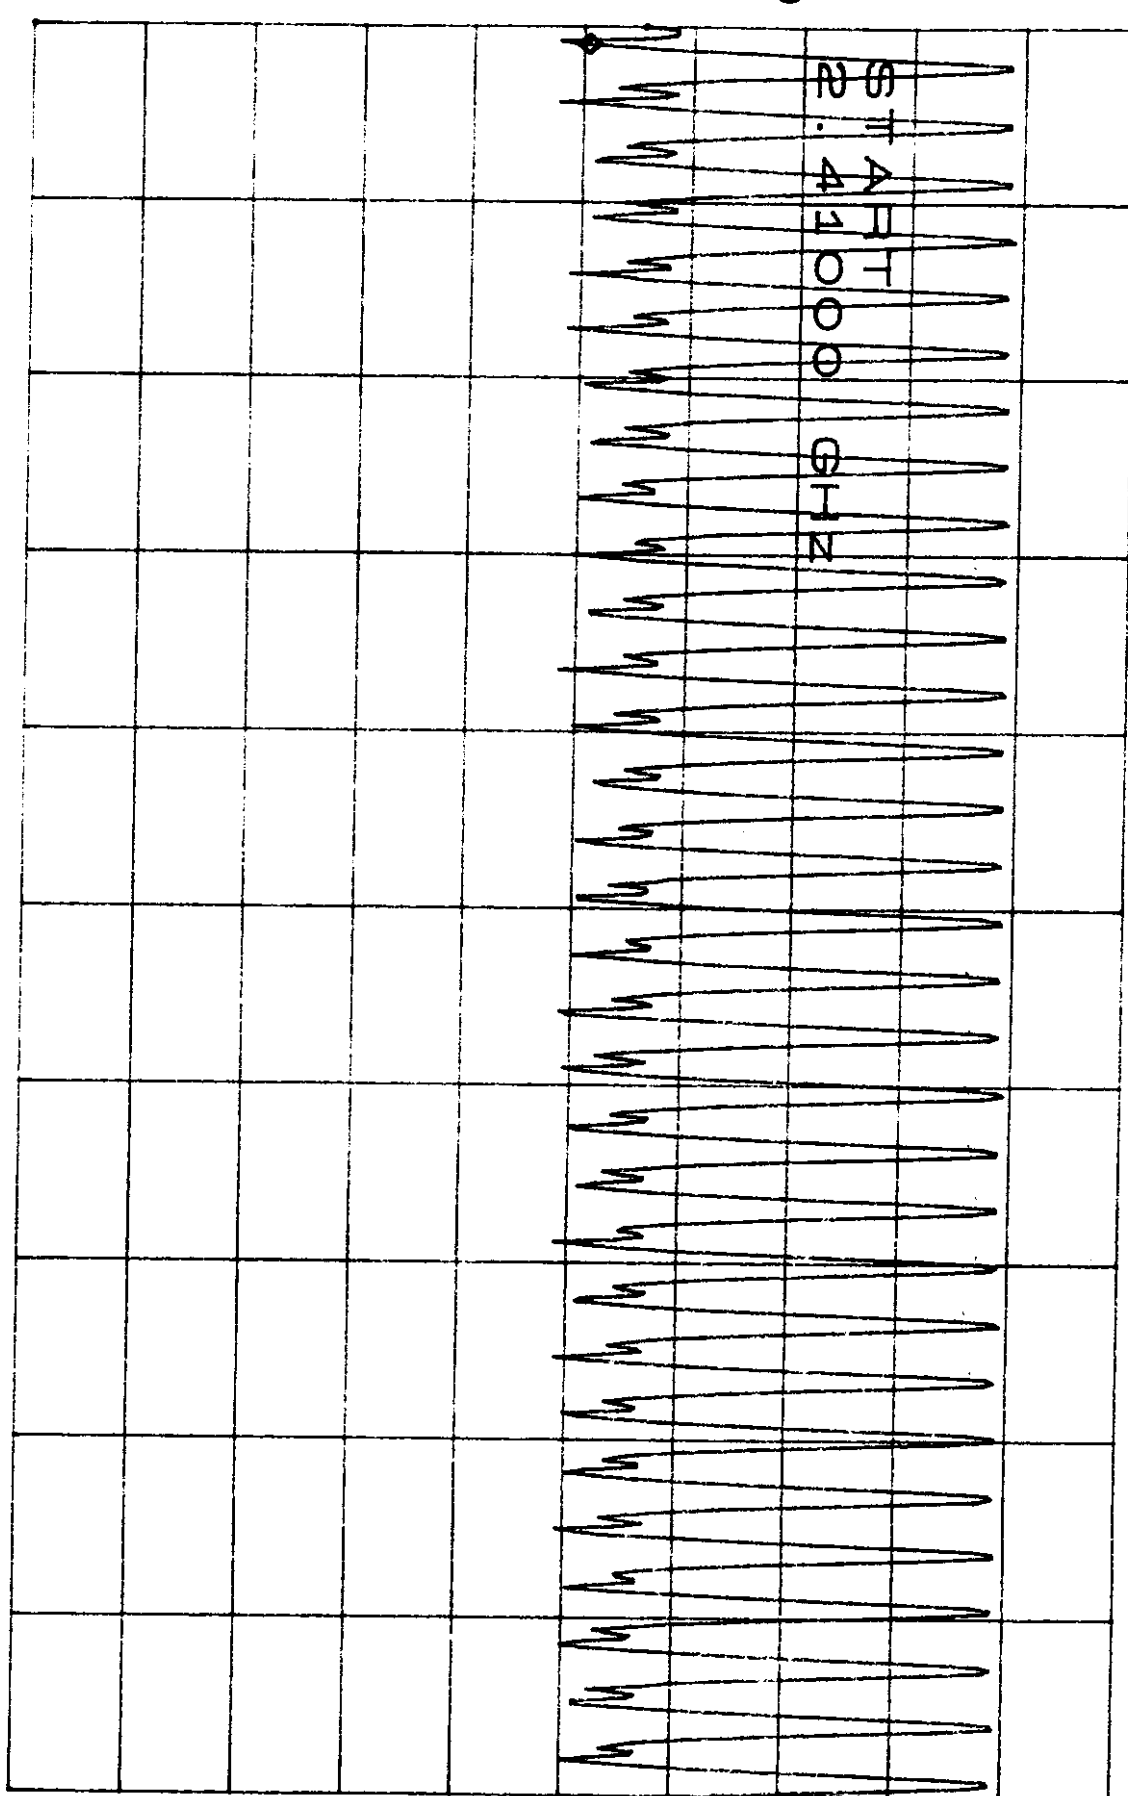

D

START 2.41000GHz STOP 2.42000GHz
 *RBW 30kHz VBW 30kHz


ATTEN 30dB
RL 20.0dBm

10dB/

2.4GHz
NUMBER OF CHANNELS: 31
MKR - .33dBm

3-8

D

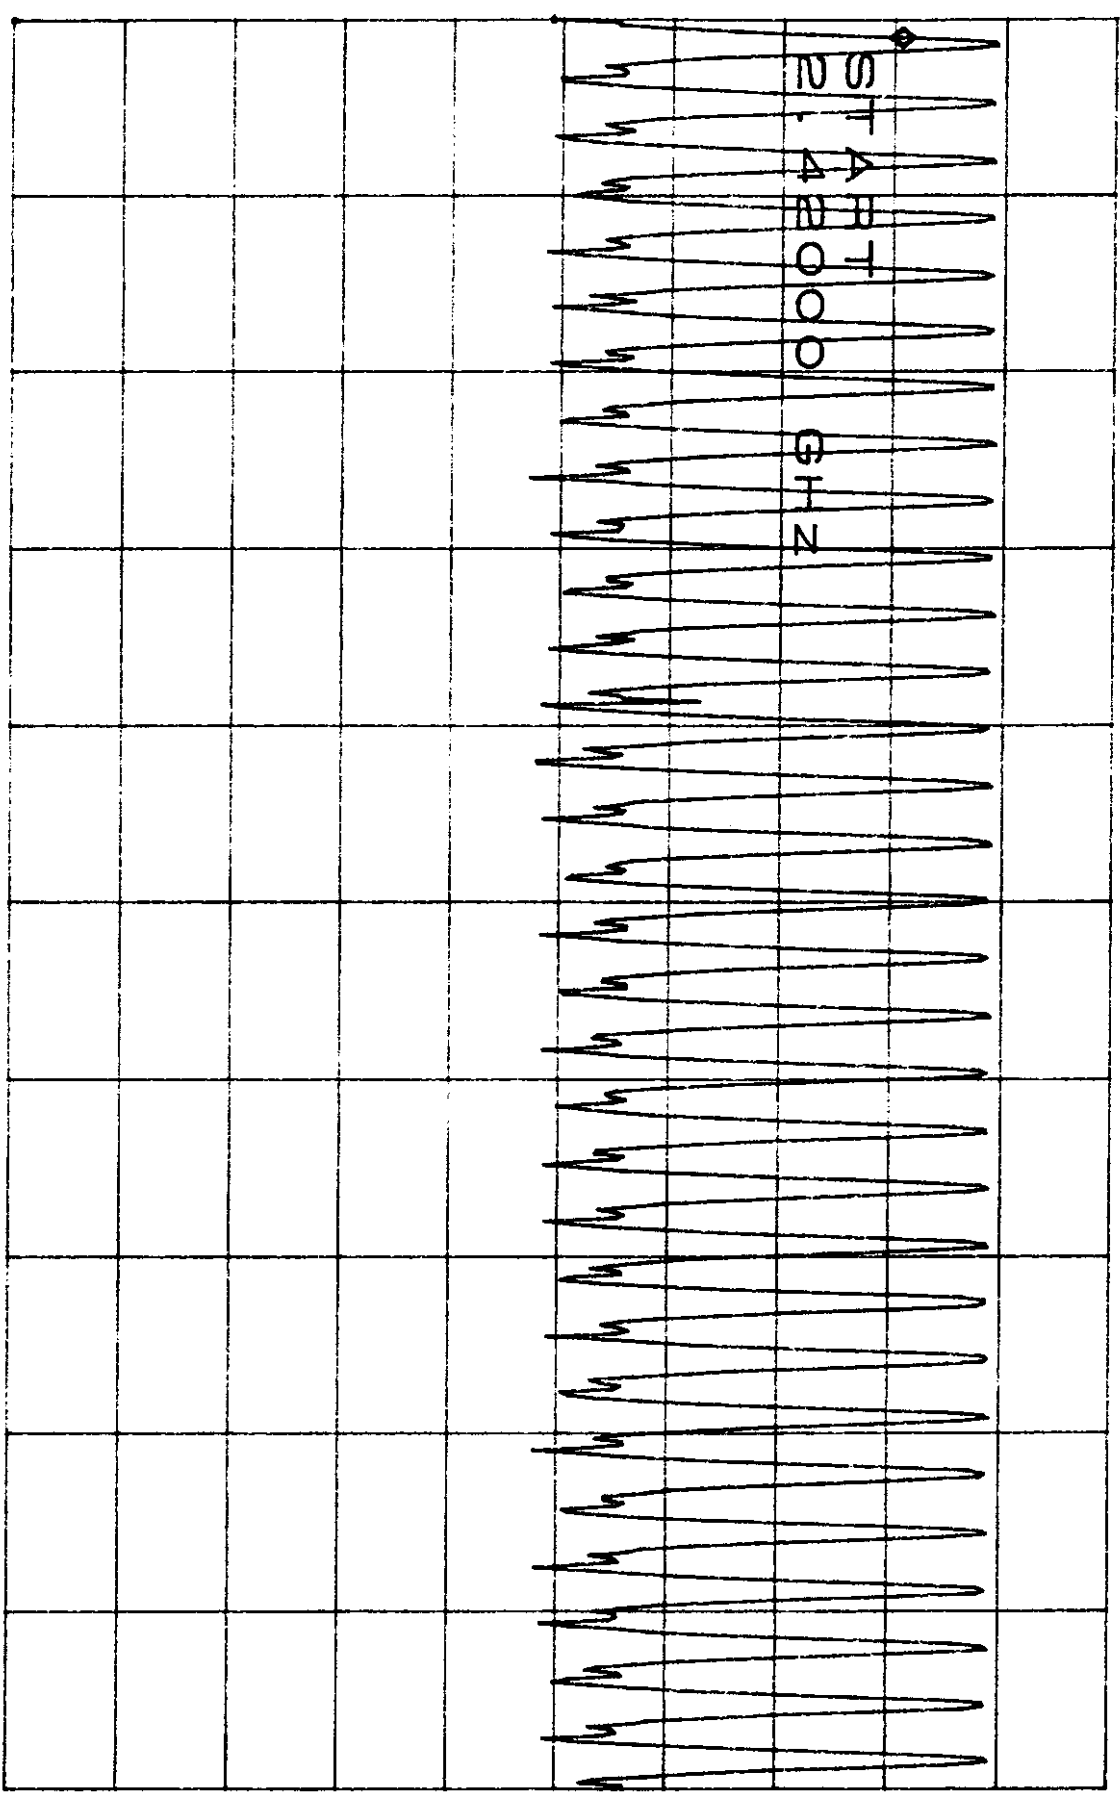

START 2.42000GHZ

STOP 2.43000GHZ

*RBW 30KHz

VBW 30KHz

SWB 500 MHz


ATTEN 30dB
RL 20.0dBm

10dB/

2.4GHz
NUMBER OF CHANNELS: 31
MKR -2.17dBm 4.8

D

START
2.43000 GHz

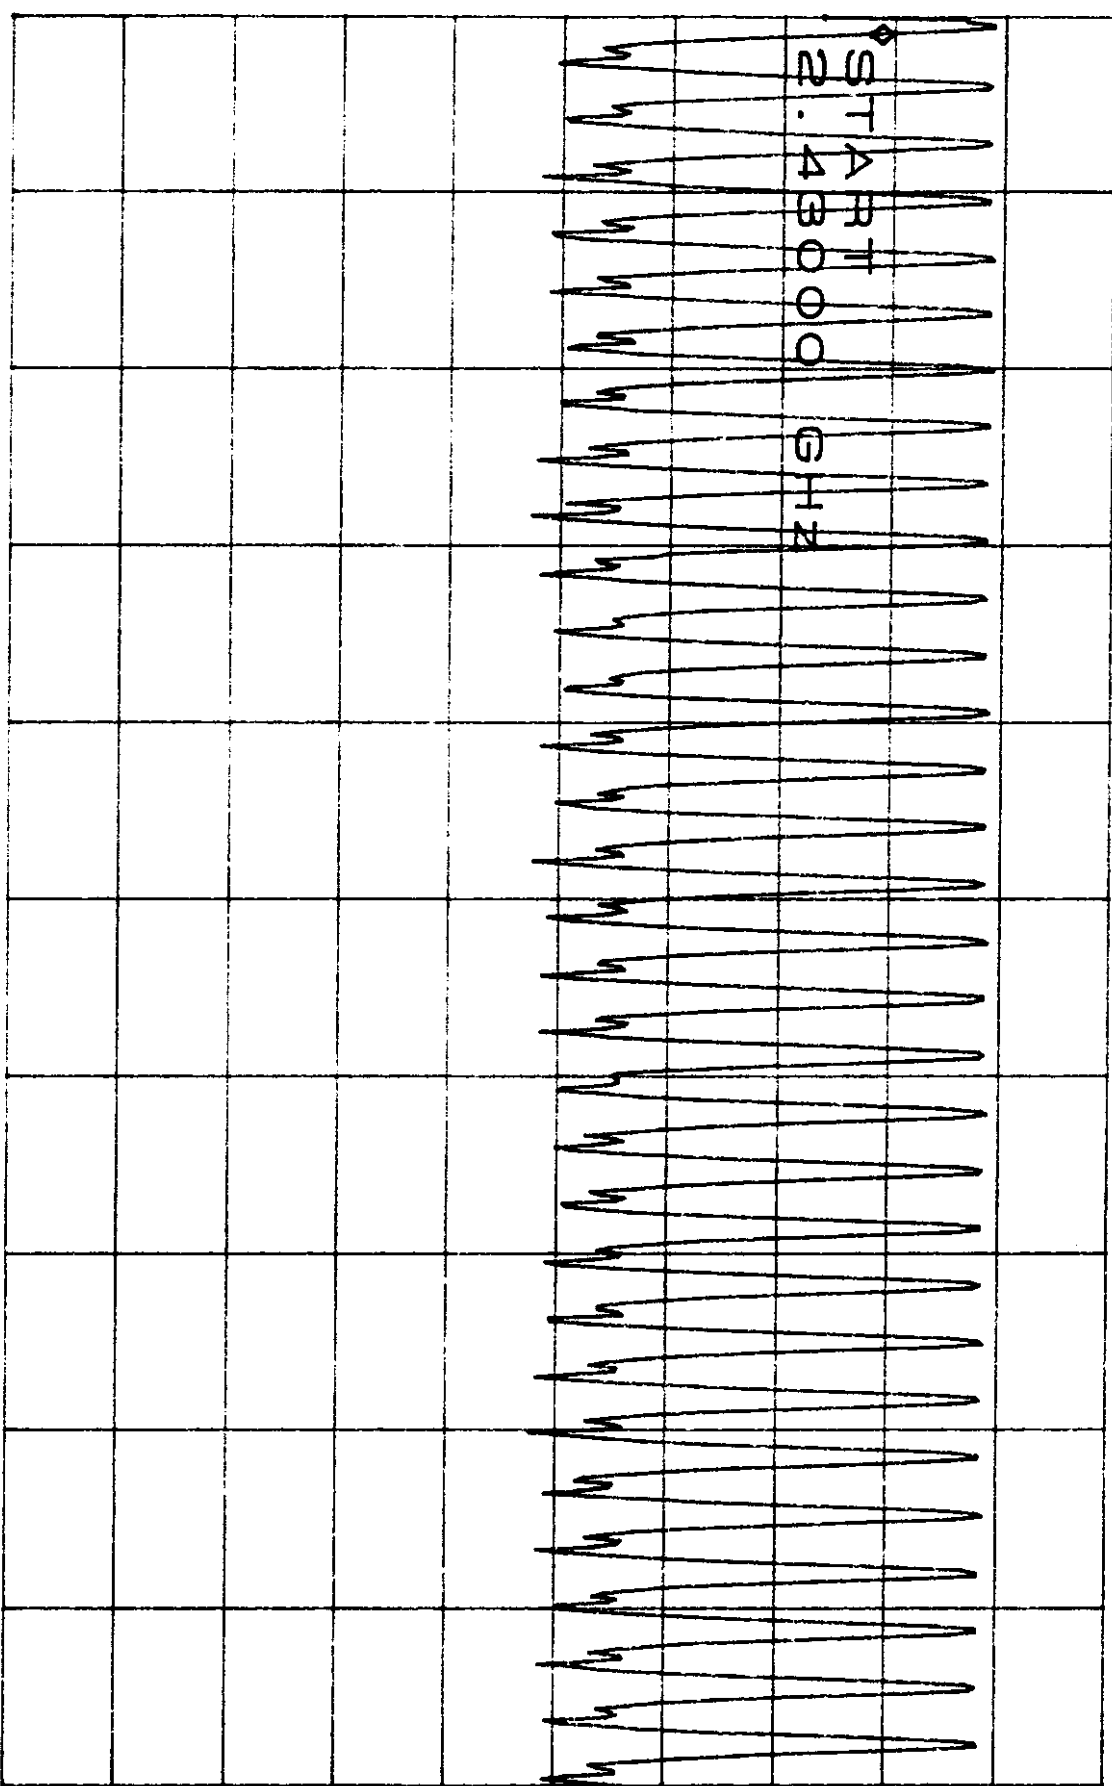

START 2.43000GHz

STOP 2.44000GHz

*RBW 30kHz

VBW 30kHz


SMP 50 OMS

ATTEN 30dB
RL 20.0dBm

10dB/

2.4GHz
NUMBER OF CHANNELS:32
MKR -27.83dBm 5.8

D

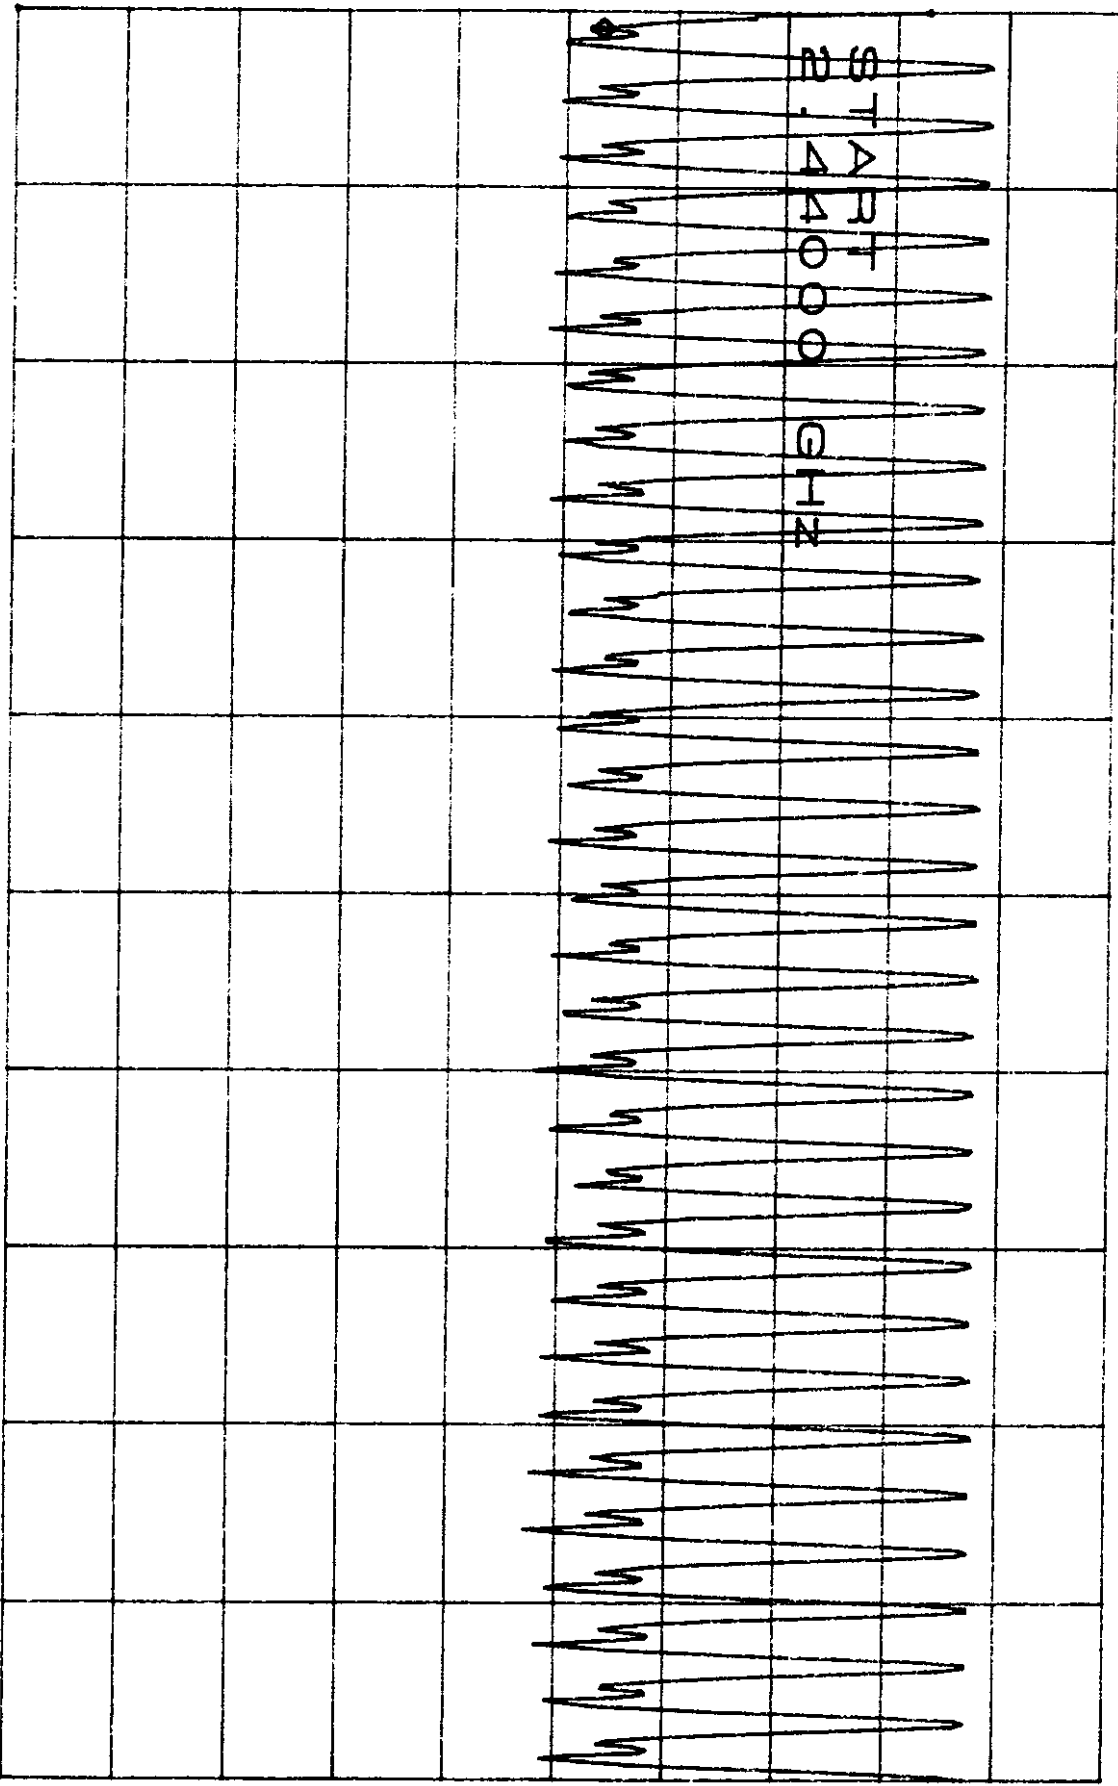

START 2.44000GHz

STOP 2.45000GHz


ATTEN 30dB
RL 20.0dBm

10dB/

2.4GHz
NUMBER OF CHANNELS: 32
MKR -30.50dBm 6-8
2.45010GHz

D

50
+4
FT
000
GHz

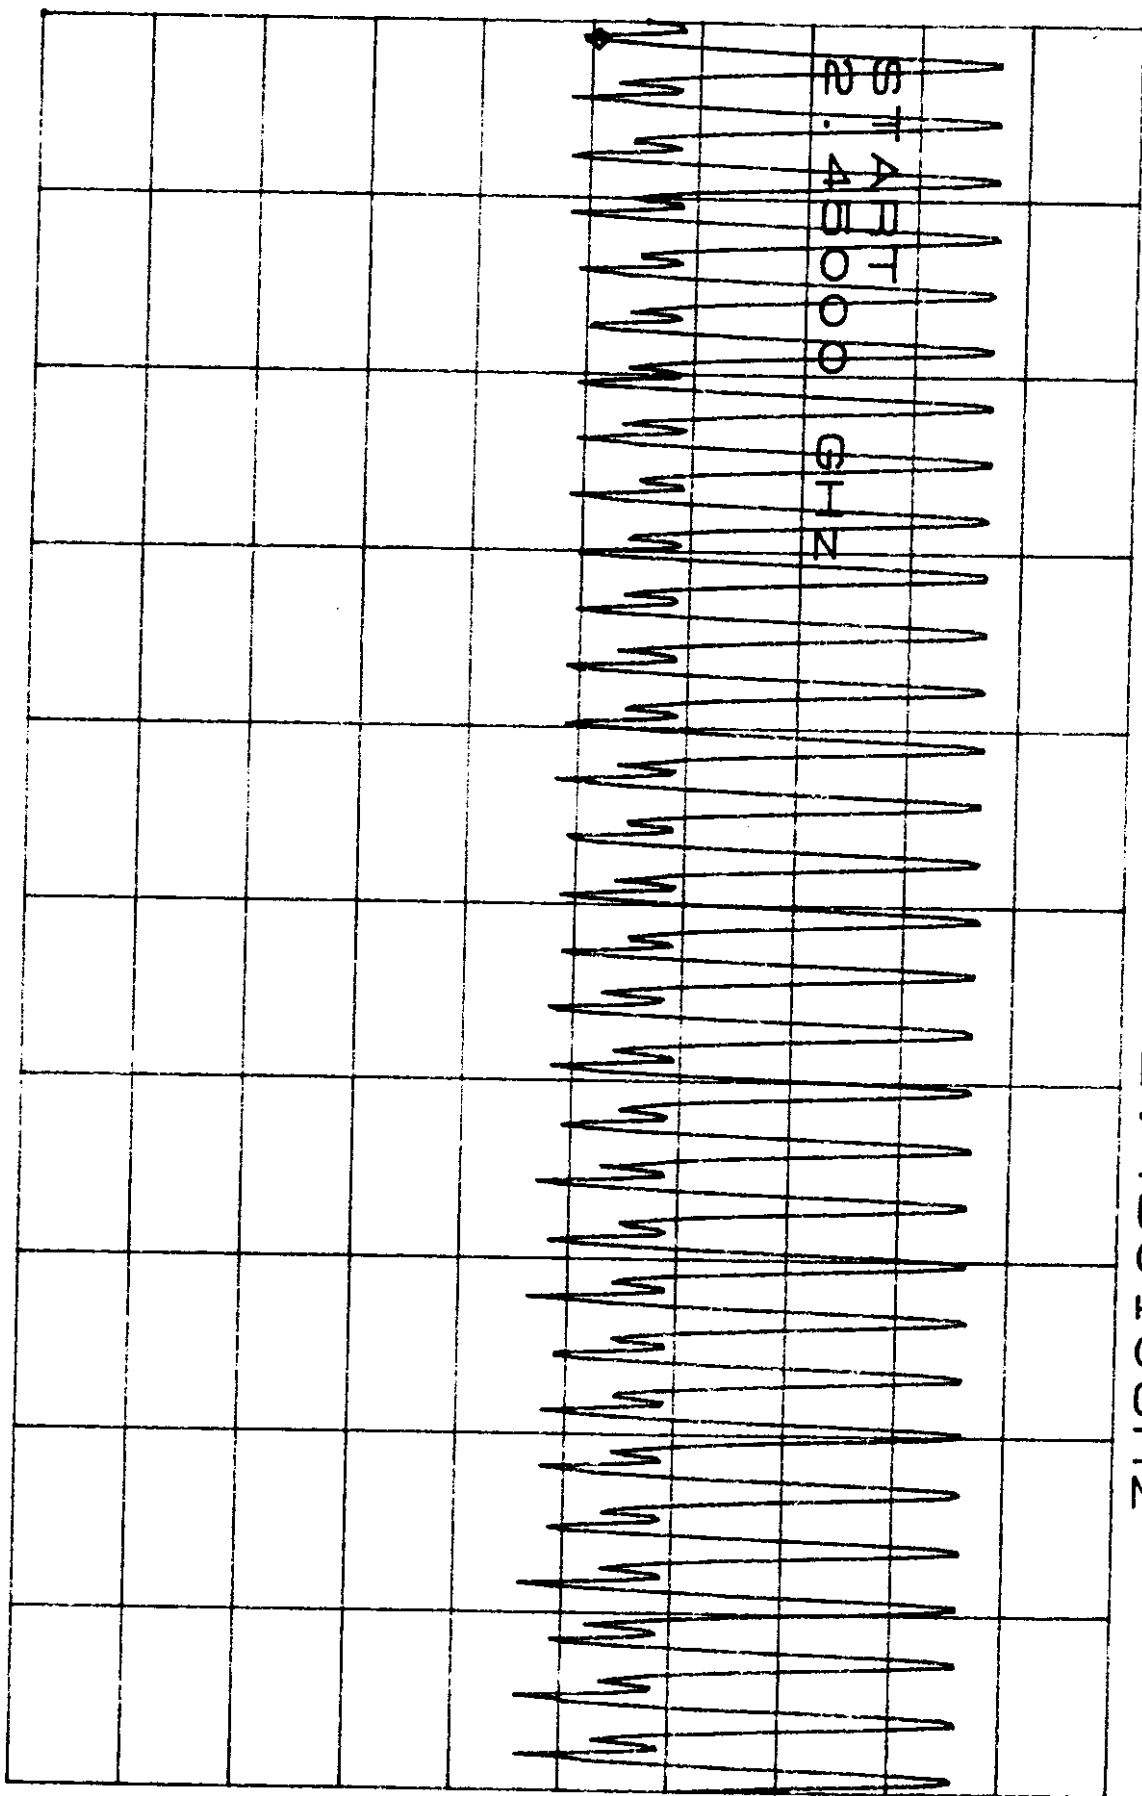

START 2.45000GHz


STOP 2.46000GHz

ATTEN 30dB
RL 20.0dBm

10dB/

2.46GHz
NUMBER OF CHANNELS: 32
MKR -4.67dBm 2.8

D

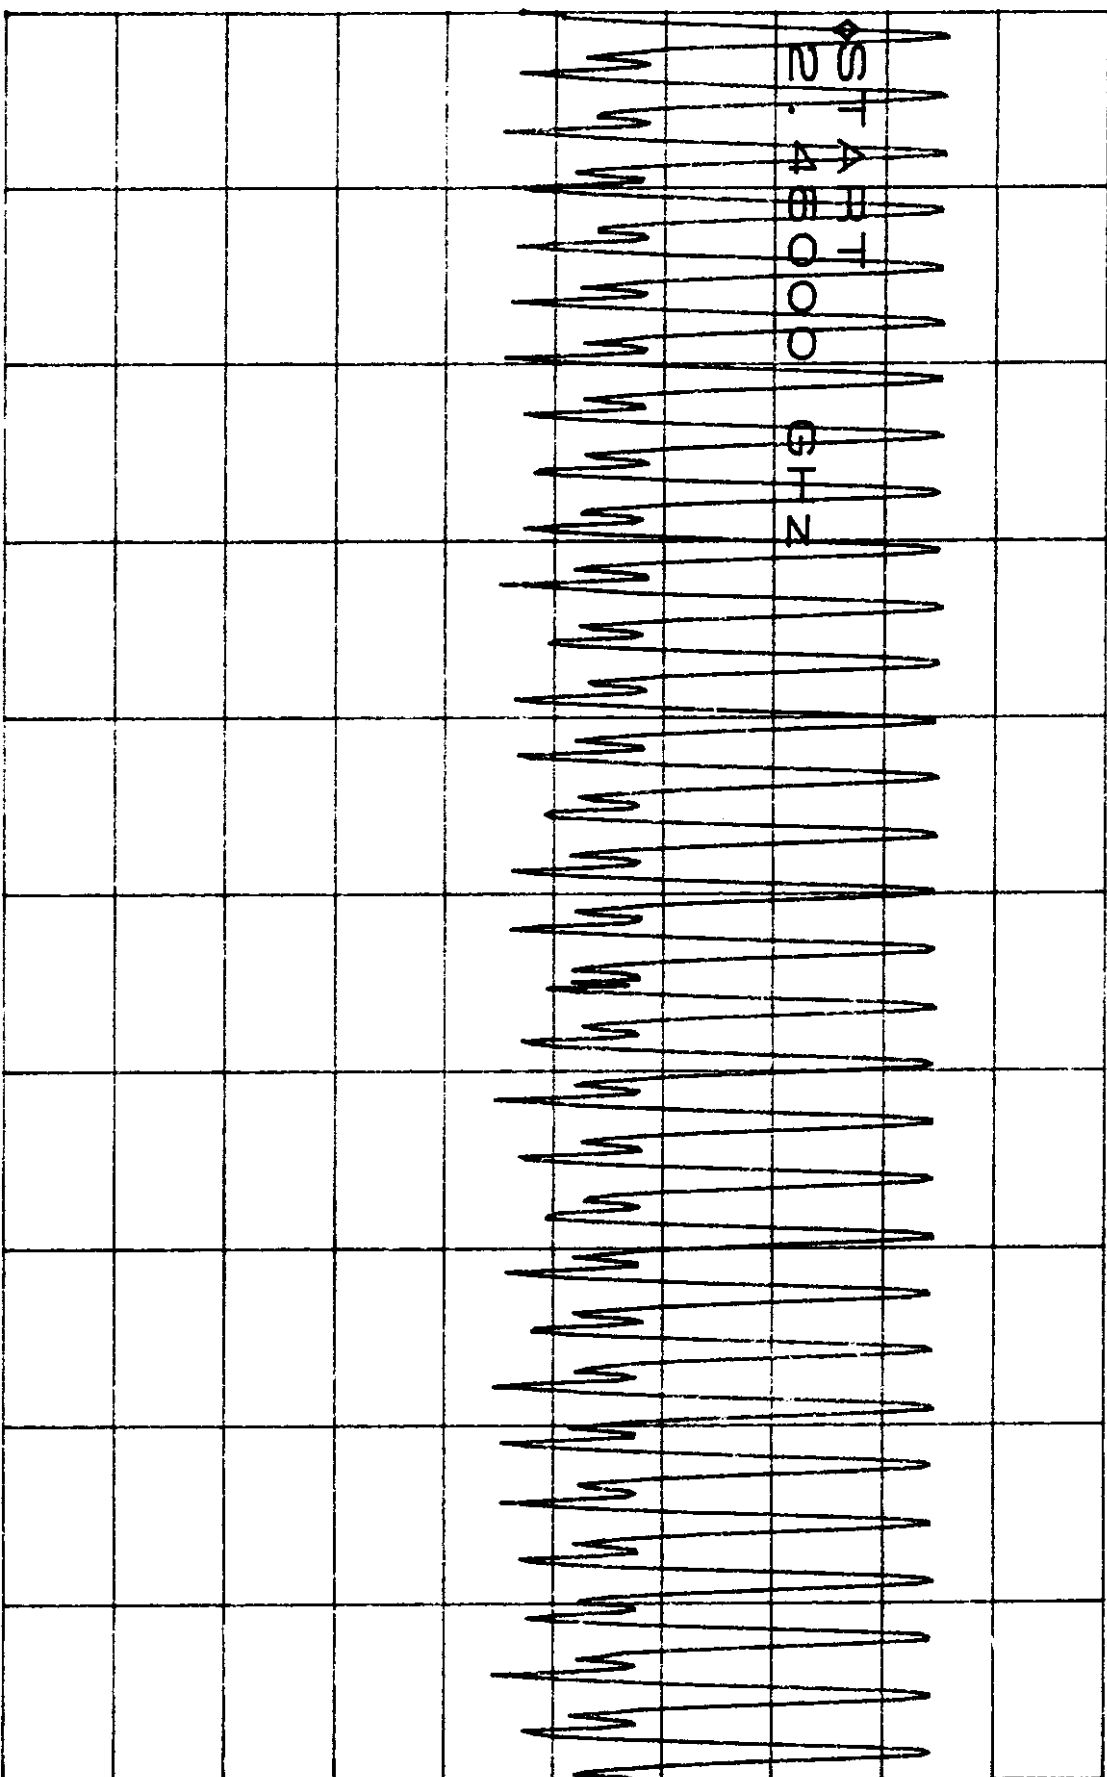

START 2.460000GHz

STOP 2.470000GHz

ATTEN 30dB
RL 20.0dBm

10dB/

2.4 GHz
NUMBER OF CHANNELS: 42
MKR -17.33dBm
8.8

D

0.0

0.1

0.2

0.3

0.4

0.5

0.6

0.7

0.8

0.9

1.0

1.1

1.2

1.3

1.4

1.5

1.6

1.7

1.8

1.9

2.0

2.1

2.2

2.3

2.4

2.5

2.6

2.7

2.8

2.9

3.0

3.1

3.2

3.3


3.4

3.5

3.6

3.7

3.8

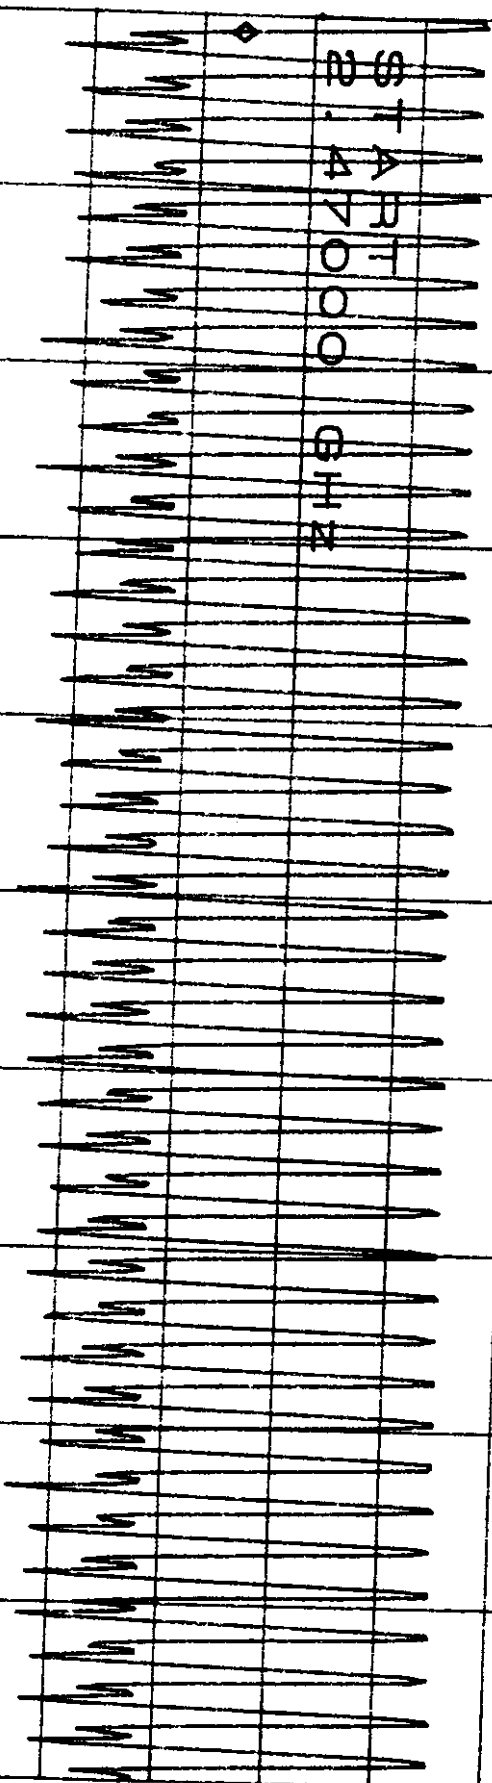

START 2.47000GHz

STOP 2.48350GHz

*RBW 30kHz

VBW 30kHz

RES 30kHz

RADIO, 003

*ATTEN 0dB

RL -10.0dBm

10dB/

MKR -88.67dBm

1-14

ΣXΠ
2.377 GHz
D -88.67 dBm


START 1.000GHz

STOP 2.400GHz

*RBW 30kHz

VBW 30kHz

SMP 3 90sec

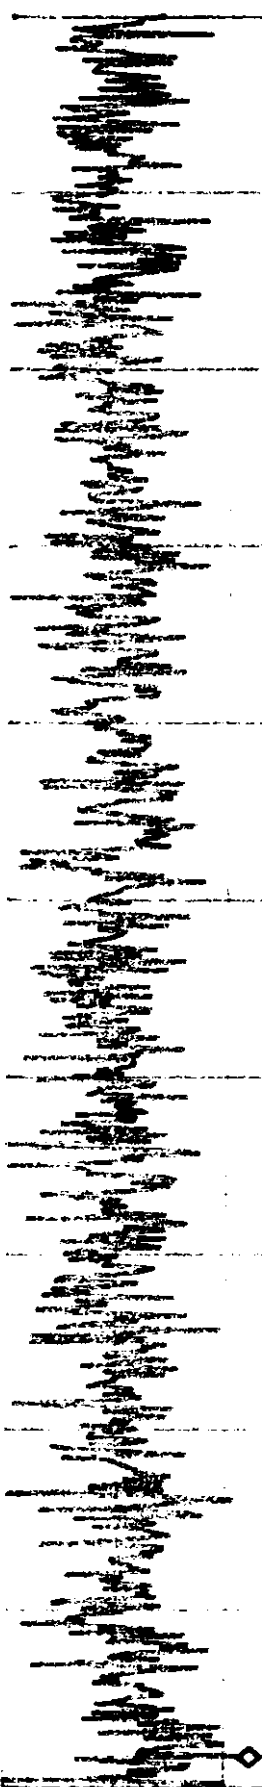

RADIO, 003

2-14

*ATTEN 00B


MARK 100.50DBM

REL 110.00DBM

10DB/

2.495GHZ

MARK 2.495GHZ
100.50DBM

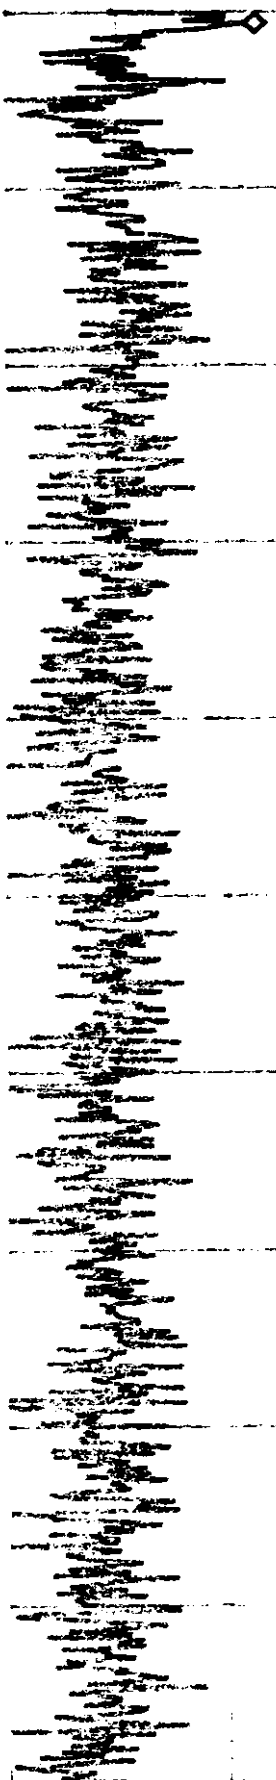

START 2.485GHZ

STOP 4.000GHZ

MARK 30KHZ VBW 30KHZ SWB 4 30sec

RADIO 008

3.14

*ATTEN 0dB

RL -10.0dBm


10dB/

MKR -93.00dBm

4.357 GHz
-93.00 dBm

START 4.000GHz

STOP 6.000GHz

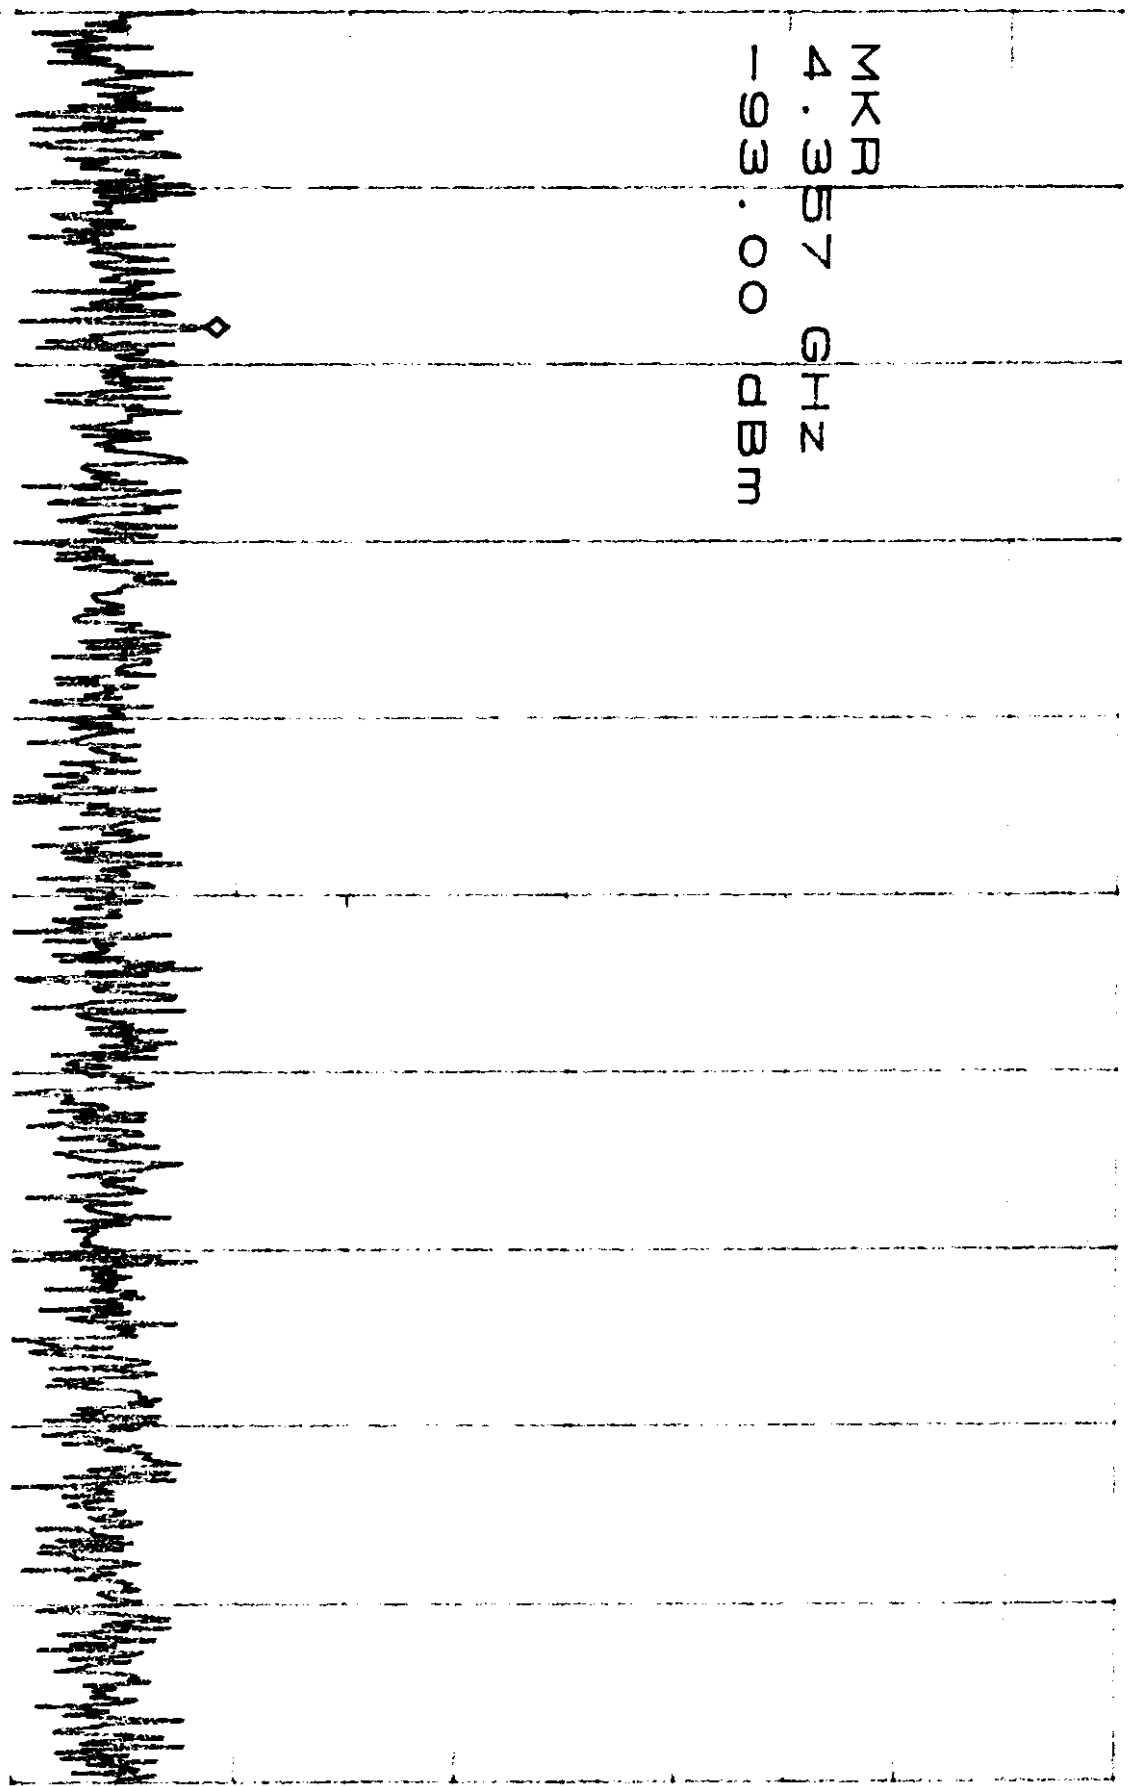

RADIO 003

4-14

*ATTEN 0dB

RL -10.0dBm


10dB/

MKR -94.00dBm

MKR
6.537 GHz
-94.00 dBm

START 6.000GHz

STOP 8.000GHz

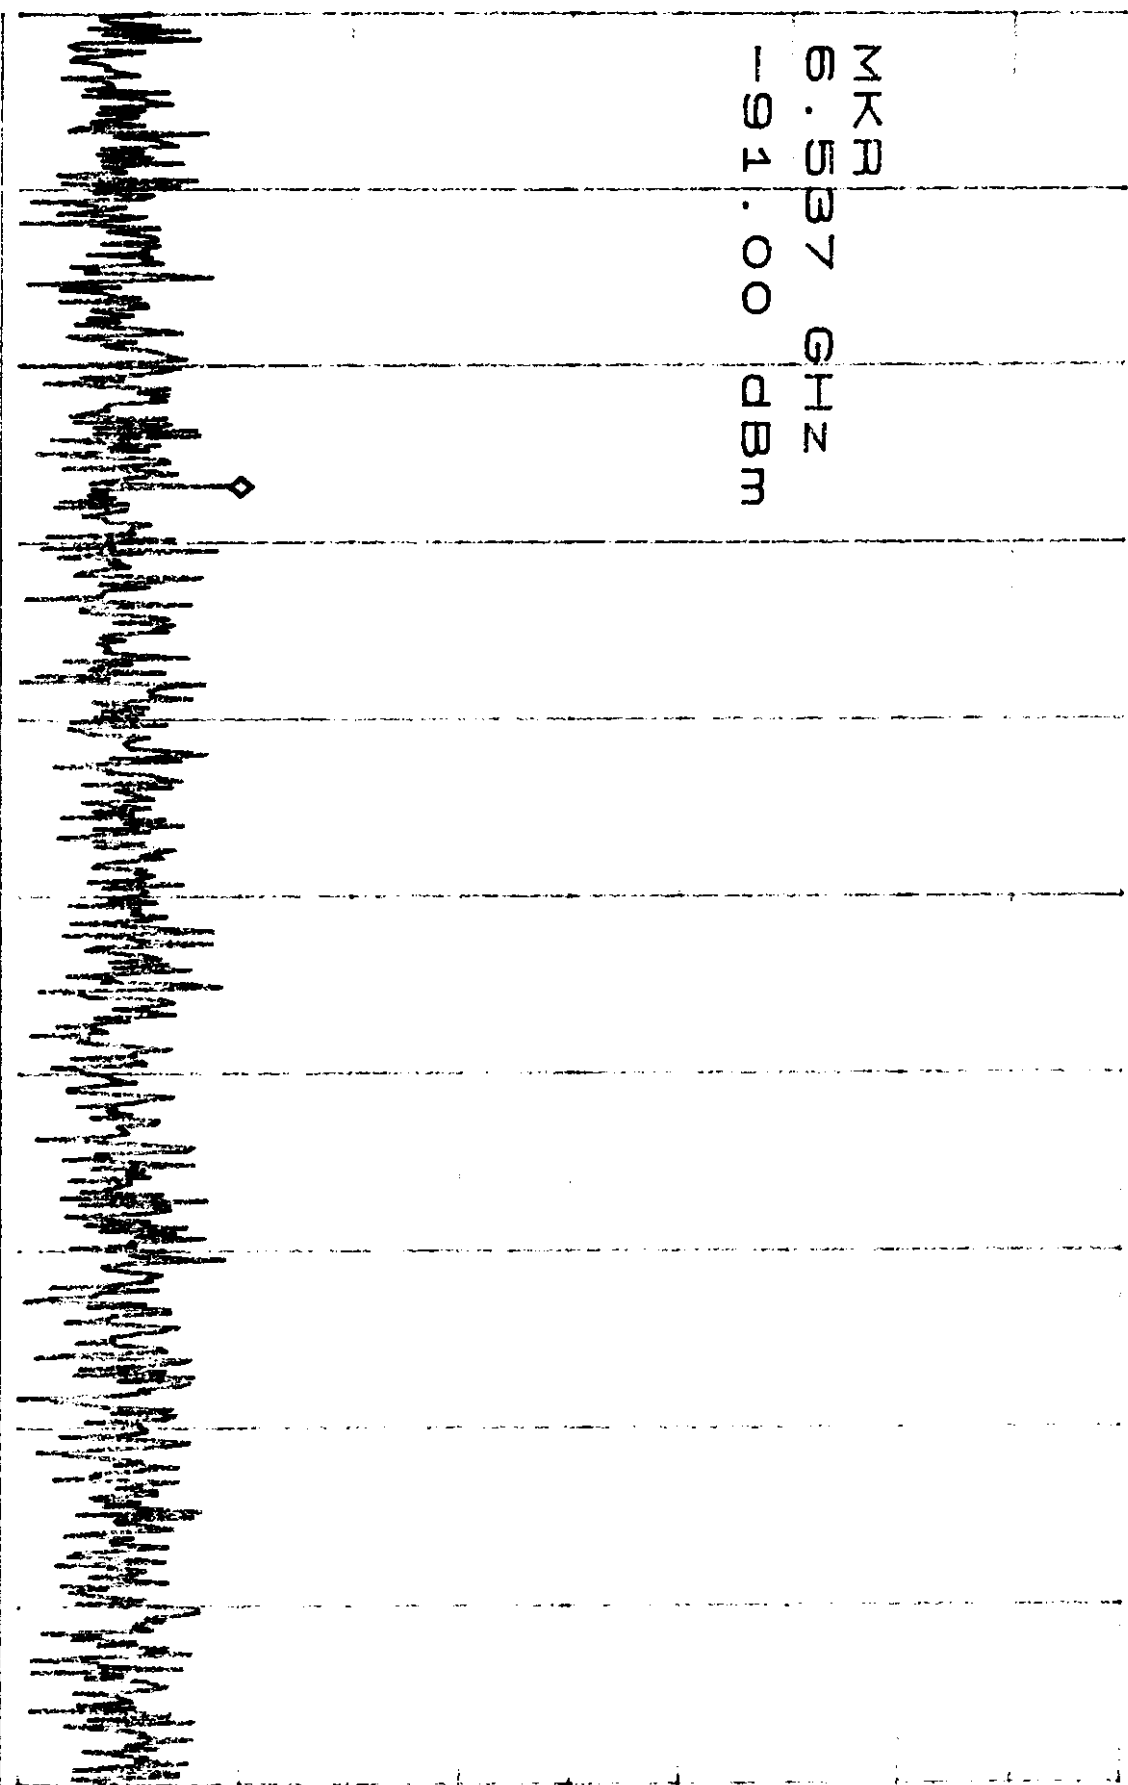

RADIO 003

5-14

*ATTEN 0 DB

RL -10.0 DBM


10 DB/

MARK -92.17 DBM
9.760 GHz

Σ K D

0.760 GHz

D -92.17 DBM

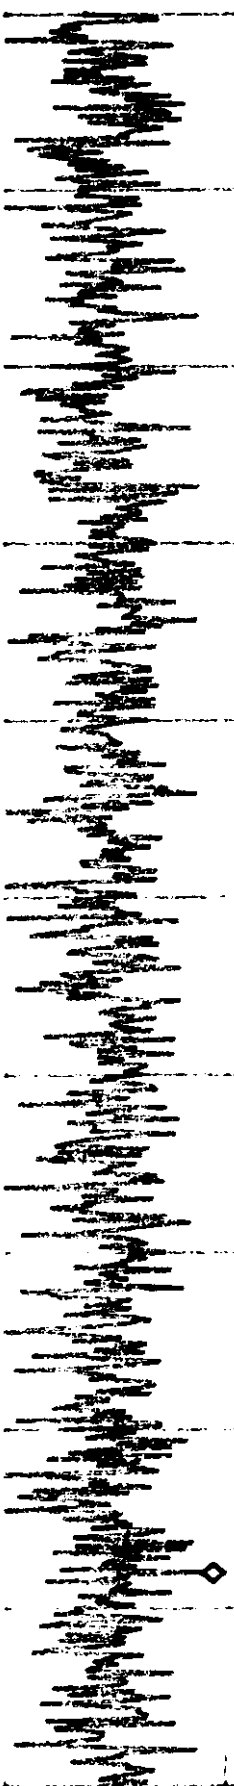

START 8.000 GHz

STOP 10.000 GHz

Radio 003

6-14

*ATTEN 0dB

RL -10.0dBm

10dB/

MKR -91.33dBm
11.833GHz

MKR
11.833
-91.33
GHz
dBm

D

START 10.000GHz


STOP 12.000GHz

*RBW 30kHz

VBW 30kHz

SWP

CO

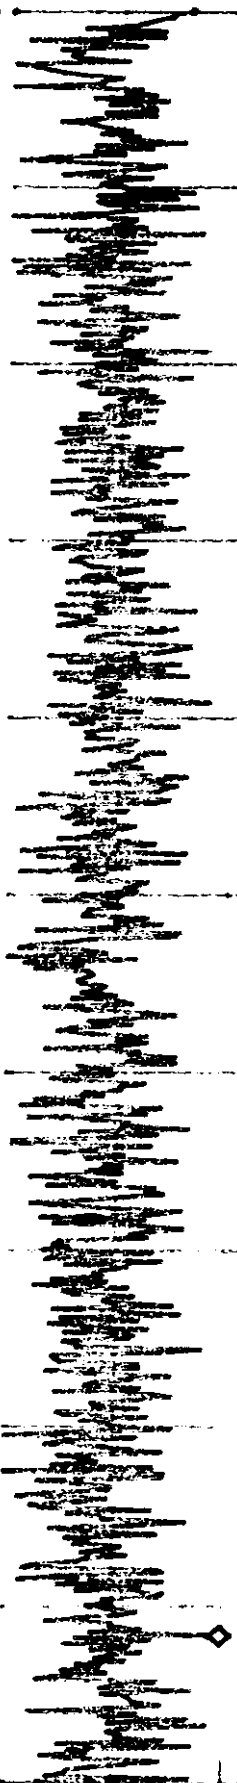

RADIO 003

7-14

*ATTEN 0dB

MKR -90.33dBm

RL -10.0dBm

10dB/

14.463GHz

MKR

14.463

GHz

D

190.33

dBm


START 14.000GHz

STOP 16.000GHz

*RBW 30KHz

VBW 30KHz

SWP E 50000

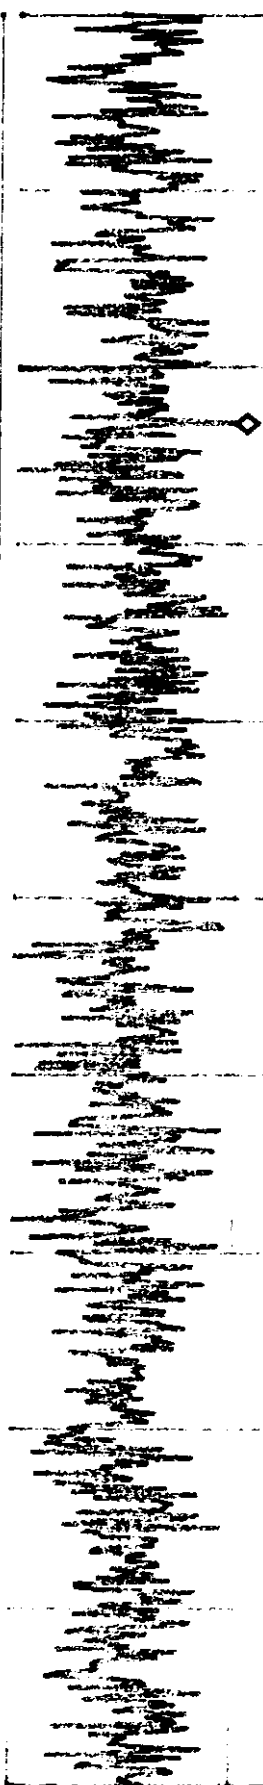

RADIO 005

8-14

*ATTEN 0dB

MR -90.33dBm

PL -10.0dBm

10dB/

13.593GHz

MR

13.593

GHz

-90.33

dBm

D


START 12.000GHz

STOP 14.000GHz

*RBW 30KHz

VBW 30KHz

SWP E 50000

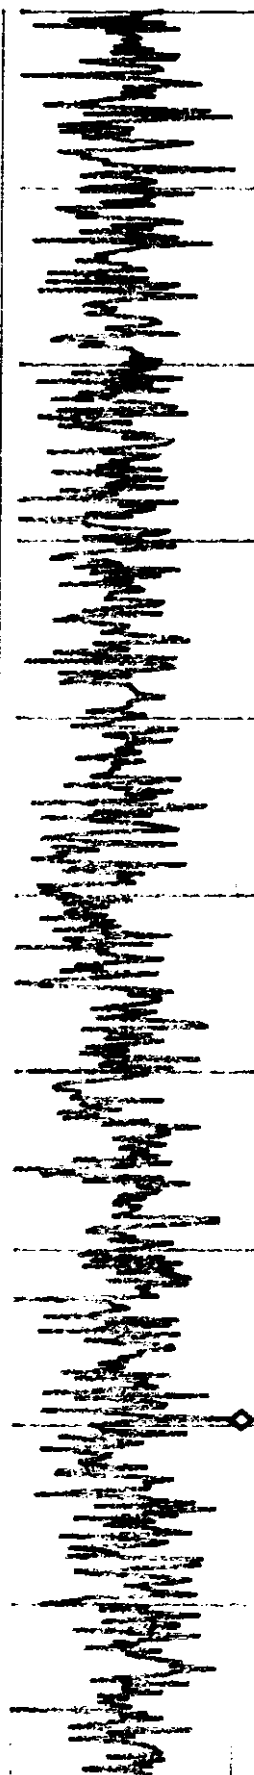

RADIO 003

4-14

*ATTEN 0DB

MKR -90.50DBM

FL -40.0DBM

10DB/


44.943GHZ

ΣXU

44.943

GHz

100.500 DBE

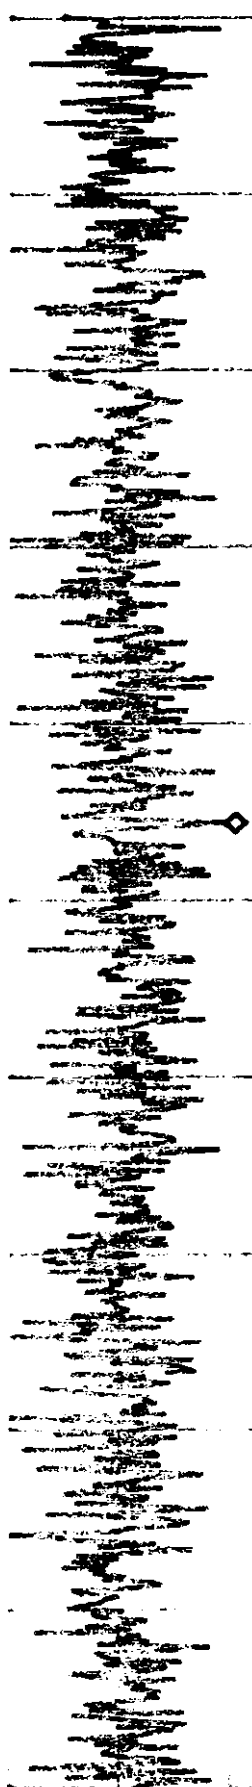

START 14.000GHZ

STOP 16.000GHZ

*BW 30KHZ

VBW 30KHZ

SMP 5.60sec

RADIO 003

16-14

*ATTEN 0dB

MKR -90.67dBm

RL -140.0dBm

10dB/


47.737GHz

ΣXII

47.737

GHz

D -90.67 dBm

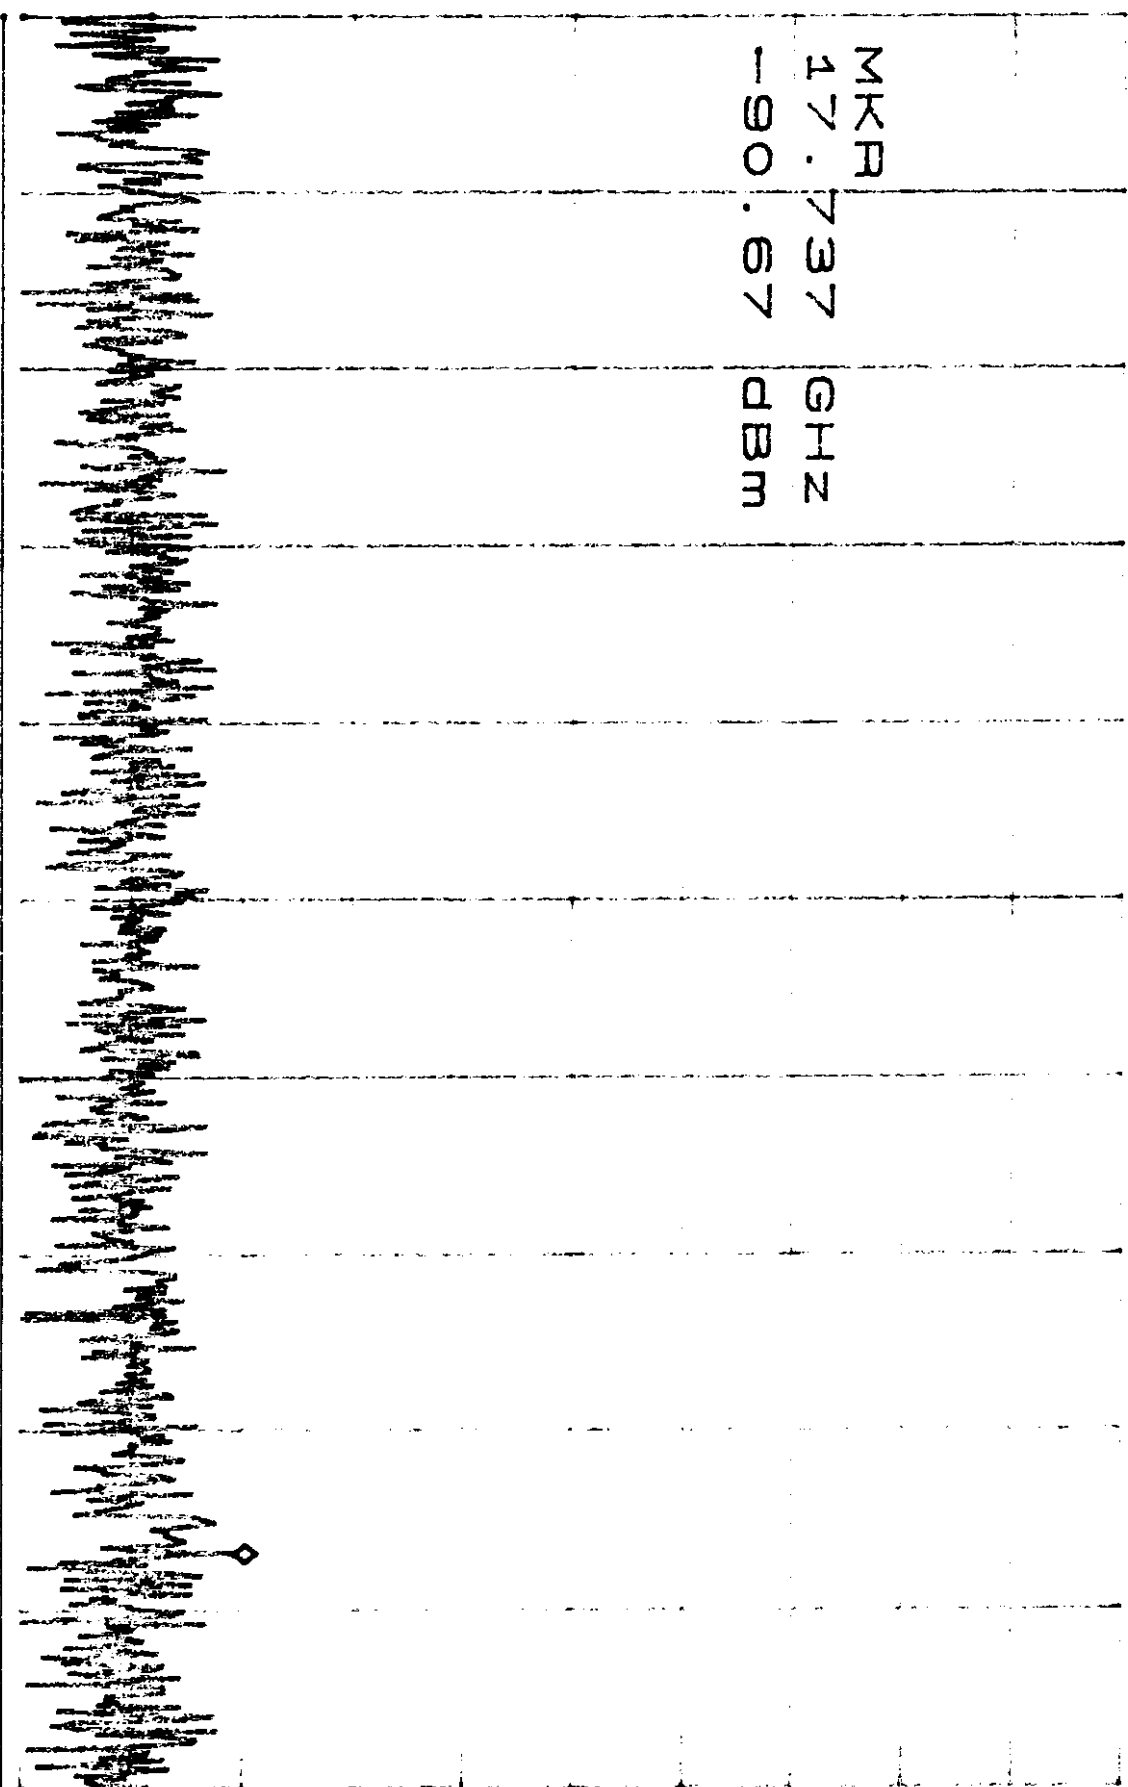

START 16.000GHz

STOP 18.000GHz

RADIO 003

11.14

*ATTEN 0dB


MKR -91.17dBm

RL -10.0dBm

10dB/

18.117GHz

MKR
18.117 GHz
-91.17 dBm

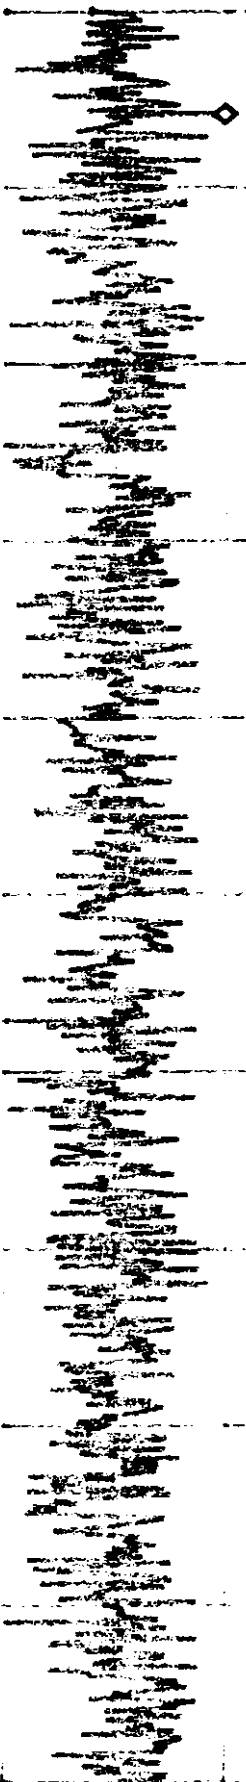

START 18.000GHz

STOP 20.000GHz

*RBW 30kHz

VBW 30kHz

SMB 500000

RADIO 003

12-14

*ATTEN 0dB

RL -10.0dBm

10dB/

MKR -90.83dBm

20.917GHz

20.917 GHz
-90.83 dBm


START 20.000GHz

STOP 22.000GHz

*BW 30kHz

VBW 30kHz

RES 100kHz

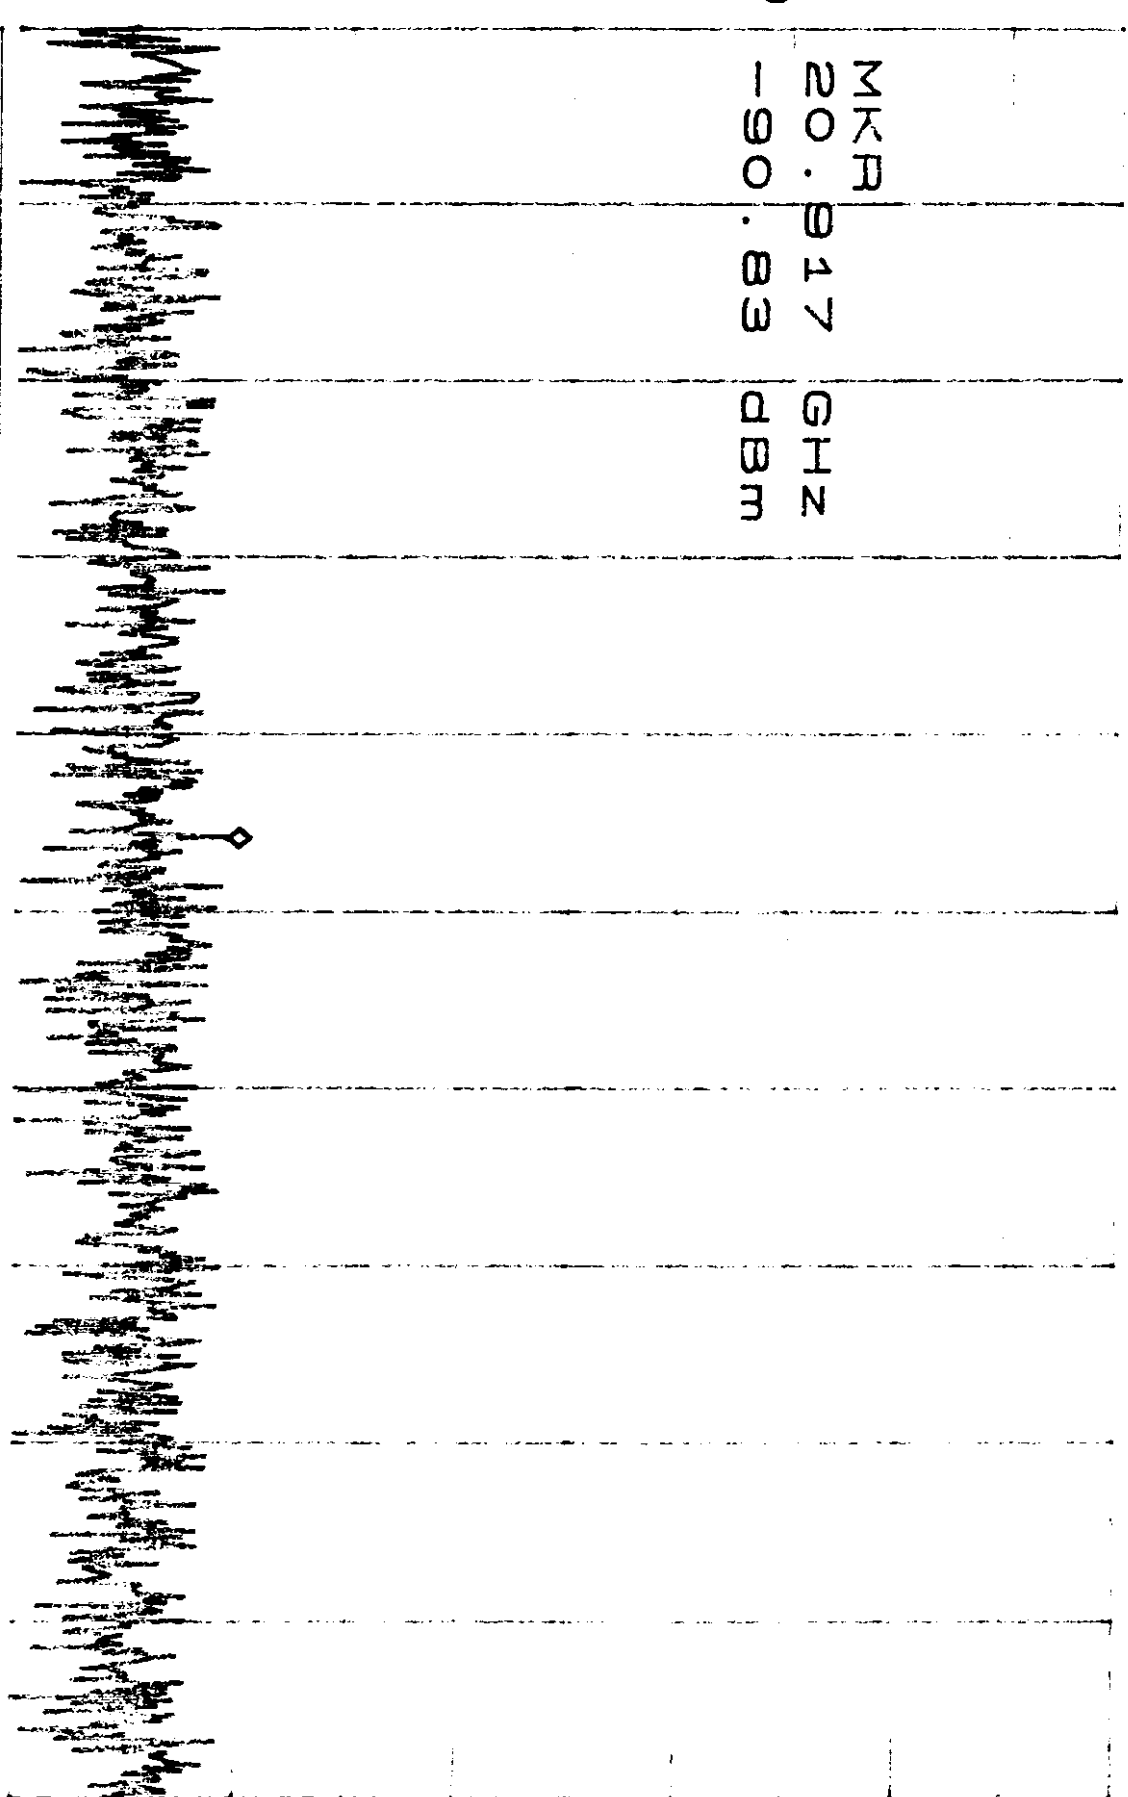

RADIO 008

13-14

*ATTEN 0DB

MKR -90.17DBM

RL -10.0DBM


10DB/

23.423GHZ

ΣKΠ 423 GHZ
23.423 DBM
D -90.17 DBM

START 22.000GHZ

STOP 24.000GHZ

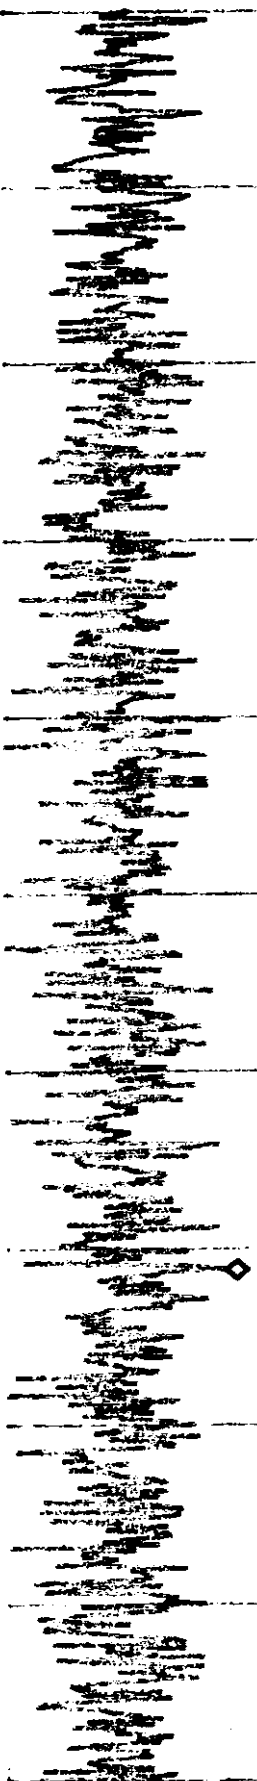

RADIO 003

14.14

*ATTEN 0DB

FL -40.0DBM

10DB/

MK 1-87.50DBM
25.887GHZ

MK 1


25.887

GHZ

D

1-87.50

DBM

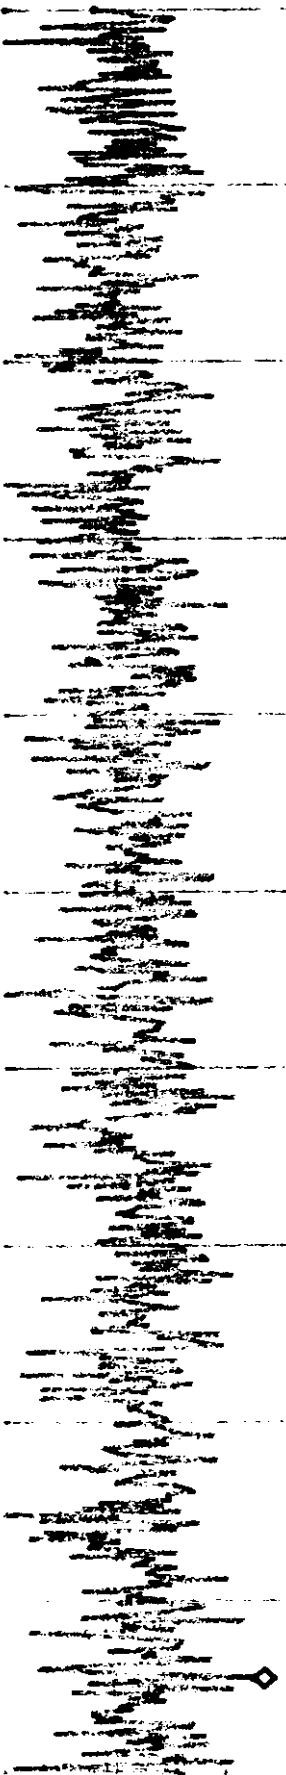

START 24.000GHZ

STOP 26.000GHZ

Radio 003

1.5

*ATTEN 0dB

MKR -93.00dBm

RL -20.0dBm

10dB/


1.407GHz

MKR
1.407 GHz
-93.00 dBm

100 Hz
pole top

200 MHz

20 dB output

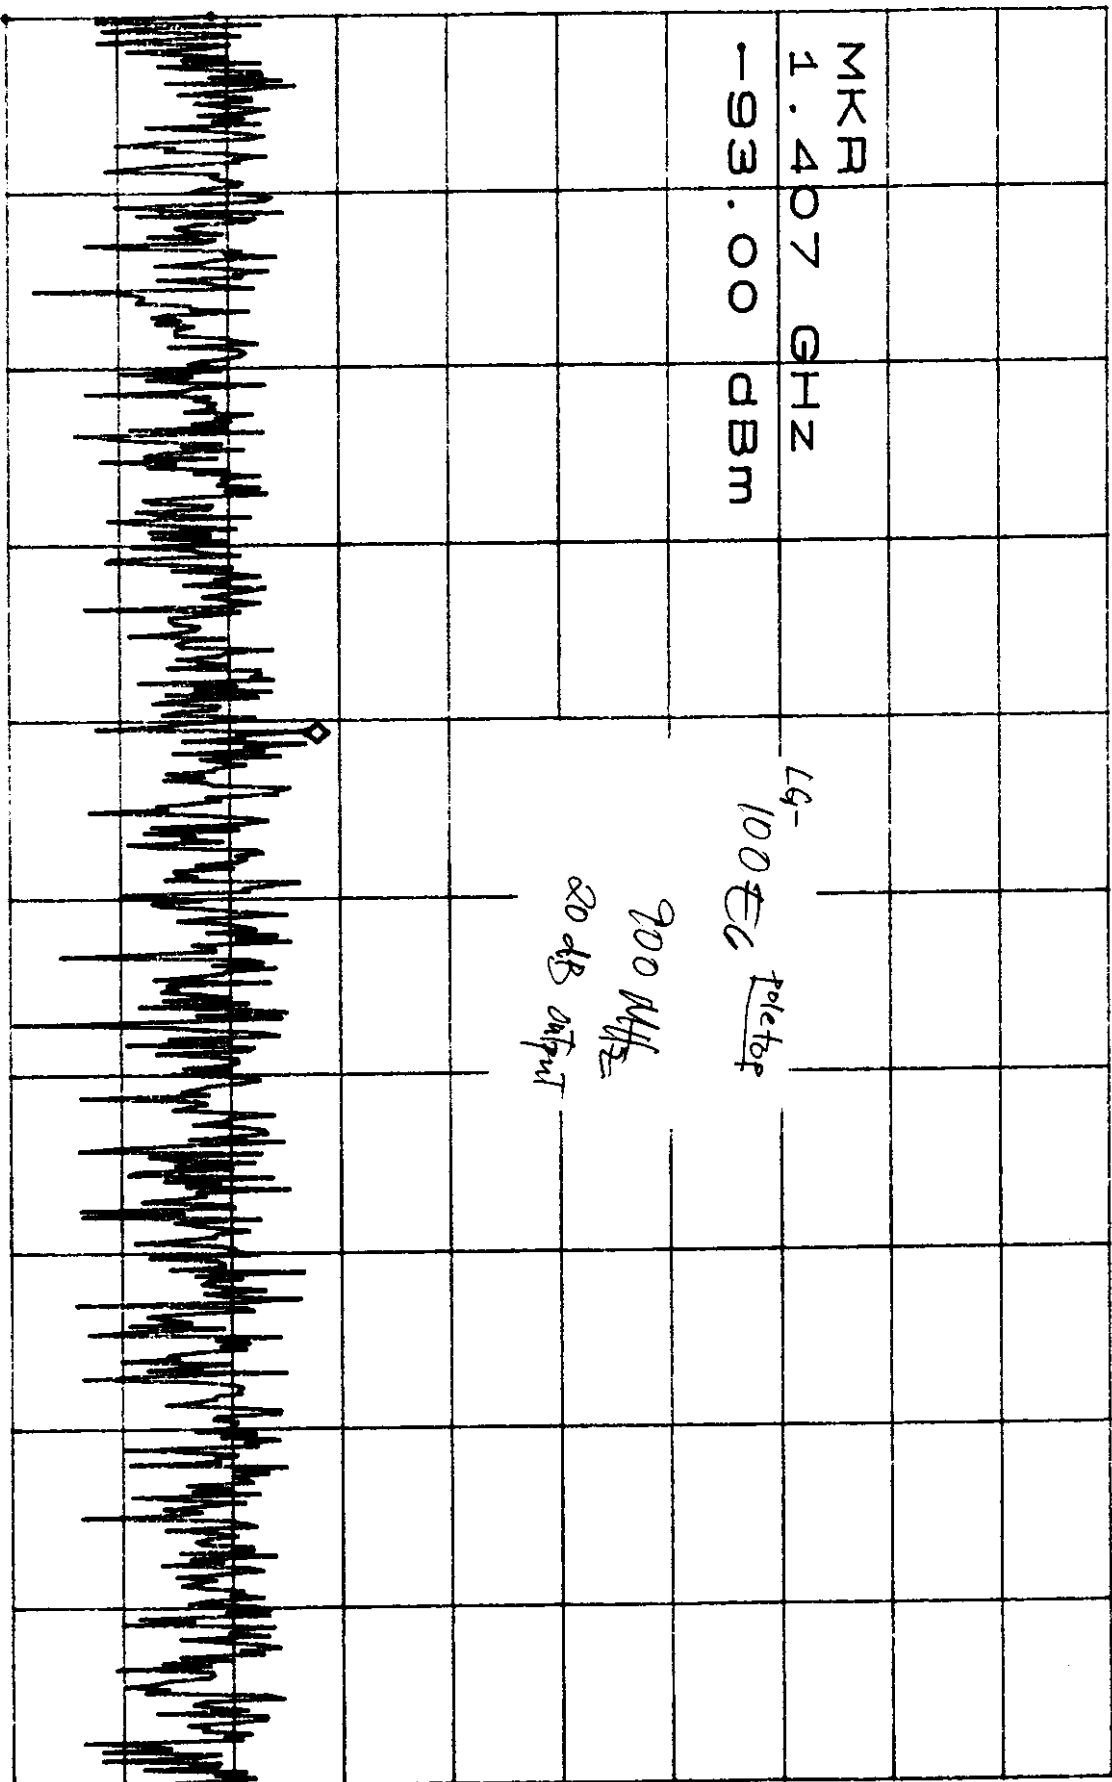

START 1.000GHz

STOP 2.000GHz

*RBW 30KHz

VBW 30KHz

SMP 2.80sec

RADIO 008

2.5

*ATTEN 0dB


MARK -92.17dBm

RL -20.0dBm

10dB/

2.233GHz

2.233 GHz
-92.17 dBm

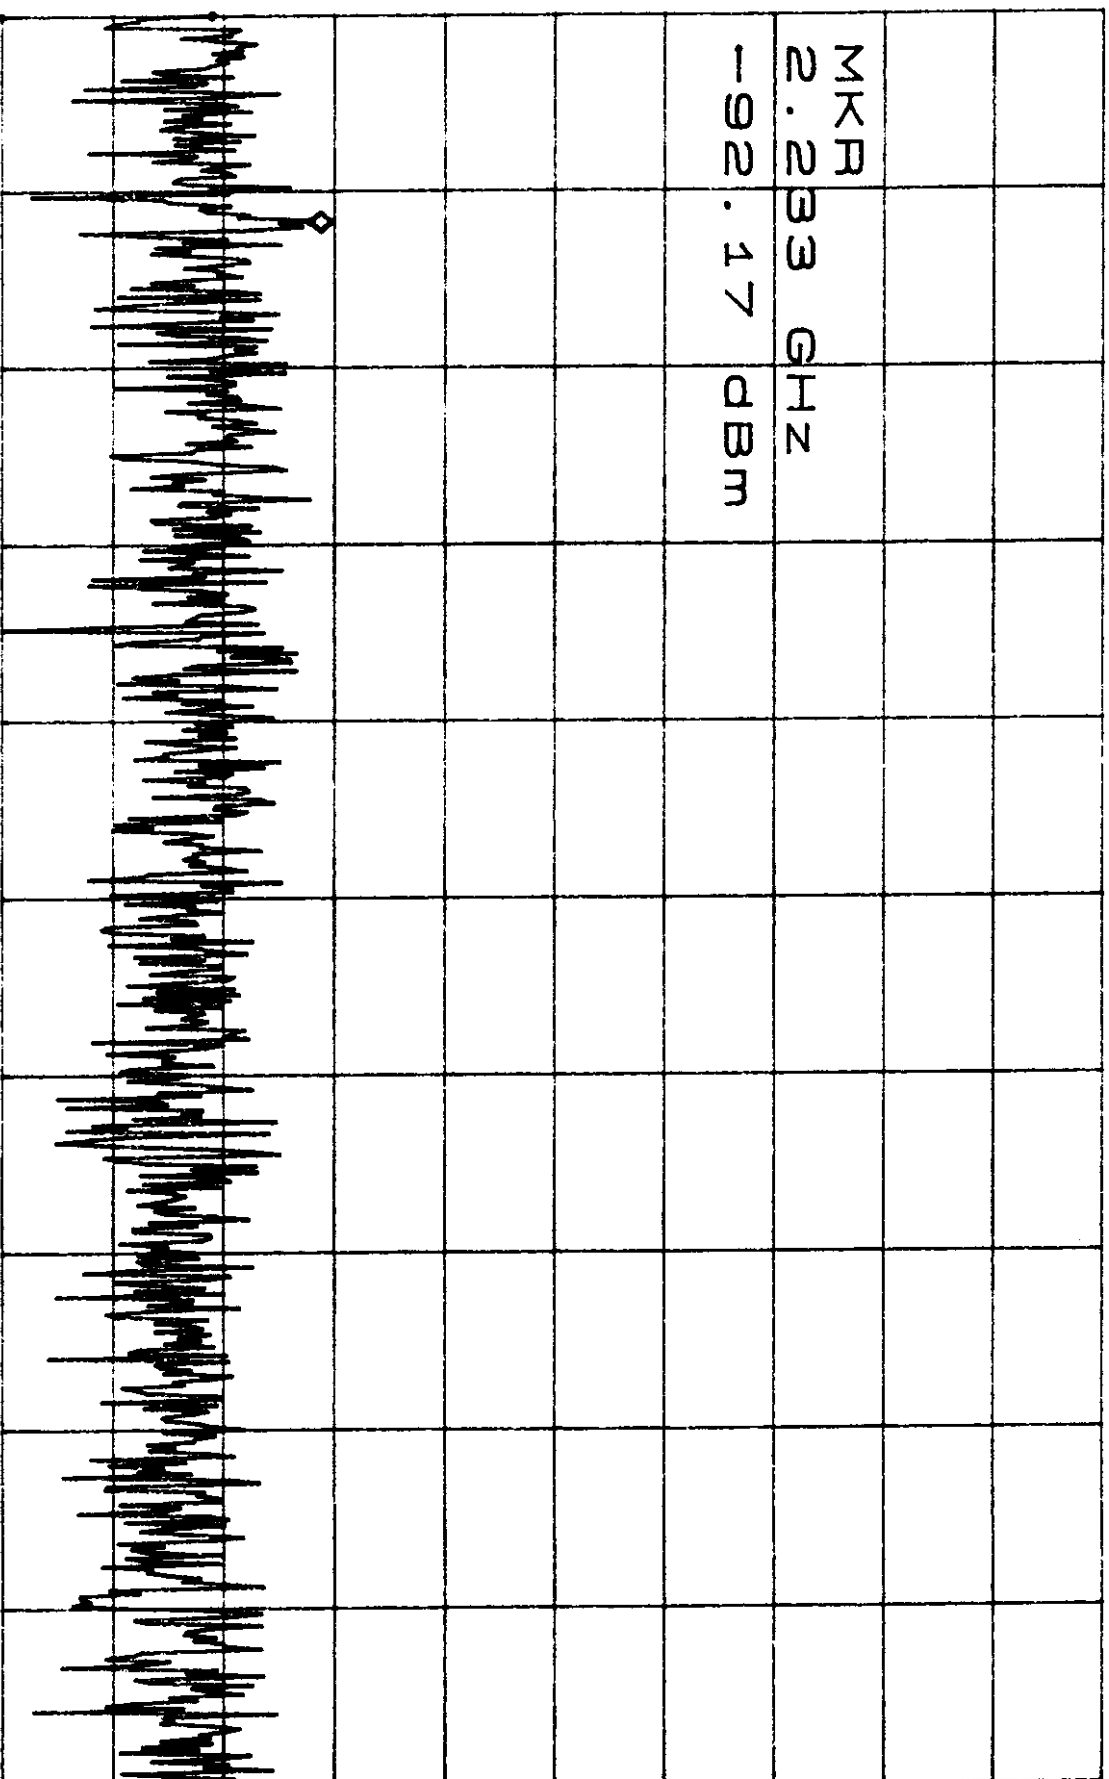

START 2.000GHz

STOP 4.000GHz

Radio 603

3.5


*ATTEN 0dB

RL -20.0dBm

10dB/

MKR -94.50dBm

4.170 GHz
-94.50 dBm

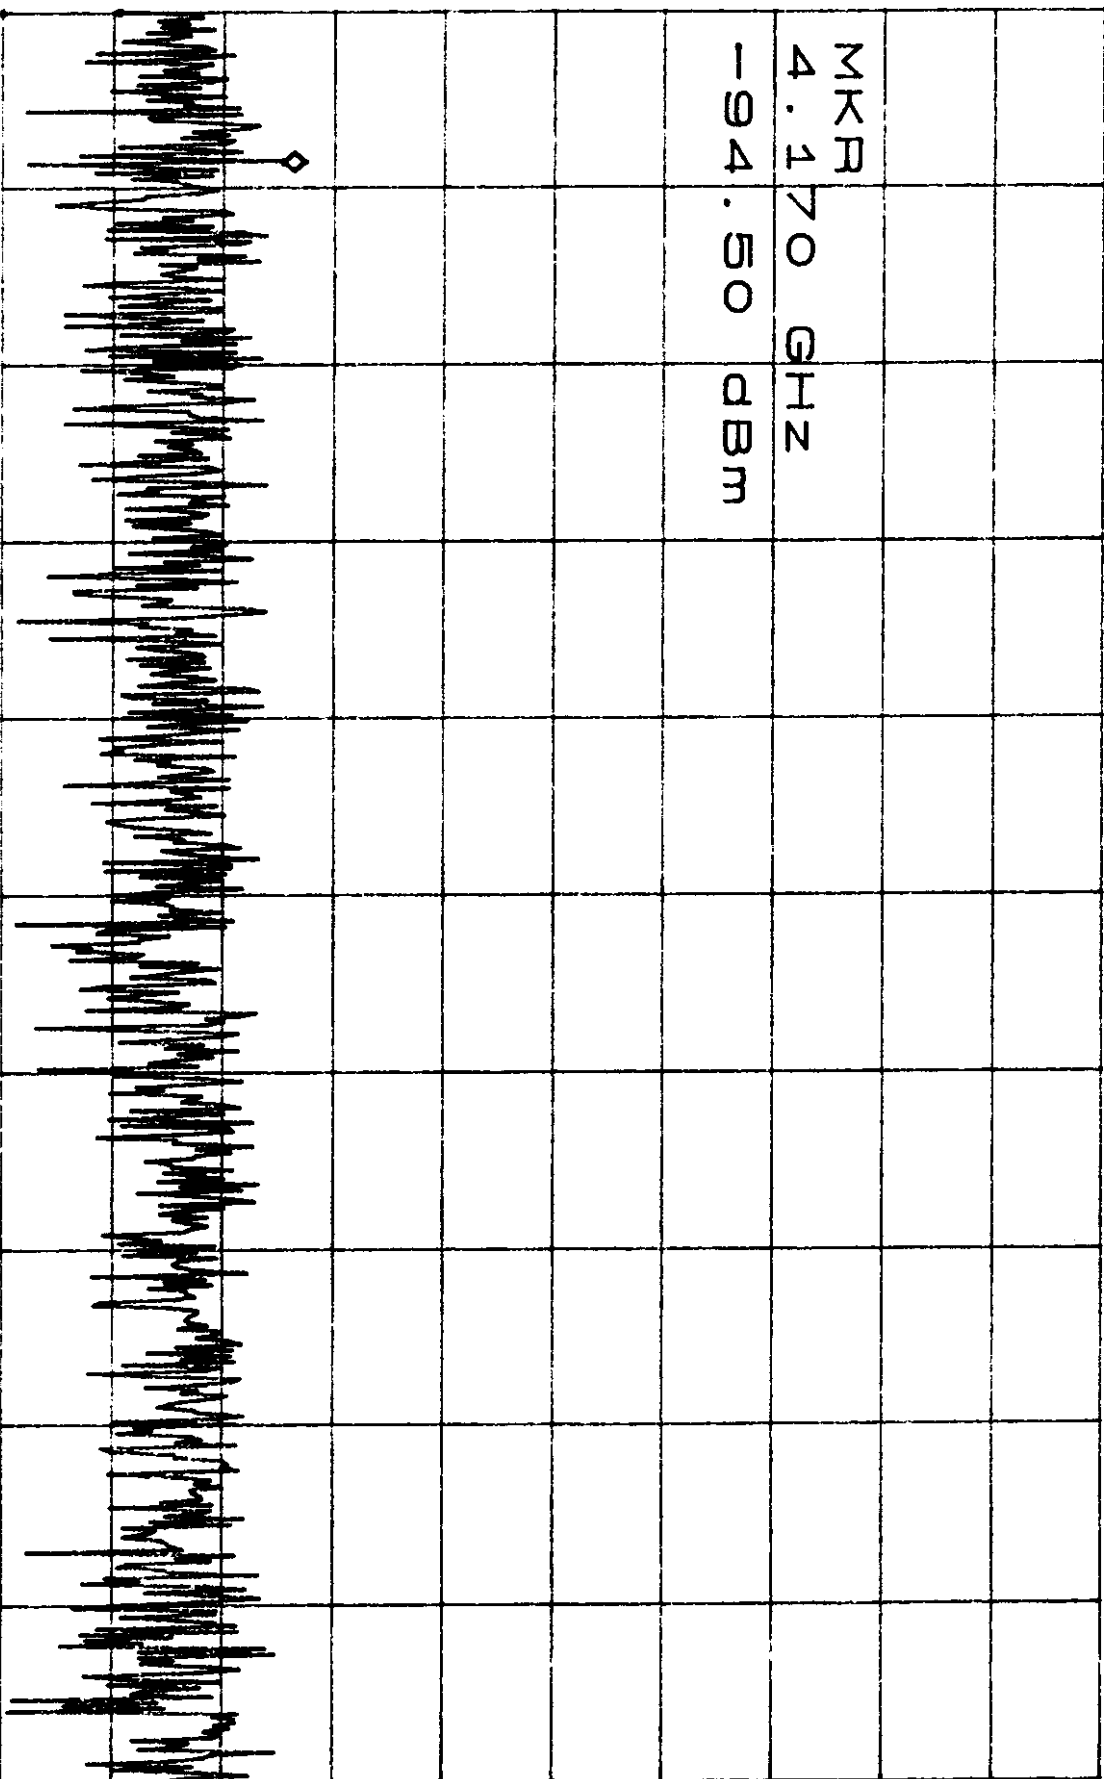

START 4.000GHz

STOP 6.000GHz

*BW 30kHz

VBW 30kHz

SWB 50000

Radio 003

4-5

*ATTEN 0dB


NKR -93.00dBm

FL -20.00dBm

10dB/

6.880GHz

NKR
6.880 GHz
D
-93.00 dBm

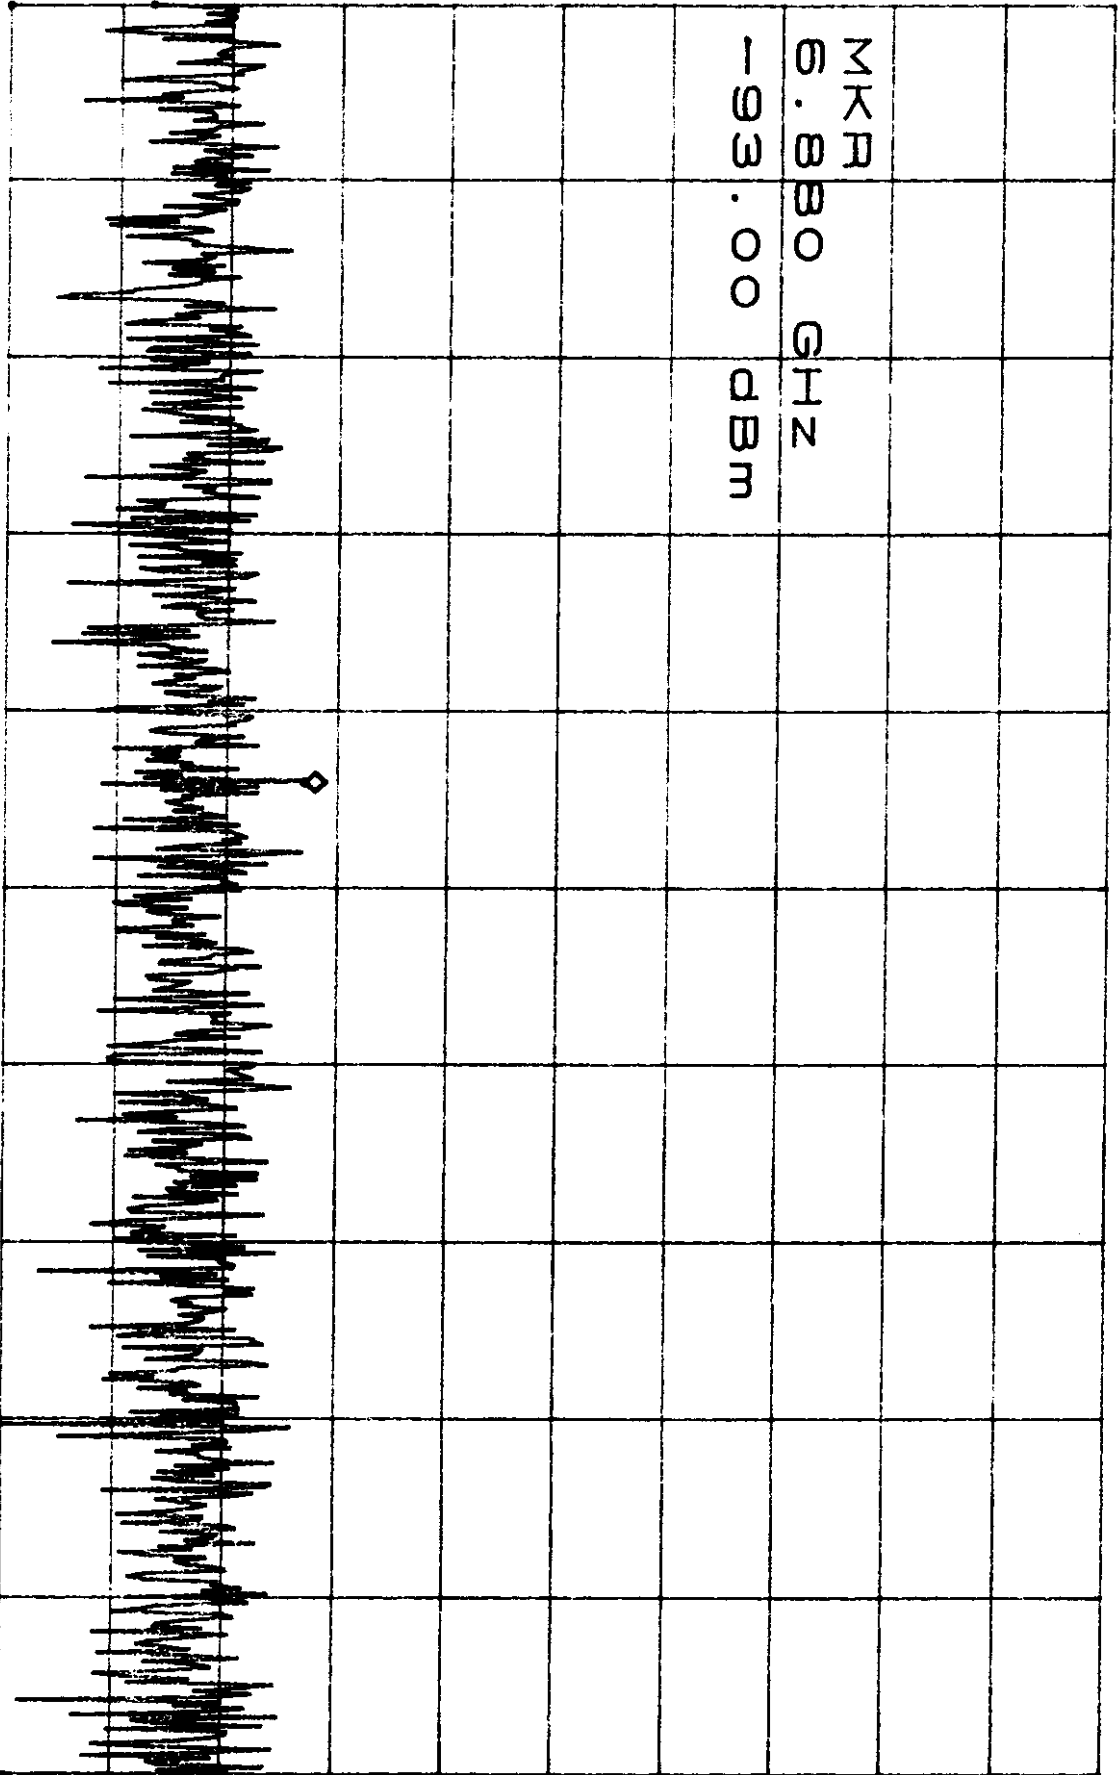

START 6.000GHz

STOP 8.000GHz

*RBW 30KHz

VBW 30KHz

SWB 6.000GHz

Radio 003

5.5

*ATTEN 0dB


MR - 94.50dBm

RL - 20.0dBm

10dB/

8.383GHz

ΣX
8.383 GHz
D
-94.50 dBm

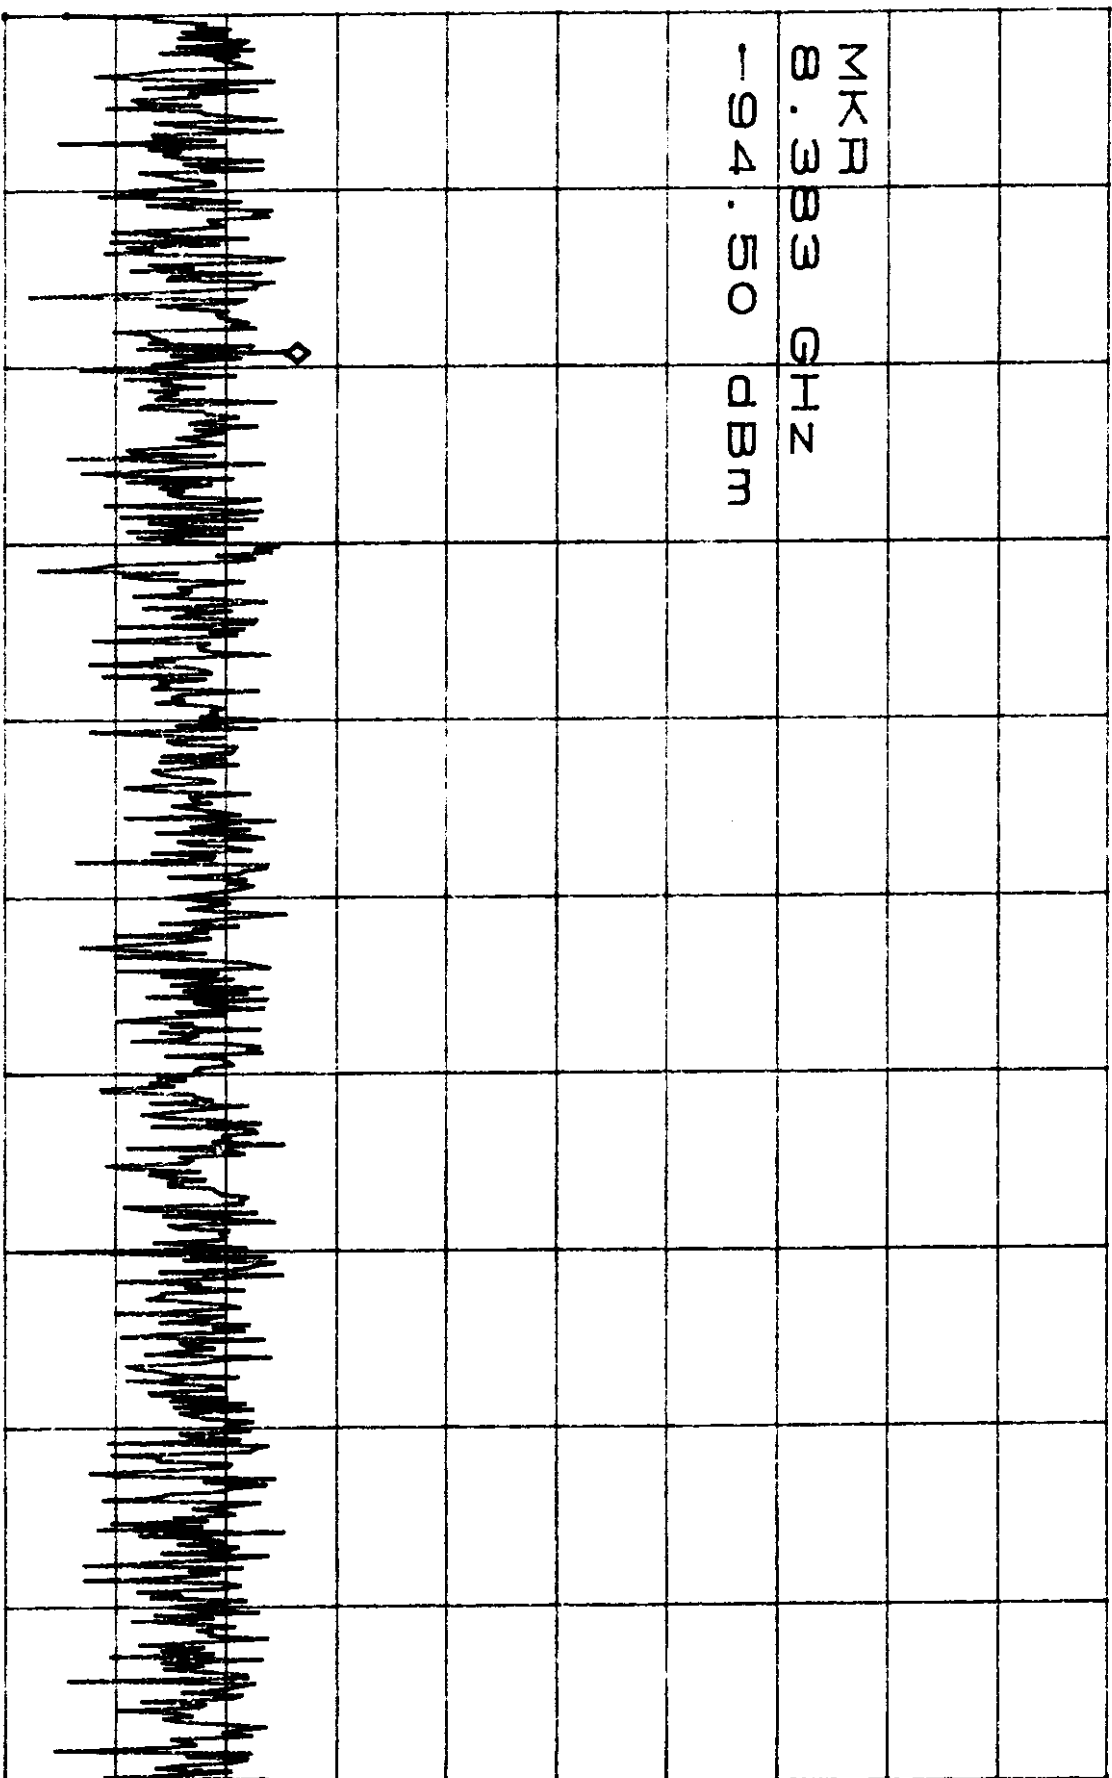

START 8.000GHz

STOP 10.000GHz

*BW 30kHz

VBW 30kHz

SWB 500Hz

ENET 003

ATTEN 20dB
RL 10.0dBm

10dB/

MKR 3.67dBm
2.442100GHz

1-14

MKR
2.442100 GHz
3.67 dBm

*

CENTER 2.441925GHz

SPAN 5.000MHz

EHER 003

2.14


MKR -70.67dBm

1.931GHz

10dB/

ATTEN 20dB
RL 10.0dBm

ΣKΠ
1.931 GHz
D -70.67 dBm

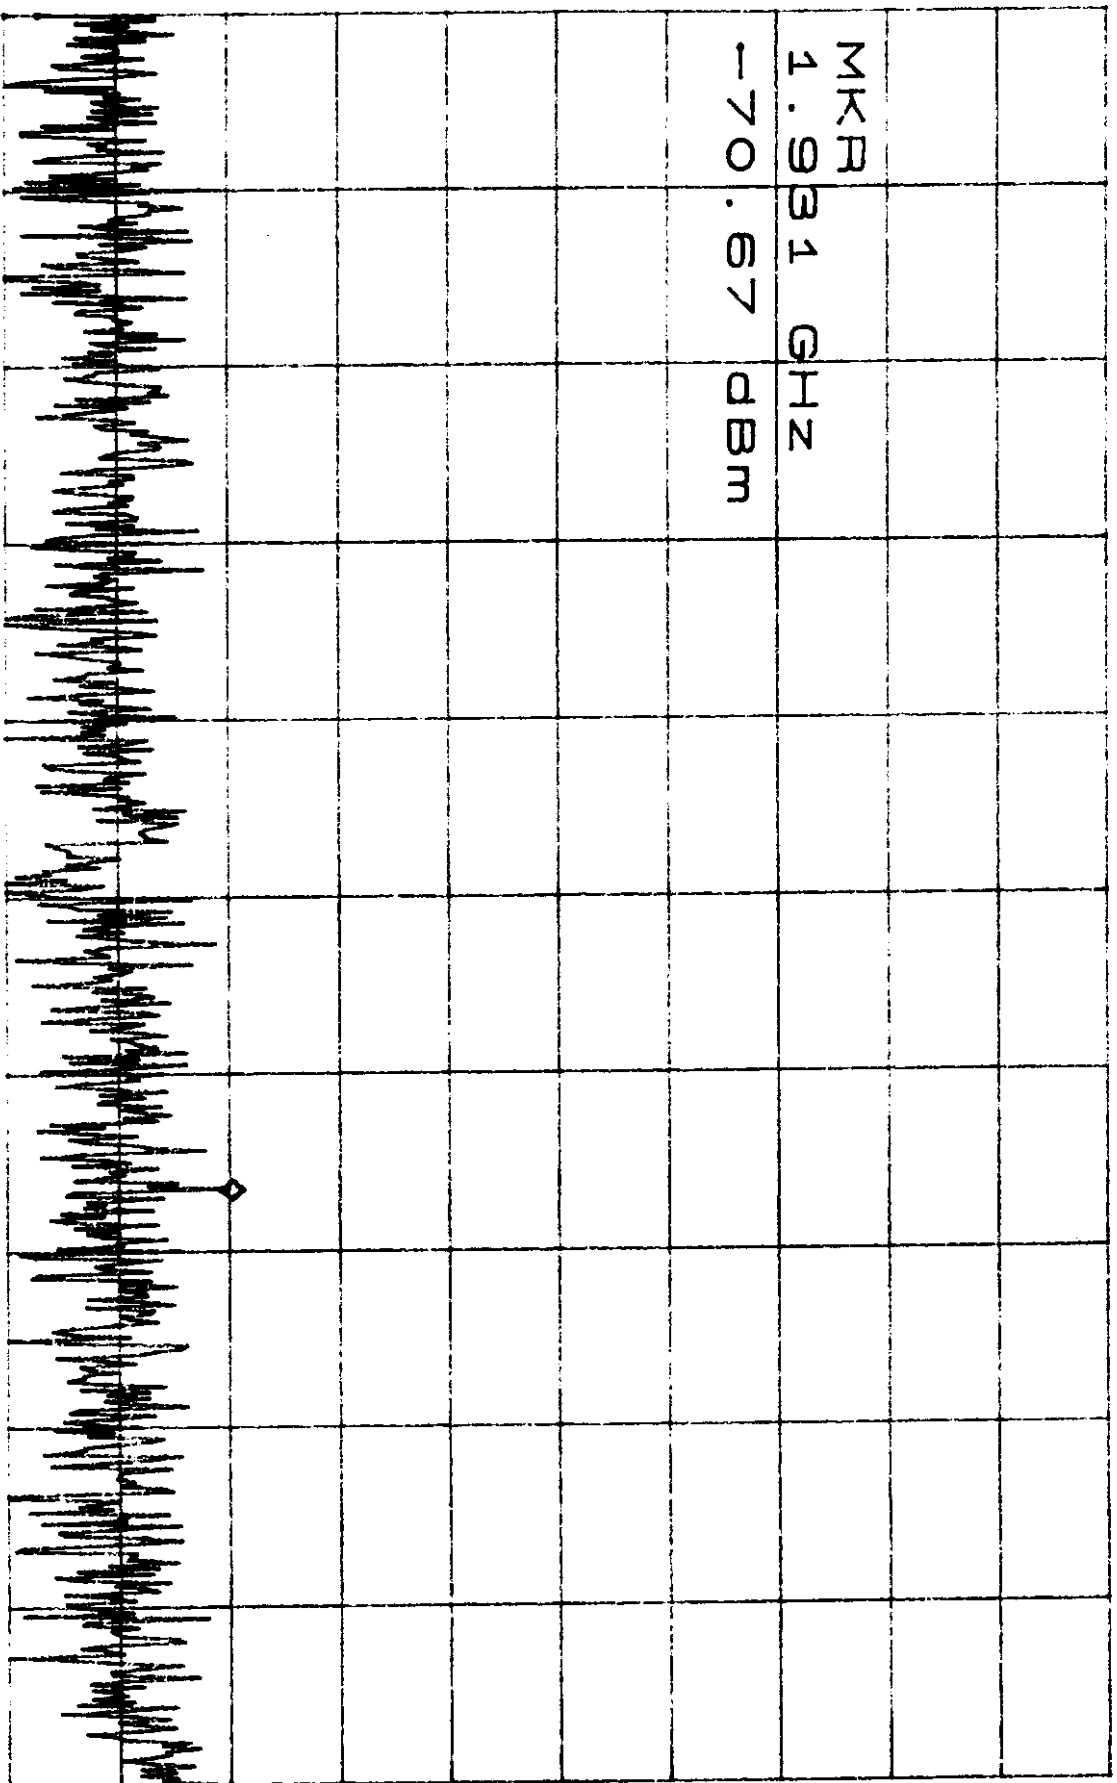

START 1.000GHz

STOP 2.400GHz

VBW 30kHz

SWB 30kHz

SMP 3 90sec

ENET 003

3-14


MKR -71.17dBm

ATTEN 20dB
RL 10.0dBm

10dB/

2.868GHz

ΣKπ
2.868 GHz
D
-71.17 dBm

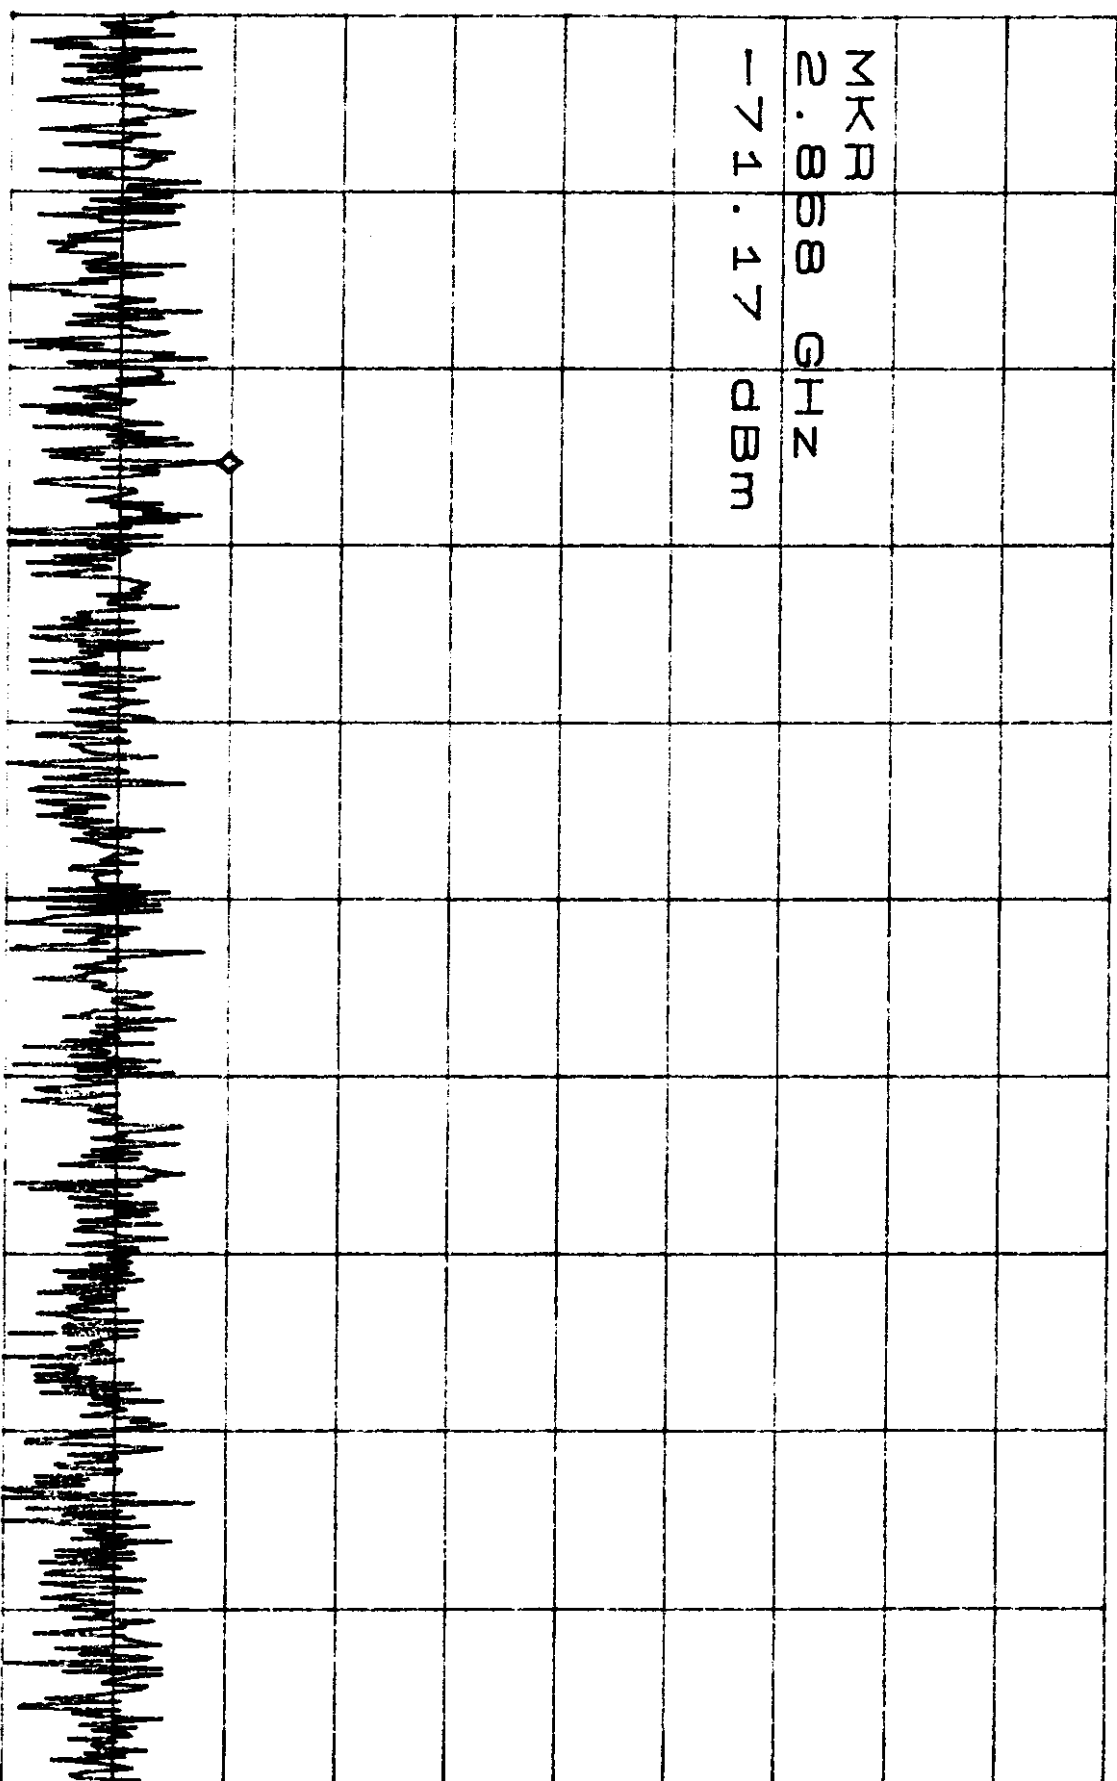

START 2.484GHz

STOP 4.000GHz

RBW 30kHz VBW 30kHz

ENET 603

4.14

ATTEN 20dB


MKR -73.00dBm

RL 10.0dBm

10dB/

4.353GHz

MKR
4.353 GHz
D
-73.00 dBm

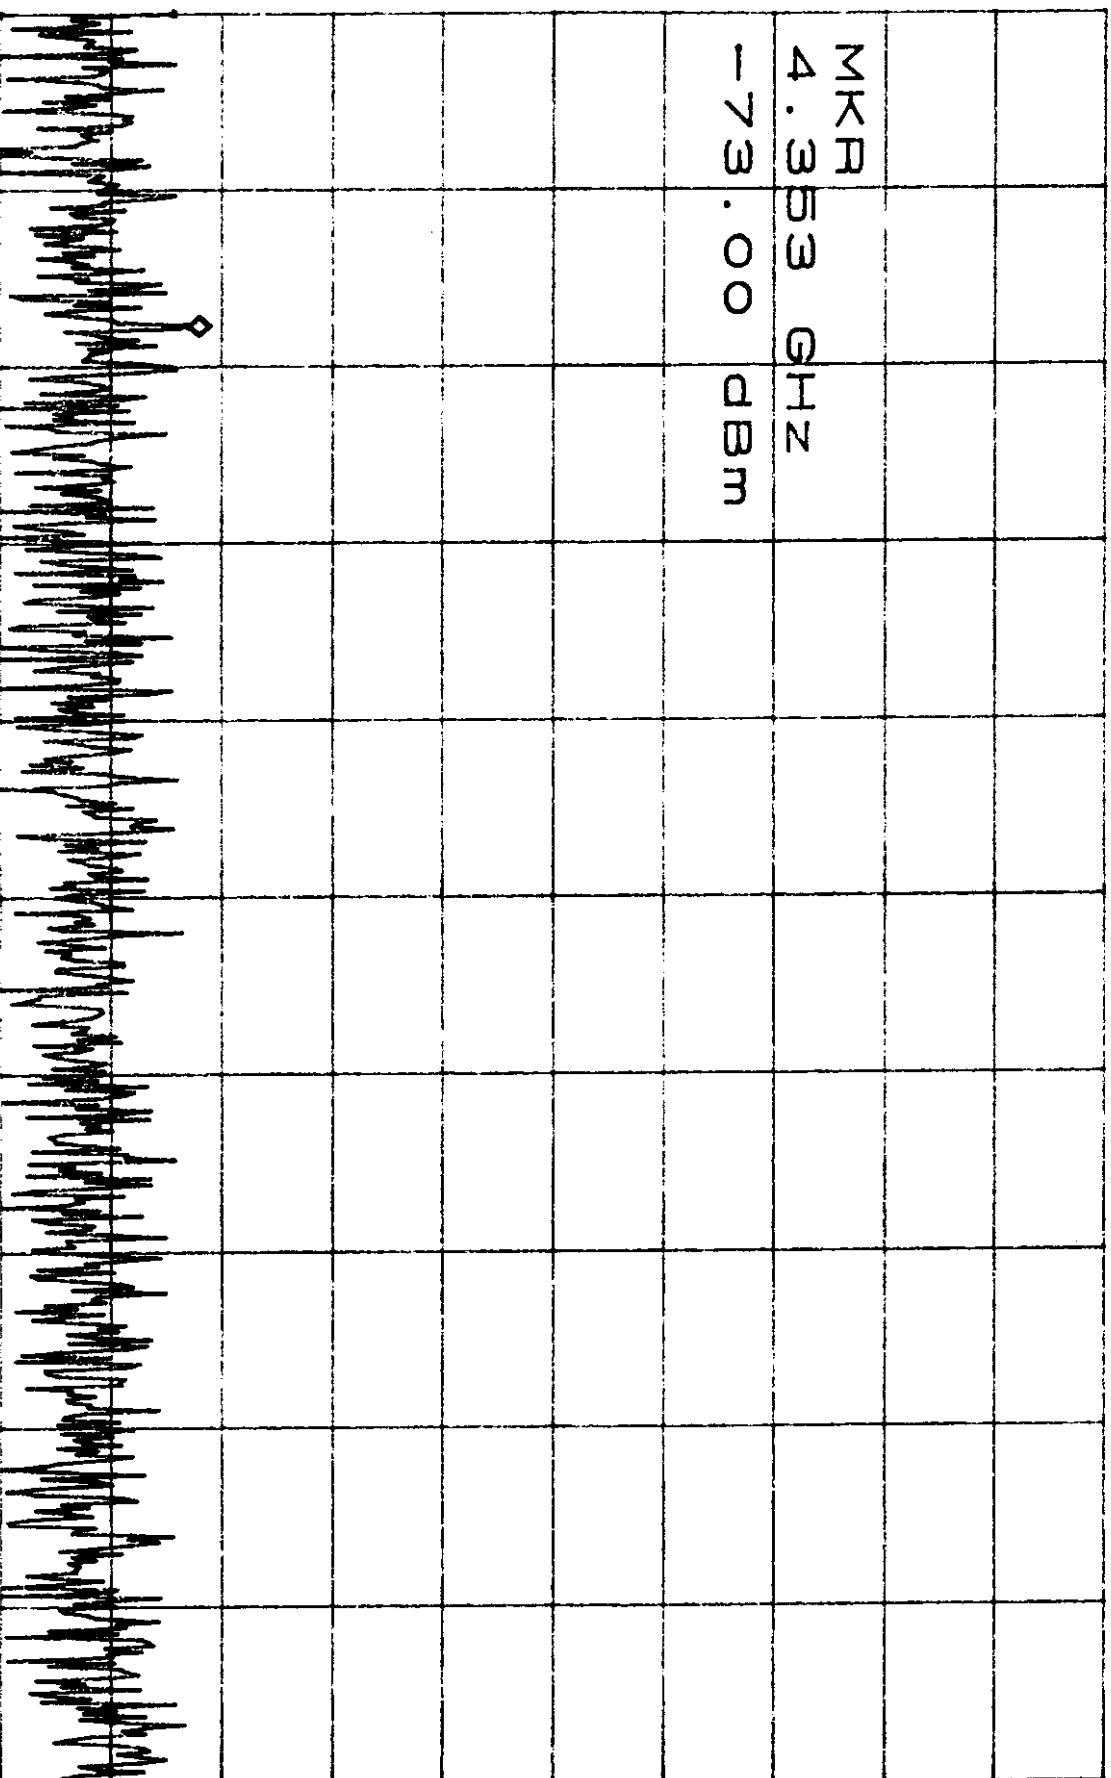

START 4.000GHz

STOP 6.000GHz

RBW 30kHz

VBW 30kHz

SWB 50000

ENET 603


5.14

ATTEN 20dB
RL 10.00dBm

10dB/

MKR -72.00dBm
0.433GHz

ΣX
0.433 GHz
D -72.00 dBm

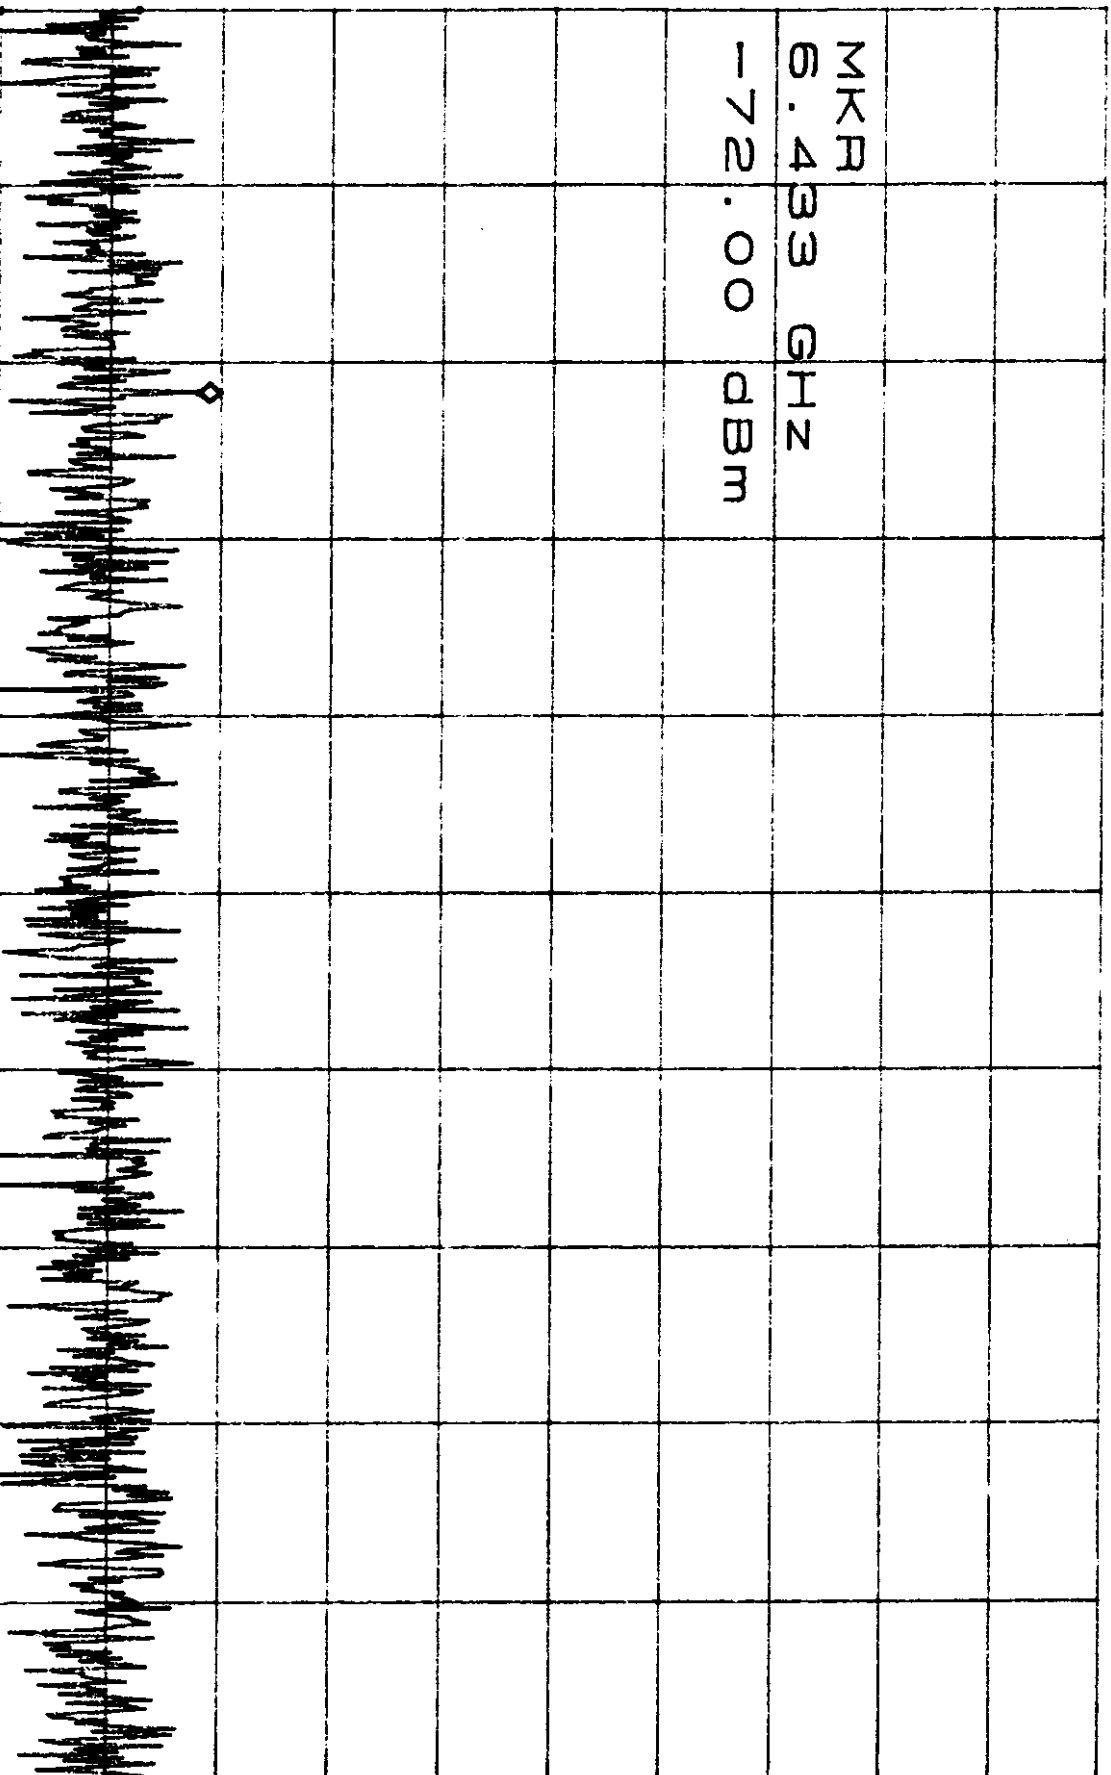

START 6.000GHz

STOP 8.000GHz

*RBW 30kHz

VBW 30kHz

SMP 5 60sec

ENET 003

6-14

ATTEN 20dB


MKR -69.67dBm

FL 10.00dBm

10dB/

9.170GHz

MKR
9.170 GHz
-69.67 dBm

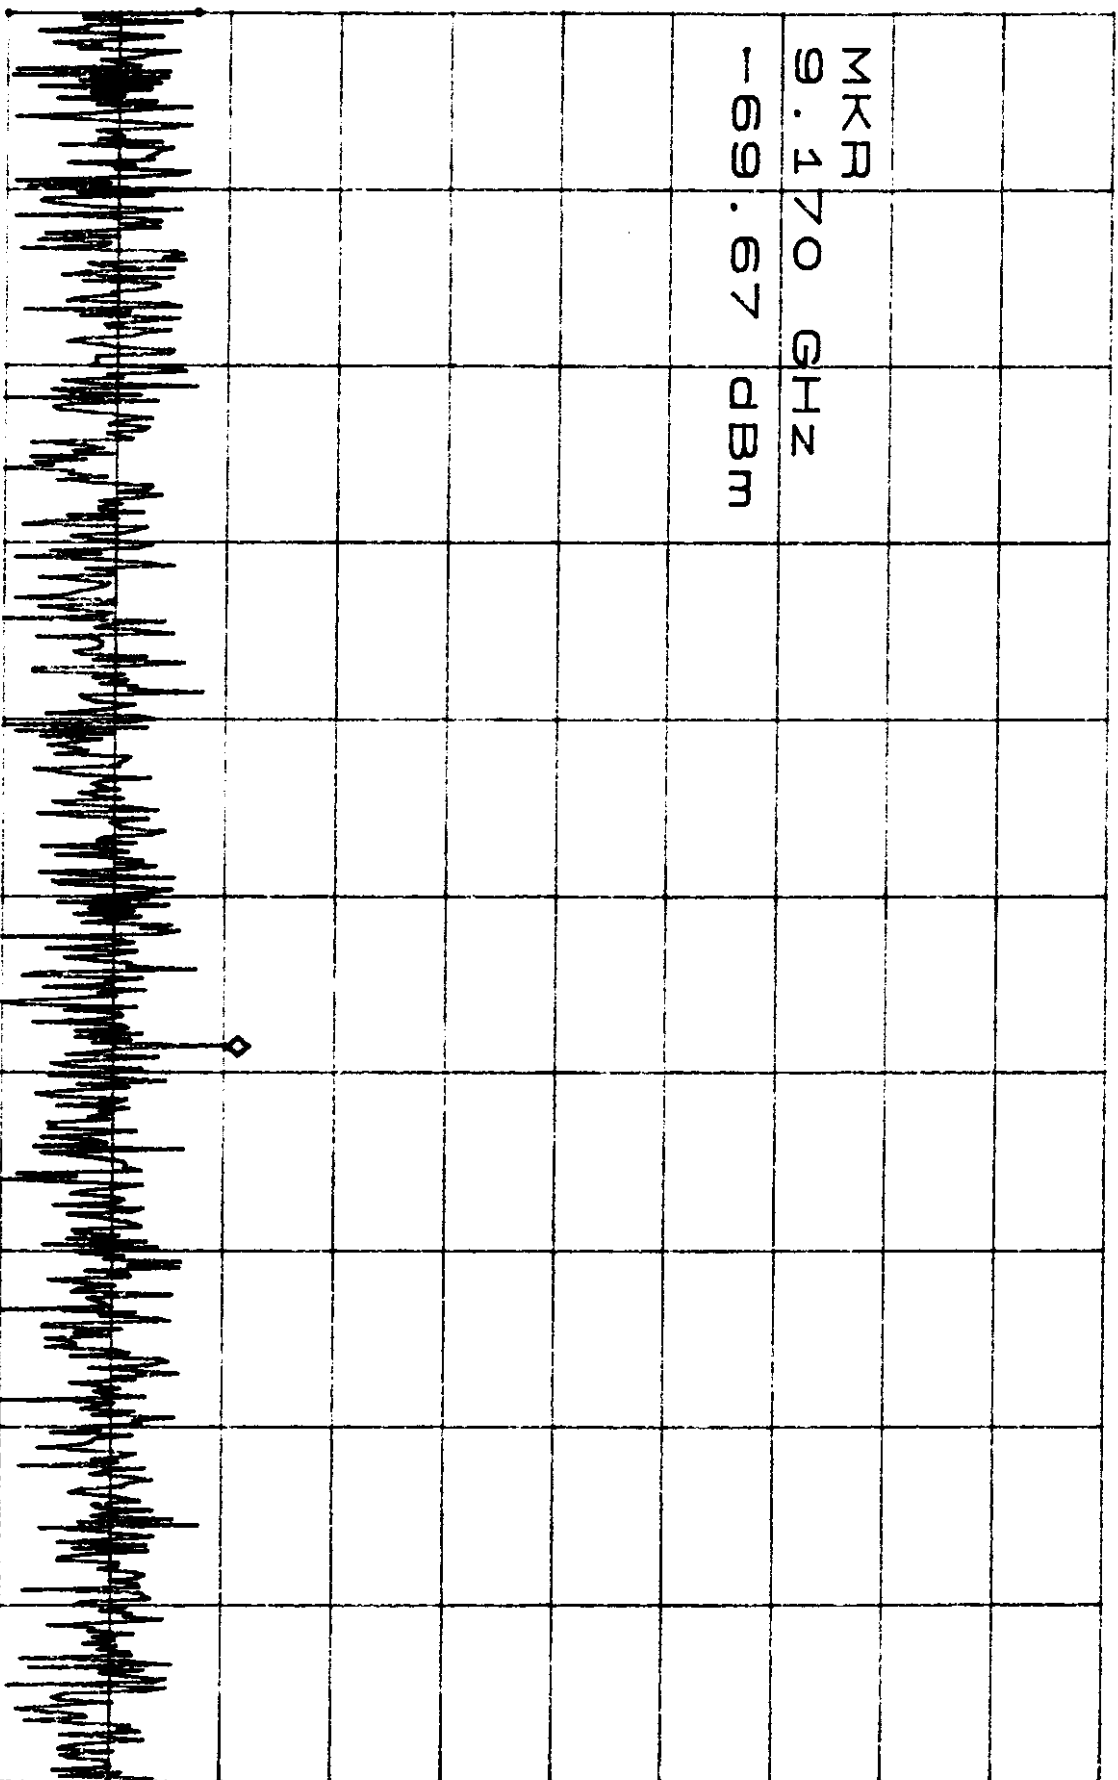

START 8.000GHz

STOP 10.000GHz

*RBW 30kHz

VBW 30kHz

SWB E 60000

ENET 003

2.14


ATTEN 20dB

MKR -71.33dBm

RL 10.0dBm

10dB/

11.127GHz

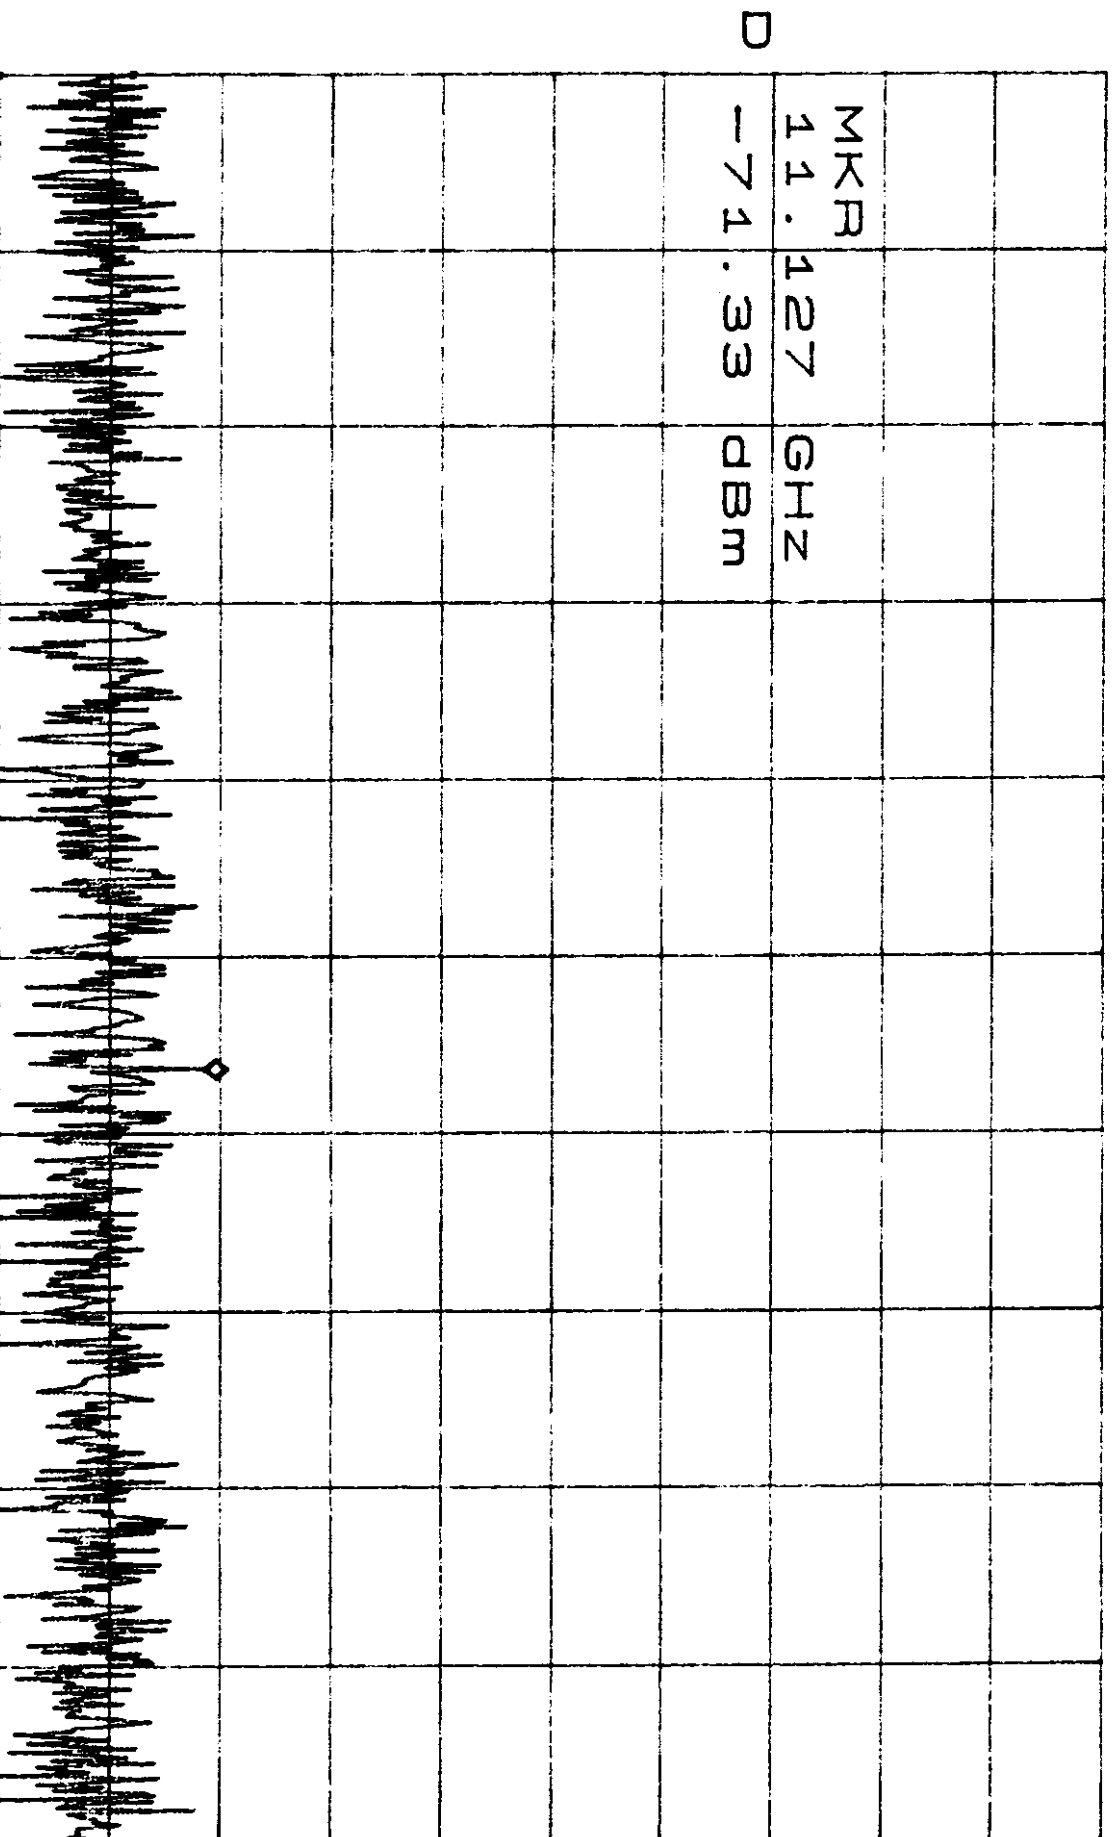

D

MKR

11.127 GHz

-71.33 dBm

START 10.000GHz

STOP 12.000GHz

RBW 30kHz VBW 30kHz SWD E 50000

ENET 003

8.14


MKR -70.33dBm

ATTEN 20dB
RL 10.0dBm

10dB/

13.840GHz

MKR
13.840 GHz
-70.33 dBm

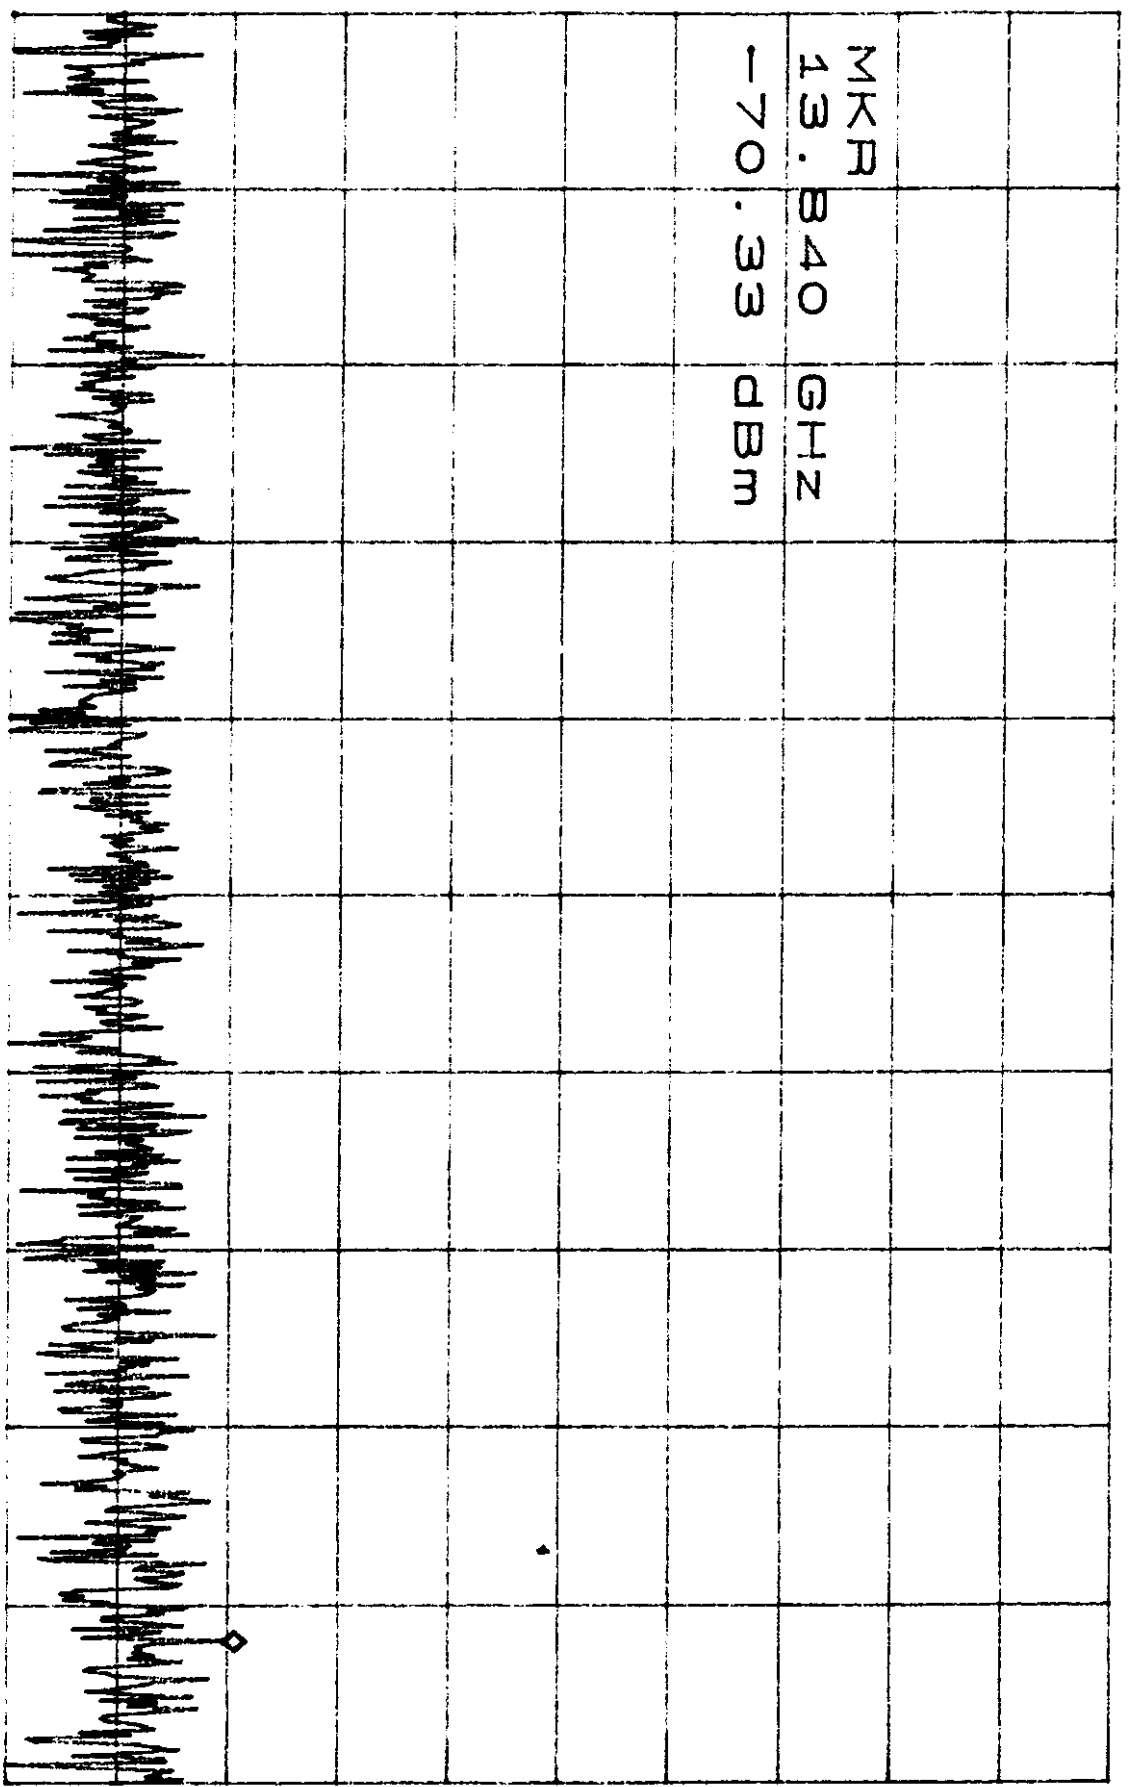

START 12.000GHz

STOP 14.000GHz

*RBW 30KHz

VBW 30KHz

SMP 5 60sec

ENET003

9.14


ATTEN 20dB
RL 10.00dBm

10dB/

MKR -71.17dBm
15.087GHz

MKR
15.087 GHz
-71.17 dBm

D

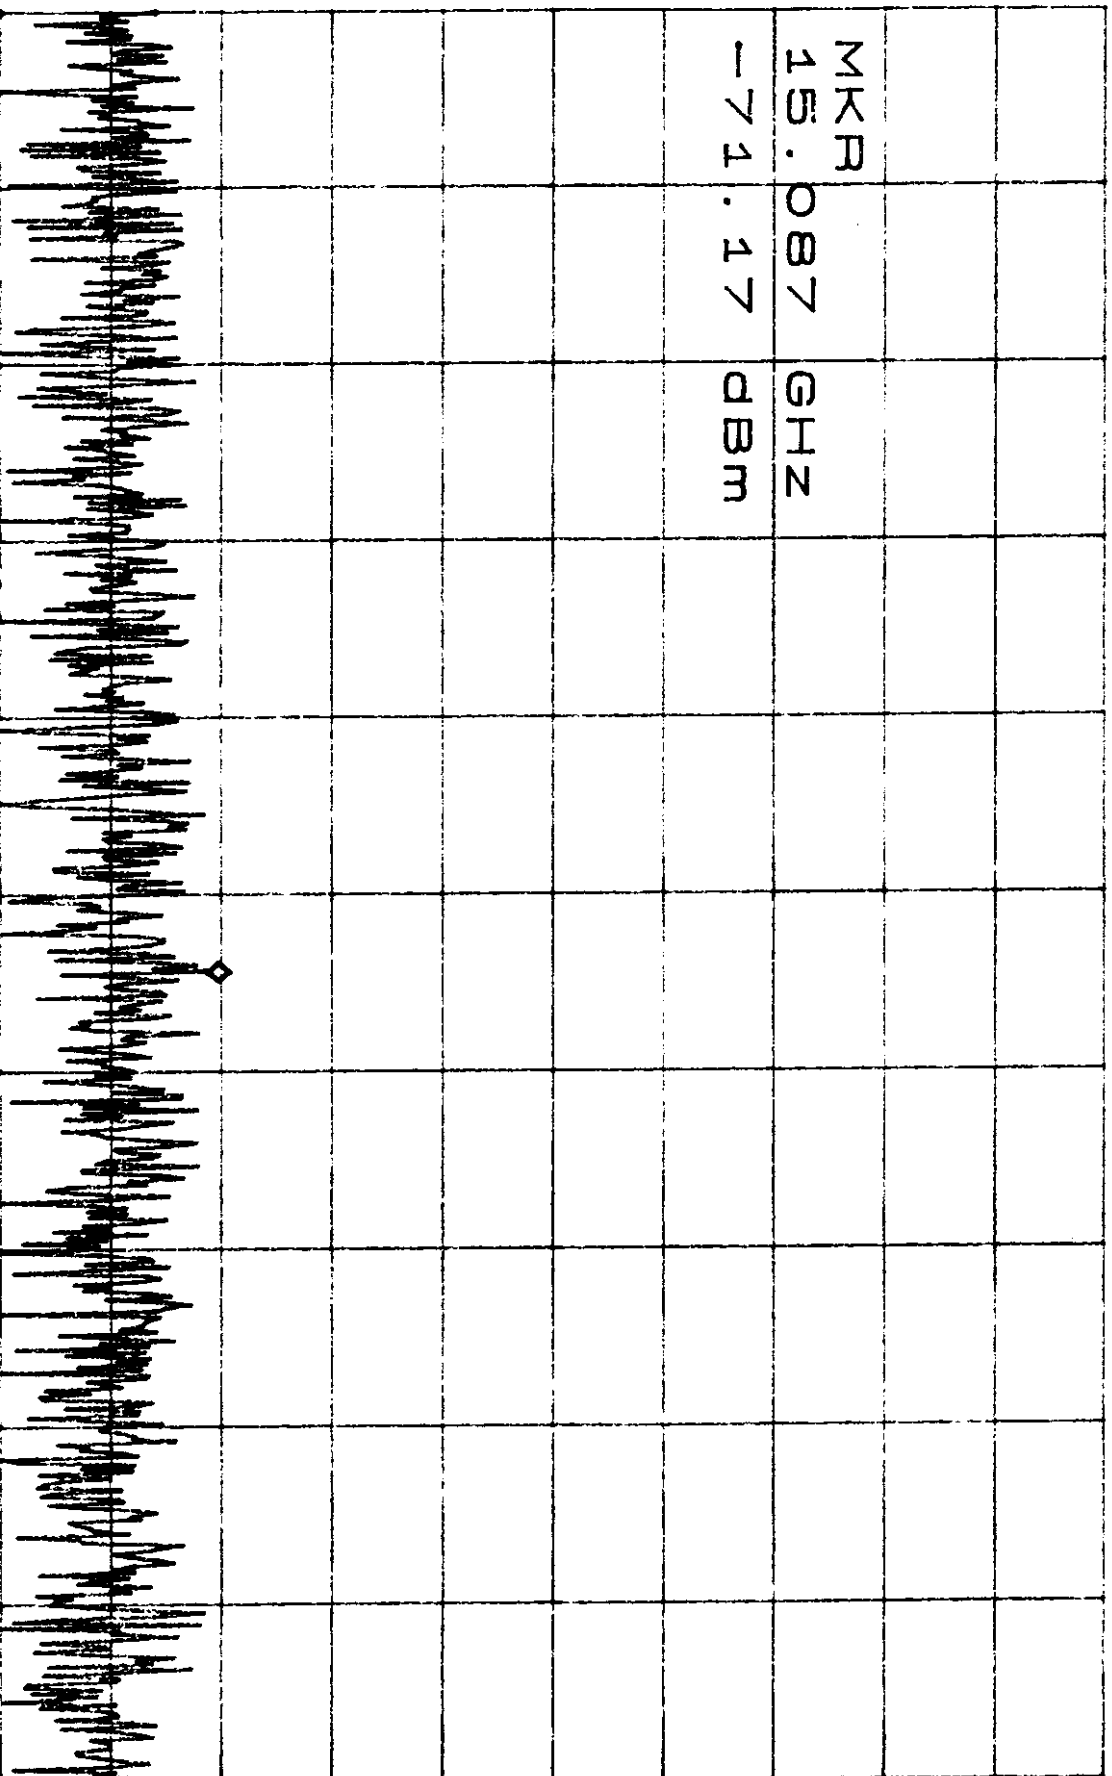

START 14.000GHz

STOP 16.000GHz

*RBW 30KHz

VBW 30KHz

SWP 5.60sec

ENET 003

10-14


ATTEN 20dB

MKR -69.50dBm

RL 10.00dBm

10dB/


16.413GHz

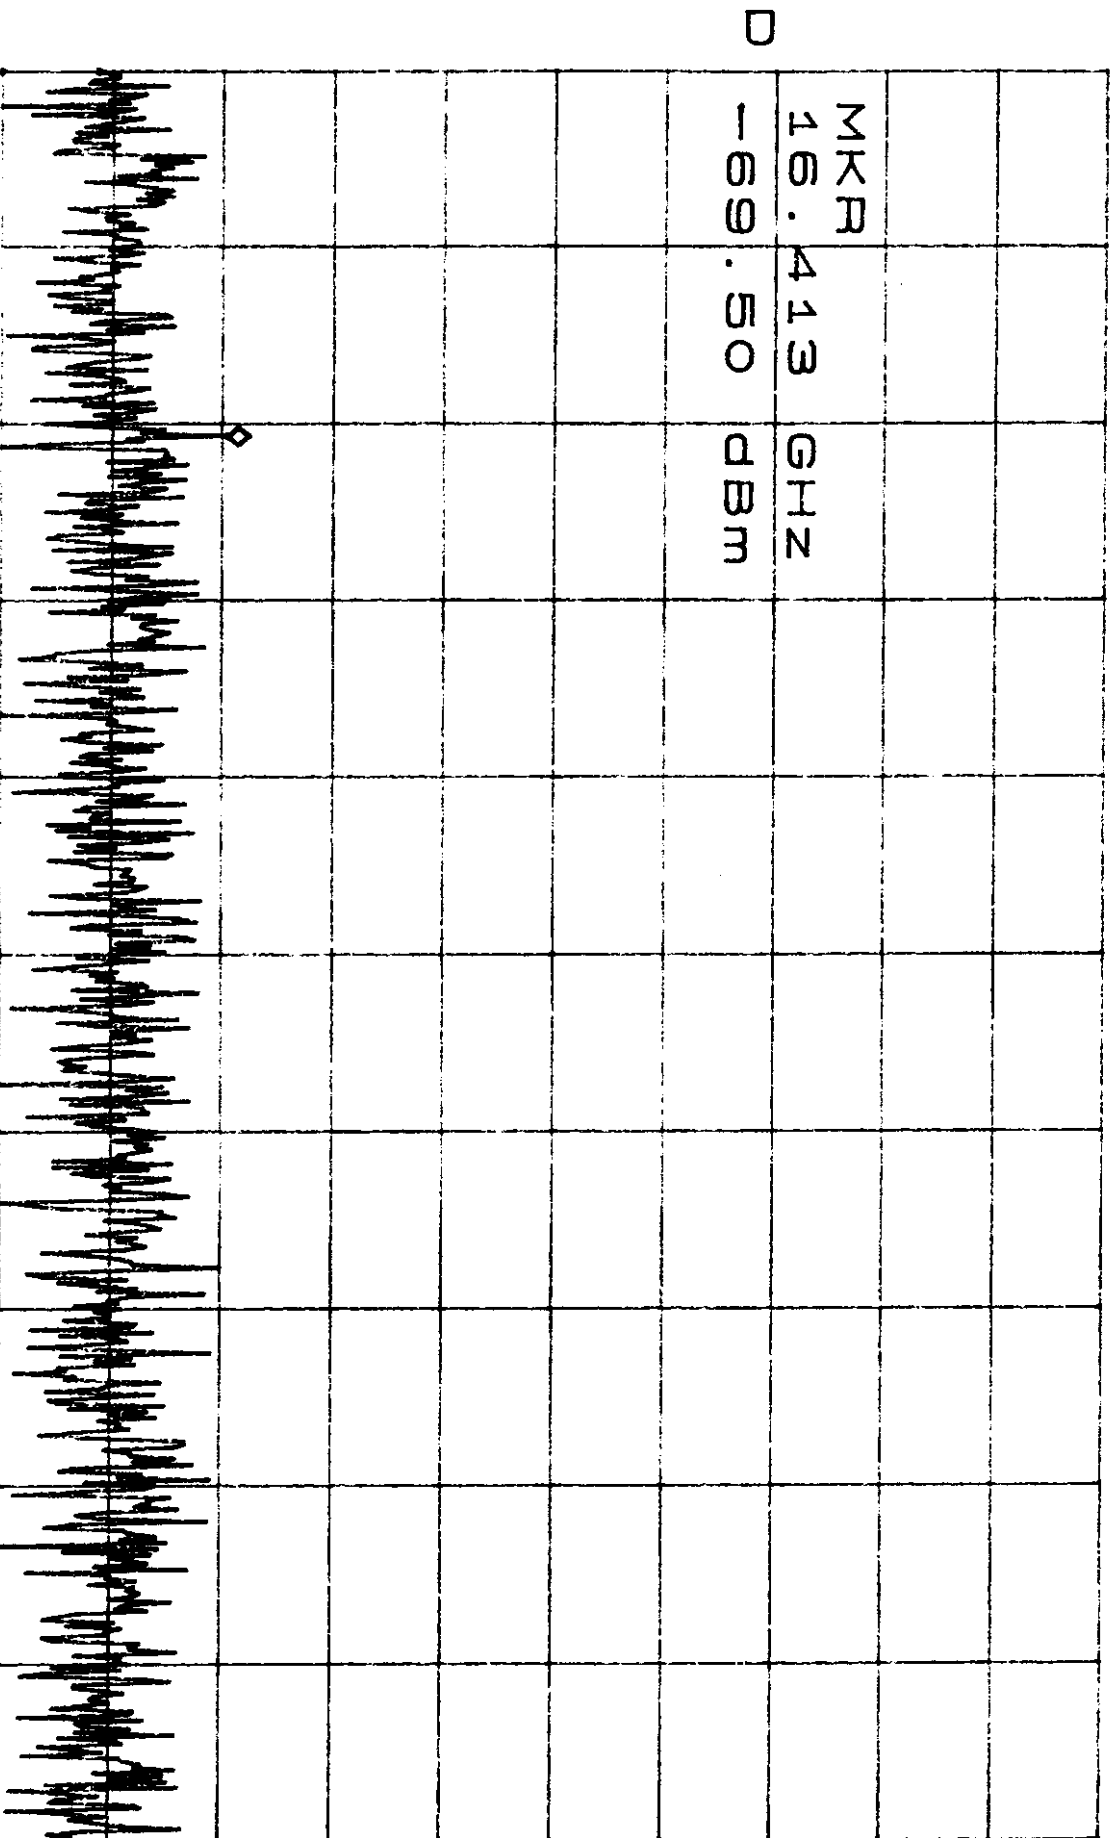

ENET 00B

16.14

ATTEN 20dB
FL 10.00dBm
10dB/
MKR -70.50dBm
19.660GHz

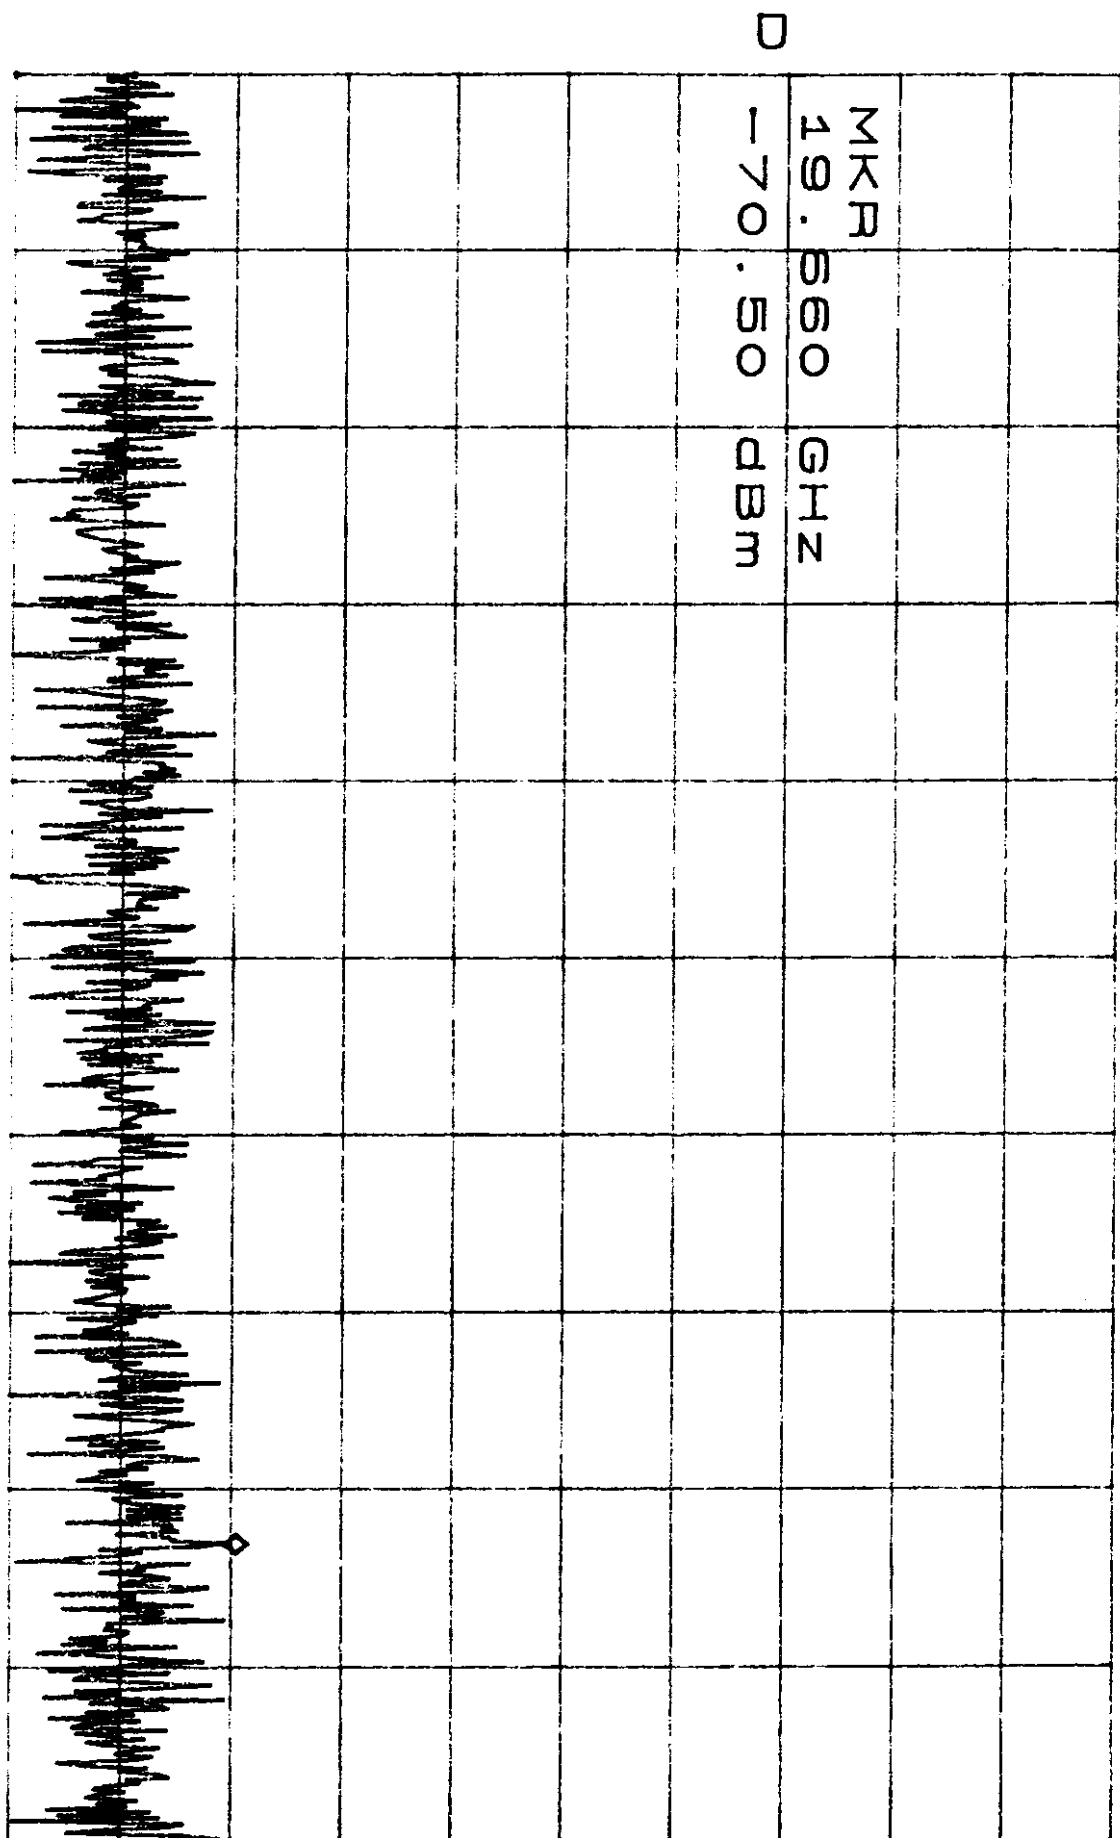

START 18.000GHz
STOP 20.000GHz

*RBW 30KHz
VBW 30KHz
SWB E 60000

ENET 003


12-14

ATTEN 20dB
RL 10.0dBm

10dB/

NKP 169.83dBm
20.813GHz

NKP
20.813 GHz
D
-69.83 dBm

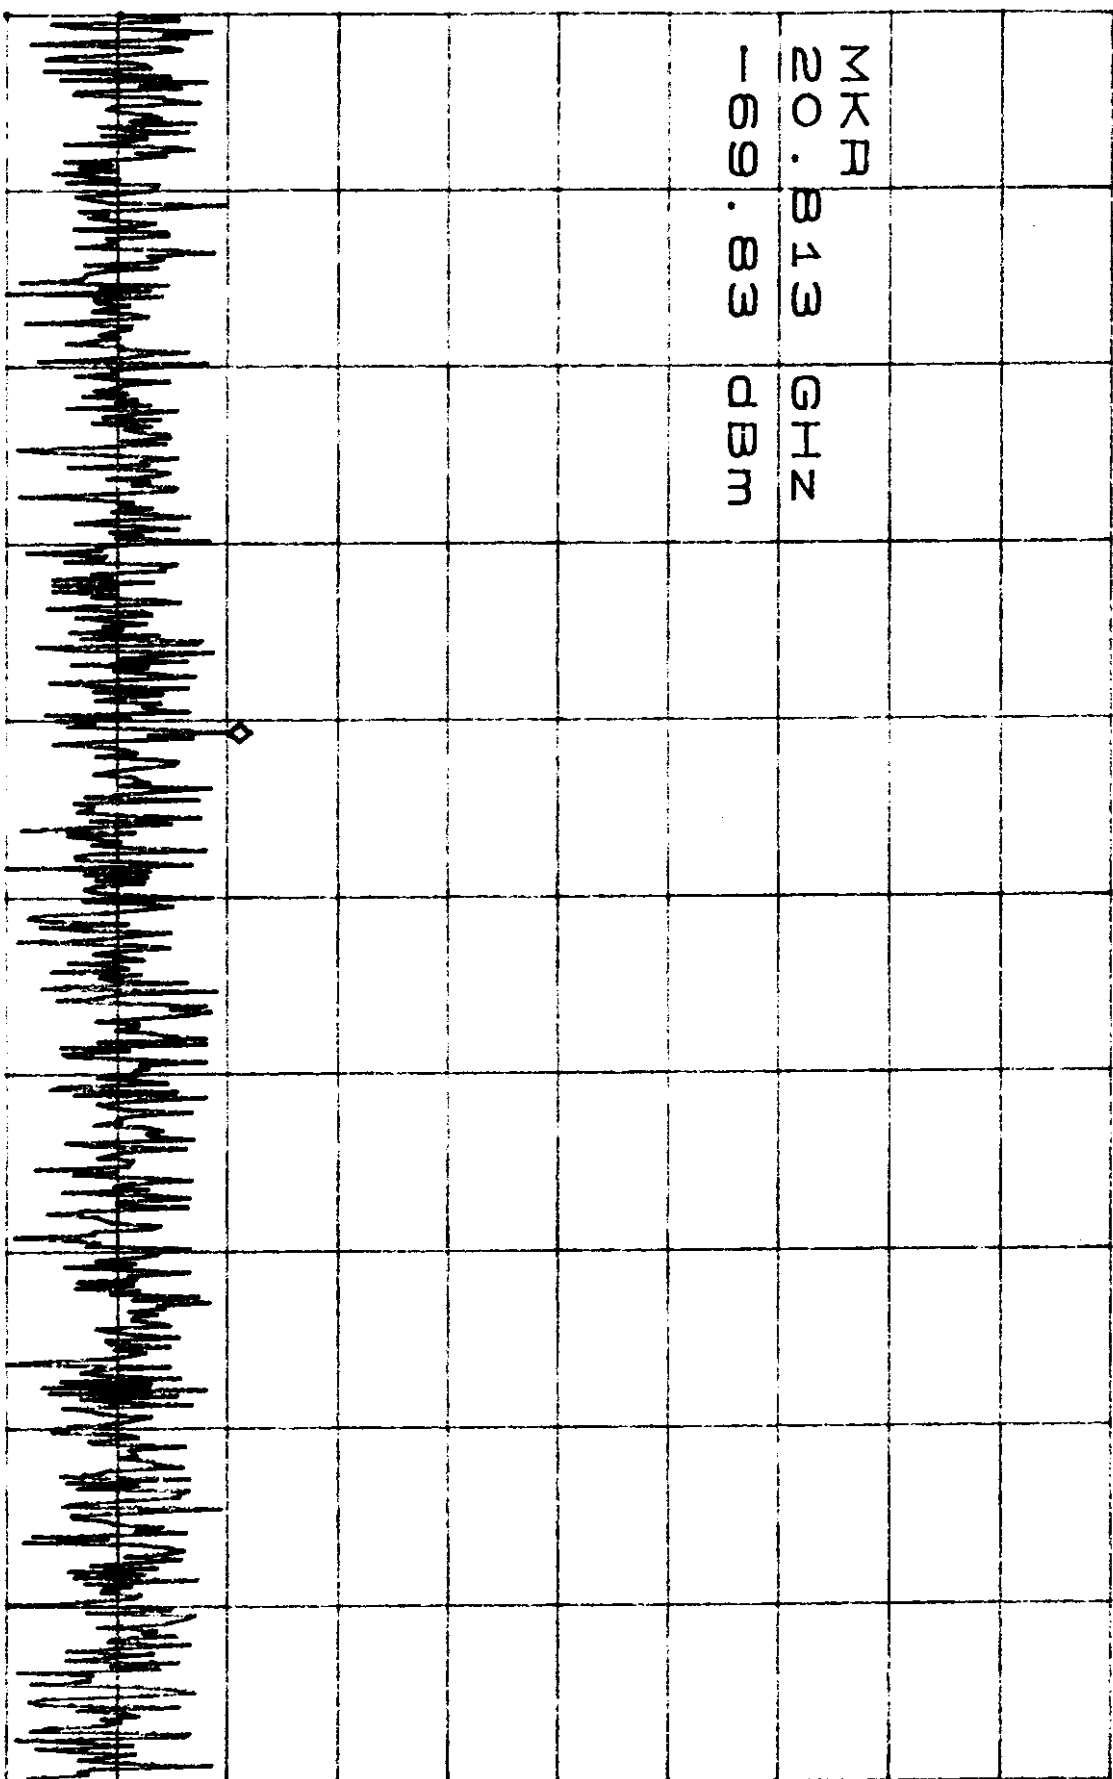

START 20.000GHz

STOP 22.000GHz

*BW 30kHz

VBW 30kHz

SWB 500sec

EHET 003


13-14

ATTEN 20dB
RL 10.0dBm

10dB/

MKR -69.83dBm
22.397GHz

MKR
22.397 GHz
-69.83 dBm
D

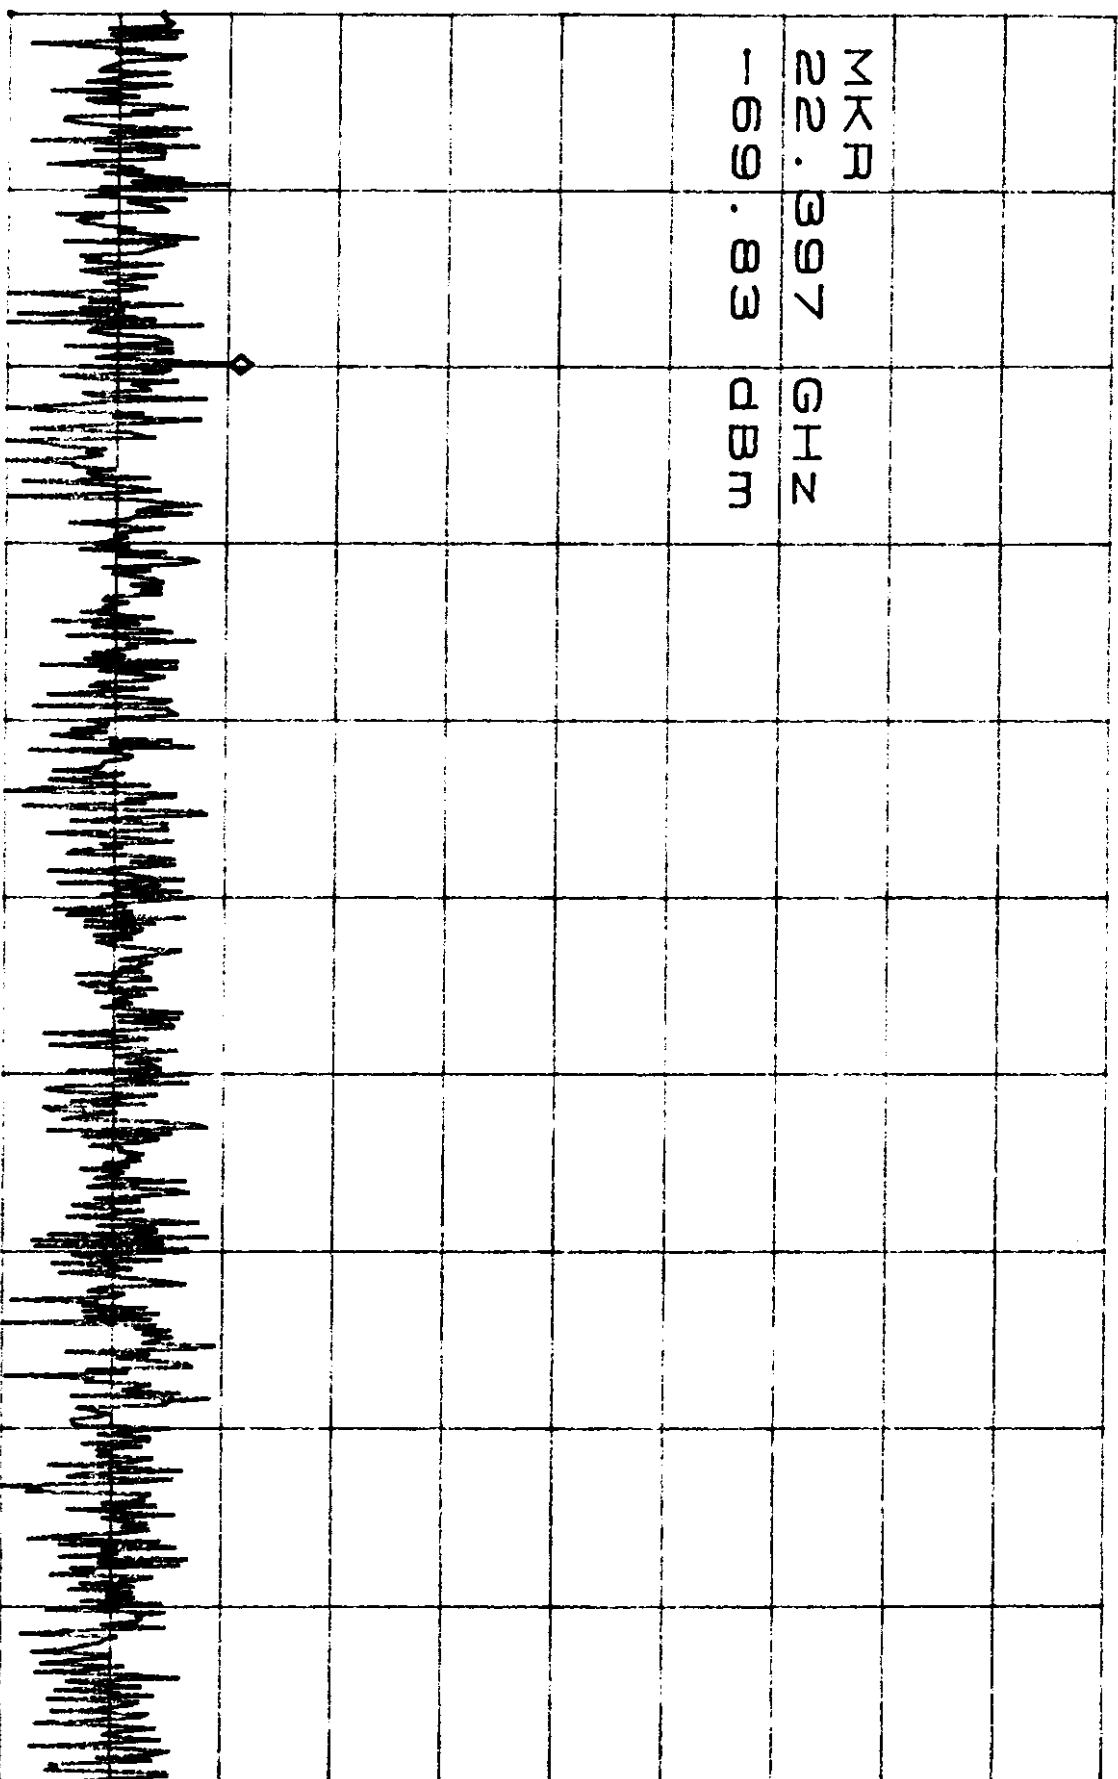

START 22.000GHz

STOP 24.000GHz

*RBW 30KHz

VBW 30KHz

SWP 500000

ENET 003

14-14

ATTEN 20dB

MKR -68.33dBm

RL 10.0dBm

10dB/


25.707GHz

MKR

25.707 GHz

-68.33 dBm

D

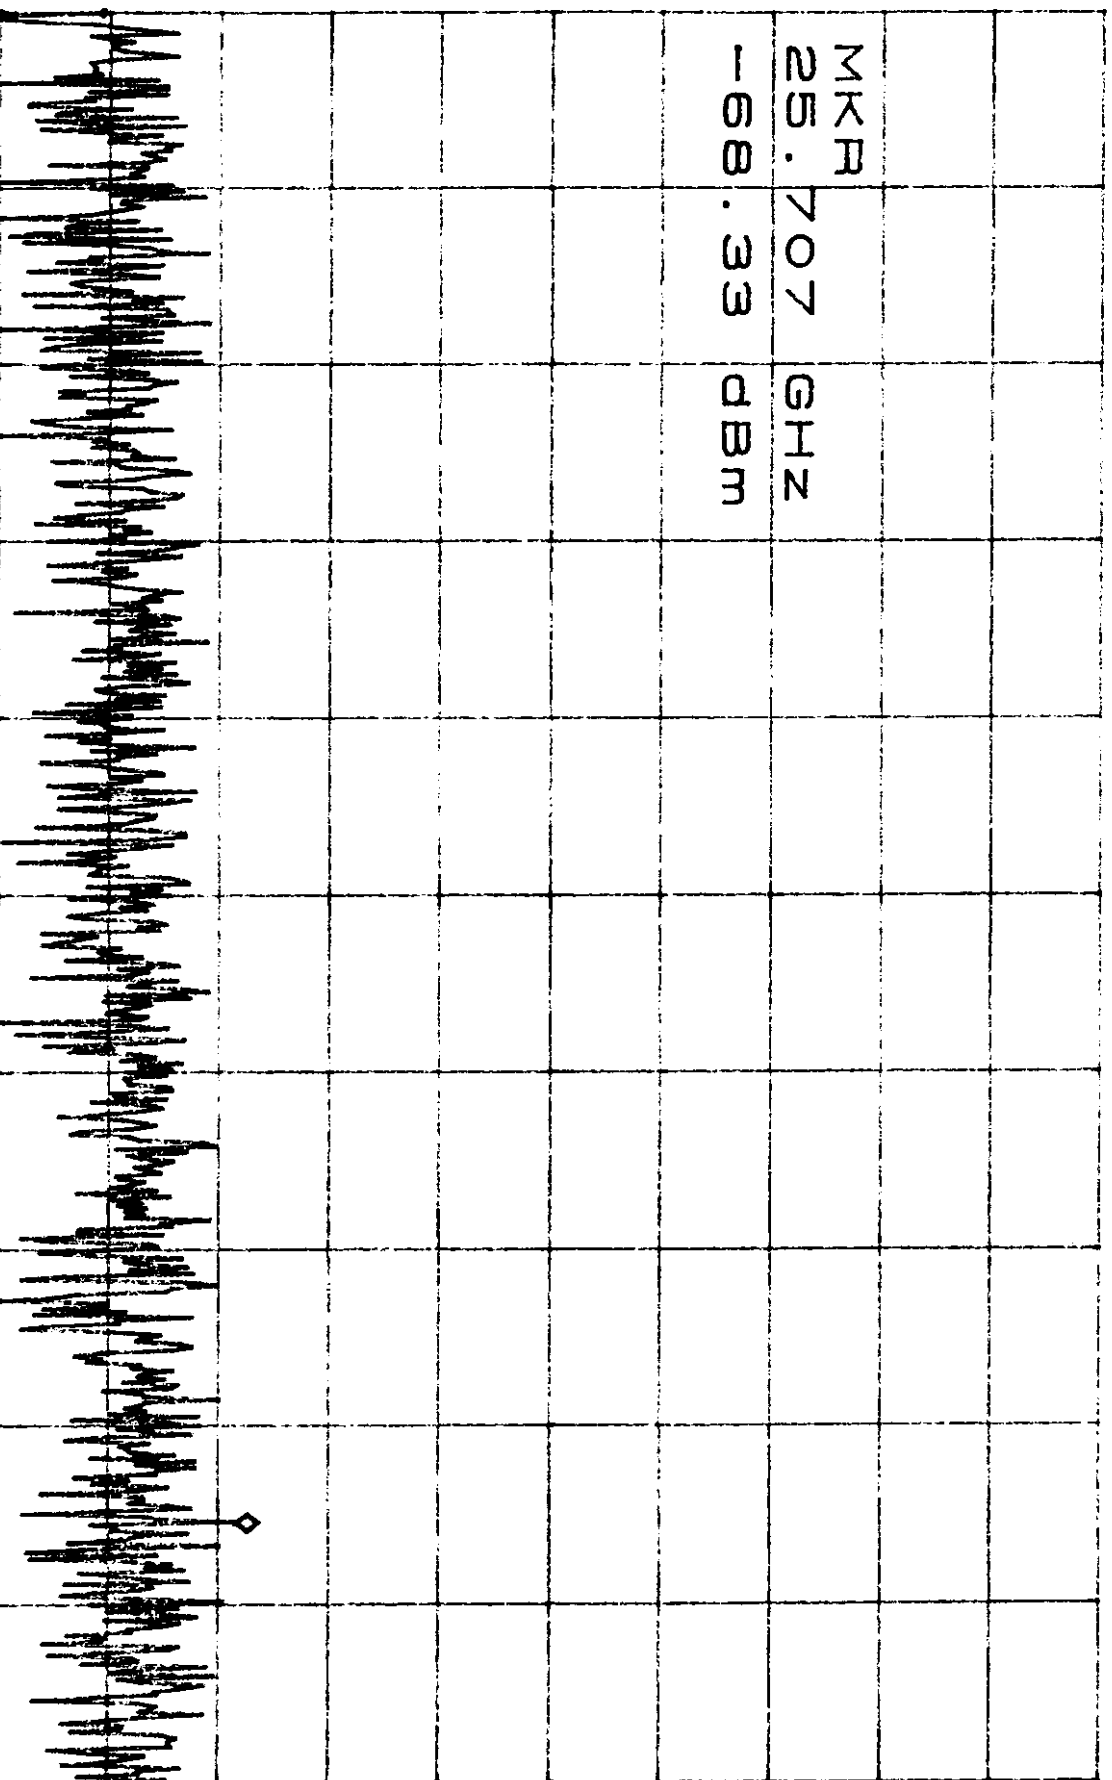

START 24.000GHz

STOP 26.000GHz

*RBW 30KHz

*VBW 30KHz

*SWB E 50000

EPCET 003

1.5

ATTEN 20dB


MKR -72.17dBm

RL 10.0dBm

10dB/

1.826GHz

MKR
1.826 GHz
D
-72.17 dBm

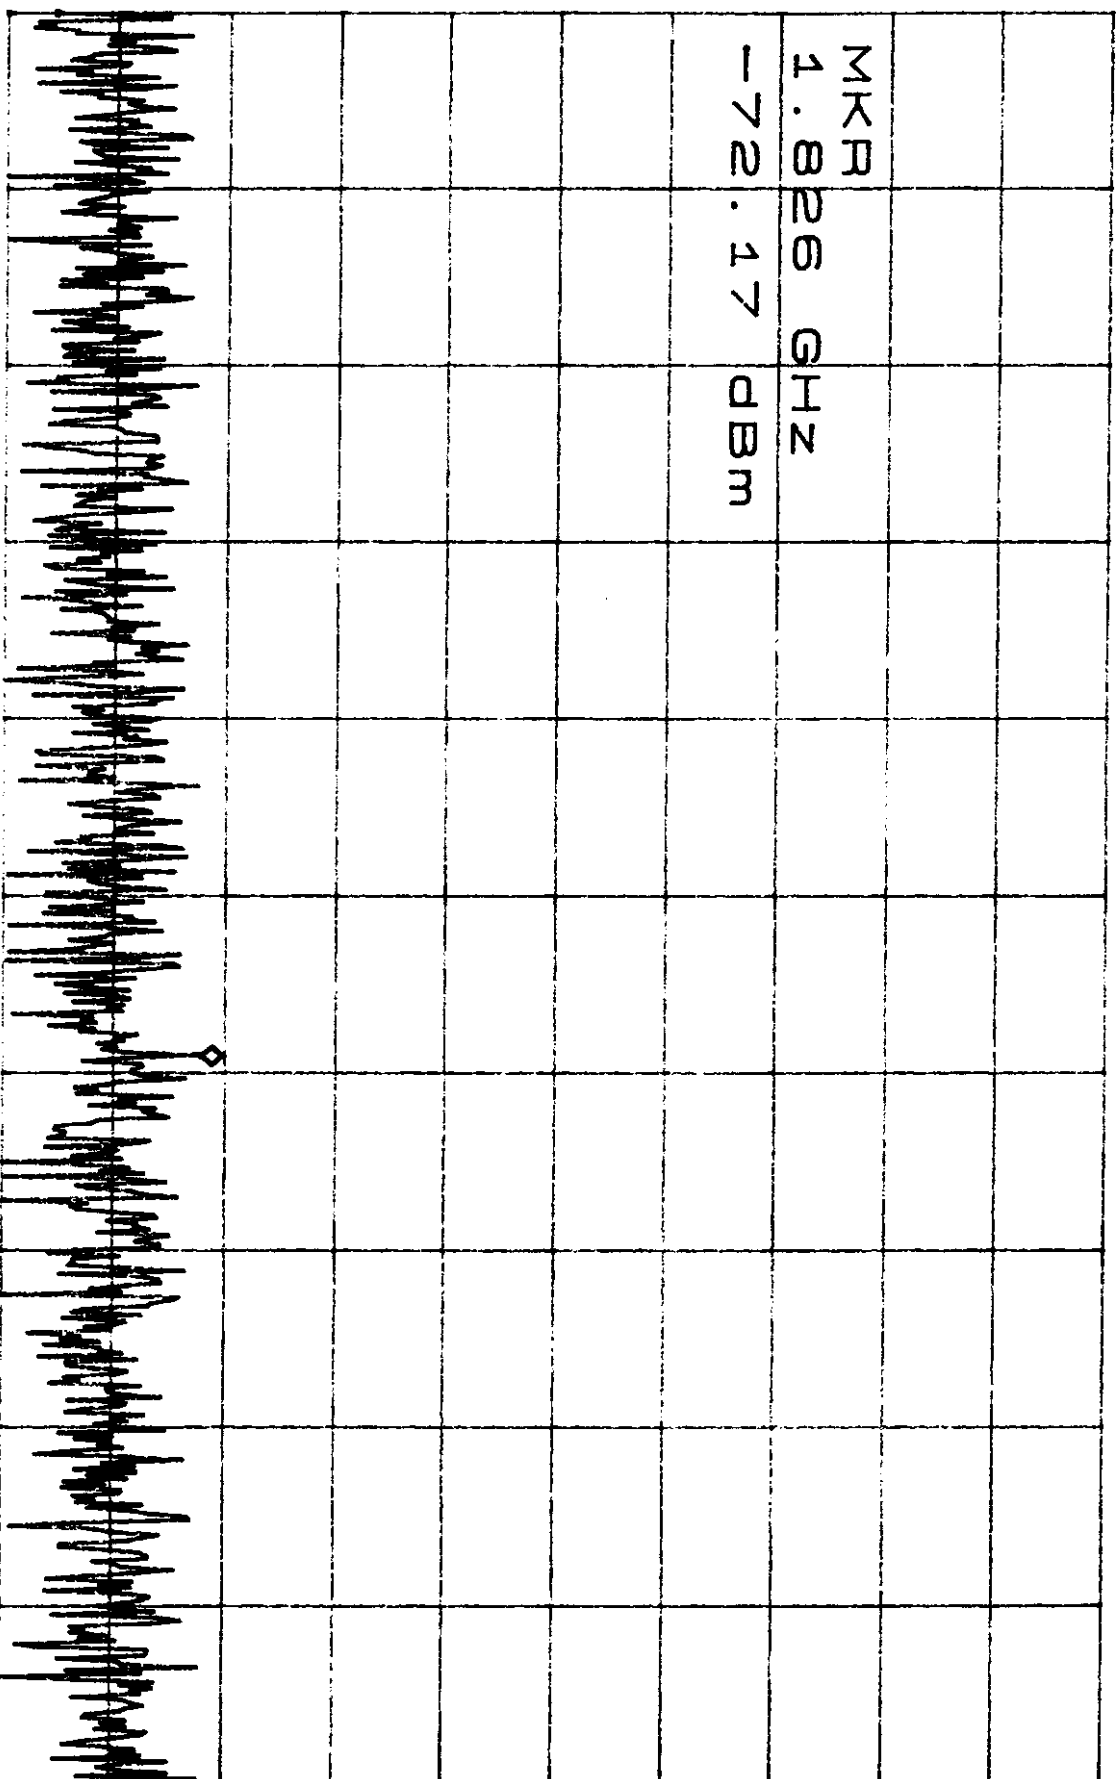

START 1.000GHz


STOP 2.400GHz

ENET 003

5.5

ATTEN 20dB
RL 10.0dBm
10dB/
MKR -71.83dBm
8.273GHz

MKR
8.273 GHz
-71.83 dBm
D

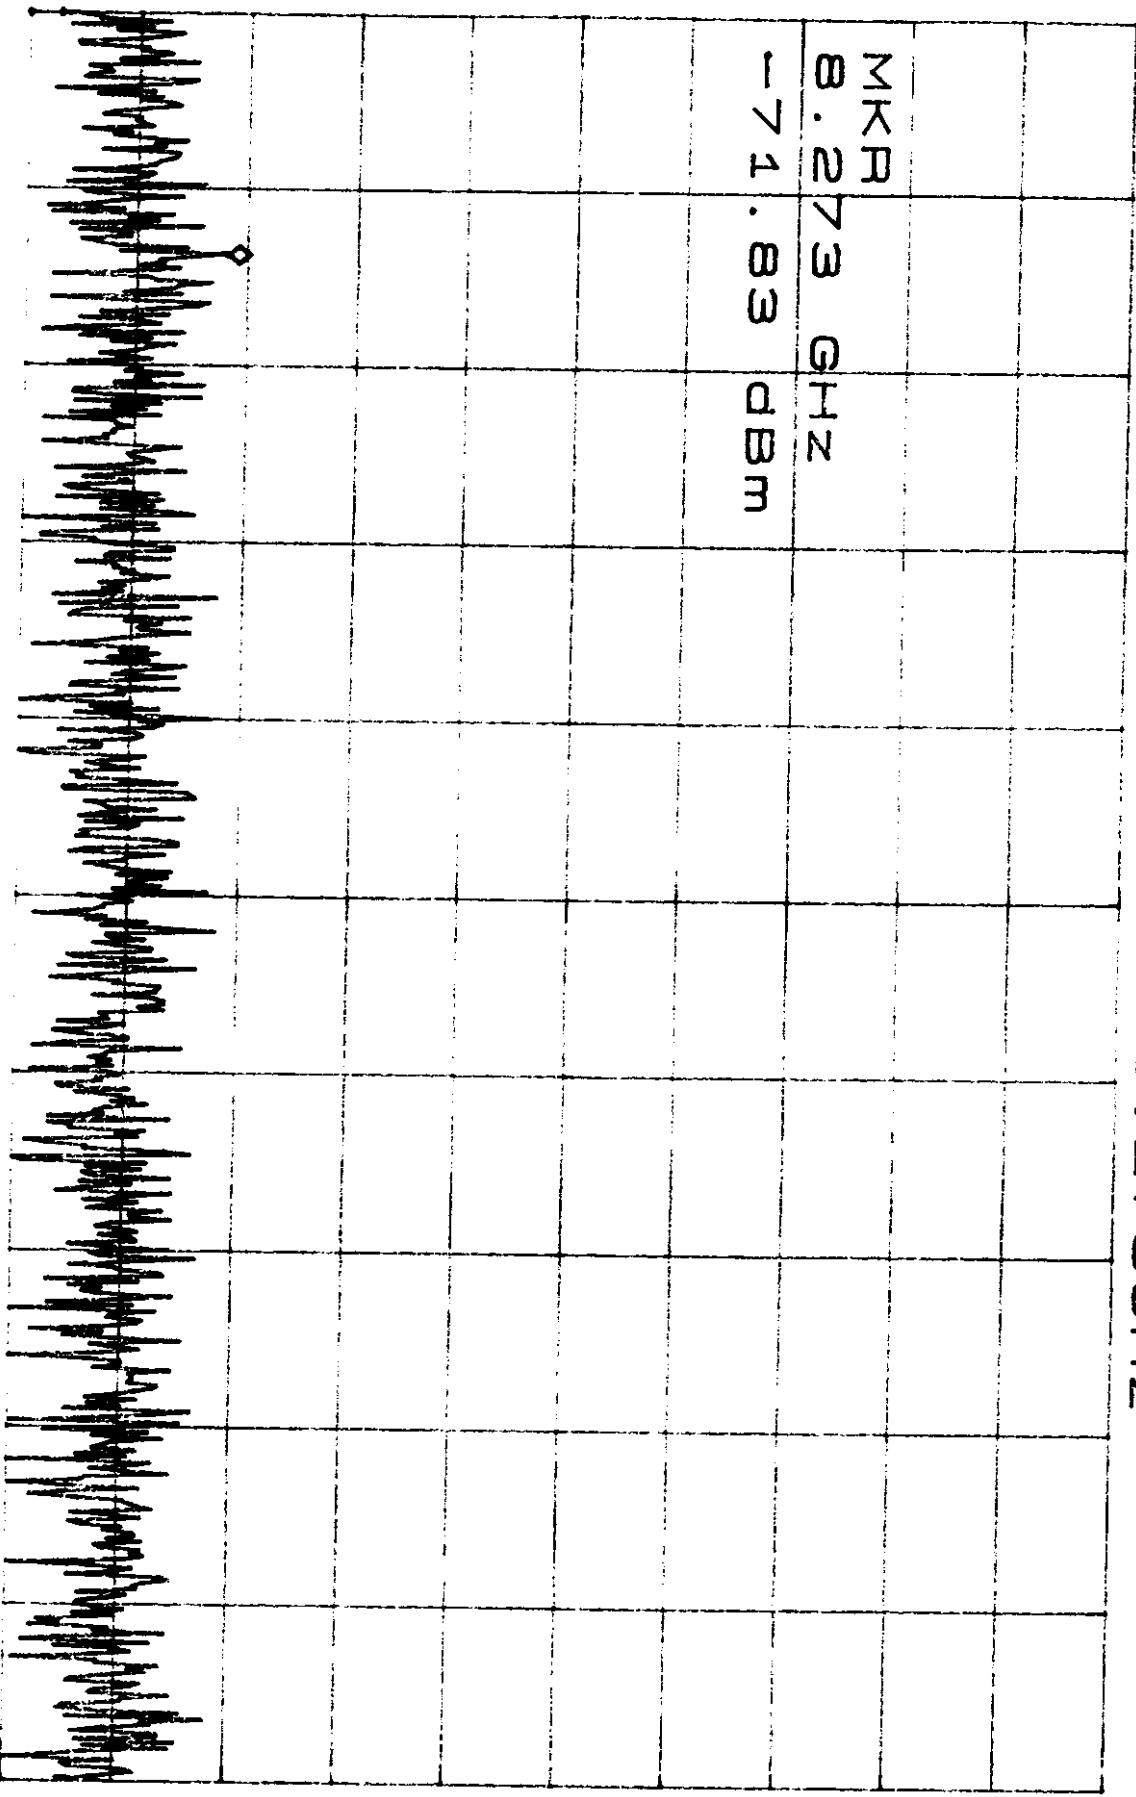

START 8.000GHz
STOP 10.000GHz
RBW 30kHz
VBW 30kHz

TRANSMISSION TIME
ENET → POLETOP

ATTEN 10dB
RL 0dBm

10dB/

MKR -1.00dB


MKR
-46.7 ns
-1.00 dB

46.7ms

CENTER 923.040000MHZ

SPAN 0HZ

*RBW 30KHZ VBW 30KHZ XSWP 4000000

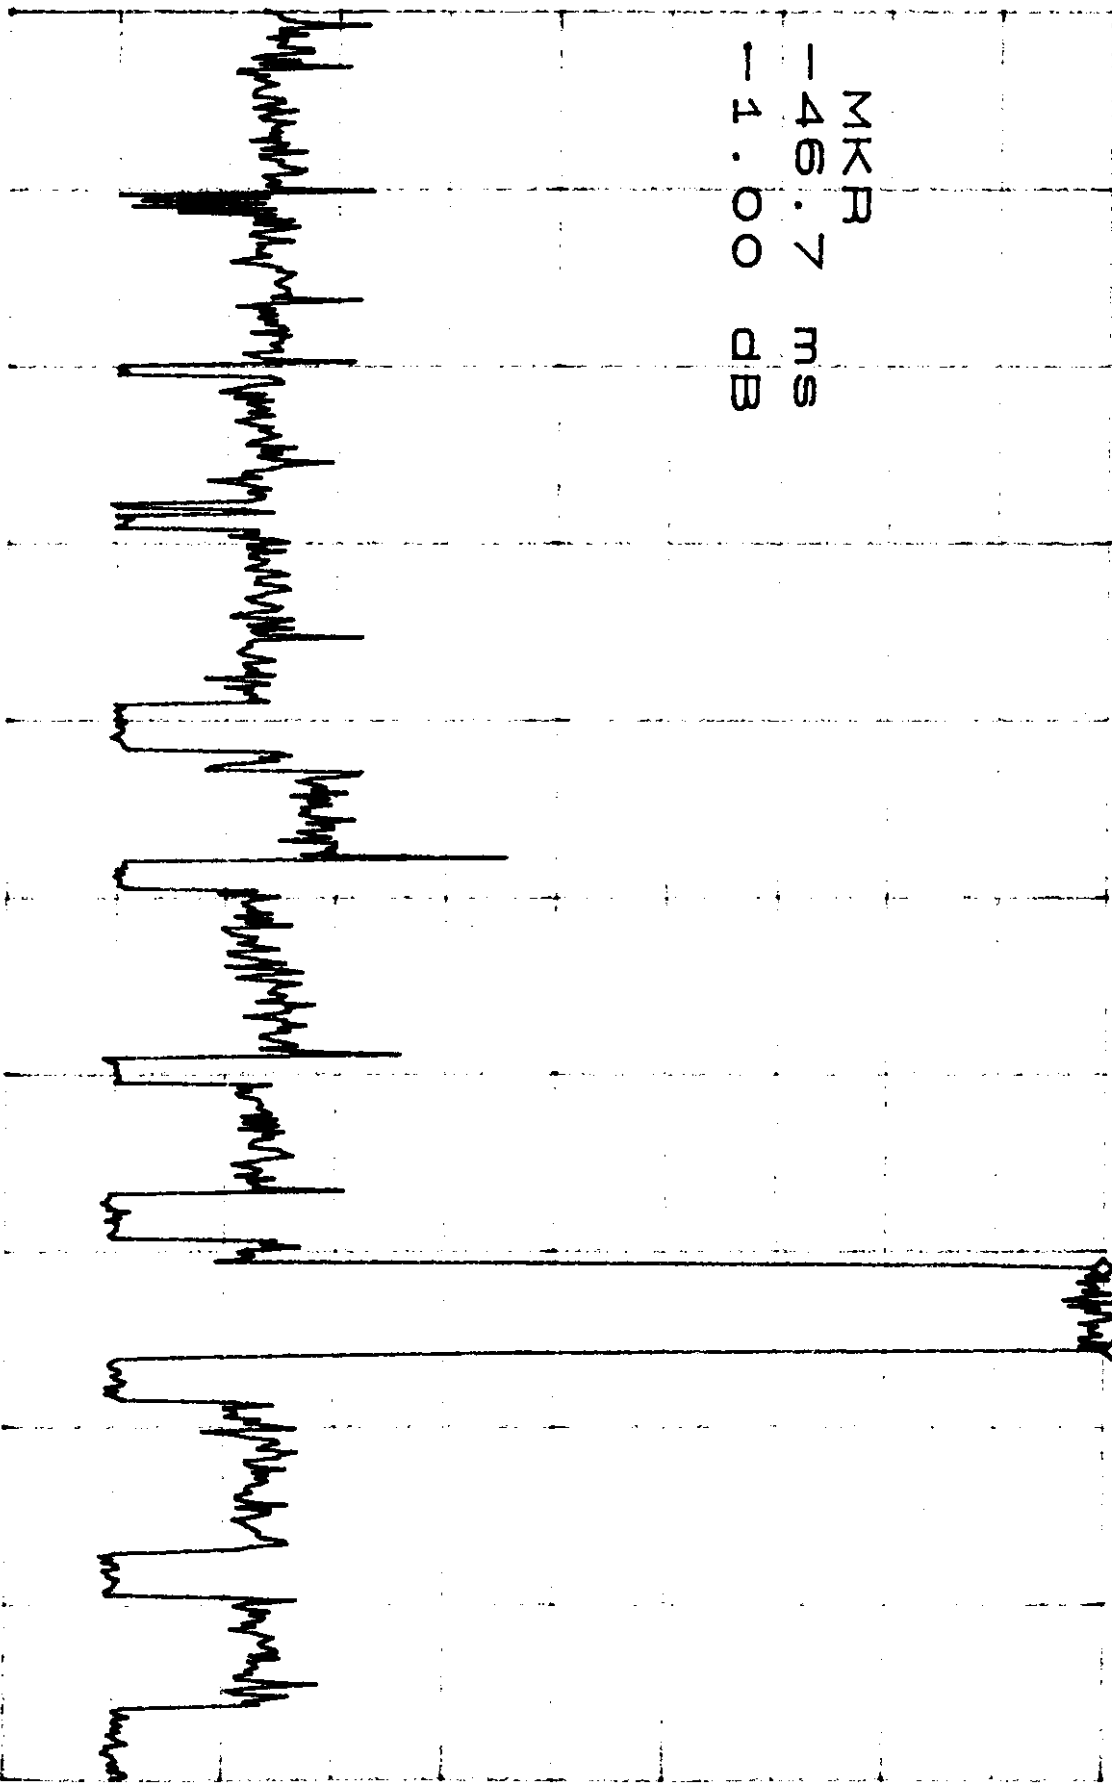


TRANSMISSION TIME
ETHERNET TO NETWORK

ATTEN 10dB
RL 0dBm

10dB/
MKR 6.83dB
-19.430ms

MKR
-19.430 ms
6.83 dB

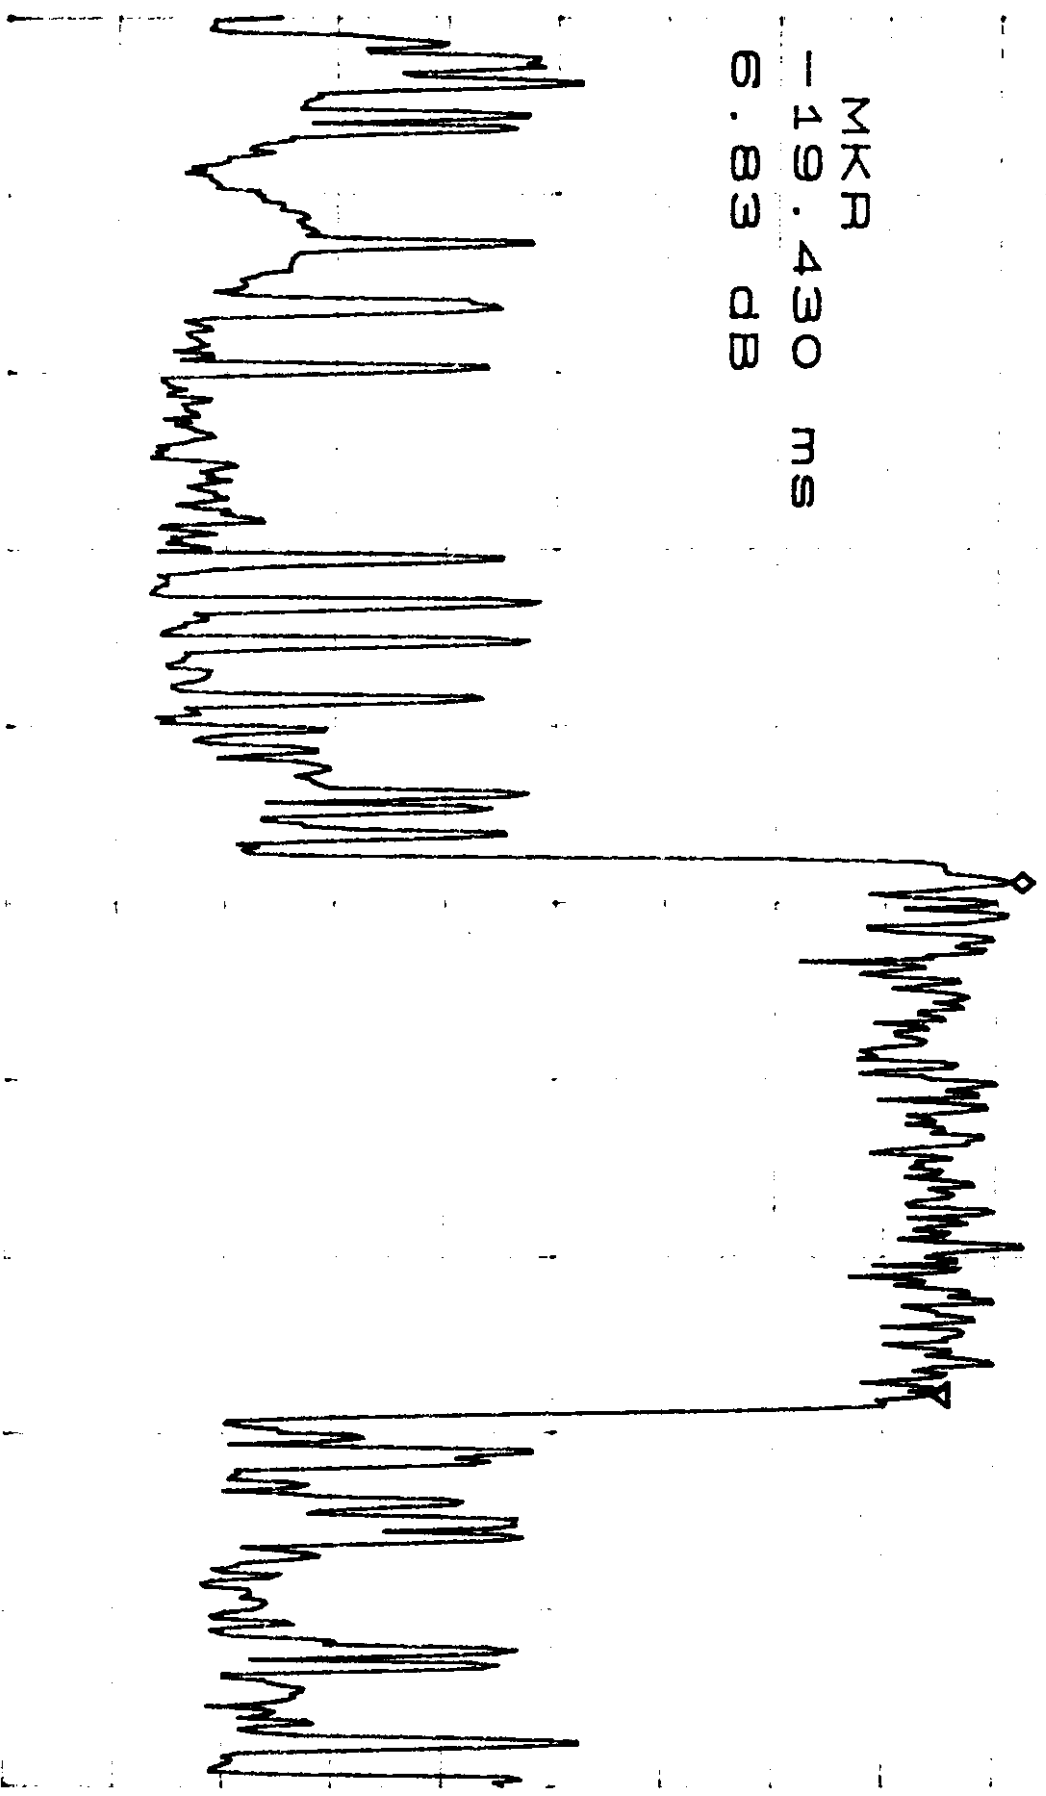

CENTER 2.444160000GHZ SPAN 0HZ
*RBW 3.0KHZ VBW 3.0KHZ SWP 67.0ms

TRANSMISSION TIME
ETHERNET → MODEM

ATTEN 10dB


RL 0dBm

10dB/

46.7ms

MKR 1.17dB

MKR
46.7 ns
1.17 dB

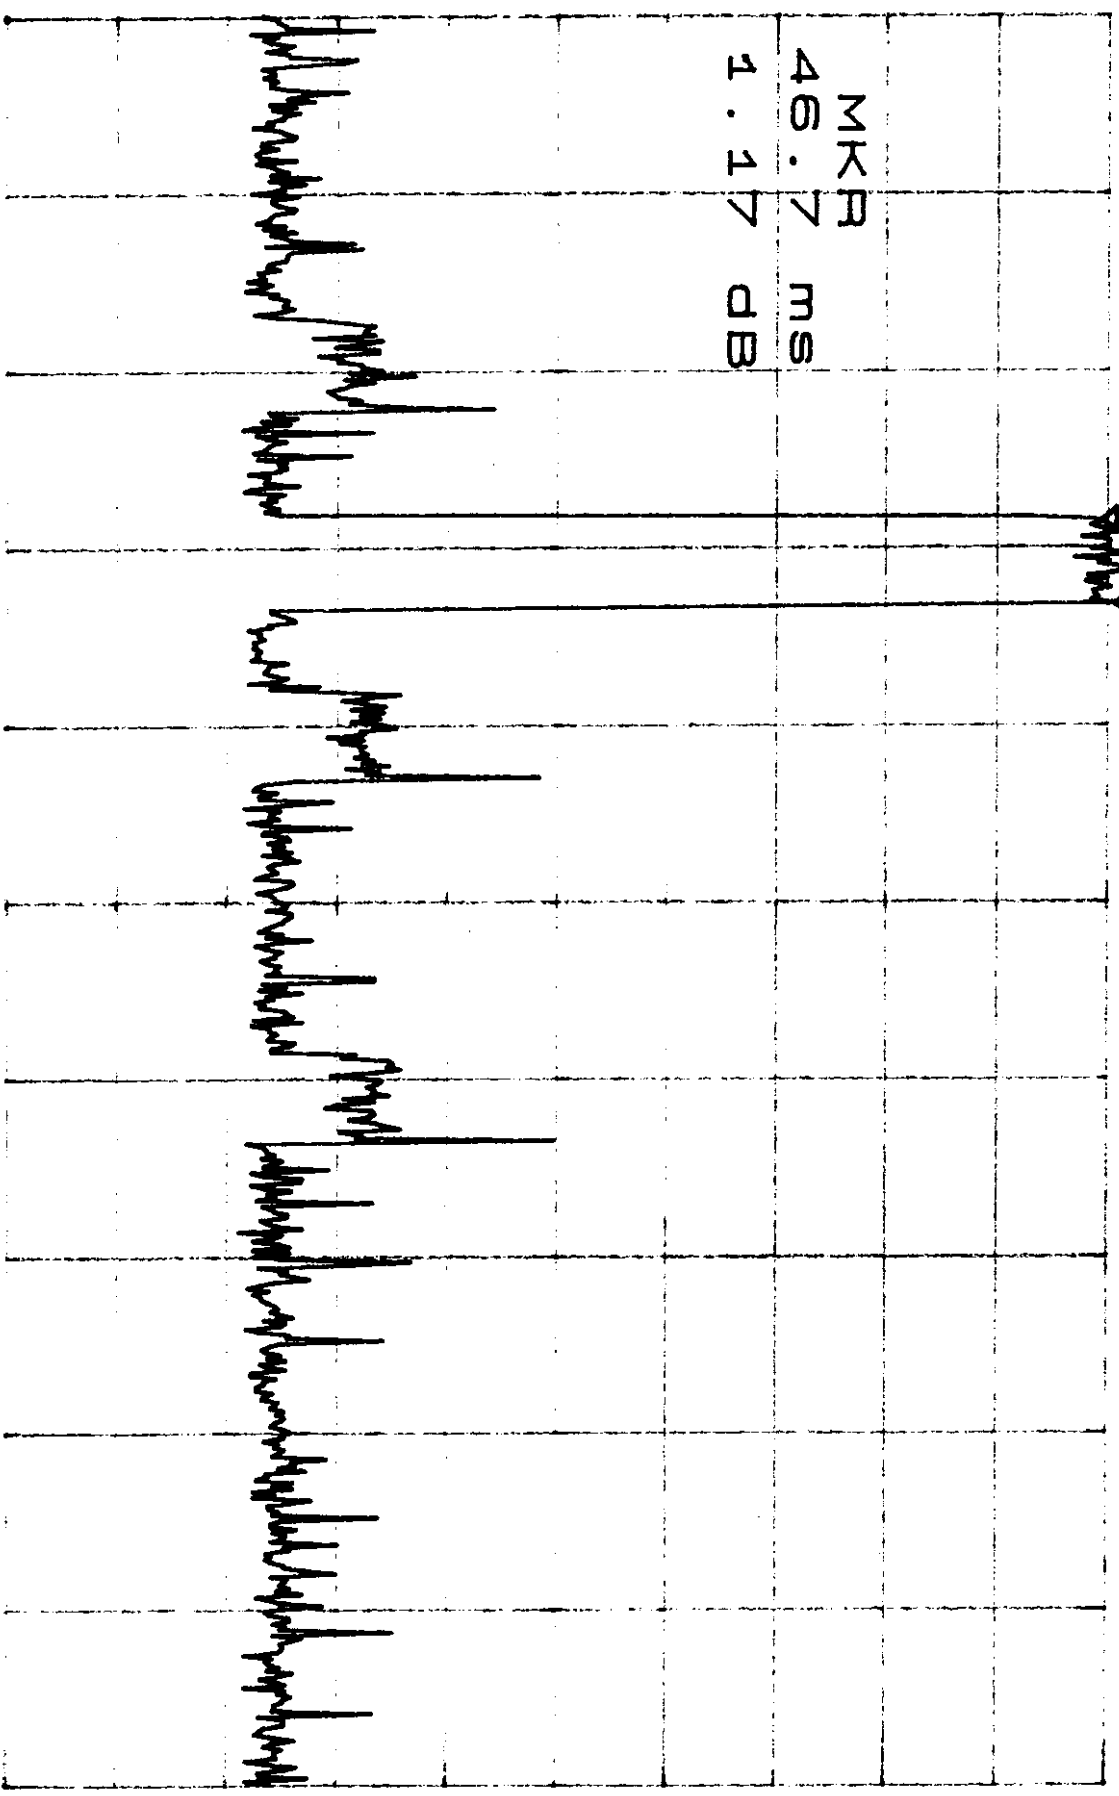

CENTER 920.160000MHZ

SPAN 0HZ

*RBW 3.0KHZ

VBW 3.0KHZ

*SWP 1.00sec

ATTEN 10dB
RL 0dBm


140.0 MHz
-3.50 dB

10dB/

TRANSMISSION TIME
NETDOPK → EITERNET RADIO
900MHz
MKR -3.50dB
-40.0ms

CENTER 923.040000MHz
*BBW 1 0KHz

SPAN 0Hz

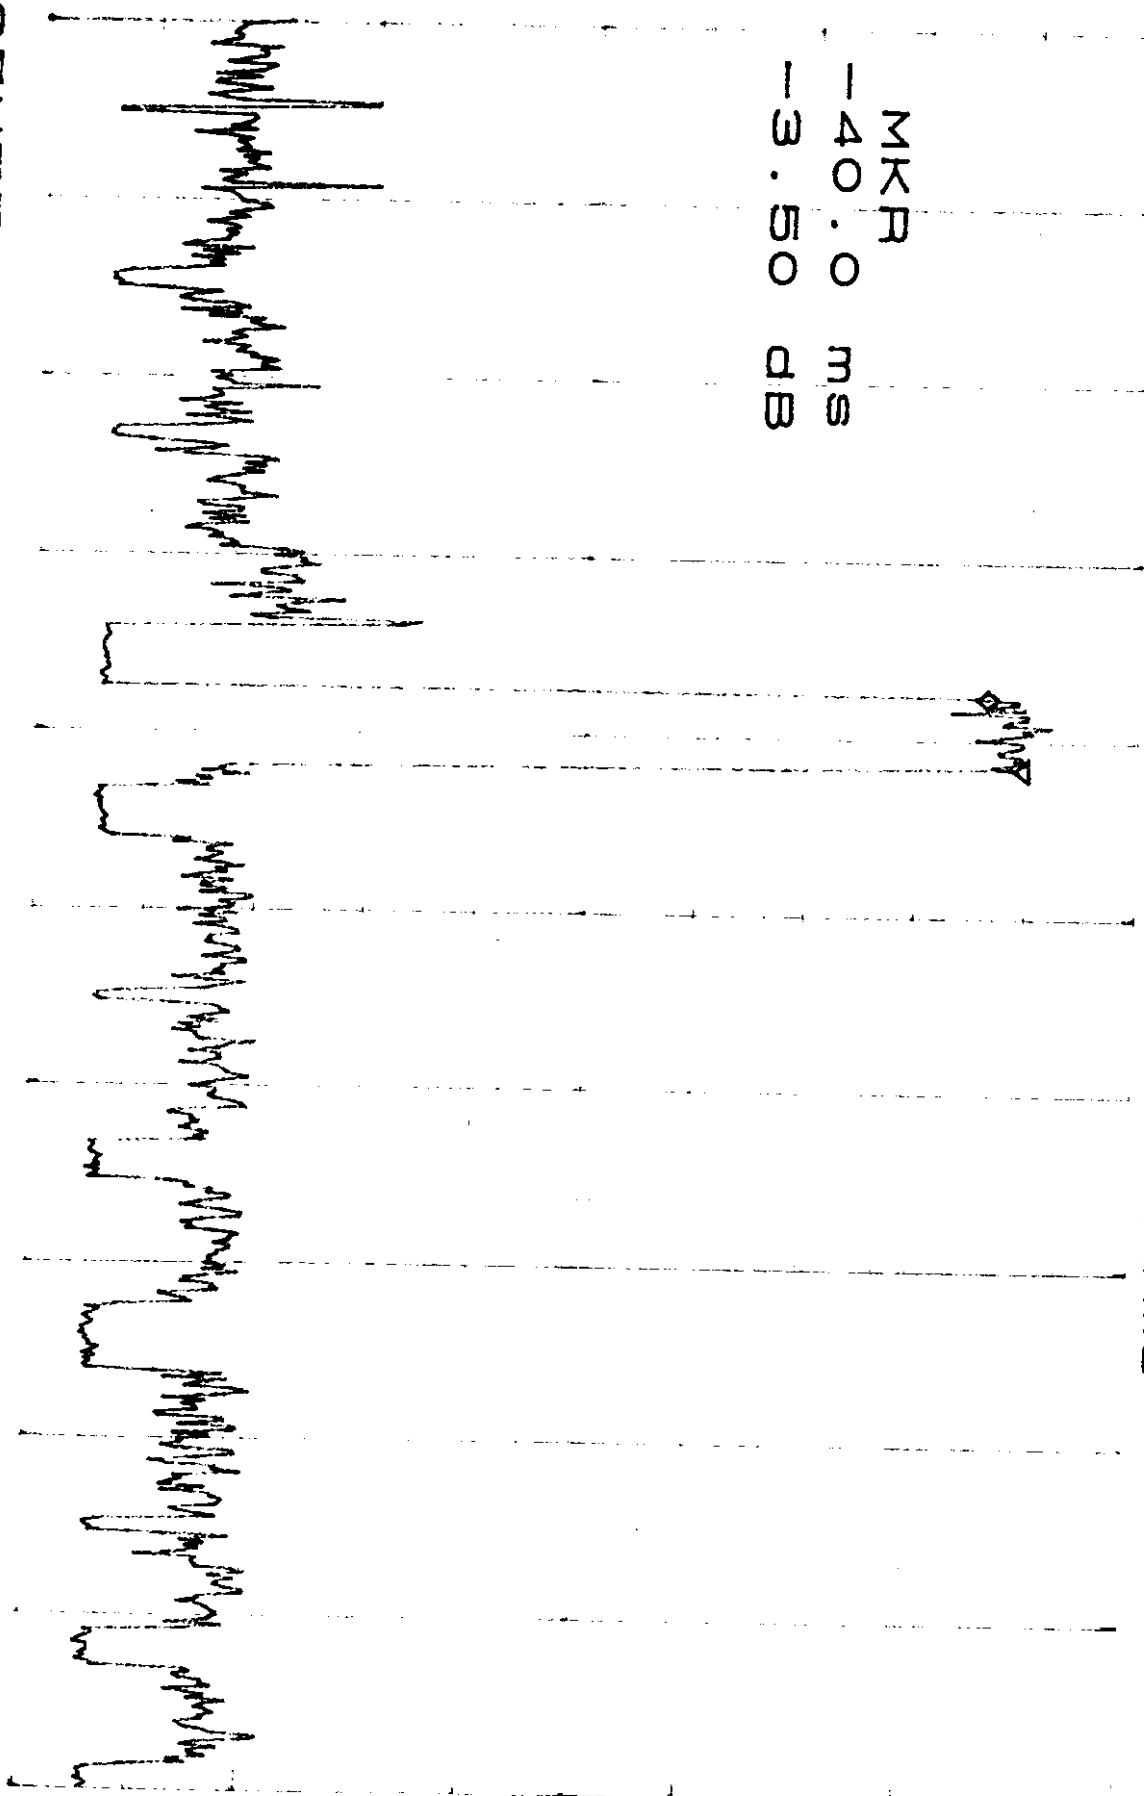

ATTEN 40dB


PL 0dBm

10dB/

10.988ms

TRANSMISSION TIME
HETEROZK RADIO → FETTERNET RADIO
3.4G
MKR - 0.17dB

40
30
20
10
0

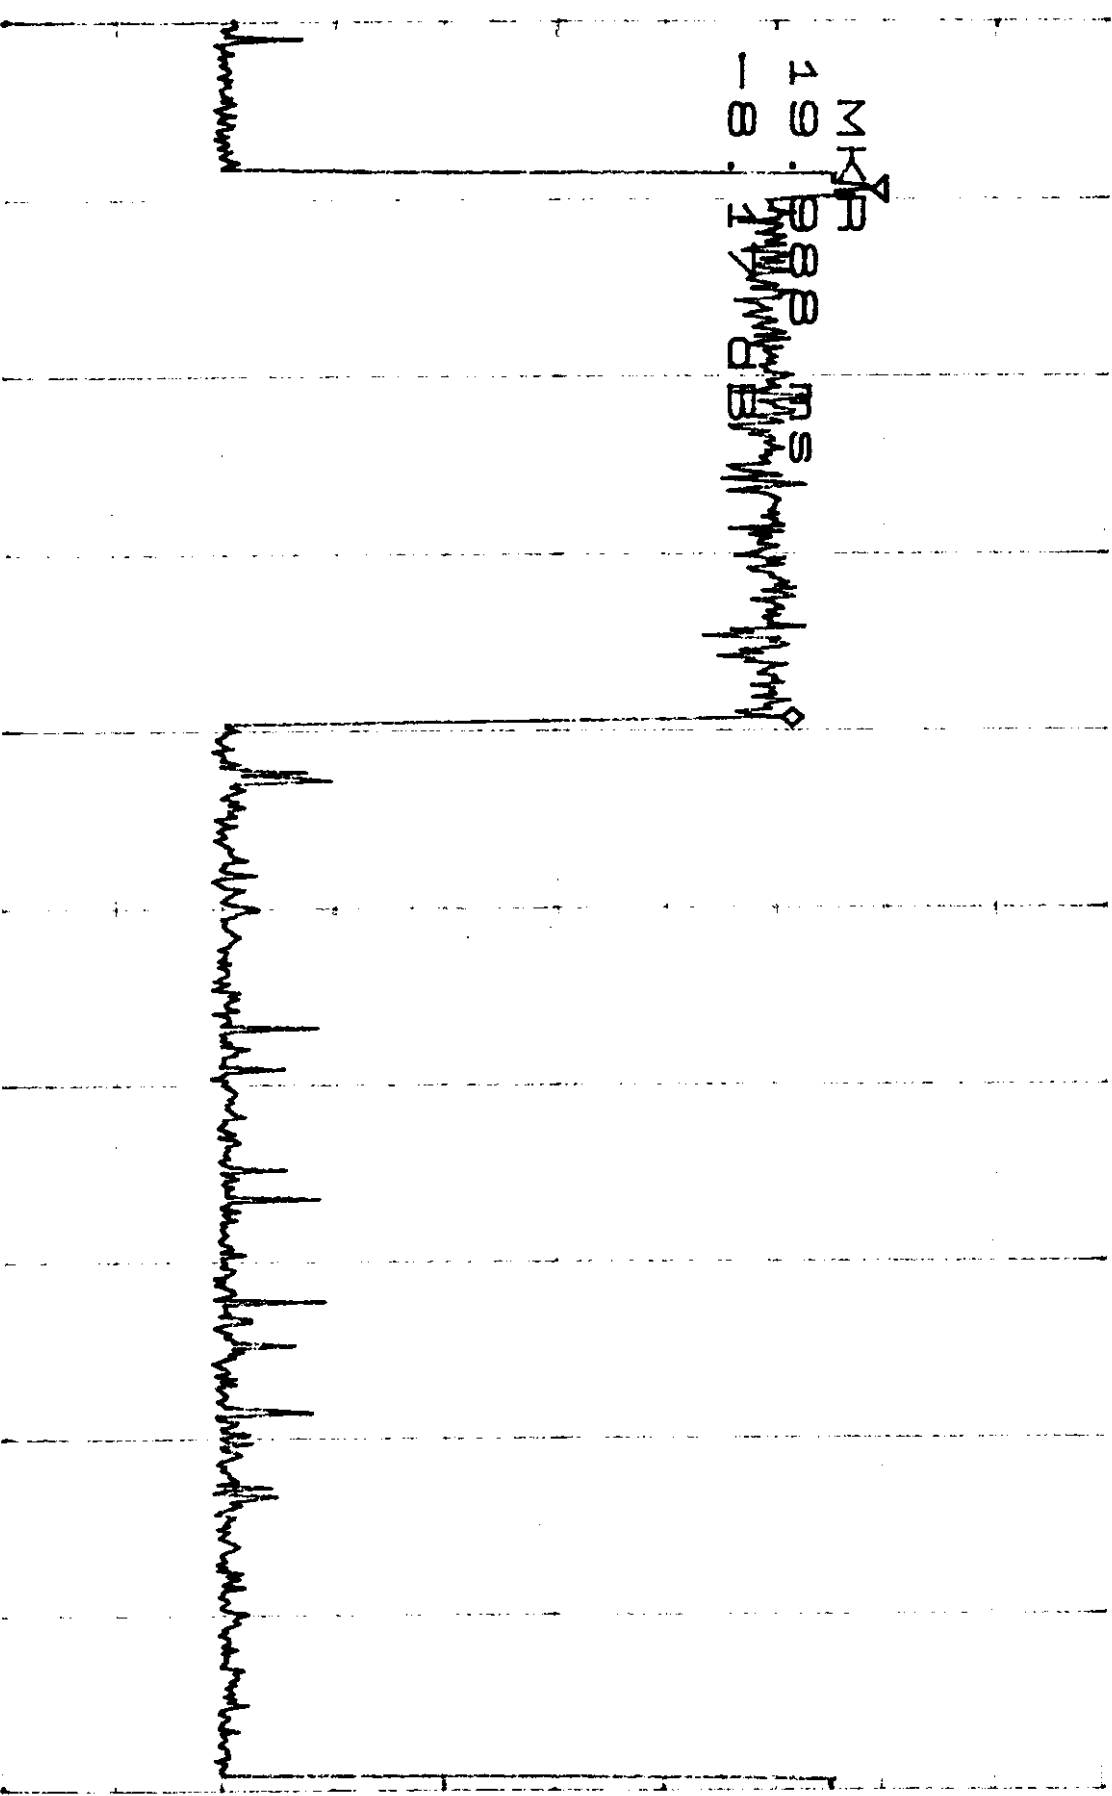

CENTER 2.444160000GHZ

SPAN 0HZ

*BW 30KHZ

VBW 30KHZ

SMB 67 OMS

ATTEN 10dB


RL 0dBm

10dB/

41.7ms

TRANSMISSION TIME
POLETOP TO NOISE
400MHz $\pi/4$ ASV
MKR -2.17dB

41.7ms
2.17dB

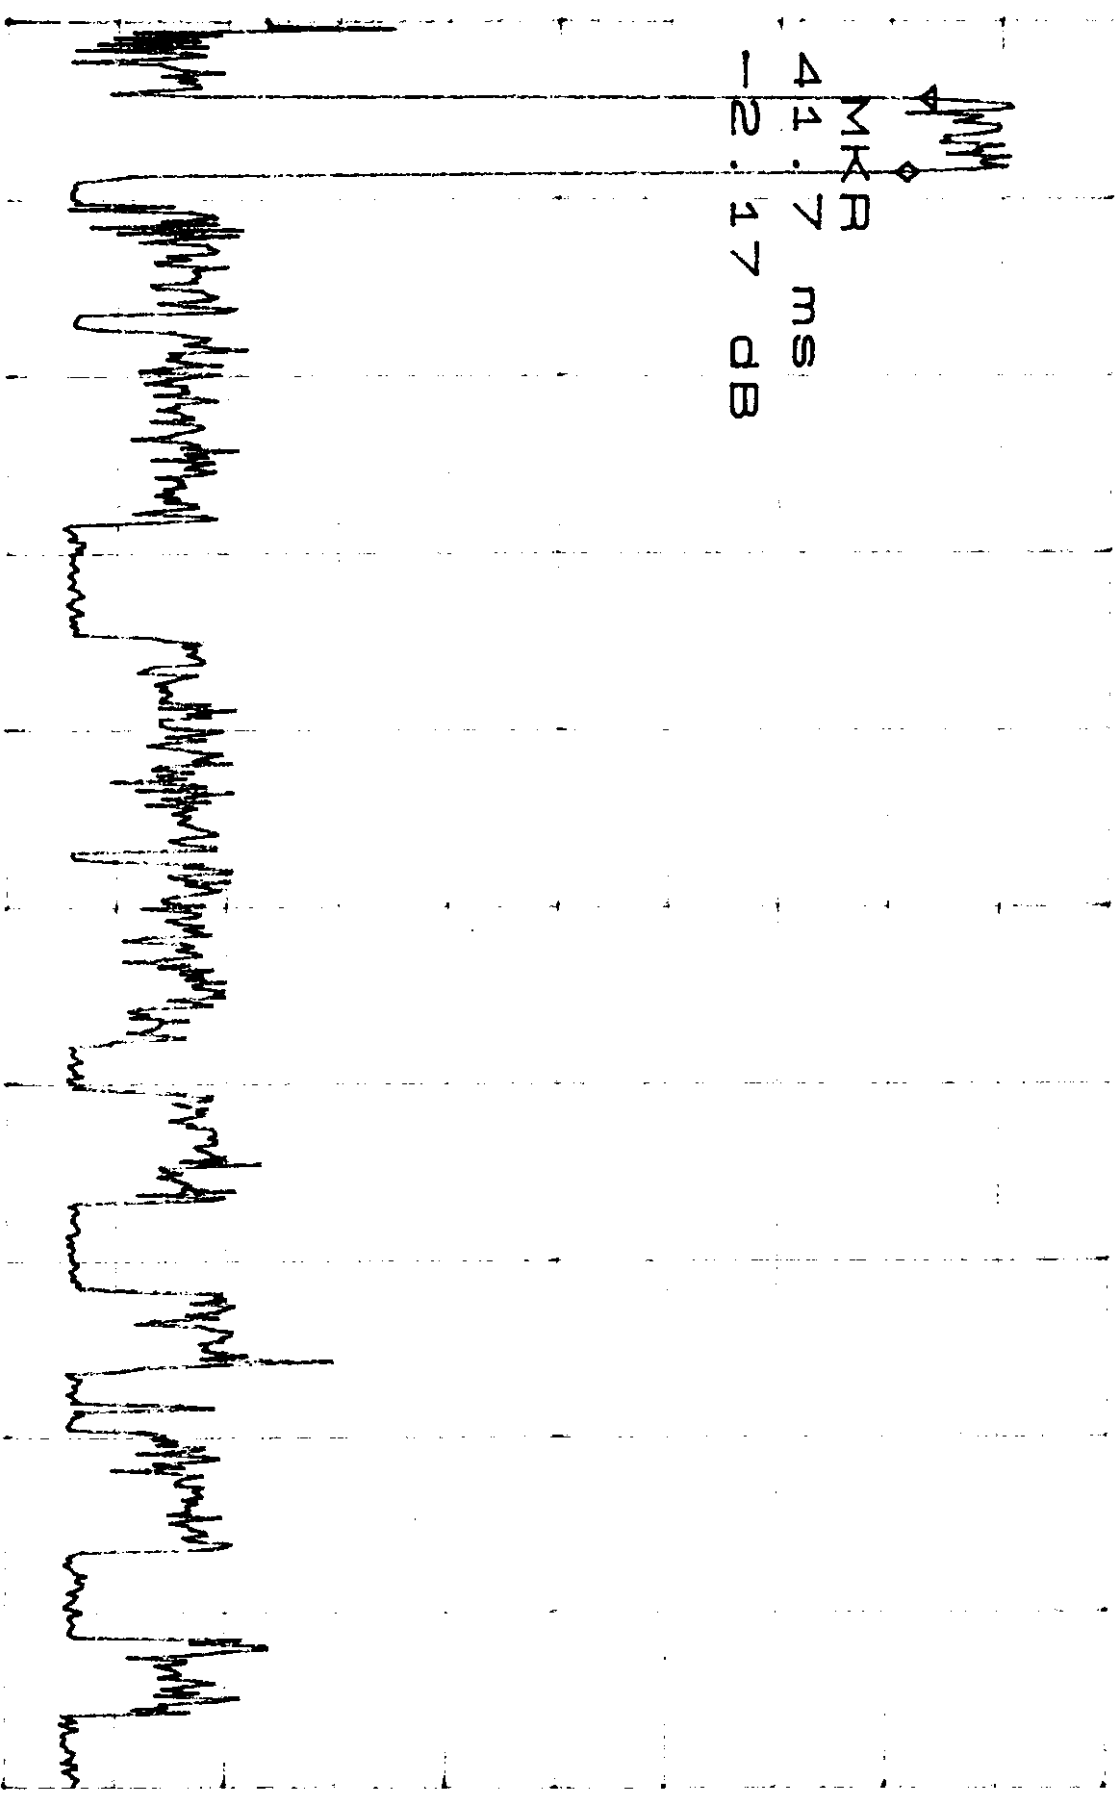

CENTER 923.040000MHZ

SPAN 0HZ

*RBW 1.0KHZ

VBW 1.0KHZ

*SWP 1.00Sec