

Project No:  
Report No.:

TM-2307000038P  
TMWK2307002181KR

FCC ID: GQO-DPD1334V2

Page 1 / 32  
Rev. 04

## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

**13.3" LCD w/Wireless Charger Module**

**Model: DPD1334-STQ-Q06, DPD1334-STQ-Q04**

**Trade Name: Litemax**

Issued to

**Litemax Electronics Inc.  
6F-1, No. 131, Lane 235, Baoqiao Rd., Xindian Dist., New Taipei City, Taiwan 23145**

Issued by

**Compliance Certification Services Inc.  
Wugu Laboratory  
No.11, Wugong 6th Rd., Wugu Dist.,  
New Taipei City, Taiwan  
Issued Date: September 21, 2023**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	August 16, 2023	Initial Issue	ALL	Allison Chen
01	September 6, 2023	See the following Note Rev.(01)	P.5, 7, 12-14, 18	Allison Chen
02	September 13, 2023	See the following Note Rev.(02)	P.5	Allison Chen
03	September 19, 2023	See the following Note Rev.(03)	P.6, 17-20, 32-33	Allison Chen
04	September 21, 2023	See the following Note Rev.(04)	P.14, 17, 21-24	Allison Chen

**Note:****Rev.(01)**

1. Modify model discrepancy, serial number, modulation information and description in section 2.
2. Modify description in section 4.2, support equipment in section 6.2.
3. Modify test procedure description and test plot in section 7.1 and test person in section 7.2

**Rev.(02)**

1. Modify description in section 2.

**Rev.(03)**

1. Modify summary description in section 3 and antenna polarization description in section 7.2.
2. Modify ac conducted emission test data in section 7.3.

**Rev.(04)**

1. Modify operating frequency range in section 7.1 and antenna polarization description in section 7.2.

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION.....</b>	<b>5</b>
<b>3. TEST SUMMARY.....</b>	<b>6</b>
<b>4. TEST METHODOLOGY.....</b>	<b>7</b>
4.1 EUT CONFIGURATION .....	7
4.2 EUT EXERCISE .....	7
4.3 GENERAL TEST PROCEDURES .....	7
4.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	8
4.5 DESCRIPTION OF TEST MODES.....	9
<b>5. INSTRUMENT CALIBRATION.....</b>	<b>10</b>
5.1 MEASURING INSTRUMENT CALIBRATION.....	10
5.2 MEASUREMENT EQUIPMENT USED.....	10
5.3 MEASUREMENT UNCERTAINTY .....	11
5.4 FACILITIES AND TEST LOCATION.....	11
<b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>12</b>
6.1 SETUP CONFIGURATION OF EUT.....	12
6.2 SUPPORT EQUIPMENT.....	12
<b>7. TEST REQUIREMENTS.....</b>	<b>13</b>
7.1 20DB BANDWIDTH.....	13
7.2 TRANSMITTER RADIATED EMISSION.....	15
7.3 AC CONDUCTED EMISSION.....	25
7.4 COIL RULERS AND SPECIFICATIONS .....	32
<b>APPENDIX A PHOTOGRAPHS OF TEST SETUP .....</b>	<b>A-1</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	

## 1. TEST RESULT CERTIFICATION

**Applicant:** Litemax Electronics Inc.  
6F-1, No. 131, Lane 235, Baoqiao Rd., Xindian Dist., New  
Taipei City, Taiwan 23145

**Manufacturer:** Litemax Electronics Inc.  
6F-1, No. 131, Lane 235, Baoqiao Rd., Xindian Dist., New  
Taipei City, Taiwan 23145

**Equipment Under Test:** 13.3" LCD w/Wireless Charger Module

**Trade Name:** Litemax

**Model:** DPD1334-STQ-Q06, DPD1334-STQ-Q04

**Date of Test:** July 11~September 21, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15.209	Compliance
Statements of Conformity	
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.	


### We hereby certify that:

All test results conform to above mentioned standards.

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part15.203, Part15.207, Part15.209. Part15.215.

The test results of this report relate only to the tested sample EUT identified in this report.

### Approved by:

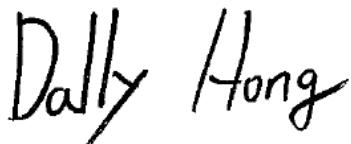

Dally Hong  
Sr. Engineer  
Compliance Certification Services Inc.

## 2. EUT DESCRIPTION

<b>Product</b>	13.3" LCD w/Wireless Charger Module	
<b>Trade Name</b>	Litemax	
<b>Model Number</b>	DPD1334-STQ-Q06, DPD1334-STQ-Q04	
<b>Model Discrepancy</b>	Model No.:	
	DPD1334-STQ-Q06	DPD1334-STQ-Q04
	Panel Trad Name:	
	13.3 inch BOE Panel, HOLYGO Wireless Charger	
	PCT Touch 229.5x730 mm	PCT Touch 229.5x648.5 mm
<b>Received Date</b>	July 5, 2023	
<b>Power Supply</b>	Power from Adapter. (Not for sell) CWT / KPL-040F-VI I/P: 100-240Vac, 1.7A, 50-60Hz O/P: 12Vdc, 3.33A, 40.0W	
<b>Frequency Band</b>	112 ~ 145 kHz	
<b>Antenna Specification</b>	Antenna Type: Coil Brand: HOLYGO CORPORATION CO, LTD Model: HL-10W-C	
<b>EUT serial #</b>	DPD1334-STQ-Q06: D1334STQ23180002 DPD1334-STQ-Q04: D1334STQ23180004	
<b>Modulation information</b>	FSK	

**Remark:**

1. For more details, refer to the User's manual of the EUT.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.
3. Disclaimer: Variant information between/among model numbers / trademarks are provided by the applicant, test results of this report are applicable to the sample EUT received of main test model name.

### 3. TEST SUMMARY

Standard Sec.	Chapter	Test Item	Result
15.215	7.1	20dB Bandwidth	Pass
15.209	7.2	Transmitter Radiated Emission	Pass
15.207	7.3	AC Power-line Conducted Emission	Pass
15.203	7.4	Coil Rulers and Specifications	Pass

Remark: Permanent coil antenna and an unique coupler to intentional radiator, meet the 15.203 requirement

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Mains Power Port (150kHz-30MHz)	47 CFR Part 15, Subpart C	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions (30MHz-1GHz)		ANSI C63.10 (2013) Section 6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Emissions (9kHz-30MHz)		ANSI C63.10 (2013) Section 6.4	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
20dB Bandwidth		ANSI C63.10 (2013) Section 6.9.2	47 CFR Part 15, Subpart C 15.215	Pass

## 4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 , ANSI C63.4 2014 and FCC CFR 47 Part 15.203, 15.207.15.209,15.215.

### 4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT EXERCISE

Place a load in the wireless charging area to enable it to fix the TX frequency for measurement purposes.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.207.15.209, 15.215 under the FCC Rules Part 15 Subpart C and ANSI C63.10: 2013.

### 4.3 GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in ANSI C63.10: 2013, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz was using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. The EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013.

**4.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS**

(a) Except as shown in other rules, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided by other rules, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

#### 4.5 DESCRIPTION OF TEST MODES

The EUT (model: DPD1334-STQ-Q06) had been tested under operating condition.

<b>Radiated Emission Measurement Below 1G</b>	
<b>Test Condition</b>	<b>Radiated Emission Below 1G</b>
<b>Power supply Mode</b>	<b>Mode 1: EUT power by Adapter (Model: DPD1334-STQ-Q06)</b> <b>Mode 2: EUT Power by Adapter (Model: DPD1334-STQ-Q04)</b>
<b>Worst Mode</b>	<input checked="" type="checkbox"/> Mode 1 <input checked="" type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report

<b>AC Power Line Conducted Emission</b>	
<b>Test Condition</b>	<b>AC Power line conducted emission for line and neutral</b>
<b>Power supply Mode</b>	<b>Mode 1: EUT power by Adapter (Model: DPD1334-STQ-Q06)</b> <b>Mode 2: EUT Power by Adapter (Model: DPD1334-STQ-Q04)</b>
<b>Worst Mode</b>	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Remark:

1. The worst mode was record in this test report.
2. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

## 5. INSTRUMENT CALIBRATION

### 5.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 5.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
EXA Signal Analyzer	Keysight	N9010B	MY60242460	2023-02-02	2024-02-01
Loop Probe	LANGER EMV-TECHNIK	RF-R 50-1	02-2644	2023-01-13	2024-01-12
Software	N/A				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
PXA Signal Analyzer	Keysight Technologies	N9030B	MY62291089	2022-10-14	2023-10-13
Loop Antenna	COM-POWER	AL-130	121051	2023-05-23	2024-05-22
Preamplifier	EMEC	EM330	060609	2023-02-22	2024-02-21
Thermo-Hygro Meter	WISEWIND	1206	D07	2022-12-19	2023-12-18
Bi-Log Antenna	Sunol Sciences	JB3	A030105	2022-08-03	2023-08-02
Cable	Huber+Suhner	104PEA	20995+21000+182330	2023-02-22	2024-02-21
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Software	e3 V9-210616c				

AC power line Conduction Test Room					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
EMI Test Receiver	R&S	ESCI	100064	2023-06-07	2024-06-06
LISN	TESEQ	LN2-16N	22012	2023-03-08	2024-03-07
Cable	EMCI	CFD300-NL	CERF	2023-06-27	2024-06-26
Software	N/A				

**Remark:**

1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R. = No Calibration Required.

### 5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	± 2.213 dB
Channel Bandwidth	± 2.7 %
Radiated Emission_9kHz-30MHz	± 3.761 dB
Radiated Emission_30MHz-200MHz	± 3.473 dB
Radiated Emission_200MHz-1GHz	± 3.946 dB

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 5.4 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan.  
 No. 12, Ln. 116, Wugong 3rd Rd., Wugu Dist., New Taipei City, Taiwan.

CAB identifier: TW1309

Test site	Test Engineer	Remark
AC Conduction Room	Tony Chao	-
Radiation	Ray Li	-
Conducted	David Li	-

**Remark:** The lab has been recognized as the FCC accredited lab. under the KDB 974614 D01 and is listed in the FCC public Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309

## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1	Load	EESON	RX full-function test module 3rd generation	TSSF2308000434 B0	N/A

#### Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


## 7. TEST REQUIREMENTS

### 7.1 20DB BANDWIDTH

#### Definition

According to FCC Part 15.215 (c) ,Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### Test Configuration

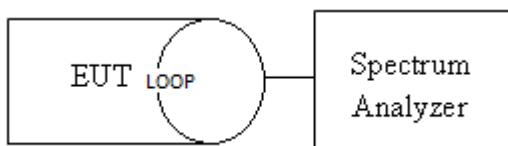

## TEST PROCEDURE

The Loop antenna connected to the spectrum analyzer, was touching to the transmitter antenna. Set the RBW=1% to 5% of the anticipated emission bandwidth, VBW=3\*RBW, Detector = Peak, Trace mode = Max hold, Sweep = 500ms. Measure the maximum width of the emission that is constrained by the frequencies associated with the Occupied Bandwidth.

## TEST RESULTS

#### Compliance

**Temperature:** 24.3~26.2°C

**Test Date:** September 1~21, 2023


**Humidity:** 53~57% RH

**Tested By:** David Li

Occupied Channel Bandwidth Result						
Modulation Mode	Frequency (Fc)	99% Bandwidth (kHz)	F <sub>SL</sub> (kHz)	F <sub>L</sub> BW (kHz)	F <sub>H</sub> at 20dB BW (kHz)	F <sub>SH</sub> at 20dB BW (kHz)
Full charging loading	127.6	0.128	127.556	127.684	127.569	127.664
Limit		N/A	N/A	N/A	N/A	N/A
Result		Complied				

## Test Data

### 20dB & 99%OBW

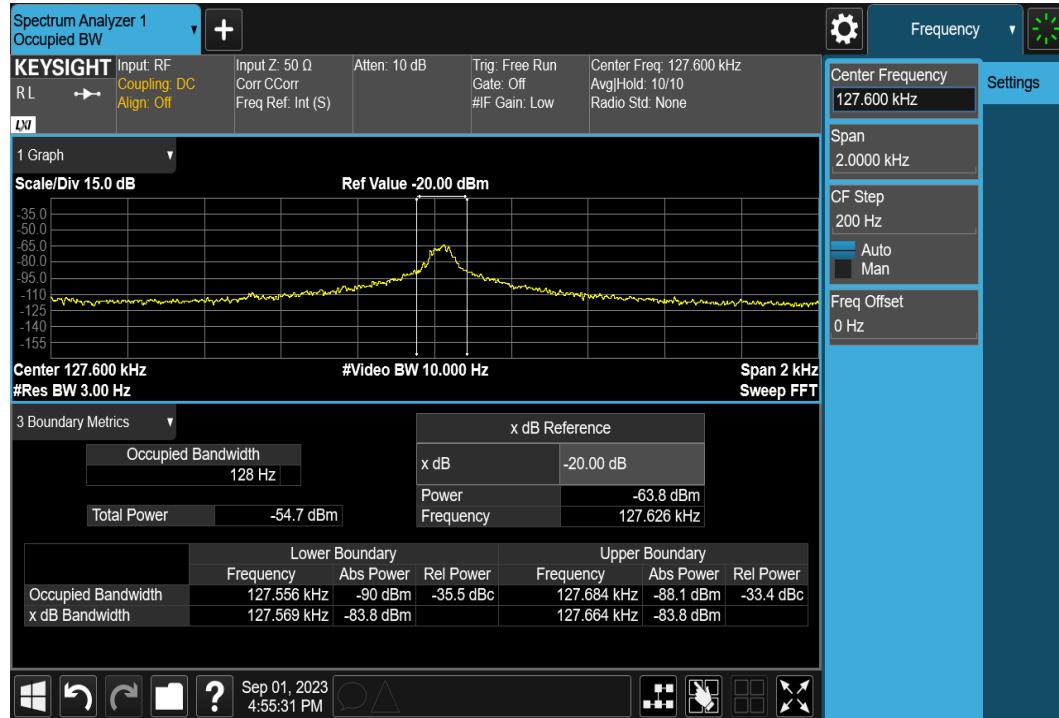

## Operating Frequency Range



## 7.2 TRANSMITTER RADIATED EMISSION

### LIMIT

1. According to FCC PART 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


**Remark:** Except as provided in other rules, fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### Above 30MHz


Frequency (MHz)	Field Strength		Measurement Distance (meter)
	( $\mu$ V/m)	(dB $\mu$ V/m)	
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

## Test Configuration

### 9kHz ~ 30MHz

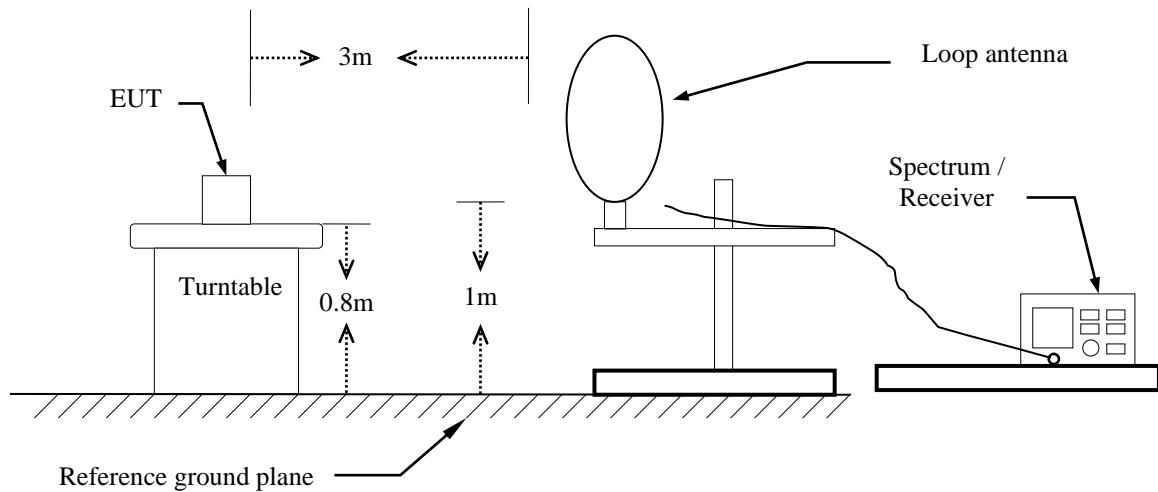

### 30MHz ~ 1GHz

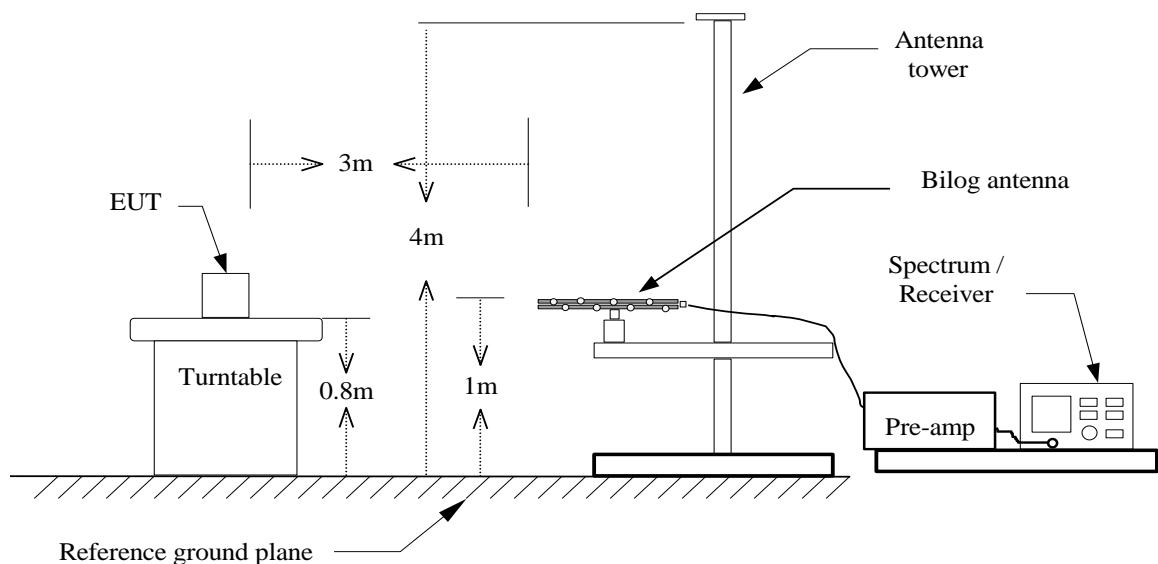

## **TEST PROCEDURE**

### **For 9KHz ~ 30MHz**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both parallel, perpendicular, and ground-parallel.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=200kHz / VBW=600kHz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.
8. Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

### **For 30MHz ~ 1GHz**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both vertical and horizontal.
6. Set the spectrum analyzer in the following setting as:  
RBW=100kHz / VBW=300kHz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.


**Main****Operation Mode:** Charging mode**Test Mode:** Mode 1**Temperature:** 24.6°C**Test Date:** July 11, 2023**Humidity:** 56% RH**Tested by:** Ray Li

Freq. (MHz)	Detector Mode	Spectrum Read Level @3m (dB $\mu$ V)	Factor @3m (dB)	Actual FS @3m (dB $\mu$ V/m)	Factor @30m &300m (dB)	Actual FS @30m &300m (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Ant. Pol. (V/H/G)
0.125	Peak	75.89	13.78	89.66	-80.00	9.66	25.63	-15.97	V
0.125	Peak	81.51	13.78	95.29	-80.00	15.29	25.63	-10.34	H
0.125	Peak	67.62	13.78	81.40	-80.00	1.40	25.63	-24.23	G


**Remark:**

1. Factor = Antenna factor + Cable loss – Distance conversion factor
2. Ant. Pol. (V/H/G): V=perpendicular, H=parallel, G=ground-parallel.


### Perpendicular

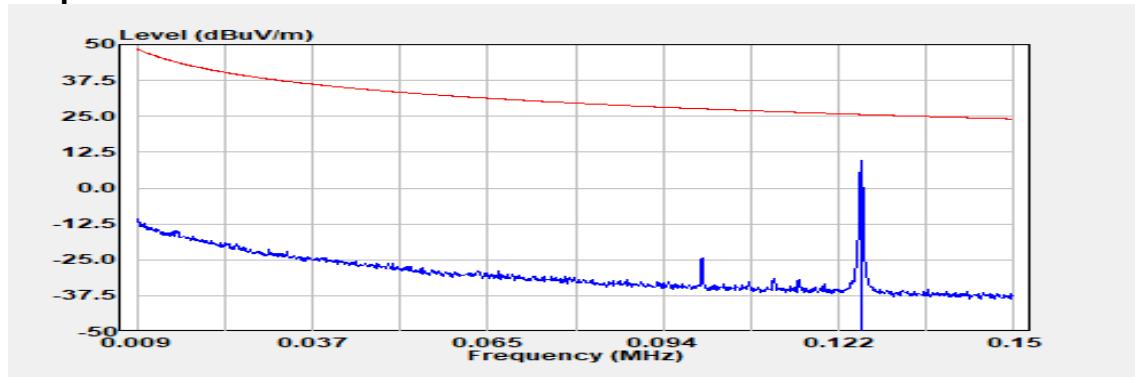


### Parallel

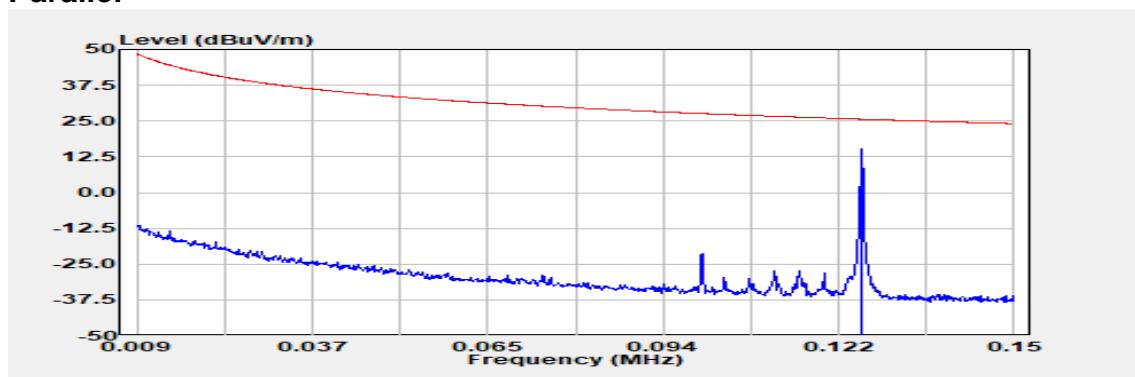

### Ground-parallel

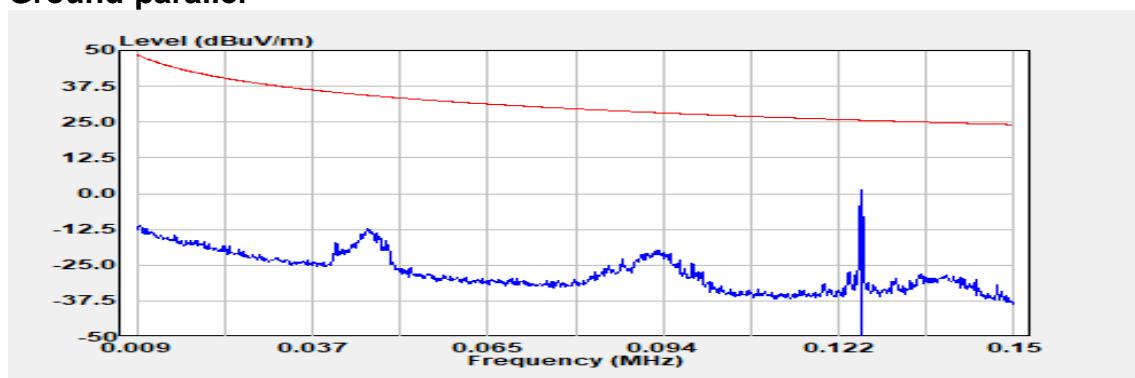


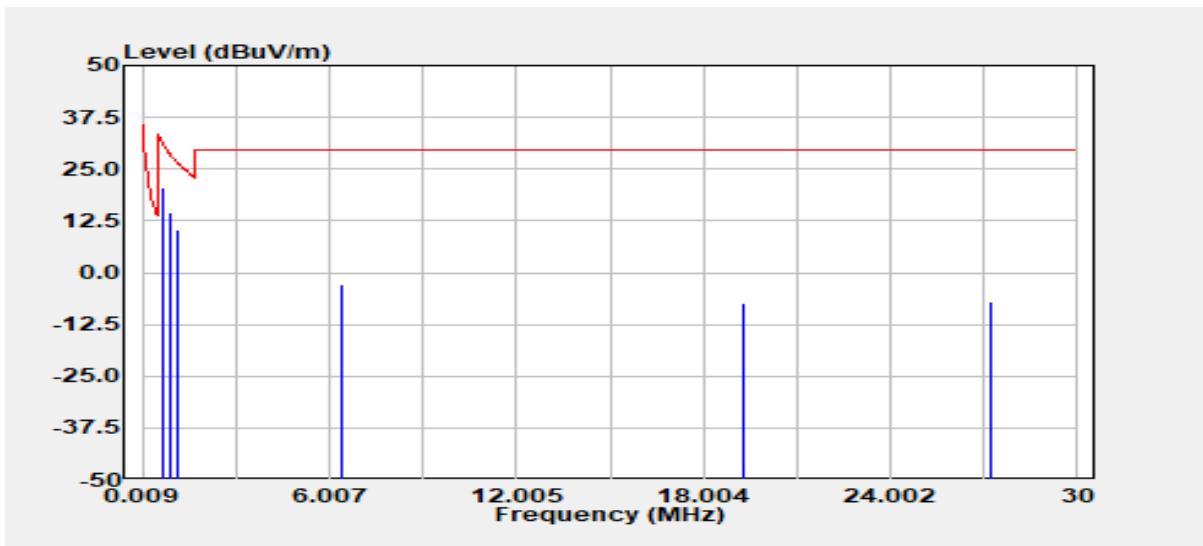**9 kHz – 30MHz****Operation Mode:** Charging mode**Antenna Pol.:** Parallel**Temperature:** 24.6°C**Test Date:** July 11, 2023**Humidity:** 56% RH**Tested by:** Ray Li**Test Mode:** Mode 1

Freq. (MHz)	Detector Mode	Spectrum Read Level @3m (dB $\mu$ V)	Factor @3m (dB)	Actual FS @3m (dB $\mu$ V/m)	Factor @30m &300m (dB)	Actual FS @30m &300m (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
0.628	Peak	45.96	14.52	60.48	-40.00	20.48	31.65	-11.17
0.878	Peak	39.83	14.63	54.46	-40.00	14.46	28.73	-14.27
1.129	Peak	35.86	14.66	50.53	-40.00	10.53	26.55	-16.02
6.430	Peak	20.47	16.54	37.01	-40.00	-2.99	29.54	-32.53
19.302	Peak	15.24	17.56	32.80	-40.00	-7.20	29.54	-36.74
27.254	Peak	15.99	17.20	33.19	-40.00	-6.81	29.54	-36.35

**Remark:**


1. The frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 1GHz measurements employing a CISPR quasi-peak detector.
2. For 9-90kHz, 110kHz-490kHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.  
For other frequencies, the Peak value was under the Quasi-peak limit, therefore the Quasi-peak value compliance with the limit. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
3. Factor = Antenna factor + Cable loss – Distance conversion factor
4. Since the Factor included the distance conversion factor, the distance of Actual FS is 300m or 30m. (9kHz~490kHz is 300m, 490kHz~30MHz is 30m)
5. The worst receiver antenna pol. is horizontal.

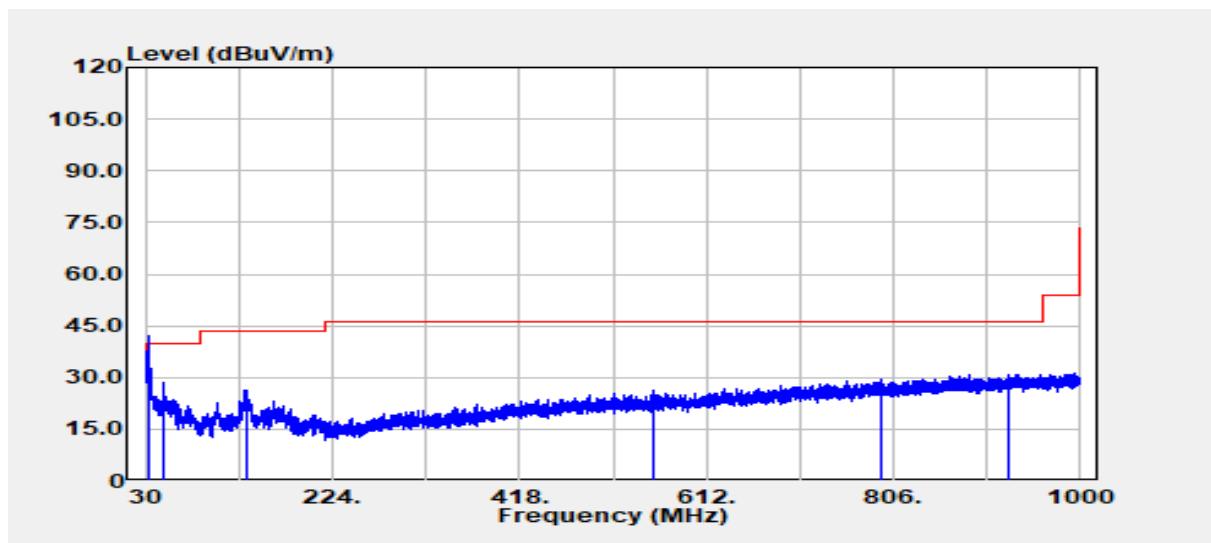**Below 1 GHz****Operation Mode:** Charging mode**Antenna Pol.:** Vertical**Temperature:** 24.6°C**Test Date:** July 11, 2023**Humidity:** 56% RH**Tested by:** Ray Li**Test Mode:** Mode 1

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
33.40	QP	41.84	-4.82	37.03	40.00	-2.97
48.79	Peak	43.41	-15.10	28.31	40.00	-11.69
135.85	Peak	35.89	-9.70	26.19	43.50	-17.31
558.17	Peak	28.67	-2.58	26.10	46.00	-19.90
794.48	Peak	28.19	1.40	29.59	46.00	-16.41
924.58	Peak	27.34	3.40	30.74	46.00	-15.26

**Remark:**


1. Factor = Antenna factor + Cable loss – Amp gain

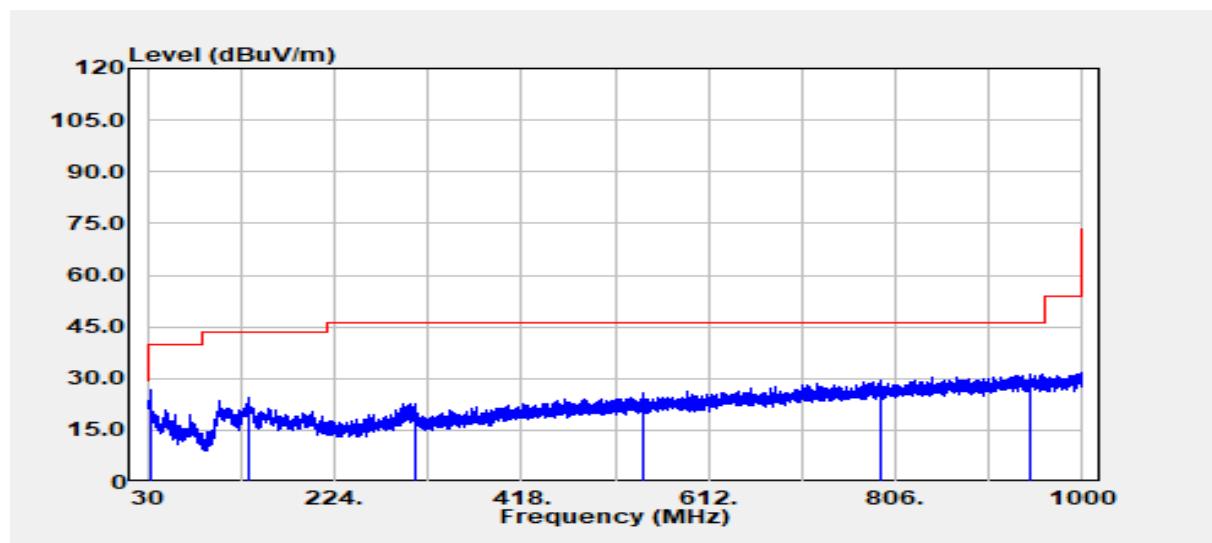**Operation Mode:** Charging mode**Antenna Pol.:** Horizontal**Temperature:** 24.6°C**Test Date:** July 11, 2023**Humidity:** 56% RH**Tested by:** Ray Li**Test Mode:** Mode 1

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
33.40	Peak	31.33	-4.82	26.51	40.00	-13.49
134.15	Peak	34.05	-9.55	24.50	43.50	-19.00
307.18	Peak	31.05	-8.42	22.63	46.00	-23.37
543.62	Peak	28.51	-2.80	25.72	46.00	-20.28
791.57	Peak	27.89	1.35	29.24	46.00	-16.76
945.07	Peak	27.58	3.62	31.20	46.00	-14.80

**Remark:**


1. Factor = Antenna factor + Cable loss – Amp gain

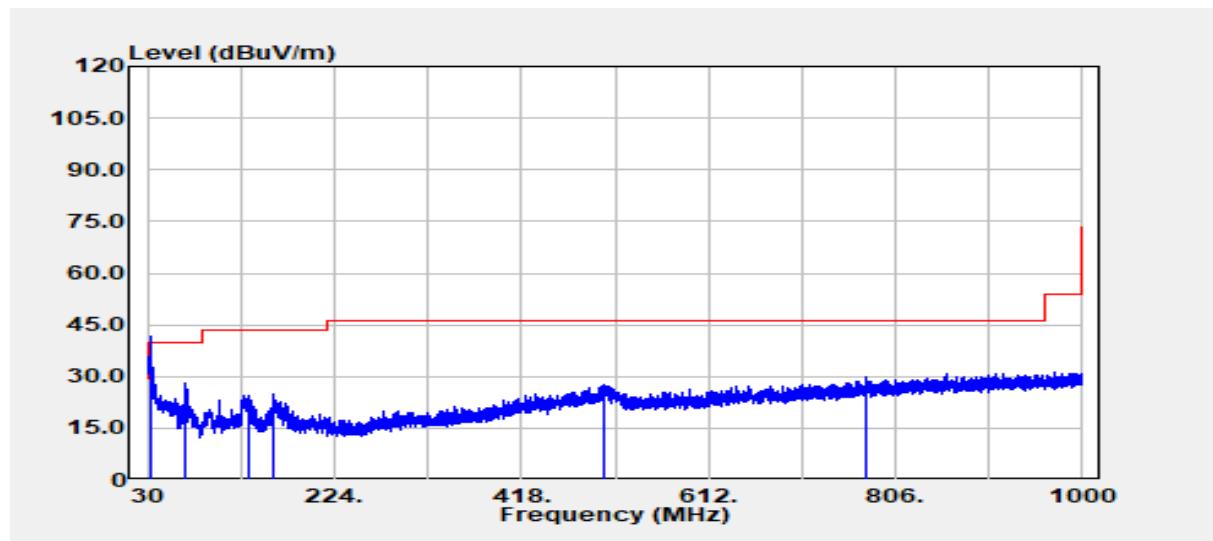**Operation Mode:** Charging mode**Antenna Pol.:** Vertical**Temperature:** 24.6°C**Test Date:** July 11, 2023**Humidity:** 56% RH**Tested by:** Ray Li**Test Mode:** Mode 2

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
33.40	QP	41.54	-4.82	36.73	40.00	-3.27
69.65	Peak	43.76	-15.67	28.09	40.00	-11.91
134.76	Peak	34.30	-9.73	24.57	43.50	-18.93
161.56	Peak	35.44	-10.68	24.76	43.50	-18.74
503.60	Peak	31.06	-3.51	27.56	46.00	-18.44
775.45	Peak	28.46	1.21	29.67	46.00	-16.33

**Remark:**

1. Factor = Antenna factor + Cable loss – Amp gain

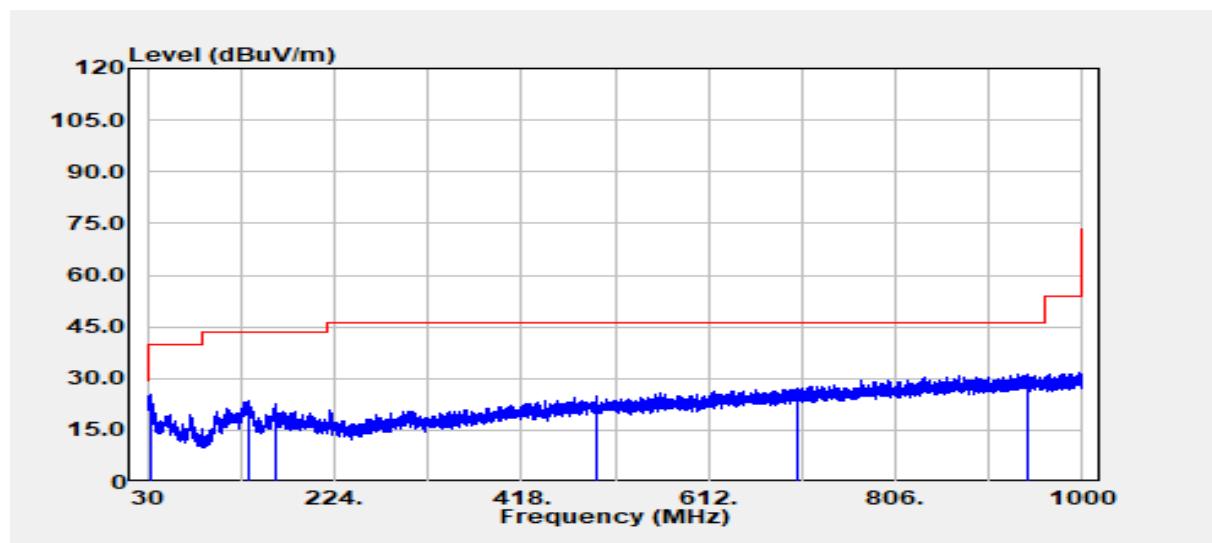**Operation Mode:** Charging mode**Antenna Pol.:** Horizontal**Temperature:** 24.6°C**Test Date:** July 11, 2023**Humidity:** 56% RH**Tested by:** Ray Li**Test Mode:** Mode 2

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
33.40	Peak	30.03	-4.82	25.21	40.00	-14.79
134.64	Peak	33.28	-9.69	23.58	43.50	-19.92
162.89	Peak	33.57	-10.72	22.85	43.50	-20.65
496.93	Peak	28.31	-3.61	24.70	46.00	-21.30
703.54	Peak	27.15	-0.02	27.13	46.00	-18.87
942.65	Peak	27.83	3.59	31.42	46.00	-14.58

**Remark:**

1. Factor = Antenna factor + Cable loss – Amp gain

## 7.3 AC CONDUCTED EMISSION

### LIMIT

According to §15.207(a) , for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

### Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


### TEST RESULTS

Compliance.

Report No.: TMWK2307002181KR

## Test Data


Test Mode:	Mode 1-5W	Temp/Hum	24.3(°C)/ 52%RH
Phase:	Line	Test Date	July 13, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao

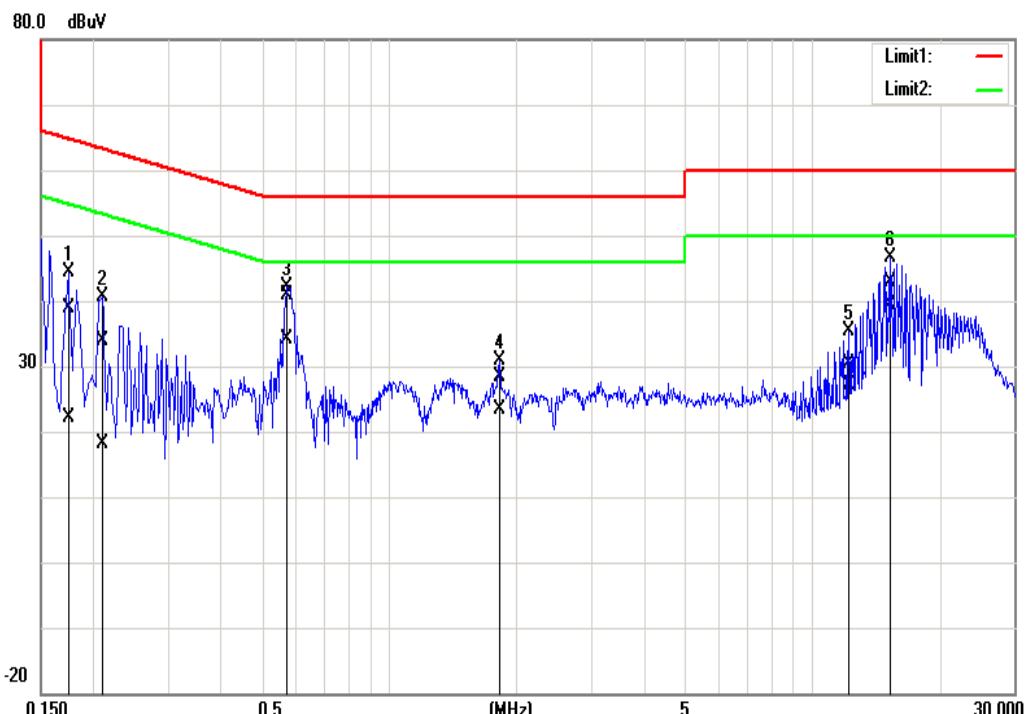

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (d uV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1740	38.77	21.93	0.15	38.92	22.08	64.77	54.77	-25.85	-32.69	Pass
0.2100	33.70	18.05	0.15	33.85	18.20	63.21	53.21	-29.36	-35.01	Pass
0.5740	40.73	33.93	0.15	40.88	34.08	56.00	46.00	-15.12	-11.92	Pass
1.8220	28.16	23.29	0.21	28.37	23.50	56.00	46.00	-27.63	-22.50	Pass
12.2180	29.99	26.67	0.40	30.39	27.07	60.00	50.00	-29.61	-22.93	Pass
15.3020	42.40	39.05	0.44	42.84	39.49	60.00	50.00	-17.16	-10.51	Pass

**Note:** 1. Correction factor = LISN loss + Cable loss.

Test Mode:	Mode 1-5W	Temp/Hum	24.3(°C)/ 52%RH
Phase:	Neutral	Test Date	July 13, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao

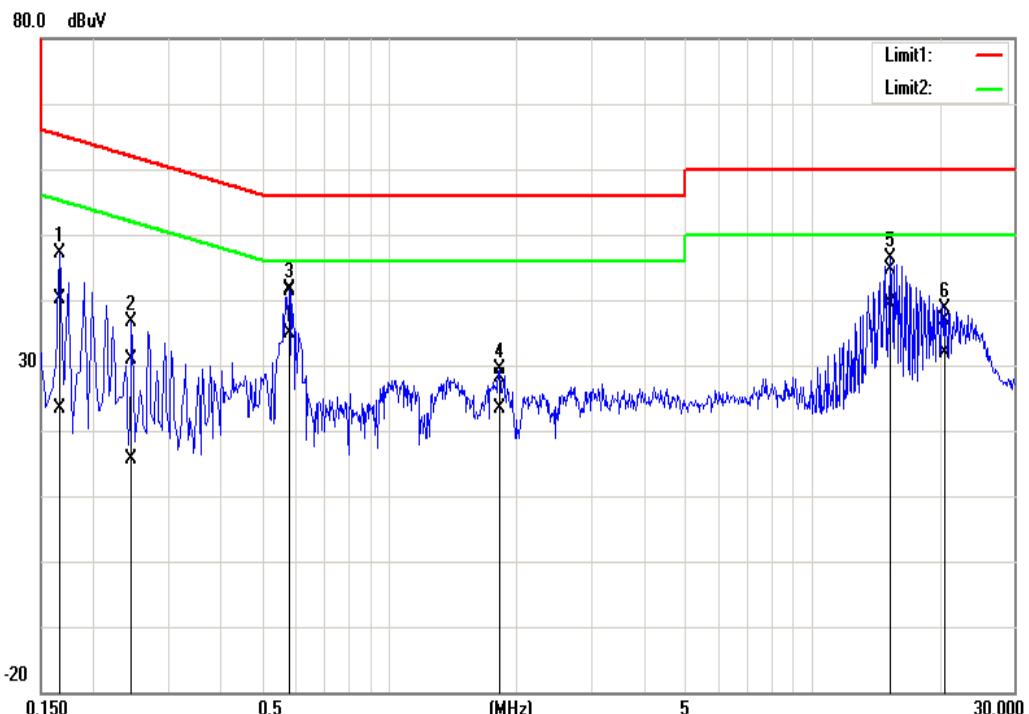


Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (d uV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1660	40.00	23.09	0.19	40.19	23.28	65.16	55.16	-24.97	-31.88	Pass
0.2460	30.61	15.49	0.19	30.80	15.68	61.89	51.89	-31.09	-36.21	Pass
0.5820	41.11	34.61	0.19	41.30	34.80	56.00	46.00	-14.70	-11.20	Pass
1.8220	27.95	23.12	0.25	28.20	23.37	56.00	46.00	-27.80	-22.63	Pass
15.3060	44.05	38.80	0.46	44.51	39.26	60.00	50.00	-15.49	-10.74	Pass
20.6700	36.39	31.30	0.53	36.92	31.83	60.00	50.00	-23.08	-18.17	Pass

**Note:** 1. Correction factor = LISN loss + Cable loss.

Report No.: TMWK2307002181KR


Test Mode:	Mode 1-7.5W	Temp/Hum	24.3(°C)/ 52%RH
Phase:	Line	Test Date	July 13, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao

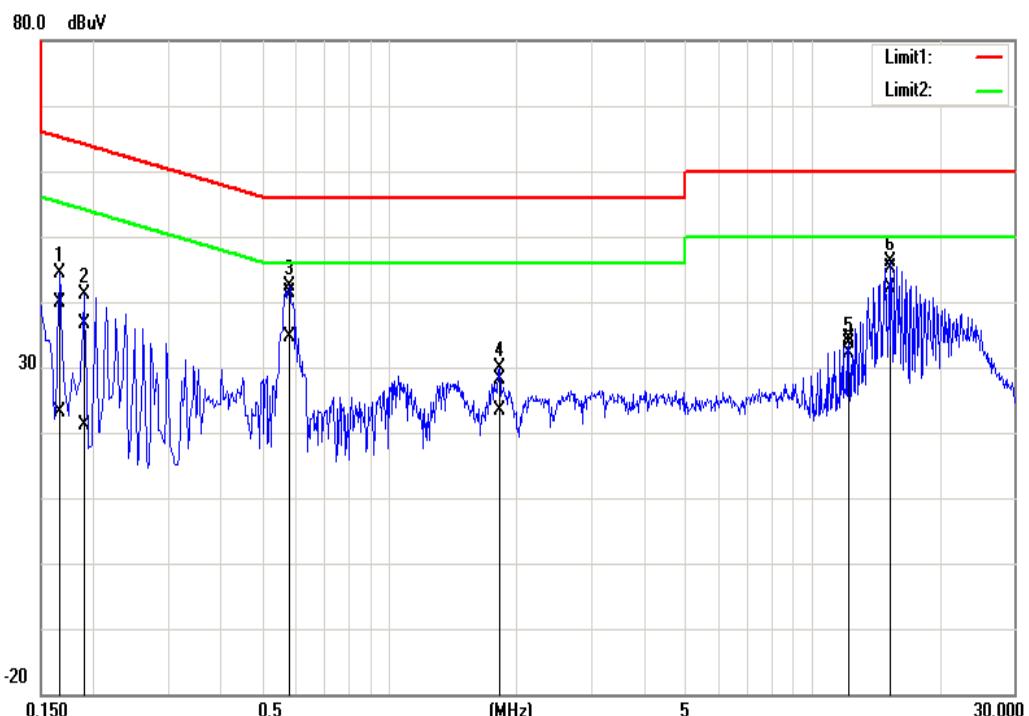

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (d uV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1660	39.64	23.01	0.15	39.79	23.16	65.16	55.16	-25.37	-32.00	Pass
0.1900	36.59	21.01	0.15	36.74	21.16	64.04	54.04	-27.30	-32.88	Pass
0.5820	41.14	34.58	0.15	41.29	34.73	56.00	46.00	-14.71	-11.27	Pass
1.8220	28.04	23.12	0.21	28.25	23.33	56.00	46.00	-27.75	-22.67	Pass
12.2180	33.87	31.61	0.40	34.27	32.01	60.00	50.00	-25.73	-17.99	Pass
15.3060	44.69	41.70	0.44	45.13	42.14	60.00	50.00	-14.87	-7.86	Pass

**Note:** 1. Correction factor = LISN loss + Cable loss.


Test Mode:	Mode 1-7.5W	Temp/Hum	24.3(°C)/ 52%RH
Phase:	Neutral	Test Date	July 13, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao

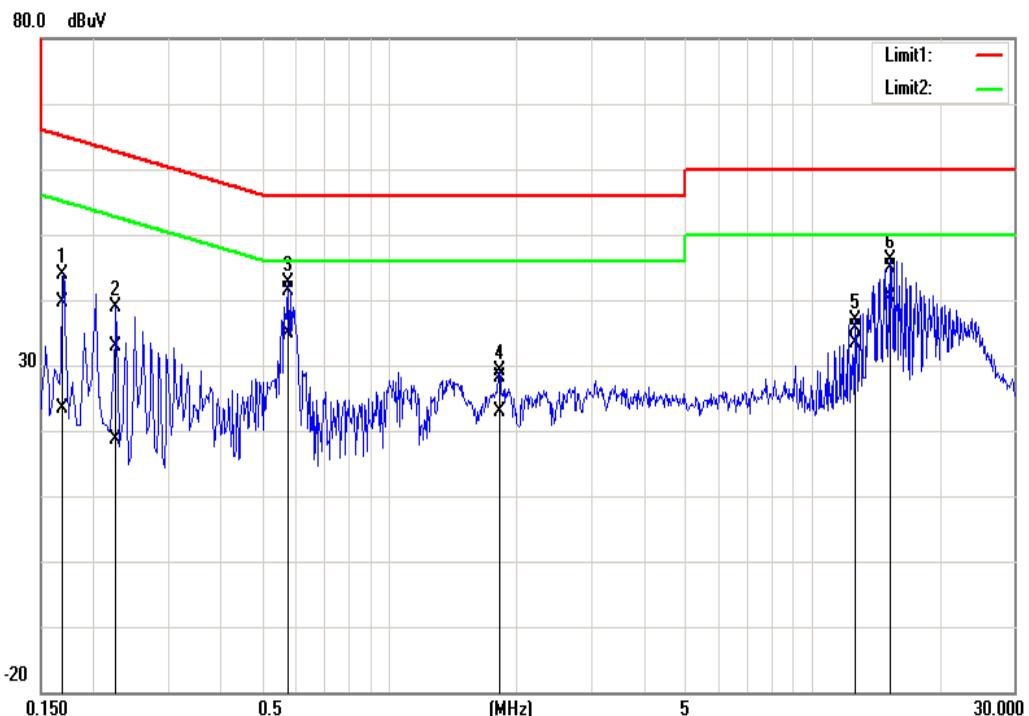

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (d uV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1700	39.37	23.10	0.19	39.56	23.29	64.96	54.96	-25.40	-31.67	Pass
0.2260	32.66	18.39	0.19	32.85	18.58	62.60	52.60	-29.75	-34.02	Pass
0.5780	41.23	34.63	0.19	41.42	34.82	56.00	46.00	-14.58	-11.18	Pass
1.8220	27.87	22.67	0.25	28.12	22.92	56.00	46.00	-27.88	-23.08	Pass
12.6180	35.18	32.97	0.42	35.60	33.39	60.00	50.00	-24.40	-16.61	Pass
15.3060	44.40	39.92	0.46	44.86	40.38	60.00	50.00	-15.14	-9.62	Pass

**Note:** 1. Correction factor = LISN loss + Cable loss.


Test Mode:	Mode 1-10W	Temp/Hum	24.3(°C)/ 52%RH
Phase:	Line	Test Date	July 13, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao

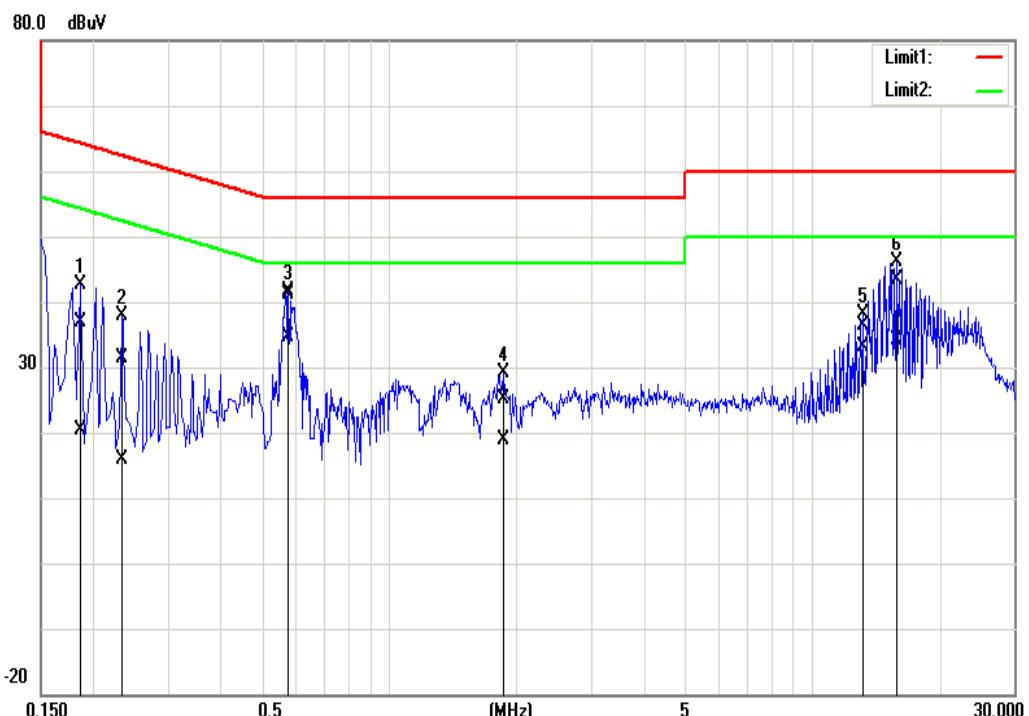

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (d uV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1860	36.83	20.20	0.15	36.98	20.35	64.21	54.21	-27.23	-33.86	Pass
0.2340	31.11	15.73	0.15	31.26	15.88	62.31	52.31	-31.05	-36.43	Pass
0.5780	40.98	34.37	0.15	41.13	34.52	56.00	46.00	-14.87	-11.48	Pass
1.8620	24.99	18.66	0.21	25.20	18.87	56.00	46.00	-30.80	-27.13	Pass
13.0180	35.86	32.64	0.40	36.26	33.04	60.00	50.00	-23.74	-16.96	Pass
15.8300	42.97	33.60	0.45	43.42	34.05	60.00	50.00	-16.58	-15.95	Pass

**Note:** 1. Correction factor = LISN loss + Cable loss.

Test Mode:	Mode 1-10W	Temp/Hum	24.3(°C)/ 52%RH
Phase:	Neutral	Test Date	July 13, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao

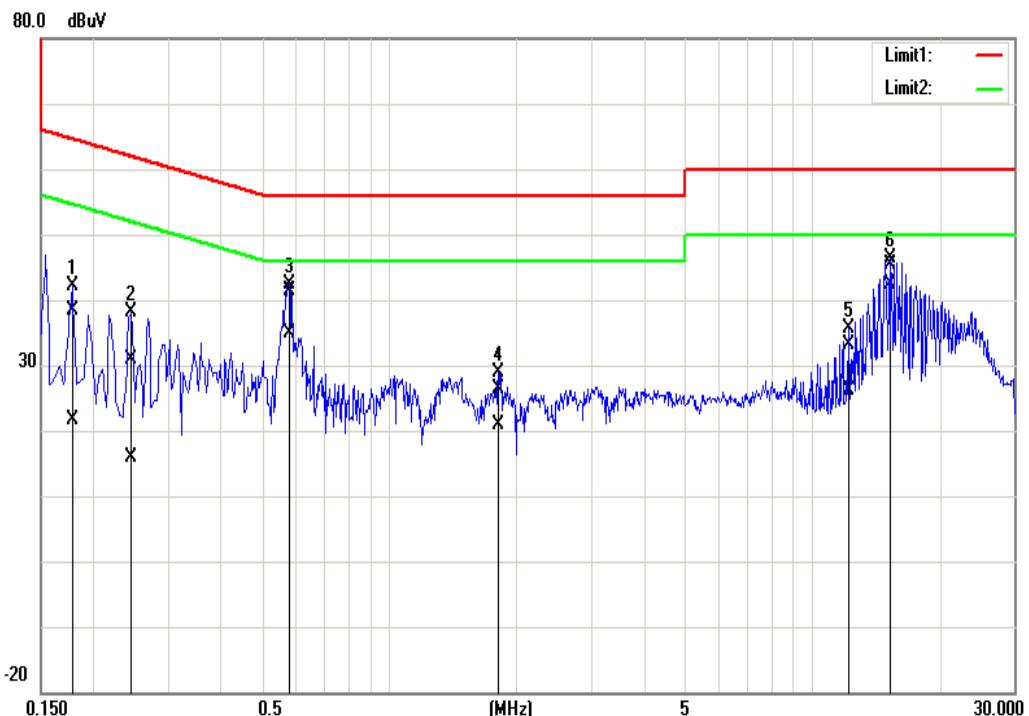

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (d uV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1780	38.11	21.44	0.20	38.31	21.64	64.58	54.58	-26.27	-32.94	Pass
0.2460	30.70	15.74	0.19	30.89	15.93	61.89	51.89	-31.00	-35.96	Pass
0.5820	41.20	34.65	0.19	41.39	34.84	56.00	46.00	-14.61	-11.16	Pass
1.8140	26.05	20.72	0.25	26.30	20.97	56.00	46.00	-29.70	-25.03	Pass
12.2180	32.70	25.65	0.42	33.12	26.07	60.00	50.00	-26.88	-23.93	Pass
15.2980	44.84	41.82	0.46	45.30	42.28	60.00	50.00	-14.70	-7.72	Pass

**Note:** 1. Correction factor = LISN loss + Cable loss.

## 7.4 COIL RULERS AND SPECIFICATIONS

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

<b>Antenna Type</b>	Coil
<b>Brand / Model</b>	HOLYGO CORPORATION CO, LTD / HL-10W-C

**Remark:**

1.The antenna(s) of the EUT are permanently attached and there are no provisions for connection to an external antenna. So the EUT complies with the requirements of §15.203.

**- End of Test Report -**