



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

18.5" Panel PC

**Model: PPS1831; PPS1831-ETAW-433-AXX;
PPS1831-EGAW-433-AXX (X = 0-9 & A-Z)**

Trade Name: LITEMAX

Issued to

**LiteMAX Electronics Inc.
1 Creation 3rd Rd., Science-based Industrial Park,
New Taipei City, 23145 Taiwan.**

Issued by

**Compliance Certification Services Inc.
No.11, Wu-Gong 6th Rd., Wugu Industrial Park,
New Taipei City 248, Taiwan (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: May 2, 2012**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 2, 2012	Initial Issue	ALL	Angel Cheng



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER.....	19
7.3 BAND EDGES MEASUREMENT	24
7.4 PEAK POWER SPECTRAL DENSITY.....	36
7.5 SPURIOUS EMISSIONS.....	41
7.6 POWERLINE CONDUCTED EMISSIONS.....	56
APPENDIX I RADIO FREQUENCY EXPOSURE	59
APPENDIX II PHOTOGRAPHS OF TEST SETUP	61
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: Litemax Electronics Inc.
7F-1, No. 135, Lane 235, Bau-chiau Rd., Shin-dian Dist.,
New Taipei City, 23145 Taiwan.

Equipment Under Test: 18.5" Panel PC

Trade Name: LITEMAX

Model: PPS1831; PPS1831-ETAW-433-AXX;
PPS1831-EGAW-433-AXX (X = 0-9 & A-Z)

Date of Test: April 26 ~ May 1, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted
Deviation from Applicable Standard	
N/A	

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Jason Lin

Jason Lin
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Gina Lo

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	18.5" Panel PC
Trade Name	LITEMAX
Model Number	PPS1831; PPS1831-ETAW-433-AXX; PPS1831-EGAW-433-AXX (X = 0-9 & A-Z)
Model Discrepancy	All the specification and layout are identical except they come with different model numbers for marketing purposes.
Received Date	December 28, 2011
Power Supply	Powered from Power Adapter: 1. OEM / A065112-TD1 I/P: 100-240V, 50-60Hz, 1.8A O/P: 12V, 5.4A 2. SINPRO / HPU100-105 I/P: 100-240V, 47-63Hz, 1.25A-0.5A O/P: 12V, 8.33A
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b: 18.90 dBm IEEE 802.11g: 16.56 dBm
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	IEEE 802.11b Mode: 11, 5.5, 2, 1 Mbps IEEE 802.11g Mode: 54, 48, 36, 24, 18, 12, 9, 6Mbps
Number of Channels	11 Channels
Antenna Specification	Gain: 2 dBi
Antenna Designation	PIFA Antenna

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **GQO-PPS1831** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 Part 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.

**3.4FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS**

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: PPS1831) comes with two types of adapter for sale. After the preliminary test, the EUT with adapter (Model: A065112-TD1) was found to emit the worst emissions and therefore had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel 1(2412MHz), Channel 6(2442MHz) and Channel 11(2462MHz) with 11Mbps data rate were chosen for the final testing.

IEEE 802.11g mode:

Channel 1(2412MHz), Channel 6(2442MHz) and Channel 11(2462MHz) with 54Mbps data rate were chosen for the final testing.

The field strength of spurious emission was measured in the following position: EUT lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/16/2013
Spectrum Analyzer	R&S	FSEK30	100264	04/12/2013
Power Meter	Anritsu	ML2495A	1012009	04/26/2013
Power Sensor	Anritsu	MA2411B	0917072	04/26/2013

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	11/02/2012
EMI Test Receiver	R&S	ESCI	100064	02/16/2013
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/12/2013
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/19/2012
Bilog Antenna	Sunol Sciences	JB3	A030105	10/03/2012
Horn Antenna	EMCO	3117	00055165	01/11/2013
Horn Antenna	EMCO	3116	00026370	10/12/2012
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/25/2012
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESCI	101201	09/05/2012
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127527	12/13/2012
LISN	SCHWARZBECK	NSLK 8127	8127526	12/13/2012
BNC CABLE	EMCI	5Dr	BNC A6	12/07/2012
Pulse Limiter	R&S	ESH3-Z2	C3010026-2	09/07/2012
THERMO-HYGRO METER	TECPEL	DTM-303	NO.3	11/21/2012
Test S/W	EZ-EMC			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.9
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

Remark: The conducted emissions test items was tested at Compliance Certification Services Inc. (Sindian Lab.) The test equipments were listed in page 9 and the test data, please refer page 57 ~ 58.

☒ No.11, Wu-Gong 6th Rd., Wugu Industrial Park, New Taipei City 248, Taiwan (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

**5.3 TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Model	Series No.	FCC ID	Brand	Data Cable	Power Cord
1	Earphone & Microphone	SEP912	N/A	N/A	Atayal	Unshielded, 1.8m	N/A
2	USB Mouse	M-UAE96	F93A90A5BU90L20	DOC BSMI: T41126	hp	Shielded, 1.8m	N/A
3	USB Keyboard	KU-0316	BC3870FVBWH079	DOC BSMI: R33001	hp	Shielded, 1.8m	N/A
4	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
5	Modem	AL-56ERM	0MERM04A0212	DOC	GALILEO	Shielded, 1.5m	Unshielded, 1.5m
6-7	Server Notebook	2210B	N/A	DOC BSMI: R33001	HP	Unshielded, 20m	Unshielded, 1.8m

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



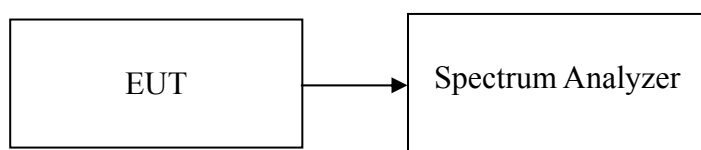
7. FCC PART 15.247 REQUIREMENTS

7.16DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. Set the RBW = 1% of the emission bandwidth, VBW $\geq 3 \times$ RBW, Detector = Peak, Trace mode = max hold, Sweep = auto couple. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

TEST RESULTS

No non-compliance noted.

**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.25	>500	PASS
Mid	2442	10.17		PASS
High	2462	10.17		PASS

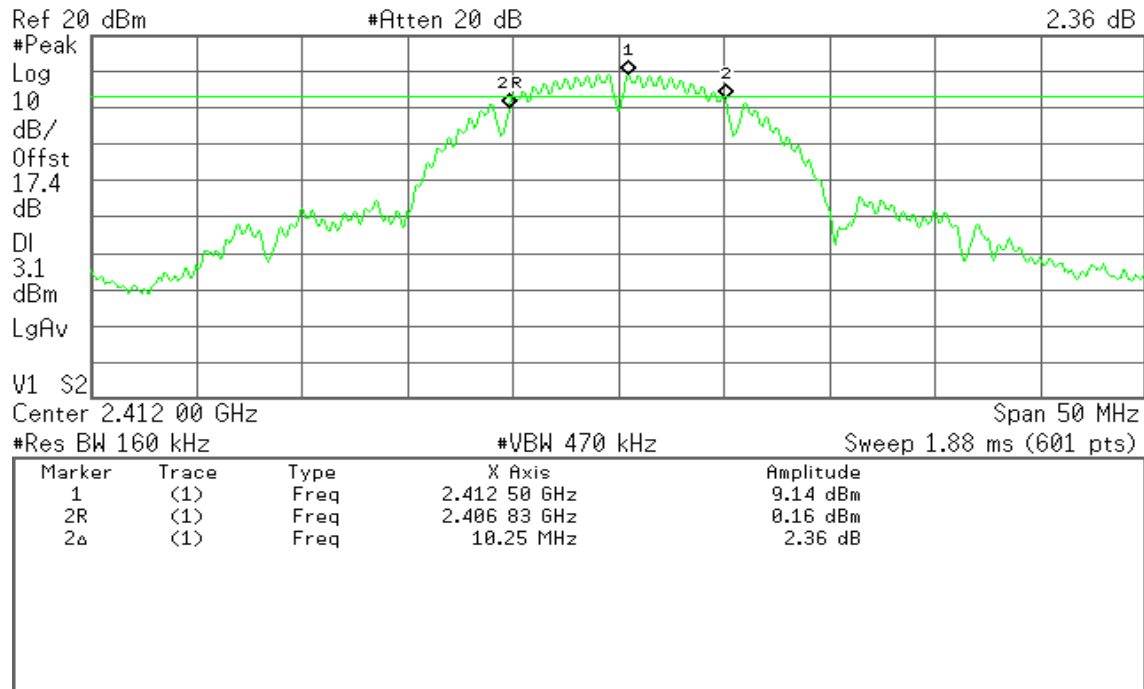
Test mode: IEEE 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.58	>500	PASS
Mid	2442	16.58		PASS
High	2462	16.67		PASS

**Test Plot****IEEE 802.11b****6dB Bandwidth (CH Low)**

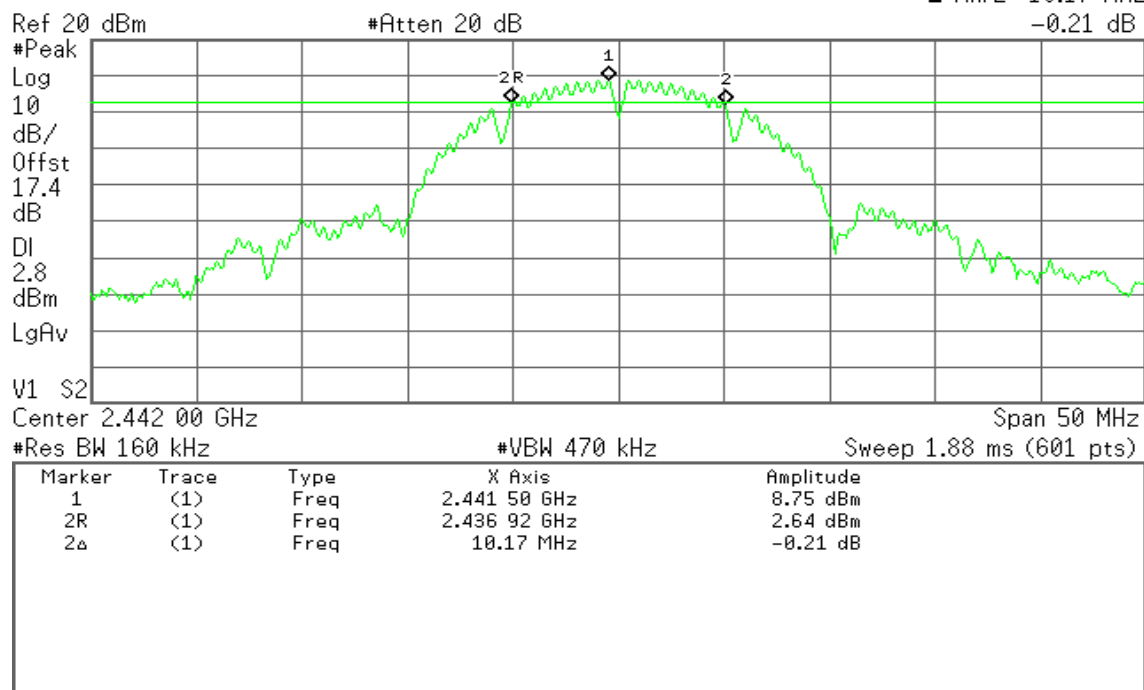
* Agilent 13:33:36 May 1, 2012

R T

▲ Mkr2 10.25 MHz
2.36 dB**6dB Bandwidth (CH Mid)**

* Agilent 13:35:23 May 1, 2012

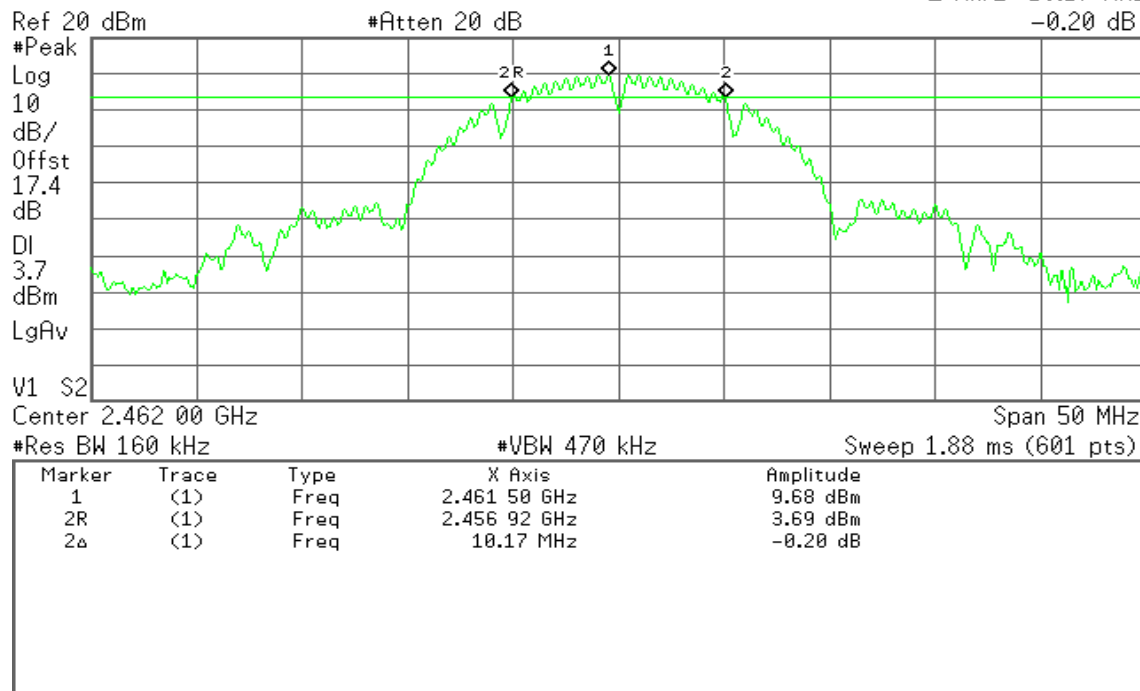
R T

▲ Mkr2 10.17 MHz
-0.21 dB

**6dB Bandwidth (CH High)**

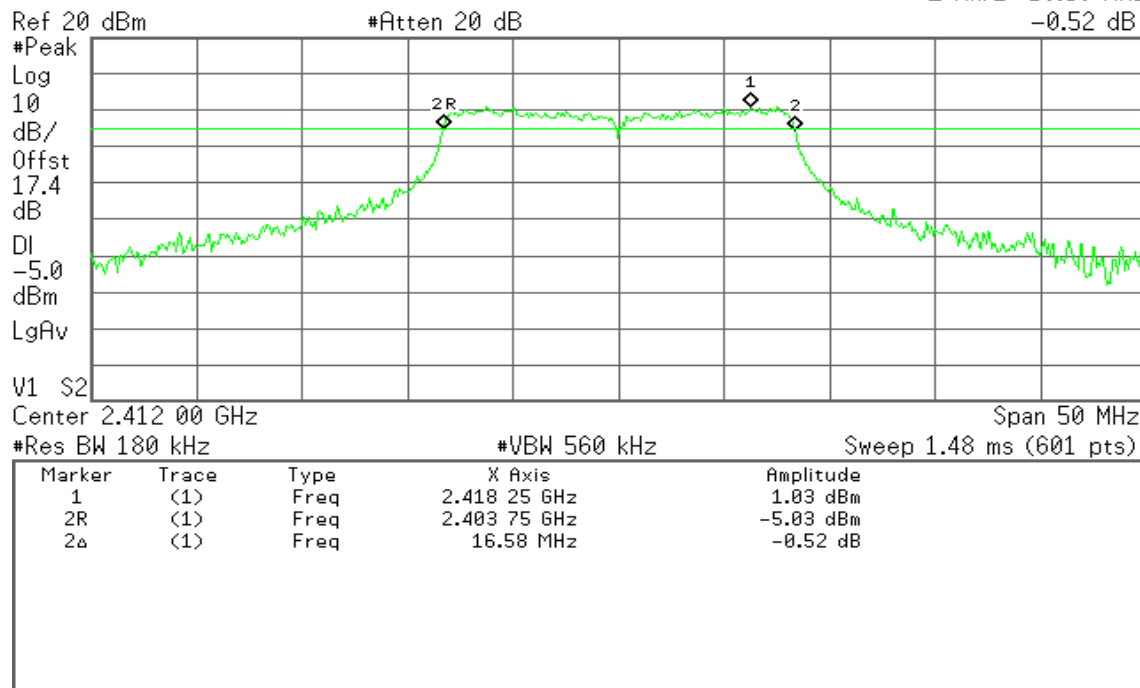
* Agilent 13:37:26 May 1, 2012

R T

▲ Mkr2 10.17 MHz
-0.20 dB**IEEE 802.11g****6dB Bandwidth (CH Low)**

* Agilent 13:46:24 May 1, 2012

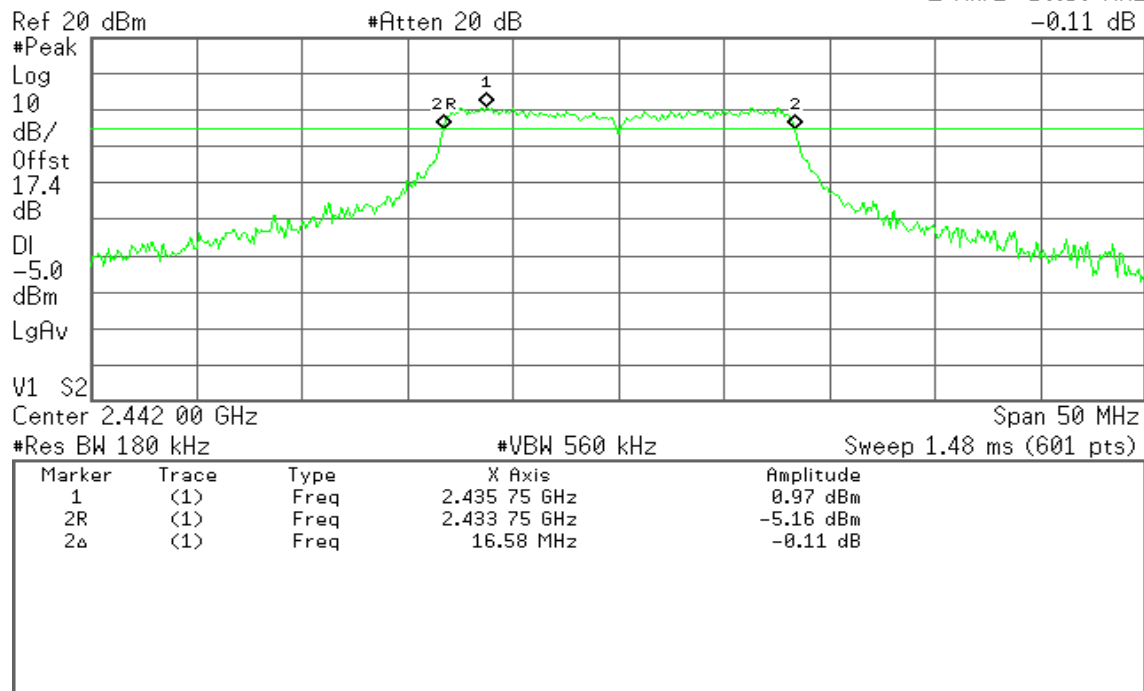
R T

▲ Mkr2 16.58 MHz
-0.52 dB

**6dB Bandwidth (CH Mid)**

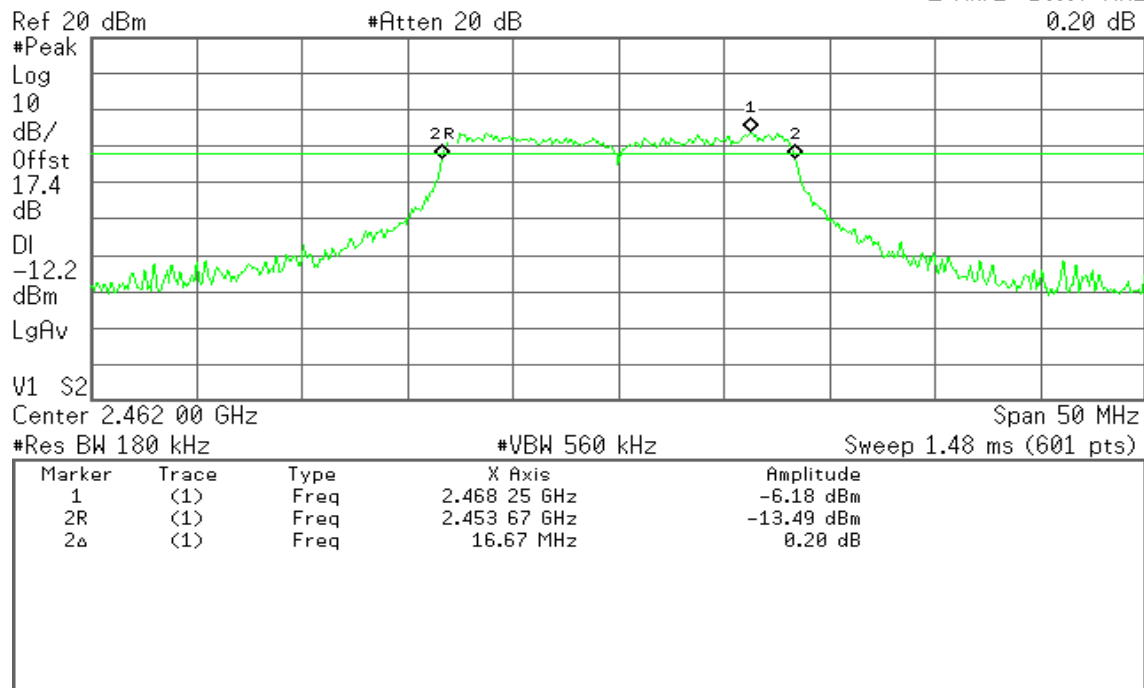
* Agilent 13:44:11 May 1, 2012

R T

▲ Mkr2 16.58 MHz
-0.11 dB**6dB Bandwidth (CH High)**

* Agilent 13:39:36 May 1, 2012

R T

▲ Mkr2 16.67 MHz
0.20 dB




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. Set the RBW = 1MHz , VBW = 3MHz, Detector = Peak, Trace mode = max hold, Sweep = auto couple. Record the max reading.

Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted.

**Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	18.61	0.0726	1.00	PASS
Mid	2442	18.38	0.0689		PASS
High	2462	18.90	0.0776		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.56	0.0453	1.00	PASS
Mid	2442	16.22	0.0419		PASS
High	2462	8.54	0.0071		PASS

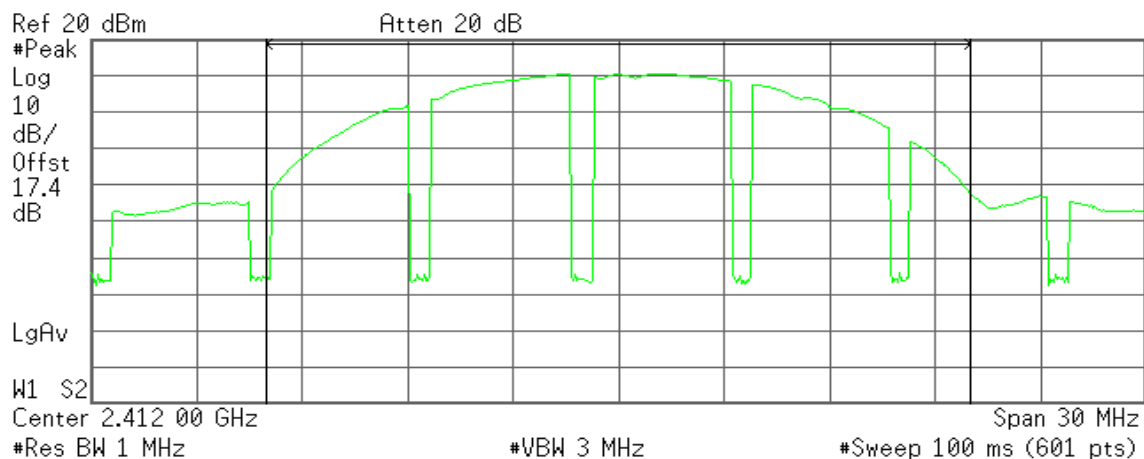


IEEE 802.11b

Peak power (CH Low)

* Agilent 13:13:55 Apr 27, 2012

R T



Channel Power

18.61 dBm /20.0000 MHz

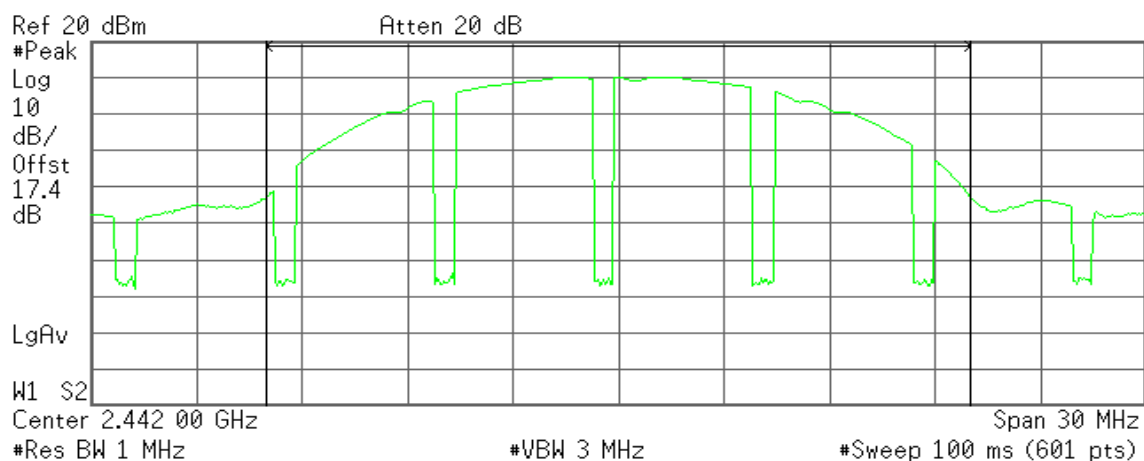
Power Spectral Density

-54.40 dBm/Hz

Peak power (CH Mid)

* Agilent 13:20:18 Apr 27, 2012

R T



Channel Power

18.38 dBm /20.0000 MHz

Power Spectral Density

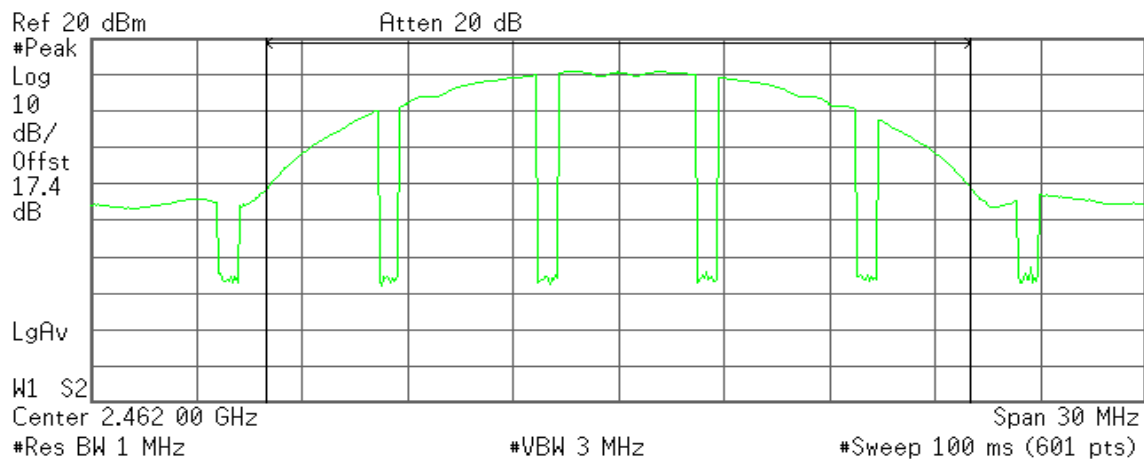
-54.63 dBm/Hz



Peak power (CH High)

Agilent 13:28:37 Apr 27, 2012

R T



Channel Power

18.90 dBm /20.0000 MHz

Power Spectral Density

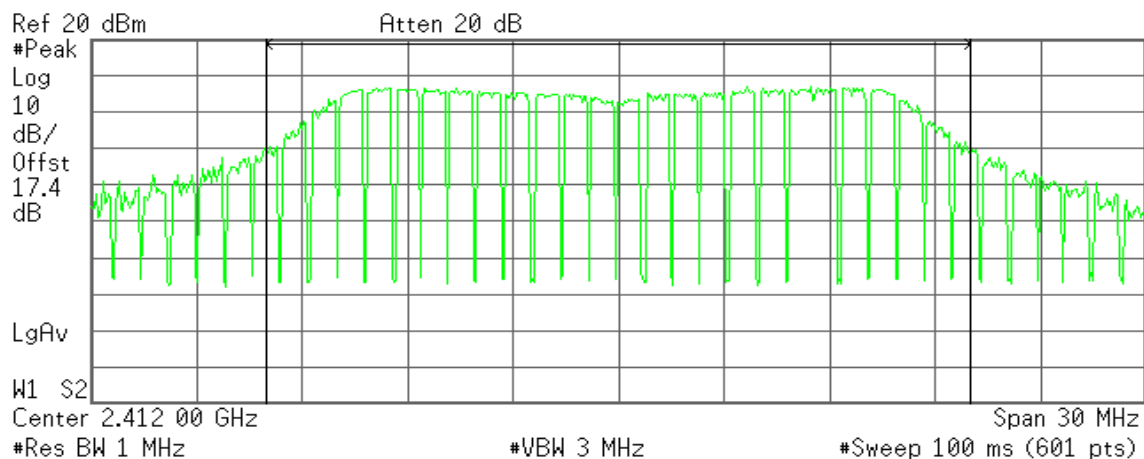
-54.11 dBm/Hz

IEEE 802.11g

Peak power (CH Low)

Agilent 13:35:31 Apr 27, 2012

R T



Channel Power

16.56 dBm /20.0000 MHz

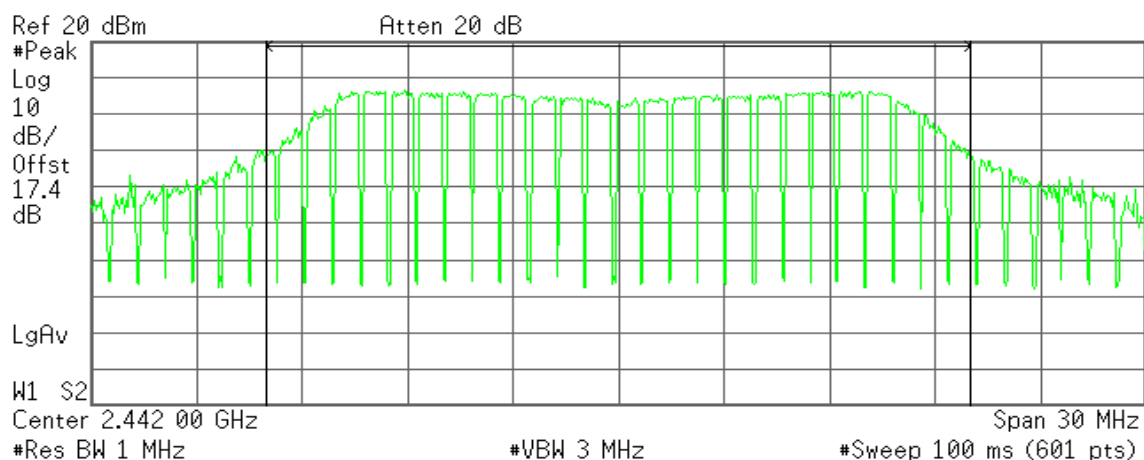
Power Spectral Density

-56.45 dBm/Hz

**Peak power (CH Mid)**

* Agilent 13:41:10 Apr 27, 2012

R T

**Channel Power**

16.22 dBm /20.0000 MHz

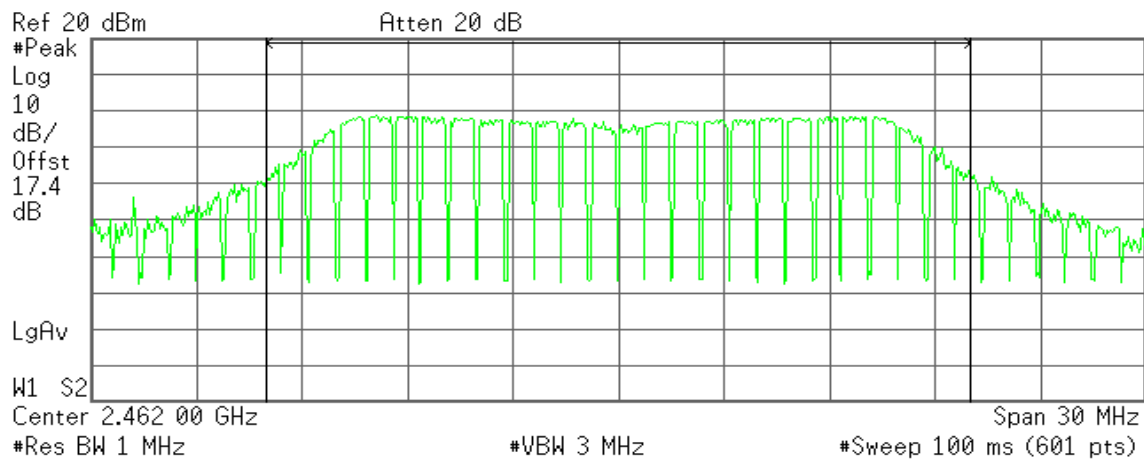
Power Spectral Density

-56.79 dBm/Hz

Peak power (CH High)

* Agilent 13:46:50 Apr 27, 2012

R T

**Channel Power**

8.54 dBm /20.0000 MHz

Power Spectral Density

-64.47 dBm/Hz



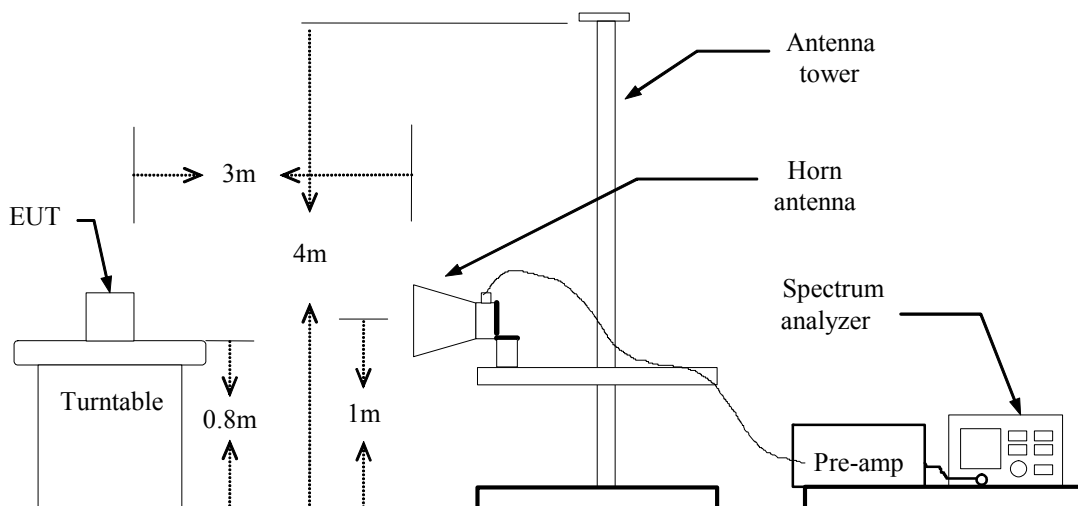
7.3BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated



For Conducted





TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

TEST RESULTS

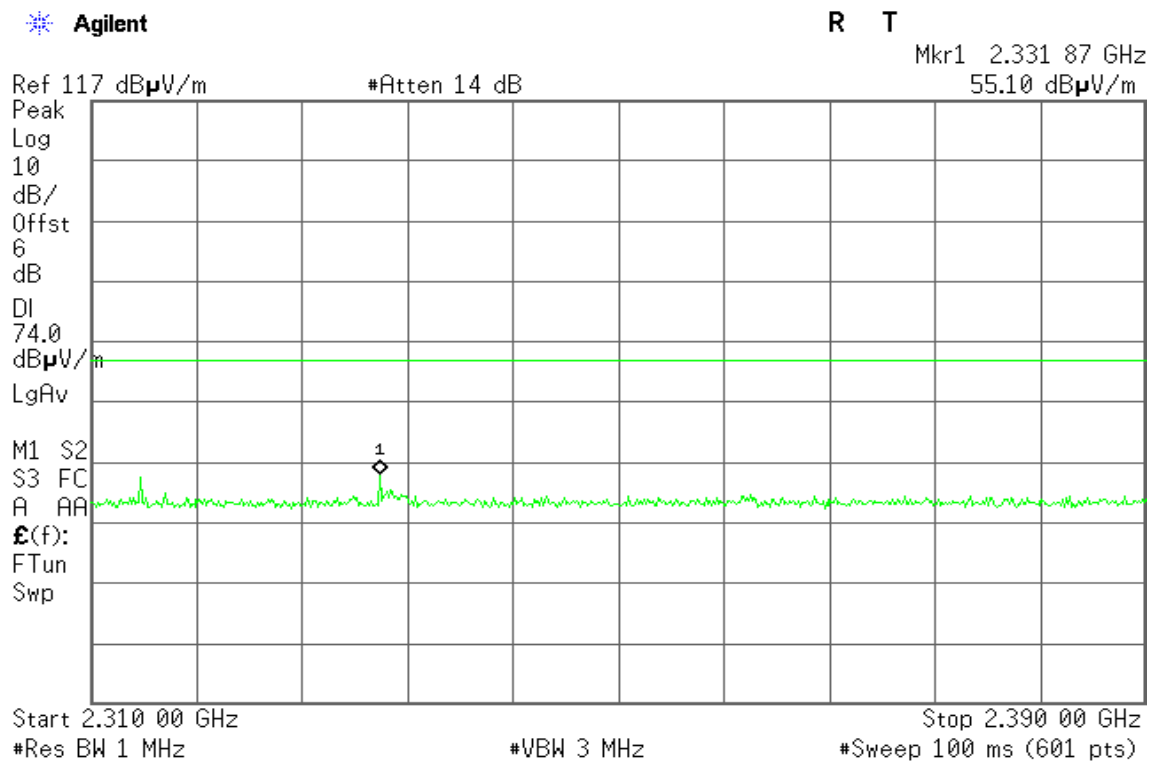
Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b / CH Low)

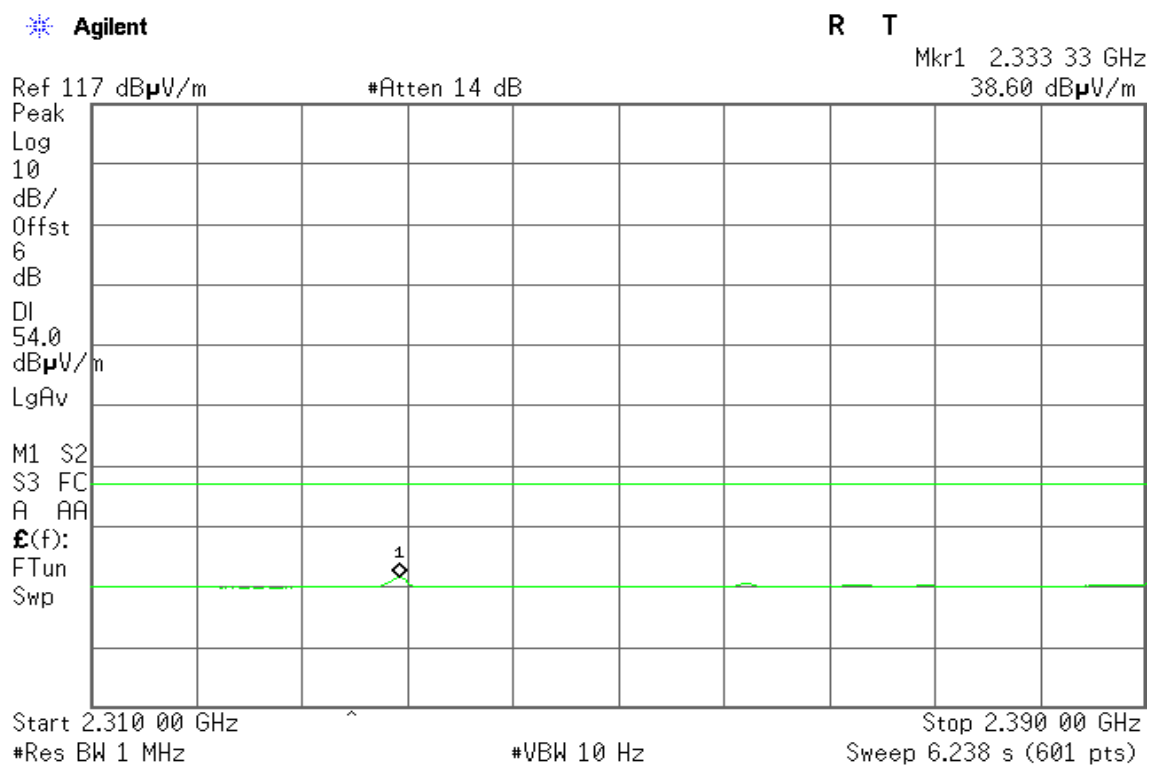
Detector mode: Peak

Polarity: Vertical



Detector mode: Average

Polarity: Vertical





Detector mode: Peak

Polarity: Horizontal

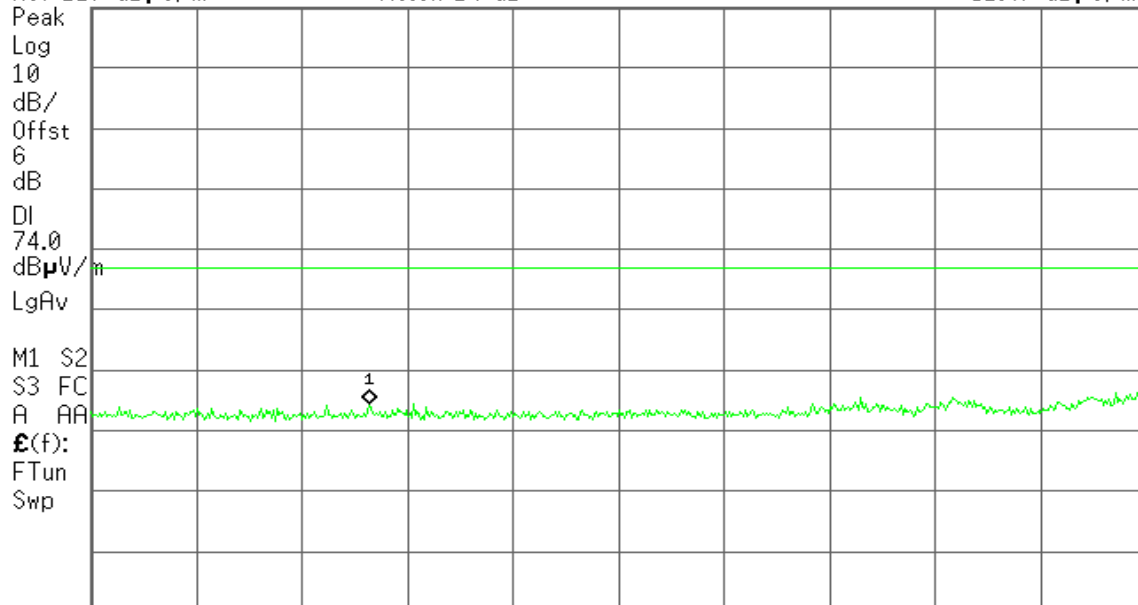
Agilent

T

Ref 117 dB μ V/m

#Atten 14 dB

Mkr1 2.331 07 GHz

51.47 dB μ V/m

Start 2.310 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

Stop 2.390 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

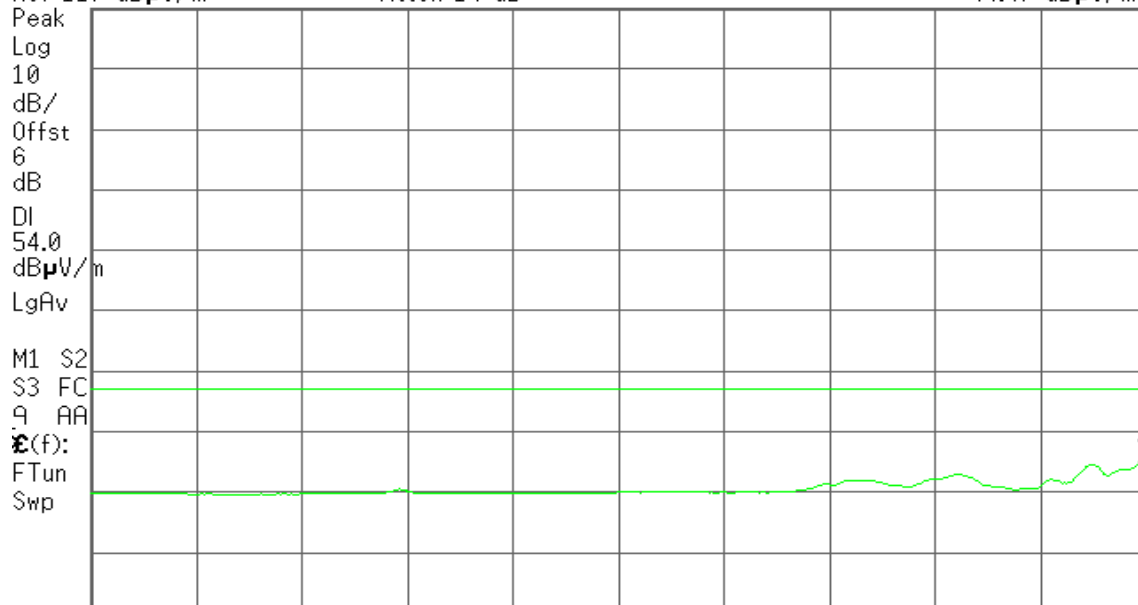
Agilent

T

Ref 117 dB μ V/m

#Atten 14 dB

Mkr1 2.390 00 GHz

44.47 dB μ V/m

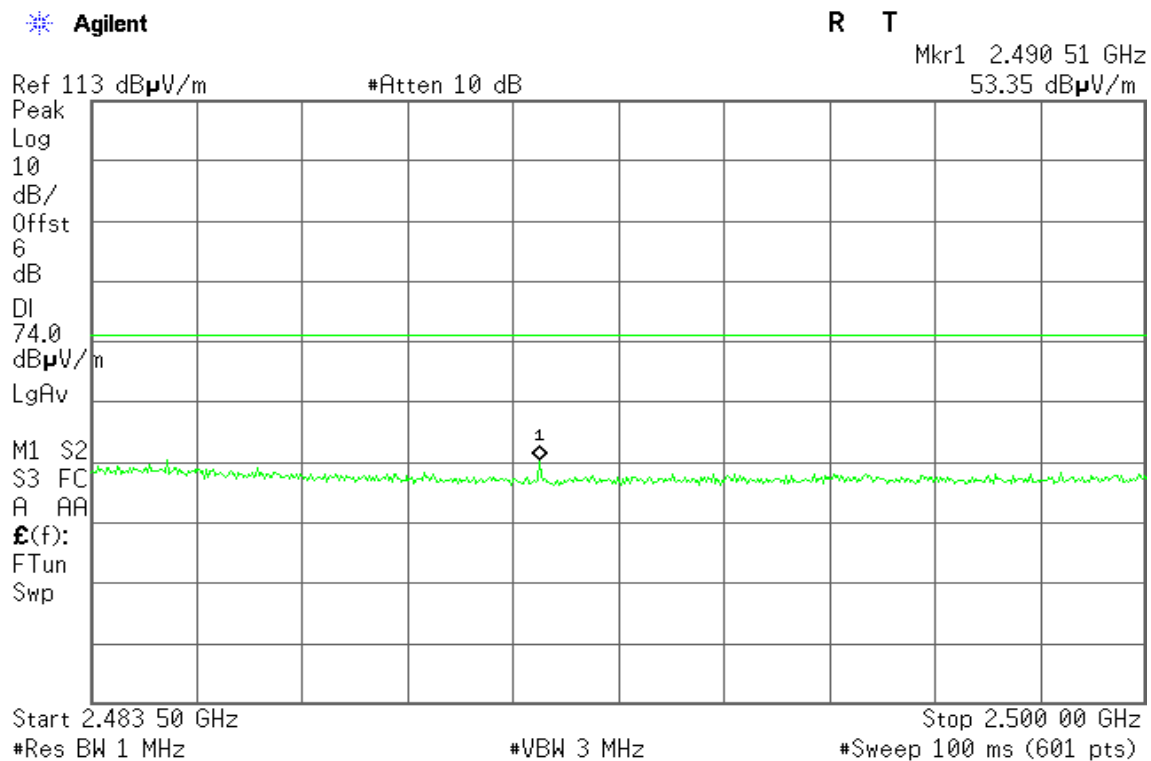
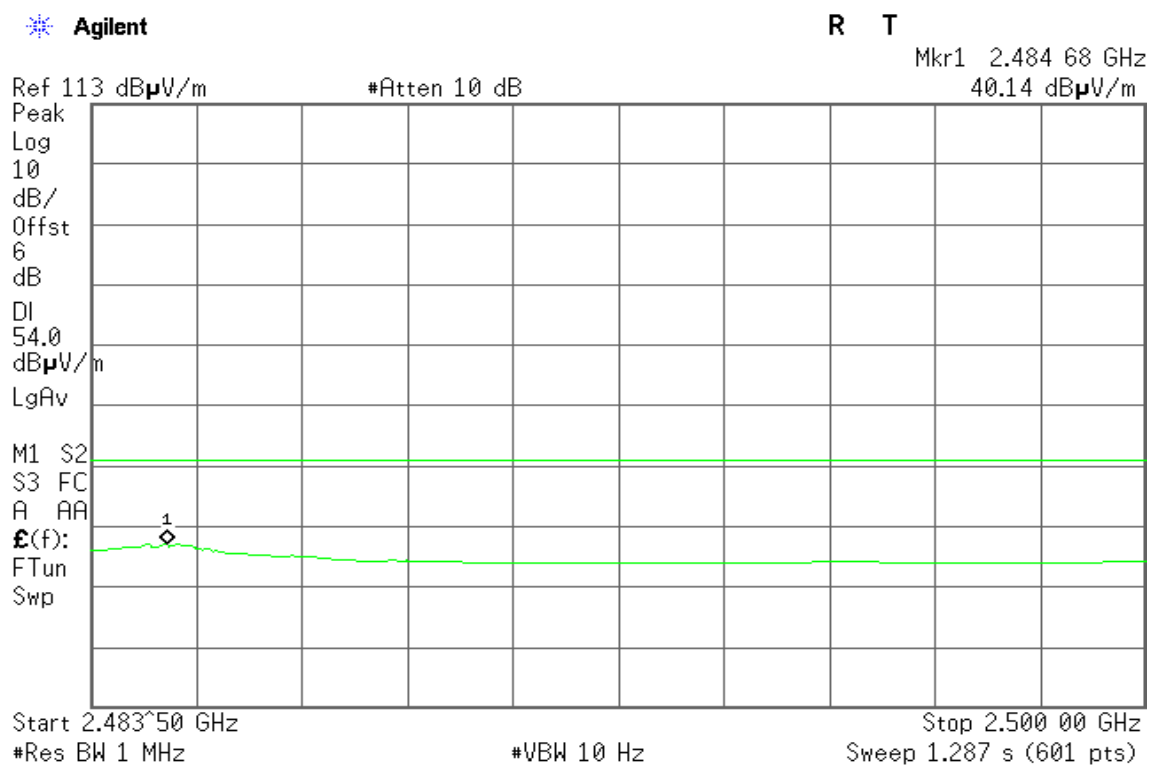
Start 2.310 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.390 00 GHz

Sweep 6.238 s (601 pts)

**Band Edges (IEEE 802.11b / CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.484 00 GHz

58.35 dB μ V/mRef 113 dB μ V/m

#Atten 10 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V/m

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.483 50 GHz

#Res BW 1 MHz

#VBW 3 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.484 52 GHz

49.47 dB μ V/mRef 113 dB μ V/m

#Atten 10 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V/m

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

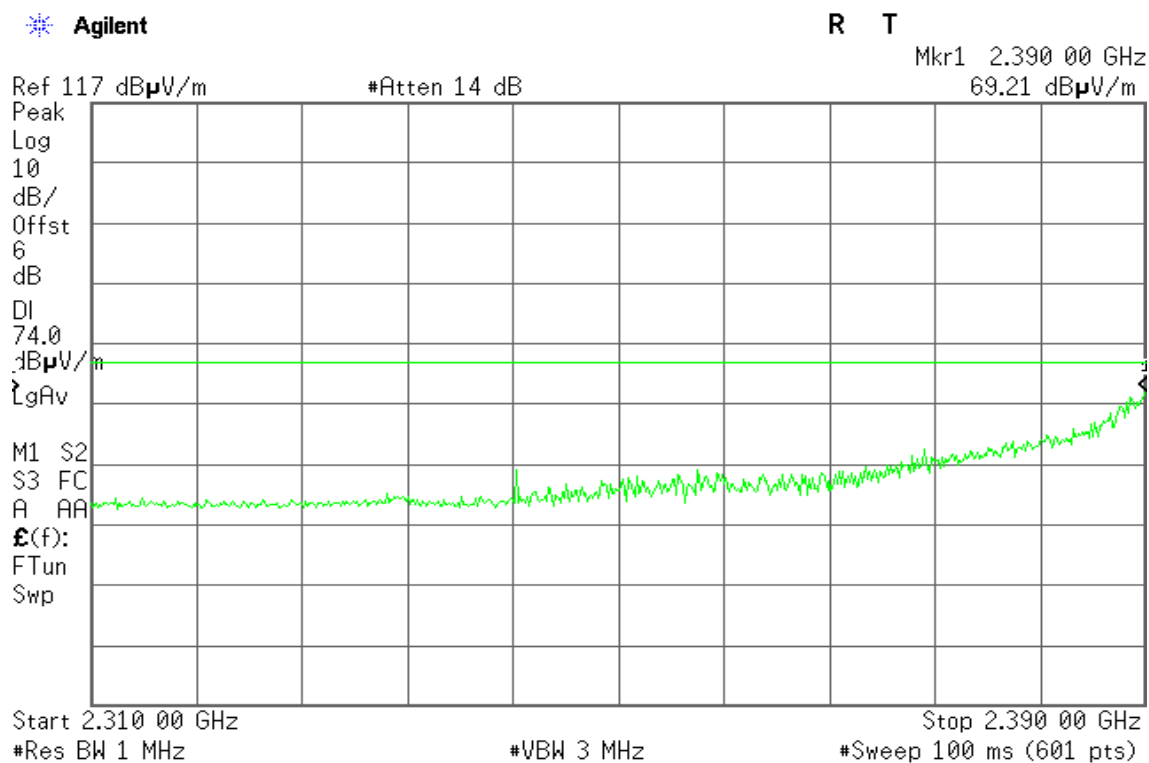
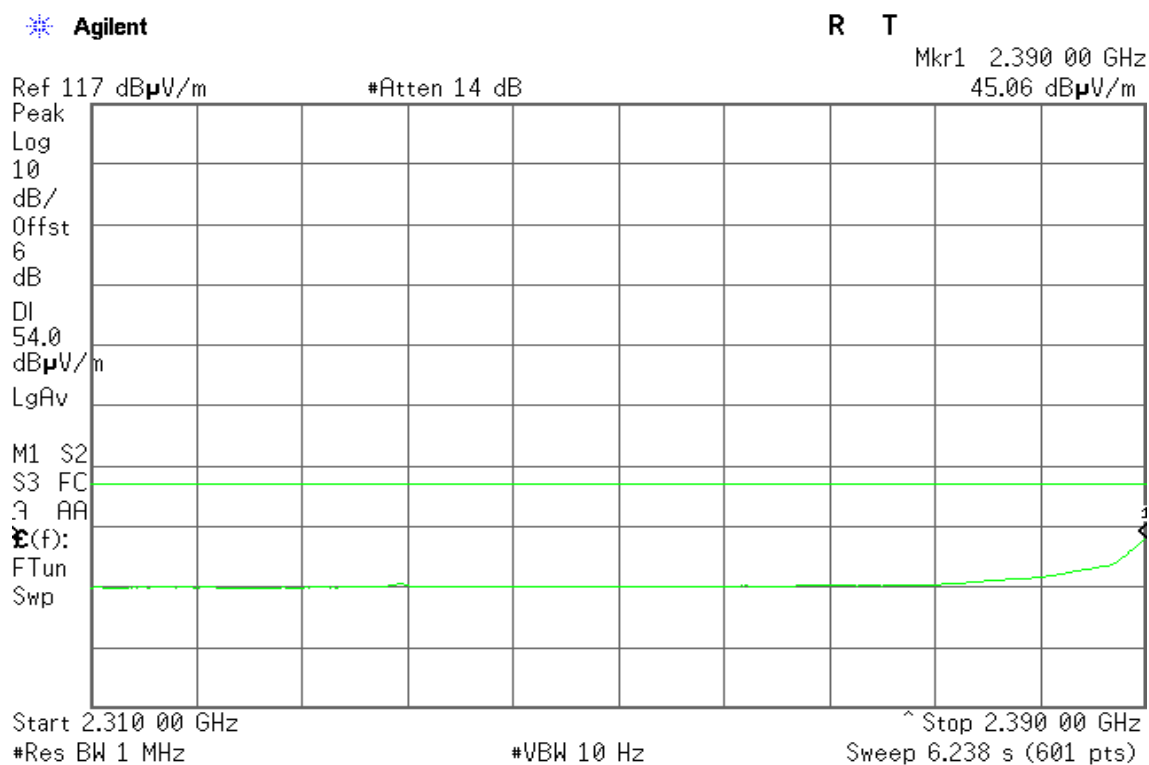
Start 2.483 50 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 1.287 s (601 pts)

**Band Edges (IEEE 802.11g / CH Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**



Detector mode: Peak

Polarity: Horizontal

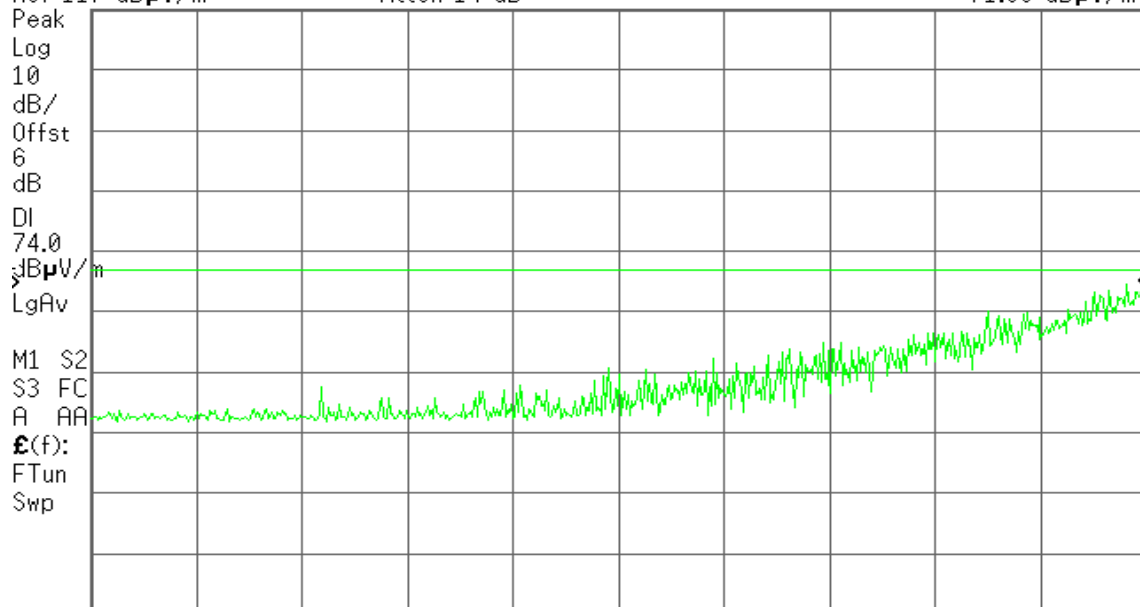
Agilent

T

Ref 117 dB μ V/m

#Atten 14 dB

Mkr1 2.390 00 GHz

71.09 dB μ V/m

Start 2.310 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

Stop 2.390 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

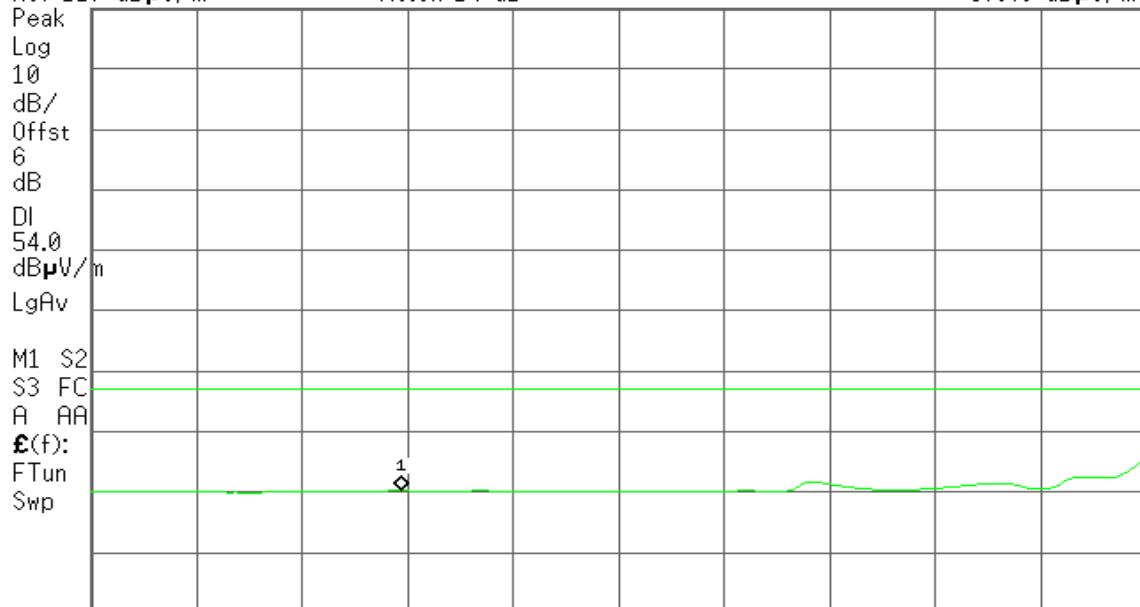
Agilent

T

Ref 117 dB μ V/m

#Atten 14 dB

Mkr1 2.333 47 GHz

37.48 dB μ V/m

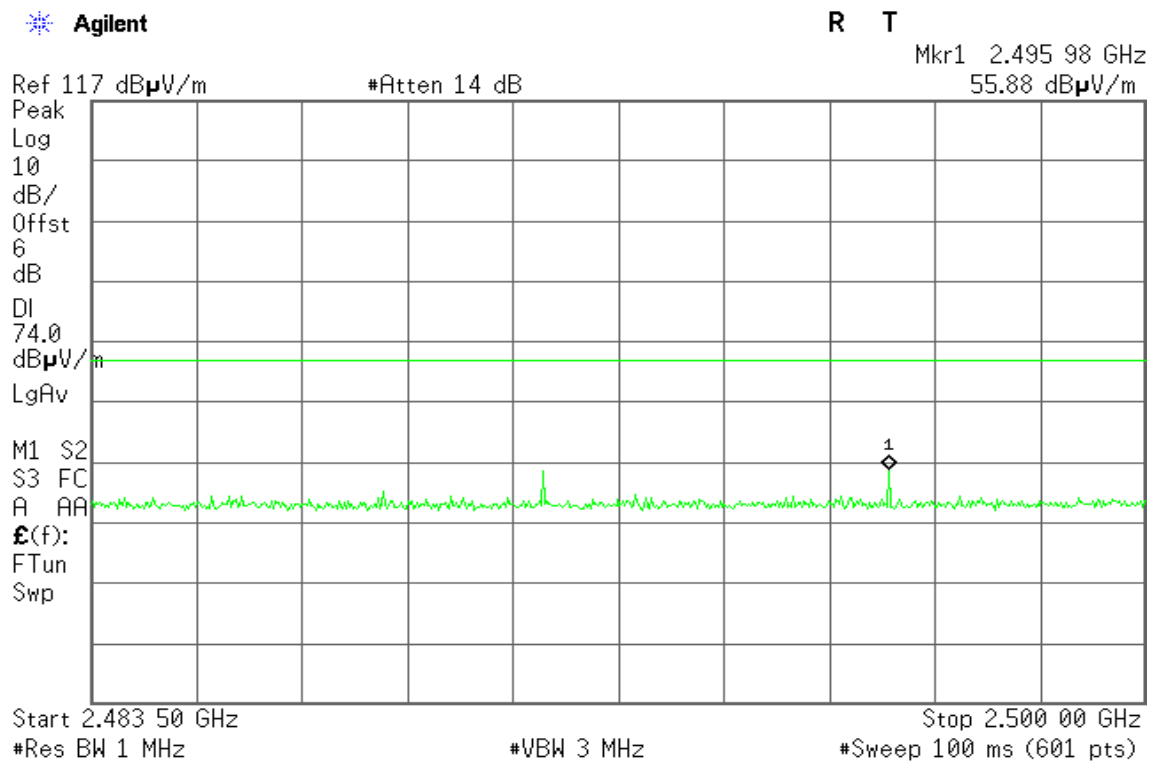
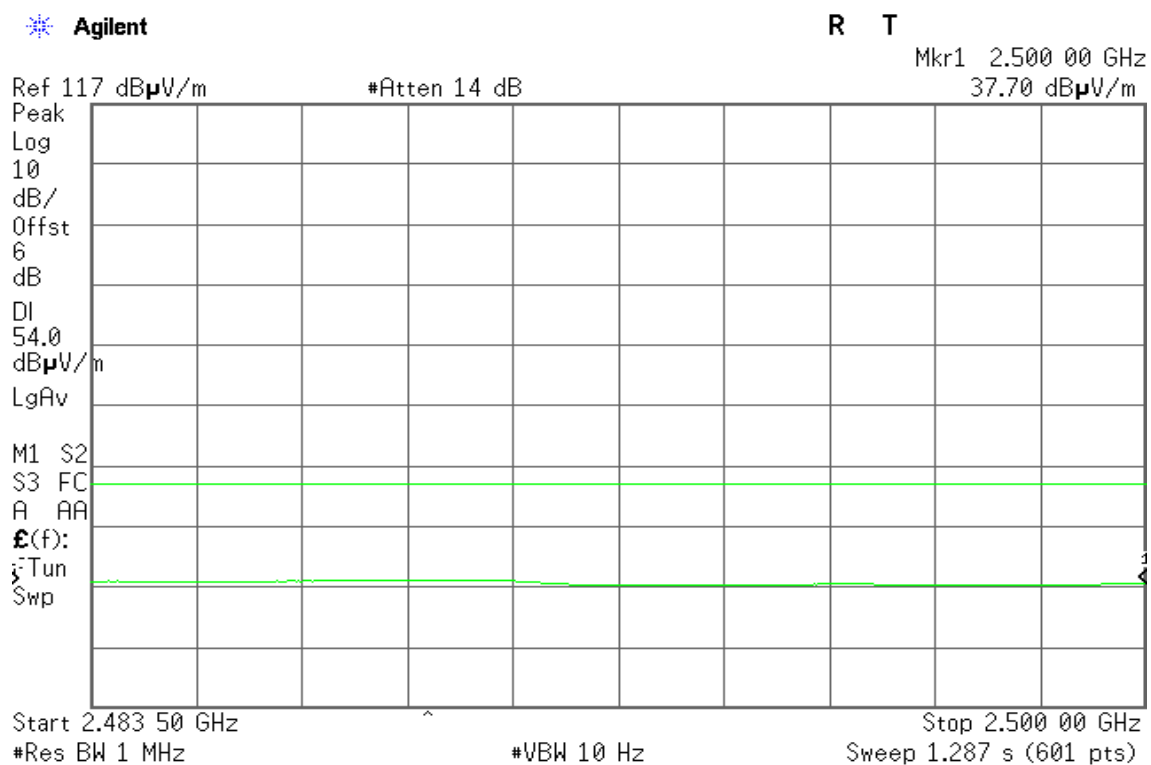
Start 2.310 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.390 00 GHz

Sweep 6.238 s (601 pts)

**Band Edges (IEEE 802.11g / CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 91 GHz

71.85 dB μ V/mRef 117 dB μ V/m

#Atten 14 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V/m

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.483 50 GHz

#Res BW 1 MHz

#VBW 3 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.488 70 GHz

45.25 dB μ V/mRef 117 dB μ V/m

#Atten 14 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V/m

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.483 50 GHz

#Res BW 1 MHz

#VBW 10 Hz

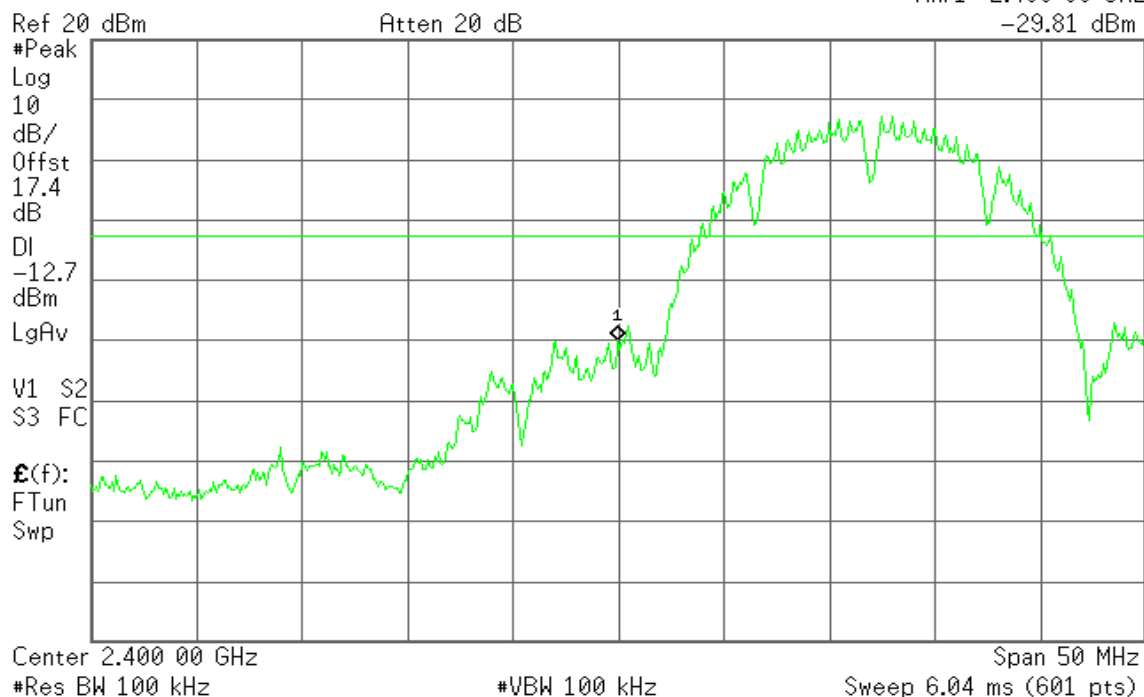
Stop 2.500 00 GHz

Sweep 1.287 s (601 pts)

**Conducted Band Edge****IEEE 802.11b****(CH Low)**

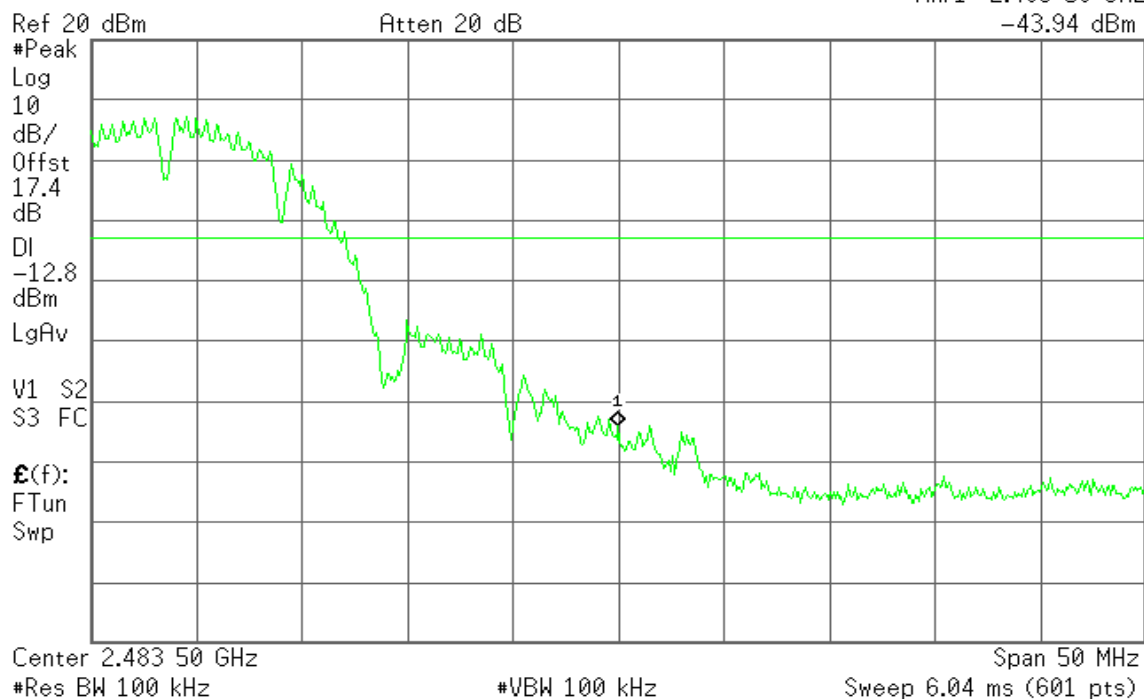
* Agilent 13:16:17 Apr 27, 2012

R T

Mkr1 2.400 00 GHz
-29.81 dBm**(CH High)**

* Agilent 13:31:30 Apr 27, 2012

R T

Mkr1 2.483 50 GHz
-43.94 dBm

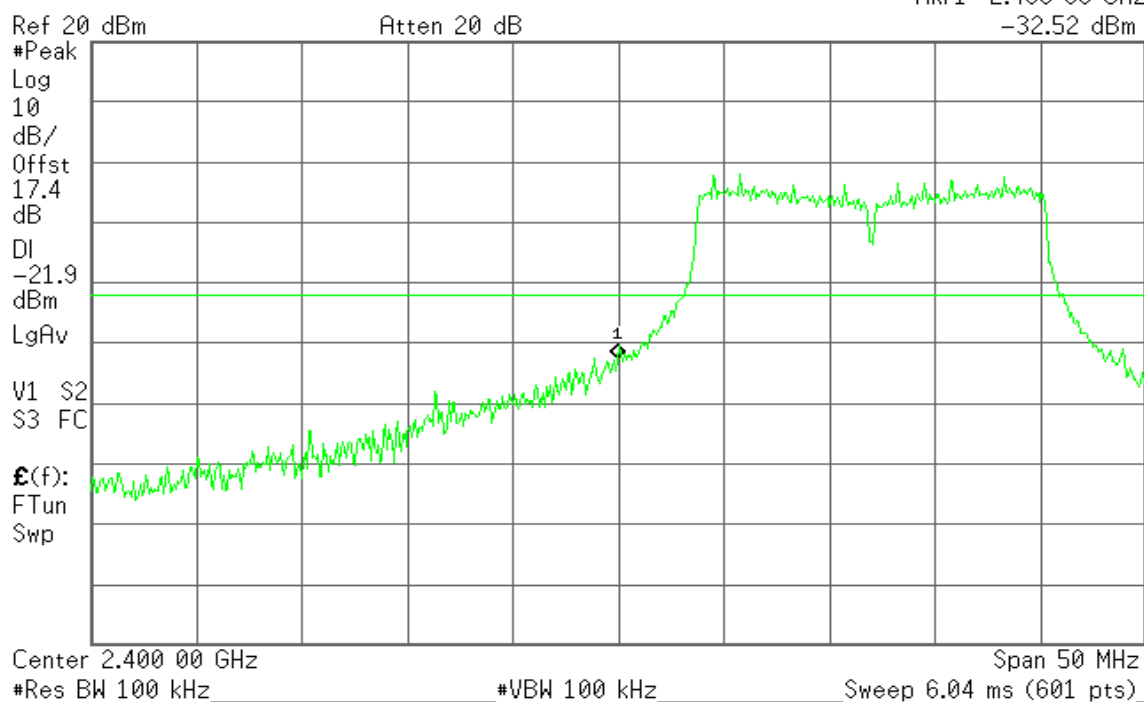


IEEE 802.11g

(CH Low)

* Agilent 13:37:57 Apr 27, 2012

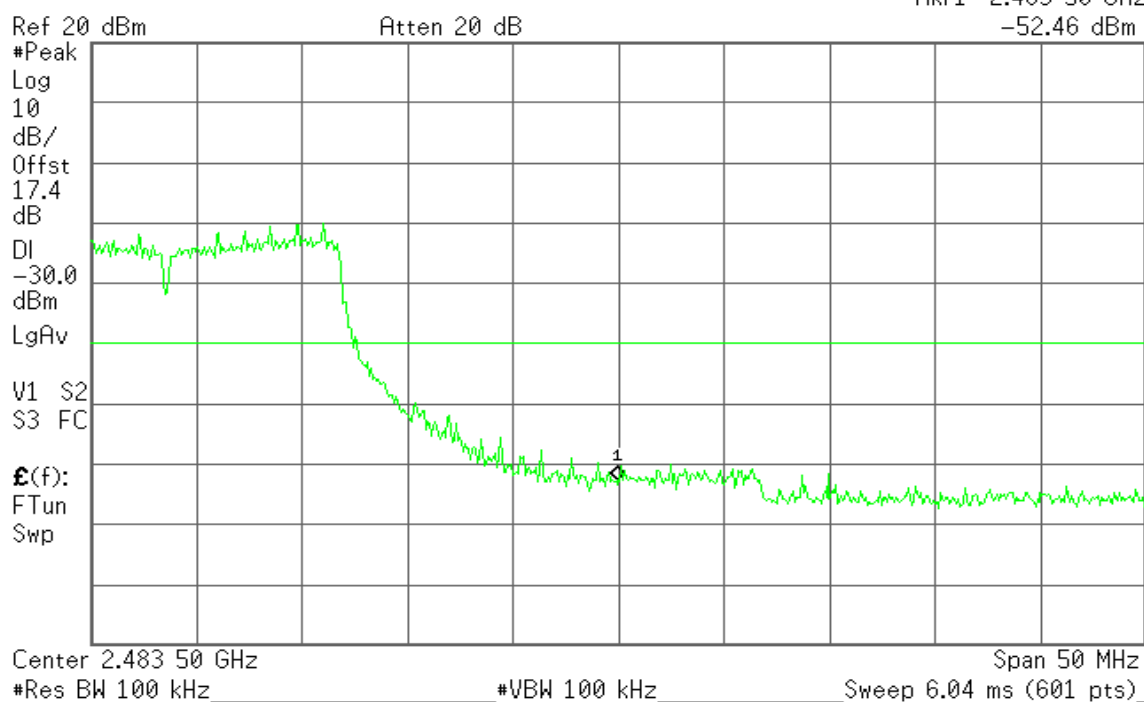
R T

Mkr1 2.400 00 GHz
-32.52 dBm

(CH High)

* Agilent 13:49:32 Apr 27, 2012

R T

Mkr1 2.483 50 GHz
-52.46 dBm




7.4 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. Set the RBW = 100 kHz, VBW = 300 kHz, Span > 5% of the bandwidth, Detector = peak, Trace mode = max hold, Sweep = auto couple. Record the maximum reading. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted.

**Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	6.91	8.00	PASS
Mid	2442	6.72		PASS
High	2462	7.47		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-1.43	8.00	PASS
Mid	2442	-1.52		PASS
High	2462	-9.19		PASS



Test Plot

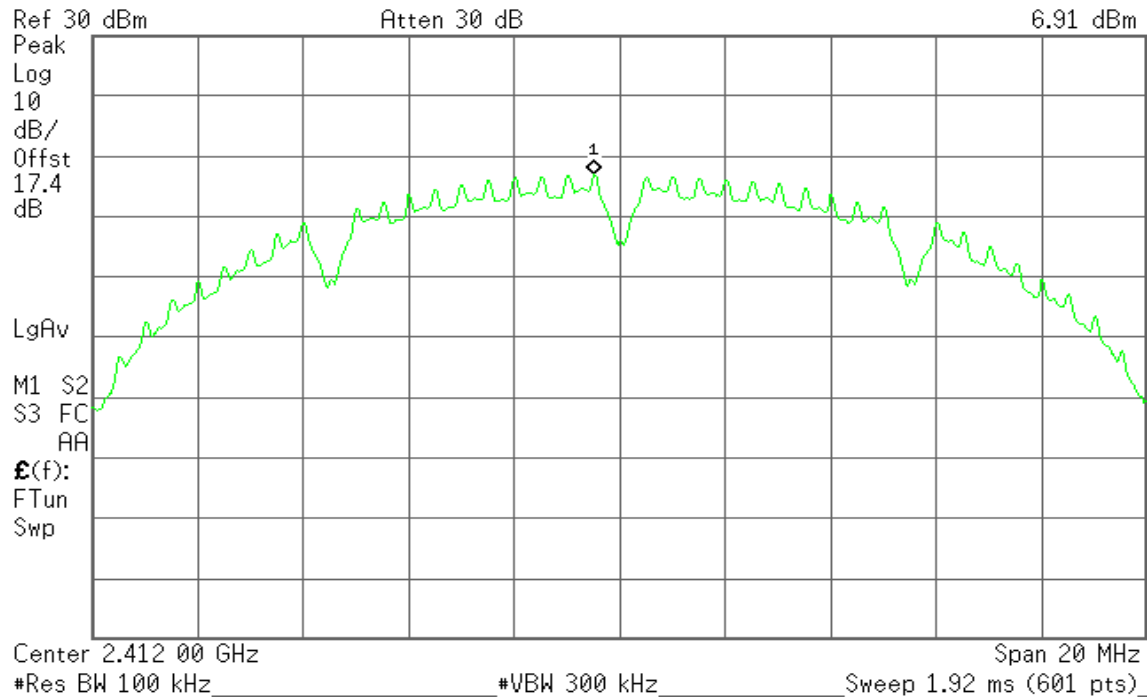
IEEE 802.11b

PPSD (CH Low)

Agilent 14:01:31 Apr 27, 2012

R T

Mkr1 2.411 50 GHz
6.91 dBm

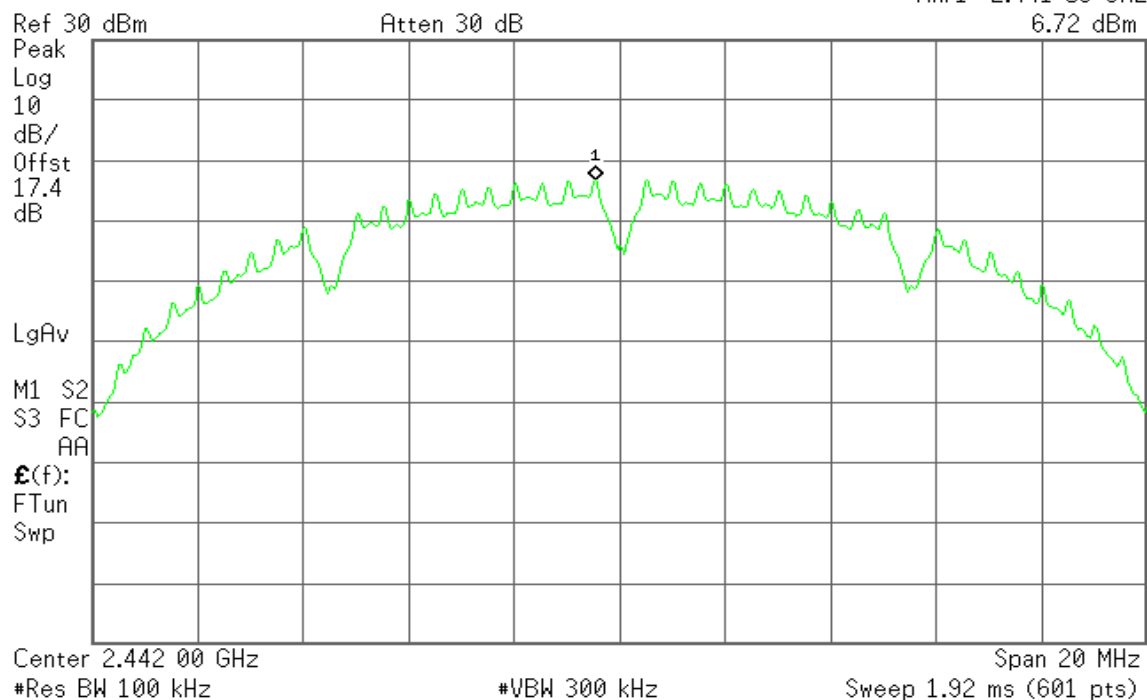


PPSD (CH Mid)

Agilent 14:04:30 Apr 27, 2012

R T

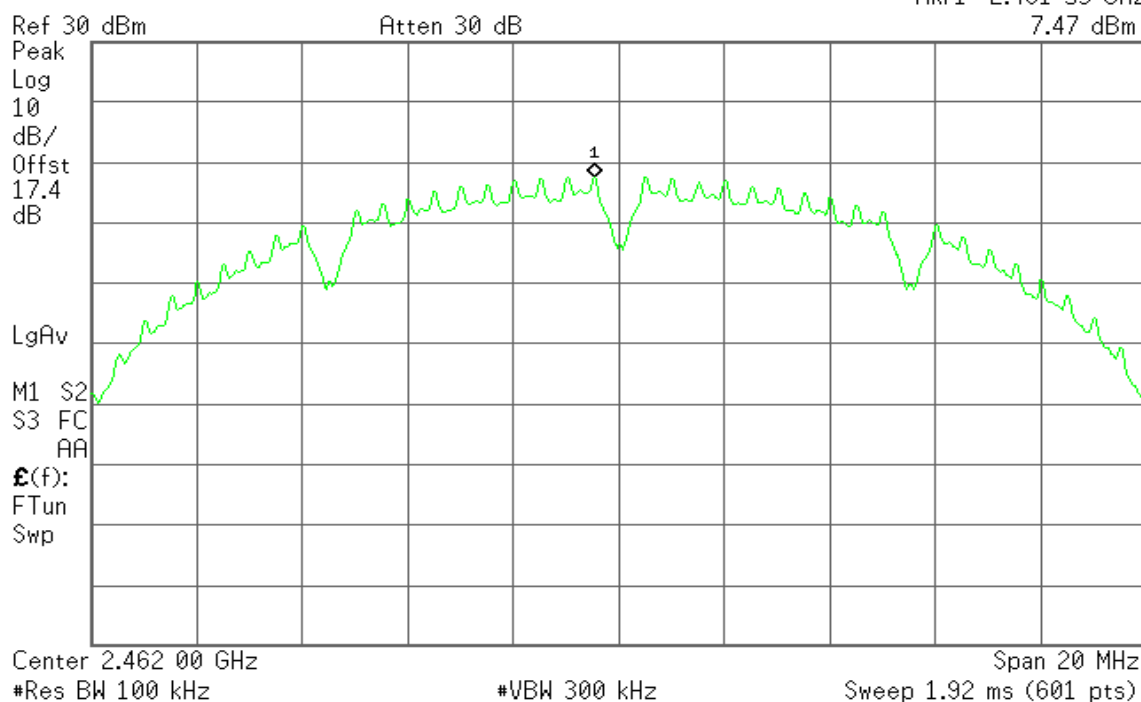
Mkr1 2.441 53 GHz
6.72 dBm



**PPSD (CH High)**

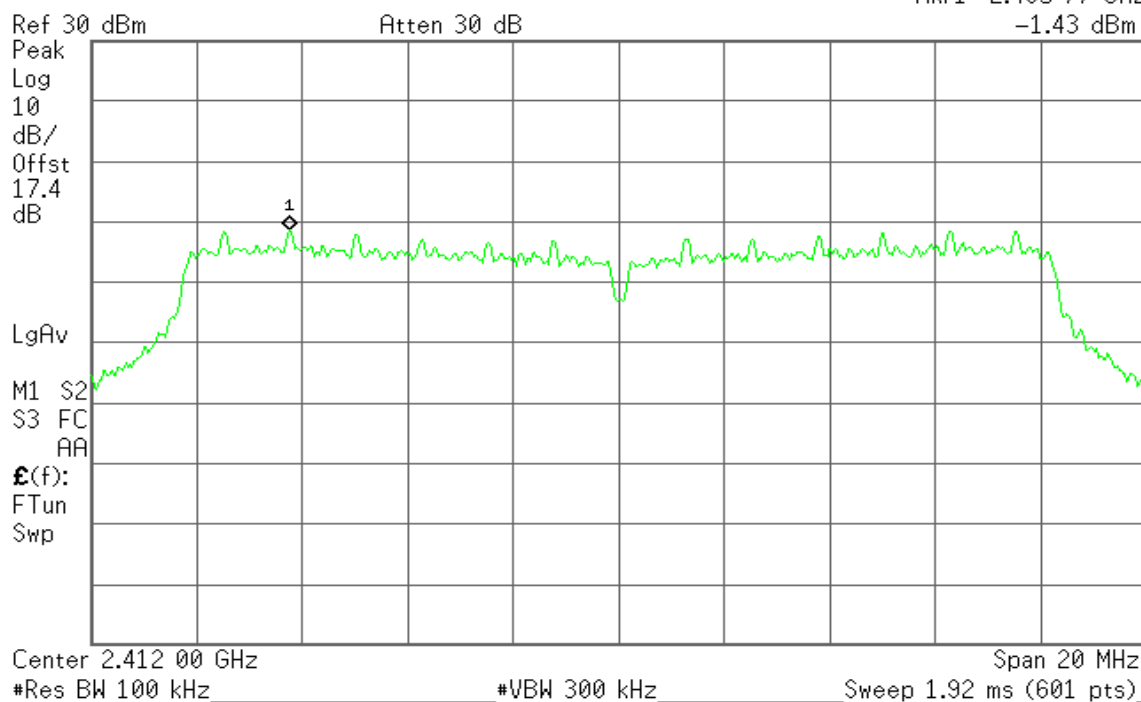
* Agilent 14:05:18 Apr 27, 2012

R T

Mkr1 2.461 53 GHz
7.47 dBm**IEEE 802.11g****PPSD (CH Low)**

* Agilent 14:02:38 Apr 27, 2012

R T

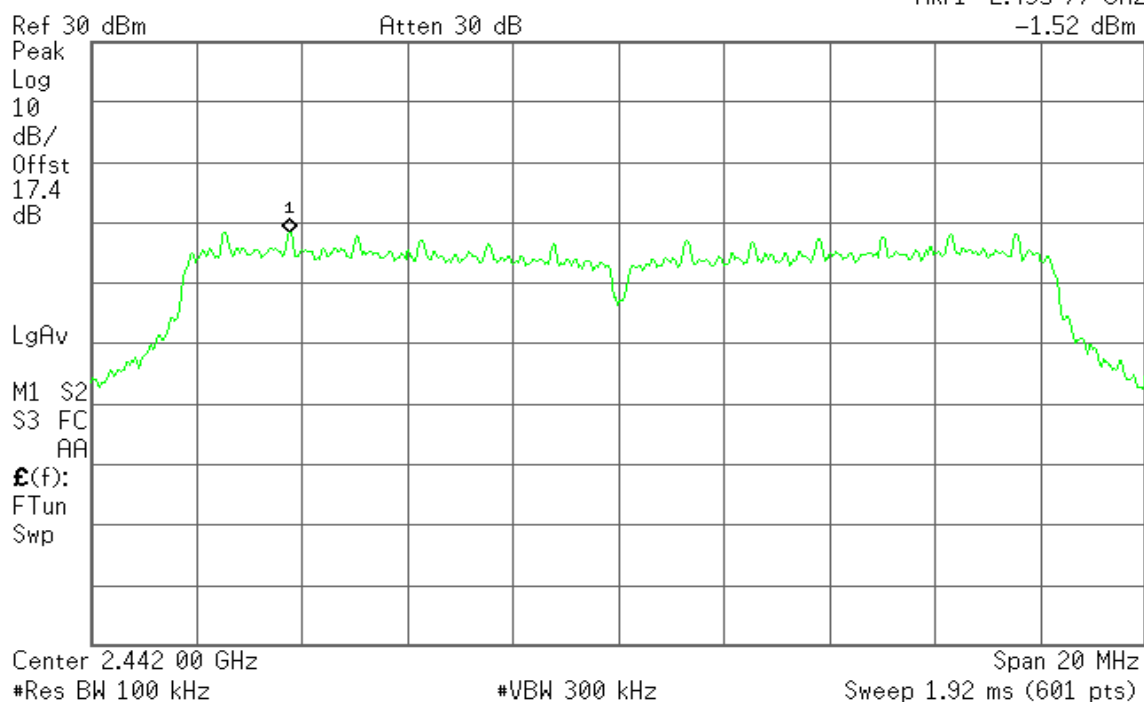
Mkr1 2.405 77 GHz
-1.43 dBm



PPSD (CH Mid)

* Agilent 14:03:46 Apr 27, 2012

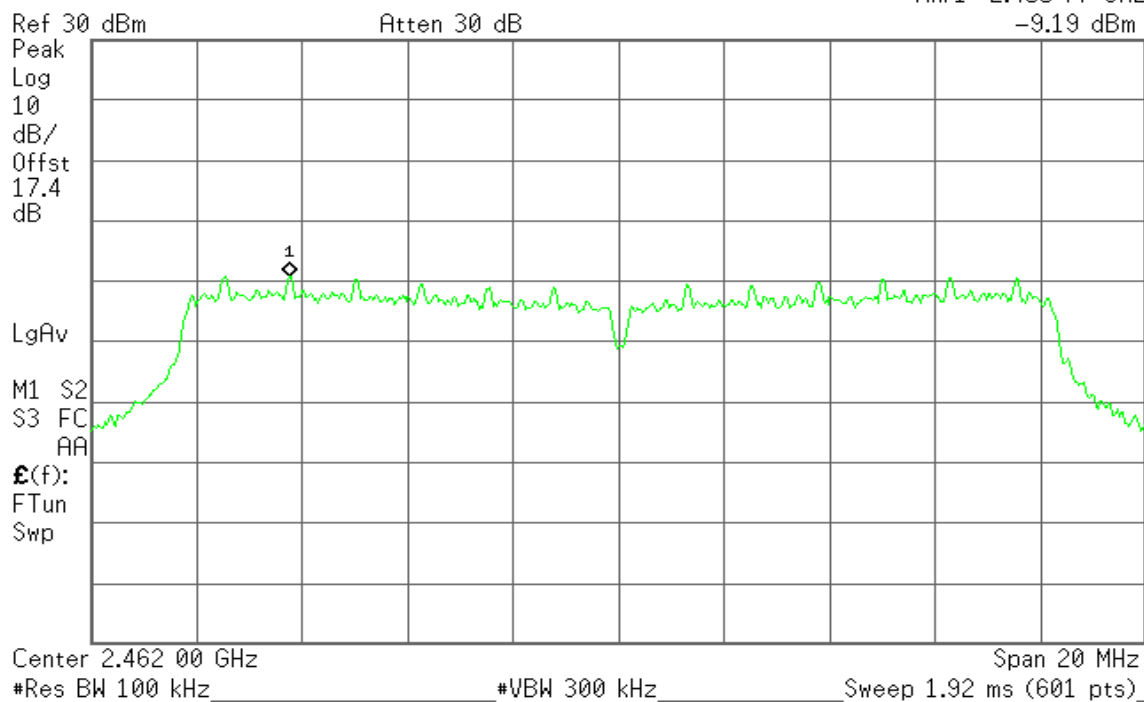
R T

Mkr1 2.435 77 GHz
-1.52 dBm

PPSD (CH High)

* Agilent 14:06:10 Apr 27, 2012

R T

Mkr1 2.455 77 GHz
-9.19 dBm




7.5 SPURIOUS EMISSIONS

7.5.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. Set the RBW=100 kHz and VBW= 300 kHz. Investigate the frequency from 30 MHz to 26 GHz with L, M and H channels separately.

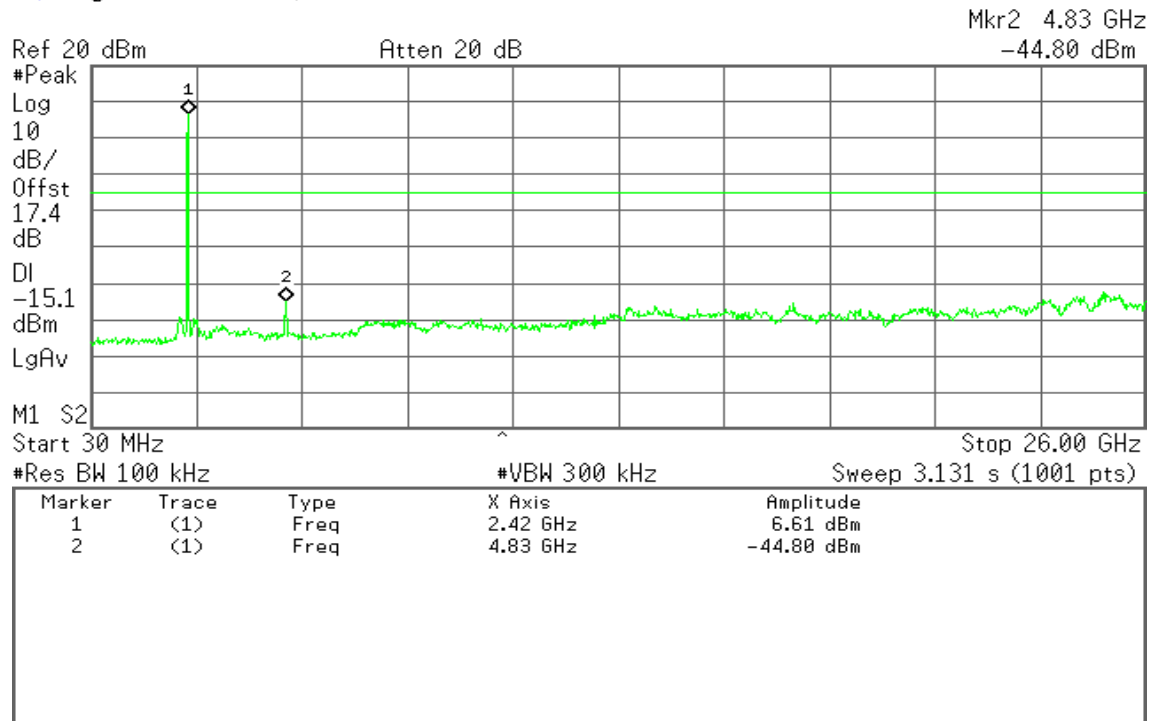
TEST RESULTS

No non-compliance noted.

**Test Plot****IEEE 802.11b mode****CH Low**

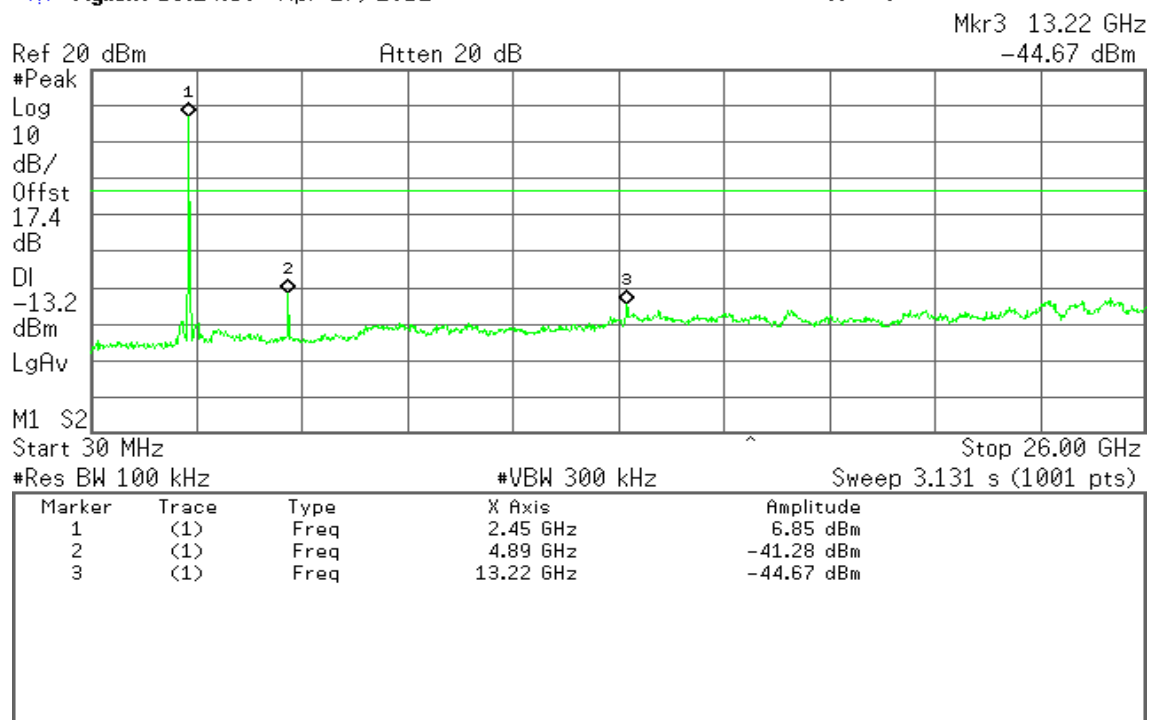
* Agilent 13:17:51 Apr 27, 2012

R T

**CH Mid**

* Agilent 13:24:58 Apr 27, 2012

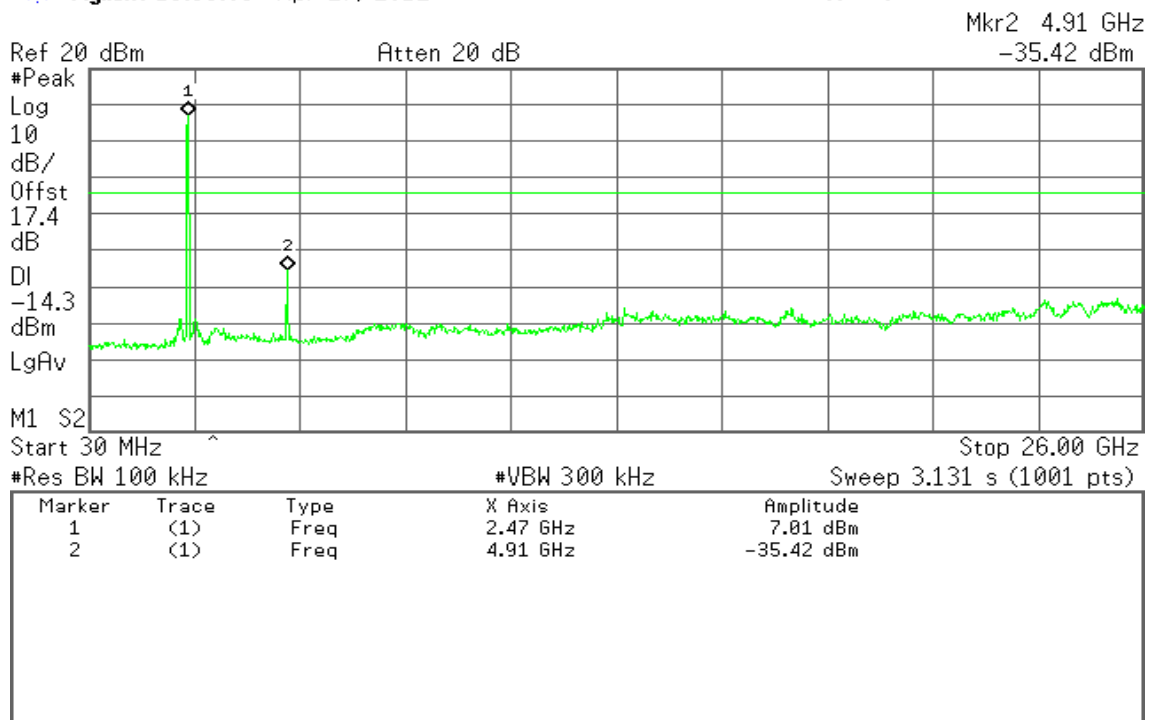
R T



**CH High**

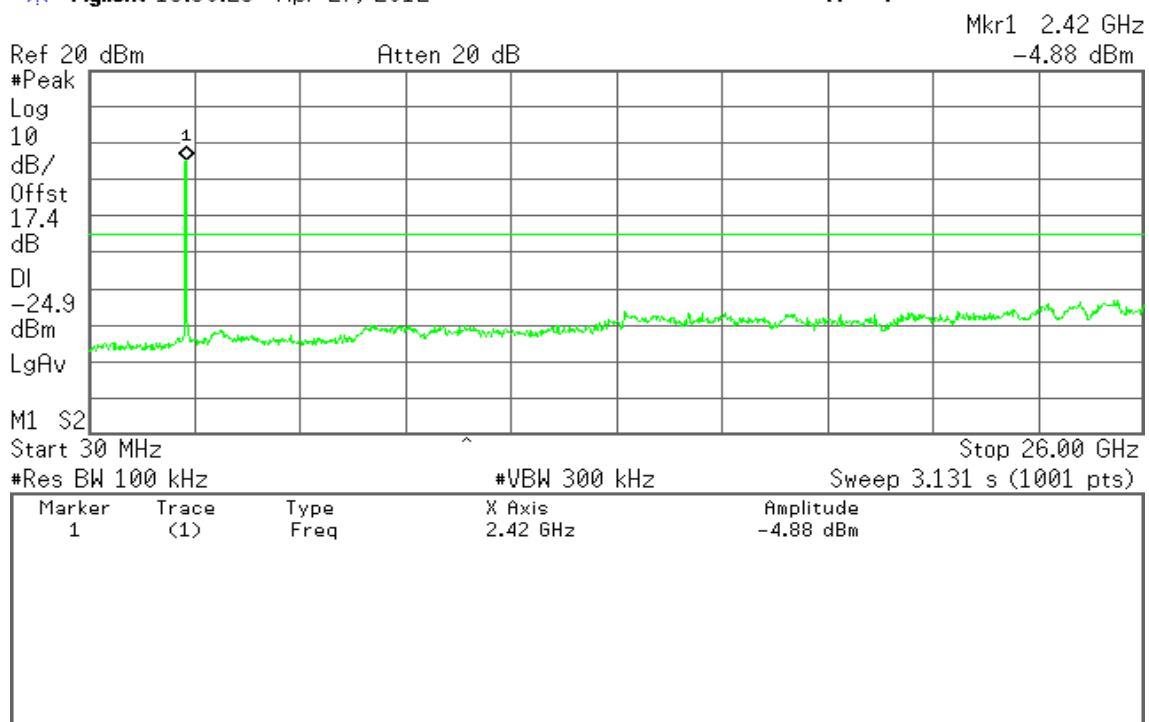
* Agilent 13:33:03 Apr 27, 2012

R T

**IEEE 802.11g mode****CH Low**

* Agilent 13:39:23 Apr 27, 2012

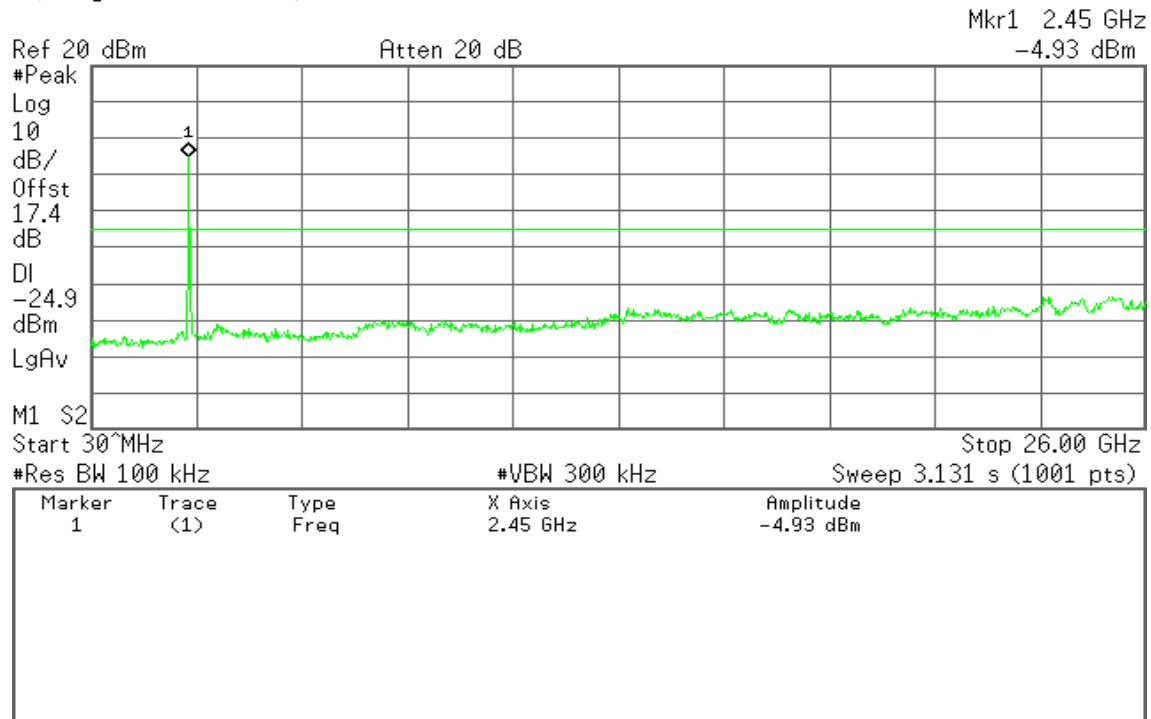
R T



**CH Mid**

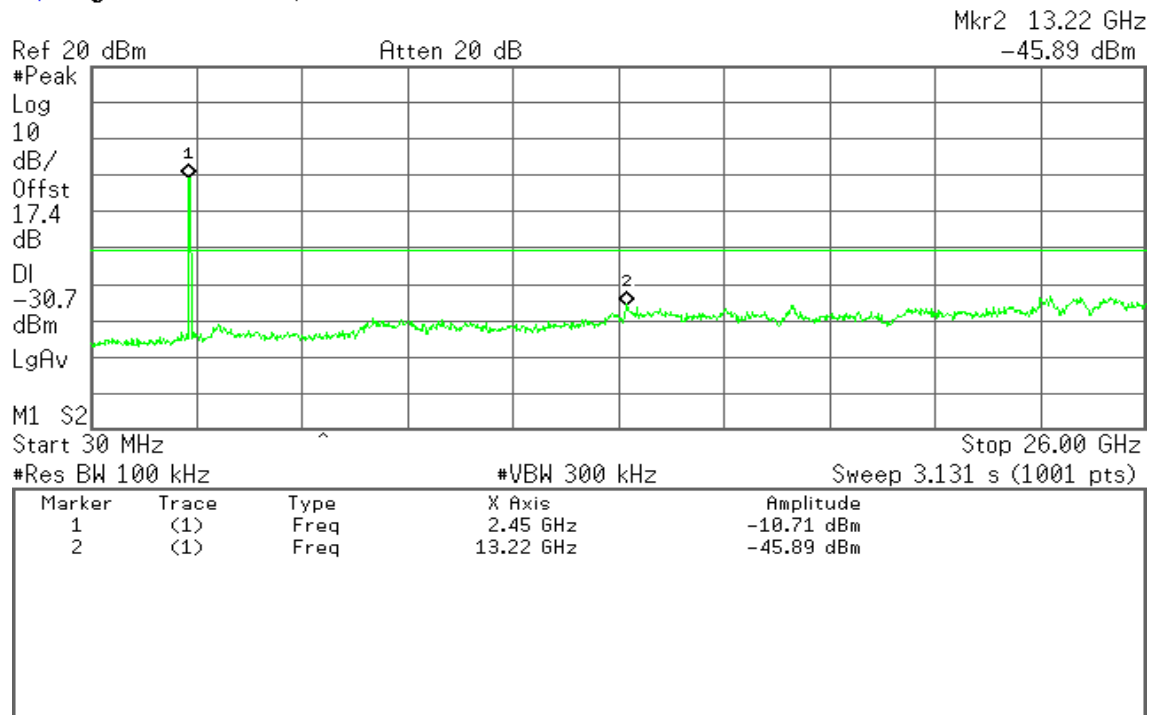
* Agilent 13:44:12 Apr 27, 2012

R T

**CH High**

* Agilent 13:50:55 Apr 27, 2012

R T





7.5.2 Radiated Emissions

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

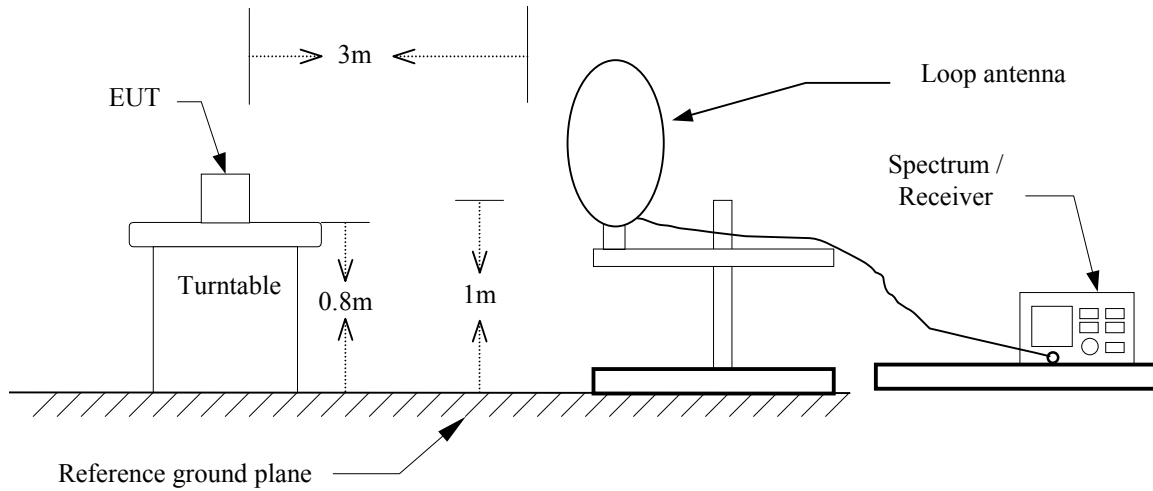
2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

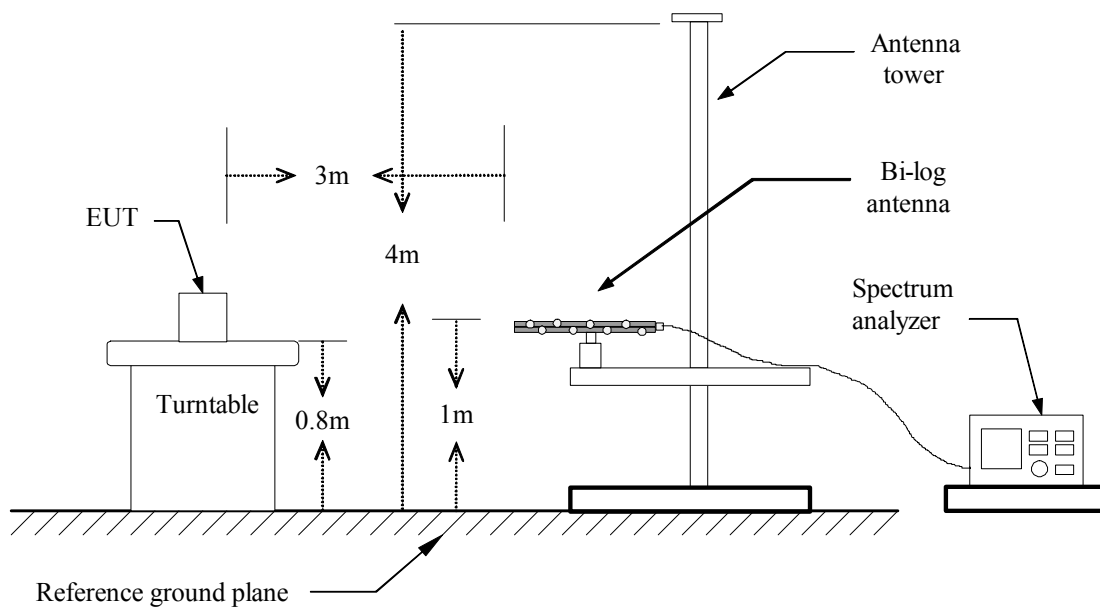


Test Configuration

9kHz ~ 30MHz

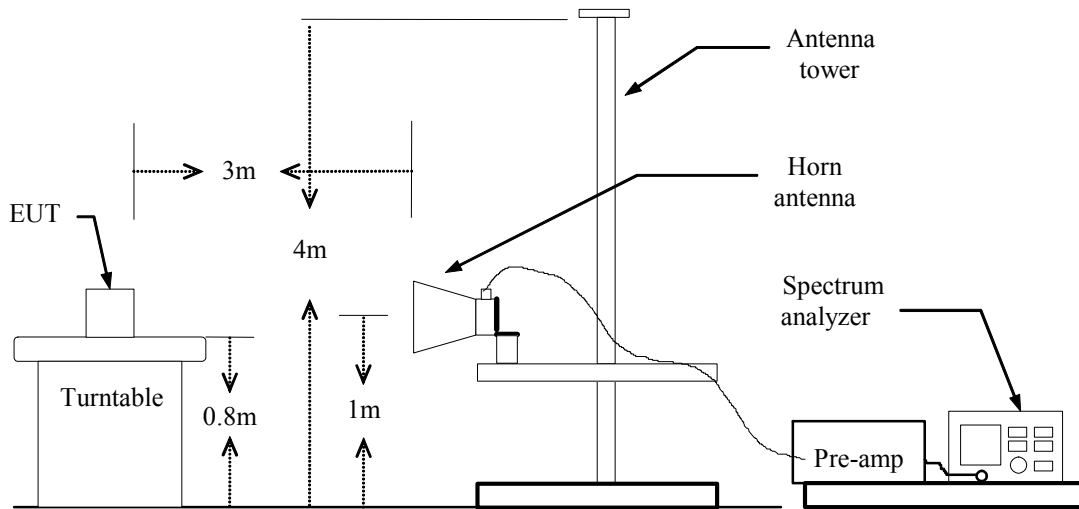


30MHz ~ 1GHz





Above 1 GHz





TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** April 26, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
91.43	76.22	-33.23	42.99	43.50	-0.51	QP	V
143.17	71.11	-28.09	43.02	43.50	-0.48	QP	V
186.82	65.30	-29.20	36.10	43.50	-7.40	QP	V
500.45	52.63	-22.22	30.41	46.00	-15.59	QP	V
545.72	56.99	-21.66	35.33	46.00	-10.67	QP	V
933.72	57.25	-16.12	41.13	46.00	-4.87	Peak	V
135.08	70.50	-27.92	42.58	43.50	-0.92	QP	H
144.78	68.22	-28.15	40.07	43.50	-3.43	QP	H
186.82	66.22	-29.20	37.02	43.50	-6.48	QP	H
233.70	73.23	-29.03	44.20	46.00	-1.80	QP	H
726.78	58.47	-18.52	39.95	46.00	-6.05	QP	H
827.02	60.47	-17.22	43.25	46.00	-2.75	QP	H

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz****Operation Mode:** IEEE 802.11b / TX / CH Low**Test Date:** April 26, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1090.00	62.76	---	-10.98	51.78	---	74.00	54.00	-2.22	Peak	V
4825.00	57.19	48.51	2.61	59.80	51.12	74.00	54.00	-2.88	AVG	V
N/A										
1333.33	60.48	---	-10.72	49.75	---	74.00	54.00	-4.25	Peak	H
1980.00	58.64	53.95	-5.67	52.96	48.28	74.00	54.00	-5.72	AVG	H
2613.33	58.27	49.70	-3.48	54.79	46.22	74.00	54.00	-7.78	AVG	H
4825.00	51.36	47.10	2.61	53.97	49.71	74.00	54.00	-4.29	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11b / TX / CH Mid**Test Date:** April 26, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1090.00	63.12	55.48	-10.98	52.14	44.50	74.00	54.00	-9.50	AVG	V
4883.33	49.35	47.41	2.73	52.08	50.14	74.00	54.00	-6.59	AVG	V
N/A										
1980.00	58.38	53.99	-5.67	52.71	48.32	74.00	54.00	-5.68	AVG	H
2643.33	57.81	52.30	-3.38	54.42	48.92	74.00	54.00	-5.08	AVG	H
4883.33	52.97	50.12	2.73	55.69	52.85	74.00	54.00	-1.15	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11b / TX / CH High**Test Date:** April 26, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1090.00	62.16	---	-10.98	51.18	---	74.00	54.00	-2.82	Peak	V
4925.00	54.01	50.46	2.81	56.82	53.27	74.00	54.00	-0.73	AVG	V
N/A										
1980.00	58.44	54.55	-5.67	52.77	48.88	74.00	54.00	-5.12	AVG	H
4925.00	54.91	49.90	2.81	57.72	52.71	74.00	54.00	-1.29	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11g / TX / CH Low**Test Date:** April 26, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1090.00	62.53	---	-10.98	51.55	---	74.00	54.00	-2.45	Peak	V
N/A										
2483.33	70.67	45.73	-3.94	66.73	41.79	74.00	54.00	-12.21	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11g / TX / CH Mid**Test Date:** April 26, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1090.00	62.13	---	-10.98	51.16	---	74.00	54.00	-2.84	Peak	V
N/A										
1980.00	58.12	54.47	-5.67	52.45	48.80	74.00	54.00	-5.20	AVG	H
2493.33	69.58	42.33	-3.90	65.68	38.43	74.00	54.00	-15.57	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11g / TX / CH High**Test Date:** April 26, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1090.00	62.82	---	-10.98	51.84	---	74.00	54.00	-2.16	Peak	V
N/A										
1980.00	58.29	54.47	-5.67	52.62	48.80	74.00	54.00	-5.20	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.6 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

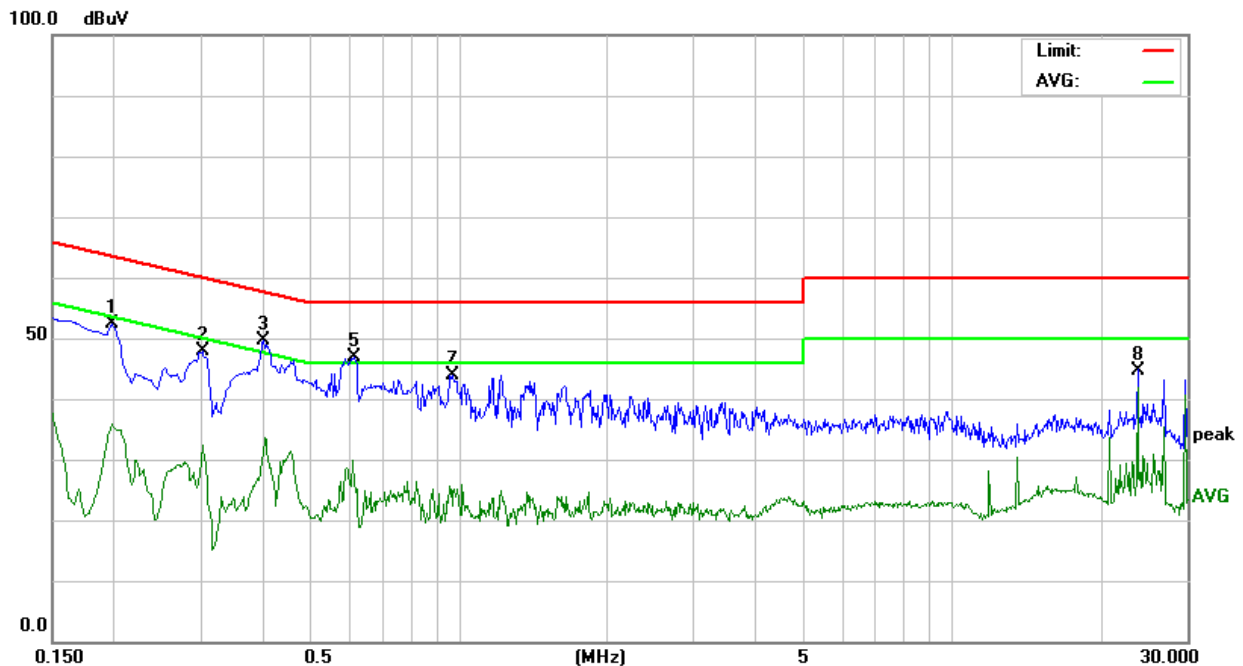
1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**

Model No.	PPS1831	6dB Bandwidth	10 kHz
Environmental Conditions	22°C, 55% RH, 1005mbar	Test Mode	Mode 1
Tested by	Andy Lin	Phase	L1
Standard	FCC CLASS B		

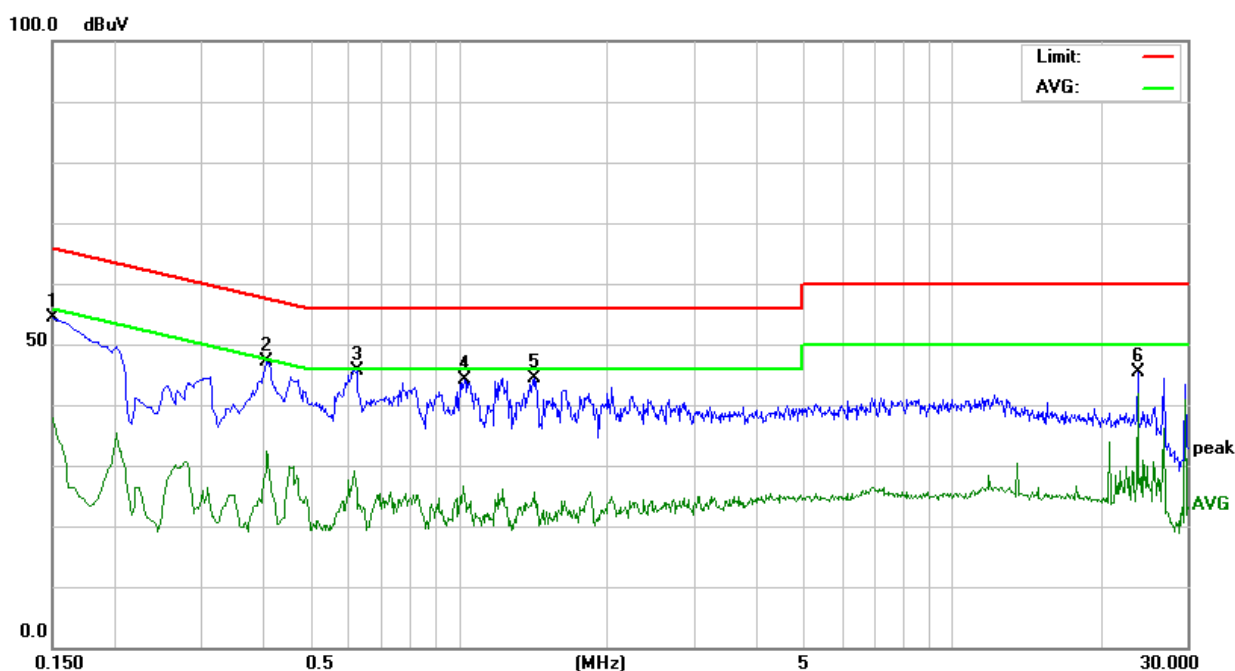


Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.1980	42.37	10.01	52.38	63.69	-11.31	P	L1
0.3020	37.81	10.02	47.83	60.19	-12.36	P	L1
0.4020	39.55	10.03	49.58	57.81	-8.23	P	L1
0.4020	23.50	10.03	33.53	47.81	-14.28	A	L1
0.6140	36.89	10.04	46.93	56.00	-9.07	P	L1
0.6140	19.77	10.04	29.81	46.00	-16.19	A	L1
0.9700	33.84	10.09	43.93	56.00	-12.07	P	L1
23.8620	33.77	10.98	44.75	60.00	-15.25	P	L1

- Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).
2. Those frequencies only show peak emission level because that was below the Average limit, so no need to check average anymore.



Model No.	PPS1831	6dB Bandwidth	10 kHz
Environmental Conditions	22°C, 55% RH, 1005mbar	Test Mode	Mode 1
Tested by	Andy Lin	Phase	L2
Standard	FCC CLASS B		



Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.1500	44.35	10.07	54.42	65.99	-11.57	P	L2
0.4100	37.04	10.04	47.08	57.65	-10.57	P	L2
0.6220	35.61	10.04	45.65	56.00	-10.35	P	L2
1.0300	34.05	10.09	44.14	56.00	-11.86	P	L2
1.4260	34.20	10.12	44.32	56.00	-11.68	P	L2
23.8620	34.33	10.95	45.28	60.00	-14.72	P	L2

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).
2. The emission level was or more than 2dB below the Average limit, so no re-check anymore.