

FCC RF Test Report

APPLICANT : ViewSonic Corporation
EQUIPMENT : Smart Phone
BRAND NAME : ViewSonic
MODEL NAME : VS14032
FCC ID : GSS-VS14032
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Nov. 28, 2011 and completely tested on Dec. 24, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : GSS-VS14032

Page Number : 1 of 64

Report Issued Date : Dec. 28, 2011

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 RF Output Power	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 RF Utility	9
3 TEST RESULT	10
3.1 Number of Channel Measurement	10
3.2 20dB Bandwidth Measurement	12
3.3 Hopping Channel Separation Measurement	25
3.4 Dwell Time Measurement	28
3.5 Peak Output Power Measurement	30
3.6 Band Edges Measurement	33
3.7 Spurious Emission Measurement	44
3.8 AC Conducted Emission Measurement	48
3.9 Radiated Emission Measurement	52
3.10 Antenna Requirements	61
4 LIST OF MEASURING EQUIPMENT	62
5 UNCERTAINTY OF EVALUATION	63
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1N2831A	Rev. 01	Initial issue of report	Dec. 28, 2011

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.2	-	Gen 4.6.1	99% Bandwidth	-	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.8	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 18.10 dB at 0.486 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.24 dB at 2483.500 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

ViewSonic Corporation

381 Brea Canyon Road, Walnut, CA 91789, USA

1.2 Manufacturer

ViewSonic Corporation

381 Brea Canyon Road, Walnut, CA 91789, USA

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smart Phone
Brand Name	ViewSonic
Model Name	VS14032
FCC ID	GSS-VS14032
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 8.38 dBm (0.0069 W) Bluetooth EDR (2Mbps) : 7.13 dBm (0.0052 W) Bluetooth EDR (3Mbps) : 7.87 dBm (0.0061 W)
Antenna Type	PIFA Antenna with gain -3.30 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH07-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	P20G	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
5.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Band	Bluetooth RF Output Power		
Channel	00	39	78
Frequency	2402	2441	2480
Peak Power	7.85	8.38	7.93

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
3. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations, laptop / tablet modes.

The following tables are showing the test modes as the worst cases (H plane) and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	N/A	N/A
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + Camera + Battery + USB Cable (Charging from Adapter) + SIM 1 Mode 2 : GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + MPEG4 + Battry + USB Cable (Charging from Adapter) + SIM 2		
Remark:			
1. For radiated TCs, the data rate was set in 1Mbps due to the highest RF output power; only the data of these modes was reported.			
2. For conducted emission, the worst case is mode 2; only the test data of this mode was reported.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

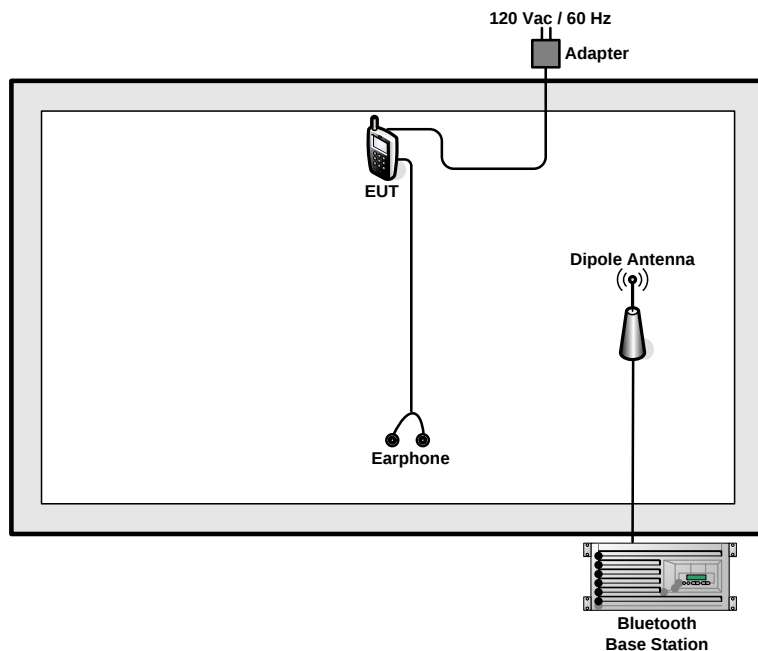

<AC Conducted Emission Mode>

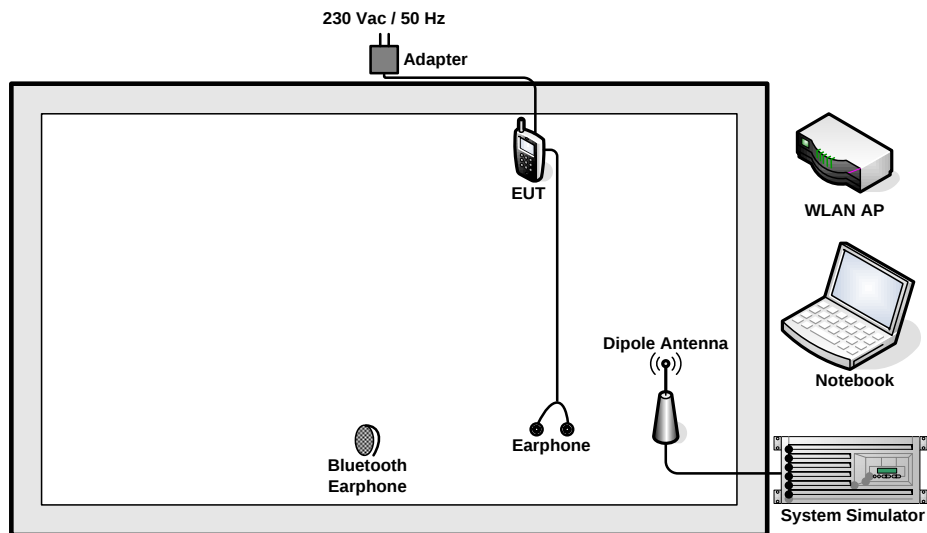

2.4 RF Utility

For Bluetooth function, the RF utility, “* # * # 767 # * # *” was installed in EUT which was programmed in order to make the EUT to contact with Bluetooth base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


3.1.4 Test Setup

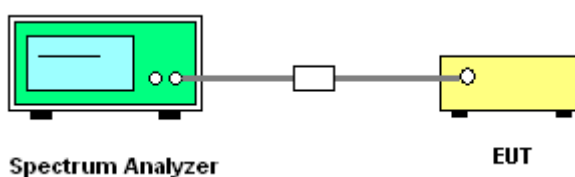


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 1~3	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

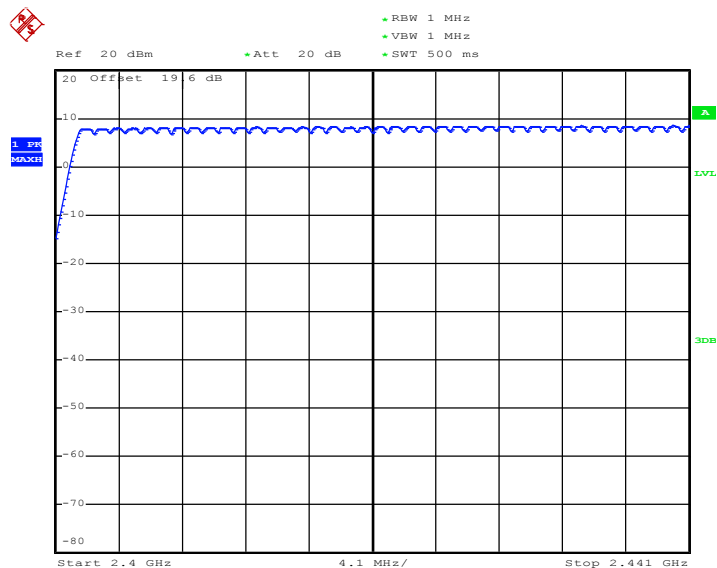

Date: 13.DEC.2011 13:58:01

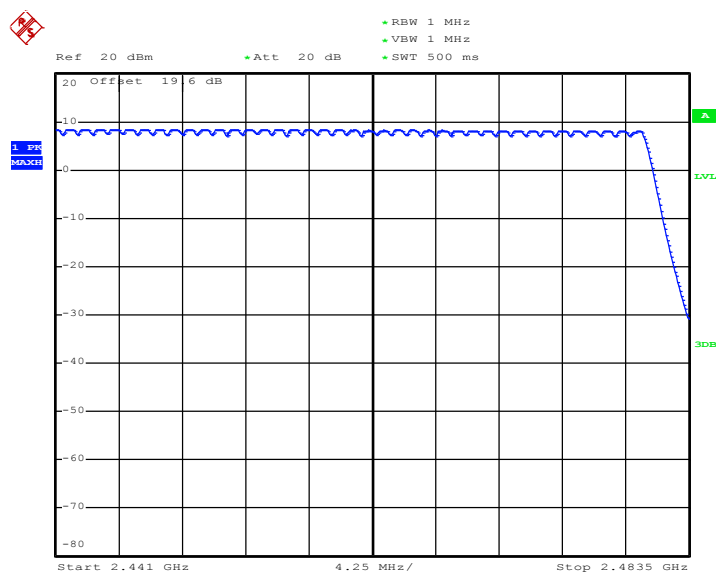

Date: 13.DEC.2011 14:01:43

3.2 20dB Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

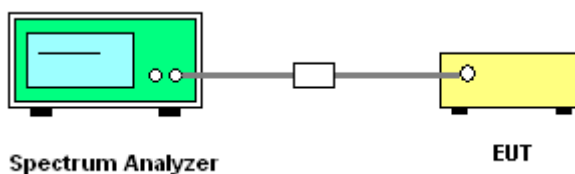


3.2.5 Test Result of 20dB Bandwidth


Test Mode :	Mode 1, 2, 3	Temperature :	24~26℃
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.904
39	2441	0.904
78	2480	0.904


20 dB Bandwidth Plot on Channel 00

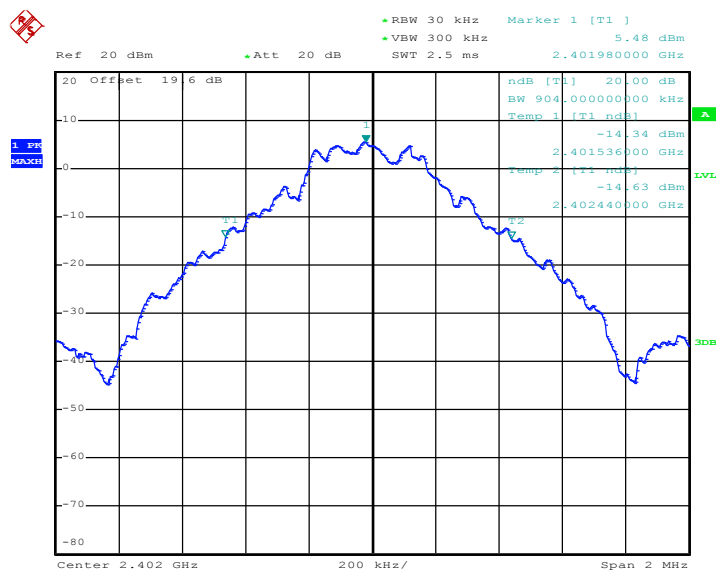

Date: 13.DEC.2011 13:38:14

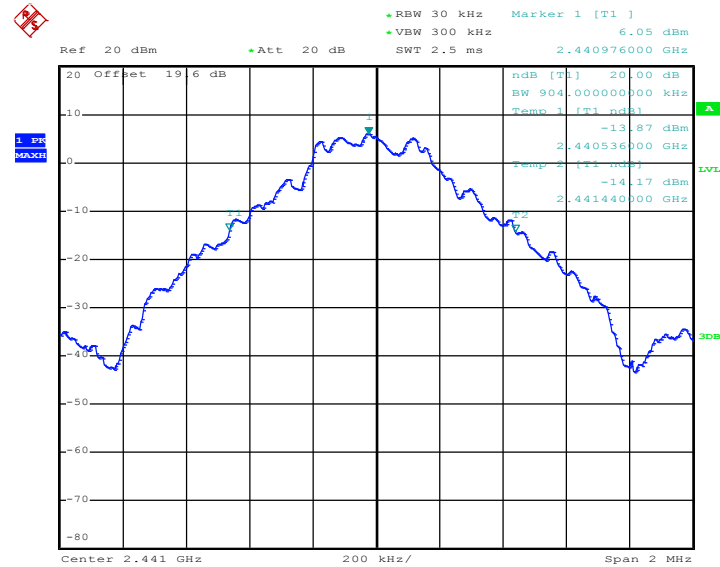20 dB Bandwidth Plot on Channel 39


Date: 13.DEC.2011 13:38:44

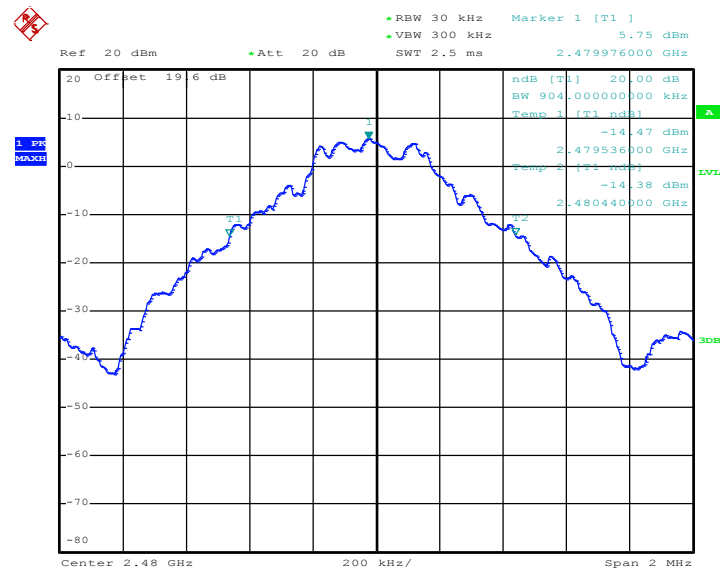20 dB Bandwidth Plot on Channel 78


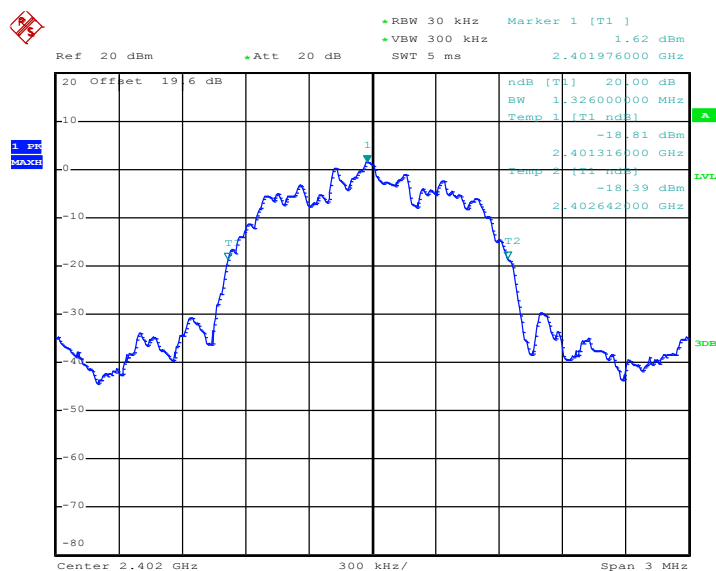
Date: 13.DEC.2011 13:39:25




Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.326
39	2441	1.326
78	2480	1.326


20 dB Bandwidth Plot on Channel 00



Date: 13.DEC.2011 13:40:41

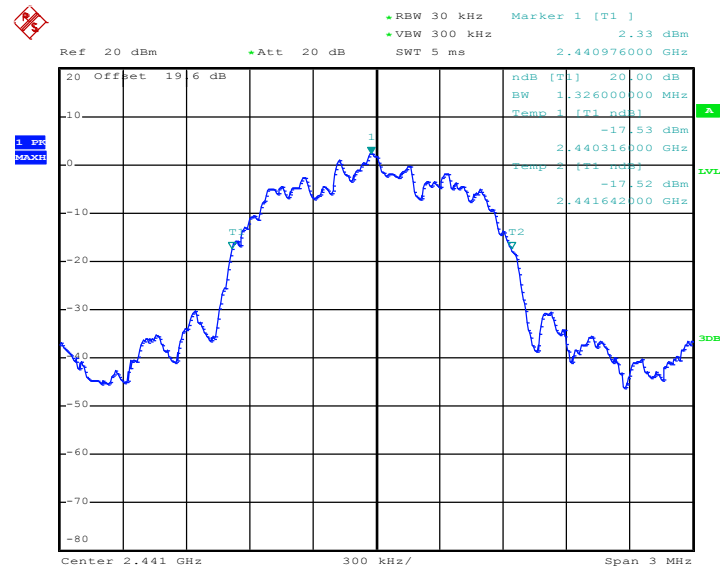20 dB Bandwidth Plot on Channel 39


Date: 13.DEC.2011 13:41:23

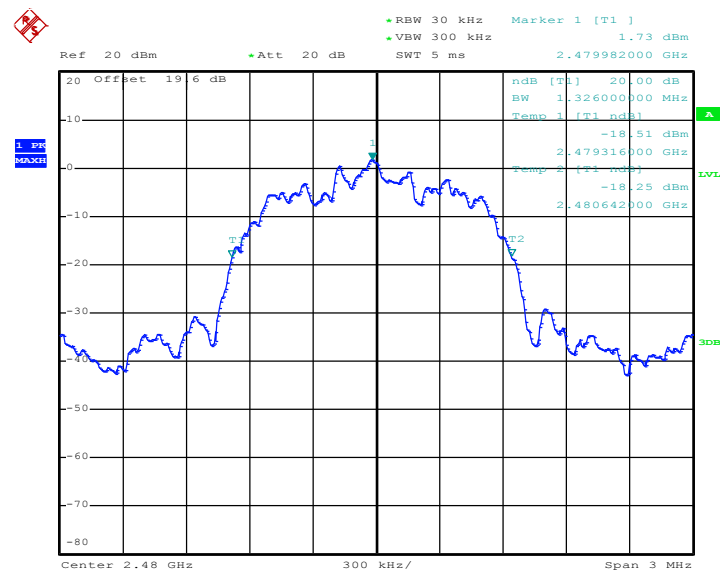
20 dB Bandwidth Plot on Channel 78


Date: 13.DEC.2011 13:42:24




Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.290
39	2441	1.284
78	2480	1.284

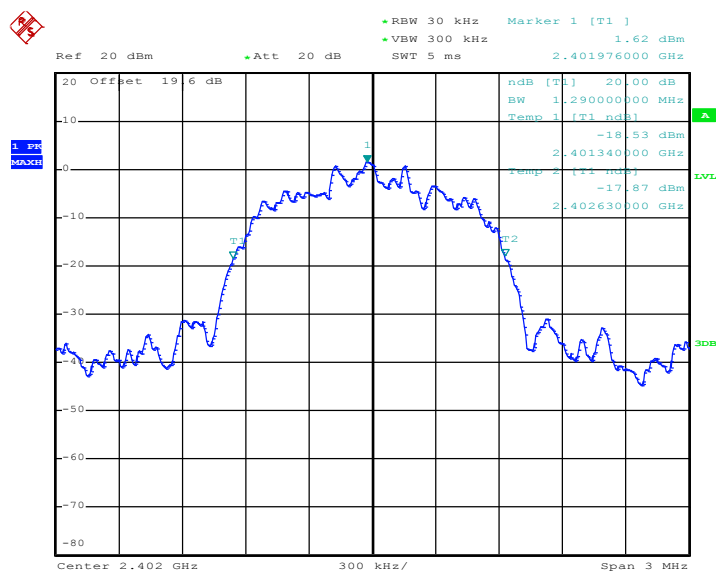20 dB Bandwidth Plot on Channel 00

Date: 13.DEC.2011 13:43:17

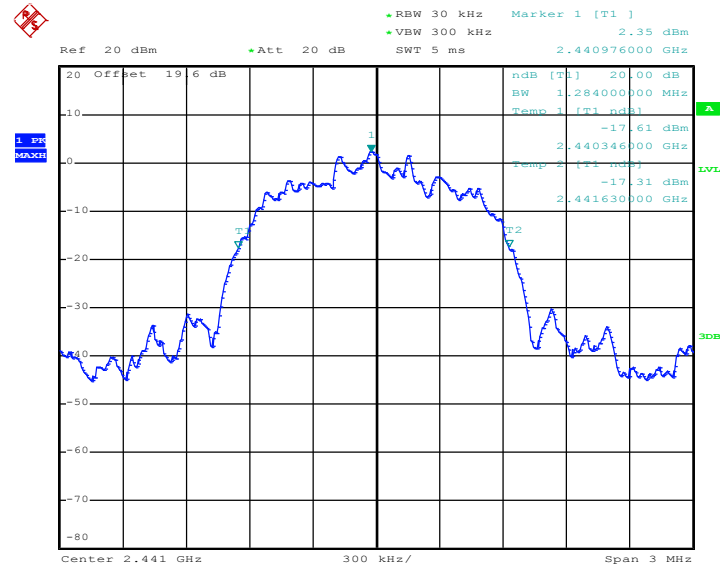20 dB Bandwidth Plot on Channel 39


Date: 13.DEC.2011 13:43:41

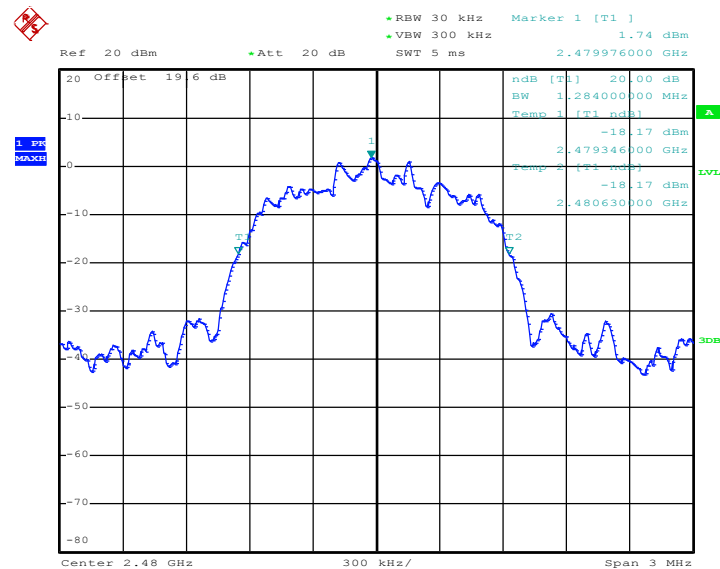20 dB Bandwidth Plot on Channel 78


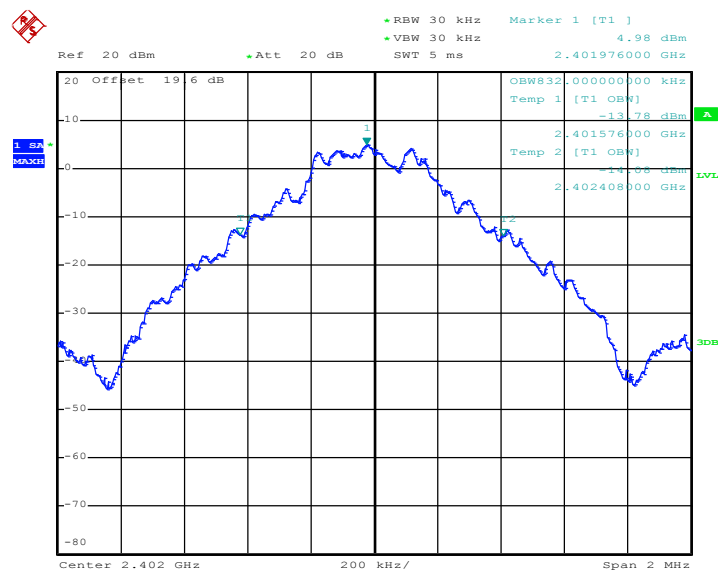
Date: 13.DEC.2011 13:44:07

3.2.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~26℃
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.832
39	2441	0.828
78	2480	0.824


99% Bandwidth Plot on Channel 00



Date: 13.DEC.2011 13:44:45




99% Occupied Bandwidth Plot on Channel 39

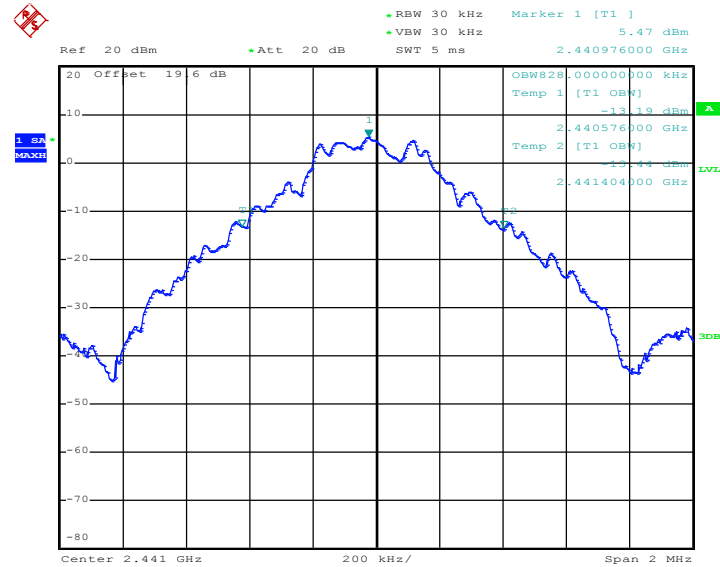

Date: 13.DEC.2011 13:45:21


99% Occupied Bandwidth Plot on Channel 78

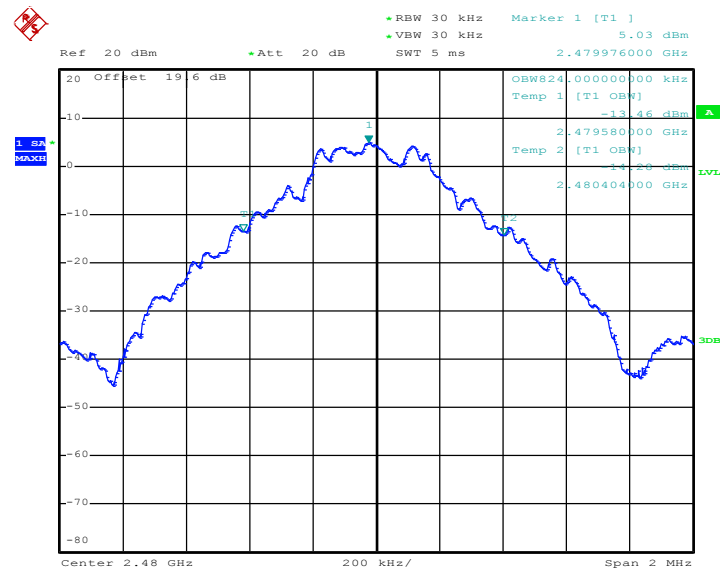

Date: 13.DEC.2011 14:31:10


Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.184
39	2441	1.184
78	2480	1.188

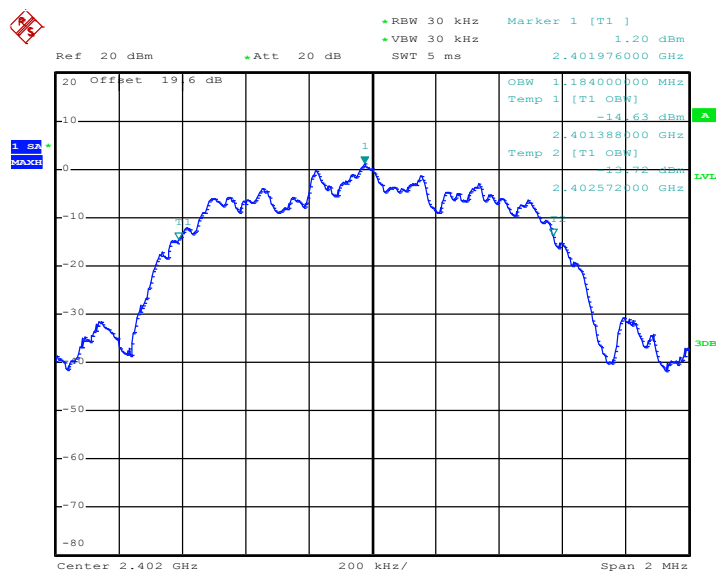99% Bandwidth Plot on Channel 00


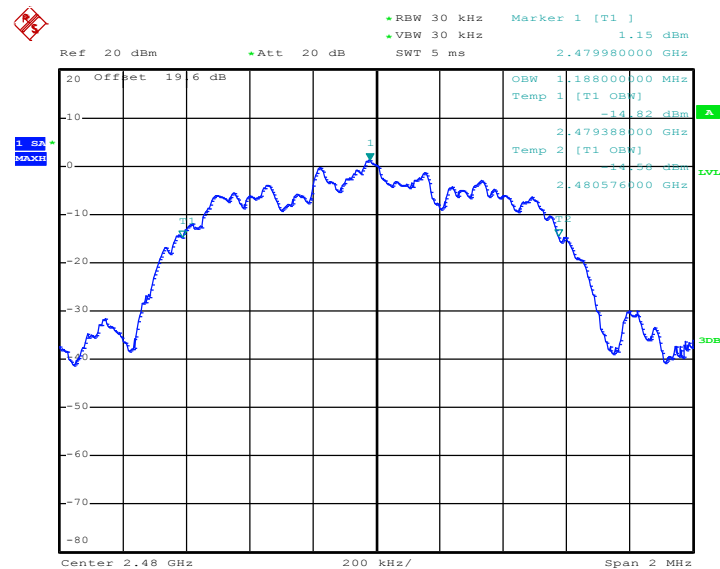
Date: 13.DEC.2011 13:46:33

99% Occupied Bandwidth Plot on Channel 39

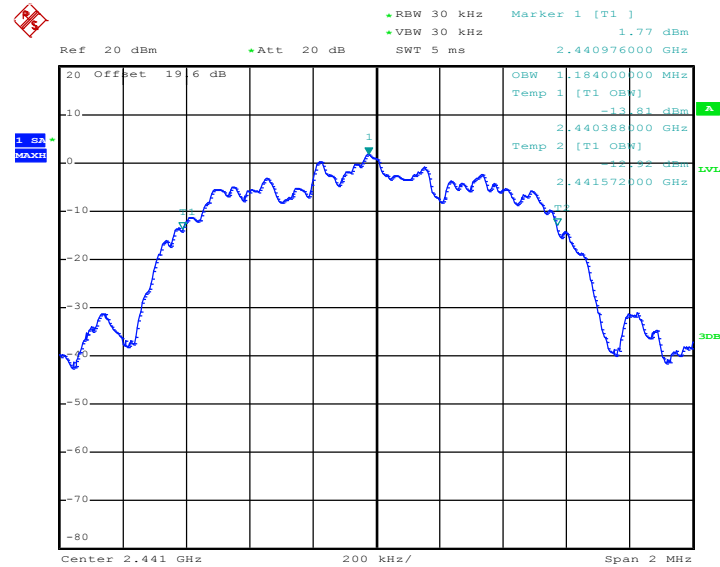

Date: 13.DEC.2011 13:47:09

99% Occupied Bandwidth Plot on Channel 78




Date: 13.DEC.2011 13:47:45



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.168
39	2441	1.172
78	2480	1.172

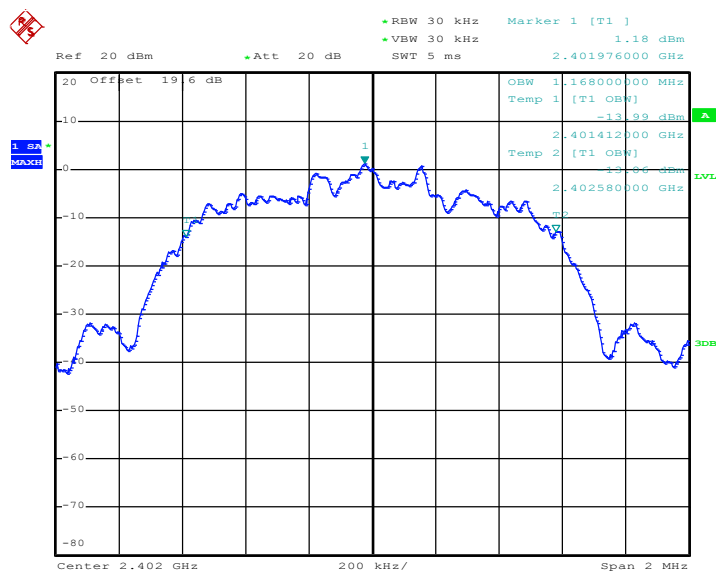99% Bandwidth Plot on Channel 00

Date: 13.DEC.2011 13:48:22




99% Occupied Bandwidth Plot on Channel 39

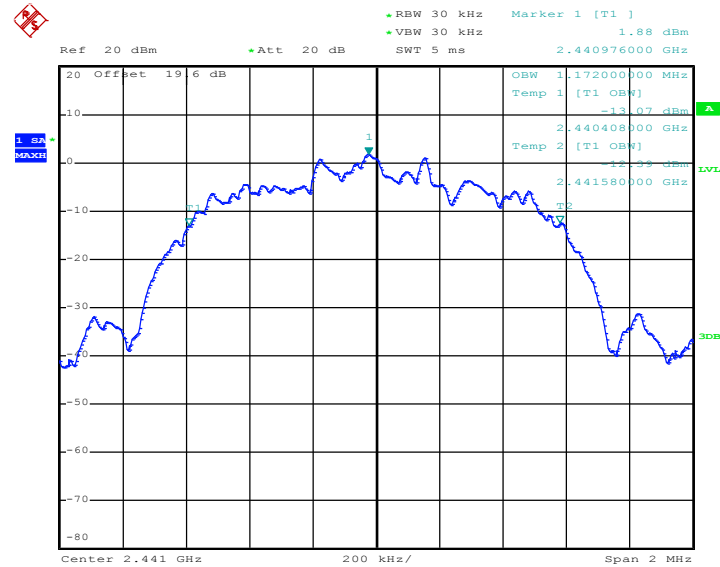

Date: 13.DEC.2011 13:48:58

99% Occupied Bandwidth Plot on Channel 78

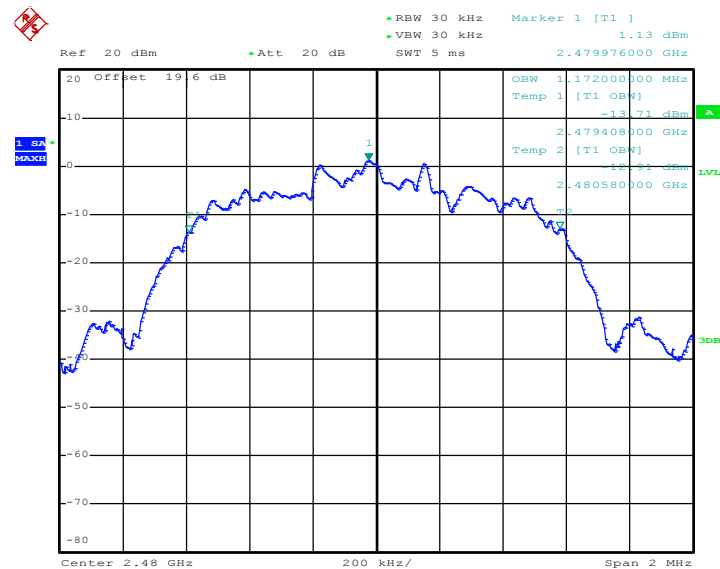

Date: 13.DEC.2011 13:49:34

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; RBW $\geq$ 1% of the span;
VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

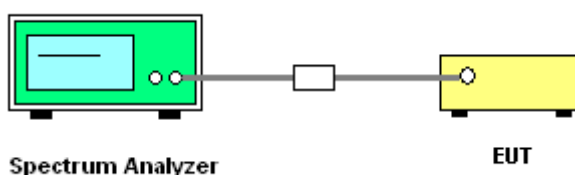


3.3.5 Test Result of Hopping Channel Separation


Test Mode :	Mode 1, 2, 3	Temperature :	24~26℃
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6027	Pass
39	2441	1.002	0.6027	Pass
78	2480	1.002	0.6027	Pass


Channel Separation Plot on Channel 00 - 01

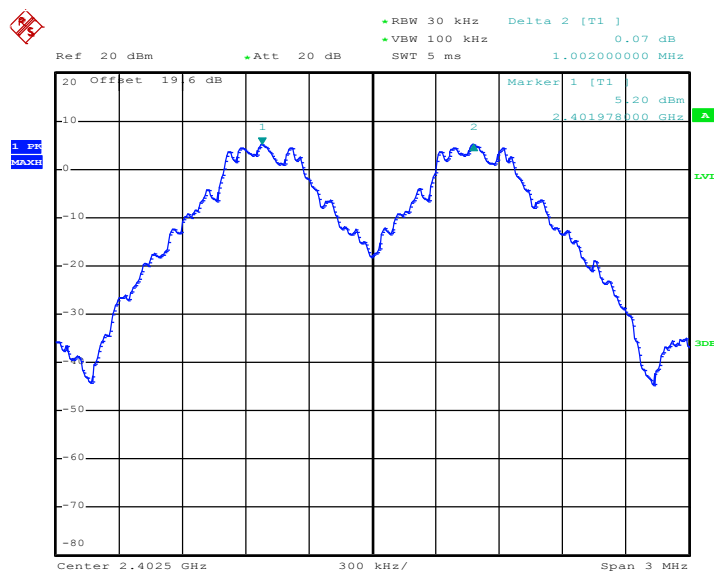

Date: 13.DEC.2011 13:21:58

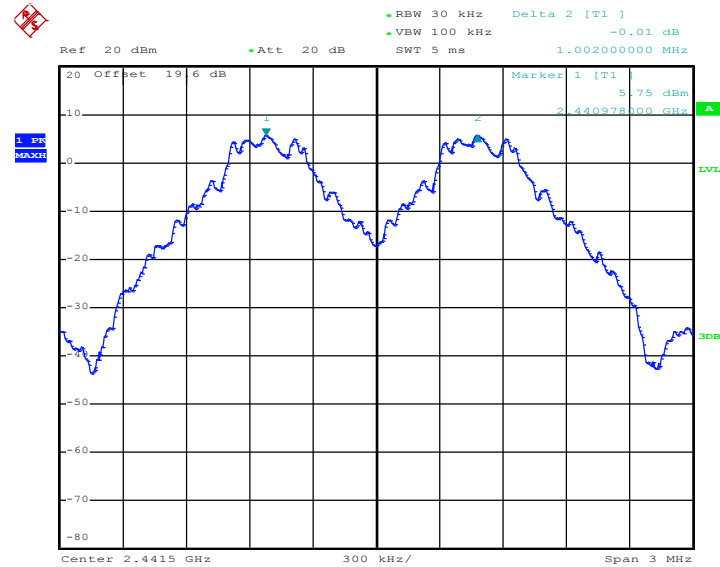Channel Separation Plot on Channel 39 - 40


Date: 13.DEC.2011 13:22:37

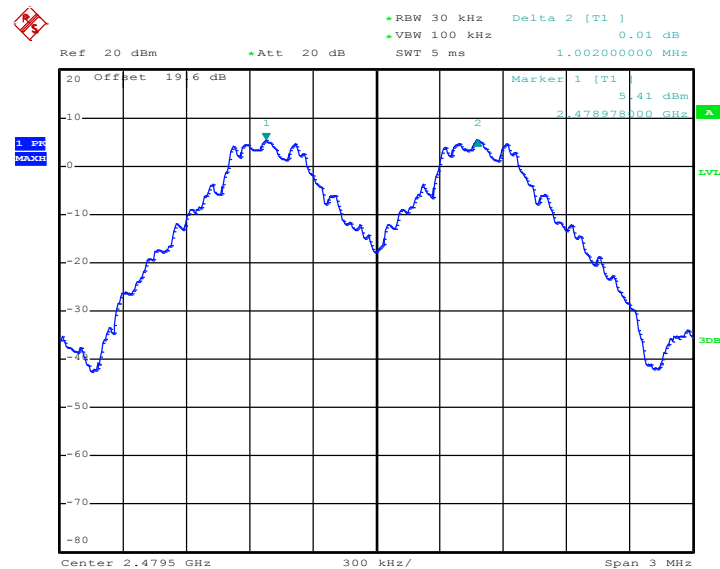Channel Separation Plot on Channel 77 - 78


Date: 13.DEC.2011 13:24:20

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

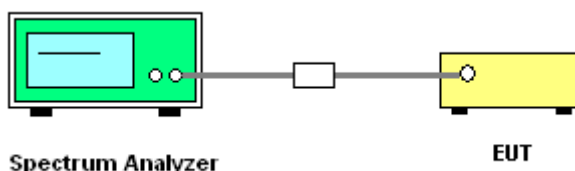


3.4.5 Test Result of Dwell Time

Test Mode :	Mode 2	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
DH5	3.20	2966.00	0.30	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)

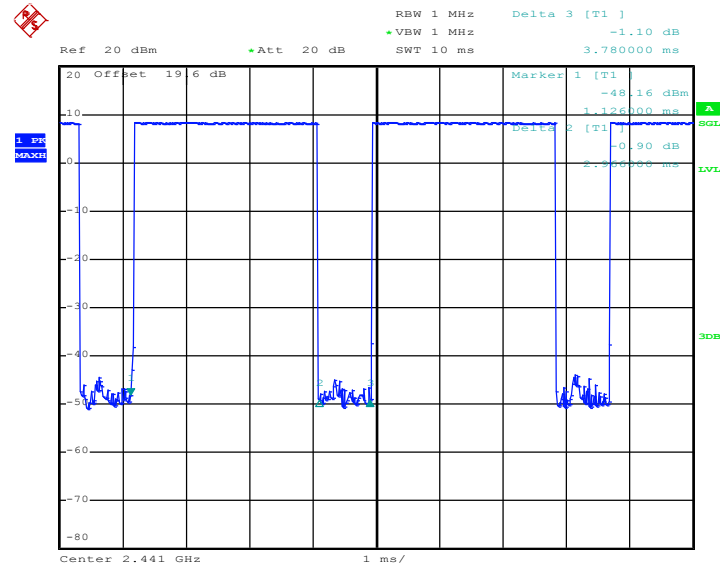DH5 Dwell Time (One Pulse) Plot on Channel 39


Date: 13.DEC.2011 13:17:17

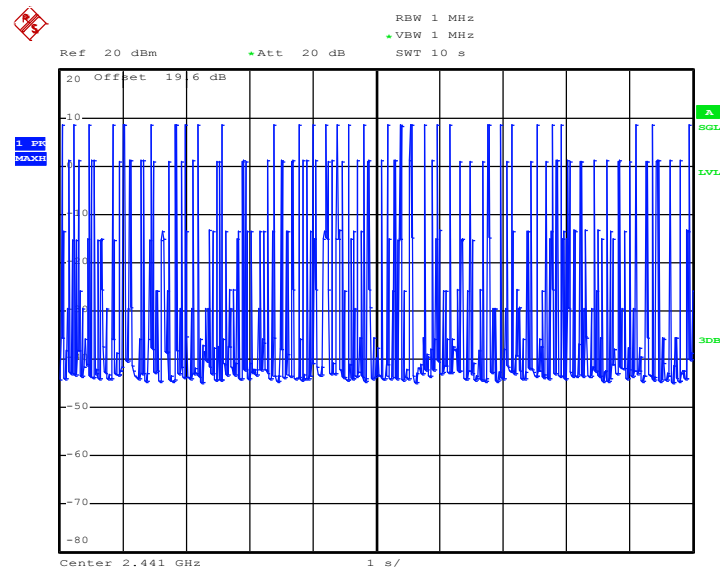DH5 Dwell Time (Count Pulses) Plot on Channel 39


Date: 13.DEC.2011 13:36:18

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW (20.97dBm).


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

3.5.4 Test Setup

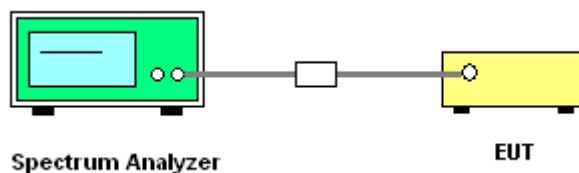


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	24~26℃
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%


Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	7.85	30	Pass
39	2441	8.38	30	Pass
78	2480	7.93	30	Pass

Peak Output Power Plot on Channel 00

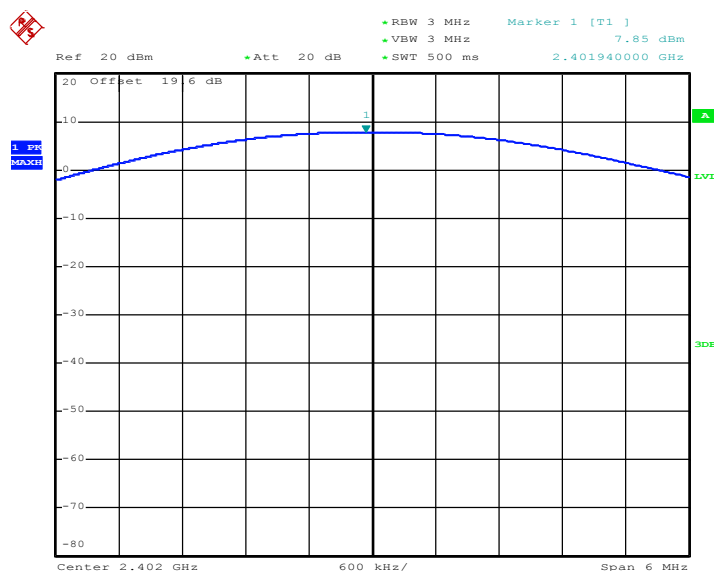


Date: 13.DEC.2011 13:06:18

Peak Output Power Plot on Channel 39

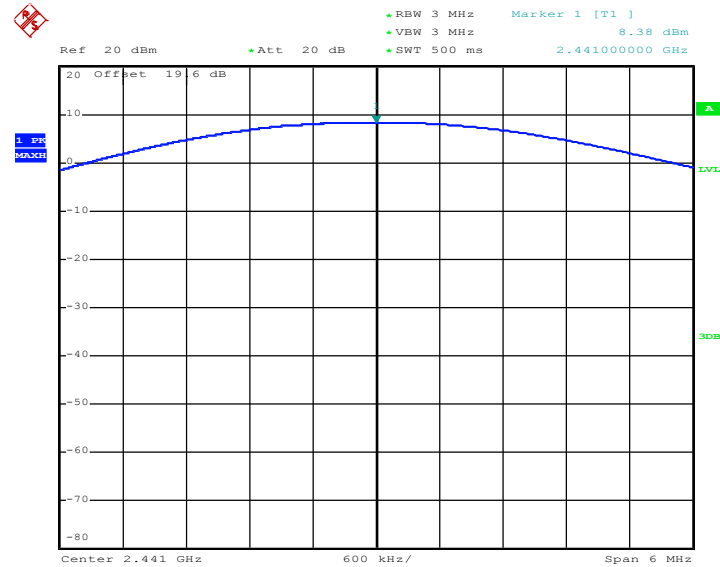

Date: 13.DEC.2011 13:07:31

Peak Output Power Plot on Channel 78

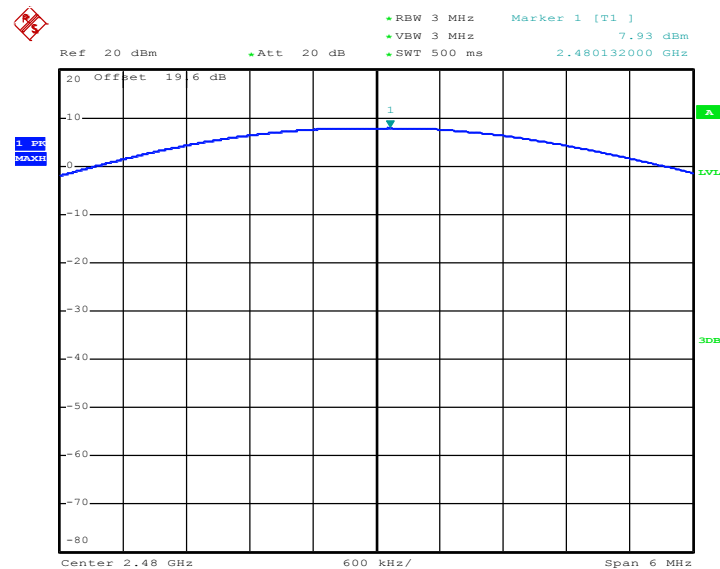

Date: 13.DEC.2011 13:08:45

3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300KHz, Video bandwidth (VBW) $\geq$ RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

<Radiated Band Edges>

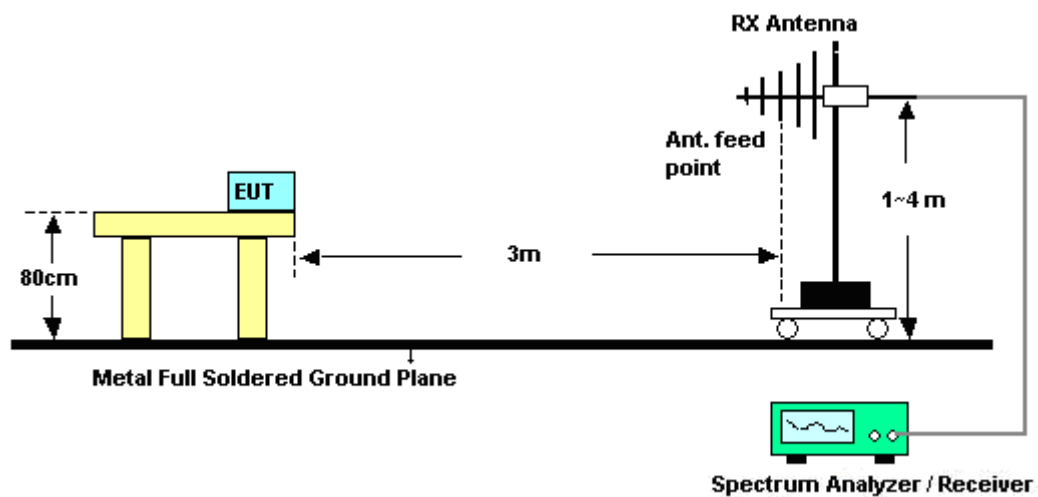

<Conducted Band Edges>

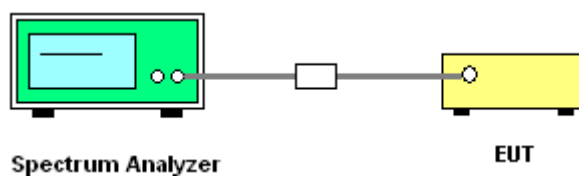

3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2383.53	60.54	-13.46	74	56.44	32.03	6.03	33.96	103	18	Peak
2383.53	35.98	-18.02	54	31.88	32.03	6.03	33.96	103	18	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2376.69	56.6	-17.4	74	52.53	32.03	5.99	33.95	100	287	Peak
2376.69	34.57	-19.43	54	30.5	32.03	5.99	33.95	100	287	Average

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	73.76	-0.24	74	69.4	32.18	6.18	34	124	356	Peak
2483.5	36.91	-17.09	54	32.55	32.18	6.18	34	124	356	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Average Result (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
Single Carrier Mode	89.84	57.27	32.57	54	-21.43	Pass
Hopping Mode	89.84	52.93	36.91	54	-17.09	Pass

Note : Average result = Maximum field strength – Delta result


ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	69.54	-4.46	74	65.18	32.18	6.18	34	100	264	Peak
2483.5	35.83	-18.17	54	31.47	32.18	6.18	34	100	264	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Average Result (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
Single Carrier Mode	89.94	57.25	32.69	54	-21.31	Pass
Hopping Mode	89.94	54.11	35.83	54	-18.17	Pass

Note : Average result = Maximum field strength – Delta result

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Horizontal

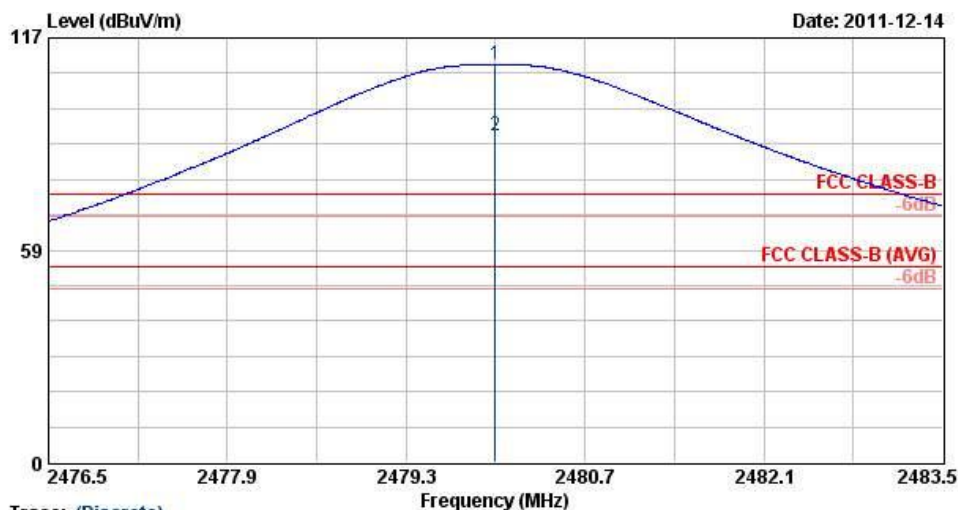

Trace: (Discrete)


Site : 03CH07-HY
Condition : FCC CLASS-B HF-ANT_110816 HORIZONTAL

Mode : Mode 3


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 X	2480.00	109.59	35.59	74.00	105.23	32.18	6.18	34.00	124	356	Peak
2 @	2480.00	89.84	35.84	54.00	85.48	32.18	6.18	34.00	124	356	Average

* Maximum field strength of the fundamental emission


Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Horizontal

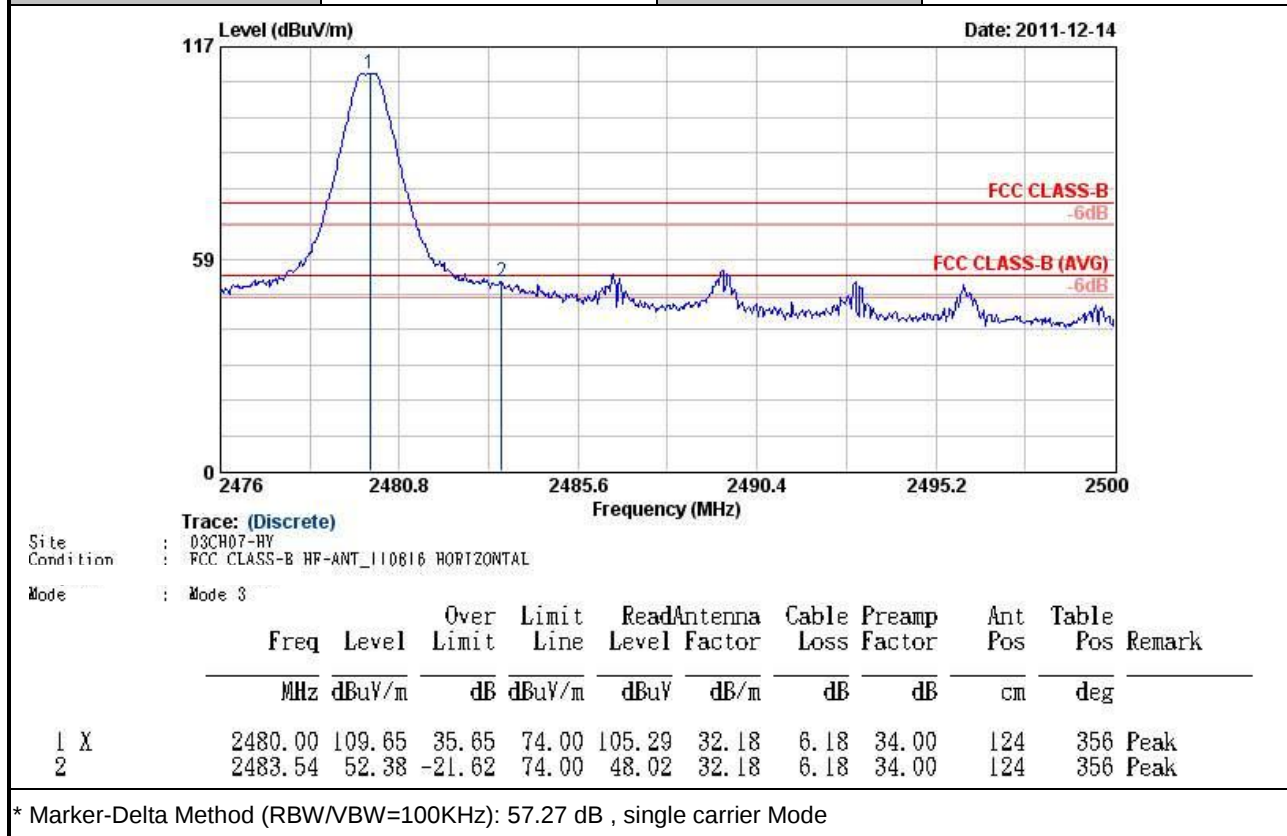


Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Horizontal

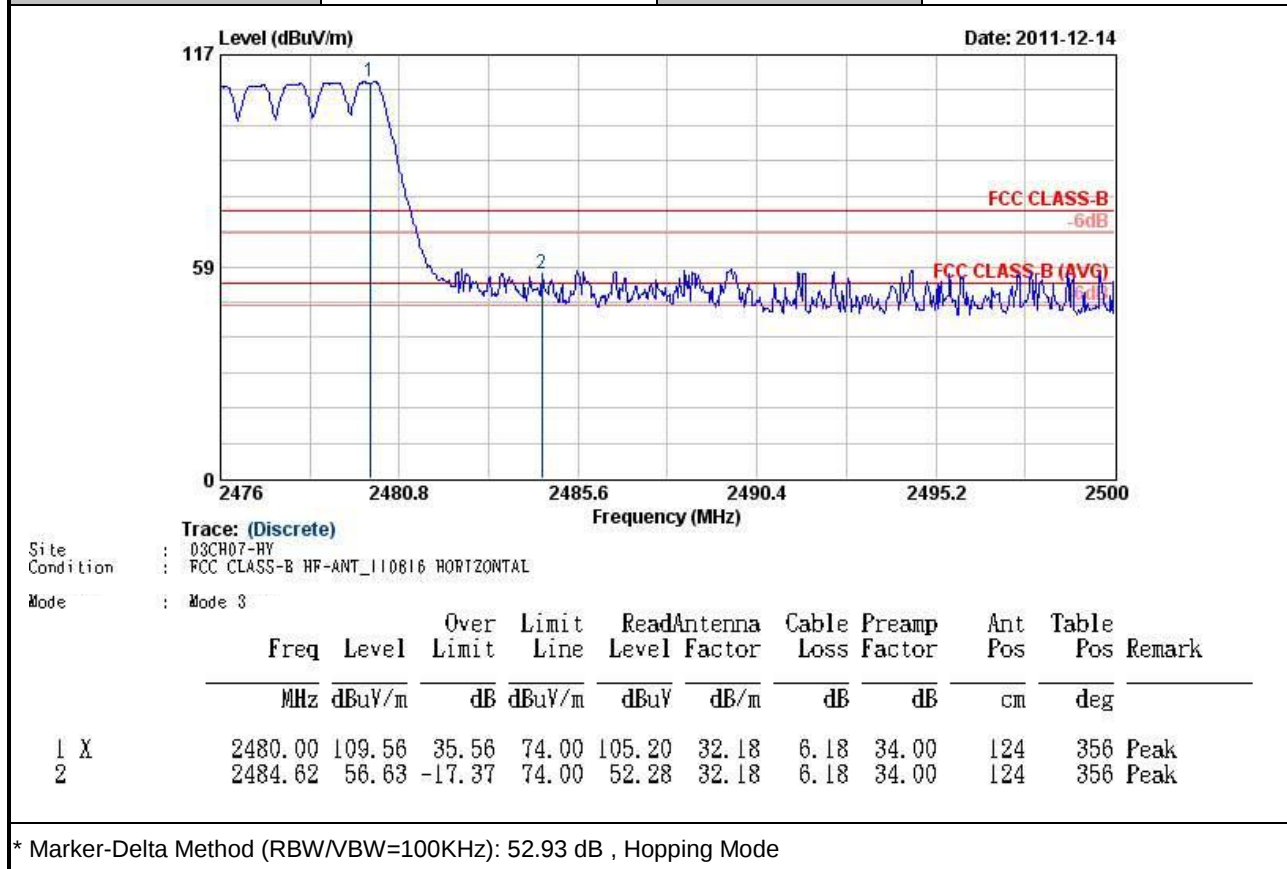


Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Vertical

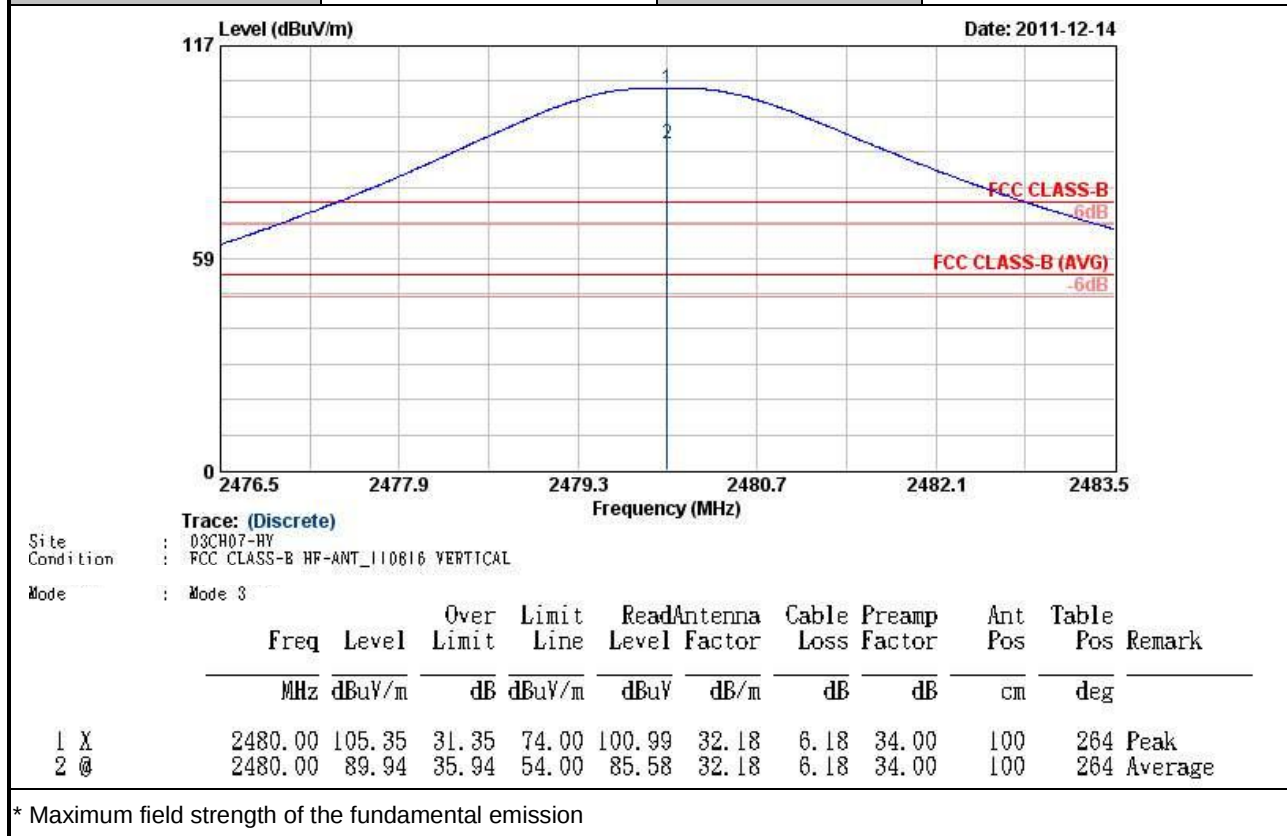

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Vertical

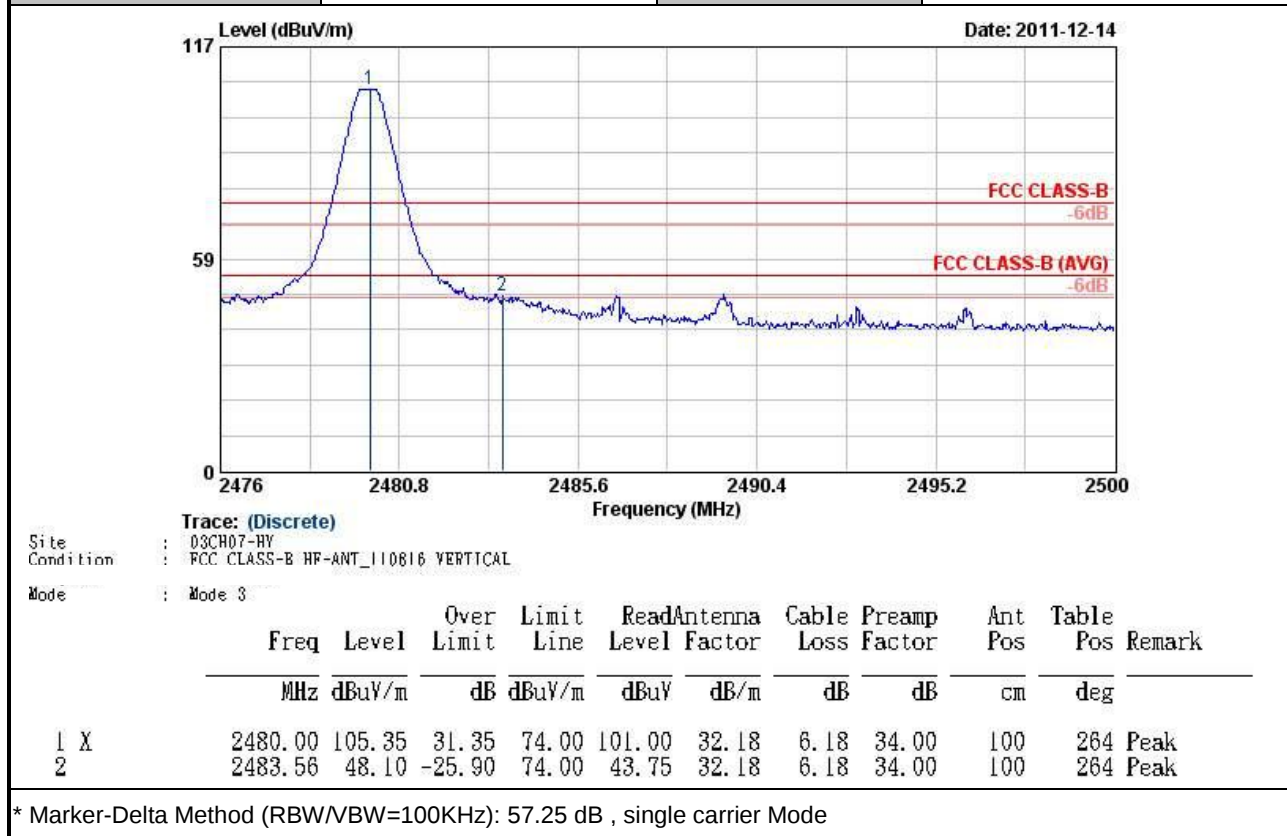


Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Vertical

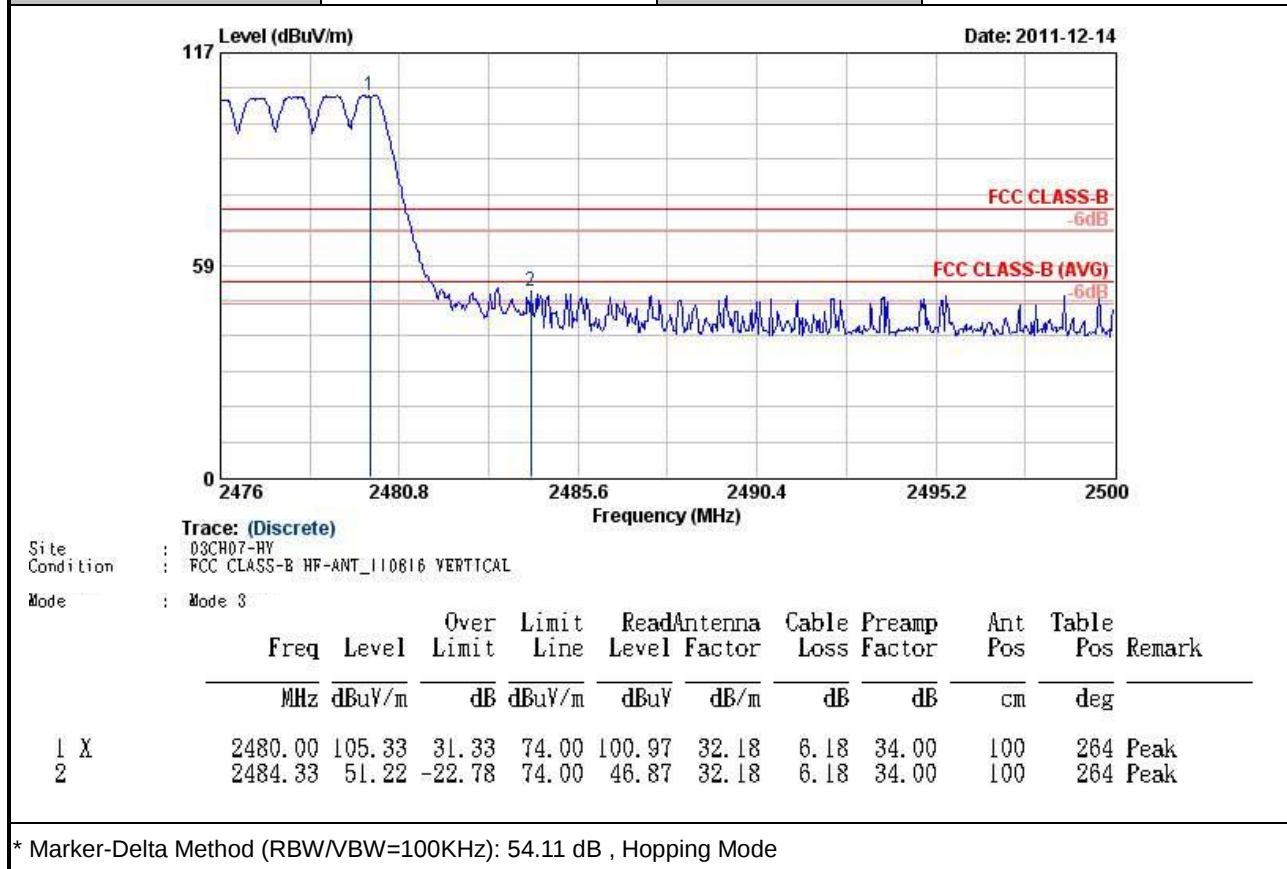

3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 1 and 3	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Pinkston Tu

Low Band Edge Plot on Channel 00

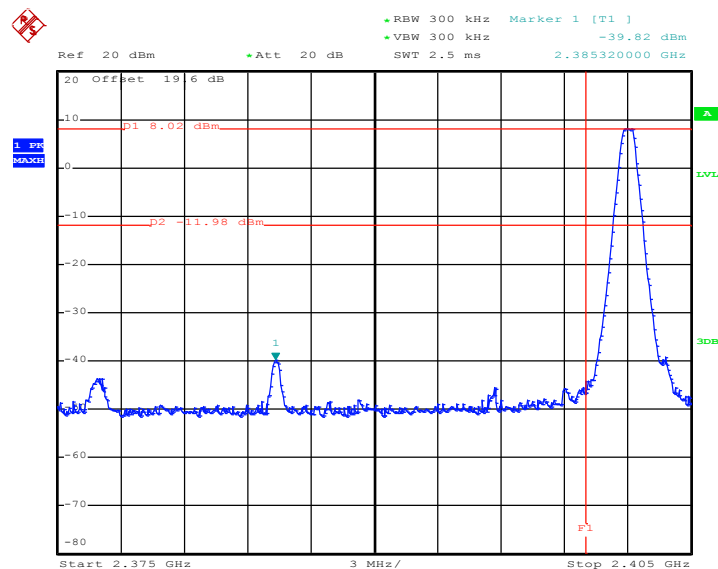

Date: 13.DEC.2011 14:31:35

High Band Edge Plot on Channel 78

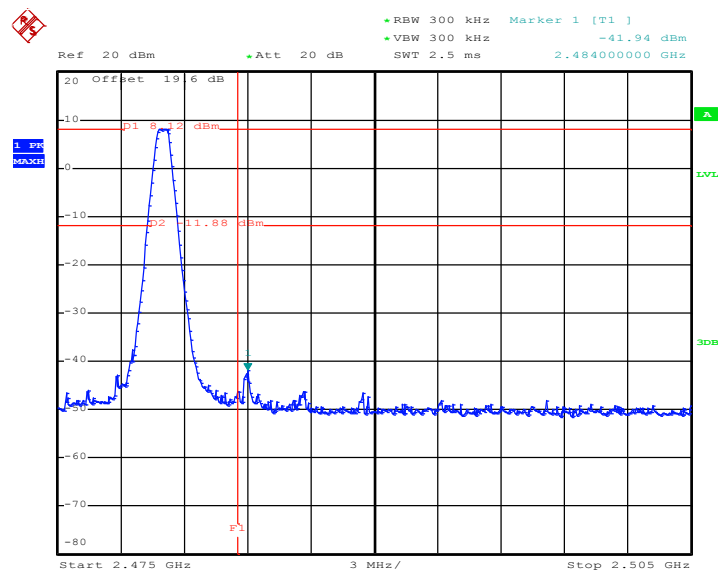

Date: 13.DEC.2011 14:29:42

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 KHz, Video bandwidth (VBW) $\geq$ RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.


3.7.4 Test Setup

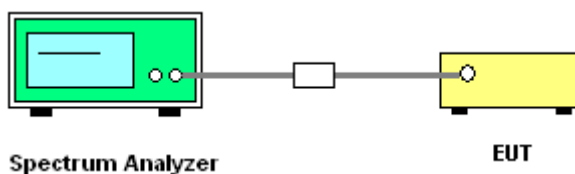

3.7.5 Test Result


Test Mode :	Mode 1	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Pinkston Tu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

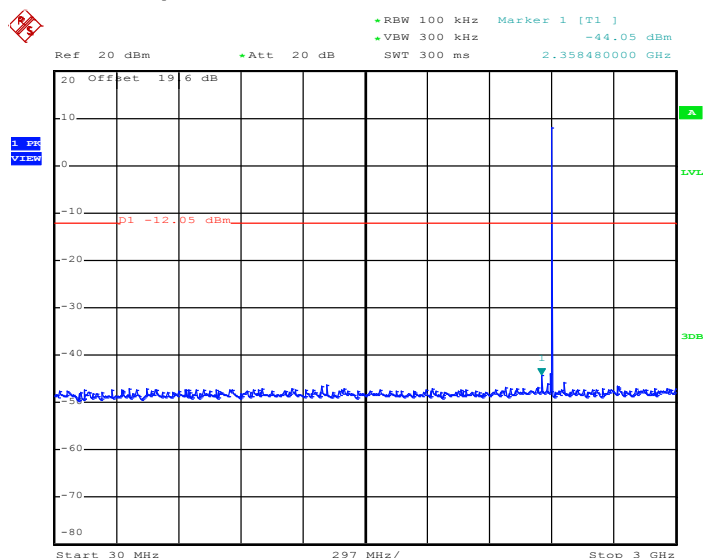

Date: 13.DEC.2011 13:50:28


Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

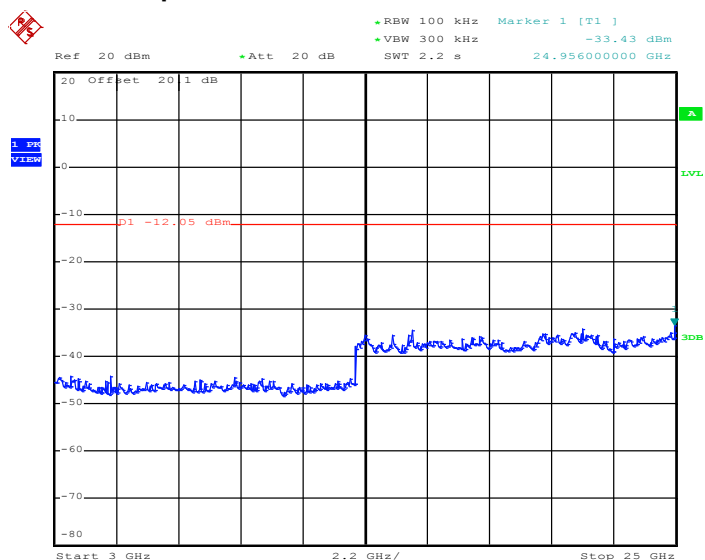

Date: 13.DEC.2011 13:50:40



Conducted Spurious Emission Plot between 30MHz ~ 3 GHz




Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz






Test Mode :	Mode 3	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Pinkston Tu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

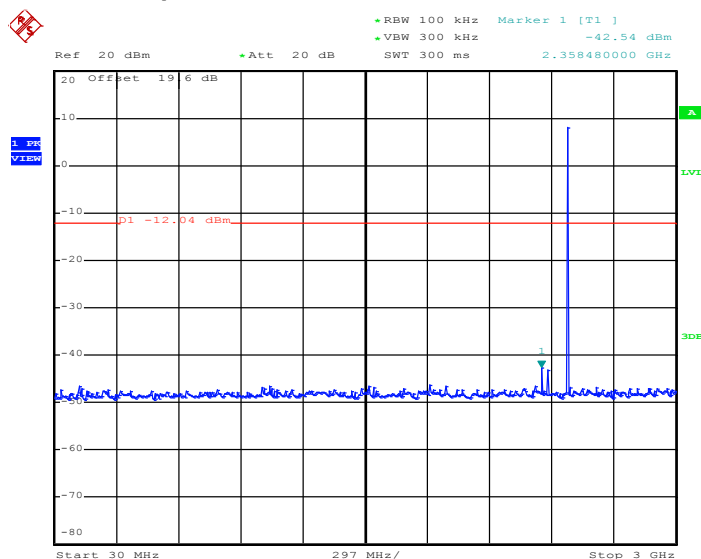

Date: 13.DEC.2011 13:52:36

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

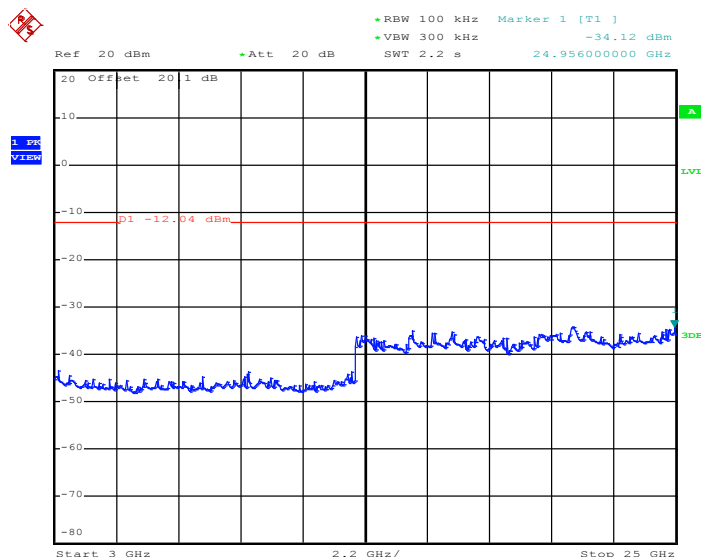

Date: 13.DEC.2011 13:52:48

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

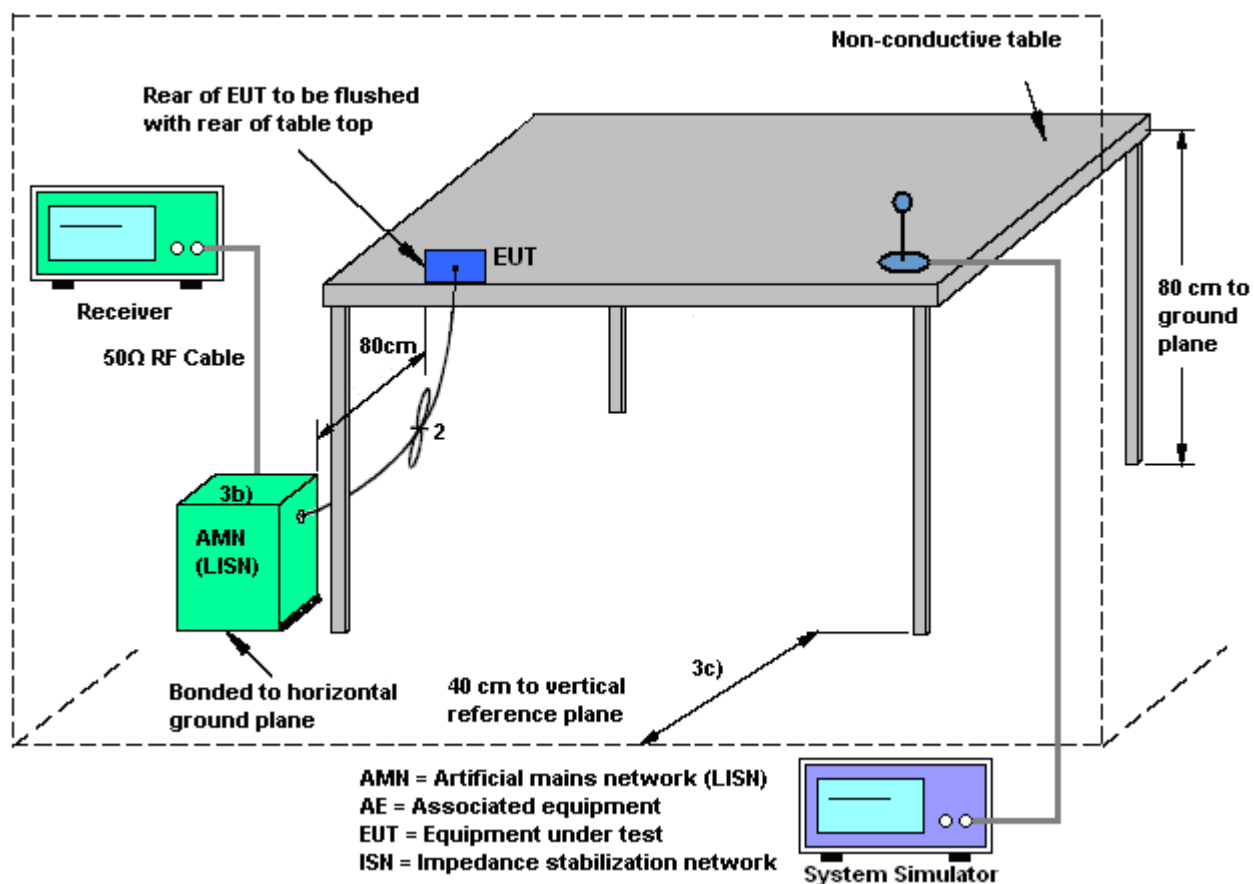

3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	20~22℃
Test Engineer :	Novic Chiang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + MPEG4 + Battery + USB Cable (Charging from Adapter) + SIM 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

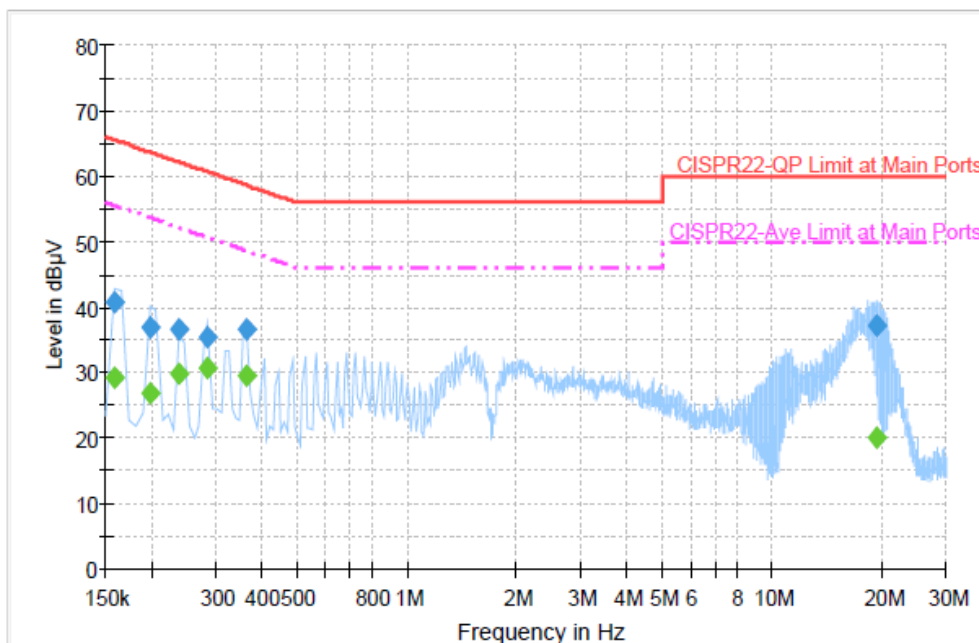


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	40.7	Off	L1	19.4	24.9	65.6
0.198000	37.0	Off	L1	19.4	26.7	63.7
0.238000	36.7	Off	L1	19.4	25.5	62.2
0.286000	35.3	Off	L1	19.4	25.3	60.6
0.366000	36.5	Off	L1	19.4	22.1	58.6
19.398000	37.2	Off	L1	19.7	22.8	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	29.3	Off	L1	19.4	26.3	55.6
0.198000	26.7	Off	L1	19.4	27.0	53.7
0.238000	29.7	Off	L1	19.4	22.5	52.2
0.286000	30.6	Off	L1	19.4	20.0	50.6
0.366000	29.6	Off	L1	19.4	19.0	48.6
19.398000	19.9	Off	L1	19.7	30.1	50.0

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + MPEG4 + Battry + USB Cable (Charging from Adapter) + SIM 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

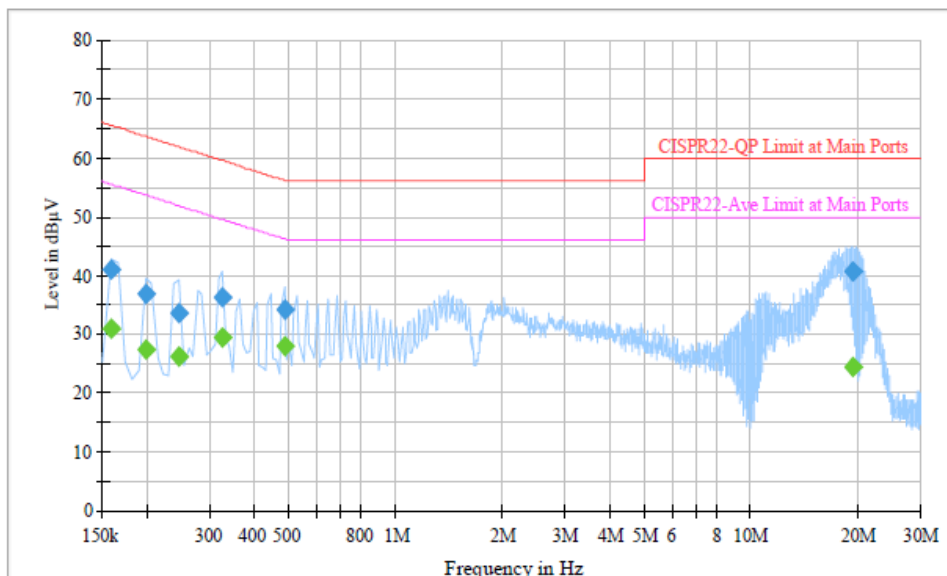
Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	41.1	Off	N	19.4	24.5	65.6
0.198000	36.9	Off	N	19.4	26.8	63.7
0.246000	33.7	Off	N	19.4	28.2	61.9
0.326000	36.2	Off	N	19.4	23.4	59.6
0.486000	34.3	Off	N	19.4	21.9	56.2
19.350000	40.6	Off	N	19.7	19.4	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	30.9	Off	N	19.4	24.7	55.6
0.198000	27.3	Off	N	19.4	26.4	53.7
0.246000	26.2	Off	N	19.4	25.7	51.9
0.326000	29.6	Off	N	19.4	20.0	49.6
0.486000	28.1	Off	N	19.4	18.1	46.2
19.350000	24.6	Off	N	19.7	25.4	50.0

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


- The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
- Use the following spectrum analyzer settings:
 - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 KHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
- Measured average value for the peak value is greater than 54 dBuV/m

3.9.4 Test Setup


For radiated emissions below 30MHz

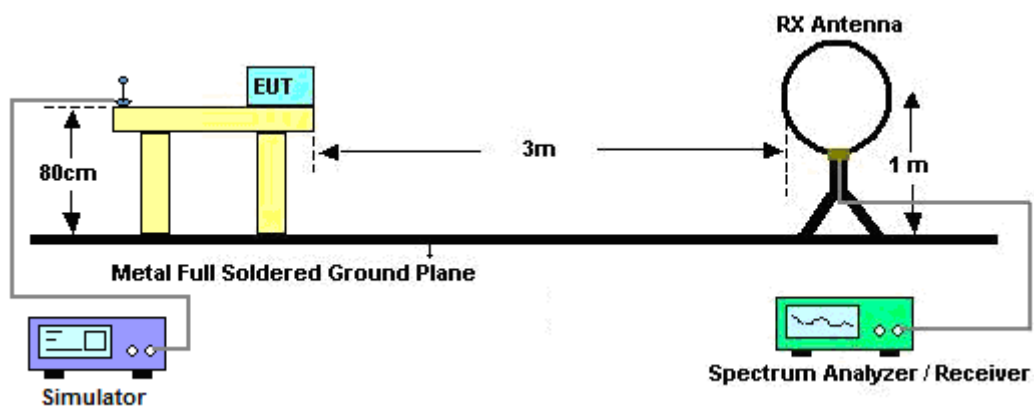

For radiated emissions from 30MHz to 1GHz

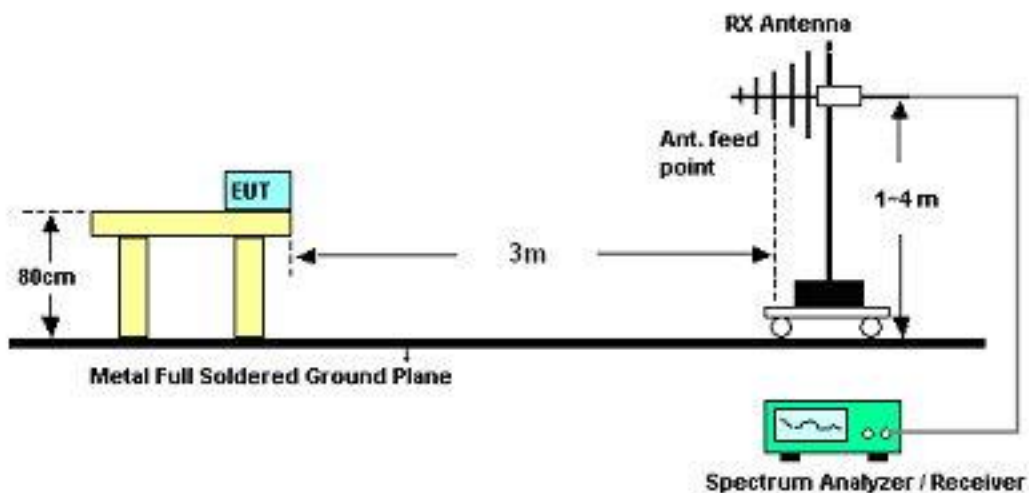

For radiated emissions above 1GHz

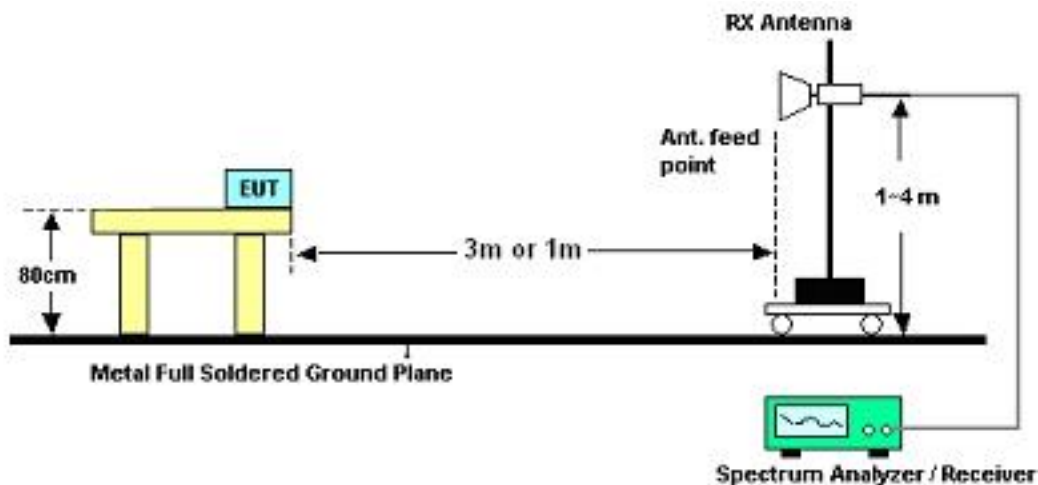

3.9.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

Test Engineer :	David Yang	Temperature :	21~23°C	
		Relative Humidity :	48~51%	

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.9.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	1. 2402 MHz is Fundamental Signals which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 108.1 dBuV/m - 20dB = 88.1 dBuV/m.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
41.34	27.3	-12.7	40	45.88	12.3	0.63	31.51	-	-	Peak
150.96	34.98	-8.52	43.5	54.2	11.13	1.21	31.56	100	28	Peak
210.09	30.5	-13	43.5	50.77	9.84	1.36	31.47	-	-	Peak
453.3	34.71	-11.29	46	46.38	17.11	2.31	31.09	-	-	Peak
579.3	27.62	-18.38	46	36.5	19.44	2.63	30.95	-	-	Peak
718.6	31.34	-14.66	46	38.25	20.88	2.98	30.77	-	-	Peak
2383.53	60.54	-13.46	74	56.44	32.03	6.03	33.96	103	18	Peak
2383.53	35.98	-18.02	54	31.88	32.03	6.03	33.96	103	18	Average
2402	108.1	-	-	103.95	32.08	6.03	33.96	103	18	Peak
2402	91.93	-	-	87.8	32.06	6.03	33.96	103	18	Average
2484	33.67	-20.33	54	29.31	32.18	6.18	34	103	18	Average
2484	47.18	-26.82	74	42.82	32.18	6.18	34	103	18	Peak
4804	47.34	-26.66	74	63.26	34.1	9.12	59.14	100	0	Peak
7206	45.81	-42.29	88.1	58.18	35.7	10.02	58.09	100	0	Peak

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	1. 2402 MHz is Fundamental Signals which can be ignored. 2. 7206 MHz is not within a restricted band.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
75.9	31.59	-8.41	40	55.21	7.06	0.86	31.54	100	67	Peak
111.54	28.83	-14.67	43.5	48.43	10.89	1.06	31.55	-	-	Peak
203.34	28.86	-14.64	43.5	49.64	9.37	1.33	31.48	-	-	Peak
358.1	22.75	-23.25	46	37.11	14.87	2.04	31.27	-	-	Peak
582.1	33.16	-12.84	46	41.97	19.49	2.64	30.94	-	-	Peak
953.8	26.39	-19.61	46	29.6	23.9	3.46	30.57	-	-	Peak
2376.69	34.57	-19.43	54	30.5	32.03	5.99	33.95	100	287	Average
2376.69	56.6	-17.4	74	52.53	32.03	5.99	33.95	100	287	Peak
2402	88.94	-	-	84.81	32.06	6.03	33.96	100	287	Average
2402	103.8	-	-	99.65	32.08	6.03	33.96	100	287	Peak
2484	33.22	-20.78	54	28.86	32.18	6.18	34	100	287	Average
2484	46.07	-27.93	74	41.71	32.18	6.18	34	100	287	Peak
4804	44.68	-29.32	74	60.6	34.1	9.12	59.14	100	0	Peak
7206	45.99	-37.81	83.8	58.36	35.7	10.02	58.09	100	0	Peak
12010	48.04	-25.96	74	53.11	38.9	13.42	57.39	100	0	Peak

Test Mode :	Mode 2	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	1. 2441 MHz is Fundamental Signals which can be ignored. 2. 9764 MHz is not within a restricted band.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
43.77	29.31	-10.69	40	49.07	11.1	0.64	31.5	100	17	Peak
202.53	21.96	-21.54	43.5	42.81	9.3	1.33	31.48	-	-	Peak
245.73	25.01	-20.99	46	42.63	12.26	1.53	31.41	-	-	Peak
556.9	22.31	-23.69	46	31.65	19.06	2.57	30.97	-	-	Peak
727.7	26.97	-19.03	46	33.7	21.01	3.01	30.75	-	-	Peak
822.2	26.38	-19.62	46	31.56	22.32	3.2	30.7	-	-	Peak
2390	53.28	-20.72	74	49.15	32.06	6.03	33.96	128	354	Peak
2390	34.85	-19.15	54	30.72	32.06	6.03	33.96	128	354	Average
2441	93.08	-	-	88.82	32.13	6.11	33.98	128	354	Average
2441	109.59	-	-	105.33	32.13	6.11	33.98	128	354	Peak
2492	35.55	-18.45	54	31.17	32.2	6.18	34	128	354	Average
2492	54.02	-19.98	74	49.64	32.2	6.18	34	128	354	Peak
4882	44.1	-29.9	74	59.9	34.1	9.14	59.04	100	0	Peak
7323	47.73	-26.27	74	60.11	35.7	10.06	58.14	100	0	Peak
9764	45.39	-44.2	89.59	56.34	36.76	11.93	59.64	100	0	Peak

Test Mode :	Mode 2	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	1. 2441 MHz is Fundamental Signals which can be ignored. 2. 9764 MHz is not within a restricted band.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.62	23.16	-16.84	40	35.51	18.56	0.55	31.46	100	92	Peak
202.53	26.18	-17.32	43.5	47.03	9.3	1.33	31.48	-	-	Peak
245.73	23.58	-22.42	46	41.2	12.26	1.53	31.41	-	-	Peak
537.3	20.99	-25.01	46	30.74	18.73	2.52	31	-	-	Peak
746.6	24.18	-21.82	46	30.54	21.3	3.05	30.71	-	-	Peak
993	26.31	-27.69	54	28.89	24.5	3.5	30.58	-	-	Peak
2382	54.55	-19.45	74	50.45	32.03	6.03	33.96	100	263	Peak
2382	34.08	-19.92	54	29.98	32.03	6.03	33.96	100	263	Average
2441	88.85	-	-	84.59	32.13	6.11	33.98	100	263	Average
2441	104.02	-	-	99.76	32.13	6.11	33.98	100	263	Peak
2492	49.75	-24.25	74	45.37	32.2	6.18	34	100	263	Peak
2492	34.47	-19.53	54	30.09	32.2	6.18	34	100	263	Average
7323	47.9	-26.1	74	60.27	35.7	10.07	58.14	100	0	Peak
9764	48.72	-35.3	84.02	59.67	36.76	11.93	59.64	100	0	Peak
12205	50.21	-23.79	74	54.96	39.02	13.5	57.27	100	0	Peak

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	1. 2480 MHz is Fundamental Signals which can be ignored. 2. 2508 MHz and 2532 MHz are not within a restricted band.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
62.94	20.43	-19.57	40	45.03	6.16	0.78	31.54	-	-	Peak
202.53	23.98	-19.52	43.5	44.83	9.3	1.33	31.48	-	-	Peak
245.73	25.72	-20.28	46	43.34	12.26	1.53	31.41	-	-	Peak
416.9	17.6	-28.4	46	30.19	16.36	2.2	31.15	-	-	Peak
746.6	27.24	-18.76	46	33.6	21.3	3.05	30.71	100	33	Peak
946.1	25.49	-20.51	46	28.84	23.78	3.45	30.58	-	-	Peak
2380	39.05	-14.95	54	34.95	32.03	6.03	33.96	124	356	Average
2380	58.92	-15.08	74	54.82	32.03	6.03	33.96	124	356	Peak
2480	109.71	-	-	105.35	32.18	6.18	34	124	356	Peak
2480	94.2	-	-	89.84	32.18	6.18	34	124	356	Average
2483.5	73.76	-0.24	74	69.4	32.18	6.18	34	124	356	Peak
2483.5	36.91	-17.09	54	32.55	32.18	6.18	34	124	356	Average
2508	63.28	-26.43	89.71	58.85	32.22	6.21	34	100	0	Peak
2532	58.31	-31.4	89.71	53.84	32.23	6.23	33.99	100	0	Peak
4960	46.21	-27.79	74	61.86	34.1	9.16	58.91	100	0	Peak
7440	49.65	-24.35	74	62.02	35.7	10.12	58.19	100	0	Peak

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	1. 2480 MHz is Fundamental Signals which can be ignored. 2. 2508 MHz and 9920 MHz are not within a restricted band.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
80.22	21	-19	40	43.95	7.7	0.88	31.53	-	-	Peak
202.53	26.13	-17.37	43.5	46.98	9.3	1.33	31.48	100	65	Peak
245.73	22.68	-23.32	46	40.3	12.26	1.53	31.41	-	-	Peak
537.3	20.79	-25.21	46	30.54	18.73	2.52	31	-	-	Peak
746.6	25.18	-20.82	46	31.54	21.3	3.05	30.71	-	-	Peak
934.9	25.58	-20.42	46	29.15	23.62	3.42	30.61	-	-	Peak
2382	33.76	-20.24	54	29.66	32.03	6.03	33.96	100	264	Average
2382	54.16	-19.84	74	50.06	32.03	6.03	33.96	100	264	Peak
2480	89.94	-	-	85.58	32.18	6.18	34	100	264	Average
2480	105.23	-	-	100.87	32.18	6.18	34	100	264	Peak
2483.5	69.54	-4.46	74	65.18	32.18	6.18	34	100	264	Peak
2483.5	35.83	-18.17	54	31.47	32.18	6.18	34	100	264	Average
2508	56.29	-28.94	85.23	51.86	32.22	6.21	34	100	0	Peak
4960	44.86	-29.14	74	60.51	34.1	9.16	58.91	100	0	Peak
7440	47.58	-26.42	74	59.95	35.7	10.12	58.19	100	0	Peak
9920	45.57	-39.66	85.23	56.35	37	11.84	59.62	100	0	Peak
12400	48.21	-25.79	74	52.67	39.14	13.57	57.17	100	0	Peak

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 13, 2011	Dec. 13, 2011	Jun. 12, 2012	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 18, 2011	Dec. 13, 2011	Sep. 17, 2012	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 18, 2011	Dec. 13, 2011	Sep. 17, 2012	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Feb. 18, 2011	Dec. 13, 2011	Feb. 17, 2012	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	N/A	Feb. 18, 2011	Dec. 13, 2011	Feb. 17, 2012	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 27, 2011	Dec. 13, 2011	Jul. 26, 2012	Conducted (TH02-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	Jun. 01, 2011	Dec. 13, 2011	May 31, 2012	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCI 7	100724	9kHz~7GHz	Aug. 22, 2011	Nov. 29, 2011	Aug. 21, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 03, 2010	Nov. 29, 2011	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 01, 2010	Nov. 29, 2011	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Nov. 29, 2011	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	112403	N/A	Feb. 22, 2011	Nov. 29, 2011	Feb. 21, 2012	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 22, 2011	Dec. 14, 2011 ~ Dec. 24, 2011	Oct. 21, 2012	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Dec. 14, 2011 ~ Dec. 24, 2011	Dec. 05, 2012	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 10, 2011	Dec. 14, 2011 ~ Dec. 24, 2011	Aug. 09, 2012	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 05, 2011	Dec. 14, 2011 ~ Dec. 24, 2011	Dec. 04, 2012	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 29, 2011	Dec. 14, 2011 ~ Dec. 24, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
EMI TEST RECEIVER	R&S	ESCI 7	100724	9kHz~7GHz	Aug. 22, 2011	Dec. 14, 2011 ~ Dec. 24, 2011	Aug. 21, 2012	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	159088	1GHz ~ 18GHz	Feb. 21, 2011	Dec. 14, 2011 ~ Dec. 24, 2011	Feb. 20, 2012	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100522	N/A	Jan. 13, 2011	Dec. 14, 2011 ~ Dec. 24, 2011	Jan. 12, 2012	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP1N2831 as below.