




DAT-PL-162/04-01

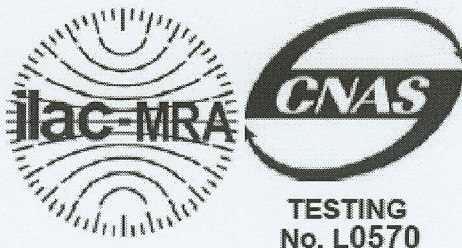

TESTING  
No. L0570

# TEST REPORT

**REPORT NUMBER: I11GC9100-FCC-SAR-1**

**ON**

**Type of Equipment:** Tablet PC  
**Type of Designation:** VS14359  
**Manufacturer:** ViewSonic Corporation

## ACCORDING TO

**FCC Part 2.1093: Radiofrequency radiation exposure evaluation:  
portable devices, Oct-1-2009**

**FCC OET Bulletin 65 Supplement C (Edition 01-01): Additional  
Information for Evaluating Compliance of Mobile and Portable  
Devices with FCC Limits for Human Exposure to Radiofrequency  
Emissions**

**China Telecommunication Technology Labs.**

*Month date, year*  
Sep 22, 2011

*Signature*



He Guili  
**Director**

**FCC ID:** GSS-VS14359

**Report Date:** 2011-09-22

**Test Firm Name:** China Telecommunication Technology Labs

**Registration Number:** 840587

### Statement

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 2.1093. The sample tested was found to comply with the requirements defined in the applied rules.

## Table of Contents

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>1. General Information .....</b>                             | <b>4</b>  |
| 1.1 NOTES .....                                                 | 4         |
| 1.2 TESTERS .....                                               | 5         |
| 1.3 TESTING LABORATORY INFORMATION .....                        | 6         |
| 1.4 DETAILS OF APPLICANT OR MANUFACTURER .....                  | 7         |
| <b>2 Test Item .....</b>                                        | <b>8</b>  |
| 2.1 GENERAL INFORMATION .....                                   | 8         |
| 2.2 OUTLINE OF EUT .....                                        | 8         |
| 2.3 MODIFICATIONS INCORPORATED IN EUT .....                     | 8         |
| 2.4 EQUIPMENT CONFIGURATION .....                               | 8         |
| 2.5 OTHER INFORMATION .....                                     | 8         |
| 2.6 EUT PHOTOGRAPHS .....                                       | 9         |
| 2.7 REFERENCES .....                                            | 9         |
| <b>3 Measurement Systems.....</b>                               | <b>10</b> |
| 3.1 SAR MEASUREMENT SYSTEMS SETUP .....                         | 10        |
| 3.2 E-FIELD PROBE .....                                         | 11        |
| 3.3 PHANTOM .....                                               | 12        |
| 3.4 DEVICE HOLDER .....                                         | 13        |
| <b>4 Test Results.....</b>                                      | <b>14</b> |
| 4.1 OPERATIONAL CONDITION.....                                  | 14        |
| 4.2 TEST EQUIPMENT USED.....                                    | 14        |
| 4.3 APPLICABLE LIMIT REGULATIONS.....                           | 14        |
| 4.4 TEST RESULTS .....                                          | 15        |
| 4.5 TEST SETUP AND PROCEDURES .....                             | 15        |
| 4.6 TEST ENVIRONMENT AND LIQUID INFORMATION.....                | 17        |
| 4.7 SYSTEM VALIDATION CHECK .....                               | 18        |
| 4.8 MAXIMUM OUTPUT POWER STAND-ALONE TEST DETERMINATION .....   | 19        |
| 4.9 SIMULTANEOUS TEST DETERMINATION .....                       | 21        |
| 4.10 TEST DATA.....                                             | 22        |
| 4.11 MEASUREMENT UNCERTAINTY.....                               | 23        |
| <b>Annex A EUT External Photos .....</b>                        | <b>24</b> |
| <b>Annex B EUT Internal Photos.....</b>                         | <b>28</b> |
| <b>Annex C EUT Test Setup Photos .....</b>                      | <b>33</b> |
| <b>Annex D Graphical Measurement Results.....</b>               | <b>35</b> |
| <b>Annex E System Performance Check Graphical Results .....</b> | <b>45</b> |
| <b>Annex F Probes Calibration Certificates .....</b>            | <b>47</b> |
| <b>Annex G Deviations from Prescribed Test Methods .....</b>    | <b>59</b> |



## 1. General Information

### 1.1 Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with the requirements of FCC CFR 47 Part 2.1093.

The test results of this test report relate exclusively to the item(s) tested as specified in section 2.

The following deviations from, additions to, or exclusions from the test specifications have been made. See Annex G.

China Telecommunication Technology Labs.(CTTL) authorizes the applicant or manufacturer (see section 1.4) to reproduce this report provided, and the test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTTL Mr. He Guili.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. CTTL accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

## 1.2 Testers

Name: Zhang Xiaomei  
Position: Engineer  
Department: Department of EMC test  
Signature: 张小梅

### Editor of this test report:

Name: Zhang Xiaomei  
Position: Engineer  
Department: Department of EMC test  
Date: 2011-09-22  
Signature: 张小梅

### Technical responsibility for testing:

Name: Zou Dongyi  
Position: Manager  
Department: Department of EMC test  
Date: 2011-09-22  
Signature: 邹东屹

### 1.3 Testing Laboratory information

#### 1.3.1 Location

Name: China Telecommunication Technology Labs.  
Address: No. 11, Yue Tan Nan Jie, Xi Cheng District,  
BEIJING  
P. R. CHINA, 100083  
Tel: +86 10 68094053  
Fax: +86 10 68011404  
Email: [emc@chinattl.com](mailto:emc@chinattl.com)

#### 1.3.2 Details of accreditation status

Accredited by: DATech Deutsche Akkreditierungsstelle Technik in der  
TGA GmbH (German Accreditation Body for Technology  
in the TGA)  
Lab number: DA7130  
DAR Registration  
number: DAT-PL-162/04-01  
Accredited by: CNAS (China National Accreditation Service for  
Conformity Assessment)  
Registration number: CNAS L0570  
Standard: ISO/IEC 17025:2005

#### 1.3.3 Test location, where different from section 1.3.1

Name: -----  
Address: -----



## 1.4 Details of applicant or manufacturer

### 1.4.1 Applicant

Name: ViewSonic Corporation  
Address: 381 Brea Canyon Road, Walnut, CA 91789, USA  
Country: American  
Telephone: 886 2 29645672  
Fax: 886 2 89132117  
Contact: Lisa  
Telephone: --  
Email: --

### 1.4.2 Manufacturer (if different from applicant in section 1.4.1)

Name: --  
Address: --

### 1.4.3 Manufactory (if different from applicant in section 1.4.1)

Name: --  
Address: --

## 2 Test Item

### 2.1 General Information

Manufacturer: ViewSonic Corporation  
 Name: Tablet PC  
 Model Number: VS14359  
 IMEI Number: --  
 Serial Number: SAR2  
 Production Status: Product  
 Receipt date of test item: 2011-08-31

### 2.2 Outline of EUT

EUT is a electronic paper book supporting 802.11 b/g/n and Bluetooth functions.

### 2.3 Modifications Incorporated in EUT

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

### 2.4 Equipment Configuration

Equipment configuration list:

| Item | Generic Description | Manufacturer                   | Type        | Serial No. | Remarks               |
|------|---------------------|--------------------------------|-------------|------------|-----------------------|
| A    | Tablet PC           | ViewSonic Corporation          | VS14359     | --         | None                  |
| B    | Adaptor             | PHIHONG Electronic Co.,<br>LTD | PSAA10R-050 | --         | None                  |
| C    | battery             | McNair New Power Co.,Ltd       | MLP3575103  | --         | None                  |
|      |                     | M-POWER TECHNOLOGY<br>Co.LTD   | S11ND028A   | --         | Backup <sup>(1)</sup> |

Note 1: The battery of model MLP3575103 is used for SAR measurement in the test, and the model S11ND028A is a backup. They have the same design and same capacity, i.e., the capacity of the two batteries are both: Minimum: 3200mAh 11.84Wh, Nominal: 3300mAh 12.21Wh, and only with the exception of different brand names and manufacturers.

Cables:

| Item | Cable Type             | Manufacturer | Length | Shield | Quantity | Remarks |
|------|------------------------|--------------|--------|--------|----------|---------|
| 1    | DC cable on<br>Adapter | --           | 150cm  | --     | --       | None    |

### 2.5 Other Information

Version of hardware and software:

HW Version: --

SW Version: --



## 2.6 EUT Photographs

See internal and external photo of Annex A and B.

## 2.7 References

**IEEE Std 1528-2003** IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

**OET Bulletin No. 65, Supplement C (2001):** Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields

**FCC KDB Publication 248227 D01** SAR Measurement Procedures for 802.11 a/b/g Transmitters

**FCC KDB Publication 616217 D03** SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers v01


**FCC KDB Publication 447498 D01** Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies v04

## 3 Measurement Systems

### 3.1 SAR Measurement Systems Setup

All measurements were performed using the automated near-field scanning system, DASY5, from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision industrial robot which positions the probes with a positional repeatability of better than 0.02mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system containing the power supply, robot controller, teach pendant (Joystick) and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY5, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc., which is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical signal to digital electric signal of the DAE and transfers data to the PC plug-in card.

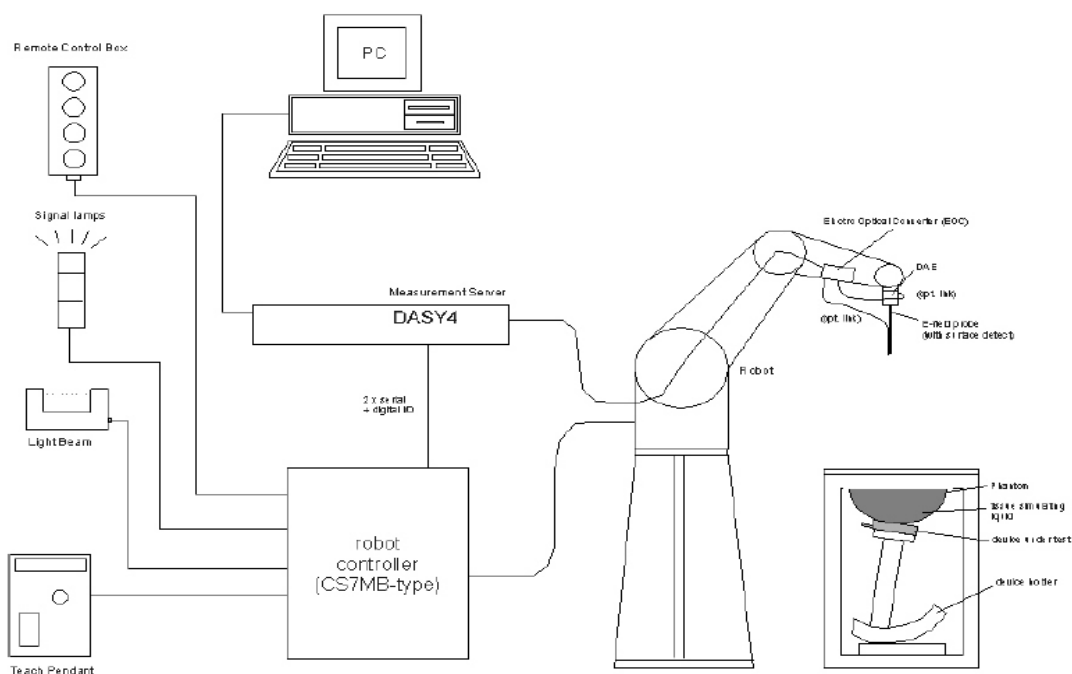

Demonstration of measurement system setup

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter

and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built-in VME-bus computer.

## 3.2 E-field Probe

### 3.2.1 E-field Probe Description

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ .

| Items             | Specification                                                                                                                                                                                                       |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction      | Symmetrical design with triangular core<br>Built-in optical fiber for surface detection System<br>Built-in shielding against static charges<br>PEEK enclosure material(resistant to organic solvents, e.g., glycol) |
| Calibration       | In air from 10 MHz to 2.5 GHz<br>In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz and 1.8GHz (accuracy $\pm 8\%$ )<br>Calibration for other liquids and frequencies upon request              |
| Frequency         | 10 MHz to > 6 GHz; Linearity: $\pm 0.2\text{ dB}$<br>(30 MHz to 3 GHz)                                                                                                                                              |
| Directivity       | $\pm 0.2\text{ dB}$ in brain tissue (rotation around probe axis)<br>$\pm 0.4\text{ dB}$ in brain tissue (rotation normal probe axis)                                                                                |
| Dynamic Range     | 5u W/g to > 100mW/g; Linearity: $\pm 0.2\text{dB}$                                                                                                                                                                  |
| Surface Detection | $\pm 0.2\text{ mm}$ repeatability in air and clear liquids over diffuse reflecting surface                                                                                                                          |
| Dimensions        | Overall length: 330mm<br>Tip length: 16mm<br>Body diameter: 12mm<br>Tip diameter: 6.8mm<br>Distance from probe tip to dipole centers: 2.7mm                                                                         |
| Application       | General dosimetry up to 3GHz<br>Compliance tests of mobile phones<br>Fast automatic scanning in arbitrary phantoms                                                                                                  |



### 3.2.2 E-field Probe Calibration

The Annex C is the copy of the calibration certificate of the used probes.

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The free-space E-field measured in the medium correlates to temperature increase in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
C = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.  
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density ( $\text{kg/m}^3$ ).

### 3.3 Phantom

The ELI flat phantom is constructed of Vinylester, glass fiber reinforced (VE-GF) shell integrated in a wooden table. It enables compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Specifications:

Shell Thickness:  $2.0 \pm 0.2$  mm (bottom plate)

Filling Volume: Approx. 30 liters

Dimensions: Major axis: 600 mm, Minor axis: 400 mm

Liquid depth when testing: at least 150 mm



ELI phantom

### 3.4 Device Holder

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom etc).



Mounting device

For the convenience of the SAR testing of notebook, laptop, tablet and so on, Laptop Extensions Kit is used. It is simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM, ELI4 and SAM v6.0 Phantoms.



Laptop Extensions Kit

## 4 Test Results

### 4.1 Operational Condition

**Specifications** FCC OET 65C (01-01)  
**Date of Tests** 2011-09-22  
**Operation Mode** TX at the highest output peak power level  
**Method of measurement:** FCC OET 65C (01-01)

### 4.2 Test Equipment Used

| ITEM                     | TYPE     | S/N        | CALIBRATION DATE | DUE DATE   |
|--------------------------|----------|------------|------------------|------------|
| probe                    | ES3DV3   | 3158       | 2011-06-16       | 2012-06-15 |
| DAE                      | DAE4     | 797        | 2011-06-21       | 2012-06-20 |
| D2450V2                  | dipole   | 803        | 2011-06-22       | 2012-06-21 |
| Power Meter              | E4417A   | GB41050460 | 2010-05-25       | 2012-05-20 |
| Signal Generator         | MG3694B  | 102917     | 2011-01-29       | 2012-01-28 |
| Power Sensor             | E9327A   | US40440198 | 2011-07-27       | 2012-07-27 |
| Power Sensor             | E9327A   | US40440326 | 2011-07-27       | 2012-07-27 |
| Power Amplifier          | 150W1000 | 150W1000   | NA               | NA         |
| Attenuator               | 20dB     | 836471/003 | NA               | NA         |
| Attenuator               | 20dB     | 836471/004 | NA               | NA         |
| Attenuator               | 2        | BL1250     | NA               | NA         |
| Attenuator               | 2        | BK774      | NA               | NA         |
| Dual directional coupler | 4242-20  | 04200      | NA               | NA         |
| Probe kit                | 85070E   | 3G-S-00139 | NA               | NA         |
| Network Analyzer         | 8753ES   | MY40002093 | 2011-05-31       | 2012-05-31 |
| EMC Analyzer             | E7405A   | US41160321 | 2011-08-29       | 2012-08-28 |

### 4.3 Applicable Limit Regulations

| Item                                      | Limit Level |
|-------------------------------------------|-------------|
| Local Specific Absorption Rate (SAR) (1g) | 1.6W/kg     |

## 4.4 Test Results

The EUT complies.

**Note:**

All measurements are traceable to national standards.

## 4.5 Test Setup and Procedures

### 4.5.1 Test distance


The edge of the EUT towards and directed tightly to touch the bottom of the flat phantom.

### 4.5.2 Duty Factor and Crest Factor


The crest factor is 1.

### 4.5.3 Test position definition

The six edges, face, back, top, bottom, left and right edge, are defined as the following pictures.

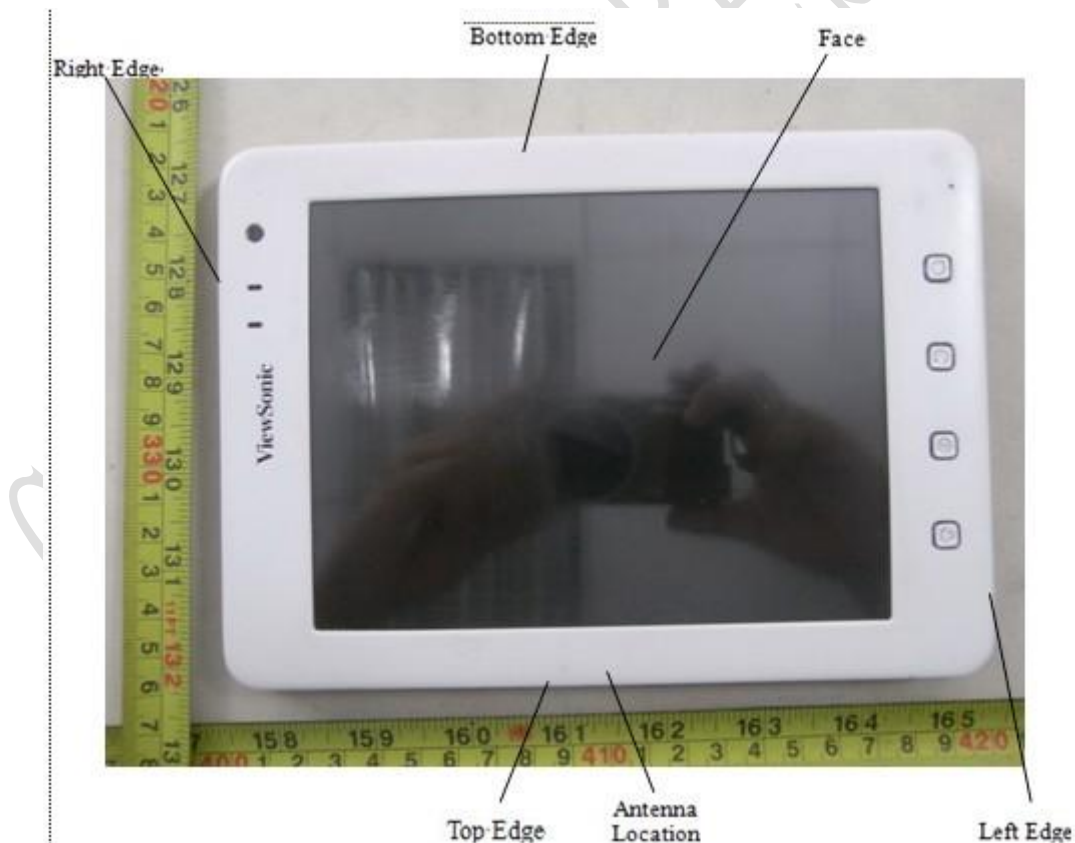



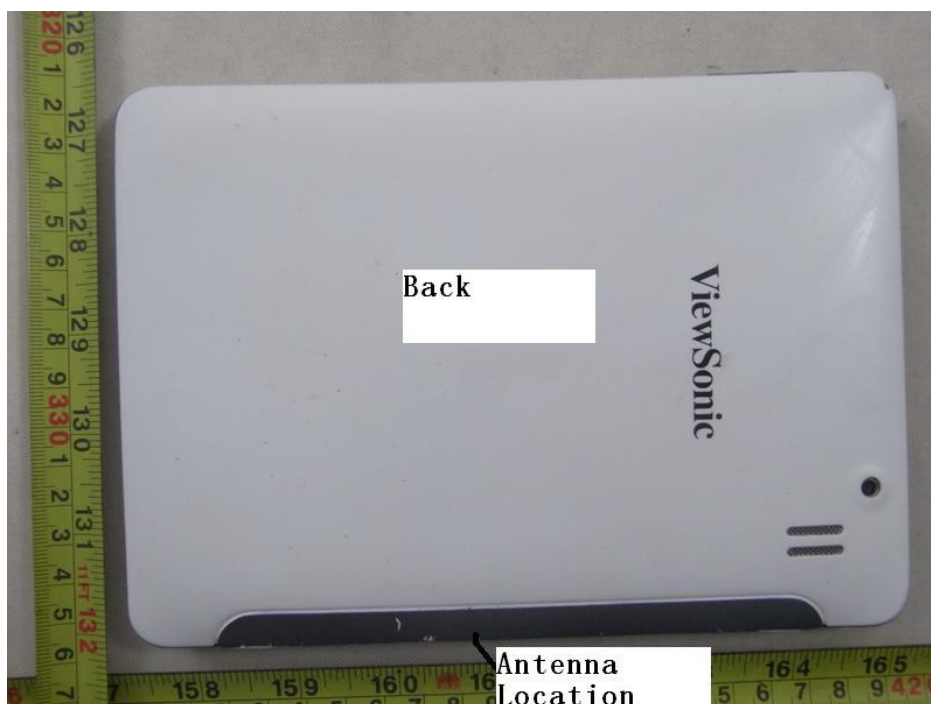

#### 4.5.4 Antenna position and Test positions Selection



According to FCC KDB 447498 4) ii) (2) SAR is required only for the edge with the most conservative exposure condition. So the SAR tests for the Bottom edge, left edge and right edge are not performed.

#### 4.5.5 General body mode measurement procedures

Generally, for body mode, the evaluation was performed according to the following procedure:

Step 1: The SAR value at a fixed location above the center point flat phantom was measured and was used as a reference value for assessing the power drift.

Step 2: The SAR distribution at the exposed side of the body was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the EUT and the horizontal grid spacing was 15 mm x 15 mm. Based on these data, the area of the maximum absorption was determined by interpolation.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on the least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation should be repeated.

### 4.6 Test Environment and Liquid Information

#### 4.6.1 Test Environment

| Date:      | Liquid Temperature<br>(°C) | Ambient Temperature<br>(°C) | Ambient Humidity<br>(%) |
|------------|----------------------------|-----------------------------|-------------------------|
|            | 18~25                      | 18~25                       | 30~70                   |
| 2011-09-22 | 20.4                       | 20.2                        | 53.3                    |

**4.6.2 Liquid Recipes**

| INGREDIENTS | TISSUE TYPE           |
|-------------|-----------------------|
|             | MSL2450               |
| Water       | 68.64% weight percent |
| DGBE        | 31.37% weight percent |
| Sugar       | 0                     |
| Salt        | 0                     |
| Cellulose   | 0                     |
| Preventol   | 0                     |

**4.6.3 Liquid Parameters**

| Tissue Type           | Type          | Dielectric Parameters |              | Date       |
|-----------------------|---------------|-----------------------|--------------|------------|
|                       |               | permittivity          | conductivity |            |
| MSL2450<br>At 2450MHz | Target        | 52.7                  | 1.95         | 2011-09-22 |
|                       | ±5%<br>window | 50.06~55.34           | 1.85~2.05    |            |
|                       | Measured      | 50.83                 | 2.04         |            |

**4.7 System Validation Check****Validation Method:**

The setup of system validation check or performance check is demonstrated as figure 5. The amplifier, low pass filter and attenuators are optional. The dipole shall be positioned and centered below the phantom, paralleling to the longest side of the phantom. A low loss and low dielectric constant spacer on the dipole may be used to guarantee the correct distance between the dipole top surface and the phantom bottom surface.

The separation  $d$ , which is defined as the distance from the liquid bottom surface to the dipole's central axis at location of the feed-point, should be as following: for less than 1000 MHz dipole,  $d = 15$  mm, and for more than 1000 MHz dipole,  $d = 10$  mm, and this can be obtained using two different size spacer. The dipole arms shall be parallel to the flat phantom surface.

First the power meter PM1 is connected to the cable and it measures the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the (Att1) value) and the power meter PM2 is read at that level. Then after connecting the cable

to the dipole, the signal generator is readjusted for the same reading at the power meter PM2.

The system validation check procedures are the same as all measurement procedures used for compliance tests. A complete 1 g averaged SAR measurement is performed using the flat part of the phantom. The reference dipole input power is adjusted to produce a 1 g averaged SAR value falling in the range of 0.4 – 10 mW/g. The 1 g averaged SAR is measured using corresponding dipole. Then the results are normalized to 1 W forward input power and compared with the reference SAR values.

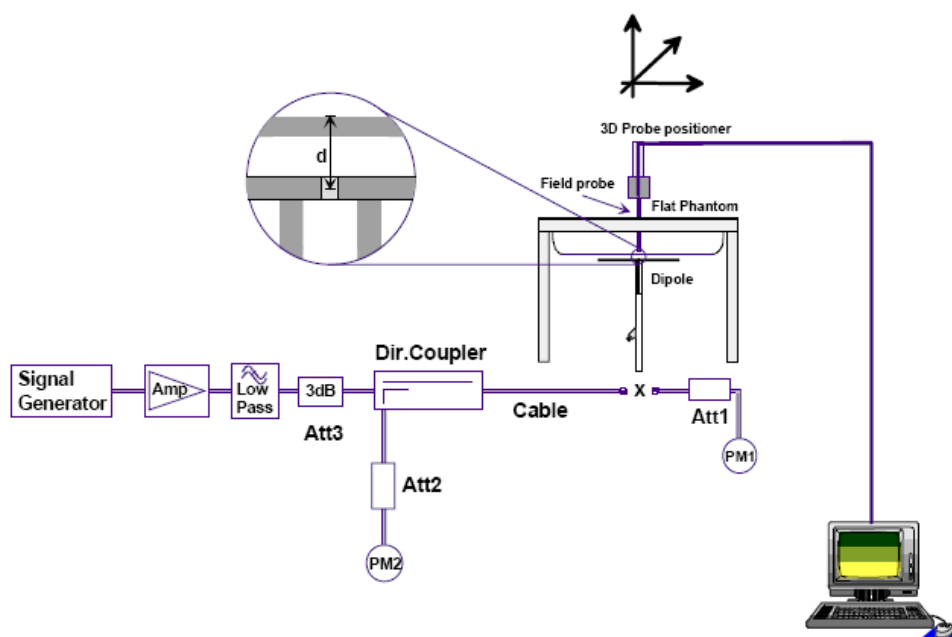


Figure 5 Illustration of system validation test setup

### Validation Results

| Date:      | Frequency (MHz) | Tissue Type | Input Power(mw) | Targeted (SAR1g) | Measured (SAR1g) | Deviation (%) |
|------------|-----------------|-------------|-----------------|------------------|------------------|---------------|
| 2011-09-22 | 2450            | Body        | 125             | 50.8mW/g         | 52.0mW/g         | 2.4           |

### 4.8 Maximum Output Power stand-alone test determination

According to FCC OET 65c, maximum output power shall be measured before and after each SAR test. The test setup and method are described as following.

#### Test setup

The output power measurement test setup is demonstrated as figure 6.



Figure 6 Demonstration of power measurement

(1) Wifi power values

|     | CHANNEL | 設置值 | PEAK POWER |  |     | CHANNEL | 設置值 | avg POWER |
|-----|---------|-----|------------|--|-----|---------|-----|-----------|
| B   | 1       | 17  | 18.82      |  | B   | 1       | 17  | 15.5      |
|     | 6       | 17  | 18.59      |  |     | 6       | 17  | 15.45     |
|     | 11      | 18  | 18.98      |  |     | 11      | 18  | 15.54     |
| G   | 1       | 15  | 19.38      |  | G   | 1       | 15  | 13.42     |
|     | 6       | 15  | 19.4       |  |     | 6       | 15  | 13.32     |
|     | 11      | 15  | 19.11      |  |     | 11      | 15  | 13.04     |
| N20 | 1       | 13  | 18.46      |  | N20 | 1       | 13  | 12.16     |
|     | 6       | 14  | 19.29      |  |     | 6       | 14  | 12.38     |
|     | 11      | 15  | 19.09      |  |     | 11      | 15  | 12.4      |

Power unit: dBm

**From above tables, according to FCC KDB Publication 248227 D01, only 802.11b modes are necessary to be tested for SAR as the average powers of 802.11g/n modes are lower than those of 802.11b.**

(2) Bluetooth power values

| BT | FREQUENCY | POWER |
|----|-----------|-------|
| 1M | 2402      | 1.79  |
|    | 2441      | 1.71  |
|    | 2480      | 0.74  |
| 3M | 2402      | 1.83  |
|    | 2441      | 1.78  |
|    | 2480      | 1.05  |

Power unit: dBm

**According to FCC KDB Publication 447498 D01, if the power is less than threshold value,  $60/f(\text{GHz})$  mW, the transmitter is exempted for SAR test. For Bluetooth, the threshold is 24.5mW, i.e., 13.9dBm. From above table, the Bluetooth transmitter's power is less than the threshold, so it is exempt for SAR test.**



#### 4.9 Simultaneous test determination

According to the applicant's description, the two systems, wifi and Bluetooth use the same antenna, and they can not transmit simultaneously, so the simultaneous transmission SAR test is not necessary.

Test Report

## 4.10 Test Data

Note: The edge of the EUT towards and directed tightly to touch the bottom of the flat phantom.


### 802.11b, 1Mbps, body

| Test configuration | SAR <sub>1g</sub> [W/kg] / Power Drift [dB] |   |                             |       |                               |       |
|--------------------|---------------------------------------------|---|-----------------------------|-------|-------------------------------|-------|
|                    | Channel 1 [low]<br>2412 MHz                 |   | Channel 6 [Mid]<br>2437 MHz |       | Channel 11 [high]<br>2464 MHz |       |
| Face               | --                                          | / | --                          | 0.046 | /                             | 0     |
| Back               | --                                          | / | --                          | 0.038 | /                             | -0.31 |
| Top                | 0.056                                       | / | 0.37                        | 0.047 | /                             | 0.10  |
| Bottom             | --                                          | / | --                          | --    | /                             | --    |
| Left               | --                                          | / | --                          | --    | /                             | --    |
| Right              | --                                          | / | --                          | --    | /                             | --    |

### 4.11 Measurement uncertainty

| ERROR SOURCE                                                            | Uncertainty value (%)                                   | Probability distribution | Divisor    | $C_i$<br>(1g) | Standard Uncertainty (%) |
|-------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|------------|---------------|--------------------------|
| <b>Measurement equipment</b>                                            |                                                         |                          |            |               |                          |
| Probe calibration                                                       | 5.9                                                     | Normal                   | 1          | 1             | 5.9                      |
| Probe axial isotropy                                                    | 4.7                                                     | Rectangular              | $\sqrt{3}$ | 0.7           | 1.9                      |
| Probe hemispherical isotropy                                            | 9.6                                                     | Rectangular              | $\sqrt{3}$ | 0.7           | 3.9                      |
| Probe linearity                                                         | 4.7                                                     | Rectangular              | $\sqrt{3}$ | 1             | 2.7                      |
| Detection limits                                                        | 0.25                                                    | Rectangular              | $\sqrt{3}$ | 1             | 0.6                      |
| Boundary effect                                                         | 0.8                                                     | Rectangular              | $\sqrt{3}$ | 1             | 0.6                      |
| Measurement device                                                      | 0.3                                                     | Normal                   | 1          | 1             | 0.3                      |
| Response time                                                           | 0.0                                                     | Normal                   | 1          | 1             | 0                        |
| Noise                                                                   | 0.0                                                     | Normal                   | 1          | 1             | 0                        |
| Integration time                                                        | 1.7                                                     | Normal                   | 1          | 1             | 2.6                      |
| <b>Mechanical constraints</b>                                           |                                                         |                          |            |               |                          |
| Scanning system                                                         | 1.5                                                     | Rectangular              | $\sqrt{3}$ | 1             | 0.2                      |
| Positioning of the probe                                                | 2.9                                                     | Normal                   | 1          | 1             | 2.9                      |
| Phantom shell                                                           | 4.0                                                     | Rectangular              | $\sqrt{3}$ | 1             | 2.3                      |
| Positioning of the dipole                                               | 2.0                                                     | Normal                   | 1          | 1             | 2.0                      |
| Positioning of the phone                                                | 2.9                                                     | Normal                   | 1          | 1             | 2.9                      |
| Device holder disturbance                                               | 3.6                                                     | Normal                   | 1          | 1             | 3.6                      |
| <b>Physical parameters</b>                                              |                                                         |                          |            |               |                          |
| Liquid conductivity<br>(deviation from target)                          | 5.0                                                     | Rectangular              | $\sqrt{3}$ | 0.5           | 1.4                      |
| Liquid conductivity<br>(measurement error)                              | 4.3                                                     | Rectangular              | $\sqrt{3}$ | 0.5           | 1.2                      |
| Liquid permittivity<br>(deviation from target)                          | 5.0                                                     | Rectangular              | $\sqrt{3}$ | 0.5           | 1.4                      |
| Liquid permittivity<br>(measurement error)                              | 4.3                                                     | Rectangular              | $\sqrt{3}$ | 0.5           | 1.2                      |
| Drifts in output power of the phone,<br>probe, temperature and humidity | 5.0                                                     | Rectangular              | $\sqrt{3}$ | 1             | 2.9                      |
| Environment disturbance                                                 | 3.0                                                     | Rectangular              | $\sqrt{3}$ | 1             | 1.7                      |
| <b>Post-processing</b>                                                  |                                                         |                          |            |               |                          |
| SAR interpolation and extrapolation                                     | 0.6                                                     | Rectangular              | $\sqrt{3}$ | 1             | 0.6                      |
| Maximum SAR evaluation                                                  | 1.0                                                     | Rectangular              | $\sqrt{3}$ |               | 0.6                      |
| Combined standard uncertainty                                           | $u_c = \sqrt{\sum_{i=1}^m C_i^2 \cdot u_i^2} = 11.08\%$ |                          |            |               |                          |
| Expanded uncertainty<br>(confidence interval of 95%)                    | Normal $u_e = 1.96u_c = 21.7\%$                         |                          |            |               |                          |

## Annex A EUT External Photos

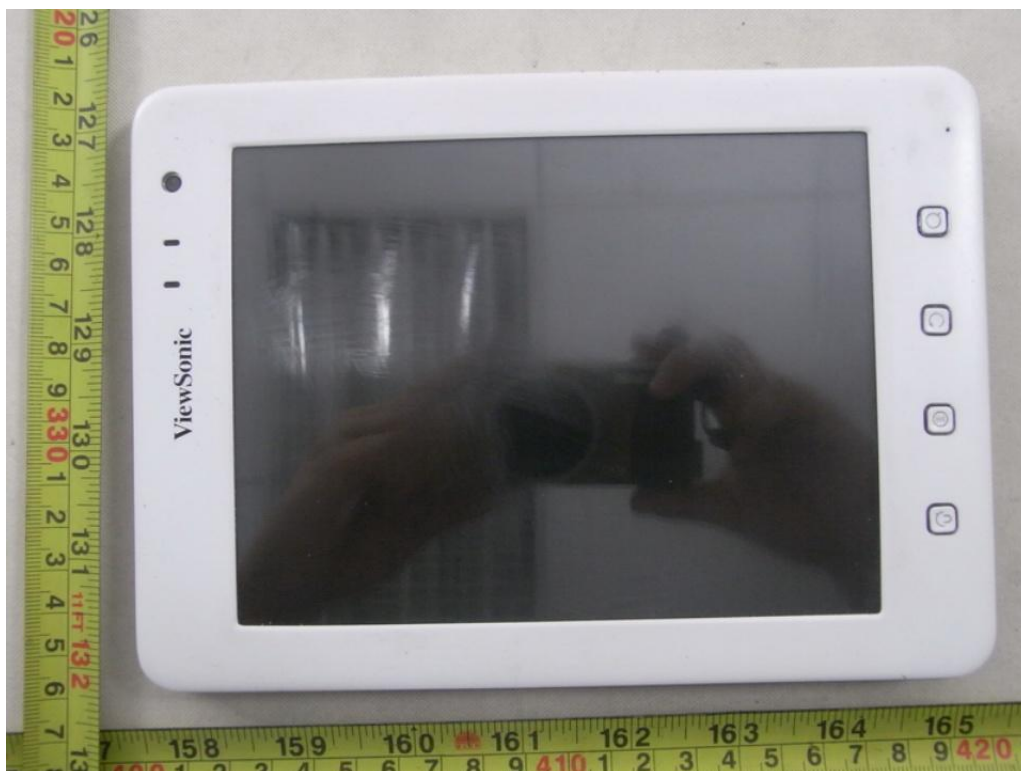


Face



Back



Bottom

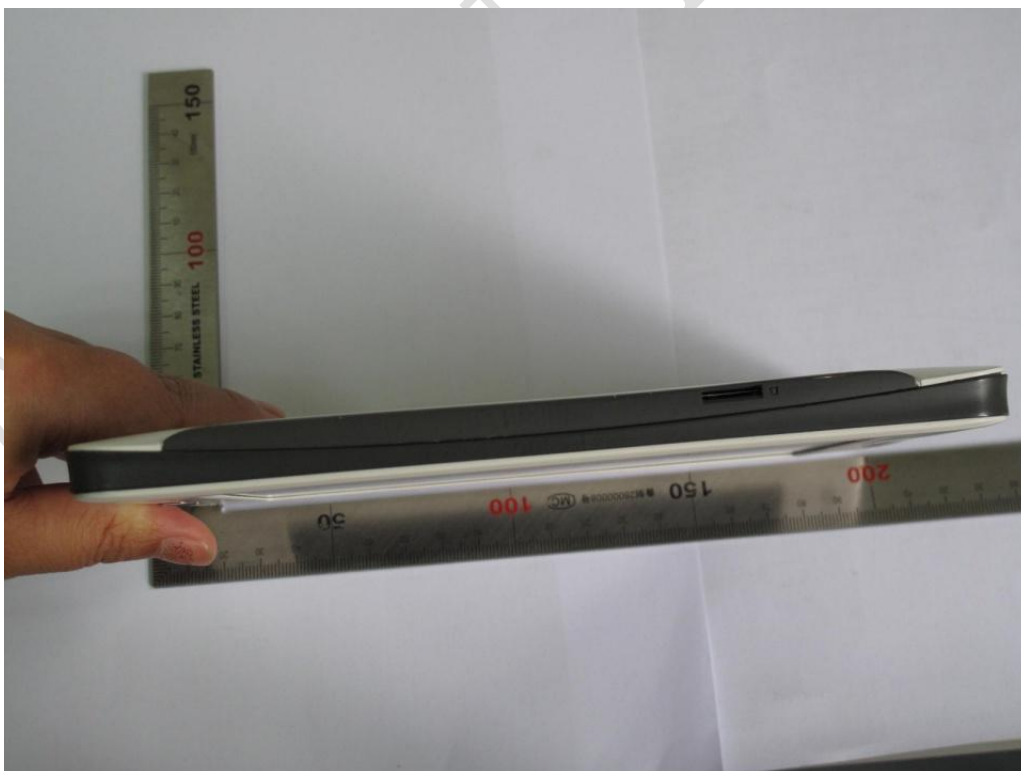


Top





Left

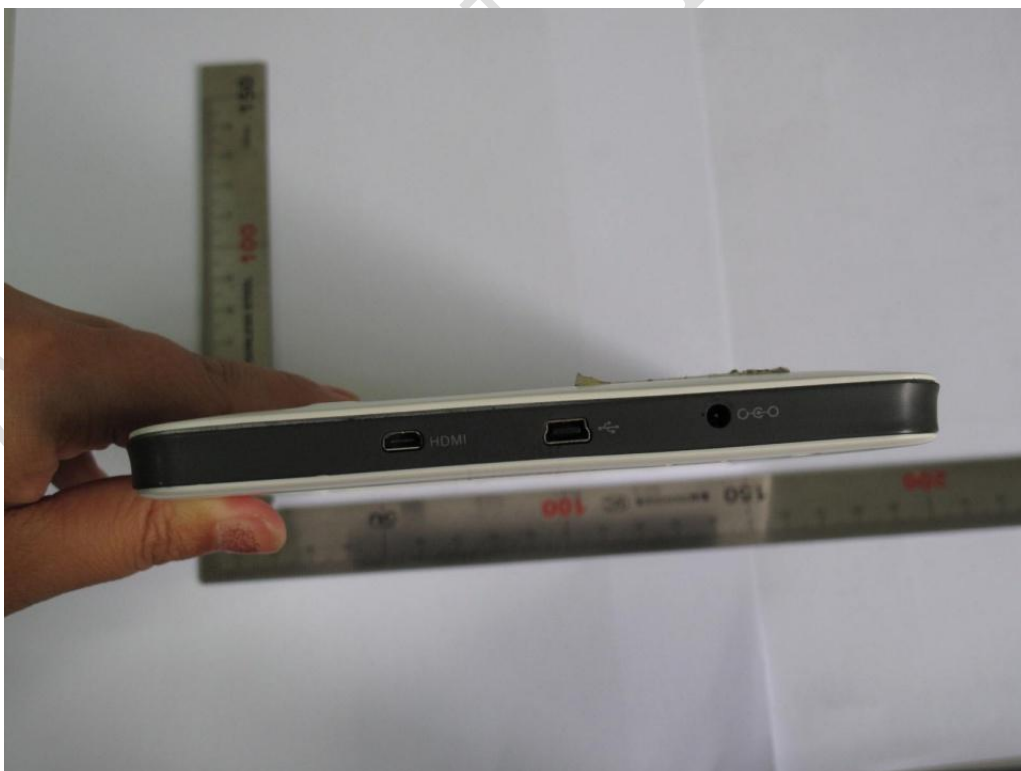

Right




Adapter and cable



Adapter

## Annex B EUT Internal Photos

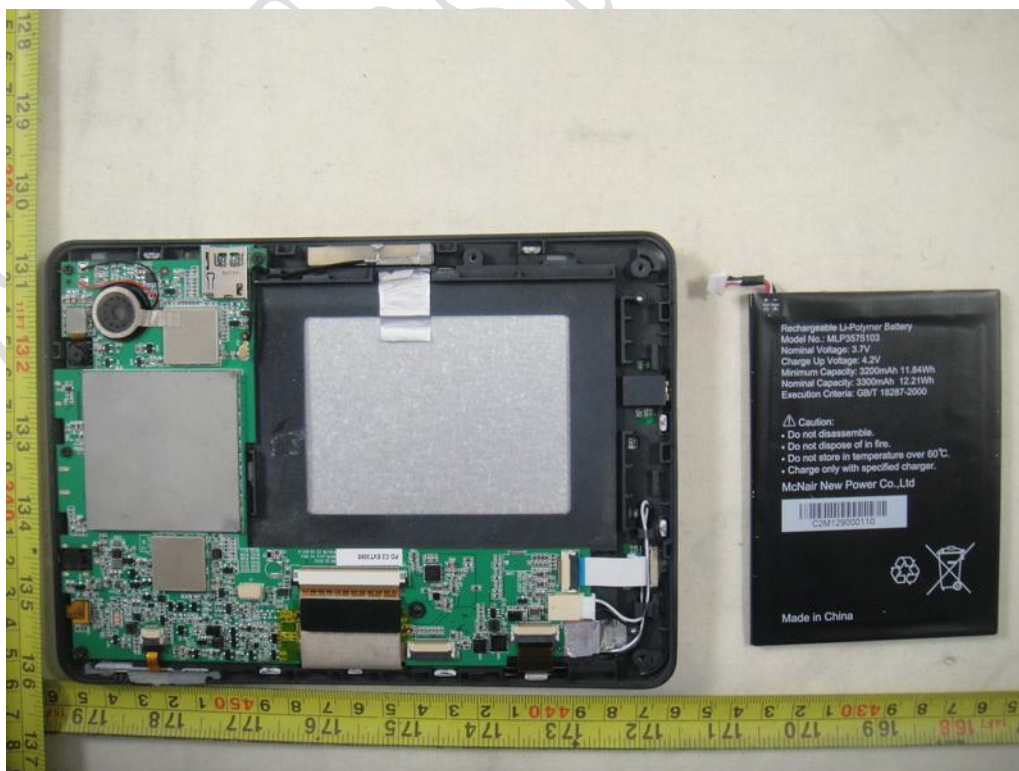







Battery (Model: MLP3575103, which is used for SAR measurement in this report)







Backup battery (model: S11ND028A)

The product declared the battery (S11ND028A) was the backup for battery (MLP3575103) by other manufacture, with the same design and components.

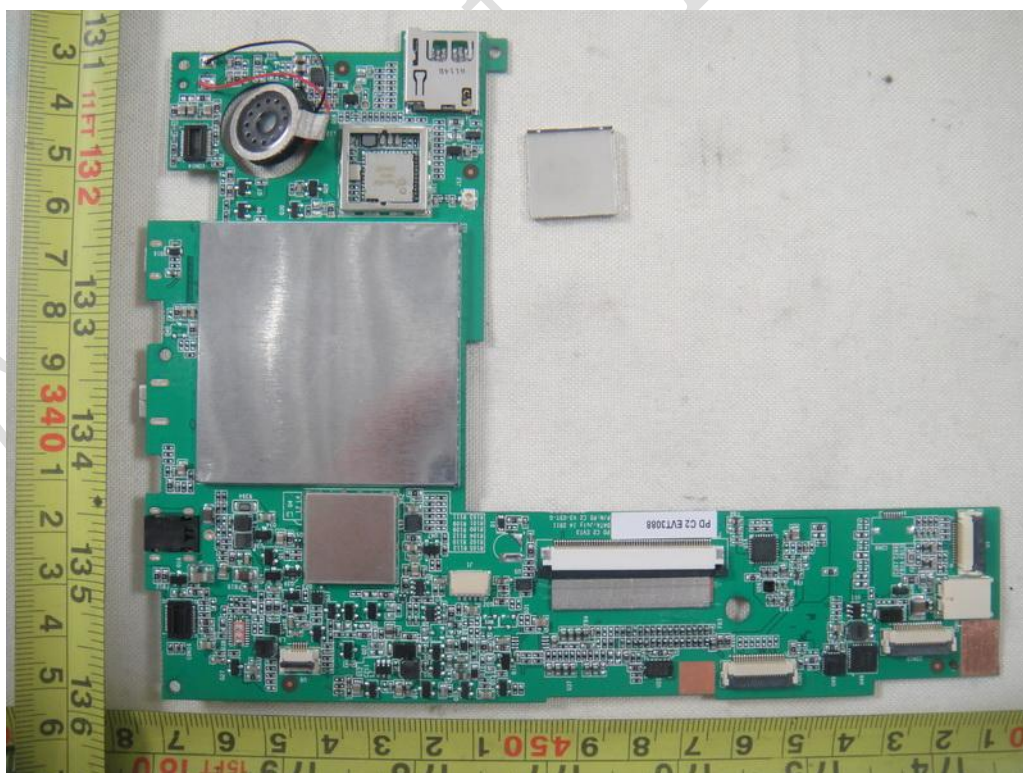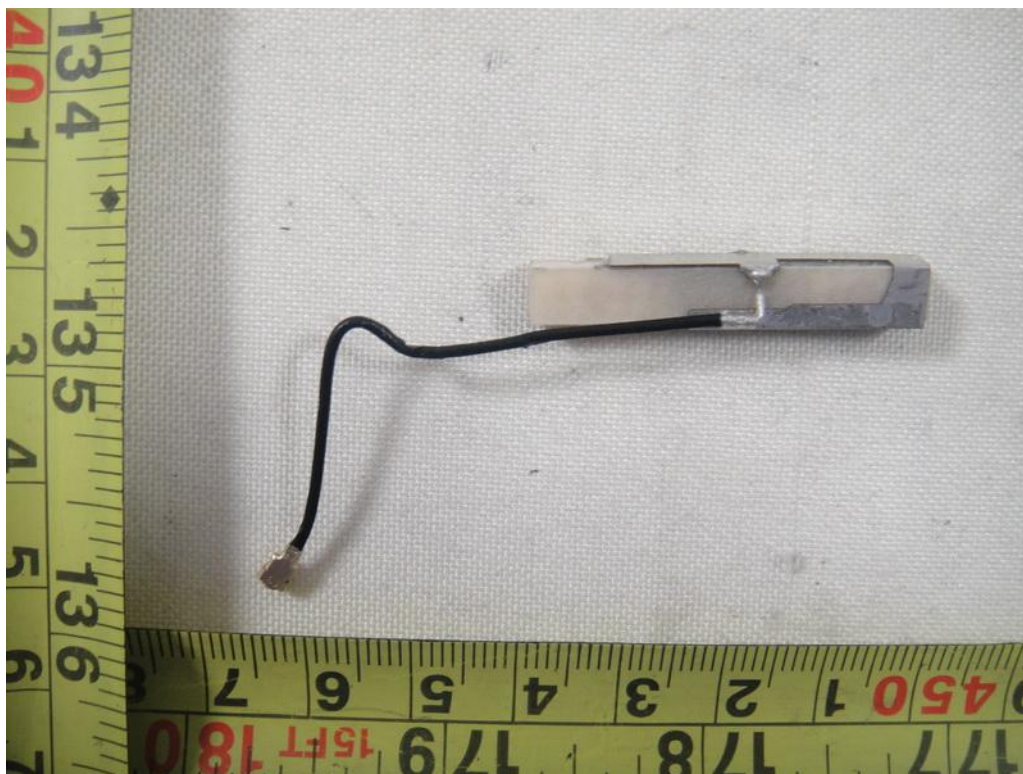



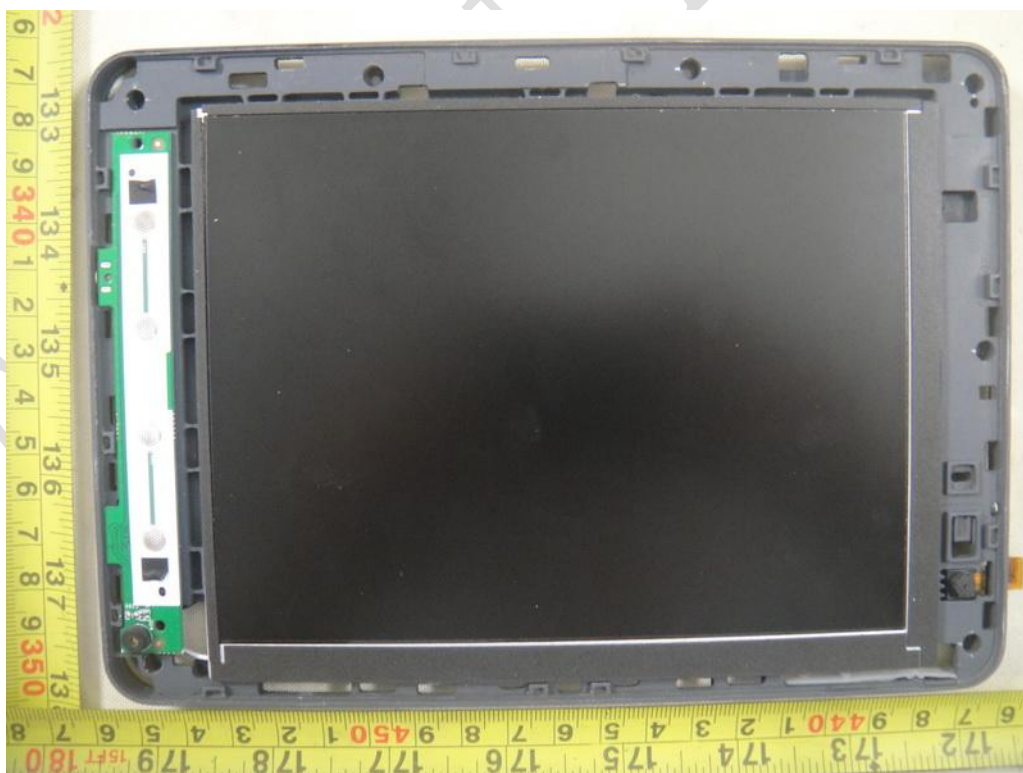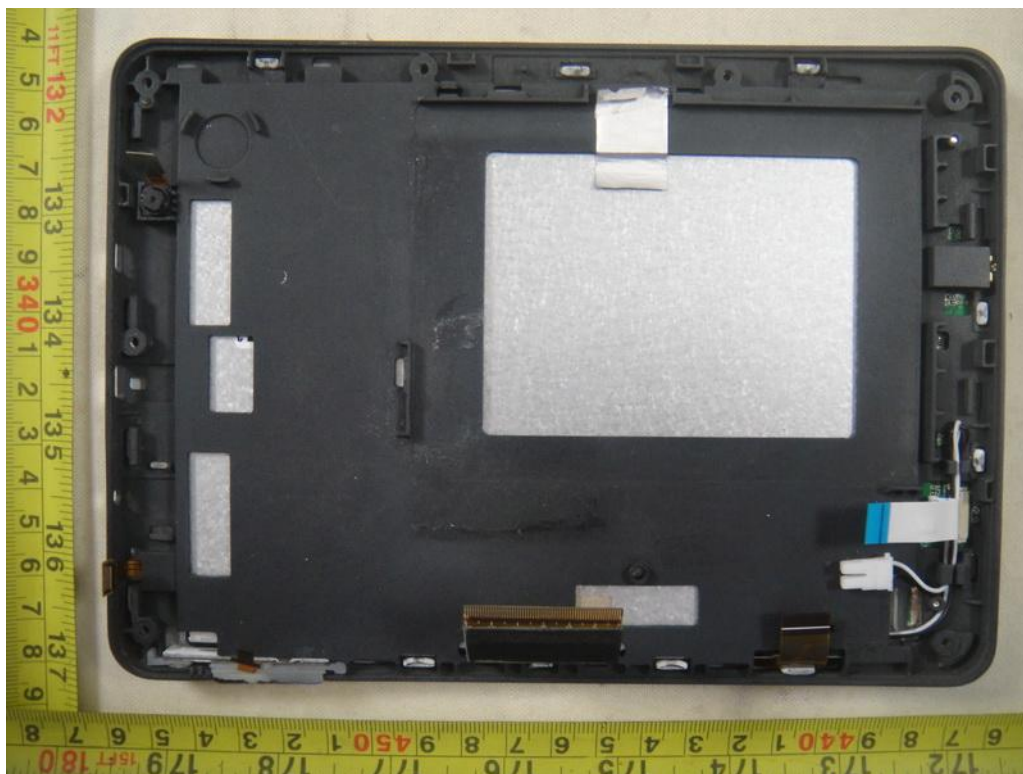

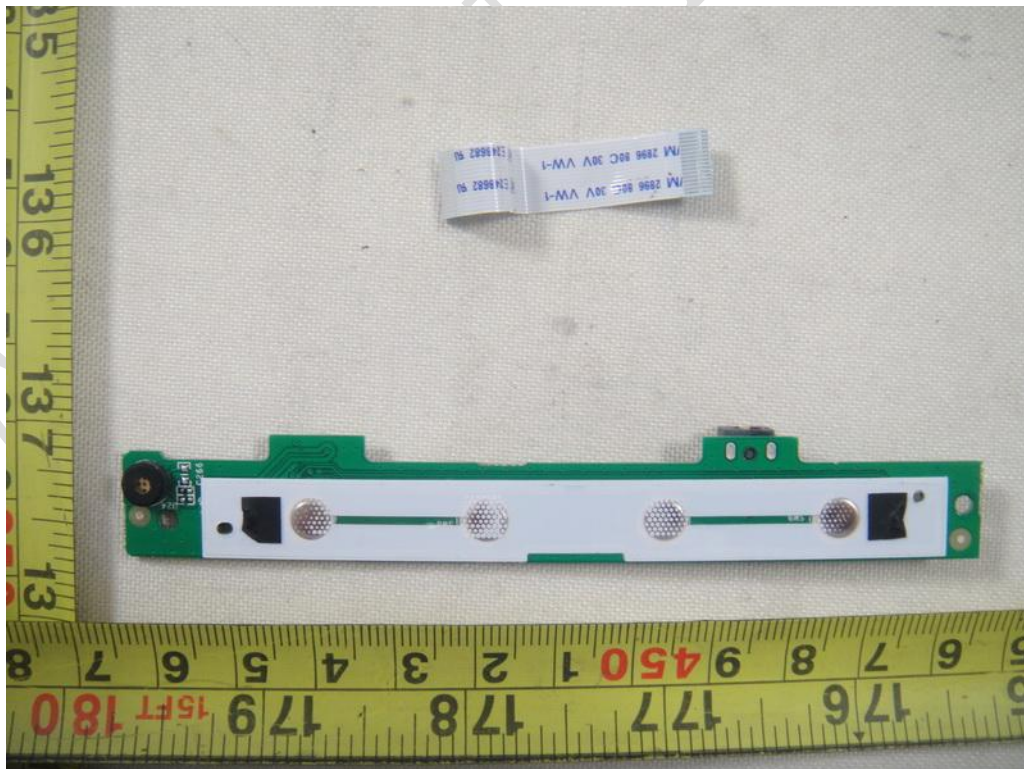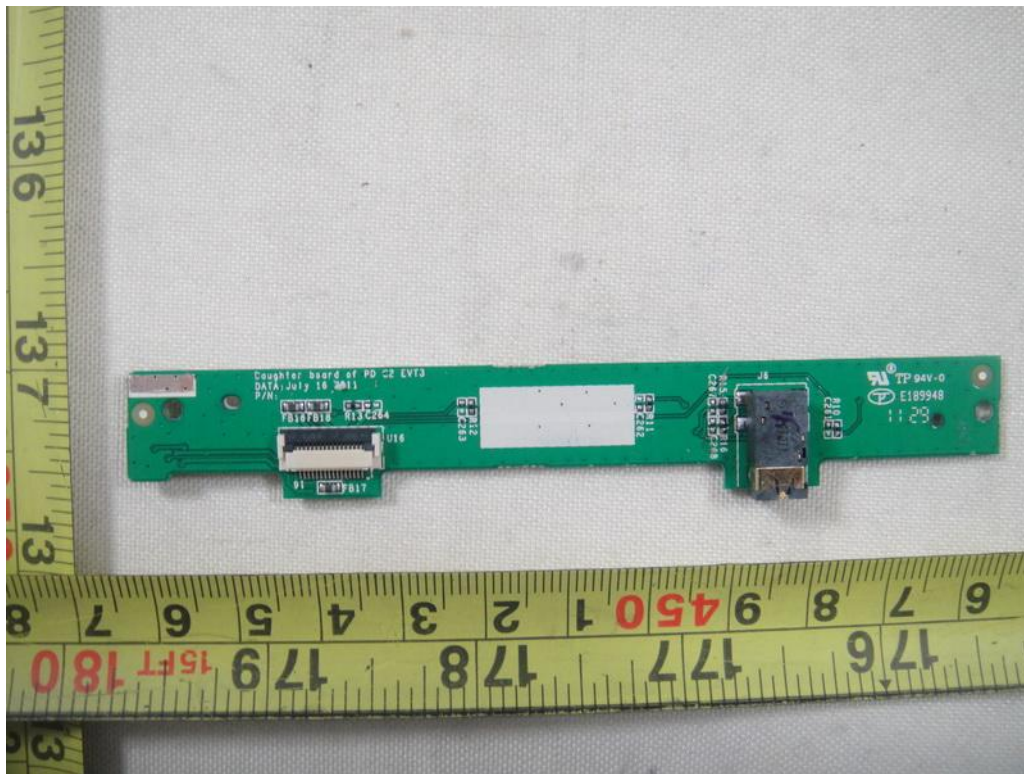



## Annex C EUT Test Setup Photos



Picture 1 Face to Phantom



Picture 2 Back to Phantom



Picture 3 Top to Phantom



## Annex D Graphical Measurement Results

Date/Time: 2011-9-22 8:05:56, Date/Time: 2011-9-22 8:12:11

### FCC\_Body\_Face\_802.11b\_Middle

**DUT: VISONIC; Type: VISONIC; Serial: --**

Communication System: 802.11b/g; Communication System Band: WLAN2.4G;

Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.028$  mho/m;  $\epsilon_r = 50.805$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3158; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-6-16
  - Modulation Compensation: - -
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2011-6-21
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

**Configuration/802.11b\_Face\_Mid/Area Scan (41x91x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.054 mW/g

**Configuration/802.11b\_Face\_Mid/Zoom Scan (6x6x7)/Cube 0:**


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.101 W/kg

**SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.021 mW/g**

Maximum value of SAR (measured) = 0.052 mW/g

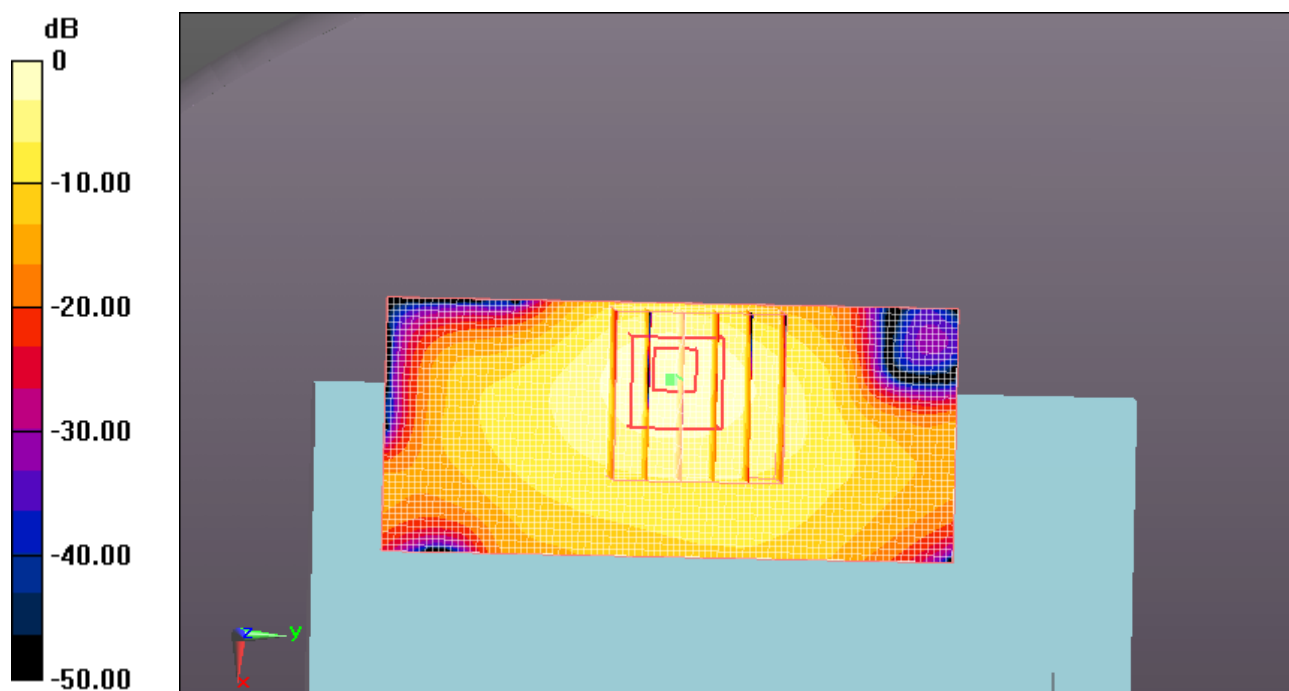

0 dB = 0.050mW/g

Date/Time: 2011-9-22 8:52:17, Date/Time: 2011-9-22 9:00:41

**FCC\_Body\_Back\_802.11b\_Middle****DUT: VISONIC; Type: VISONIC; Serial: --**

Communication System: 802.11b/g; Communication System Band: WLAN2.4G;

Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.028$  mho/m;  $\epsilon_r = 50.805$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3158; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-6-16
  - Modulation Compensation: - -
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2011-6-21
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

**Configuration/802.11b\_Back\_Mid 2/Area Scan (51x111x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.054 mW/g

**Configuration/802.11b\_Back\_Mid 2/Zoom Scan (8x9x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.530 V/m; Power Drift = -0.31 dB

Peak SAR (extrapolated) = 0.088 W/kg

**SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.016 mW/g**

Maximum value of SAR (measured) = 0.044 mW/g

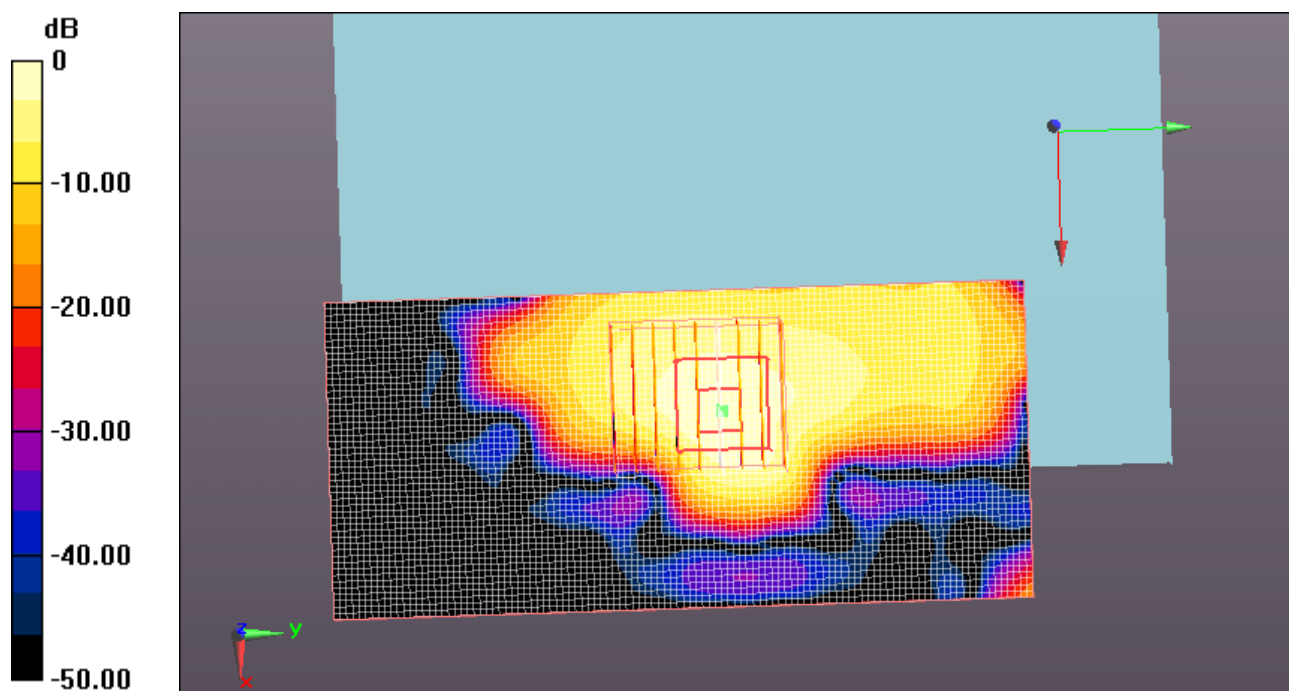

0 dB = 0.040mW/g



Date/Time: 2011-9-22 9:48:52, Date/Time: 2011-9-22 9:42:17

## FCC\_Body\_TOP\_802.11b\_Low

**DUT: VISONIC\_TB; Type: VISONIC\_TB; Serial: --**

Communication System: 802.11b/g; Communication System Band: WLAN2.4G;

Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.983$  mho/m;  $\epsilon_r = 51.017$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3158; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-6-16
  - Modulation Compensation: - -
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2011-6-21
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

### Configuration/802.11b\_Top\_Low/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.667 V/m; Power Drift = 0.37 dB

Peak SAR (extrapolated) = 0.143 W/kg


**SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.021 mW/g**

Maximum value of SAR (measured) = 0.069 mW/g

### Configuration/802.11b\_Top\_Low/Area Scan (41x101x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.056 mW/g

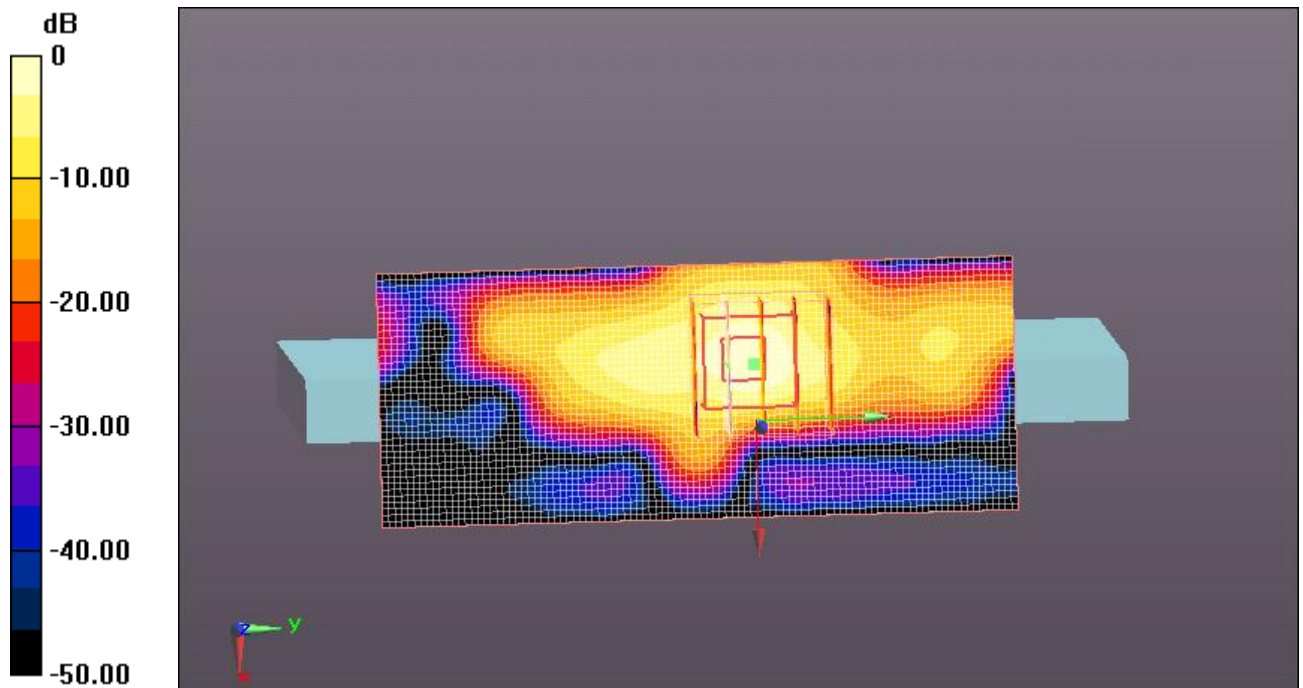

0 dB = 0.060mW/g

Date/Time: 2011-9-22 8:34:11, Date/Time: 2011-9-22 8:40:46

**FCC\_Body\_TOP\_802.11b\_Middle****DUT: VISONIC\_TB; Type: VISONIC\_TB; Serial: --**

Communication System: 802.11b/g; Communication System Band: WLAN2.4G;

Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.028$  mho/m;  $\epsilon_r = 50.805$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3158; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-6-16
  - Modulation Compensation: - -
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2011-6-21
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

**Configuration/802.11b\_Top\_Mid/Area Scan (41x101x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.053 mW/g

**Configuration/802.11b\_Top\_Mid/Zoom Scan (5x5x7)/Cube 0:**


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.419 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.101 W/kg

**SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.018 mW/g**

Maximum value of SAR (measured) = 0.060 mW/g

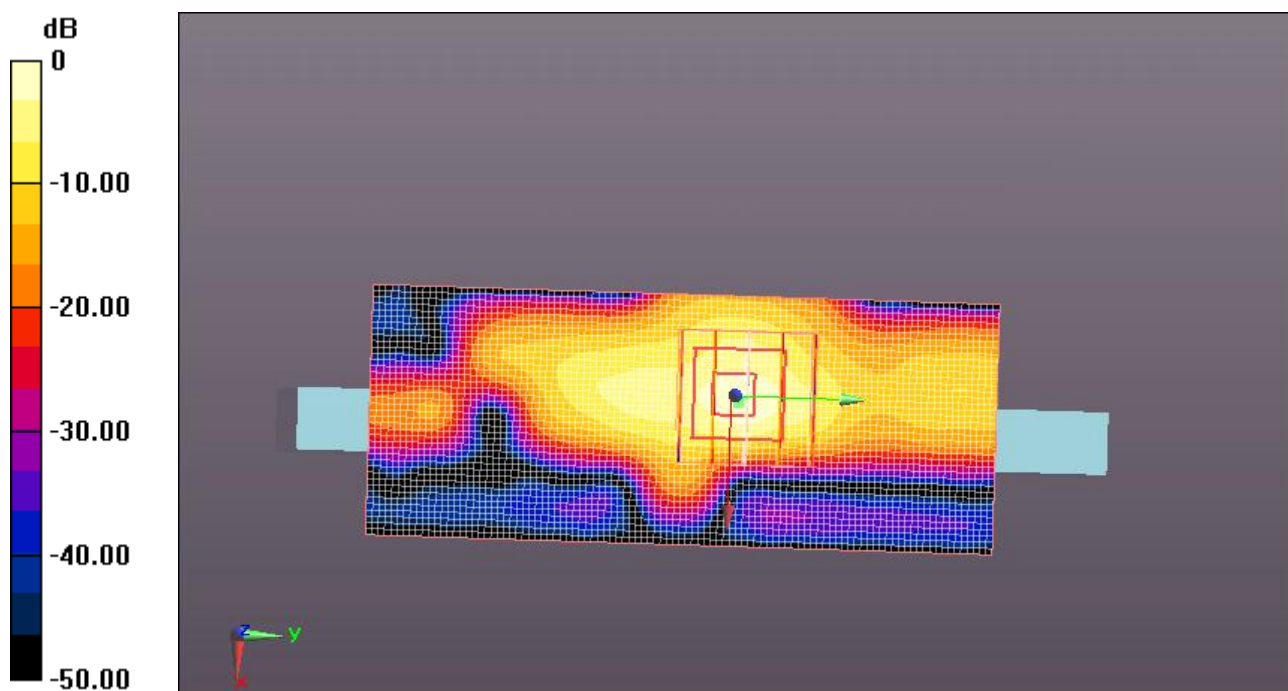

0 dB = 0.060mW/g



Date/Time: 2011-9-22 9:24:09, Date/Time: 2011-9-22 9:17:35

**FCC\_Body\_TOP\_802.11b\_High****DUT: VISONIC\_TB; Type: VISONIC\_TB; Serial: --**

Communication System: 802.11b/g; Communication System Band: WLAN2.4G;

Frequency: 2462 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.067$  mho/m;  $\epsilon_r = 50.824$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3158; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-6-16
  - Modulation Compensation: - -
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2011-6-21
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

**Configuration/802.11b\_Top\_High/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.486 V/m; Power Drift = 0.38 dB

Peak SAR (extrapolated) = 0.134 W/kg


**SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.019 mW/g**

Maximum value of SAR (measured) = 0.061 mW/g

**Configuration/802.11b\_Top\_High/Area Scan (41x101x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.052 mW/g

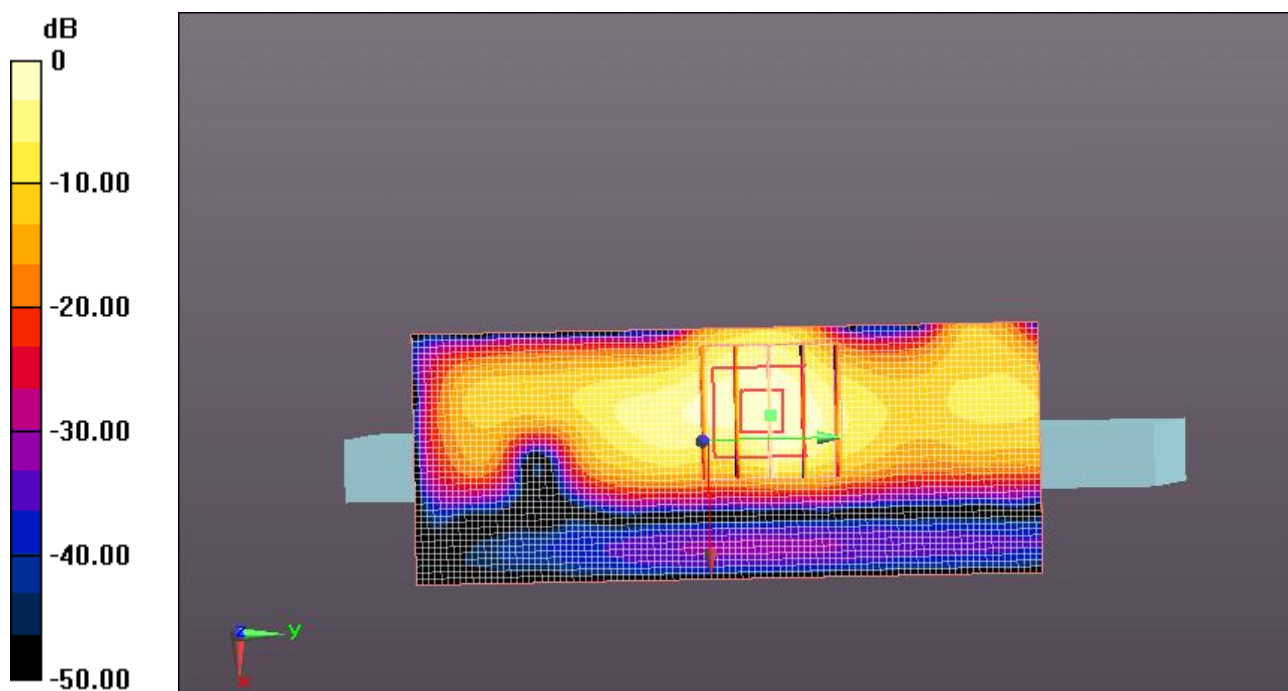

0 dB = 0.050mW/g

## Annex E System Performance Check Graphical Results

Date/Time: 2011-9-22 7:40:19, Date/Time: 2011-9-22 7:50:48

### FCC\_SystemPerformanceCheck-Body\_D2450\_21dBm

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:xxx**


Communication System: CW; Communication System Band: - -; Frequency: 2450 MHz; Communication System PAR: 0 dB  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.043$  mho/m;  $\epsilon_r = 50.833$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3158; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-6-16
  - Modulation Compensation: - -
- Sensor-Surface: 3.4mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2011-6-21
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- DASYS 52.6.2(482); SEMCAD X 14.4.5(3634)

**Configuration/d=10mm, Pin=21 dBm/Area Scan (41x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 8.110 mW/g

**Configuration/d=10mm, Pin=21 dBm/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 60.959 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 14.167 W/kg  
**SAR(1 g) = 6.5 mW/g; SAR(10 g) = 2.96 mW/g**  
Maximum value of SAR (measured) = 7.341 mW/g

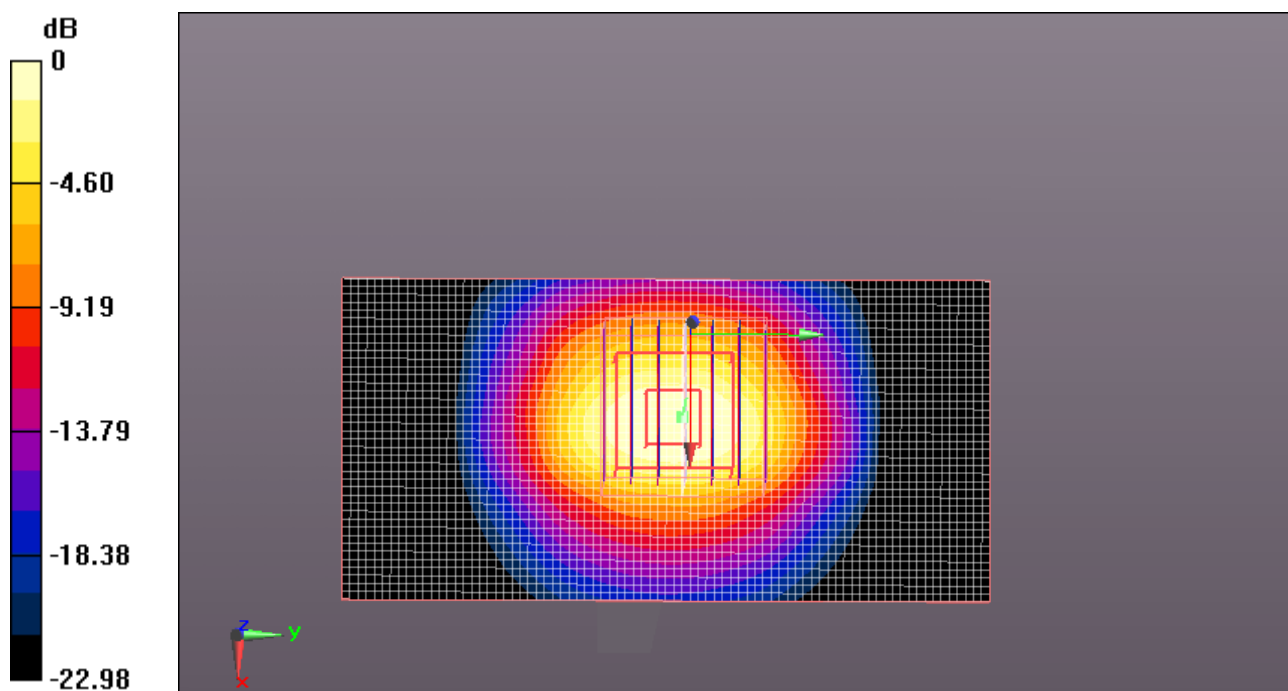

0 dB = 7.340mW/g

## Annex F Probes Calibration Certificates

The System Validation was conducted following the requirements of standard IEEE 1528: 2003 Clause 8.3.

The scanned copy of the calibration certificate of the probe used is as following.

CTL Test Report



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client CTTL (Auden)

Certificate No: ES3-3158\_Jun11

**CALIBRATION CERTIFICATE**

Object ES3DV3 - SN:3158

Calibration procedure(s) QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4  
Calibration procedure for dosimetric E-field probes

Calibration date: June 16, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&amp;TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 31-Mar-11 (No. 217-01372)         | Apr-12                 |
| Power sensor E4412A        | MY41498087      | 31-Mar-11 (No. 217-01372)         | Apr-12                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 29-Mar-11 (No. 217-01369)         | Apr-12                 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 29-Mar-11 (No. 217-01367)         | Apr-12                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 29-Mar-11 (No. 217-01370)         | Apr-12                 |
| Reference Probe ES3DV2     | SN: 3013        | 29-Dec-10 (No. ES3-3013_Dec10)    | Dec-11                 |
| DAE4                       | SN: 654         | 3-May-11 (No. DAE4-654_May11)     | May-12                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Oct-09)  | In house check: Oct-11 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

|                                                                                                                 | Name            | Function              | Signature                                                                             |
|-----------------------------------------------------------------------------------------------------------------|-----------------|-----------------------|---------------------------------------------------------------------------------------|
| Calibrated by:                                                                                                  | Claudio Leubler | Laboratory Technician |  |
| Approved by:                                                                                                    | Katja Pokovic   | Technical Manager     |  |
|                                                                                                                 |                 |                       | Issued: June 16, 2011                                                                 |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                 |                       |                                                                                       |

Certificate No: ES3-3158\_Jun11

Page 1 of 11

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### Glossary:

|                        |                                                                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                    | tissue simulating liquid                                                                                                                          |
| NORM <sub>x,y,z</sub>  | sensitivity in free space                                                                                                                         |
| ConvF                  | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                        |
| DCP                    | diode compression point                                                                                                                           |
| CF                     | crest factor (1/duty_cycle) of the RF signal                                                                                                      |
| A, B, C                | modulation dependent linearization parameters                                                                                                     |
| Polarization $\varphi$ | $\varphi$ rotation around probe axis                                                                                                              |
| Polarization $\theta$  | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\theta = 0$ is normal to probe axis |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 – SN:3158

June 16, 2011

# Probe ES3DV3

## SN:3158

Manufactured: August 13, 2007  
Calibrated: June 16, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

Certificate No: ES3-3158\_Jun11

Page 3 of 11

ES3DV3- SN:3158

June 16, 2011

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3158****Basic Calibration Parameters**

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.09     | 1.23     | 1.22     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 104.2    | 98.6     | 99.2     |               |

**Modulation Calibration Parameters**

| UID   | Communication System Name | PAR  |   | A<br>dB | B<br>dB | C<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-------|---------------------------|------|---|---------|---------|---------|----------|---------------------------|
| 10000 | CW                        | 0.00 | X | 0.00    | 0.00    | 1.00    | 103.8    | $\pm 1.9 \%$              |
|       |                           |      | Y | 0.00    | 0.00    | 1.00    | 109.6    |                           |
|       |                           |      | Z | 0.00    | 0.00    | 1.00    | 105.7    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).<sup>B</sup> Numerical linearization parameter; uncertainty not required.<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



ES3DV3- SN:3158

June 16, 2011

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3158****Calibration Parameter Determined in Head Tissue Simulating Media**

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.24    | 6.24    | 6.24    | 1.00  | 1.00       | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 5.98    | 5.98    | 5.98    | 1.00  | 1.10       | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 5.86    | 5.86    | 5.86    | 1.00  | 1.10       | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.24    | 5.24    | 5.24    | 0.88  | 1.20       | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 5.01    | 5.01    | 5.01    | 0.82  | 1.24       | ± 12.0 %    |
| 1950                 | 40.0                               | 1.40                            | 4.88    | 4.88    | 4.88    | 0.89  | 1.19       | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.41    | 4.41    | 4.41    | 0.75  | 1.30       | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



ES3DV3- SN:3158

June 16, 2011

**DASY/EASY - Parameters of Probe: ES3DV3- SN:3158****Calibration Parameter Determined in Body Tissue Simulating Media**

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.08    | 6.08    | 6.08    | 1.00  | 1.14       | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 5.98    | 5.98    | 5.98    | 1.00  | 1.16       | ± 12.0 %    |
| 900                  | 55.0                               | 1.05                            | 5.90    | 5.90    | 5.90    | 1.00  | 1.14       | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 5.13    | 5.13    | 5.13    | 0.81  | 1.38       | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.81    | 4.81    | 4.81    | 0.82  | 1.35       | ± 12.0 %    |
| 1950                 | 53.3                               | 1.52                            | 4.90    | 4.90    | 4.90    | 0.71  | 1.44       | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.37    | 4.37    | 4.37    | 0.96  | 1.09       | ± 12.0 %    |


<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ES3DV3- SN:3158

June 16, 2011

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

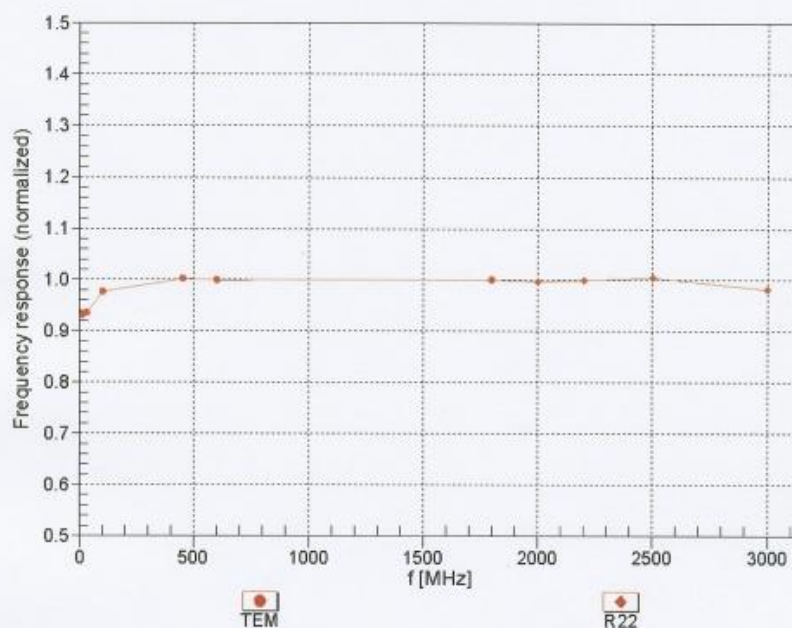


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

ES3DV3- SN:3158



June 16, 2011

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

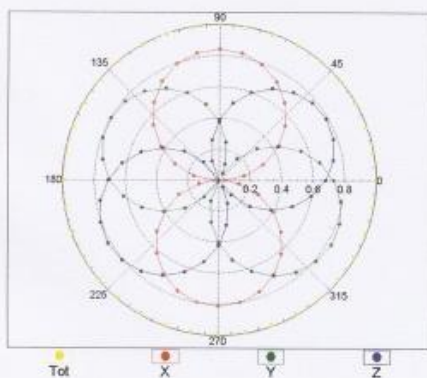

f=1800 MHz,R22

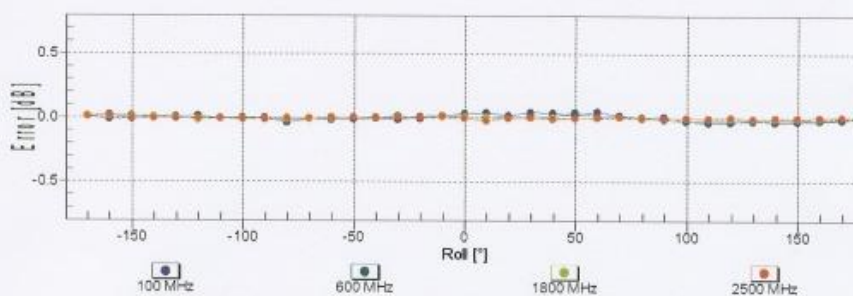
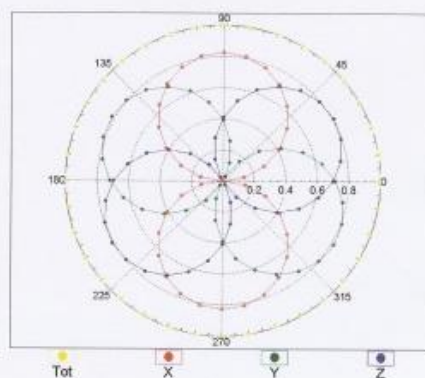


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

ES3DV3- SN:3158

June 16, 2011

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

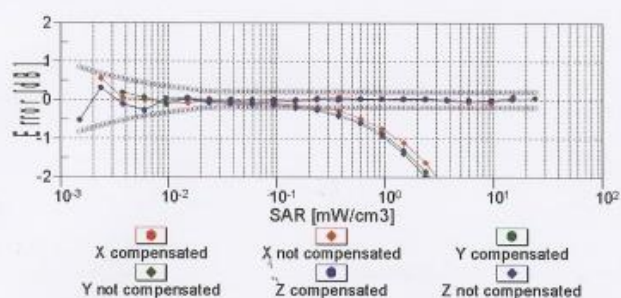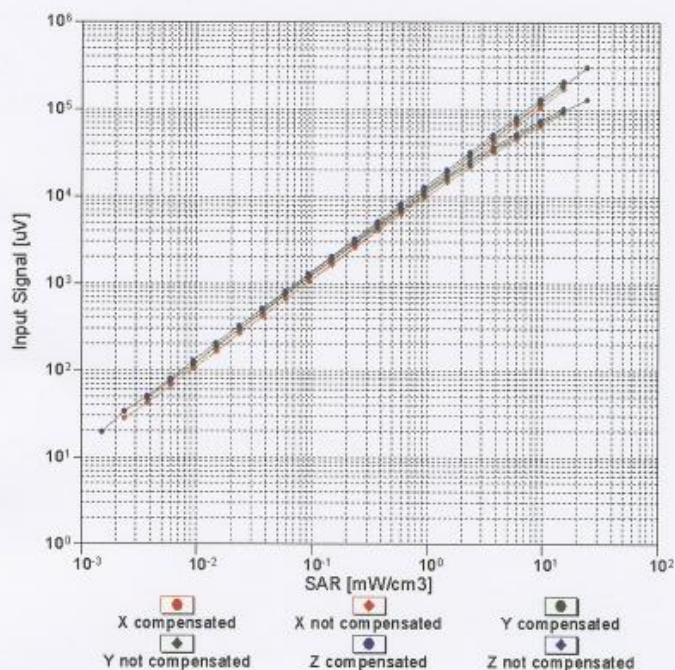


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )




ES3DV3- SN:3158

June 16, 2011

### Conversion Factor Assessment

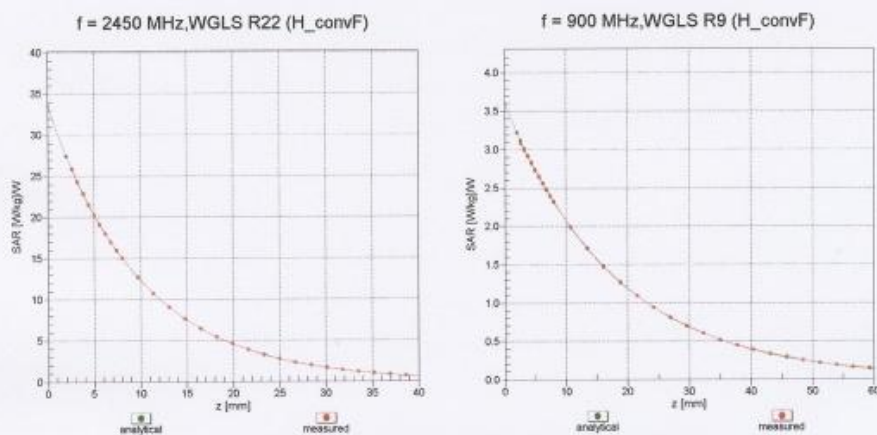

### Deviation from Isotropy in Liquid

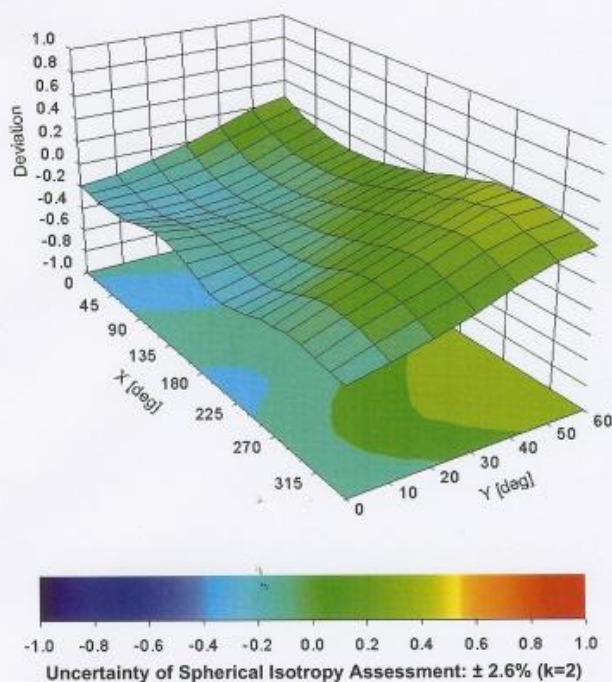Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$ 



ES3DV3- SN:3158

June 16, 2011

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3158****Other Probe Parameters**

|                                               |                |
|-----------------------------------------------|----------------|
| Sensor Arrangement                            | Triangular     |
| Connector Angle (°)                           | Not applicable |
| Mechanical Surface Detection Mode             | enabled        |
| Optical Surface Detection Mode                | disabled       |
| Probe Overall Length                          | 337 mm         |
| Probe Body Diameter                           | 10 mm          |
| Tip Length                                    | 10 mm          |
| Tip Diameter                                  | 4 mm           |
| Probe Tip to Sensor X Calibration Point       | 2 mm           |
| Probe Tip to Sensor Y Calibration Point       | 2 mm           |
| Probe Tip to Sensor Z Calibration Point       | 2 mm           |
| Recommended Measurement Distance from Surface | 3 mm           |

## **Annex G Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.

\_\_\_\_\_ **The End of this Report** \_\_\_\_\_

CTL Test Report