




BUREAU  
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

# Test Report

Report No	EM3334-1
Client	Inncom Ryan Gardner
Address	277 West Main Street Niantic, CT 06357
Phone	860-739-4468
Items tested	L506 Wireless Lamp Controller
FCC ID	GTC202516TXR
IC ID	1609A-202516TXR
FRN	0017924150
Equipment Type	Low Power Communication Device Transmitter
Equipment Code	DXX
Emission Designator	2M41F7D
Standards	47CFR 15.249, RSS 210 Issue 8 and RSS GEN Issue 3
Test Dates	March 26, 28 and April 27, 2012
Results	As detailed within this report
Prepared by	 Chris Reynolds – Test Engineer
Authorized by	 Mairaj Hussain – EMC Supervisor
Issue Date	3/15/2013
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 17 of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



## Contents

Contents.....	2
Product Tested - Configuration Documentation .....	3
Summary.....	4
Test Methodology .....	4
Compliance Statement .....	5
Test Results .....	6
Band-Edge Measurements .....	6
Duty Cycle Correction Factor (DCCF) .....	7
<i>Fundamental Measurements</i> .....	9
<i>Radiated Spurious Emissions</i> .....	11
<i>AC Line Conducted Emissions</i> .....	13
<i>Occupied Bandwidth</i> .....	14
Measurement Uncertainty.....	16
Conditions Of Testing .....	17

Form Final Report REV 2-16-07 (DW)



---

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

**Product Tested - Configuration Documentation**

EUT Configuration																																																
<b>Work Order:</b> M3334 <b>Company:</b> Inncom <b>Company Address:</b> 277 West Main Street Niantic, CT 6357 <b>Contact:</b> Ryan Gardner <b>Person Present:</b> Ryan Gardner																																																
<b>MN</b> <b>SN</b> <b>EUT:</b> L506 <b>Sample 1</b> <b>EUT Description:</b> L506 Lamp Controller <b>EUT Max Frequency:</b> 32MHz <b>EUT Min Frequency:</b> 32MHz <b>EUT ISM Frequency:</b>																																																
<b>Support Equipment:</b> <b>MN</b> <b>SN</b> Lamp -- -- Thermostat -- -- 15W Light Bulb -- -- Inncom AC/DC Converter PS464 -- --																																																
<b>EUT Ports:</b> <table border="1"> <thead> <tr> <th>Port Label</th> <th>Port Type</th> <th>No. of ports</th> <th>No.</th> <th>Populated</th> <th>Cable Type</th> <th>Shielded</th> <th>Ferrites</th> <th>Length</th> <th>Max Length</th> <th>In/Out</th> <th>NEBS Type</th> <th>Unpopulated Reason</th> </tr> </thead> <tbody> <tr> <td>AC Power</td> <td>AC Power</td> <td>1</td> <td>1</td> <td>other</td> <td>no</td> <td>none</td> <td>N/A</td> <td>N/A</td> <td>N/A</td> <td>in</td> <td></td> <td></td> </tr> <tr> <td>Output</td> <td>AC Power</td> <td>1</td> <td>1</td> <td>other</td> <td>no</td> <td>none</td> <td>N/A</td> <td>N/A</td> <td>N/A</td> <td>in</td> <td></td> <td></td> </tr> </tbody> </table>										Port Label	Port Type	No. of ports	No.	Populated	Cable Type	Shielded	Ferrites	Length	Max Length	In/Out	NEBS Type	Unpopulated Reason	AC Power	AC Power	1	1	other	no	none	N/A	N/A	N/A	in			Output	AC Power	1	1	other	no	none	N/A	N/A	N/A	in		
Port Label	Port Type	No. of ports	No.	Populated	Cable Type	Shielded	Ferrites	Length	Max Length	In/Out	NEBS Type	Unpopulated Reason																																				
AC Power	AC Power	1	1	other	no	none	N/A	N/A	N/A	in																																						
Output	AC Power	1	1	other	no	none	N/A	N/A	N/A	in																																						
<b>Software / Operating Mode Description:</b> Thermostat is wirelessly pinging the EUT																																																



## Summary

This test report supports an application for certification of a transmitter operating pursuant to 47 CFR 15.249, RSS GEN Issue 3, and RSS-210, Issue 8. The product is the L506 Wireless Lamp Controller. It is a transmitter that operates in the range 2400 – 2483.5 MHz.

We found that the product met the above requirements without modification. The test sample was received in good condition.

## Test Methodology

Radiated emission and AC Line conducted testing was performed according to the procedures specified in ANSI C63.4 (2003) and RSS-GEN. Radiated Emissions were maximized by rotating the device around three orthogonal axes as well as varying the test antenna's height and polarity. The device antenna cannot be maximized separately.

The product was tested with modulation on and peak readings were compared against the average limit presented in section CFR 15.249.

The EUT operating voltage is 120V/60Hz.

The following bandwidths were used during radiated spurious and line conducted emissions.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



**Compliance Statement**

The L506 Wireless Lamp Controller has been found to conform to the following parts of 47 CFR and RSS 210 as detailed below:

RSS-GEN	RSS 210	Part 15	Comments
5.4		15.15(b)	There are no controls accessible to the user that vary the output power.
5.2		15.19	The label is shown in the label exhibit.
7.1.3		15.21	Information to the user is shown in the instruction manual exhibit.
		15.27	No special accessories are required for compliance.
7.1.2		15.203	The antenna for this device is hardwired to the PCB.
7.2.4		15.207	AC conducted emissions were performed.
	A2.9(a)	15.249(a)	The fundamental and harmonics meet the limits in 15.249(a)
	A2.9(b)	15.249(d)	Spurious emissions meet the limits in 15.209.
4.6.1			99% emissions bandwidth plot is provided.



## Test Results

### Band-Edge Measurements

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Band Edge measurement, 15.249 (d)											Work Order: M3334						
Date: 27-Dec-12				Company: Inncom				EUT Operating Voltage/Frequency: 120V/60Hz									
Engineer: Edward Breen				Humidity: 20%				Pressure: 994mb									
Temp: 24.3°C												Measurement Distance: 3 m					
<b>Notes:</b> Duty cycle: 4.35ms/100ms																	
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dB <sub>1</sub> uV)	Average Reading (dB <sub>1</sub> uV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB <sub>1</sub> uV/m)	Adjusted Avg Reading (dB <sub>1</sub> uV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average					
									Limit (dB <sub>1</sub> uV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB <sub>1</sub> uV/m)	Margin (dB)	Result (Pass/Fail)			
H	2399.999	35.51	8.3	19.7	28.1	4.6	48.5	21.3	74.0	-25.5	Pass	54.0	-32.7	Pass			
V	2399.999	33.23	6.0	19.7	28.1	4.6	46.2	19.0	74.0	-27.8	Pass	54.0	-35.0	Pass			
H	2483.501	53.3	26.1	19.9	28.4	4.2	66.0	38.8	74.0	-8.0	Pass	54.0	-15.2	Pass			
V	2483.501	46.9	19.7	19.9	28.4	4.2	59.6	32.4	74.0	-14.4	Pass	54.0	-21.6	Pass			
<b>Table Result:</b>		Pass	by	-8.0	dB				<b>Worst Freq:</b> 2483.5 MHz								
Test Site: EMI Chamber 1			Cable 1: Asset #1505			Cable 2: Asset #1507			Antenna: Yellow Horn								
Analyzer: Gold			Preamp: Brown														

Rev.12/26/2012

Spectrum Analyzers / Receivers /Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Gold	100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	2/3/2013
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Cat	II	Calibration Due
EMI Chamber 1	719150	2762A-6	A-0015				2/16/2014
Preamps /Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Brown	1-18GHz	CS	CS	N/A	1523	II	1/10/2013
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Yellow Horn	1-18GHz	3115	EMCO	9608-4898	37	I	6/17/2013
Cables	Range	Mfr			Cat		Calibration Due
Asset #1505	9kHz - 18GHz	Florida RF			II		2/9/2013
Asset #1507	9kHz - 26.5GHz	Florida RF			II		1/31/2013
Meteorological Meters	MN	Mfr	SN	Asset	Cat	Calibration Due	
Weather Clock (Pressure Only)	BA928	Oregon Scientific	C3166-1	831	I		3/28/2013
CHAMBER1 Thermohygrometer	35519-044	Control Company	72457642	1345	II		8/19/2013

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828




page 6 of 18

Testing Cert. No. 1627-01

## Duty Cycle Correction Factor (DCCF)

In any 100ms time period, the product could be on for 5.8ms  
DCCF =  $20 \times \log((5.8)/100)$   
DCCF = -24.7dB

A duty cycle correction factor of -24.7dB was applied

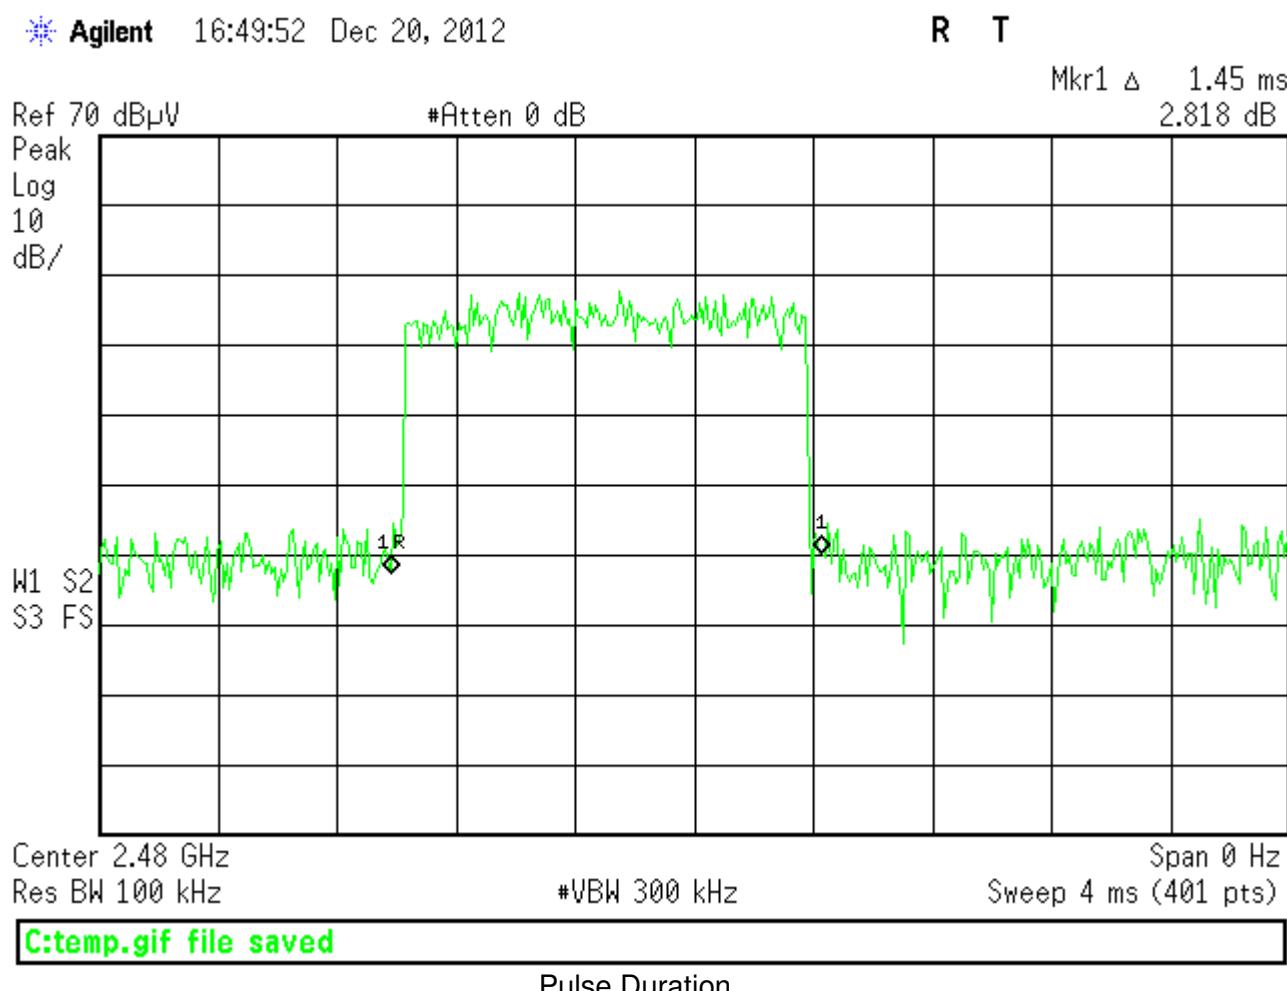


Agilent 17:15:34 Dec 20, 2012

R T

Mkr1 Δ 100.1 ms  
0.13 dBRef 70 dB $\mu$ V

#Atten 0 dB

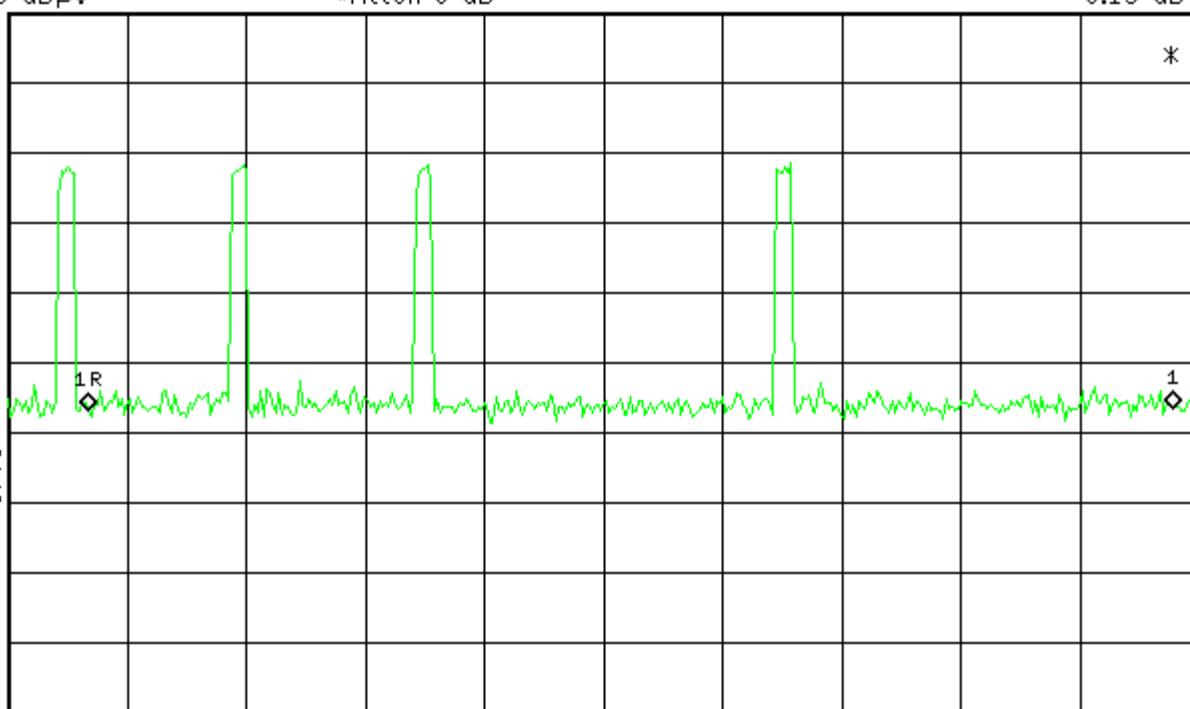Peak  
Log  
10  
dB/Center 2.48 GHz  
Res BW 100 kHz

#VBW 300 kHz

Span 0 Hz  
Sweep 110 ms (401 pts)

C:\temp.gif file saved

Number of Pulses per 100mS



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 8 of 18

Testing Cert. No. 1627-01

## Fundamental Measurements

### LIMITS

The field strength from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 - 928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

[15.249(a)]

### MEASUREMENTS / RESULTS

Adjusted Peak Reading = Peak Reading - Preamp Factor + Antenna Factor + Cable Factor

Adjusted Average Reading = Adjusted Peak Reading - DCCF

Radiated Emissions Table																							
Date: 18-Dec-12		Company: Inncom					Work Order: M3334																
Engineer: Edward Breen		EUT Desc: L506 Lamp Controller					EUT Operating Voltage/Frequency: 120V/60Hz																
Temp: 21.7°C		Humidity: 22%					Pressure: 991mbar																
Measurement Distance: 3 m																							
Notes: Duty cycle: 5.8ms/100ms -24.7dB																							
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dB $\mu$ V)	Average Reading (dB $\mu$ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB $\mu$ V/m)	Adjusted Avg Reading (dB $\mu$ V/m)	Peak			Average											
									Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)									
<b>Upright</b>																							
H	2405.0	84.0	59.3	21.7	28.2	3.3	93.8	69.1	113.98	-20.2	Pass	93.98	-24.9	Pass									
	2405.0	81.3	56.6	21.7	28.2	3.3	91.1	66.4	113.98	-22.9	Pass	93.98	-27.6	Pass									
V	2445.0	84.3	59.6	21.8	28.3	3.3	94.1	69.4	113.98	-19.9	Pass	93.98	-24.6	Pass									
	2445.0	83.5	58.8	21.8	28.3	3.3	93.3	68.6	113.98	-20.7	Pass	93.98	-25.4	Pass									
H	2480.0	83.9	59.2	21.8	28.4	3.3	93.8	69.1	113.98	-20.2	Pass	93.98	-24.9	Pass									
	2480.0	82.0	57.3	21.8	28.4	3.3	91.9	67.2	113.98	-22.1	Pass	93.98	-26.8	Pass									
Side	2405.0	83.9	59.2	21.7	28.2	3.3	93.7	69.0	113.98	-20.3	Pass	93.98	-25.0	Pass									
	2405.0	79.0	54.3	21.7	28.2	3.3	88.8	64.1	113.98	-25.2	Pass	93.98	-29.9	Pass									
H	2445.0	82.0	57.3	21.8	28.3	3.3	91.8	67.1	113.98	-22.2	Pass	93.98	-26.9	Pass									
	2445.0	77.4	52.7	21.8	28.3	3.3	87.2	62.5	113.98	-26.8	Pass	93.98	-31.5	Pass									
H	2480.0	83.4	58.7	21.8	28.4	3.3	93.3	68.6	113.98	-20.7	Pass	93.98	-25.4	Pass									
	2480.0	78.2	53.5	21.8	28.4	3.3	88.1	63.4	113.98	-25.9	Pass	93.98	-30.6	Pass									
<b>Upside-down</b>																							
H	2405.0	83.1	58.4	21.7	28.2	3.3	92.9	68.2	113.98	-21.1	Pass	93.98	-25.8	Pass									
	2405.0	79.6	54.9	21.7	28.2	3.3	89.4	64.7	113.98	-24.6	Pass	93.98	-29.3	Pass									
H	2445.0	82.9	58.2	21.8	28.3	3.3	92.7	68.0	113.98	-21.3	Pass	93.98	-26.0	Pass									
	2445.0	78.7	54.0	21.8	28.3	3.3	88.5	63.8	113.98	-25.5	Pass	93.98	-30.2	Pass									
H	2480.0	81.6	56.9	21.8	28.4	3.3	91.5	66.8	113.98	-22.5	Pass	93.98	-27.2	Pass									
	2480.0	78.5	53.8	21.8	28.4	3.3	88.4	63.7	113.98	-25.6	Pass	93.98	-30.3	Pass									
<b>Table Result:</b>		Pass		by -19.9 dB						<b>Worst Freq:</b>		2445.0 MHz											
Test Site: 1DCC-OATS-3M-I		Table 1: EMIR-HIGH-22																					
Analyzer: Rental SA#1		Preamp: Asset #1517								Antenna: Yellow Horn													

Rev.12/16/2012

Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Rental SA #1 (Brown)		9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	2/14/2013
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range	Cat	Calibration Due	
1DCC-OATS-3M-I		719150	2762A-8	A-0015	30-1000MHz	II	12/7/2012	
Preamps /Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due
1517 HF Preamp		1-20GHz	CS	CS	N/A	1517	II	4/17/2013
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Yellow Horn		1-18GHz	3115	EMCO	9608-4898	37	I	6/17/2013
Cables		Range		Mfr		Cat	Calibration Due	
REMI-High-22		9kHz - 15GHz		C-S		II	1/31/2013	
Meteorological Meters		MN		Mfr	SN	Asset	Cat	Calibration Due
Temp./Humidity/Atm. Pressure Gauge		7400 Perception II		Davis	N/A	965	I	4/4/2013

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 10 of 18

## Radiated Spurious Emissions

### LIMITS

15.249 (d) *Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.*

### MEASUREMENTS / RESULTS

Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor

Adjusted Average Reading = Adjusted Peak Reading - DCCF

Radiated Emissions Table												
Test Data			EUT Description				Test Conditions					
Test Data			EUT Description				Test Conditions					
Date: 17-Dec-12	Company: Inncom				Work Order: M3334							
Engineer: Edward Breen	EUT Desc: L506 Wireless Lamp Controller				EUT Operating Voltage/Frequency: 120V/60Hz							
Temp: 23.8°C	Humidity: 18%				Pressure: 1010mBar							
Frequency Range: 30-1000MHz			Measurement Distance: 3 m									
Notes: Transmit (Tx) mode: 2405MHz, 4.5dB power setting, modulated												
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dB $\mu$ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dB $\mu$ V/m)	---			FCC Class B		
							Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)
V	31.49	33.1	25.7	20.4	0.5	28.3	---	---	---	40.0	-11.7	Pass
H	31.49	15.8	25.7	20.4	0.5	11.0	---	---	---	40.0	-29.0	Pass
V	41.4	28.0	25.7	13.2	0.5	16.0	---	---	---	40.0	-24.0	Pass
H	41.4	14.0	25.7	13.2	0.5	2.0	---	---	---	40.0	-38.0	Pass
H	97.29	27.6	25.7	9.3	0.7	11.9	---	---	---	43.5	-31.6	Pass
V	97.56	28.5	25.7	9.4	0.7	12.9	---	---	---	43.5	-30.6	Pass
V	122.7	20.4	25.7	14.0	0.9	9.6	---	---	---	43.5	-33.9	Pass
H	122.7	21.4	25.7	14.0	0.9	10.6	---	---	---	43.5	-32.9	Pass
V	171.8	22.7	25.8	11.9	1.1	9.9	---	---	---	43.5	-33.6	Pass
H	171.8	15.2	25.8	11.9	1.1	2.4	---	---	---	43.5	-41.1	Pass
V	196.3	23.0	25.8	12.2	1.2	10.6	---	---	---	43.5	-32.9	Pass
H	196.3	16.1	25.8	12.2	1.2	3.7	---	---	---	43.5	-39.8	Pass
V	466.4	20.1	25.8	17.2	1.9	13.4	---	---	---	46.0	-32.6	Pass
H	466.4	27.7	25.8	17.2	1.9	21.0	---	---	---	46.0	-25.0	Pass
V	613.6	15.4	26.4	18.7	2.3	10.0	---	---	---	46.0	-36.0	Pass
H	613.6	21.7	26.4	18.7	2.3	16.3	---	---	---	46.0	-29.7	Pass
<b>Table Result:</b> Pass by -11.7 dB							<b>Worst Freq:</b> 31.49 MHz					
Test Site: EMI Chamber 2			Cable 1: Asset #1506				Cable 2: Asset #1507					
Analyzer: Gold			Preamp: Green				Antenna: Red-White					



Rev.12/16/2012

<b>Spectrum Analyzers / Receivers /Preselectors</b> Gold		<b>Range</b> 100Hz-26.5 GHz	<b>MN</b> E4407B	<b>Mfr</b> Agilent	<b>SN</b> MY45113816	<b>Asset</b> 1284	<b>Cat</b> I	<b>Calibration Due</b> 2/3/2013
<b>Radiated Emissions Sites</b> EMI Chamber 2		<b>FCC Code</b> 719150	<b>IC Code</b> 2762A-7	<b>VCCI Code</b> A-0015	<b>Range</b>		<b>Cat</b> II	<b>Calibration Due</b> 2/15/2014
<b>Preamps /Couplers Attenuators / Filters</b> Green		<b>Range</b> 0.009-2000MHz	<b>MN</b> ZFL-1000-LN	<b>Mfr</b> CS	<b>SN</b> N/A	<b>Asset</b> 802	<b>Cat</b> II	<b>Calibration Due</b> 9/19/2013
<b>Antennas</b> Red-White Bilog		<b>Range</b> 30-2000MHz	<b>MN</b> JB1	<b>Mfr</b> Sunol	<b>SN</b> A091604-1	<b>Asset</b> 1105	<b>Cat</b> I	<b>Calibration Due</b> 1/28/2013
<b>Cables</b> Asset #1506 Asset #1507		<b>Range</b> 9kHz - 18GHz 9kHz - 26.5GHz		<b>Mfr</b> Florida RF Florida RF			<b>Cat</b> II II	<b>Calibration Due</b> 2/2/2013 1/31/2013
<b>Meteorological Meters</b> Weather Clock (Pressure Only) CHAMBER2 Thermohygrometer		<b>MN</b> BA928 35519-044	<b>Mfr</b> Oregon Scientific Control Company	<b>SN</b> C3166-1 72457639	<b>Asset</b> 831 1347	<b>Cat</b> I II	<b>Calibration Due</b> 3/28/2013 8/19/2013	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

**Radiated Emissions Table**

Date: 17-Dec-12	Company: Inncom	Work Order: M3334												
Engineer: Edward Breen	EUT Desc: L506 Wireless Lamp Controller	EUT Operating Voltage/Frequency: 120V/60Hz												
Temp: 23.8°C	Humidity: 18%	Pressure: 1010mBar												
<b>Frequency Range:</b> 1-26.5GHz		<b>Measurement Distance:</b> 3 m												
<b>Notes:</b> Transmit (Tx) mode: 2405MHz, 4.5dB power setting, modulated RBW = 1MHz, VSB = 3MHz, and 30Hz for average reading														
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dB <sub>u</sub> V)	Average Reading (dB <sub>u</sub> V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB <sub>u</sub> V/m)	Adjusted Avg Reading (dB <sub>u</sub> V/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dB <sub>u</sub> V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB <sub>u</sub> V/m)	Margin (dB)	Result (Pass/Fail)
V H	4810.0 4810.0	35.3 36.8	27.3 27.6	17.4 17.4	32.9 32.9	5.8 5.8	56.6 58.1	48.6 48.9	74.0 74.0	-17.4 -15.9	Pass Pass	54.0 54.0	-5.4 -5.1	Pass Pass
<b>Table Result:</b>		Pass	by	-5.1	dB			<b>Worst Freq:</b>		4810.0	MHz			
Test Site: EMI Chamber 2		Cable 1: Asset #1506		Cable 2: Asset #1507										
Analyzer: Gold		Preamp: Brown		Antenna: Orange Horn										

Rev.12/16/2012

<b>Spectrum Analyzers / Receivers /Preselectors</b> Gold		<b>Range</b> 100Hz-26.5 GHz	<b>MN</b> E4407B	<b>Mfr</b> Agilent	<b>SN</b> MY45113816	<b>Asset</b> 1284	<b>Cat</b> I	<b>Calibration Due</b> 2/3/2013
<b>Radiated Emissions Sites</b> EMI Chamber 2		<b>FCC Code</b> 719150	<b>IC Code</b> 2762A-7	<b>VCCI Code</b> A-0015	<b>Range</b>		<b>Cat</b> II	<b>Calibration Due</b> 2/15/2014
<b>Preamps /Couplers Attenuators / Filters</b> Brown		<b>Range</b> 1-18GHz	<b>MN</b> CS	<b>Mfr</b> CS	<b>SN</b> N/A	<b>Asset</b> 1523	<b>Cat</b> II	<b>Calibration Due</b> 1/10/2013
<b>Antennas</b> Orange Horn		<b>Range</b> 1-18GHz	<b>MN</b> 3115	<b>Mfr</b> EMCO	<b>SN</b> 0004-6123	<b>Asset</b> 390	<b>Cat</b> I	<b>Calibration Due</b> 7/27/2013
<b>Cables</b> Asset #1506 Asset #1507		<b>Range</b> 9kHz - 18GHz 9kHz - 26.5GHz		<b>Mfr</b> Florida RF Florida RF			<b>Cat</b> II II	<b>Calibration Due</b> 2/2/2013 1/31/2013
<b>Meteorological Meters</b> Weather Clock (Pressure Only) CHAMBER2 Thermohygrometer		<b>MN</b> BA928 35519-044	<b>Mfr</b> Oregon Scientific Control Company	<b>SN</b> C3166-1 72457639	<b>Asset</b> 831 1347	<b>Cat</b> I II	<b>Calibration Due</b> 3/28/2013 8/19/2013	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



## AC Line Conducted Emissions

### LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dB $\mu$ V)	Average limit (dB $\mu$ V)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

### MEASUREMENTS / RESULTS

#### AC Conducted Emissions Data Table

Date: 17-Dec-12		Company: Inncom		Work Order: M3334							
Engineer: Chris Bramley		EUT Desc: L506 Lamp Controller		Pressure: 1007 mBar							
Temp: 24.3 °C		Humidity: 21%									
Notes:											
Frequency (MHz)	Quasi-Peak Readings		Average Readings		FCC/CISPR Class B						
	QP1 (dB $\mu$ V)	QP2 (dB $\mu$ V)	AVG1 (dB $\mu$ V)	AVG2 (dB $\mu$ V)							
	L1 (dB)	L2 (dB)			OP Limit (dB $\mu$ V)	Margin (dB)	Result (Pass/Fail)	AVG Limit (dB $\mu$ V)	Margin (dB)	Result (Pass/Fail)	
0.16	9.9	9.9	2.8	2.8	-0.2	-0.1	0.0	-20.8	65.6	-34.6	Pass
0.17	10.3	10.3	2.3	2.5	-0.2	-0.1	0.0	-20.8	64.9	-33.6	Pass
0.20	8.2	8.7	1.2	1.7	-0.2	-0.1	-0.1	-20.8	63.5	-33.8	Pass
0.51	6.7	8.4	-0.6	2.1	0.0	0.0	0.0	-20.8	56.0	-26.7	Pass
0.55	6.3	8.3	-1.1	1.7	0.0	-0.1	0.0	-20.8	56.0	-26.8	Pass
29.98	6.2	3.6	-1.1	1.7	0.0	-0.1	-0.3	-20.8	60.0	-32.8	Pass
<b>Result:</b> Pass		<b>Worst Margin:</b>		<b>-23.0 dB</b>		<b>Frequency:</b> 0.511 MHz					
Measurement Device: LISN ASSET 1728(Line 1) LISN ASSET 1729(Line 2)			Cable: CEMI-02		Spectrum Analyzer: Yellow						
			Attenuator: 20dB Atten-4		Site: CEMI 1						

Rev.12/16/2012

Spectrum Analyzers / Receivers /Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Yellow	9kHz-2.9GHz	8594E	Agilent	3523A01958	100	I	4/13/2013
LISNs/Measurement Probes	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
LISN Asset 1728	150kHz-30MHz	LI-150A	Com-Power	201084	1728	I	1/30/2013
LISN Asset 1729	150kHz-30MHz	LI-150A	Com-Power	201085	1729	I	1/30/2013
Conducted Test Sites (Mains / Telco)	FCC Code		VCCI Code		Cat	Calibration Due	
CEMI 1	719150		A-0015		III	NA	
Cables	Range		Mfr		Cat	Calibration Due	
CEMI-02	9kHz - 2GHz		C-S		II	4/10/2013	
Attenuators	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
20dB Atten-4	9kHz-2GHz	N/A			II		12/6/2013
Meteorological Meters		MN	Mfr	SN	Asset	Cat	Calibration Due
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/28/2013
CEMI1 Thermohygrometer		35519-044	Control Company	72457738	1335	II	8/19/2013

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 13 of 18


## Occupied Bandwidth

### REQUIREMENT

When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. [RSS-GEN 4.6.1]

\* Agilent 13:28:16 Dec 20, 2012

R T

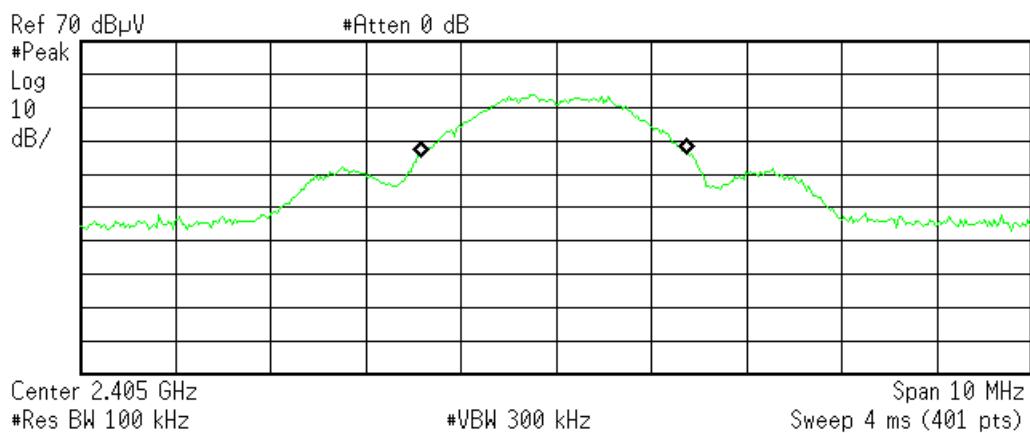

Occupied Bandwidth  
 2.8032 MHz

Occ BW % Pwr      99.00 %  
 x dB      -26.00 dB

Transmit Freq Error      -17.895 kHz  
 x dB Bandwidth      5.175 MHz

C:\temp.gif file saved

Low Channel




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 14 of 18

\* Agilent 13:24:12 Dec 20, 2012

R T

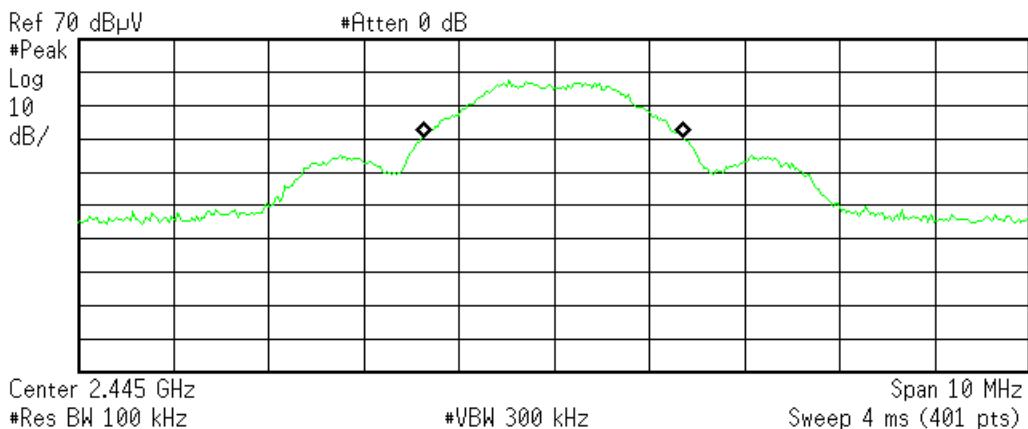

Occupied Bandwidth  
2.7448 MHz

Occ BW % Pwr      99.00 %  
x dB      -26.00 dB


Transmit Freq Error      -14.478 kHz  
x dB Bandwidth      5.093 MHz

C:\temp.gif file saved

Middle Channel

\* Agilent 13:26:48 Dec 20, 2012

R T

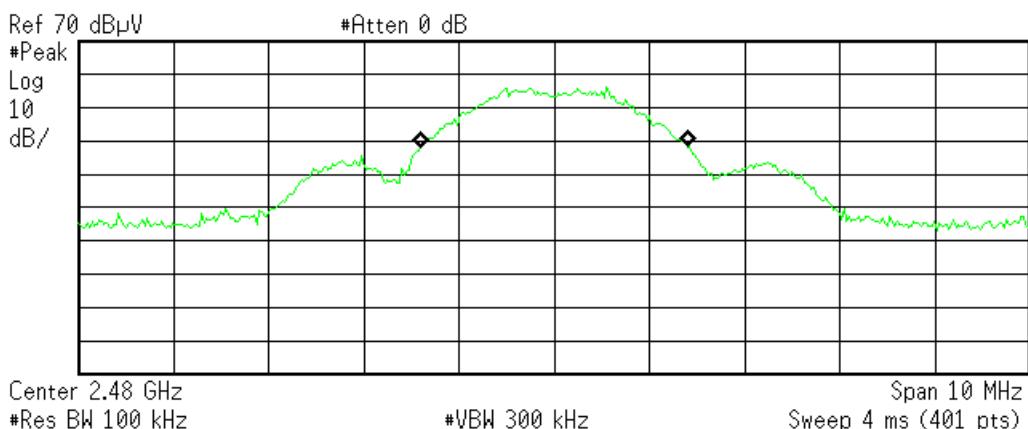

Occupied Bandwidth  
2.8000 MHz

Occ BW % Pwr      99.00 %  
x dB      -26.00 dB

Transmit Freq Error      -7.075 kHz  
x dB Bandwidth      5.156 MHz

C:\temp.gif file saved

High Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 15 of 18

## Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz) NIST CISPR	5.6dB 4.6dB	N/A 5.2dB (Ucispr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions NIST CISPR	3.9dB 3.6dB	N/A 3.6dB (Ucispr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	$3.23 \times 10^{-8}$	$1 \times 10^{-7}$
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



## Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS", "MTL", "ACTS", "MTL-ACTS" and CURTIS-STRAUSS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only were such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.



13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.

14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

Rev.160009121(2) #684340 v13CS

