


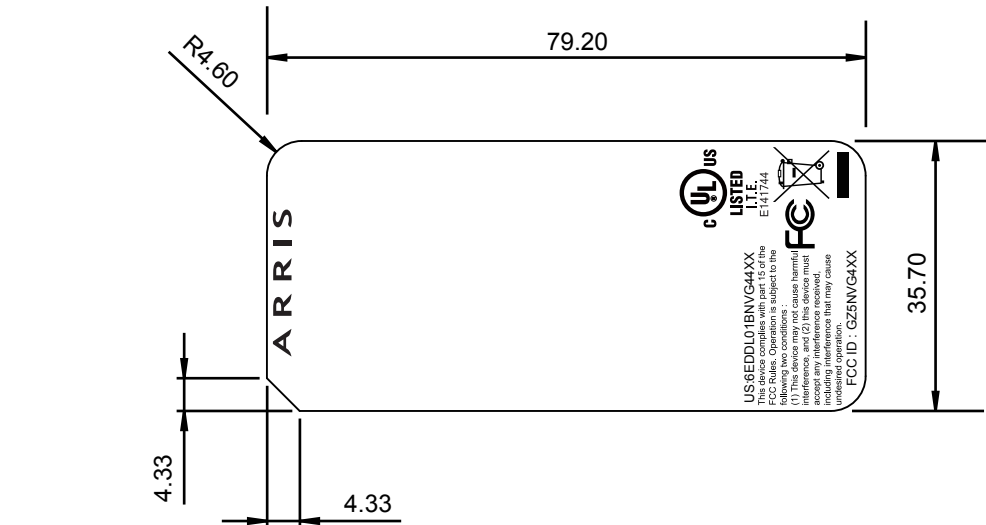


- Notes:
- 1. Size: 79.2*35.7 mm
 - 2. Material: Flexcon 21944E (See Tab-1)

METERIAL MAKER	Flexcon
MODEL NO	21944E
SURFACE MATERIAL THICKNESS (mm)	0.05 ± 10%
ADHESIVE NO	Arcylic
ADHESIVE THICKNESS (mm)	0.02
TOTAL THICKNESS (mm)	0.07 ± 10%

TAB-1

- 3. Adhesive (背膠種類): Arcylic
- 4. Adhesive thickness (厚度及公差): 0.07 +/- 10%
- 5. Adhesive to steel (180度鋼粘著力): 1.0min kg/25mm
- 6. Initial Tack (初粘力): 6min #/boll
- 7. Relese Power (90度剝離力): 7±3 kg/25mm
- 8. Holding power (持粘力/保持力): 1min hr/kg/20mm
- 9. Package Styles: Reel or sheet
- 10. This part must comply with ROHS.

VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00			2016/05/13	First Release	Dennis

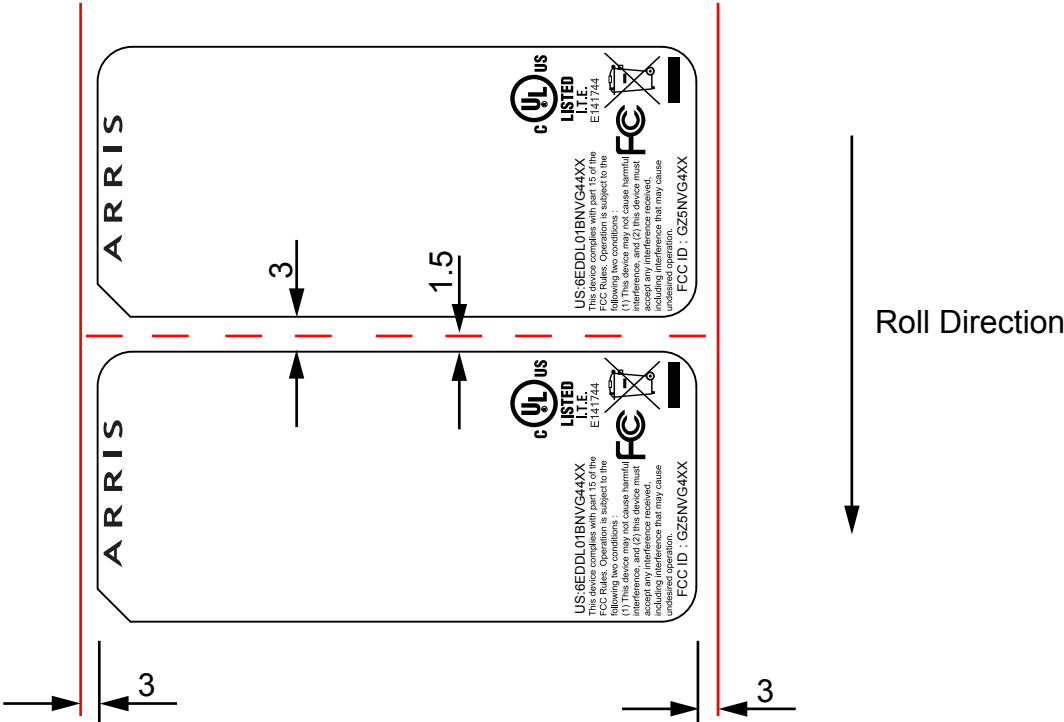

MATERIAL(SPEC.)										SCALE	FOXCONN HON HAI PRECISION IND. CO., LTD. CNSBG		
See Notes										1:1			
FINISH										SHEET			
See Notes										1/1	PART NAME		
											LABEL BLANK 79.2*35.7mm REV.00 WHITE GP U62L051.10		
										UNIT			
										MM			
										SIZE			
										A3			
										VIEW			
										TRL			
										ANGLE			
DRAFT TOLERANCE										±0.20 °			
										CRITICAL DIM. MARK			